

**TEST REPORT****Report No.: 22090947HKG-002****HODL TECH PRIVATE LIMITED****Application For Certification  
(Original Grant)****FCC ID: 2A9MU-X1-VAULT**

Transceiver

**Prepared and Checked by:****Approved by:**

Signed on File

Wong Cheuk Ho, Herbert  
Lead EngineerWong Kwok Yeung, Kenneth  
Assistant Supervisor  
Date: December 08, 2022

## TEST REPORT

### GENERAL INFORMATION

<b>Grantee:</b>	HODL TECH PRIVATE LIMITED
<b>Grantee Address:</b>	68 Circular Road, #02-01, 049422, Singapore.
<b>Contact Person:</b>	Rohan Agarwal
<b>Tel:</b>	+919711499114
<b>E-mail:</b>	rohan@cypherock.com
<b>Brand Name:</b>	CYPHEROCK
<b>Model:</b>	X1 Vault
<b>Type of EUT:</b>	Transceiver (13.56MHz NFC card reader)
<b>Description of EUT:</b>	Hardware Wallet Device
<b>Serial Number:</b>	N/A
<b>FCC ID:</b>	2A9MU-X1-VAULT
<b>Date of Sample Submitted:</b>	September 23, 2022
<b>Date of Test:</b>	September 23, 2022 to November 28, 2022
<b>Report Date:</b>	December 08, 2022
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Relative Humidity: 10 to 90%
<b>Conclusion:</b>	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 Certification.

**TEST REPORT****SUMMARY OF TEST RESULT**

Test Specification	Reference	Results
Transmitter Field Strength	15.225	Pass
Frequency Stability		
Radiated Emission	15.209	Pass
Radiated Emission on the Bandedge		
Radiated Emission in Restricted Bands	15.205	Pass

The equipment under test is found to be complying with the following standards:  
FCC Part 15, October 1, 2021 Edition

Note:

1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

## TEST REPORT

### TABLE OF CONTENTS

<b>1.0 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1    Product Description .....	5
1.2    Related Submittal(s) Grants.....	5
1.3    Test Methodology .....	5
1.4    Test Facility.....	5
<b>2.0 SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
2.1    Justification .....	6
2.2    EUT Exercising Software.....	6
2.3    Special Accessories.....	6
2.4    Measurement Uncertainty.....	6
2.5    Support Equipment List and Description .....	7
<b>3.0 EMISSION RESULTS.....</b>	<b>8</b>
3.1    Field Strength Calculation.....	8
3.2    Radiated Emission Configuration Photograph.....	9
3.3    Radiated Emission Data .....	9
3.4    Conducted Emission Configuration Photograph .....	9
3.5    Conducted Emission Data .....	9
<b>4.0 EQUIPMENT PHOTOGRAPHS.....</b>	<b>14</b>
<b>5.0 PRODUCT LABELLING .....</b>	<b>14</b>
<b>6.0 TECHNICAL SPECIFICATIONS .....</b>	<b>14</b>
<b>7.0 INSTRUCTION MANUAL .....</b>	<b>14</b>
<b>8.0 MISCELLANEOUS INFORMATION .....</b>	<b>15</b>
8.1    Measured Bandwidth / Radiated Emission on the Bandedge .....	15
8.2    Discussion of Pulse Desensitization .....	16
8.3    Calculation of Average Factor .....	16
8.4    Emissions Test Procedures.....	17
8.5    Occupied Bandwidth .....	20
<b>9.0 CONFIDENTIALITY REQUEST.....</b>	<b>21</b>
<b>10.0 EQUIPMENT LIST .....</b>	<b>21</b>

## TEST REPORT

### 1.0 GENERAL DESCRIPTION

#### 1.1 Product Description

The Equipment Under Test (EUT), is a Hardware wallet device which consists of a 13.56MHz NFC card reader. The EUT is powered by USB-Type C port (5VDC)

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

#### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

#### 1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been placed on file with the FCC.

## TEST REPORT

### 2.0 SYSTEM TEST CONFIGURATION

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by 120VAC (5VDC from USB Port of Notebook computer).

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emission at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step-by-step procedure for maximizing emissions led to the data report in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

Below 30MHz (Use Loop Antenna).

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 2.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

#### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

#### 2.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level (k=2). In case, the measured value is within guard band region, undetermined decision will be used.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

**TEST REPORT****2.5 Support Equipment List and Description**

Description	Remark
1 x LAN cable with length of 20 meter long with termination	Provided by Intertek
HP Notebook Computer (Adaptor Model: HSTNN-CA15)	Provided by Intertek
1 x USB cable with length of 45 cm long	Provided by Applicant

## TEST REPORT

### 3.0 EMISSION RESULTS

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where      FS    =    Field Strength in dB $\mu$ V/m

        RA    =    Receiver Amplitude (including preamplifier) in dB $\mu$ V

        AF    =    Antenna Factor in dB

        CF    =    Cable Attenuation Factor in dB

        AG    =    Amplifier Gain in dB

        AV    =    Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where      FS    =    Field Strength in dB $\mu$ V/m

        RR    =    RA - AG - AV in dB $\mu$ V

        LF    =    CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29.0 dB and average factor of 5.0 dB are subtracted, giving a field strength of 27.0 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 52.0 \text{ dB}\mu\text{V}/\text{m}$$

$$AF = 7.4 \text{ dB}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V}/\text{m})/20] = 22.4 \mu\text{V}/\text{m}$$

## TEST REPORT

### 3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 40.674MHz and 325.446MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 1.2 dB

### 3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 13.560 MHz

For electronic filing, the worst-case line-conducted configuration photographs are saved with filename: conducted photo.pdf.

### 3.5 Conducted Emission Data


For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Pass by 1.8 dB

## TEST REPORT

### CONDUCTED EMISSION

Model: X1 Vault  
 Date of Test: November 28, 2022  
 Worst-Case Operating Mode: NFC Operating

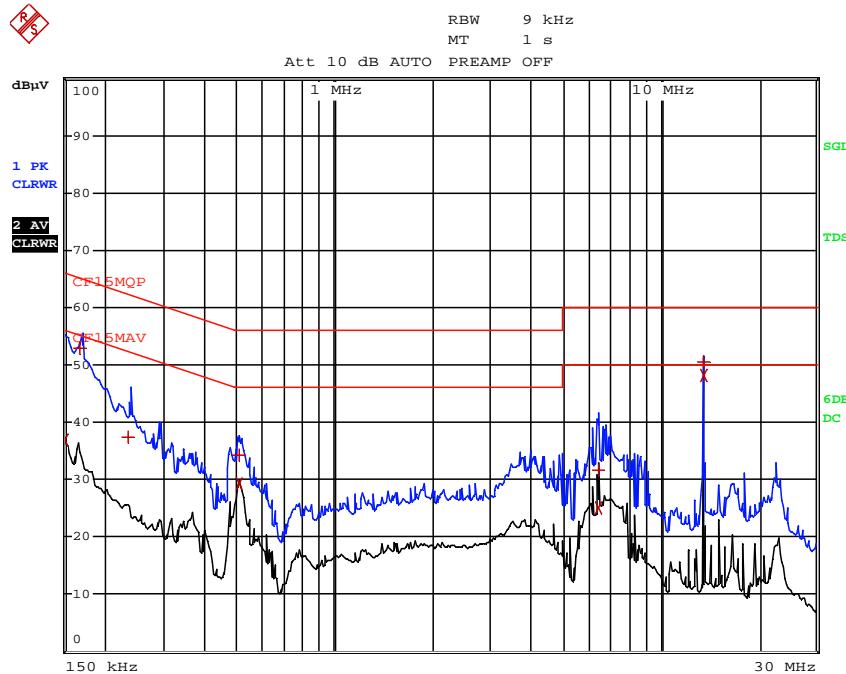

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP	TRACE	FREQUENCY	LEVEL dBµV
Trace2:	CF15MAV			DELTA LIMIT dB
Trace3:	---			
2	CISPR Average@150 kHz		36.98	N
1	Quasi Peak 168 kHz		52.86	N
1	Quasi Peak 235.5 kHz		37.43	N
1	Quasi Peak 510 kHz		34.33	N
2	CISPR Average@510 kHz		29.29	N
2	CISPR Average@6.4545 MHz		25.03	N
1	Quasi Peak 6.4725 MHz		31.69	N
1	Quasi Peak 13.56 MHz		50.55	L1
2	CISPR Average@13.56 MHz		48.18	N

Note: Measurement Uncertainty is  $\pm 4.2\text{dB}$  at a level of confidence of 95%.

## TEST REPORT

### Frequency Stability

#### Frequency Deviation with Voltage Variation

#### Pursuant to FCC Part 15 Section 15.225 Requirement

Operating Frequency		13.560MHz		
Test Voltage (V)	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (%)	Limit (%)
120	+ 50	13.560202	+0.0015	±0.01
	+ 40	13.560204	+0.0015	±0.01
	+ 30	13.560204	+0.0015	±0.01
	+ 20	13.560206	+0.0015	±0.01
	+ 10	13.560212	+0.0016	±0.01
	0	13.560218	+0.0016	±0.01
	- 10	13.560234	+0.0017	±0.01
	- 20	13.560244	+0.0018	±0.01

Nominal Frequency		13.560MHz			
Temperature (°C)	Humidity (%)	Voltage	Frequency (MHz)	Frequency Error (ppm)	Limit (ppm)
20°C 50%		102	13.560208	15.3	100
20°C 50%		120	13.560206	15.2	100
20°C 50%		132	13.560204	15.0	100
Min -20C 0%		102	13.560248	18.3	100
Min -20C 0%		120	13.560244	18.0	100
Min -20C 0%		132	13.560242	17.8	100
Max 50C 50%		102	13.560204	15.0	100
Max 50C 50%		120	13.560202	14.9	100
Max 50C 50%		132	13.560208	15.3	100

## TEST REPORT

### RADIATED EMISSIONS

Model: X1 Vault  
 Date of Test: November 28, 2022  
 Worst-Case Operating Mode: NFC Operating

Table 1

#### Pursuant to FCC Part 15 Section 15.225 Requirement

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Distance Factor (-dB)	Calculated at 30m (dB $\mu$ V/m)	Limit at 30m (dB $\mu$ V/m)	Margin (dB)
O	13.560	51.0	0	10.8	61.8	40.0	21.8	84.0	-62.2
O	27.120	22.3	0	9.5	31.8	40.0	-8.2	29.5	-37.7

NOTES:

1. Quasi-Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Loop antenna is used for the emissions below 30MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model: X1 Vault  
 Date of Test: November 28, 2022  
 Worst-Case Operating Mode: NFC Operating

Table 2

#### Pursuant to FCC Part 15 Section 15.209 Requirement

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	34.382	42.2	16	10.0	36.2	40.0	-3.8
V	35.112	44.4	16	10.0	38.4	40.0	-1.6
V	36.618	44.2	16	10.0	38.2	40.0	-1.8
V	40.674	44.8	16	10.0	38.8	40.0	-1.2
V	73.892	36.8	16	6.0	26.8	40.0	-13.2
V	81.046	33.4	16	7.0	24.4	40.0	-15.6
V	96.082	29.8	16	12.0	25.8	43.5	-17.7
H	122.028	35.6	16	14.0	33.6	43.5	-9.9
H	176.228	32.4	16	19.0	35.4	43.5	-8.1
H	271.166	32.8	16	22.0	38.8	46.0	-7.2
H	284.746	33.5	16	22.0	39.5	46.0	-6.5
H	311.785	33.2	16	23.0	40.2	46.0	-5.8
H	325.446	36.8	16	24.0	44.8	46.0	-1.2
V	677.962	22.2	16	29.0	35.2	46.0	-10.8

NOTES:

1. Quasi-Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### 4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

### 5.0 PRODUCT LABELLING

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

### 6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

### 7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.


## TEST REPORT

### 8.0 MISCELLANEOUS INFORMATION

The miscellaneous information includes details of the test procedure.

#### 8.1 Radiated Emission on the Bandedge

The plot below shows the fundamental emission is confined in the specified band. The emission of the fundamental is 21.8 dB $\mu$ V/m and it is below the limit of 50.5 dB $\mu$ V/m in the range of (13.410-13.553MHz) and (13.710-14.010MHz) and the limit of 40.5 dB $\mu$ V/m in the frequency range of (13.110-14.410MHz) and (13.710-14.010MHz). In the frequency range from 13.110-14.010MHz, we cannot find any emission higher than the fundamental emission. Therefore they meet the requirement of Section 15.225(a), (b), (c), & (d).

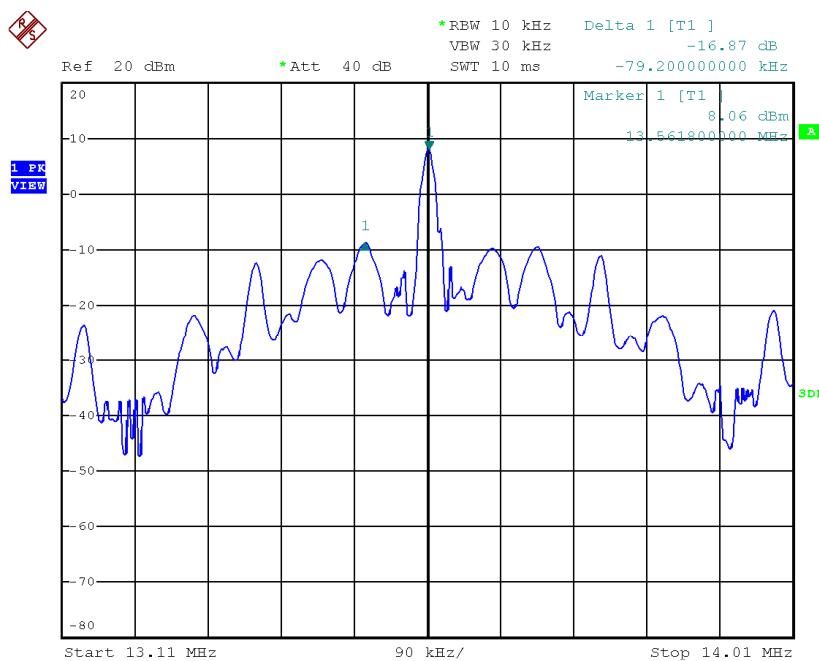

## TEST REPORT

### 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. Since the transmitter transmits the RF signal continuously.

### 8.3 Calculation of Average Factor

The average factor is not applicable for this device as the transmitted signal is a continuously signal.

## TEST REPORT

### 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


## TEST REPORT

### 8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

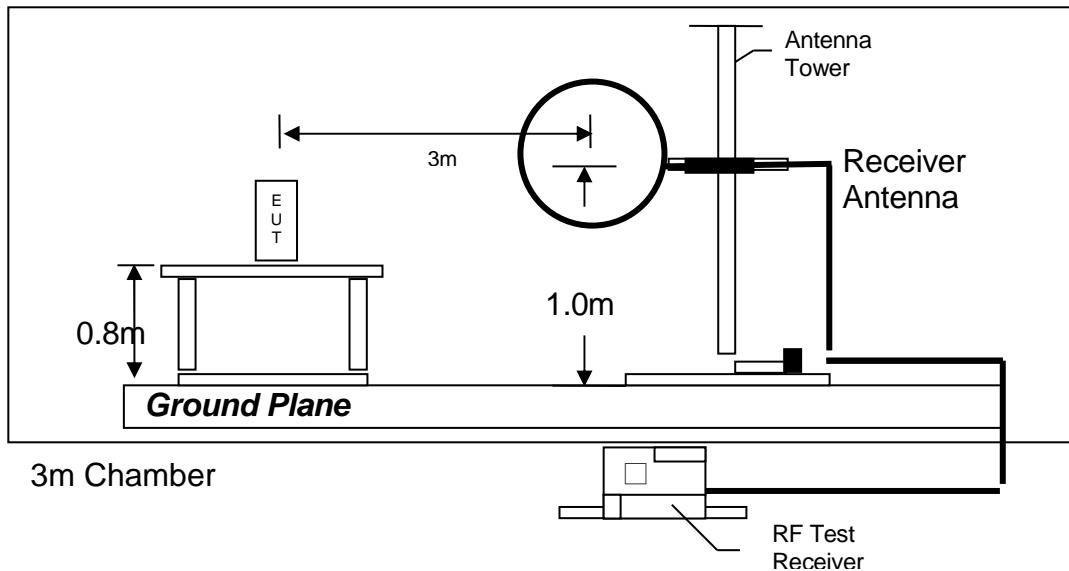

Test setup of radiated emissions 9kHz to 30MHz

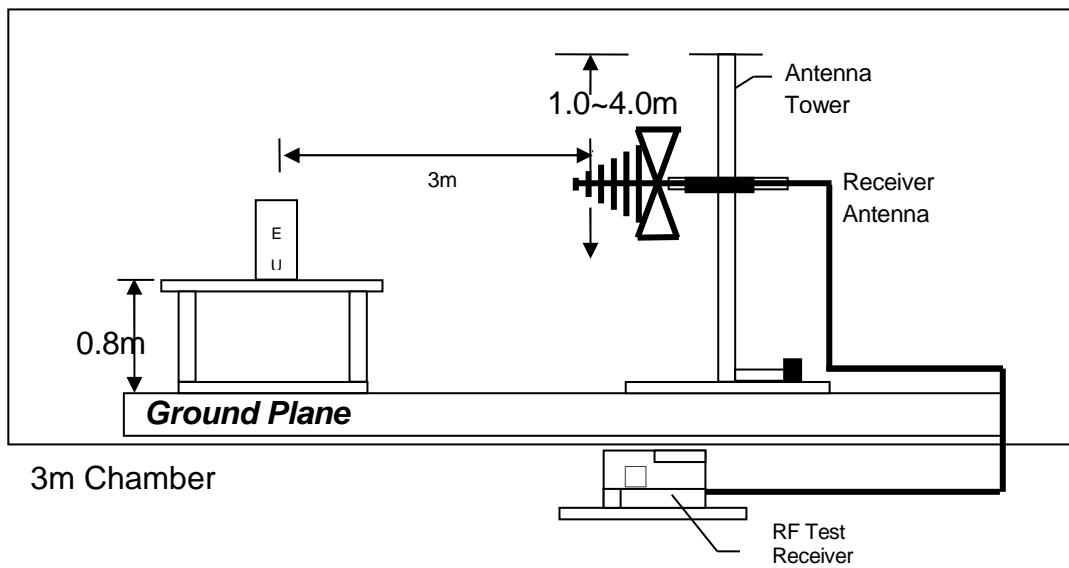

Test setup of radiated emissions 30MHz to 1GHz


## TEST REPORT

### 8.4.2 Conducted Emission Test Procedures

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

### 8.4.3 Conducted Emission Test Setup

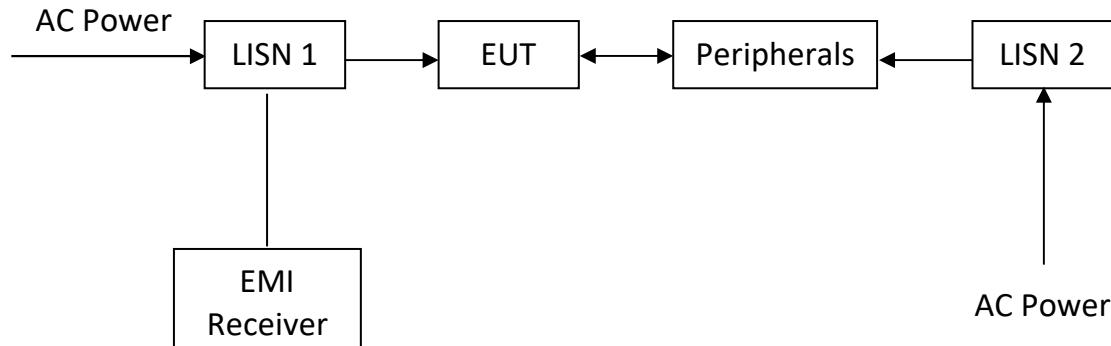


**TEST REPORT****8.5 Occupied Bandwidth**

Occupied Bandwidth Results:

Frequency (MHz)	Occupied Bandwidth (kHz)
13.56 MHz	726

The worst case is shown as below

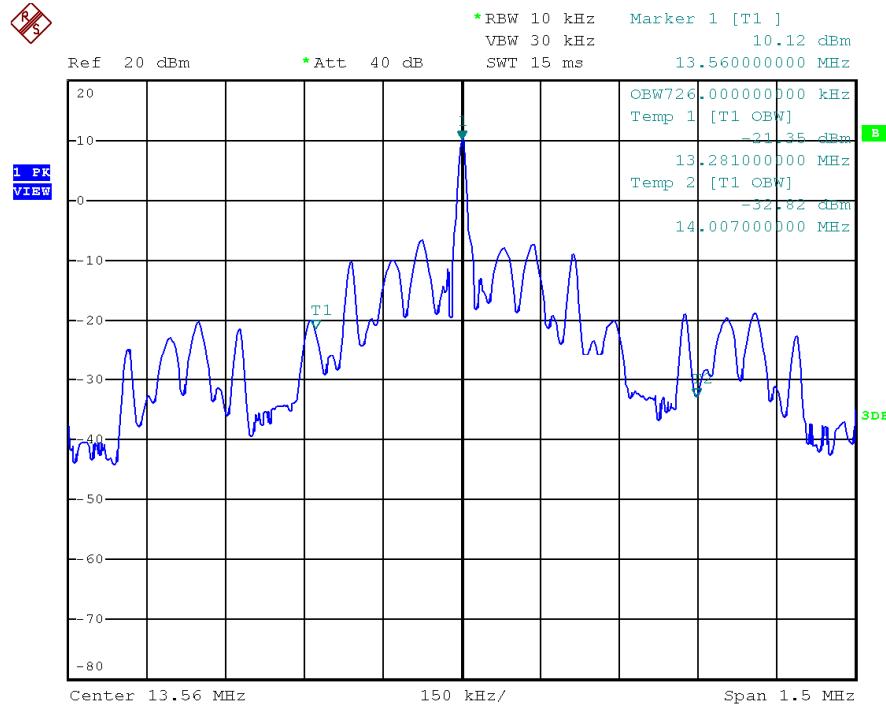

## TEST REPORT

### 9 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

### 10 EQUIPMENT LIST

#### 1) Radiated Emissions Test

Equipment	Signal and Spectrum Analyzer (10Hz to 40GHz)	Biconical Antenna (30MHz to 300MHz)	EMI Test Receiver 7GHz
Registration No.	EW-3016	EW-3242	EW-3481
Manufacturer	ROHDESCHWARZ	EMCO	ROHDESCHWARZ
Model No.	FSV40	3110C	ESR7
Calibration Date	January 29, 2022	May 26, 2021	December 21, 2021
Calibration Due Date	April 29, 2023	May 26, 2023	March 21, 2023

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-3243	EW-1133	EW-3302
Manufacturer	EMCO	EMCO	EMCO
Model No.	3148B	3115	6502
Calibration Date	June 03, 2021	May 26, 2021	September 08, 2022
Calibration Due Date	March 30, 2023	February 26, 2023	September 08, 2023

Equipment	RF Preamplifier (9kHz to 6000MHz)	14m Double Shield RF Cable (20MHz to 6GHz)	14m Double Shield RF Cable (9kHz - 6GHz)
Registration No.	EW-3006b	EW-2074	EW-2376
Manufacturer	SCHWARZBECK	RADIALL	RADIALL
Model No.	BBV9718	N(m)-RG142-BNC(m) L=14M	n m/br56/bnc m 14m
Calibration Date	February 15, 2022	December 10, 2021	January 26, 2022
Calibration Due Date	February 15, 2023	March 10, 2023	April 26, 2023

## TEST REPORT

### 2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver 7GHz
Registration No.	EW-2454	EW-2501	EW-3481
Manufacturer	RADIALL	ROHDE SCHWARZ	ROHDE SCHWARZ
Model No.	Bnc m st / 142 / bnc mra 240cm	ENV-216	ESR7
Calibration Date	January 26, 2022	September 11, 2021	December 21, 2021
Calibration Due Date	April 26, 2023	March 11, 2023	March 21, 2023

### 3) Bandedge Measurement

Equipment	EMI Test Receiver 7GHz	RF Cable 240cm (RG142) (9kHz to 30MHz)
Registration No.	EW-3481	EW-2454
Manufacturer	ROHDE SCHWARZ	RADIALL
Model No.	ESR7	Bnc m st / 142 / bnc mra 240cm
Calibration Date	December 21, 2021	January 26, 2022
Calibration Due Date	March 21, 2023	April 26, 2023

### 4) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDE SCHWARZ
Software version	10.50.40

**END OF TEST REPORT**