



Model:X7

Manufacturer: Shenzhen Deyixin Electronic Circuit Co., LTD

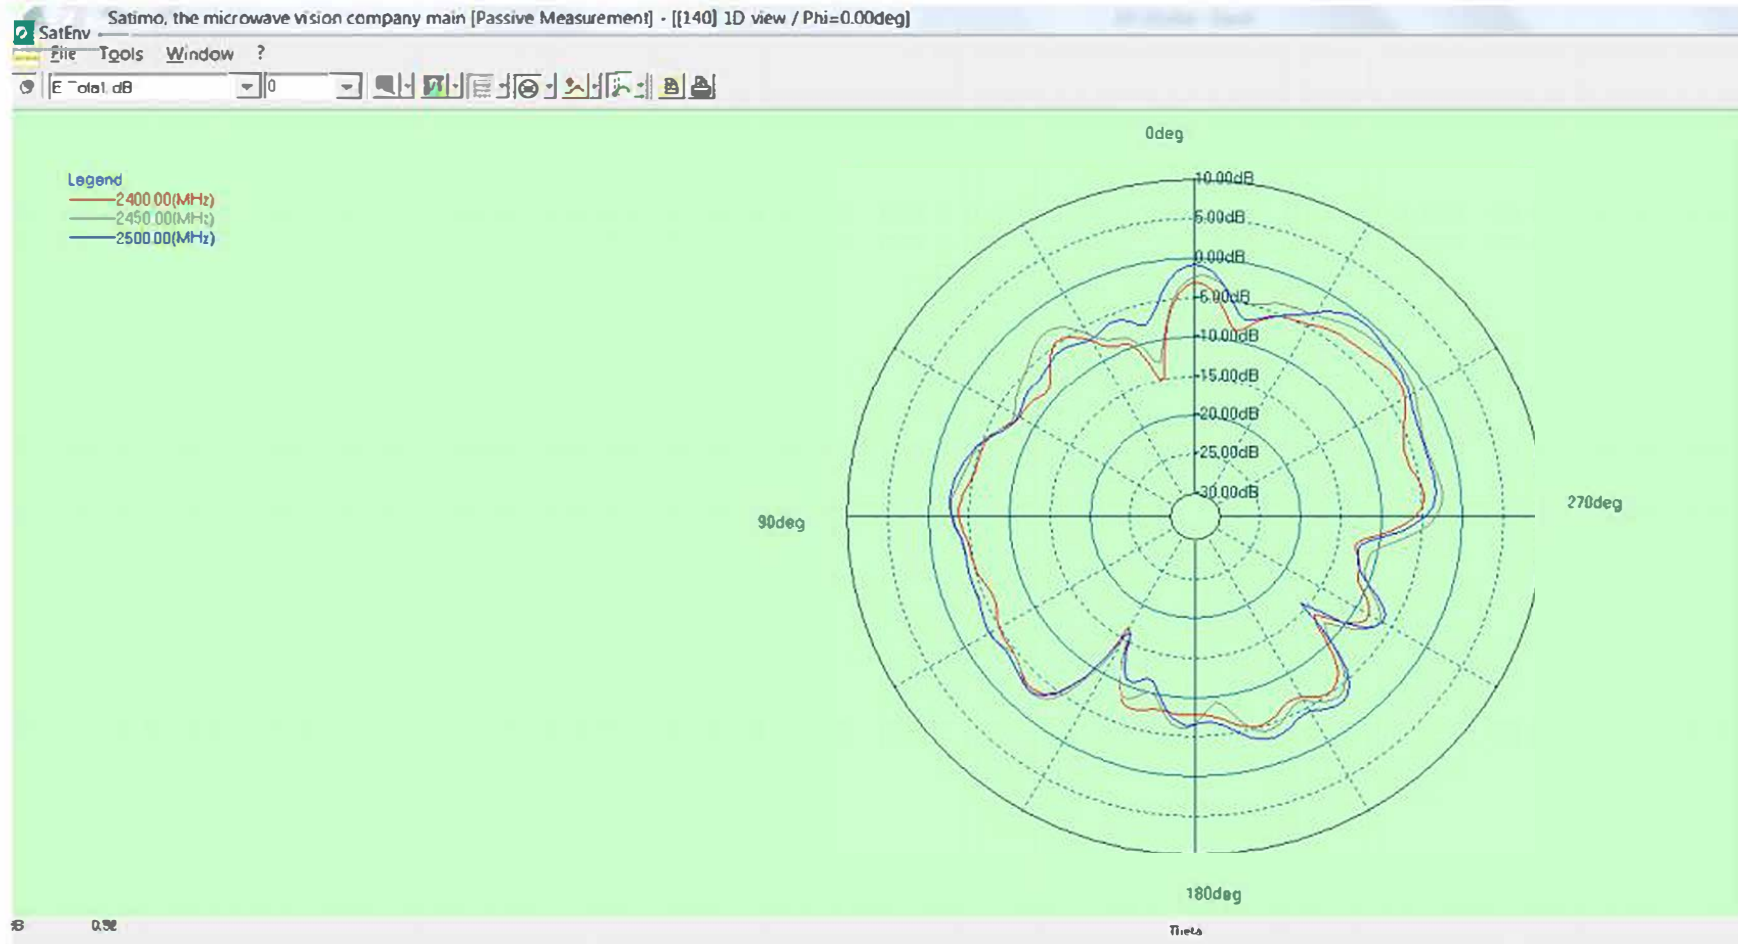

Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-2.13051	-9.25365	-4.87480
2450	-0.04981	-8.13344	-3.33233
2500	-0.49119	-9.71414	-3.58245

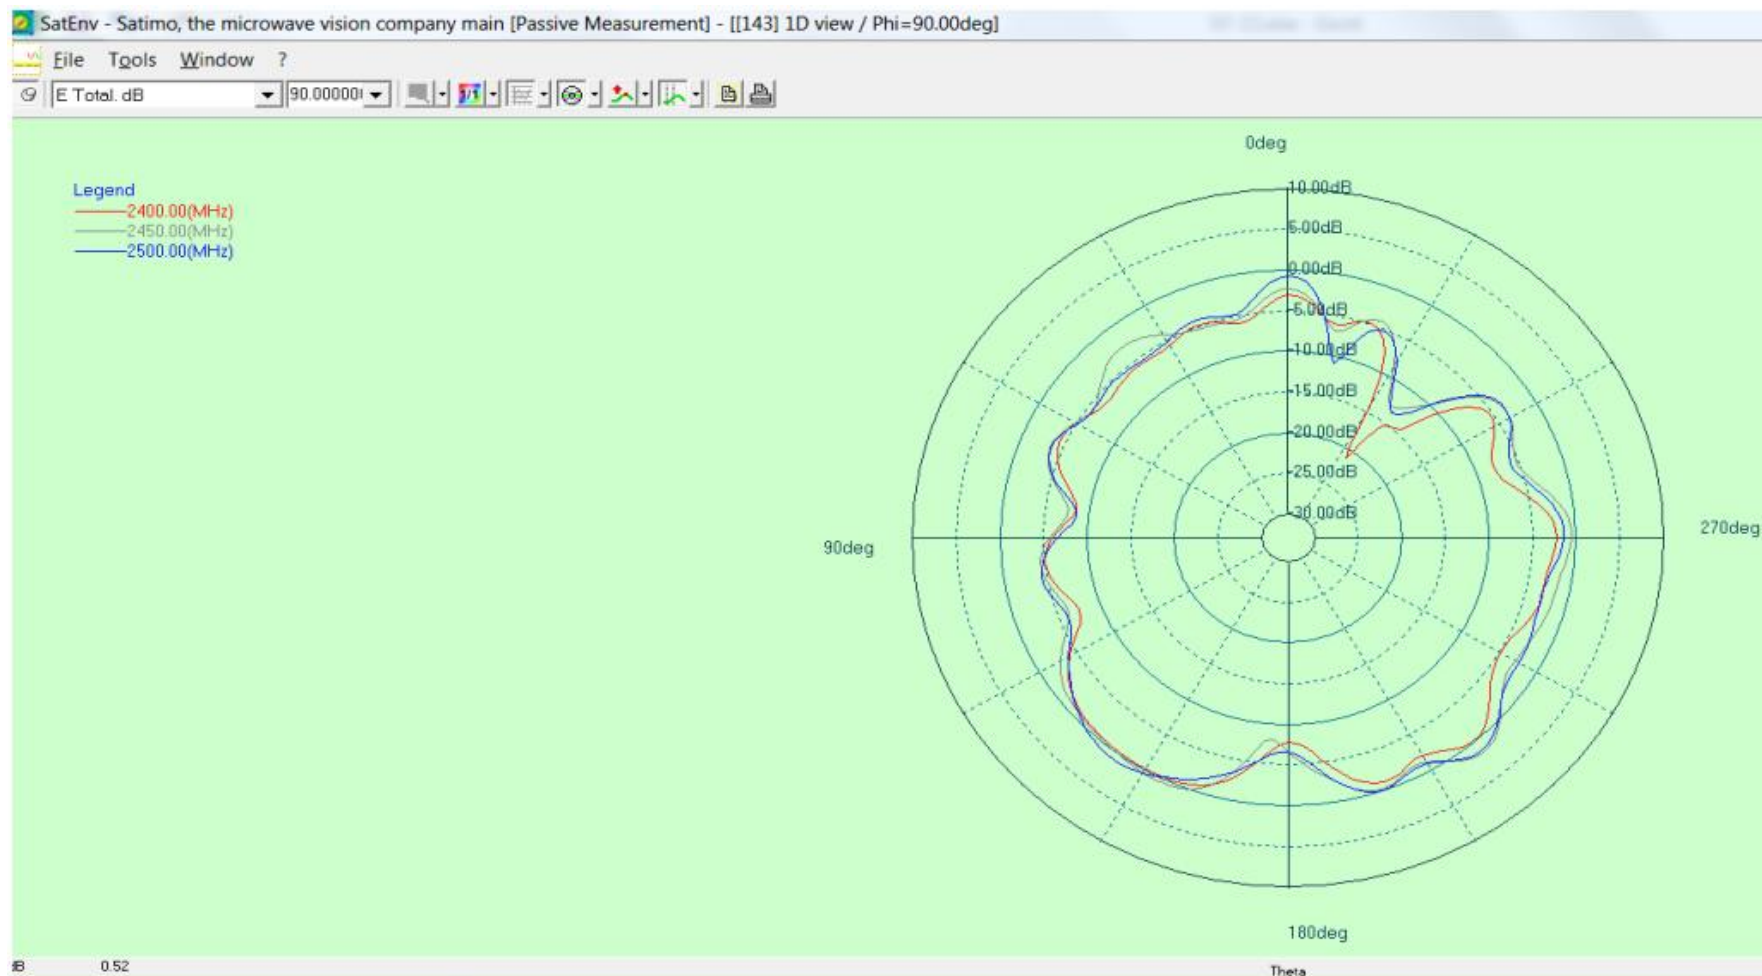

Frequency (MHz)	Gain (dB)		
	Max	Min	Avg
2400	-2.49778	-16.72060	-6.79202
2450	-1.13101	-15.02190	-5.51855
2500	-1.61898	-15.70880	-5.60600


Tr1 S11 Smith (R+jX) Scale 1.000U

1	2.4000000	GHz	24.794	Ω	-8.0576	Ω	8.2300	pF
2	2.4500000	GHz	23.877	Ω	-1.5006	Ω	97.480	pH
>3	2.5000000	GHz	23.517	Ω	11.766	Ω	749.02	pH




Tr2 S11 Log Mag 10.00dB/ Ref 0.000dB

1	2.4000000	GHz	-9.0749	dB
2	2.4500000	GHz	-9.0170	dB
>3	2.5000000	GHz	-8.1960	dB

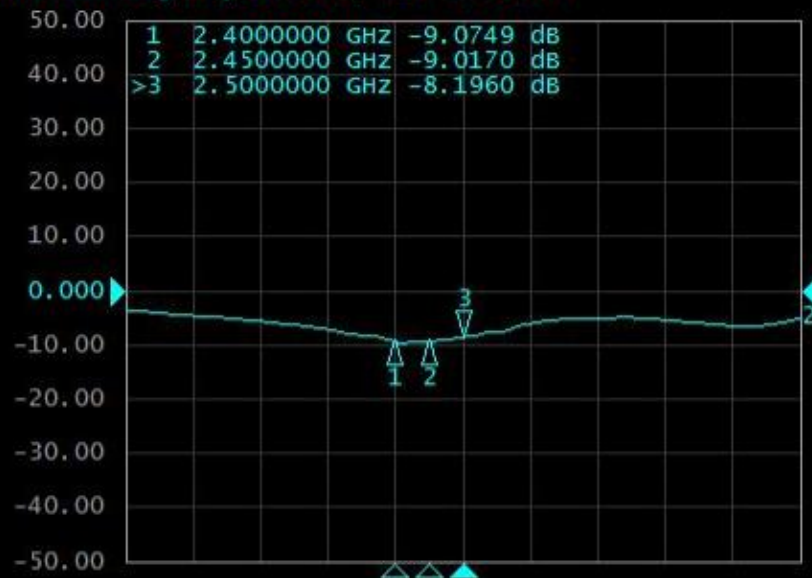

Tr3 S11 SWR 1.000/ Ref 1.000

1	2.4000000	GHz	2.0853
2	2.4500000	GHz	2.0965
>3	2.5000000	GHz	2.2745

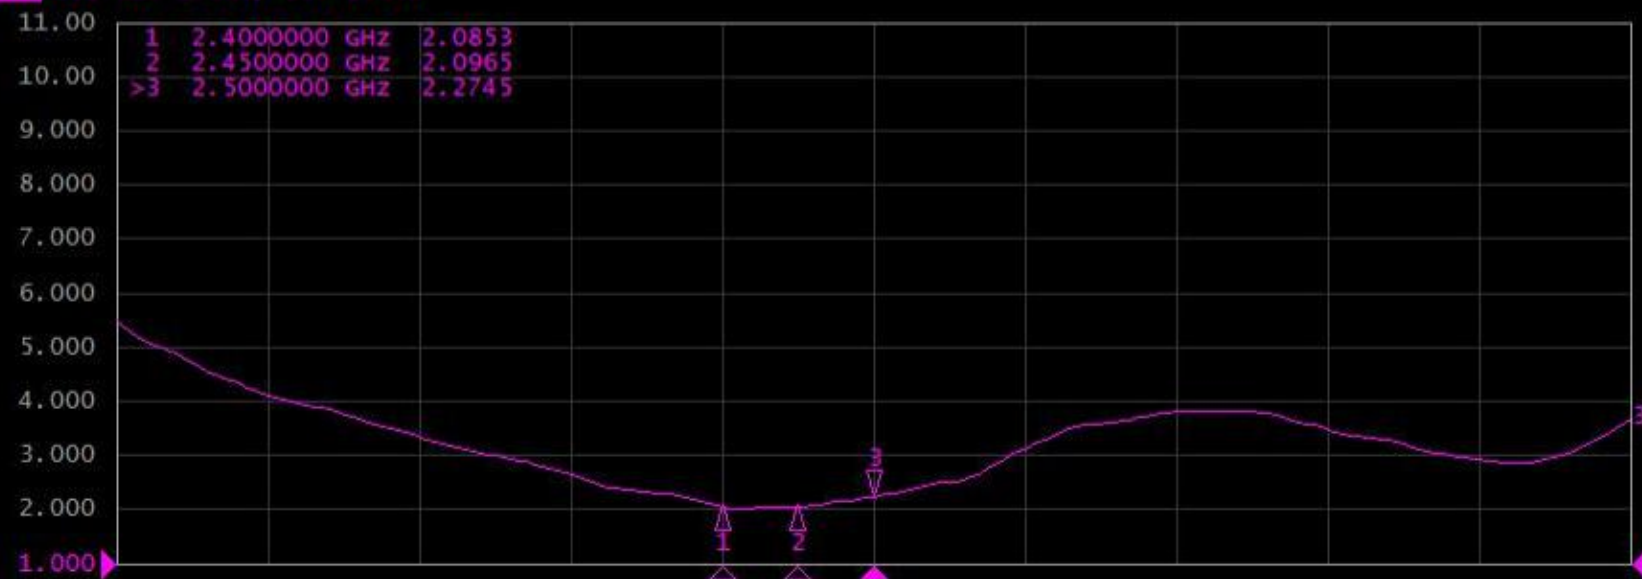



1 Start 2 GHz

IFBW 70 kHz



Stop 3 GHz Off

Hold Stop ExtRef Svc

Frequency/MHz	2400	2450	2500
VSWR	2.0853	2.0965	2.2745

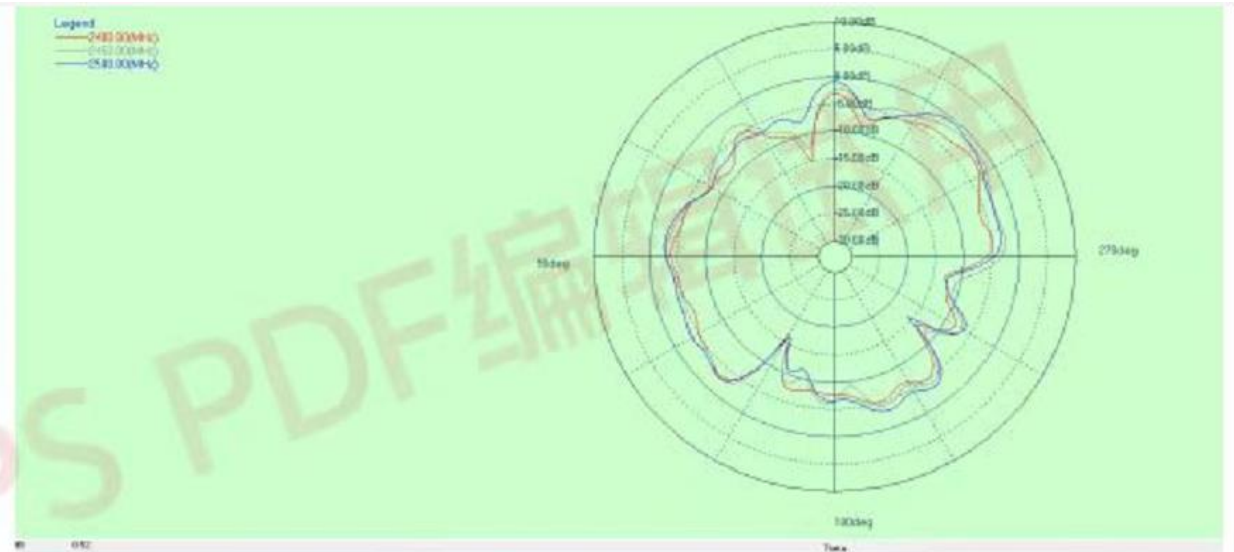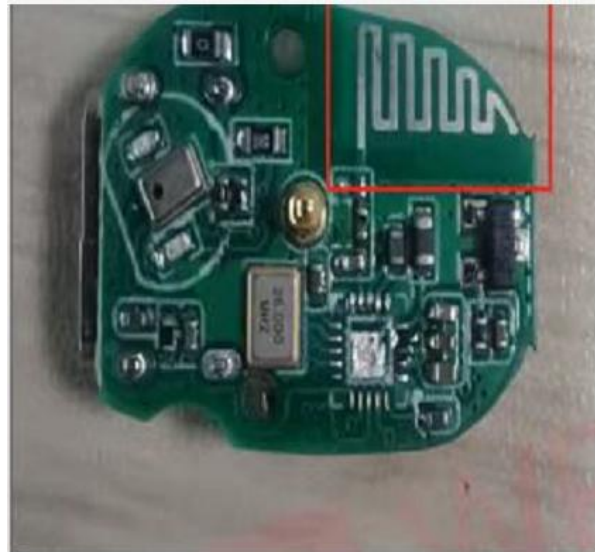

Frequency (MHz)	Gain (dB)		
	Max	Min	Avg
2400	-2.13051	-9.25365	-4.87480
2450	-0.04981	-8.13344	-3.33233
2500	-0.49119	-9.71414	-3.58245

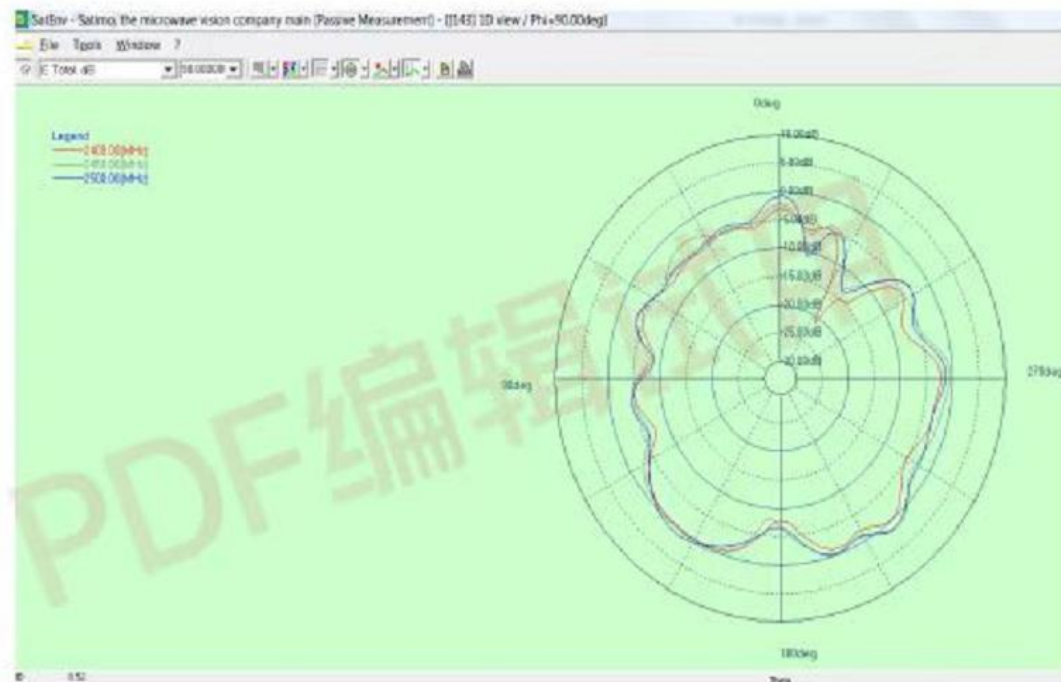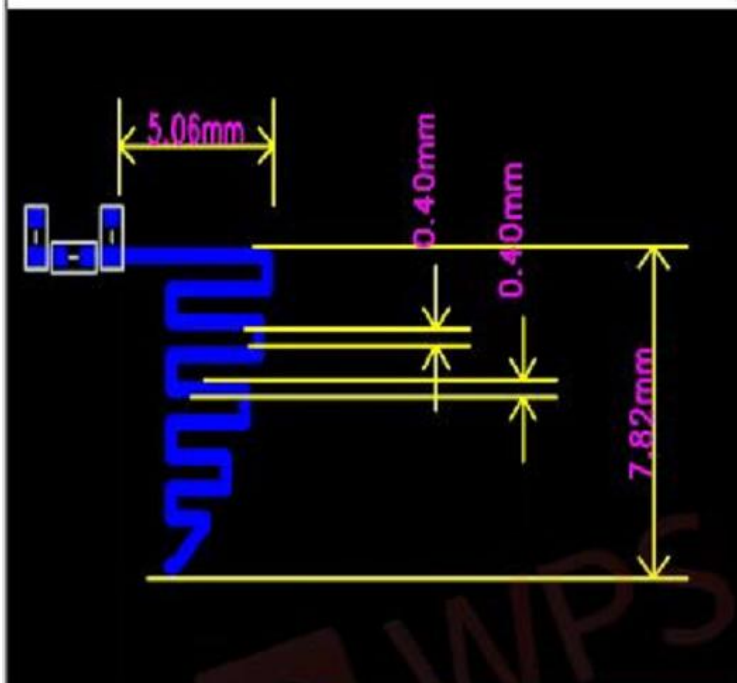

Frequency (MHz)	Gain (dB)		
	Max	Min	Avg
2400	-2.49778	-16.72060	-6.79202
2450	-1.13101	-15.02190	-5.51855
2500	-1.61898	-15.70880	-5.60600