

FCC PART 15 SUBPART C TEST REPORT


FCC PART 15 SUBPART E 15.407

Report Reference No. : MTEB23040279-R1

FCC ID. : 2A9NV-X3-WW32US

Compiled by

(position+printed name+signature): File administrators Alisa Luo




Supervised by

(position+printed name+signature): Test Engineer Sunny Deng



Approved by

(position+printed name+signature): Manager Yvette Zhou



Date of issue : May 12, 2023

Representative Laboratory Name : Shenzhen Most Technology Service Co., Ltd.

..... :

Address : No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.

Applicant's name : Hangzhou Cheego Smart Technology Co., Ltd.

Address : Room 601, Bldg.4 West, Xigang Development Center, Sandun Town, Hangzhou, Zhejiang, China


Test specification :

Standard : FCC Part 15 Subpart E 15.407

Shenzhen Most Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : X3 Pro Smart Baby Monitor

Trade Mark :  

Manufacturer : Hangzhou Cheego Smart Technology Co., Ltd.

Model/Type reference : X3-WW32US

Listed Models : X3-*

Ratings : DC 12V

Modulation : OFDM

Frequency : From 5180MHz-5240MHz

Hardware version : V1.2

Software version : V1.0.1

Result : **PASS**

TEST REPORT

Equipment under Test : X3 Pro Smart Baby Monitor

Model /Type : X3-WW32US

Listed Models : X3-*

Remark All model's the function, software and electric circuit are the same, only with appearance, product color and model named different.

Applicant : Hangzhou Cheego Smart Technology Co., Ltd.

Address : Room 601, Bldg.4 West, Xigang Development Center, Sandun Town, Hangzhou, Zhejiang, China

Manufacturer : Hangzhou Cheego Smart Technology Co., Ltd.

Address : Room 601, Bldg.4 West, Xigang Development Center, Sandun Town, Hangzhou, Zhejiang, China

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1</u>	<u>REVISION HISTORY</u>	<u>4</u>
<u>2</u>	<u>TEST STANDARDS.....</u>	<u>5</u>
<u>3</u>	<u>SUMMARY</u>	<u>6</u>
3.1	General Remarks	6
3.2	Product Description	6
3.3	Equipment Under Test	6
3.4	Short description of the Equipment under Test (EUT)	6
3.5	EUT operation mode	7
3.6	Block Diagram of Test Setup	7
3.1	Test Item (Equipment Under Test) Description*	7
3.2	Auxiliary Equipment (AE) Description	7
3.3	Antenna Information*	7
3.4	Related Submittal(s) / Grant (s)	8
3.5	Modifications	8
<u>4</u>	<u>TEST ENVIRONMENT.....</u>	<u>9</u>
4.1	Address of the test laboratory	9
4.2	Test Facility	9
4.3	Environmental conditions	9
4.4	Test Description	10
4.5	Statement of the measurement uncertainty	10
4.6	Equipments Used during the Test	11
<u>5</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
5.1	AC Power Conducted Emission	12
5.2	Radiated Emissions	15
5.3	Conduction spurious emission	22
5.4	Maximum Conducted Average Output Power	23
5.5	Power Spectral Density	24
5.6	Emission Bandwidth (26dBm Bandwidth)	26
5.7	Minimum Emission Bandwidth (6dBm Bandwidth)	27
5.8	Frequency Stability	28
5.9	Duty Cycle Information	29
<u>6</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>30</u>
<u>7</u>	<u>PHOTOS OF THE EUT.....</u>	<u>31</u>
	APPENDIX I.Frequency Stability	32
	APPENDIX II.Conducted Peak Output Power	33
	APPENDIX III.6dB Bandwidth	34
	APPENDIX IV.26dB Bandwidth	37
	APPENDIX V.Conducted Out Of Band Emission	40
	APPENDIX VI.Duty Cycle	49
	APPENDIX VII.Peak Power Spectral Density	56

1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2023-05-12	Initial Issue	Alisa Luo

2 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart E](#)—Unlicensed National Information Infrastructure Devices

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02](#): General UNII Test Procedures New Rules v01r02

3 SUMMARY

3.1 General Remarks

Date of receipt of test sample	:	Apr.25, 2023
Testing commenced on	:	Apr.26, 2023
Testing concluded on	:	May 12,2023

3.2 Product Description

Product Description:	X3 Pro Smart Baby Monitor			
Model:	X3-WW32US			
Power supply:	DC 12V			
Testing sample ID :	MTYP02407			
WIFI				
Supported type:	20MHz system	40MHz system	80MHz system	160MHz system
	802.11a 802.11n 802.11ac	802.11n 802.11ac	N/A	N/A
Operation frequency:	5180MHz-5240MHz	5190MHz-5230MHz	N/A	N/A
Modulation:	OFDM	OFDM	N/A	N/A
Antenna type:	PCB Antenna			
Antenna gain:	2.5dBi			

3.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☒ 12 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

DC 12V

3.4 Short description of the Equipment under Test (EUT)

This is a X3 Pro Smart Baby Monitor
For more details, refer to the user's manual of the EUT.

3.5 EUT operation mode


The Applicant provides communication tools software (AT command) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.
All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	38	5190
	40	5200		
	44	5220	46	5230
	48	5240		

Note: The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

3.6 Block Diagram of Test Setup

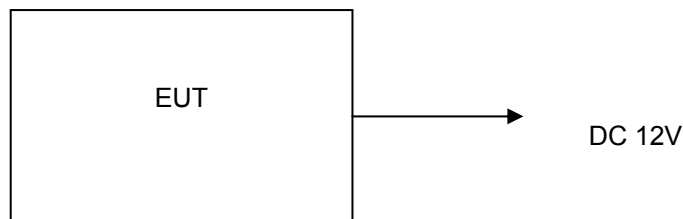

3.1 Test Item (Equipment Under Test) Description*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A					
EUT B					

*: declared by the applicant. According to customers information EUTs A and B are the same devices.

3.2 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1	-	/	/	/
AE 2	-	/	/	/

3.3 Antenna Information*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	PIFA Antenna	5180MHz-5240MHz	---	2.5dBi
Antenna 2					

*: declared by the applicant.

3.4 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

3.5 Modifications

No modifications were implemented to meet testing criteria.

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

Shenzhen Most Technology Service Co., Ltd.

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 0031192610

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 6343.01

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

4.3 Environmental conditions

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

4.4 Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	N/A
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	PASS _{Note1}
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS _{Note2}
FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS
FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	N/A _{Note 3}
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: This device not work in DFS band.

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	54 Mbps
	11n(20MHz) /OFDM	MCS0
	11n(40MHz) /OFDM	MCS0

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 Db	(1)
Radiated Emission	1~18GHz	4.32 Db	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.6 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	100093	2023/03/17	1 Year
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	2023/03/17	1 Year
3.	Receiver	R&S	ESCI	100492	2023/03/17	1 Year
4	Receiver	R&S	ESPI	101202	2023/03/17	1 Year
5	Spectrum analyzer	Agilent	9020A	MT-E306	2023/03/17	1 Year
6	Bilong Antenna	Sunol Sciences	JB3	A121206	2023/03/17	1 Year
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	2023/03/17	1 Year
8	Loop antenna	Beijing Daze	ZN30900B	/	2023/03/17	1 Year
9	Horn antenna	R&S	OBH100400	26999002	2023/03/17	1 Year
10	Wireless Communication Test Set	R&S	CMW500	/	2023/03/17	1 Year
11	Spectrum analyzer	R&S	FSP	100019	2023/03/17	1 Year
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	2023/03/17	1 Year
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	2023/03/17	1 Year
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	2023/03/17	1 Year
15	Pre-amplifier	Agilent	83051A	MT-E392	2023/03/17	1 Year
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	2023/03/17	1 Year
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	2023/03/17	1 Year
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	2023/03/17	1 Year
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	2023/03/17	1 Year

Note: The Cal.Interval was one year.

5 TEST CONDITIONS AND RESULTS

5.1 AC Power Conducted Emission

TEST CONFIGURATION

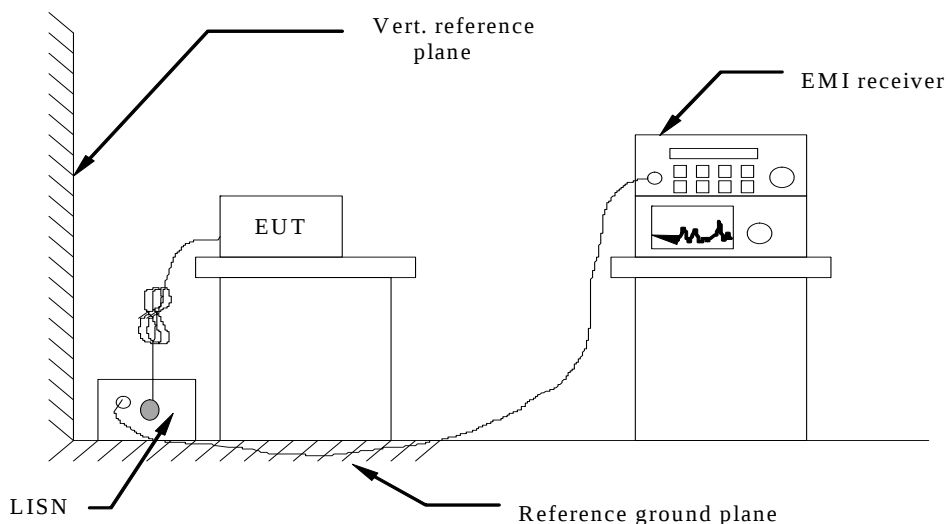

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark:

1. WIFI 5G modes were test at 802.11a, 802.11n(20), 802.11n(40),802.11ac(20),802.11ac(40)(Low, Middle, and High channel); only the worst result of 802.11a Middle Channel was reported as below:

2.

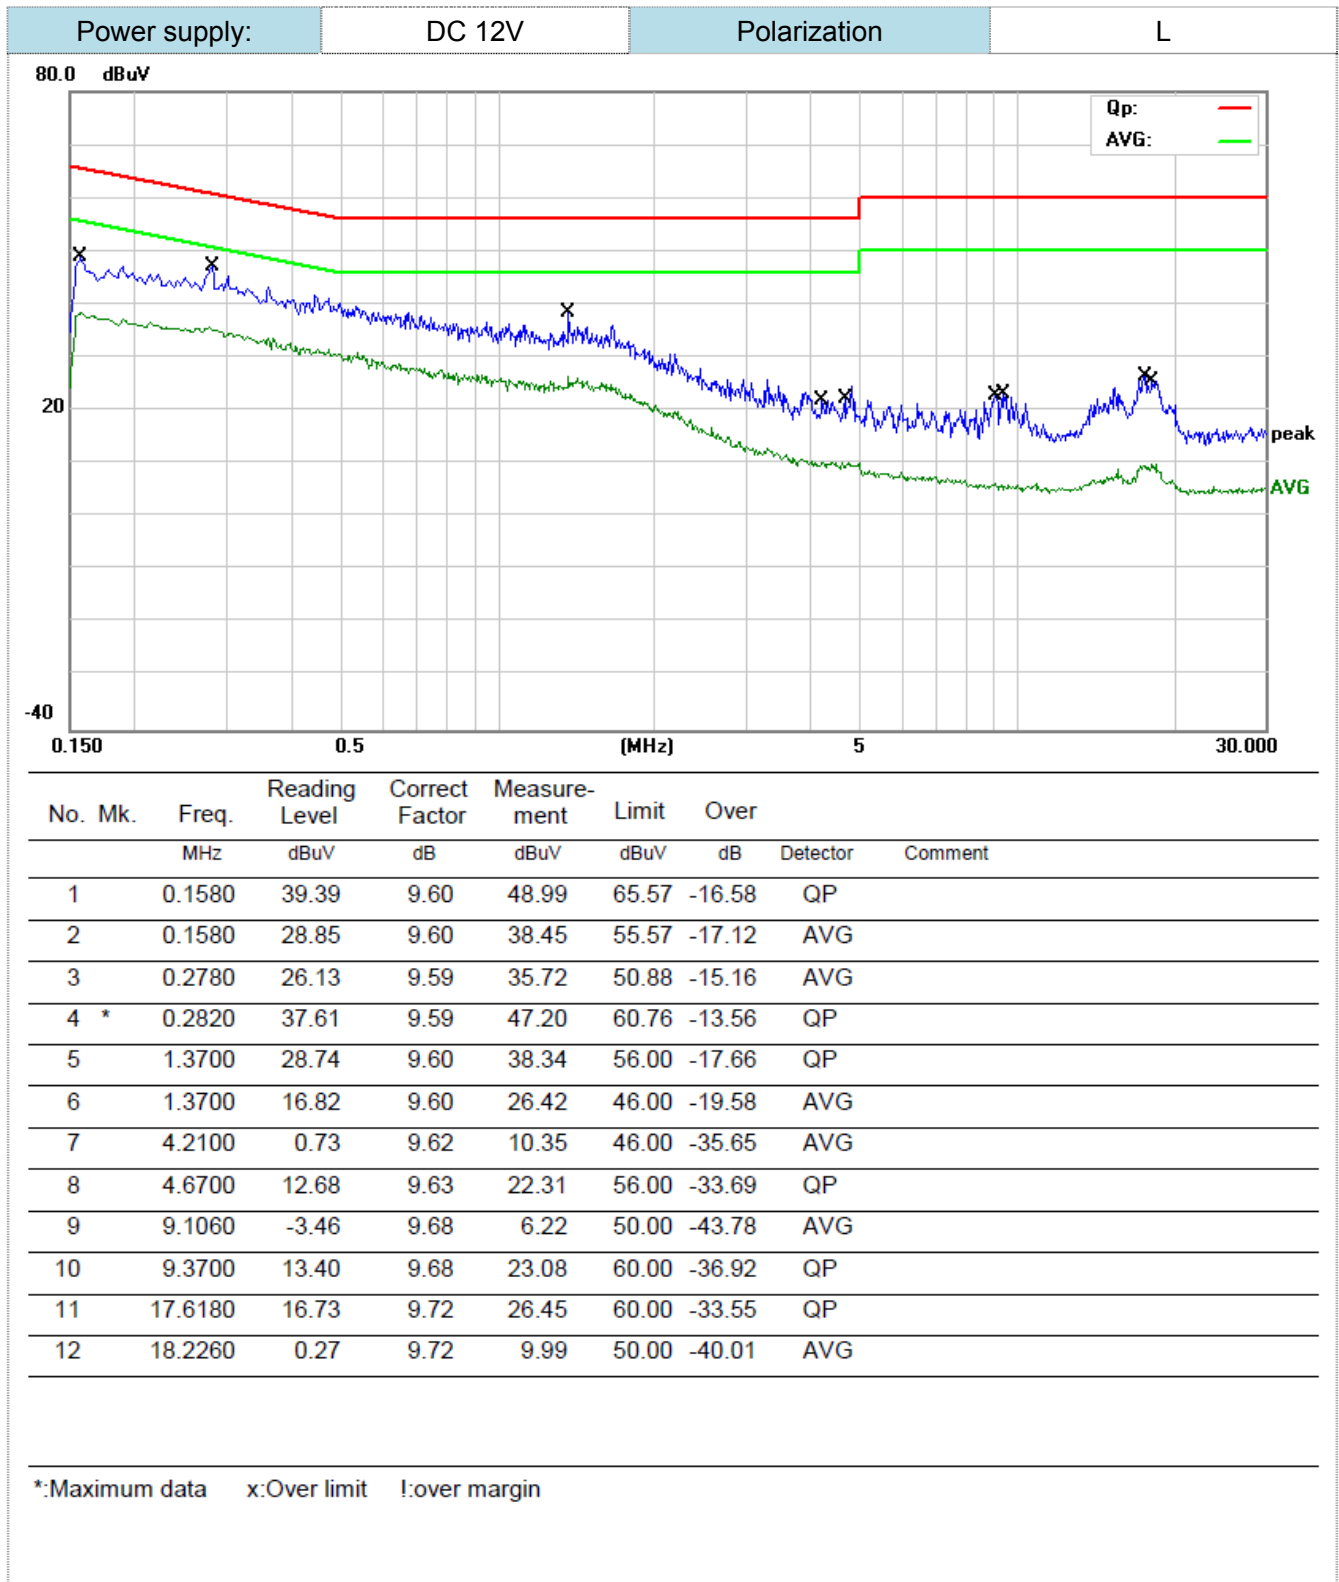


Power supply:

DC 12V

Polarization

N

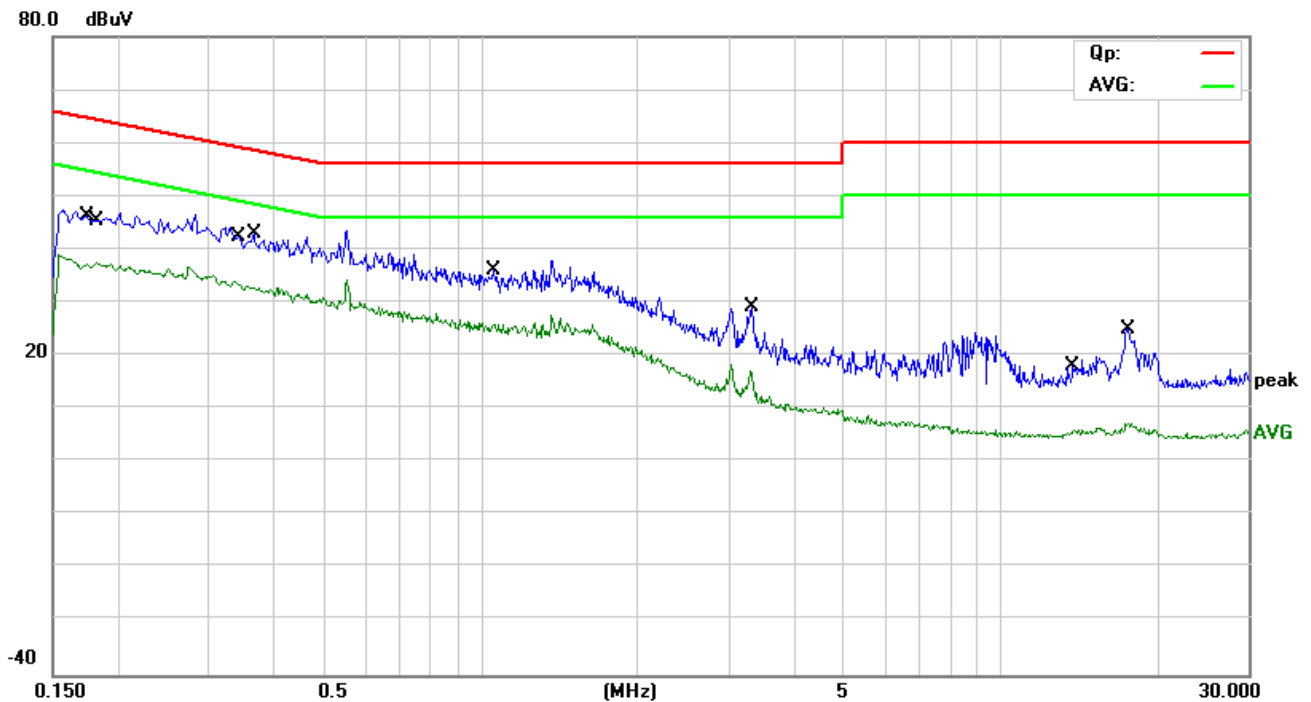

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1740	36.66	9.61	46.27	64.77	-18.50	QP	
2		0.1820	27.98	9.61	37.59	54.39	-16.80	AVG	
3	*	0.3660	33.49	9.59	43.08	58.59	-15.51	QP	
4		0.3420	23.63	9.59	33.22	49.15	-15.93	AVG	
5		1.0620	26.56	9.60	36.16	56.00	-19.84	QP	
6		1.0620	16.38	9.60	25.98	46.00	-20.02	AVG	
7		3.3340	19.59	9.61	29.20	56.00	-26.80	QP	
8		3.2980	7.40	9.61	17.01	46.00	-28.99	AVG	
9		13.8380	8.23	9.70	17.93	60.00	-42.07	QP	
10		13.8620	-3.56	9.70	6.14	50.00	-43.86	AVG	
11		17.6220	15.21	9.72	24.93	60.00	-35.07	QP	
12		17.6220	-2.42	9.72	7.30	50.00	-42.70	AVG	

*:Maximum data x:Over limit !:over margin

5.2 Radiated Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) ^{Note1}
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209


(6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

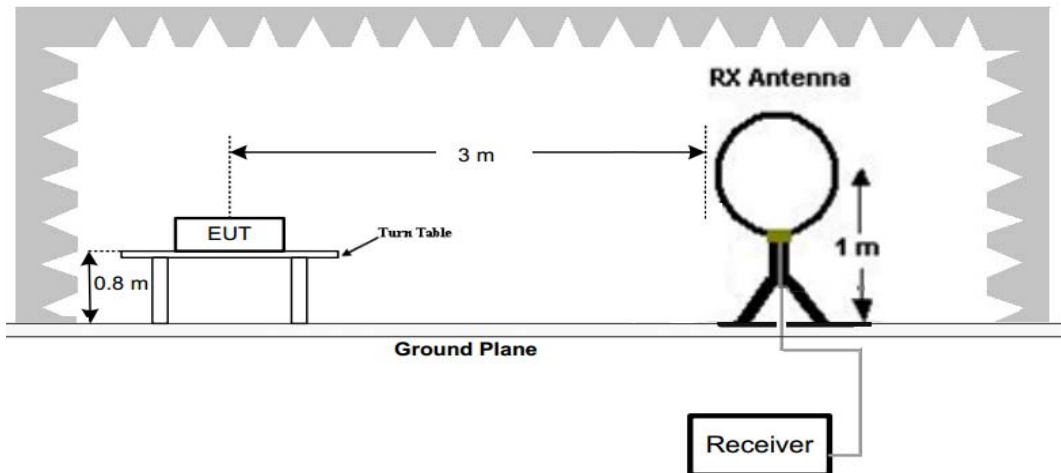

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

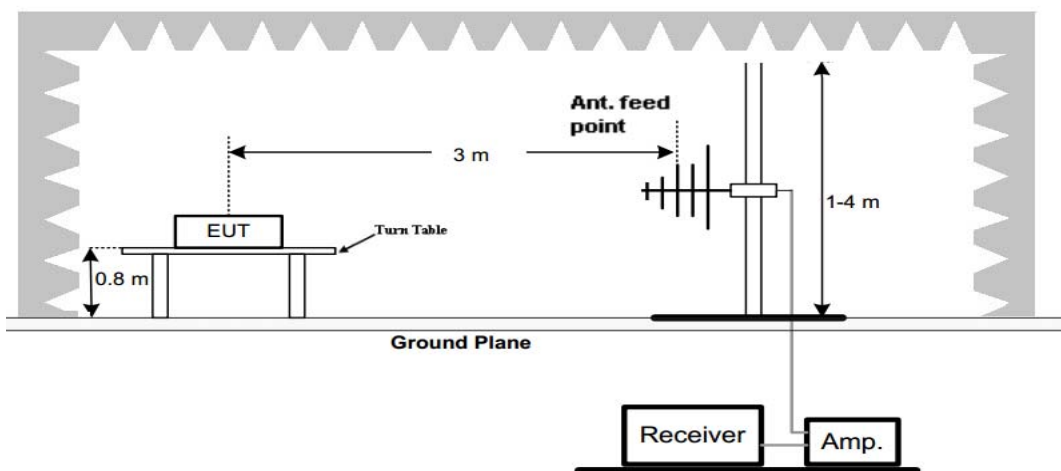

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

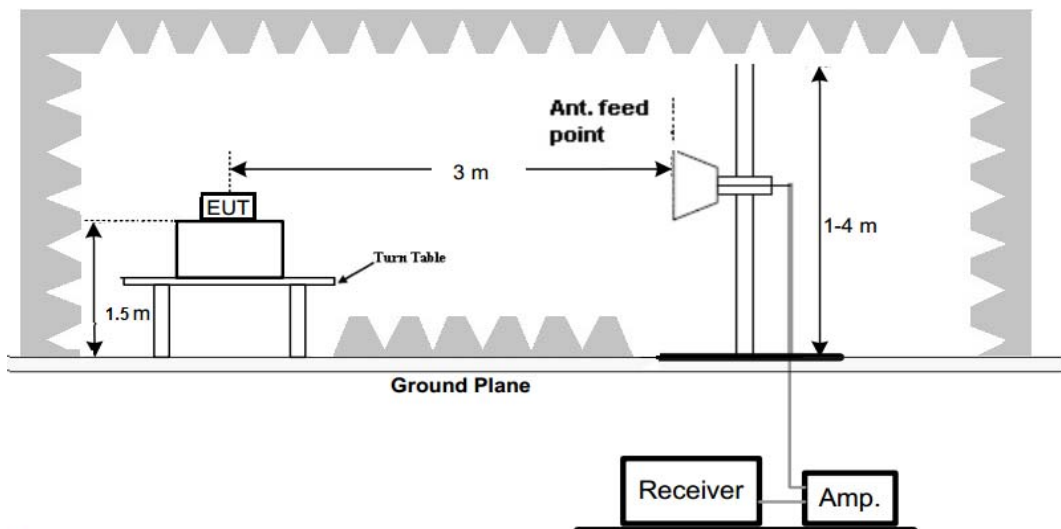

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak


TEST RESULTS

Remark:

- This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
- All 802.11a, 802.11n(20), 802.11n(40),802.11ac(20),802.11ac(40)modes have been tested for below 1GHz test, only the worst case 802.11a low channel of U-NII 1 band was recorded.
- All 802.11a, 802.11n(20), 802.11n(40),802.11ac(20),802.11ac(40) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
- Remark: Result=Reading value+Factor


For 30MHz-1GHz

Horizontal

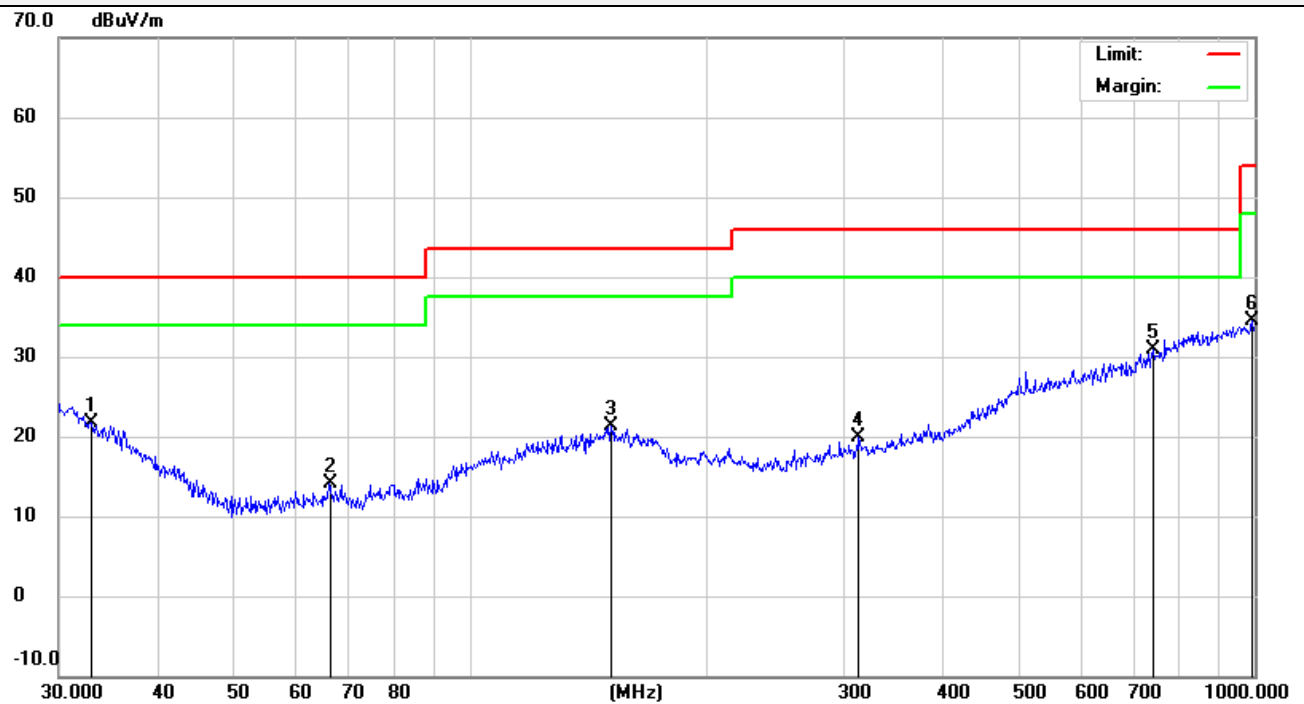

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.8637	2.81	18.95	21.76	40.00	-18.24	QP	200	50
2		66.2662	5.10	9.04	14.14	40.00	-25.86	QP	200	120
3		151.5972	3.57	17.64	21.21	43.50	-22.29	QP	200	160
4		313.2760	4.25	15.75	20.00	46.00	-26.00	QP	200	210
5	*	742.2587	4.54	26.28	30.82	46.00	-15.18	QP	200	290
6		993.0114	4.61	29.93	34.54	54.00	-19.46	QP	200	320

*:Maximum data x:Over limit !:over margin

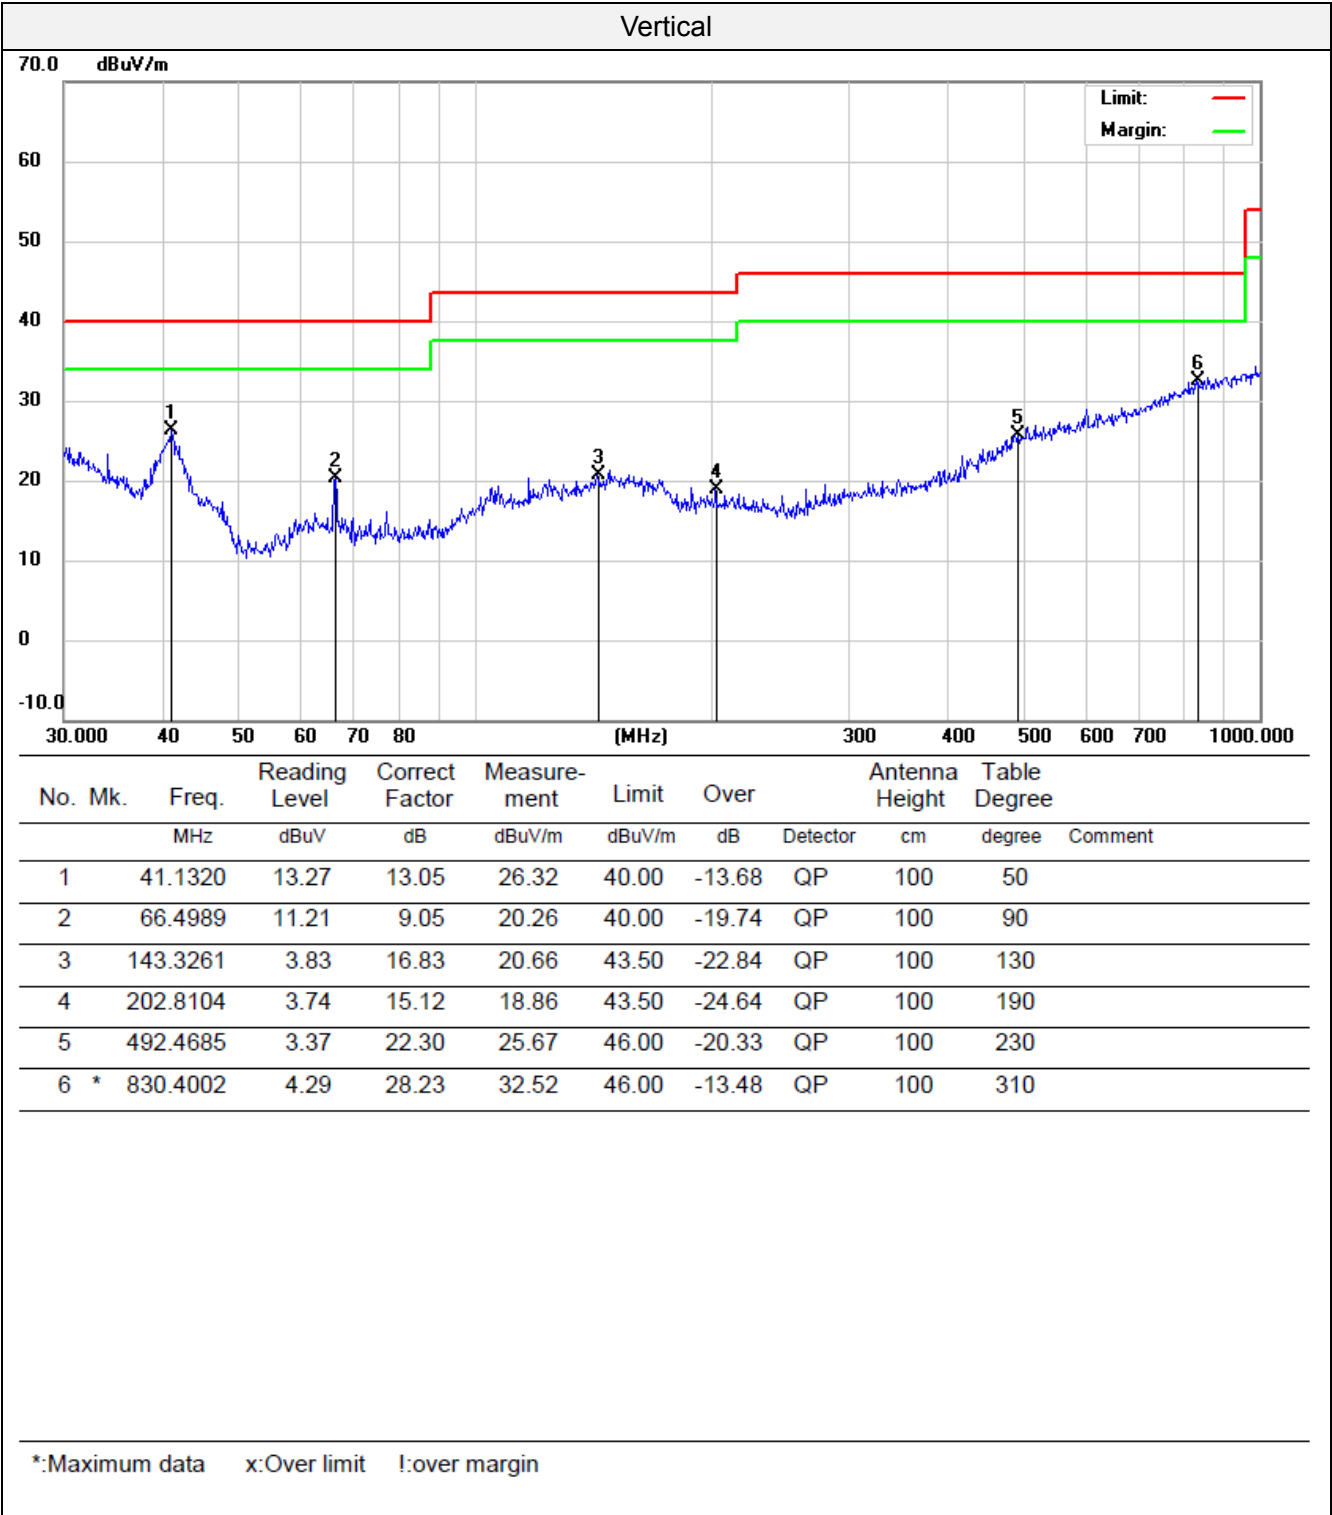

For 1GHz to 40GHz

Note: All 802.11a, 802.11n(20), 802.11n(40),802.11ac(20),802.11ac(40) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.

U-NII 1

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
802.11a Mode -5180MHz									
V	3550	57.23	29.03	5.24	36.4	55.1	68.2	13.1	PK
V	3550	42.15	29.03	5.24	36.4	40.02	54	13.98	AV
H	3550	52.97	29.03	5.24	36.4	50.84	68.2	17.36	PK
H	3550	48.41	29.03	5.24	36.4	46.28	54	7.72	AV
V	10360	34.2	39.41	11.45	34.28	50.78	68.2	17.42	PK
V	10360	23.49	39.41	11.45	34.28	40.07	54	13.93	AV
H	10360	36.23	39.41	11.45	34.28	52.81	68.2	15.39	PK
H	10360	28.77	39.41	11.45	34.28	45.35	54	8.65	AV
802.11a Mode -5200MHz									
V	3550	53	29.03	5.24	36.4	50.87	68.2	17.33	PK
V	3550	43.18	29.03	5.24	36.4	41.05	54	12.95	AV
H	3550	55.18	29.03	5.24	36.4	53.05	68.2	15.15	PK
H	3550	46.89	29.03	5.24	36.4	44.76	54	9.24	AV
V	10400	35.3	39.42	11.47	34.28	51.91	68.2	16.29	PK
V	10400	26.2	39.42	11.47	34.28	42.81	54	11.19	AV
H	10400	34.64	39.42	11.47	34.28	51.25	68.2	16.95	PK
H	10400	28.94	39.42	11.47	34.28	45.55	54	8.45	AV
802.11a Mode -5240MHz									
V	3550	53.75	29.03	5.24	36.4	51.62	68.2	16.58	PK
V	3550	43.51	29.03	5.24	36.4	41.38	54	12.62	AV
H	3550	53.27	29.03	5.24	36.4	51.14	68.2	17.06	PK
H	3550	48.29	29.03	5.24	36.4	46.16	54	7.84	AV
V	10480	37.13	39.43	11.47	34.28	53.75	68.2	14.45	PK
V	10480	26.11	39.43	11.47	34.28	42.73	54	11.27	AV
H	10480	36.35	39.43	11.47	34.28	52.97	68.2	15.23	PK
H	10480	29.01	39.43	11.47	34.28	45.63	54	8.37	AV

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Radiated Band Edge Test:

All 802.11a, 802.11n(20), 802.11n(40),802.11ac(20),802.11ac(40)modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.

U-NII 1

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11a									
V	5150	54.78	31.22	7.62	36.5	57.12	74	16.88	PK
V	5150	37.72	31.22	7.62	36.5	40.06	54	13.94	AV
H	5150	55.3	31.22	7.62	36.5	57.64	74	16.36	PK
H	5150	44.34	31.22	7.62	36.5	46.68	54	7.32	AV
V	5350	55.07	31.56	7.83	35.82	58.64	74	15.36	PK
V	5350	38.54	31.56	7.83	35.82	42.11	54	11.89	AV
H	5350	54.54	31.56	7.83	35.82	58.11	74	15.89	PK
H	5350	40.47	31.56	7.83	35.82	44.04	54	9.96	AV

5.3 Conduction spurious emission

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

Test Configuration



TEST RESULTS

See APPENDIX V

5.4 Maximum Conducted Average Output Power

Limit

For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

See APPENDIX II

5.5 Power Spectral Density

Limit

(1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

(3) For the band 5.725 - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.^{note1, note2}


Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 510KHz for U-NII 3 band.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to encompass the entire EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.

Test Configuration



Test Results

See APPENDIX II

5.6 Emission Bandwidth (26dBm Bandwidth)


Limit

N/A

Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

Test Configuration



Test Results

See APPENDIX IV

5.7 Minimum Emission Bandwidth (6dBm Bandwidth)


Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration



Test Results


N/A

5.8 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

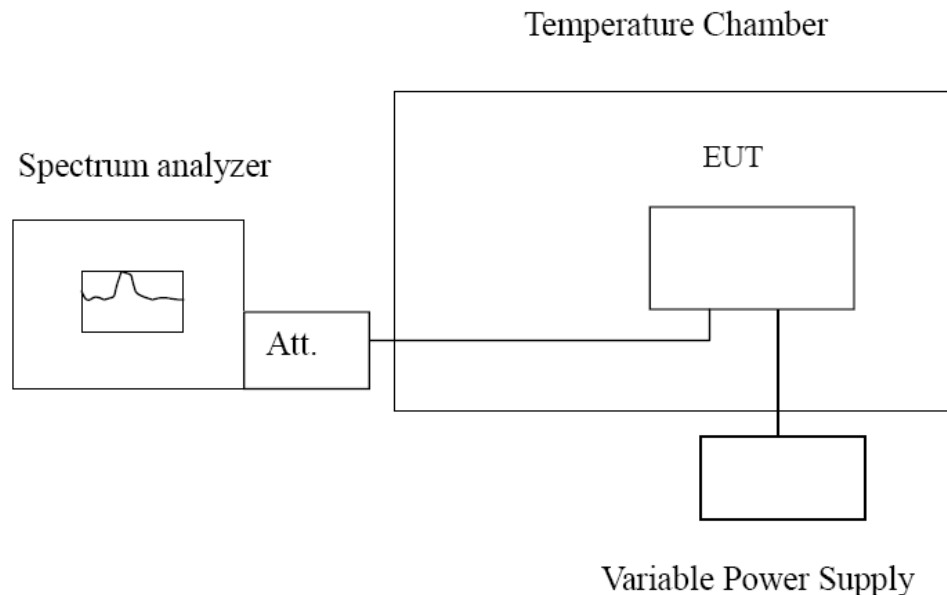

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.



TEST RESULTS

See APPENDIX I

5.9 Duty Cycle Information

See APPENDIX VI

6 Test Setup Photos of the EUT

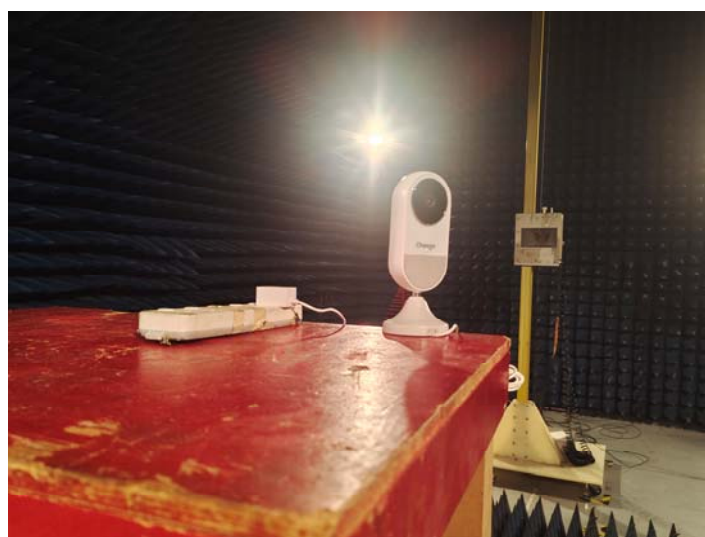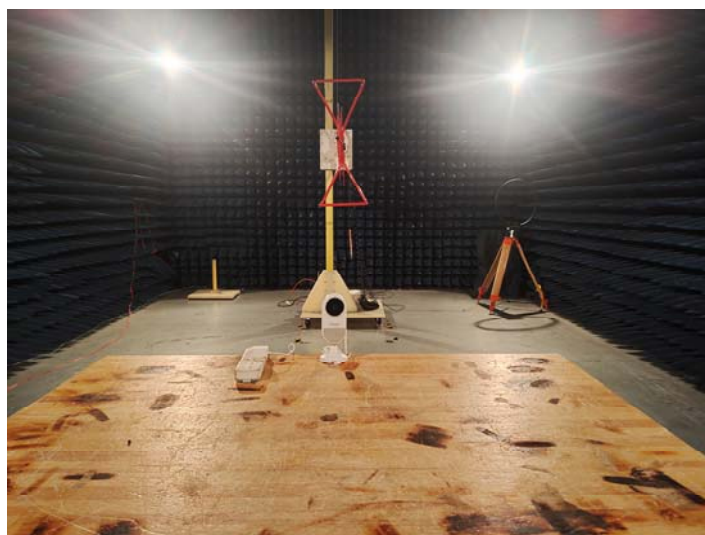

7 Photos of the EUT

see photo report.

APPENDIX I.Frequency Stability

Test Result

Condition	Mode	Ch.	Antenna	Modulation Signal	Center Frequency (MHz)	Calculated Value of Center Frequency(MHz)	Result (ppm)	Limit (ppm)	Status
NT/NV	IEEE 802.11a	36	0	False	5180.0	5180.248762	48.02	Within authorized band	PASS
		40		False	5200.0	5200.232312	44.68		PASS
		44		False	5220.0	5220.249325	47.76		PASS
	IEEE 802.11n_20	36		False	5180.0	5180.225149	43.47		PASS
		40		False	5200.0	5200.233787	44.96		PASS
		44		False	5220.0	5220.249037	47.71		PASS
	IEEE 802.11n_40	38		False	5190.0	5190.248237	47.83		PASS
		46		False	5230.0	5230.212349	40.6		PASS
	IEEE 802.11ac_20	36		False	5180.0	5180.247012	47.69		PASS
		40		False	5200.0	5199.764813	-45.23		PASS
		44		False	5220.0	5220.224687	43.04		PASS
	IEEE 802.11ac_40	38		False	5190.0	5189.753938	-47.41		PASS
		46		False	5230.0	5230.224649	42.95		PASS

APPENDIX II. Conducted Peak Output Power

Conducted AVG output power


Mode	Channel	Ant. 0 (dBm)	Limit (dBm)	Result
IEEE 802.11a	36	5.51	24	PASS
	40	3.27	24	PASS
	44	2.47	24	PASS
IEEE 802.11n_20	36	4.61	24	PASS
	40	4.05	24	PASS
	44	4.37	24	PASS
IEEE 802.11n_40	38	3.49	24	PASS
	46	3.98	24	PASS
IEEE 802.11ac_20	36	5.75	24	PASS
	40	5.60	24	PASS
	44	5.71	24	PASS
IEEE 802.11ac_40	38	2.25	24	PASS
	46	0.55	24	PASS


APPENDIX III.6dB Bandwidth

Test Result


Mode	Channel	Ant.	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11a	36	0	5180	15.64	0.5	PASS
	40		5200	15.70		PASS
	44		5220	15.69		PASS
IEEE 802.11n_20	36		5180	15.11		PASS
	40		5200	16.34		PASS
	44		5220	16.34		PASS
IEEE 802.11n_40	38		5190	35.11		PASS
	46		5230	35.09		PASS
IEEE 802.11ac_20	36		5180	15.43		PASS
	40		5200	15.38		PASS
	44		5220	15.11		PASS
IEEE 802.11ac_40	38		5190	35.07		PASS
	46		5230	35.11		PASS

Test Graphs

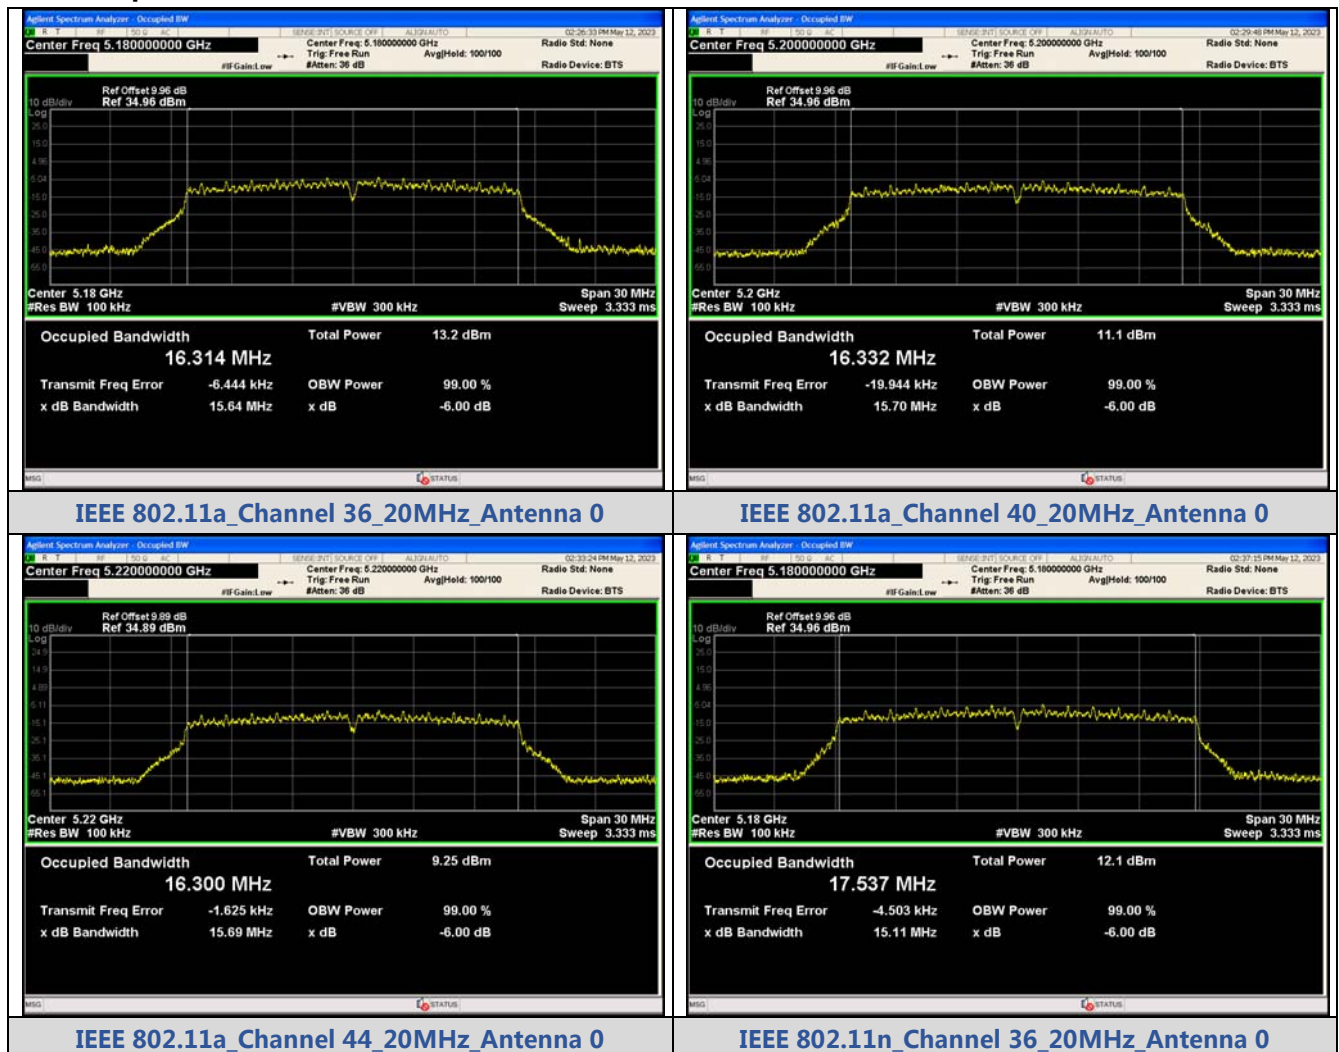


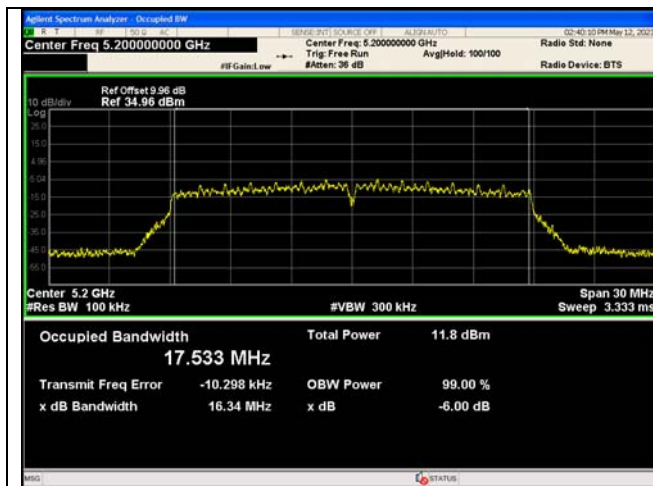


IEEE 802.11n_Channel 40_20MHz_Antenna 0

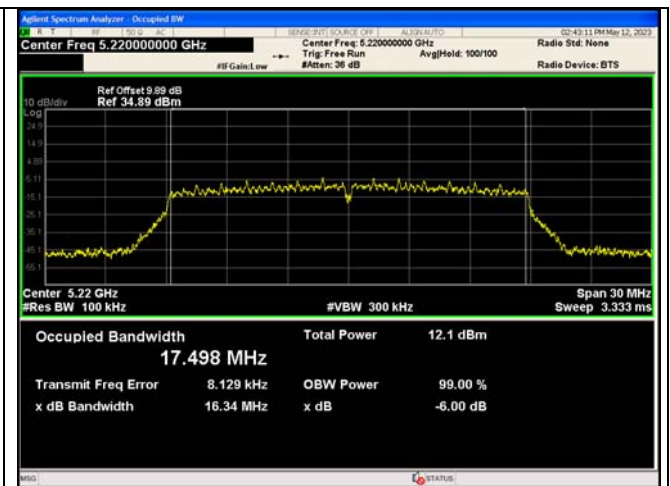


IEEE 802.11n_Channel 44_20MHz_Antenna 0

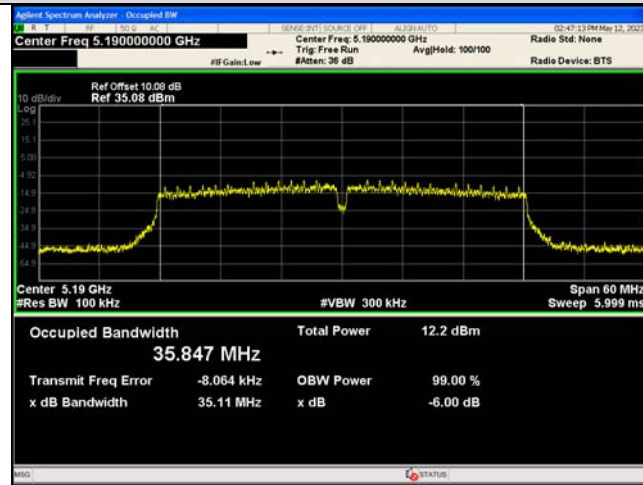


IEEE 802.11n_Channel 38_40MHz_Antenna 0

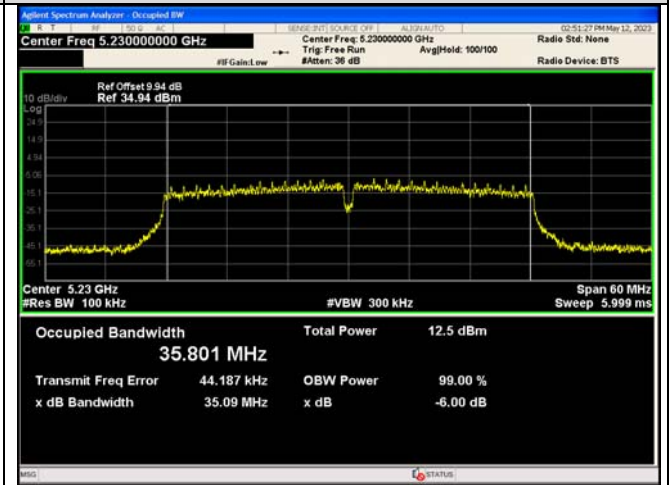


IEEE 802.11n_Channel 46_40MHz_Antenna 0

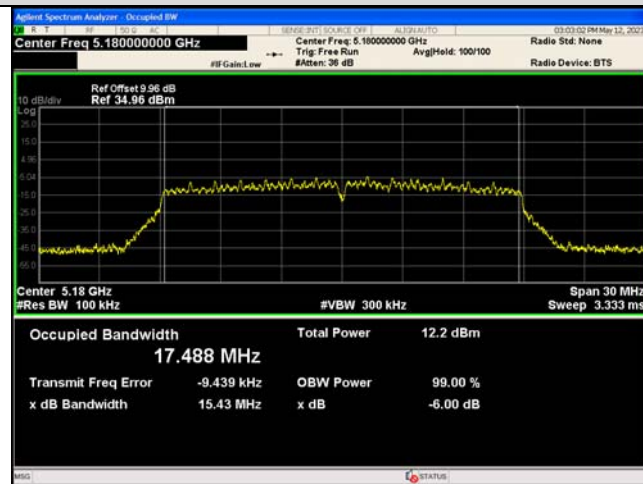


IEEE 802.11ac_Channel 36_20MHz_Antenna 0

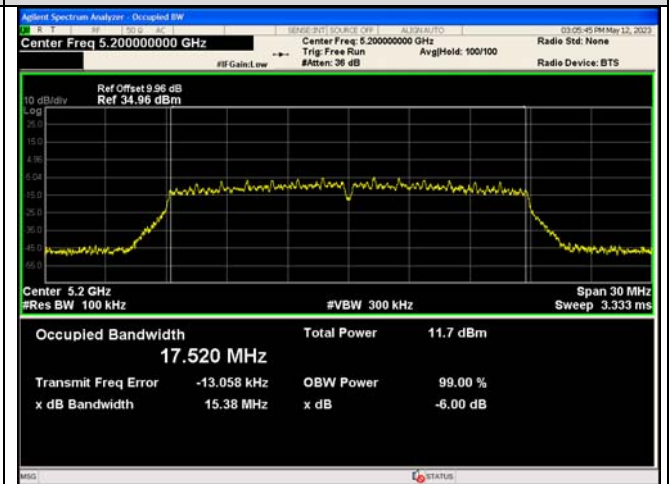


IEEE 802.11ac_Channel 40_20MHz_Antenna 0

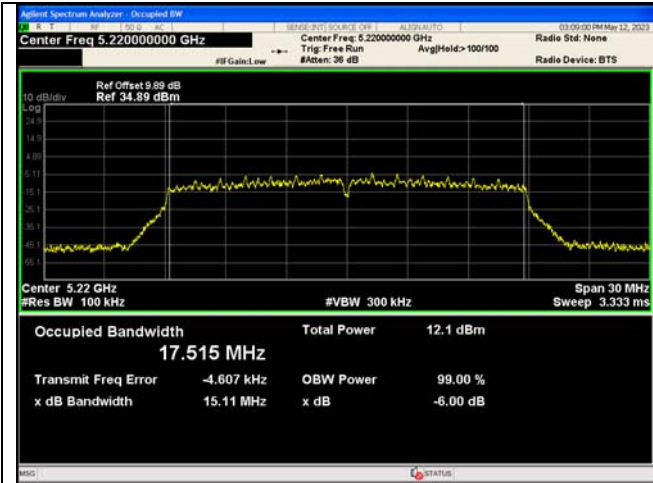


IEEE 802.11ac_Channel 44_20MHz_Antenna 0

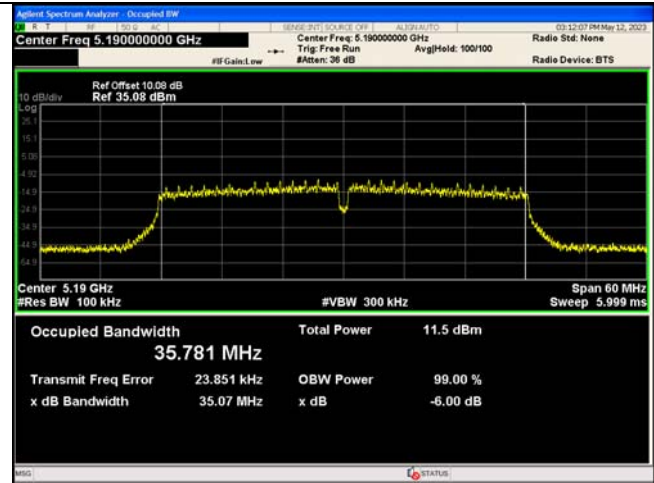

IEEE 802.11ac_Channel 38_40MHz_Antenna 0

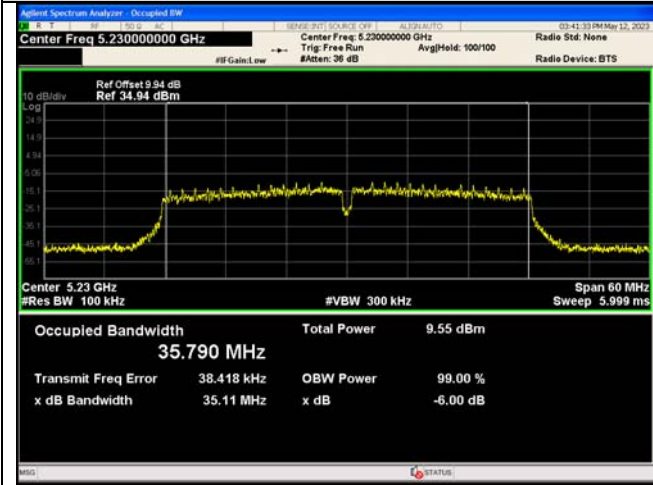

IEEE 802.11ac_Channel 46_40MHz_Antenna 0










APPENDIX IV.26dB Bandwidth


Test Result

Mode	Channel	Ant.	Center Frequency (MHz)	26 dB Bandwidth (MHz)	RBW/EBW
IEEE 802.11a	36	0	5180	19.36	1.12
	40		5200	19.35	1.12
	44		5220	19.74	1.1
IEEE 802.11n_20	36		5180	19.99	1.1
	40		5200	19.85	1.12
	44		5220	19.89	1.1
IEEE 802.11n_40	38		5190	39.89	1.05
	46		5230	40.12	1.05
IEEE 802.11ac_20	36		5180	19.86	1.12
	40		5200	19.85	1.11
	44		5220	19.87	1.1
IEEE 802.11ac_40	38		5190	40.04	1.06
	46		5230	40.15	1.06


Test Graphs

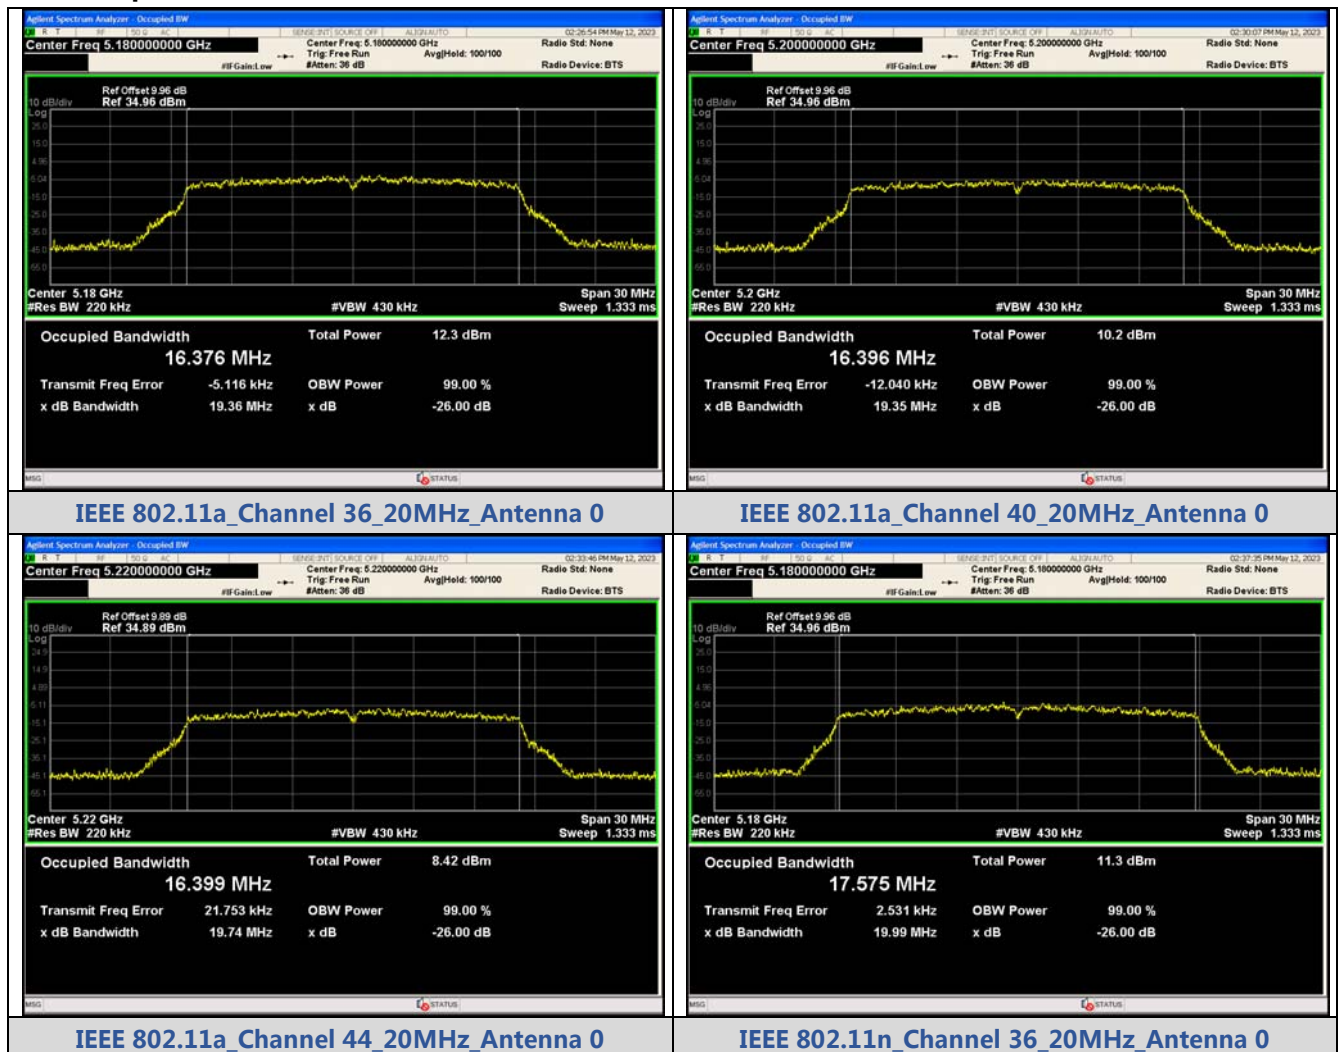

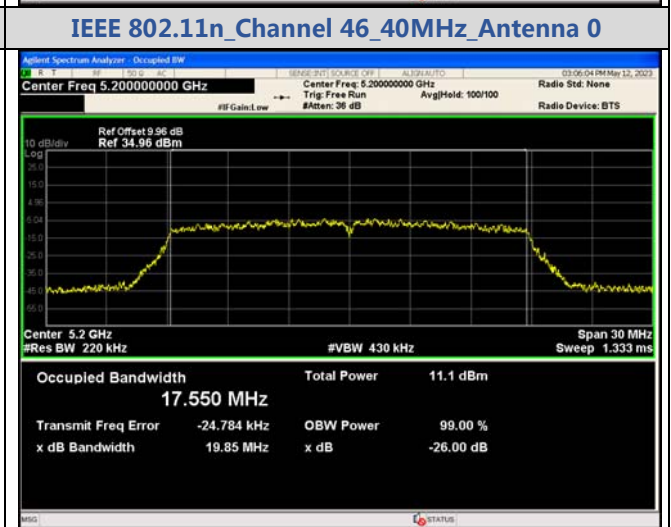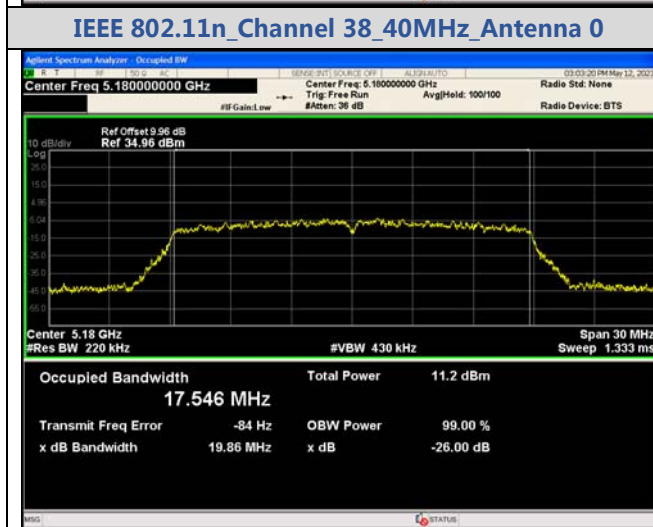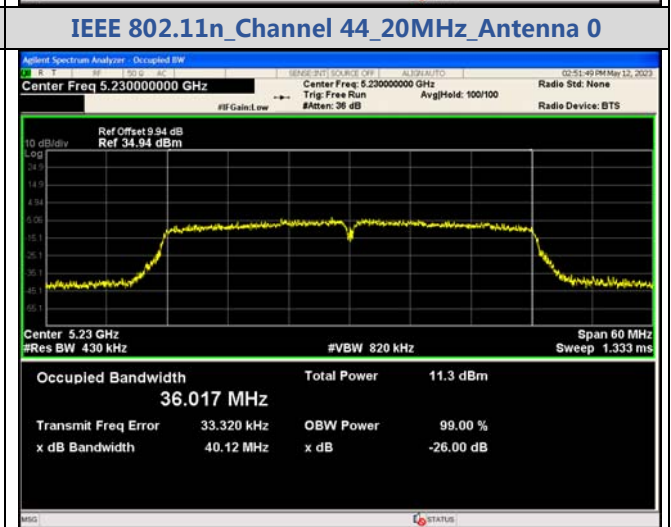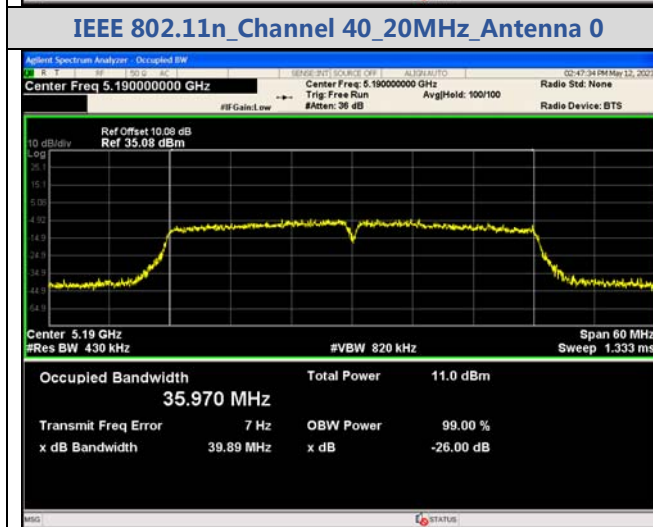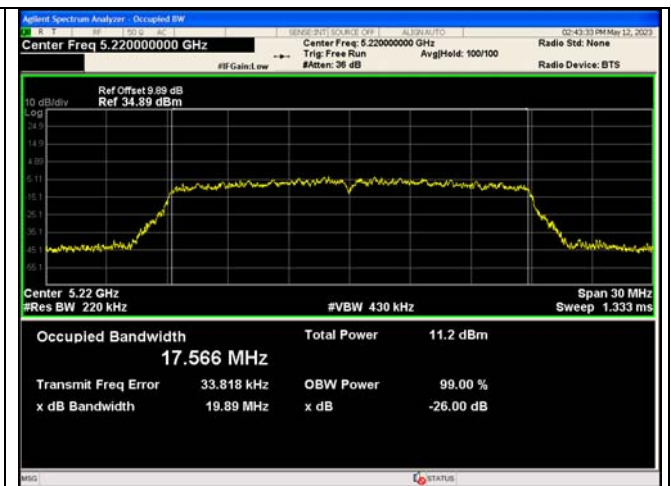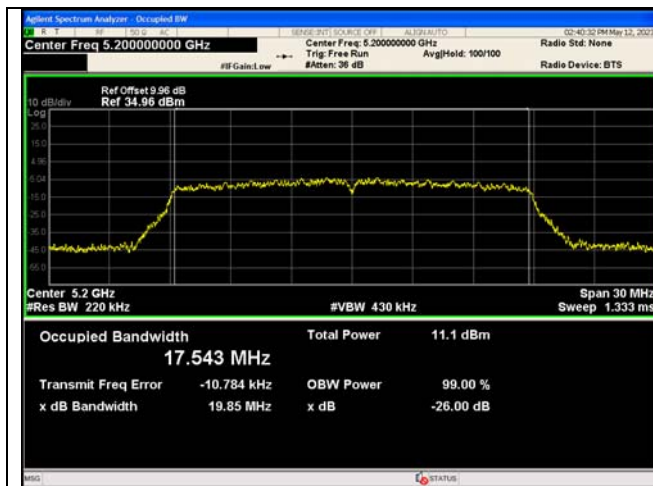


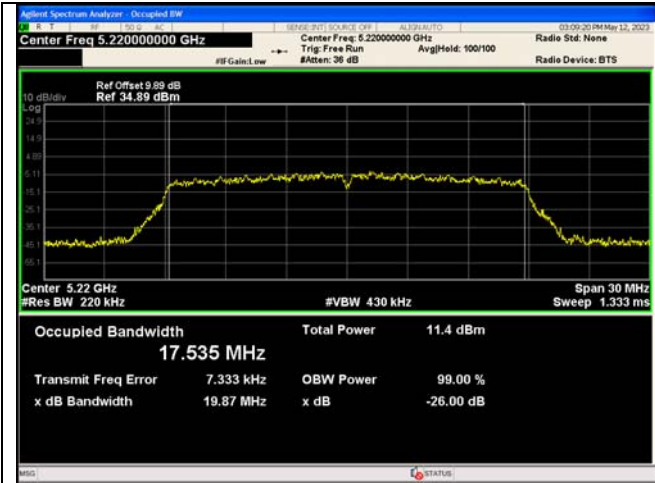

IEEE 802.11ac_Channel 44_20MHz_Antenna 0

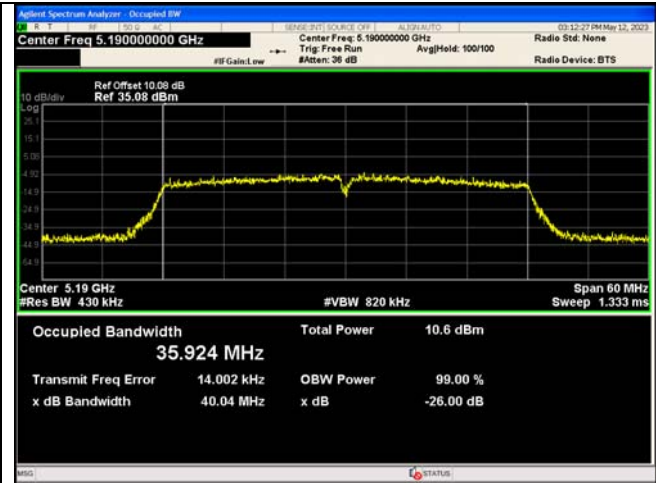

IEEE 802.11ac_Channel 38_40MHz_Antenna 0

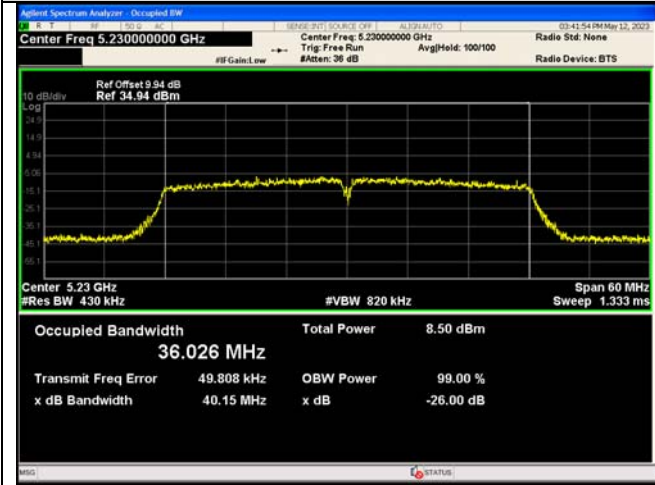

IEEE 802.11ac_Channel 46_40MHz_Antenna 0

Void


APPENDIX V. Conducted Out Of Band Emission

Test Result

Mode	Channel	Ant.	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
IEEE 802.11a	36	0	2406.00	-30.414	-27	-3.410	PASS
			5148.96	-41.707	-27	-15	PASS
			5150.00	-42.207	-27	-15	PASS
			5350.00	-41.272	-27	-14	PASS
			5460.00	-39.047	-27	-12	PASS
			2494.10	-34.339	-27	-12	PASS
	40		2420.84	-25.713	-27	-12	PASS
			5149.92	-42.445	-27	-15	PASS
			5150.00	-42.445	-27	-15	PASS
			5350.00	-41.167	-27	-14	PASS
			5460.00	-40.127	-27	-13	PASS
			24913.5	-34.163	-27	-12	PASS
	44		1776.73	-22.170	-27	-12	PASS
			5149.92	-42.834	-27	-16	PASS
			5150.00	-42.834	-27	-16	PASS
			5350.00	-40.884	-27	-14	PASS
			5459.04	-39.752	-27	-13	PASS
			24874.7	-33.424	-27	-12	PASS
IEEE 802.11n_20	36		2631.79	-31.800	-27	-4.800	PASS
			5148.00	-40.600	-27	-14	PASS
			5150.00	-42.391	-27	-15	PASS
			5350.00	-40.663	-27	-14	PASS
			5459.04	-40.257	-27	-13	PASS
			24978.4	-34.478	-27	-12	PASS
	40		1777.24	-19.675	-27	-0.54	PASS
			5149.92	-41.524	-27	-15	PASS
			5150.00	-41.524	-27	-15	PASS
			5350.00	-40.938	-27	-14	PASS
			5459.04	-40.584	-27	-14	PASS
			24893.9	-34.715	-27	-12	PASS
	44		2447.34	-27.865	-27	-0.860	PASS
			5143.20	-40.516	-27	-14	PASS
			5150.00	-40.806	-27	-14	PASS
			5350.00	-41.698	-27	-15	PASS
			5460.00	-41.272	-27	-14	PASS
			24822.3	-33.947	-27	-12	PASS
IEEE 802.11n_40	38		2405.23	-30.563	-27	-3.560	PASS
			5148.00	-39.876	-27	-13	PASS
			5150.00	-41.258	-27	-14	PASS


	46	5350.00	-40.422	-27	-13	PASS
		5460.00	-40.161	-27	-13	PASS
		24989.7	-33.186	-27	-12	PASS
		3094.14	-31.766	-27	-4.770	PASS
		5149.92	-41.344	-27	-14	PASS
		5150.00	-41.344	-27	-14	PASS
		5350.00	-41.419	-27	-14	PASS
		5460.00	-40.436	-27	-13	PASS
		24958.2	-34.537	-27	-12	PASS
		2436.20	-31.358	-27	-4.360	PASS
IEEE 802.11ac_20	36	5148.00	-40.286	-27	-13	PASS
		5150.00	-40.729	-27	-14	PASS
		5350.00	-40.724	-27	-14	PASS
		5453.28	-40.245	-27	-13	PASS
		24945.5	-32.913	-27	-12	PASS
		2445.29	-29.795	-27	-2.800	PASS
	40	5149.92	-39.401	-27	-12	PASS
		5150.00	-39.401	-27	-12	PASS
		5350.00	-41.757	-27	-15	PASS
		5459.04	-40.514	-27	-14	PASS
		24902.2	-32.839	-27	-12	PASS
		2402.80	-30.125	-27	-3.120	PASS
	44	5149.92	-42.216	-27	-15	PASS
		5150.00	-42.216	-27	-15	PASS
		5350.00	-40.774	-27	-14	PASS
		5459.04	-39.638	-27	-13	PASS
		24898.8	-20.280	-27	-12	PASS
		2409.07	-27.891	-27	-0.890	PASS
IEEE 802.11ac_40	38	5148.96	-41.329	-27	-14	PASS
		5150.00	-41.410	-27	-14	PASS
		5350.00	-41.310	-27	-14	PASS
		5459.04	-40.454	-27	-13	PASS
		24902.2	-32.839	-27	-12	PASS
		2410.35	-30.503	-27	-3.500	PASS
	46	5149.92	-42.438	-27	-15	PASS
		5150.00	-42.438	-27	-15	PASS
		5350.00	-40.104	-27	-13	PASS
		5460.00	-39.880	-27	-13	PASS
		24943.5	-33.582	-27	-12	PASS

Test Graphs

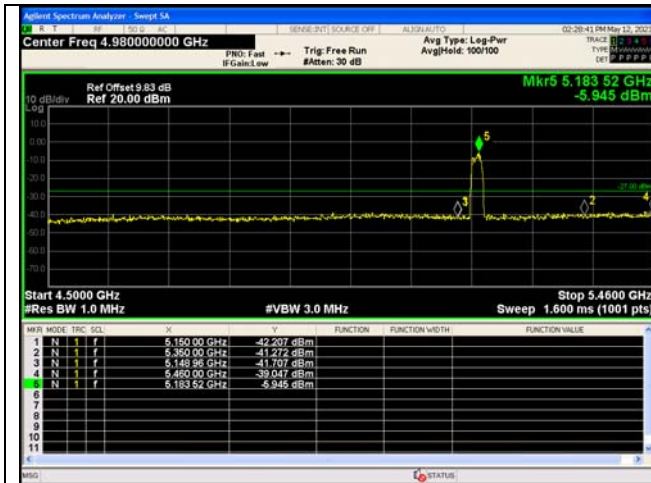


Out Of Band Emission

IEEE 802.11a_Channel 36_20MHz_Antenna 0

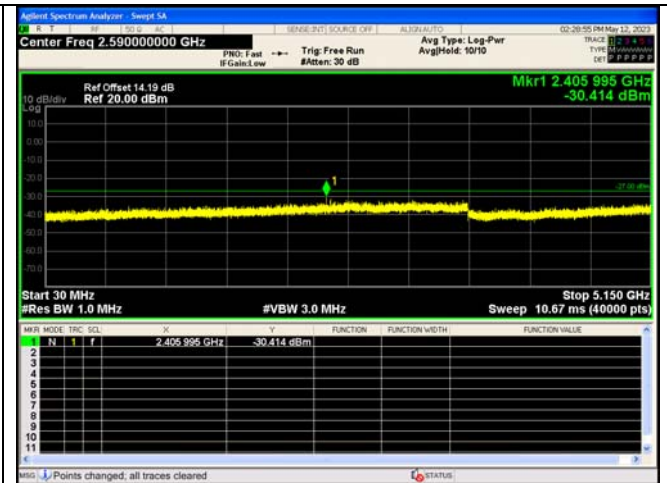


Spurious Emission:30.0~5150 MHz

IEEE 802.11a_Channel 36_20MHz_Antenna 0

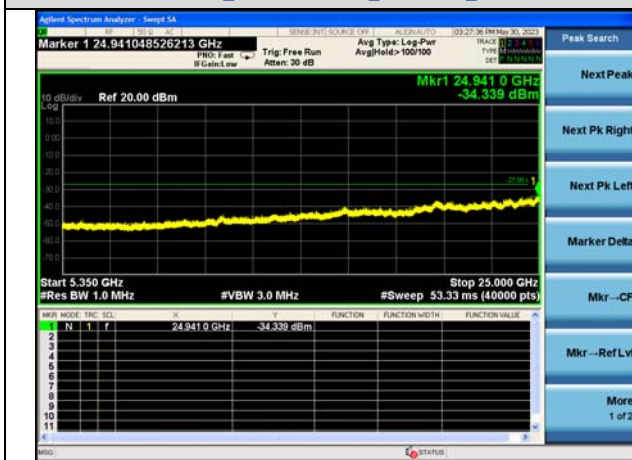

Spurious Emission:5350~25000.0 MHz

IEEE 802.11a_Channel 36_20MHz_Antenna 0

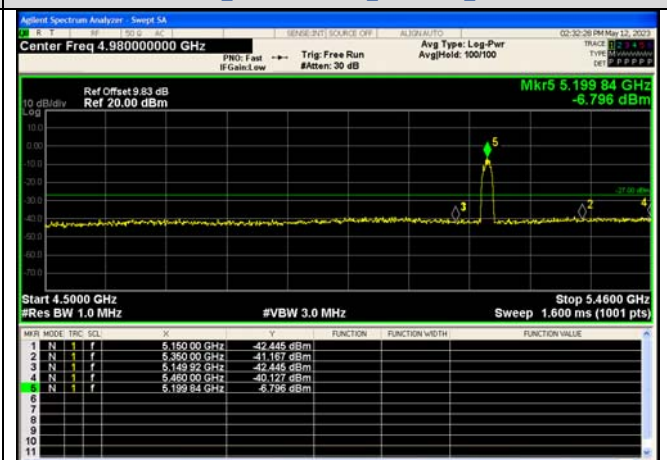

Out Of Band Emission

IEEE 802.11a_Channel 40_20MHz_Antenna 0




Spurious Emission:30.0~5150 MHz

IEEE 802.11a_Channel 40_20MHz_Antenna 0




Spurious Emission:5350~25000.0 MHz

IEEE 802.11a_Channel 40_20MHz_Antenna 0

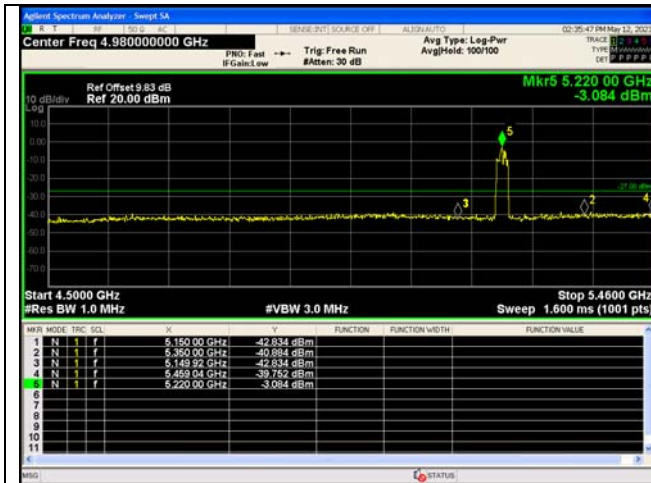


Out Of Band Emission

IEEE 802.11a_Channel 44_20MHz_Antenna 0

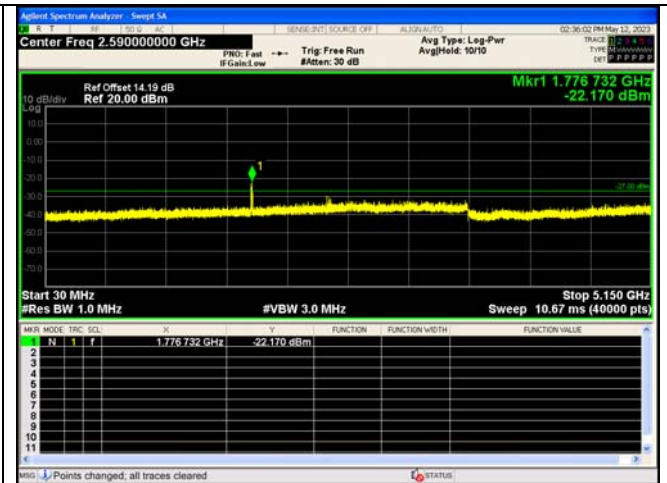


Spurious Emission:30.0~5150 MHz

IEEE 802.11a_Channel 44_20MHz_Antenna 0

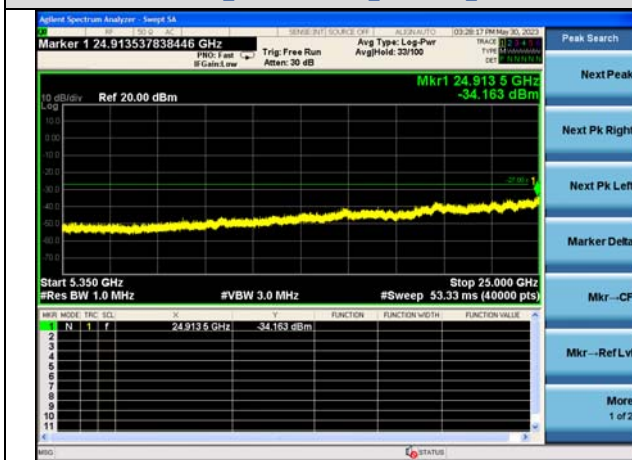


Spurious Emission:5350~25000.0 MHz

IEEE 802.11a_Channel 44_20MHz_Antenna 0

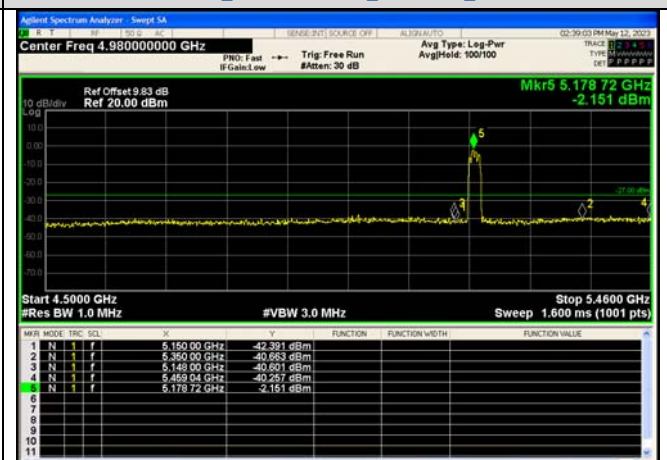


Out Of Band Emission

IEEE 802.11n_Channel 36_20MHz_Antenna 0

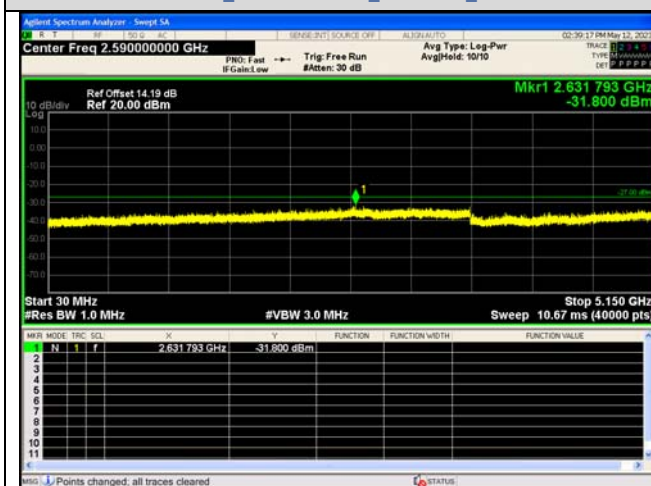


Spurious Emission:30.0~5150 MHz

IEEE 802.11n_Channel 36_20MHz_Antenna 0

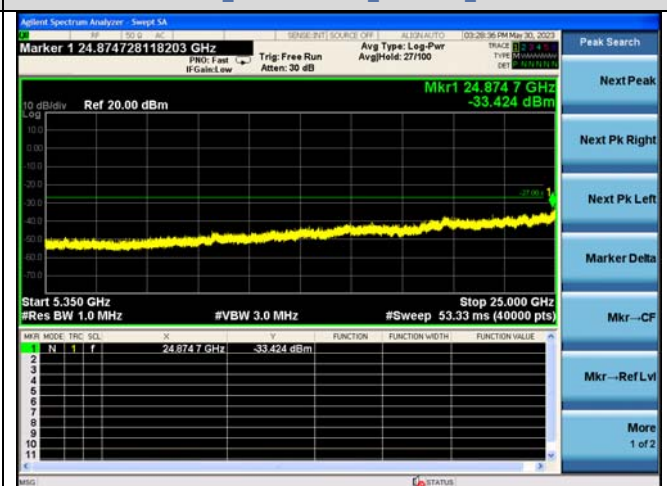


Spurious Emission:5350~25000.0 MHz

IEEE 802.11n_Channel 36_20MHz_Antenna 0

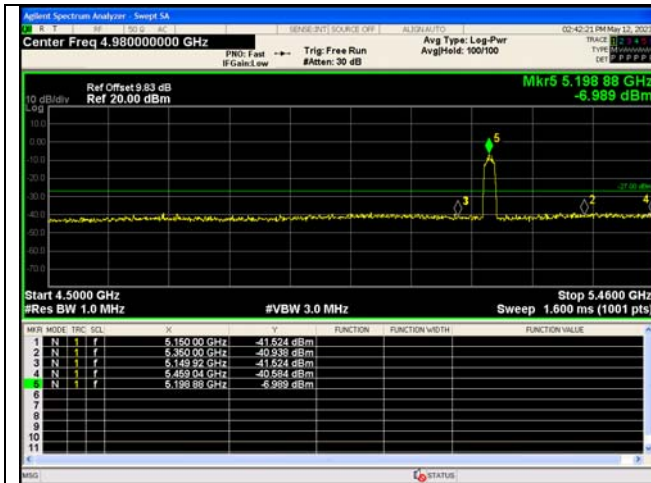


Out Of Band Emission

IEEE 802.11n_Channel 40_20MHz_Antenna 0

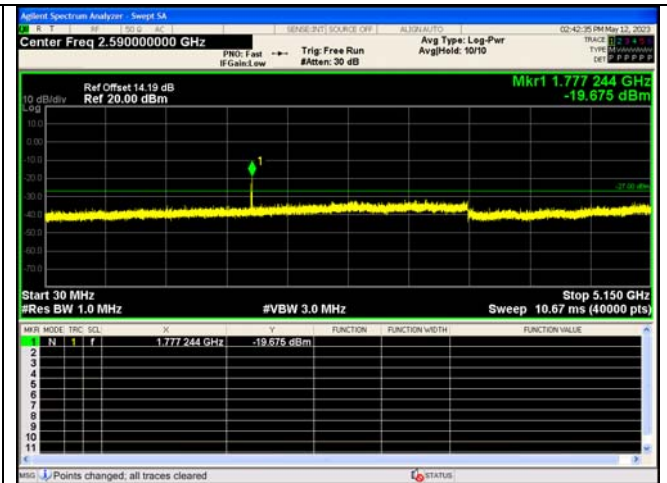


Spurious Emission:30.0~5150 MHz

IEEE 802.11n_Channel 40_20MHz_Antenna 0

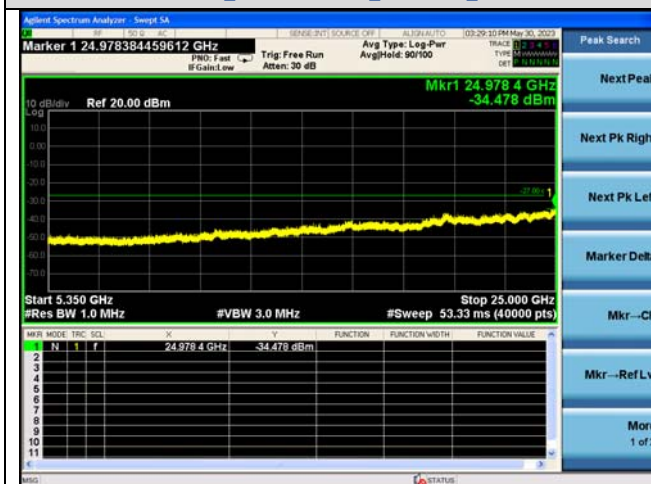


Spurious Emission:5350~25000.0 MHz

IEEE 802.11n_Channel 40_20MHz_Antenna 0

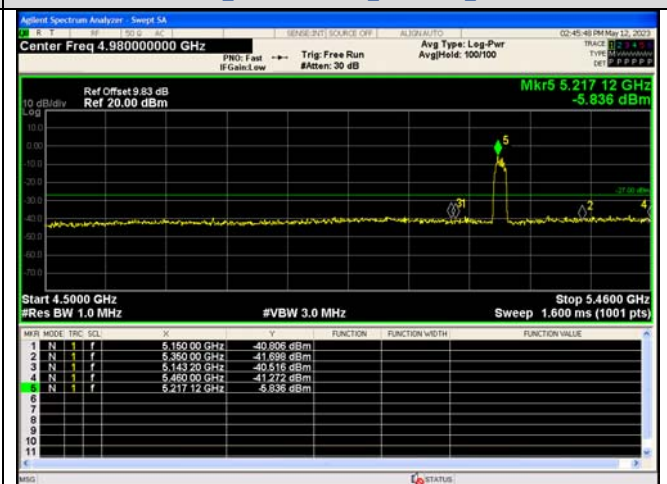


Out Of Band Emission

IEEE 802.11n_Channel 44_20MHz_Antenna 0

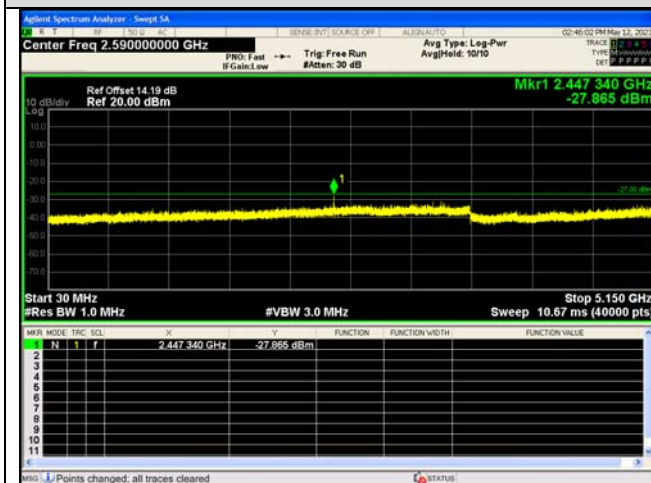


Spurious Emission:30.0~5150 MHz

IEEE 802.11n_Channel 44_20MHz_Antenna 0

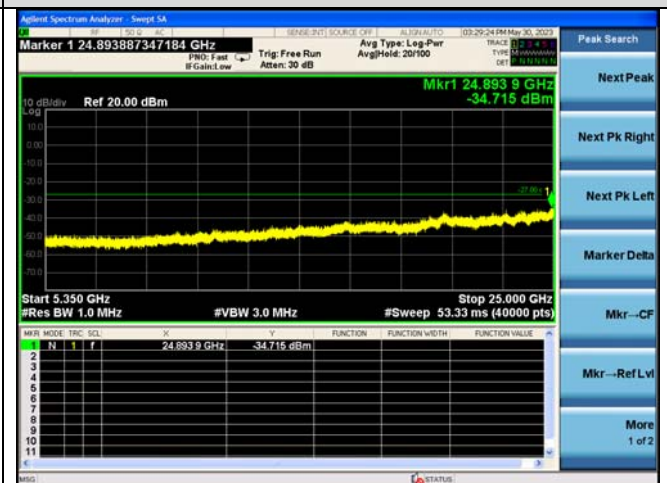


Spurious Emission:5350~25000.0 MHz


IEEE 802.11n_Channel 44_20MHz_Antenna 0

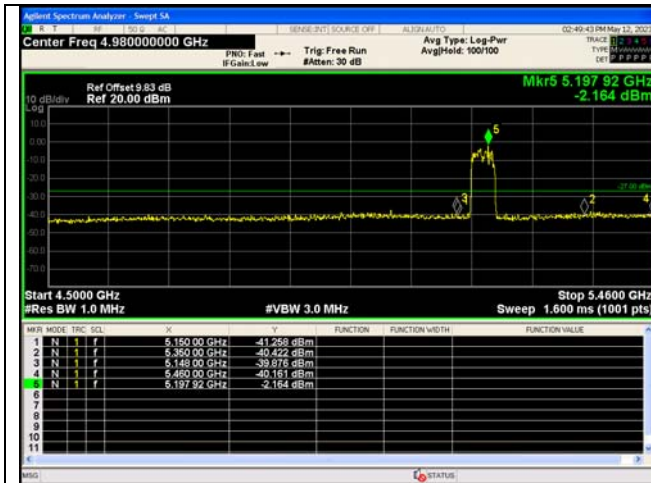


Out Of Band Emission
IEEE 802.11n_Channel 38_40MHz_Antenna 0

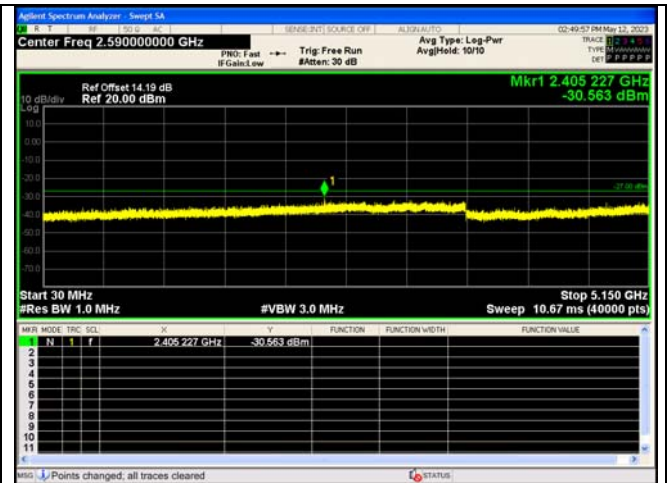


Spurious Emission:30.0~5150 MHz
IEEE 802.11n_Channel 38_40MHz_Antenna 0

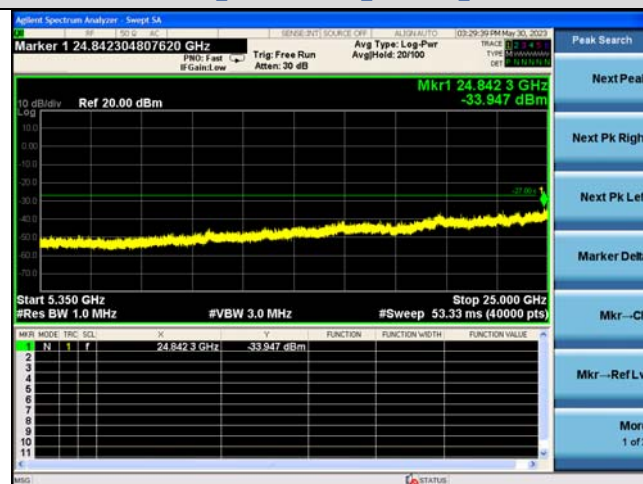


Spurious Emission:5350~25000.0 MHz
IEEE 802.11n_Channel 38_40MHz_Antenna 0

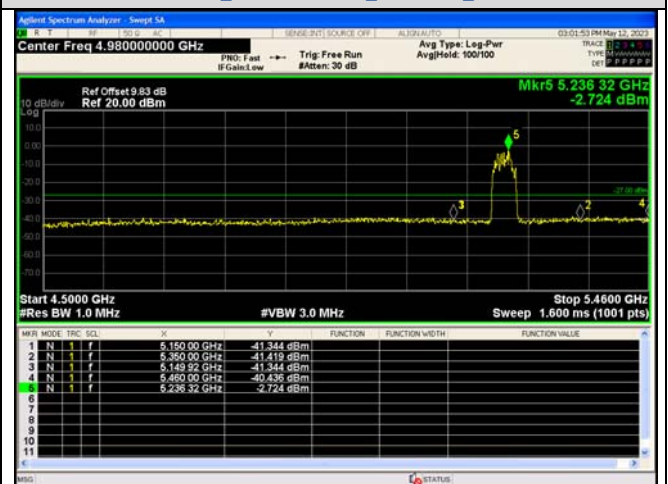


Out Of Band Emission
IEEE 802.11n_Channel 46_40MHz_Antenna 0

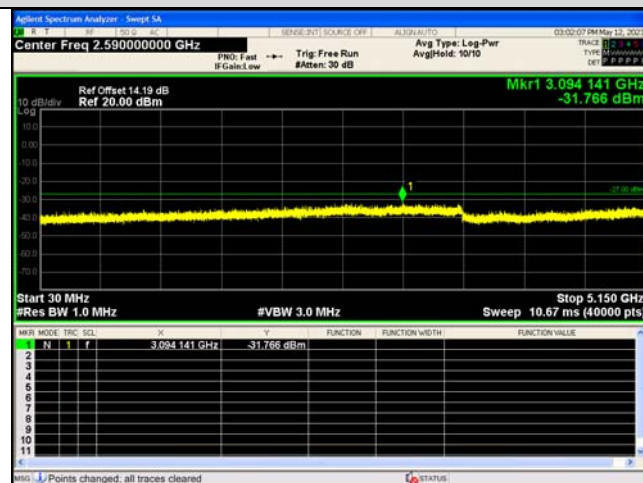

Spurious Emission:30.0~5150 MHz
IEEE 802.11n_Channel 46_40MHz_Antenna 0

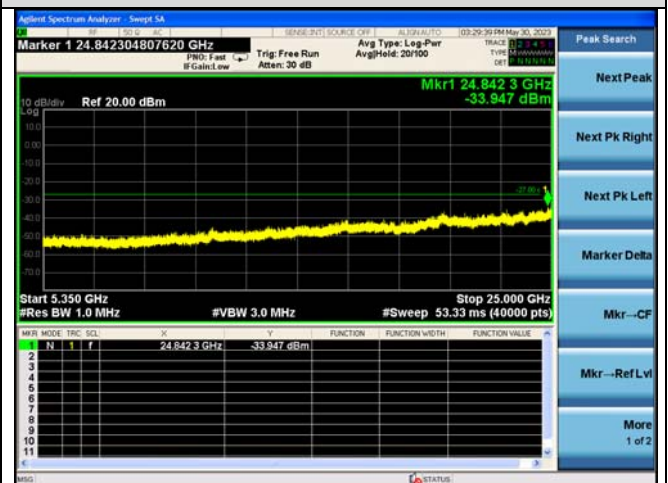


Spurious Emission:5350~25000.0 MHz
IEEE 802.11n_Channel 46_40MHz_Antenna 0

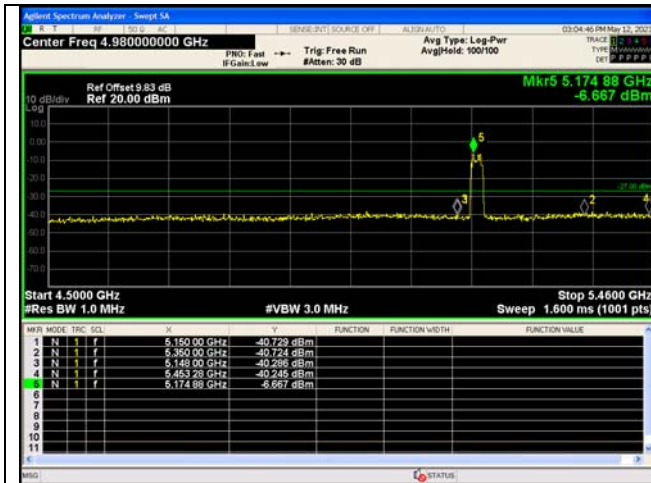


Out Of Band Emission

IEEE 802.11ac_Channel 36_20MHz_Antenna 0

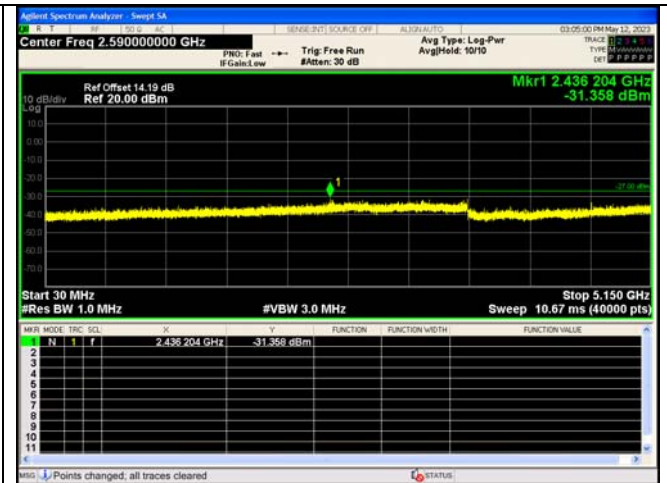


Spurious Emission:30.0~5150 MHz

IEEE 802.11ac_Channel 36_20MHz_Antenna 0

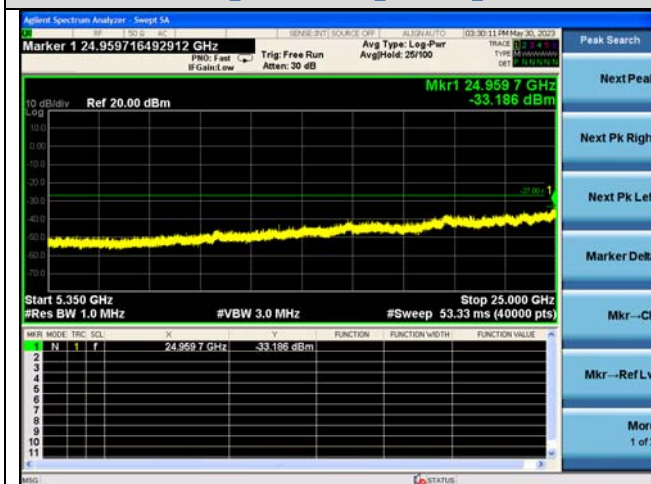

Spurious Emission:5350~25000.0 MHz

IEEE 802.11ac_Channel 36_20MHz_Antenna 0

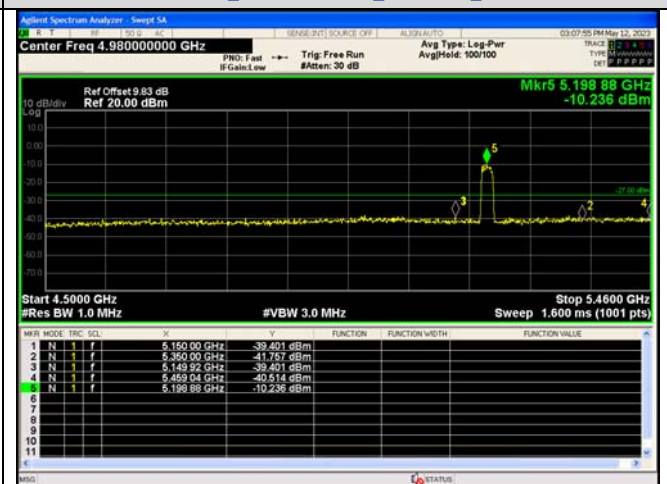


Out Of Band Emission

IEEE 802.11ac_Channel 40_20MHz_Antenna 0




Spurious Emission:30.0~5150 MHz

IEEE 802.11ac_Channel 40_20MHz_Antenna 0

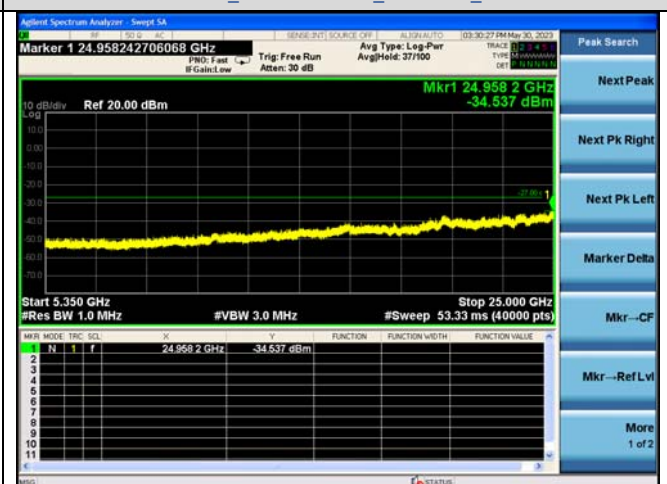


Spurious Emission:5350~25000.0 MHz

IEEE 802.11ac_Channel 40_20MHz_Antenna 0

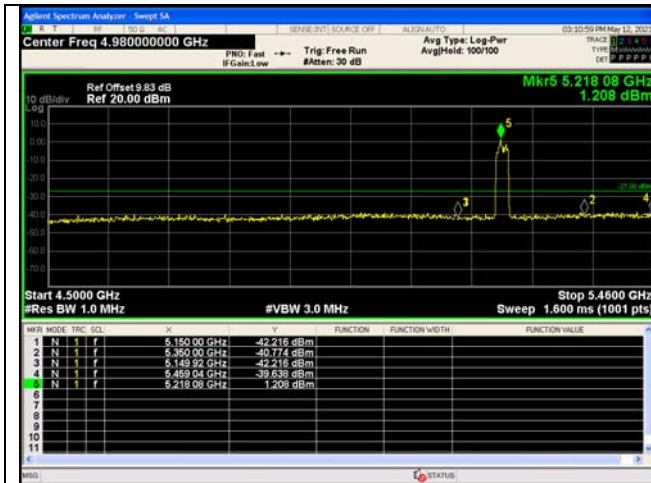


Out Of Band Emission

IEEE 802.11ac_Channel 44_20MHz_Antenna 0

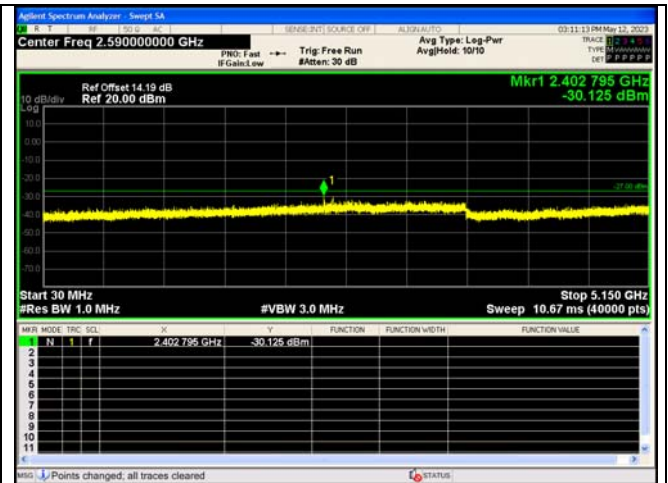


Spurious Emission:30.0~5150 MHz

IEEE 802.11ac_Channel 44_20MHz_Antenna 0

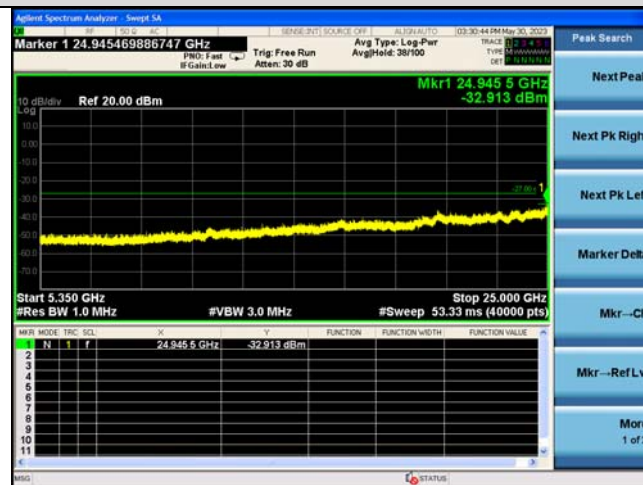


Spurious Emission:5350~25000.0 MHz

IEEE 802.11ac_Channel 44_20MHz_Antenna 0

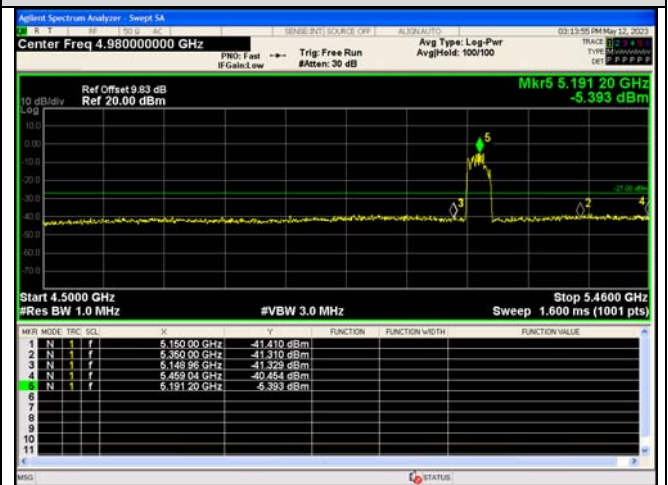


Out Of Band Emission

IEEE 802.11ac_Channel 38_40MHz_Antenna 0

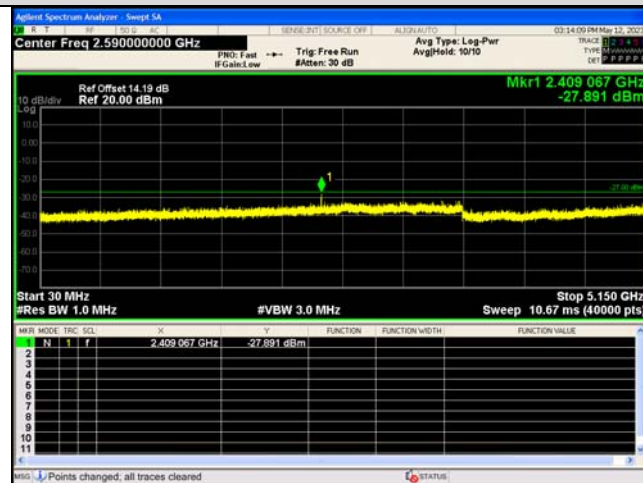


Spurious Emission:30.0~5150 MHz

IEEE 802.11ac_Channel 38_40MHz_Antenna 0

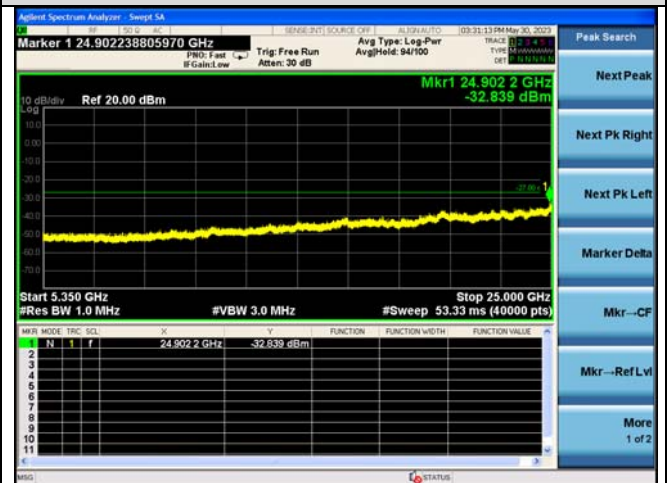


Spurious Emission:5350~25000.0 MHz


IEEE 802.11ac_Channel 38_40MHz_Antenna 0

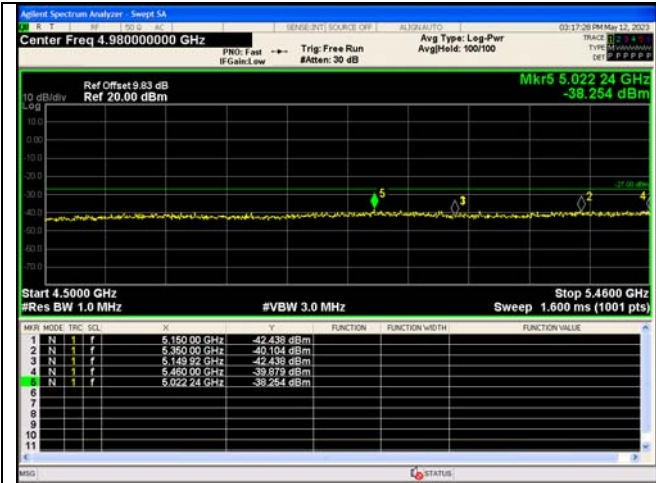

Out Of Band Emission
IEEE 802.11ac_Channel 46_40MHz_Antenna 0

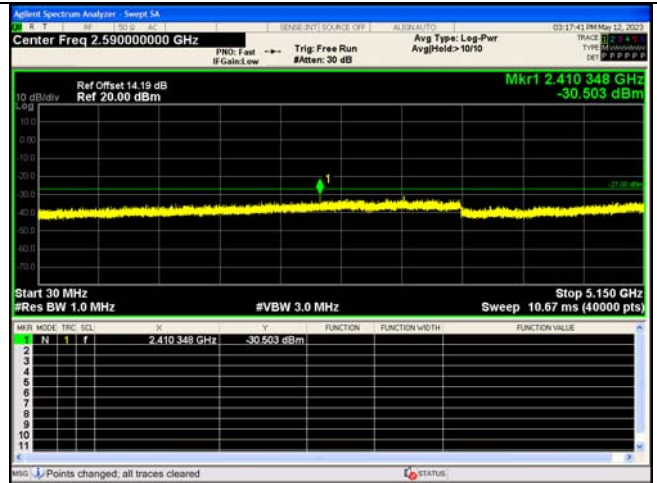

Spurious Emission:30.0~5150 MHz
IEEE 802.11ac_Channel 46_40MHz_Antenna 0

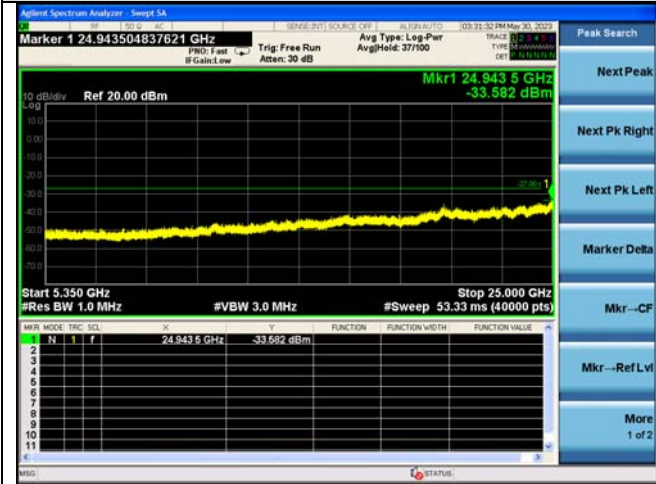

Spurious Emission:5350~25000.0 MHz
IEEE 802.11ac_Channel 46_40MHz_Antenna 0

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More

1 of 2


Void


APPENDIX VI.Duty Cycle

Test Result


Mode	Data rates	Channel	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
IEEE 802.11a	54	36	0.000	0.000	116.67	1.1667	-0.6696
		40	0.176	0.221	79.98	0.7998	0.9702
		44	0.176	0.221	79.98	0.7998	0.9702
IEEE 802.11n_20	MCS 7	36	0.164	0.208	78.82	0.7882	1.0336
		40	0.000	0.000	100.00	1.0000	0.0
		44	0.164	0.209	78.84	0.7884	1.0325
IEEE 802.11n_40		38	0.022	0.022	99.91	0.9991	0.0039
		46	0.100	0.144	69.64	0.6964	1.5714
IEEE 802.11ac_20	MCS 9	36	0.148	0.193	77.10	0.7710	1.1295
		40	0.000	0.044	0.20	0.0020	26.9897
		44	0.148	0.192	77.09	0.7709	1.13
IEEE 802.11ac_40		38	0.031	0.031	99.98	0.9998	0.0009
		46	0.061	0.419	14.45	0.1445	8.4013

Test Graphs

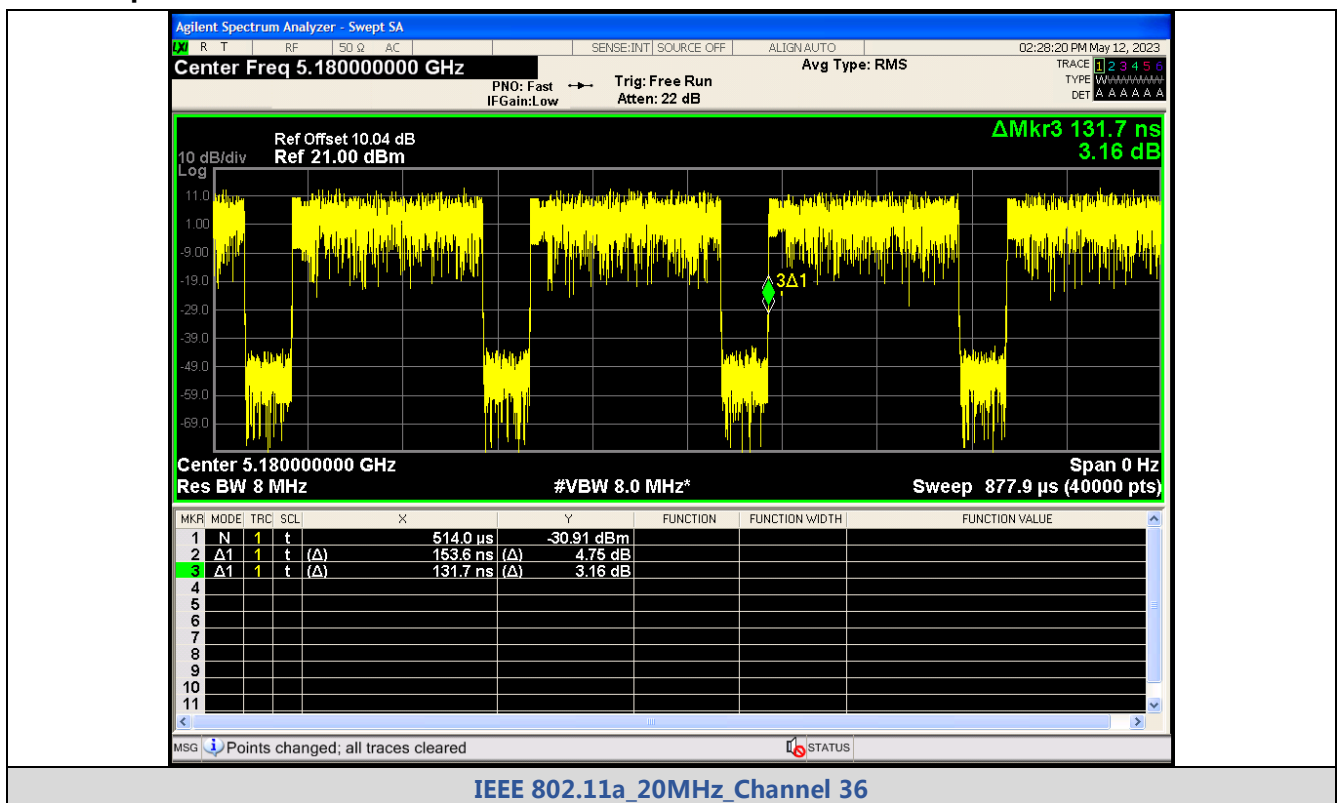


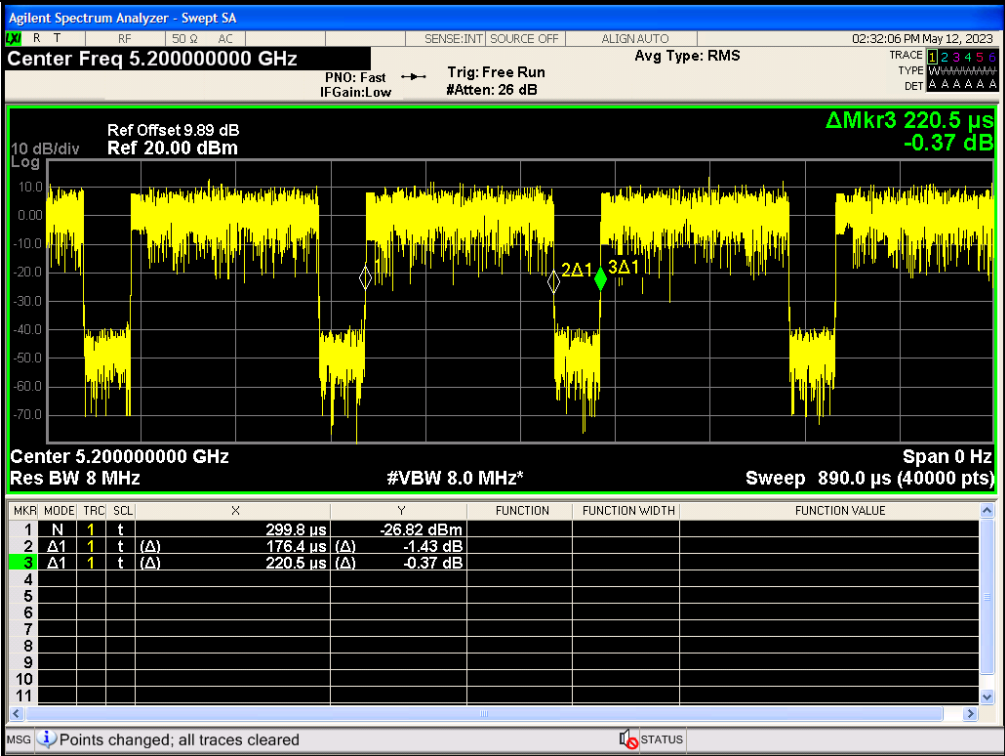


IEEE 802.11a_20MHz_Channel 40

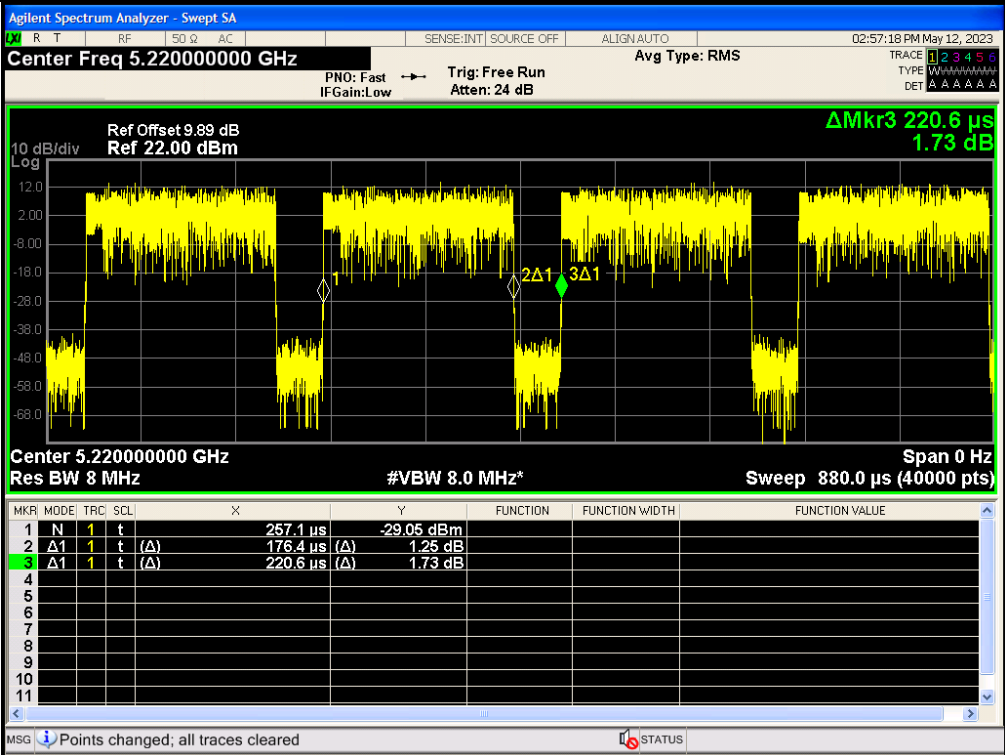


IEEE 802.11a_20MHz_Channel 44

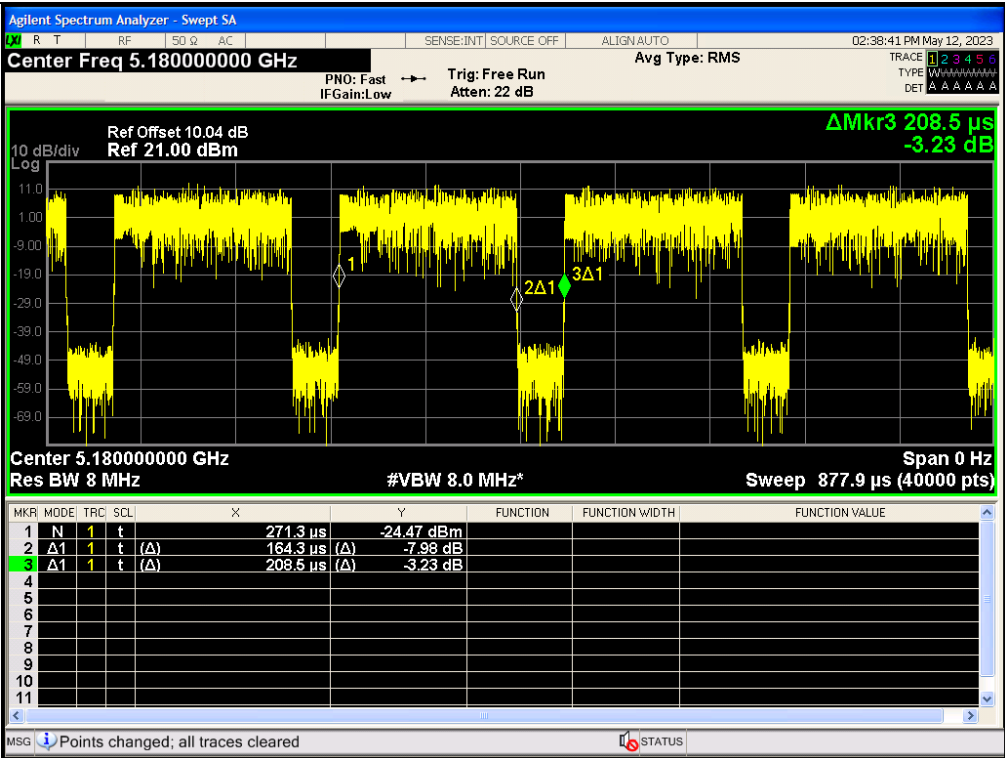


IEEE 802.11n_20MHz_Channel 36

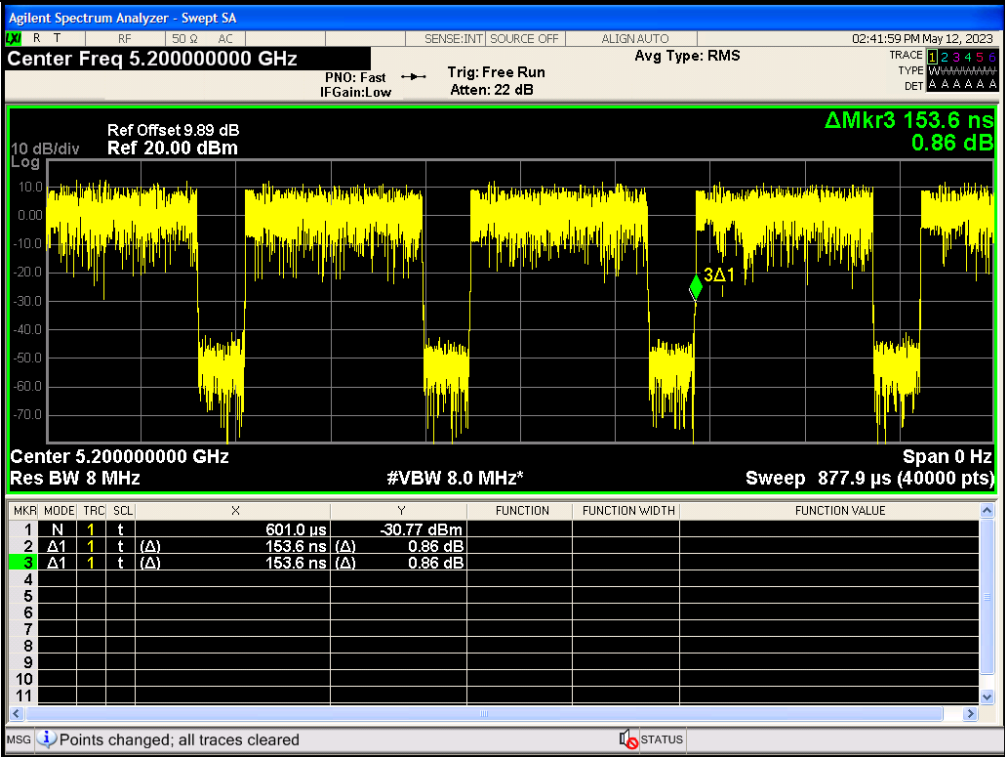


IEEE 802.11n_20MHz_Channel 40

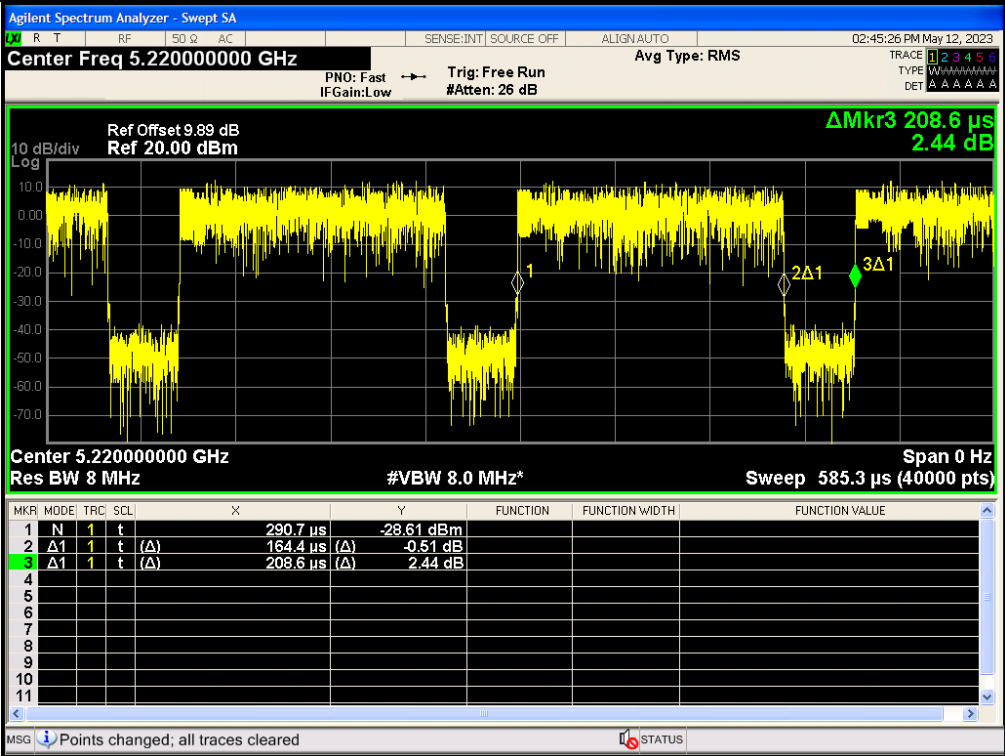


IEEE 802.11n_20MHz_Channel 44

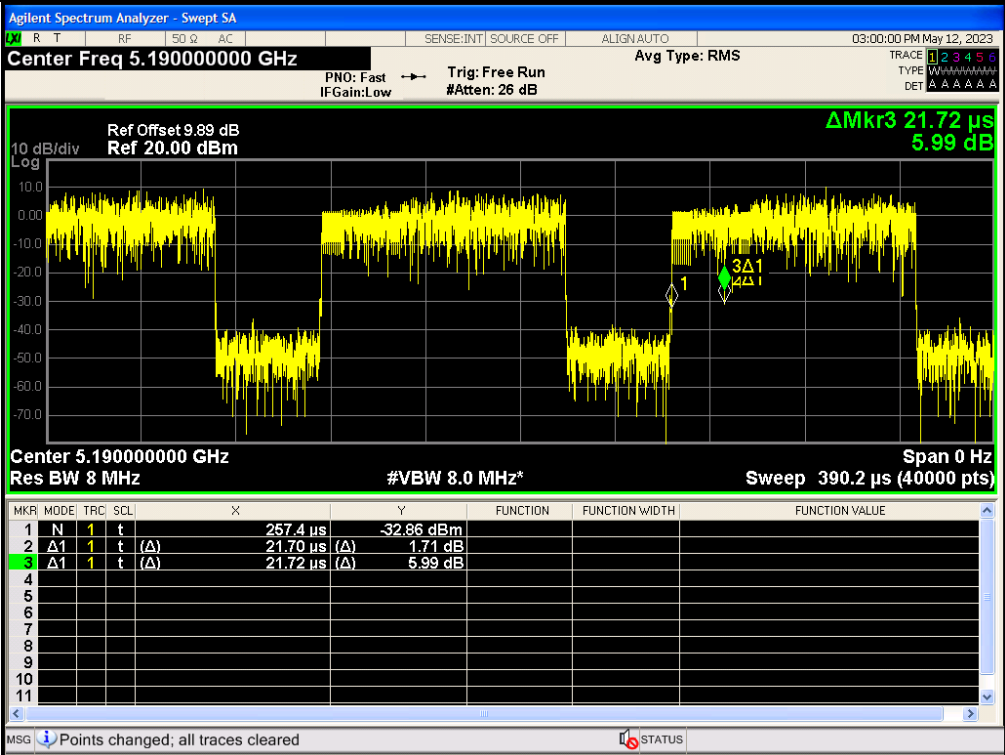


IEEE 802.11n_40MHz_Channel 38

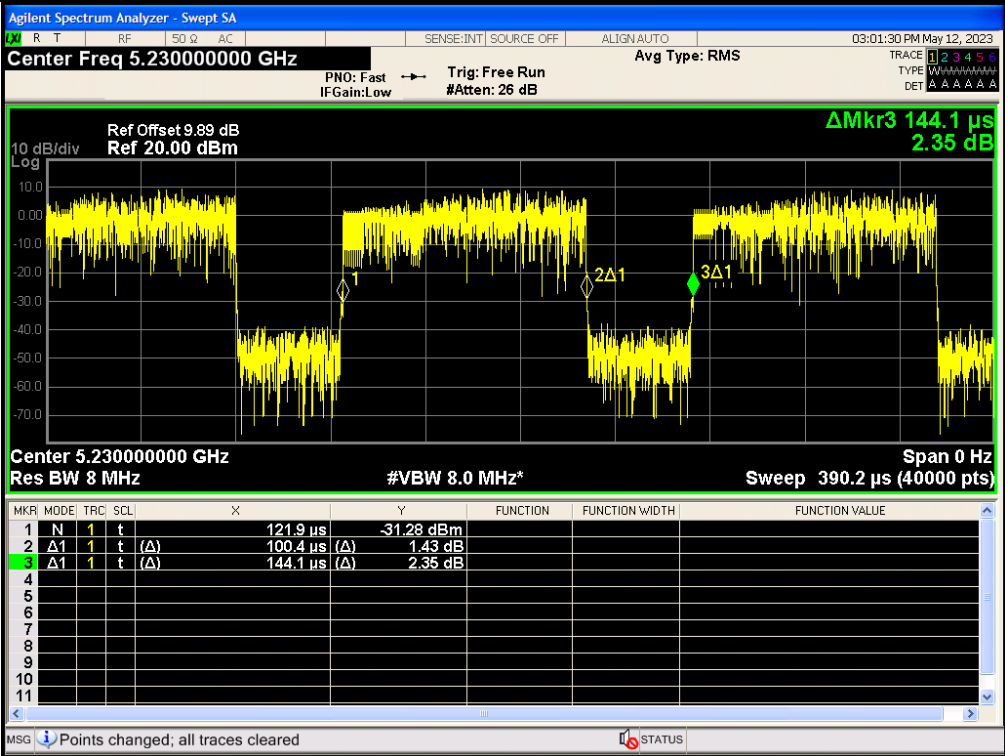


IEEE 802.11n_40MHz_Channel 46

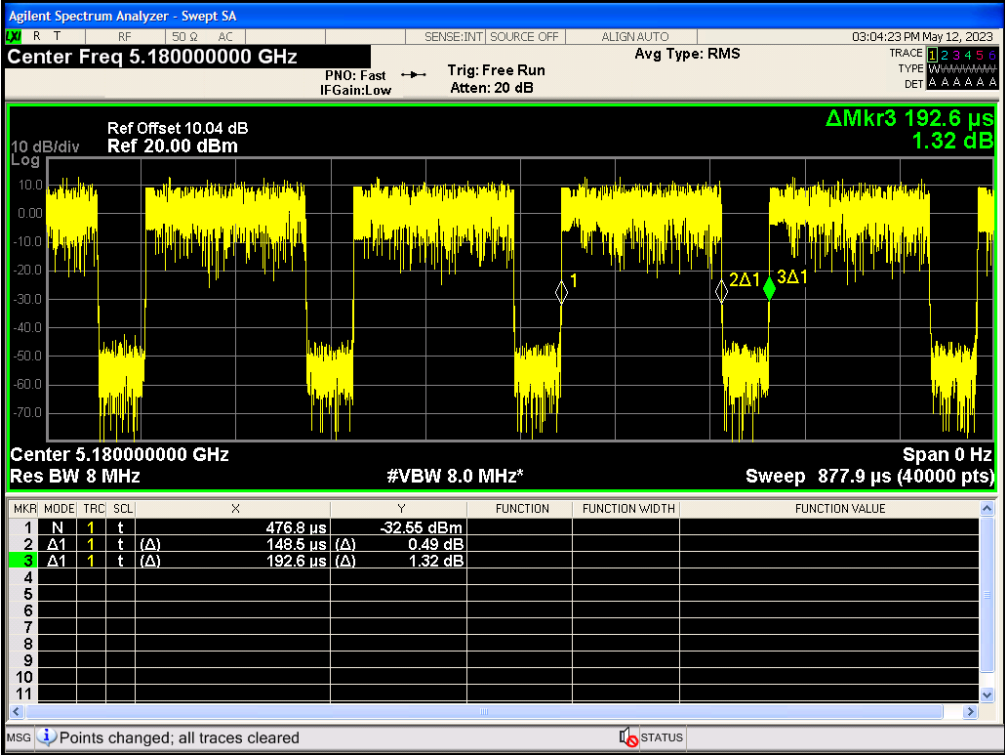


IEEE 802.11ac_20MHz_Channel 36

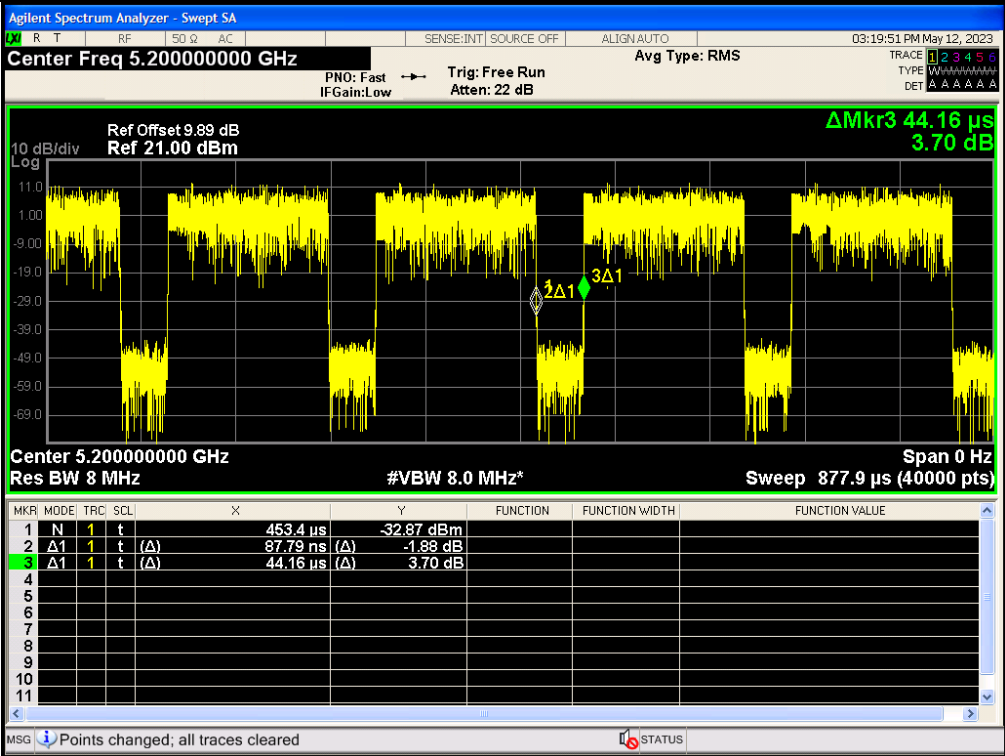


IEEE 802.11ac_20MHz_Channel 40

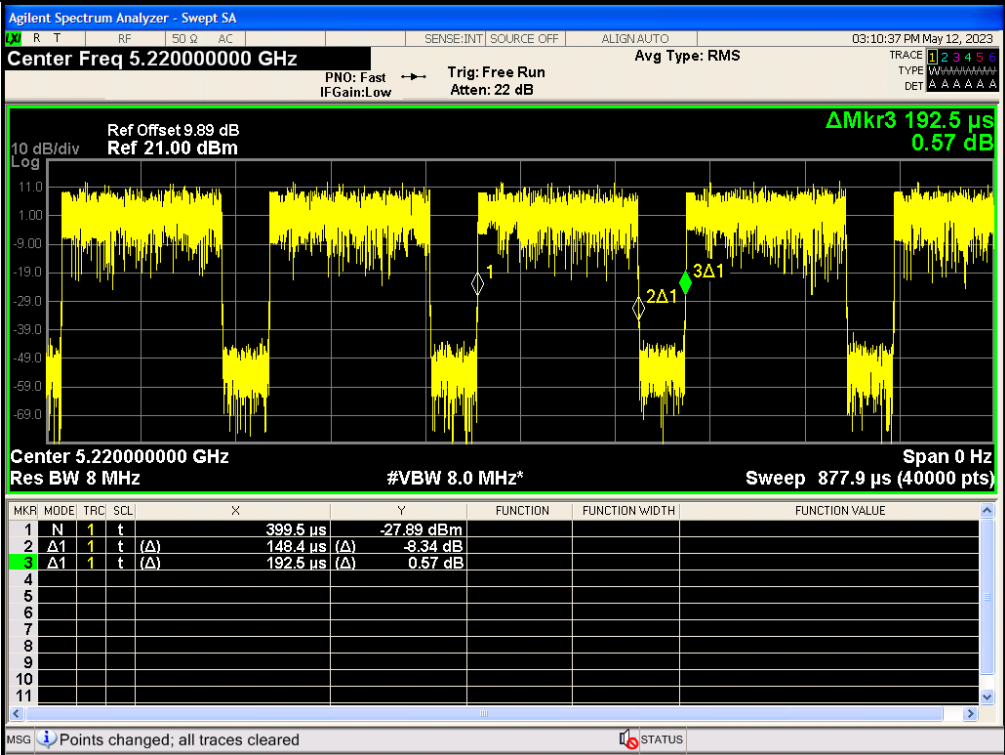

IEEE 802.11ac_20MHz_Channel 44

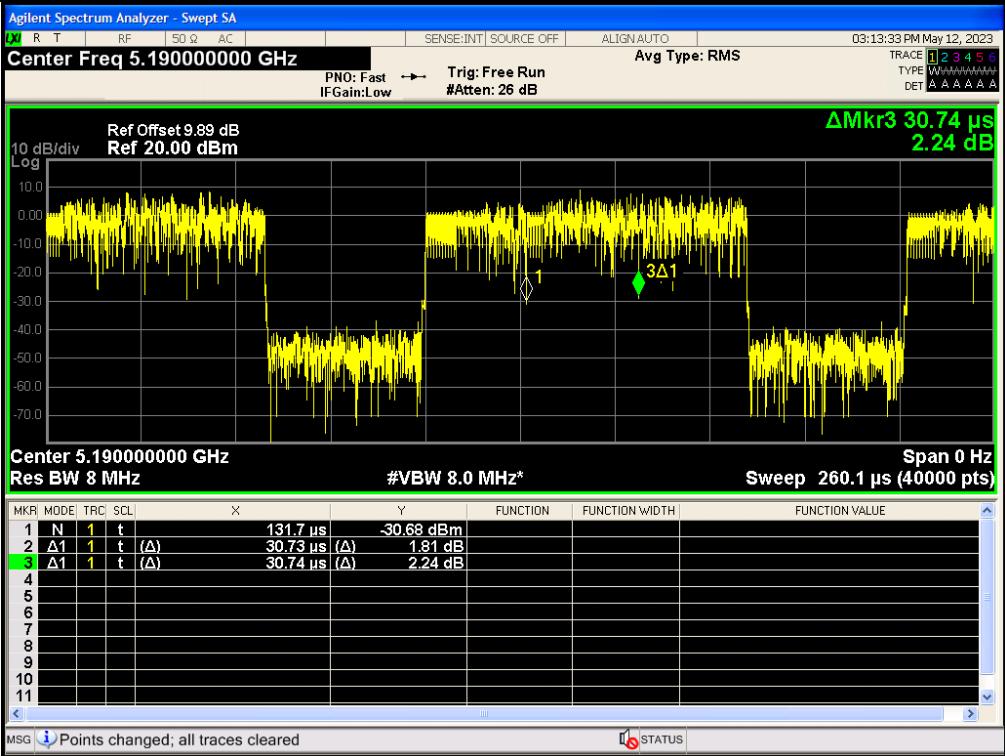

IEEE 802.11ac_40MHz_Channel 38

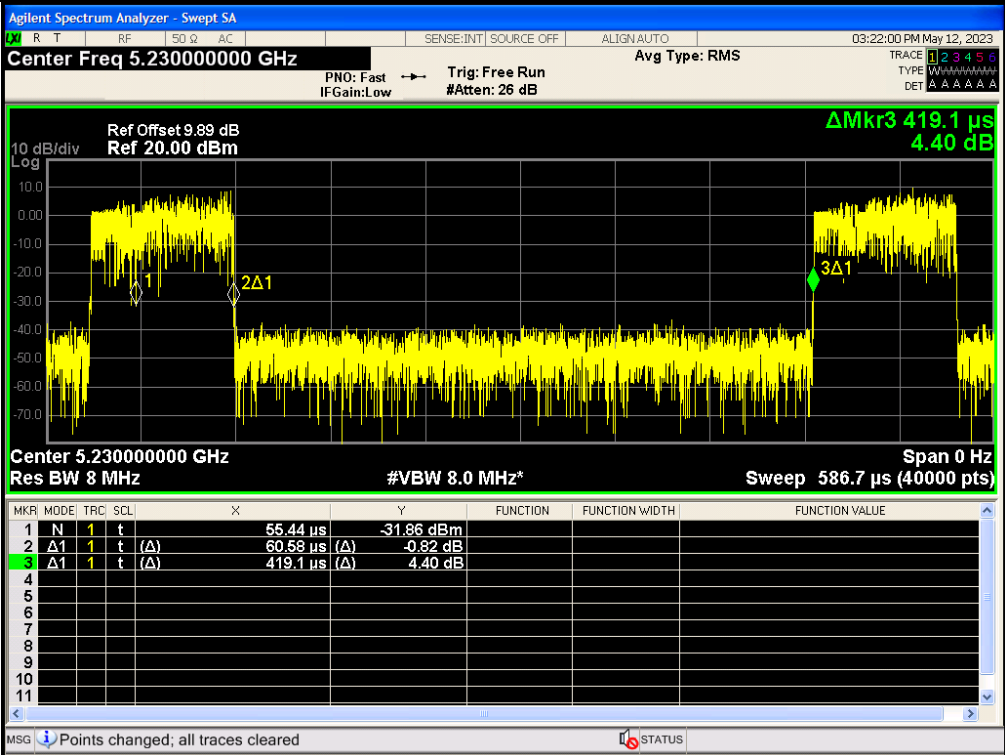


IEEE 802.11ac_40MHz_Channel 46

APPENDIX VII. Peak Power Spectral Density

Test Result

Mode	Channel	Ant. 0 Meas PSD (dBm/MHz or dBm/0.5MHz)	Limit (dBm/MHz or dBm/0.5MHz)	Result
IEEE 802.11a	36	-3.926	11	PASS
	40	-5.942		PASS
	44	-7.566		PASS
IEEE 802.11n_20	36	-4.940		PASS
	40	-5.489		PASS
	44	-5.097		PASS
IEEE 802.11n_40	38	-8.700		PASS
	46	-8.351		PASS
IEEE 802.11ac_20	36	-7.864		PASS
	40	-8.469		PASS
	44	-8.039		PASS
IEEE 802.11ac_40	38	-9.728		PASS
	46	-43.927		PASS


Test Graphs

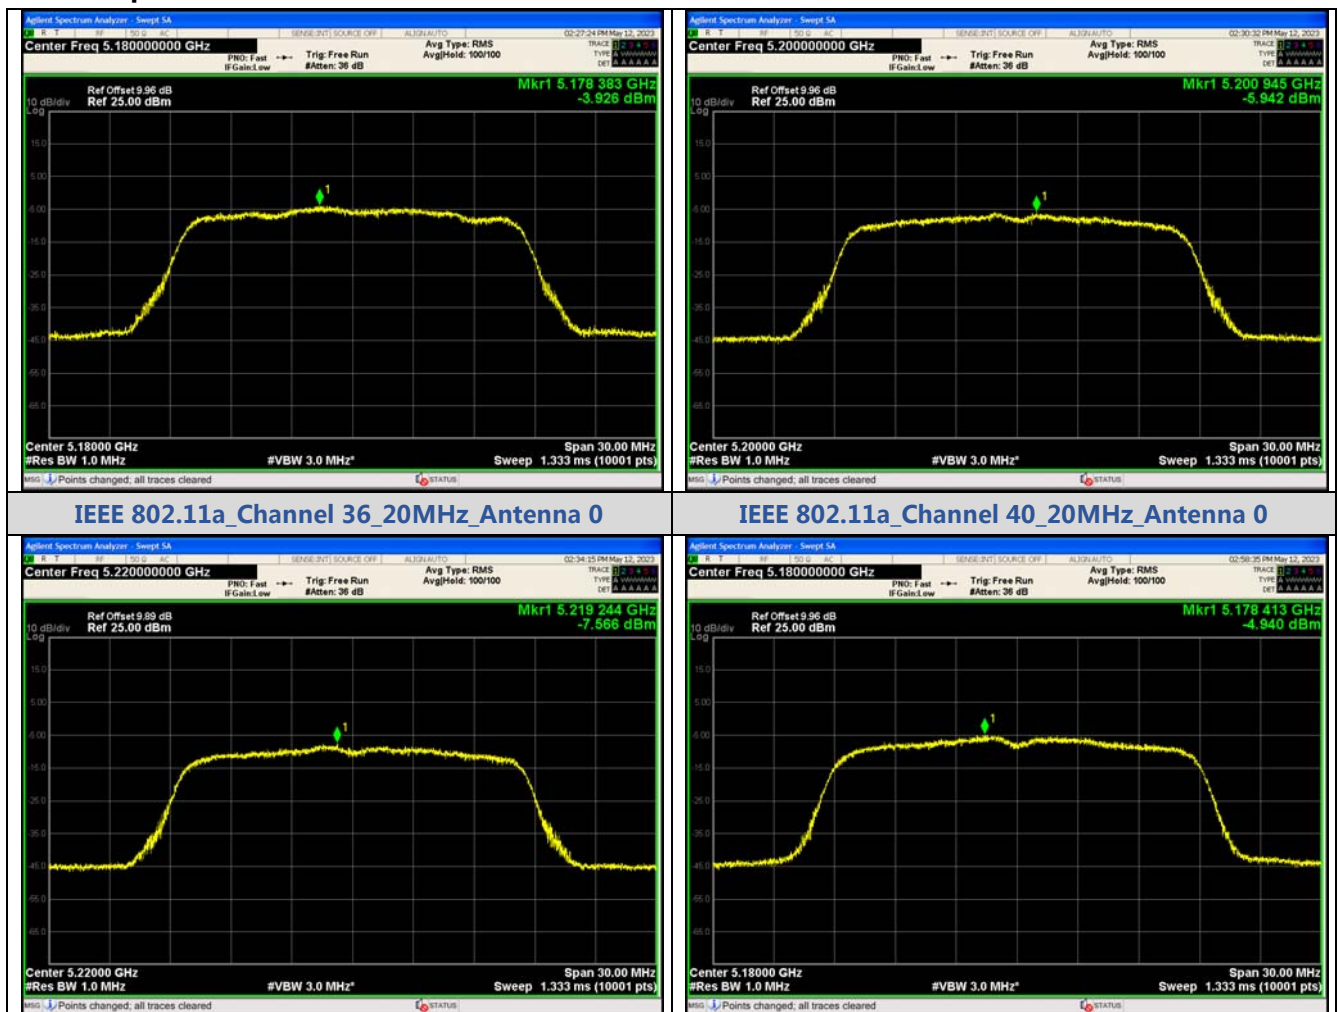


IEEE 802.11a_Channel 44_20MHz_Antenna 0




IEEE 802.11n_Channel 36_20MHz_Antenna 0

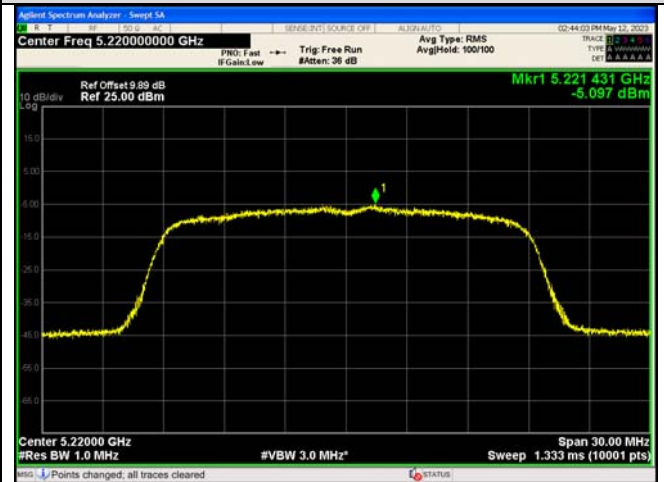

IEEE 802.11n_Channel 40_20MHz_Antenna 0

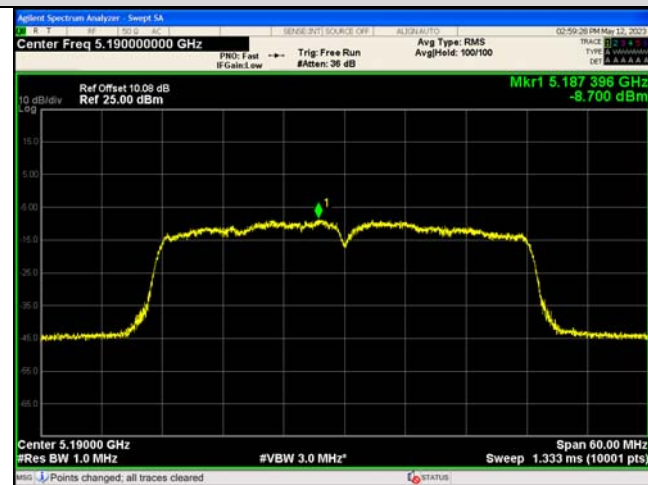


IEEE 802.11n_Channel 44_20MHz_Antenna 0

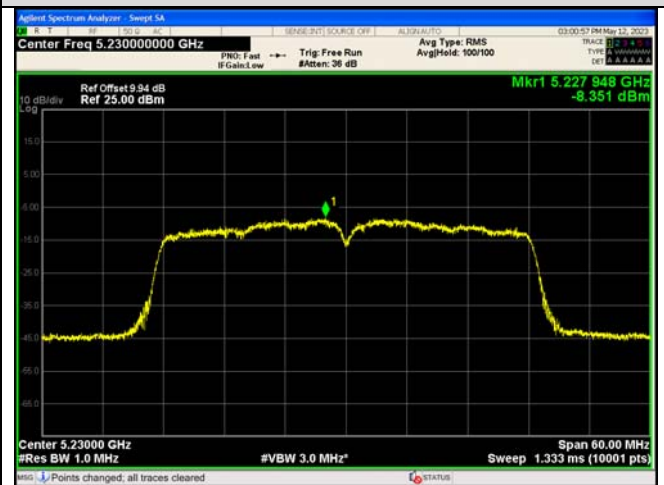

IEEE 802.11n_Channel 38_40MHz_Antenna 0




IEEE 802.11n_Channel 46_40MHz_Antenna 0

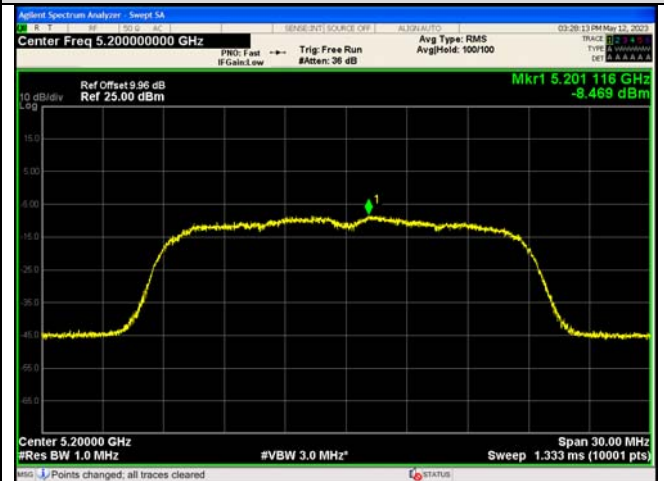

IEEE 802.11ac_Channel 36_20MHz_Antenna 0


IEEE 802.11ac_Channel 40_20MHz_Antenna 0

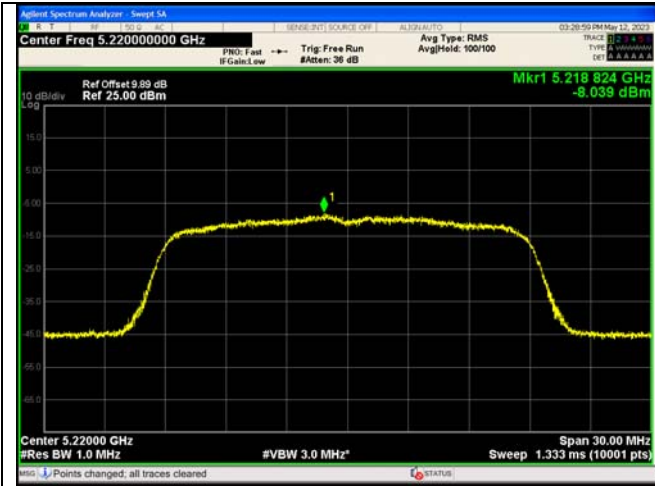


IEEE 802.11ac_Channel 44_20MHz_Antenna 0



IEEE 802.11ac_Channel 38_40MHz_Antenna 0

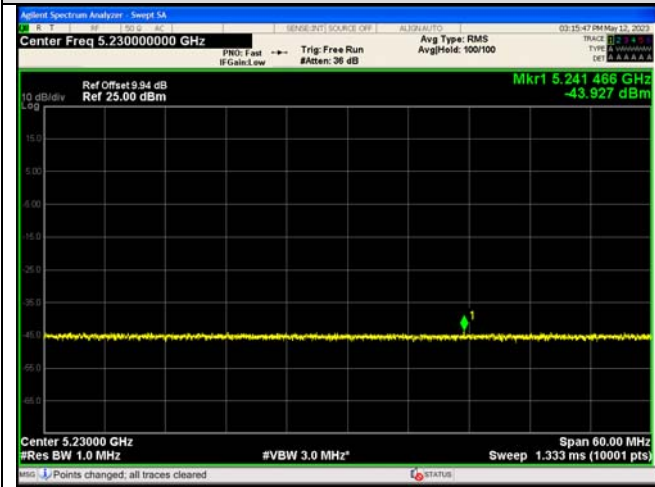

IEEE 802.11ac_Channel 46_40MHz_Antenna 0



***** End of Report *****