



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

TEST REPORT

FCC ID:2A9ODC15

Product : Mini Printer

Model Name : C15, C9, C13, C17, C19, C20, C23, C25, C26, C27, C28, C31, C32, C37, C38, C39, C50, C51, C52, C53, C55, C56, C57, C58, C59, M9, M10, M11, M12, M13, M15, M16, M17, M18, M19, M20, B2, B3, B5, B6, B7, B8, B9, B10, B11, B12, L1, L2, L3, L4, L5, L6, L7, L8, L9

Brand : /

Report No. : MAX250122110P01-R01

Prepared for

Shenzhen Iefuxin Technology Co., Ltd.

Caowei Community, Caowei First Industrial Zone, Gangting Industrial Zone, Gangting 101, Hangcheng Street, Bao'an District, Shenzhen City

Prepared by

MAXLAB Testing Co.,Ltd.

1/F, Building B, Xinshidai GR Park, Shiyuan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen lefuxin Technology Co., Ltd.

Address : Caowei Community, Caowei First Industrial Zone, Gangting Industrial Zone, Gangting 101, Hangcheng Street, Bao'an District, Shenzhen City

Manufacture's name : Shenzhen lefuxin Technology Co., Ltd.

Address : Caowei Community, Caowei First Industrial Zone, Gangting Industrial Zone, Gangting 101, Hangcheng Street, Bao'an District, Shenzhen City

Product name : Mini Printer

Model name : C15, C9, C13, C17, C19, C20, C23, C25, C26, C27, C28, C31, C32, C37, C38, C39, C50, C51, C52, C53, C55, C56, C57, C58, C59, M9, M10, M11, M12, M13, M15, M16, M17, M18, M19, M20, B2, B3, B5, B6, B7, B8, B9, B10, B11, B12, L1, L2, L3, L4, L5, L6, L7, L8, L9

Standards : FCC CFR47 Part 15 Section 15.247

Test procedure : ANSI C63.10:2020

Date of test : Jan. 22, 2025 to Feb. 11, 2025

Date of Issue : Feb. 11, 2025

This device described above has been tested by MAXLAB, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of MAXLAB, this document may be altered or revised by MAXLAB, personal only, and shall be noted in the revision of the document.

Test Engineer:

Engineer / Cindy Zheng

Technical Manager:

RF Manager / Vivian Jiang



Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
2.1 TEST SITE	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF E.U.T.	7
3.2 CHANNEL LIST	8
3.3 TEST SETUP CONFIGURATION	9
3.4 TEST CONFIGURATION	9
4 EQUIPMENT DURING TEST	10
4.1 EQUIPMENTS LIST	10
4.2 MEASUREMENT UNCERTAINTY	12
4.3 DESCRIPTION OF SUPPORT UNITS	12
5 CONDUCTED EMISSION	13
5.1 E.U.T. OPERATION	13
5.2 EUT SETUP	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
5.4 MEASUREMENT PROCEDURE	14
5.5 CONDUCTED EMISSION LIMIT	14
5.6 MEASUREMENT DESCRIPTION	14
5.7 CONDUCTED EMISSION TEST RESULT	15
6 RADIATED SPURIOUS EMISSIONS	27
6.1 EUT OPERATION	27
6.2 TEST SETUP	28
6.3 SPECTRUM ANALYZER SETUP	29
6.4 TEST PROCEDURE	29
6.5 SUMMARY OF TEST RESULTS	30
7 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT	47
7.1 TEST PROCEDURE	47
7.2 TEST RESULT	47
8 6DB BANDWIDTH MEASUREMENT	48
8.1 TEST PROCEDURE	48



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

8.2 TEST RESULT 48

9 MAXIMUM PEAK OUTPUT POWER 49

9.1 TEST PROCEDURE49

9.2 TEST RESULT 49

10 POWER SPECTRAL DENSITY 50

10.1 TEST PROCEDURE 50

10.2 TEST RESULT 50

11 ANTENNA APPLICATION 51

11.1 ANTENNA REQUIREMENT51

11.2 RESULT 51

12 TEST SETUP PHOTOS AND EUT PHOTOS52



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	FCC part 15.207	PASS
Radiated Spurious Emissions	FCC part 15.205/15.209	PASS
Conducted Spurious Emission	FCC part 15. 247(d)	PASS
Band edge	FCC part 15.247(d)	PASS
6dB&99% Bandwidth	FCC part 15.247 (a)(2)	PASS
Maximum Peak Output Power	FCC part 15.247 (b)(3)	PASS
Power Spectral Density	FCC part 15.247 (e)	PASS
Antenna Requirement	FCC part 15.203/15.247 (c)	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

2.1 Test Site

Site Description

EMC Lab.: FCC-Registration No:562200 Designation Number: CN1338

MAXLAB Testing Co., Ltd.has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert.No:4707.01

MAXLAB Testing Co, Ltd.has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

Industry Canada Registration Number.Is:11093A

CAB identifier: CN0019

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

Name of Firm: MAXLAB Testing Co, Ltd.

Site Location: 1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

3 General Information

3.1 General Description of E.U.T.

Product Name	:	Mini Printer
Model Name	:	C15
Sample ID	:	20250122Z-001#
Sample(s) Status:	:	Engineer sample
Series Model	:	C9, C13, C17, C19, C20, C23, C25, C26, C27, C28, C31, C32, C37, C38, C39, C50, C51, C52, C53, C55, C56, C57, C58, C59, M9, M10, M11, M12, M13, M15, M16, M17, M18, M19, M20, B2, B3, B5, B6, B7, B8, B9, B10, B11, B12, L1, L2, L3, L4, L5, L6, L7, L8, L9
Model Different.:	:	All models are same as the samples except model name and appearance
Operating frequency	:	2402-2480MHz
Number of Channels	:	40 channels
Type of Modulation	:	GFSK
Rate	:	1M
Antenna installation	:	PCB Antenna
Antenna Gain	:	-0.58 dBi
Power supply	:	DC 5V from adapter input AC 120V/60Hz or DC 3.7V from battery
Hardware Version	:	/
Software Version	:	/
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		



3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2020 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

Note:

1. Test of channel was included the lowest, middle and highest frequency in highest data rate and to perform the test, then record on this report.

Test Channel:


	Channel	Frequency(MHz)
Low Channel	0	2402
Mid Channel	19	2440
High Channel	39	2480

3.3 Test Setup Configuration

Radiated Emission



Conducted Emission



Radiated Spurious



Conducted Spurious



3.4 Test configuration

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	FCC_assist_1.0.2.2
Power level setup	< 0 dBm



4 Equipment During Test

4.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	ENV 216	102796	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	VN1-13S	004023	CRANAGE	2024/6/17	2025/6/16
Cable	RG223-1500MM	NA	RG	2024/6/17	2025/6/16

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2024/6/17	2025/6/16
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNWARZBECK	2024/6/17	2025/6/16
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNWARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNWARZBECK	2023/3/19	2025/3/18
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHNWARZBECK	2024/6/17	2025/6/16
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2024/6/17	2025/6/16
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHNWARZBECK	2024/6/17	2025/6/16
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNWARZBECK	2024/6/17	2025/6/16
Comprehensive tester	CWM500	104995	Rohde & Schwarz	2024/6/17	2025/6/16
Amplifier (9KHz-30MHz)	BBV 9745	00109	CHNWARZBECK	2024/6/17	2025/6/16



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

MXG Signal Analyzer	N9020A	MY50510202	Agilent	2024/6/17	2025/6/16
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2024/6/17	2025/6/16
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2024/6/17	2025/6/16
Power Sensor	TR1029-2	512364	Techoy	2024/6/17	2025/6/16
RF Swith	TR1029-1	512364	Techoy	2024/6/17	2025/6/16
Cable	DA800-4000MM	NA	DA	2024/6/17	2025/6/16
Cable	DA800-11000MM	NA	DA	2024/6/17	2025/6/16

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(25GHz~40GHz)	±3.38dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Mini Printer	N/A	X9	N/A	EUT
E-2	Adapter	/	TPA-46B050100UU	N/A	Auxiliary

Note: (1)The support equipment was authorized by Declaration of Confirmation.

(2) For detachable type I/O cable should be specified the length in cm in [Length] column.

5 Conducted Emission

Test Requirement	:	FCC CFR 47 Part 15 Section 15.207, RSS-Gen§8.8, RSS-247§ 3.1
Test Method	:	ANSI C63.10: 2020
Test Result	:	PASS
Frequency Range	:	150kHz to 30MHz
Class/Severity	:	Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature	:	25.5 °C
Humidity	:	51 % RH
Atmospheric Pressure	:	101.2kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2020.

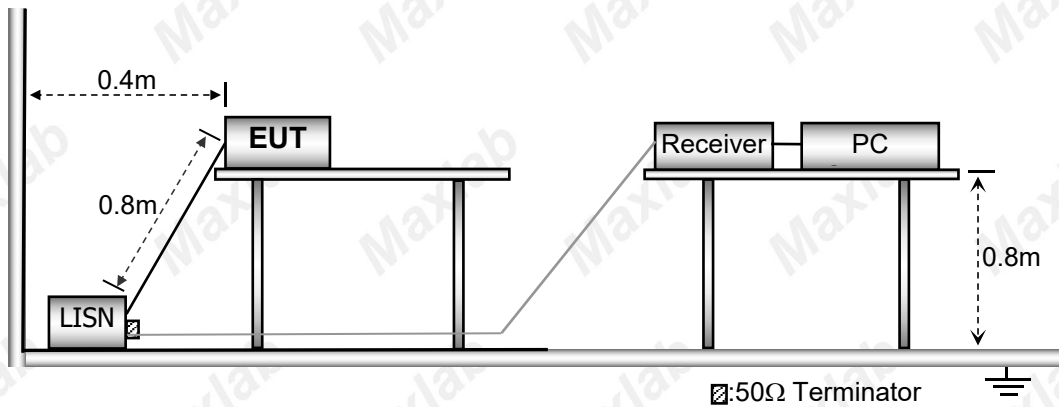

5.3 Test SET-UP (Block Diagram of Configuration)

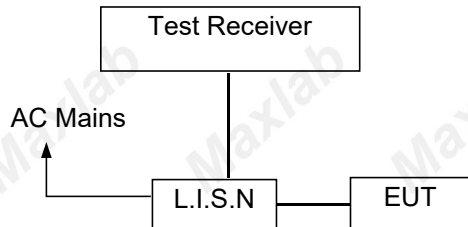

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

All the modes have tested and recored the worst mode (GFSK, High channel) in the report.




MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01


5.7 Conducted Emission Test Result

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Model :	M11

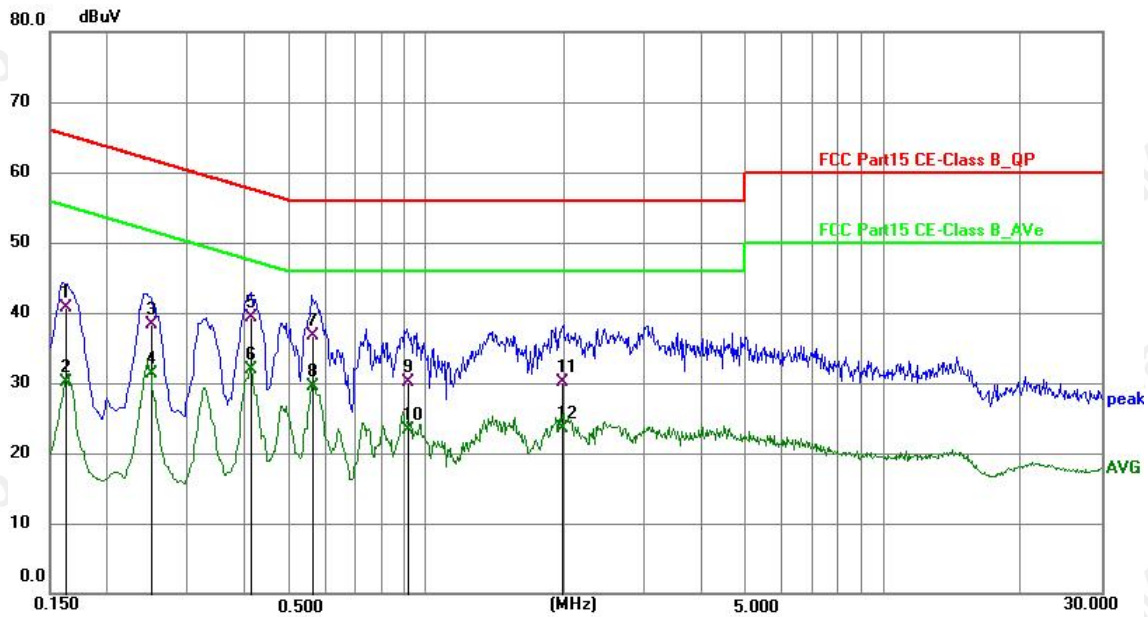

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1625	21.18	19.49	40.67	65.34	-24.67	QP
2	0.1625	10.52	19.49	30.01	55.34	-25.33	AVG
3	0.2497	18.76	19.49	38.25	61.77	-23.52	QP
4	0.2497	11.89	19.49	31.38	51.77	-20.39	AVG
5	0.4138	19.74	19.49	39.23	57.57	-18.34	QP
6 *	0.4138	12.50	19.49	31.99	47.57	-15.58	AVG
7	0.5664	17.31	19.49	36.80	56.00	-19.20	QP
8	0.5664	10.01	19.49	29.50	46.00	-16.50	AVG
9	0.9106	10.55	19.50	30.05	56.00	-25.95	QP
10	0.9106	3.81	19.50	23.31	46.00	-22.69	AVG
11	1.9928	10.65	19.54	30.19	56.00	-25.81	QP
12	1.9928	4.02	19.54	23.56	46.00	-22.44	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Model :	M11

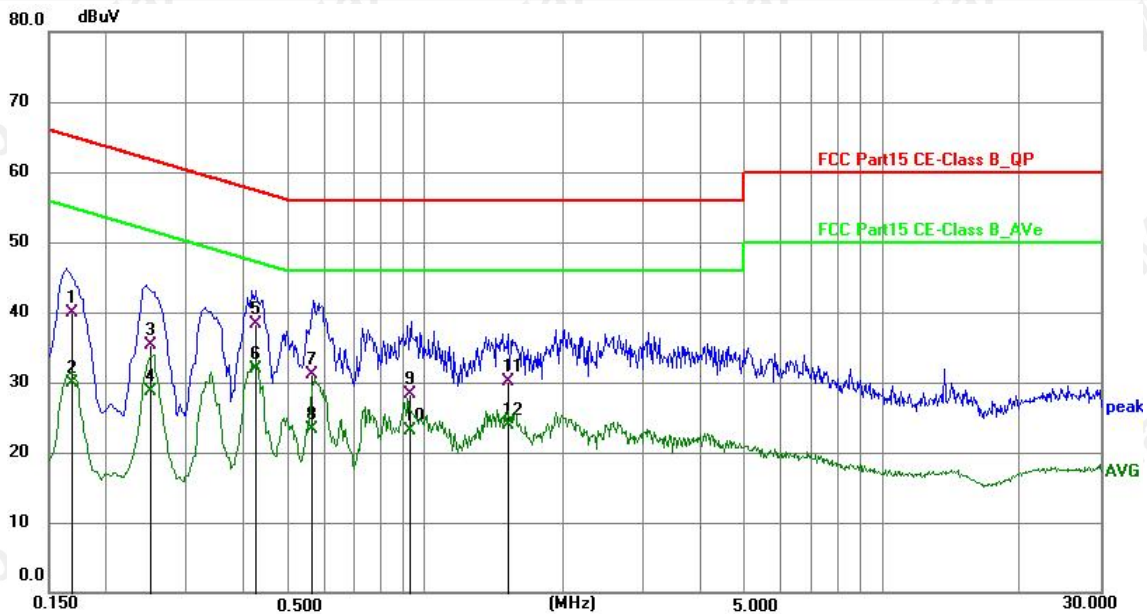

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1683	20.45	19.49	39.94	65.04	-25.10	QP
2	0.1683	10.48	19.49	29.97	55.04	-25.07	AVG
3	0.2516	15.90	19.48	35.38	61.70	-26.32	QP
4	0.2516	9.19	19.48	28.67	51.70	-23.03	AVG
5	0.4267	18.73	19.49	38.22	57.32	-19.10	QP
6 *	0.4267	12.42	19.49	31.91	47.32	-15.41	AVG
7	0.5680	11.55	19.49	31.04	56.00	-24.96	QP
8	0.5680	3.87	19.49	23.36	46.00	-22.64	AVG
9	0.9271	8.82	19.51	28.33	56.00	-27.67	QP
10	0.9271	3.67	19.51	23.18	46.00	-22.82	AVG
11	1.5270	10.58	19.53	30.11	56.00	-25.89	QP
12	1.5270	4.29	19.53	23.82	46.00	-22.18	AVG

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.

2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.


3.Measurement Level = Reading level + Correct Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Model :	C20

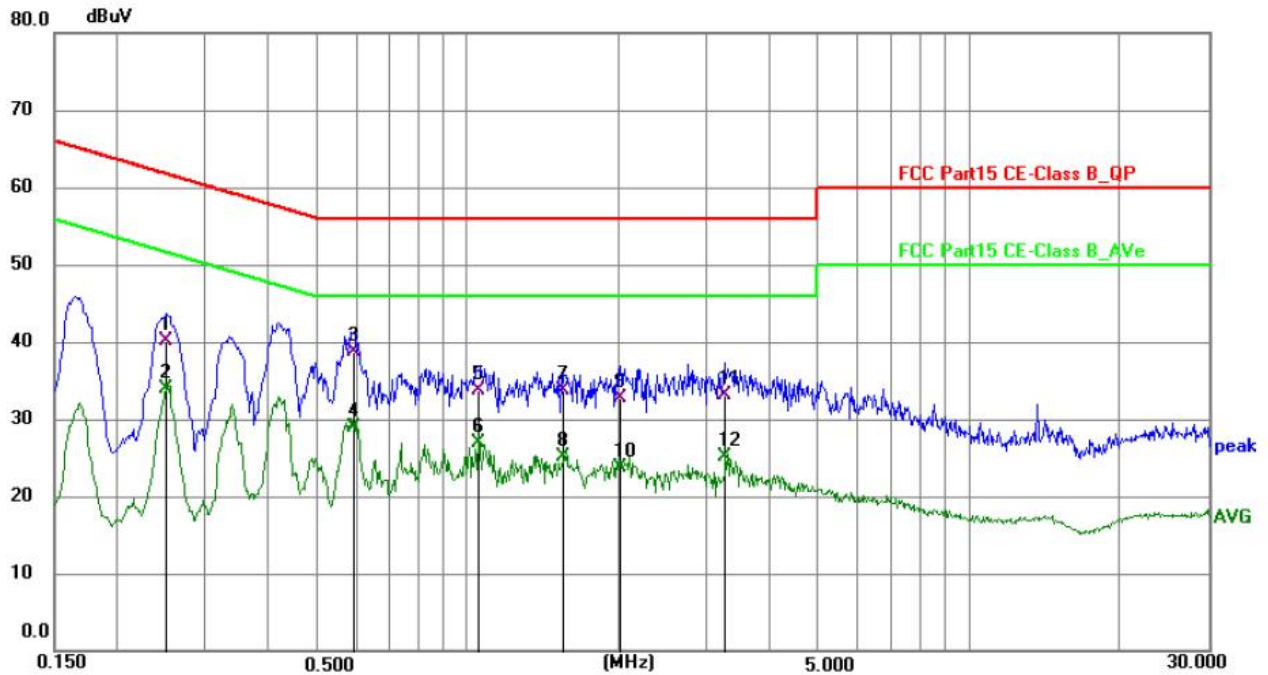

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2490	20.65	19.48	40.13	61.79	-21.66	QP
2	0.2490	14.39	19.48	33.87	51.79	-17.92	AVG
3	0.5910	19.15	19.49	38.64	56.00	-17.36	QP
4 *	0.5910	9.48	19.49	28.97	46.00	-17.03	AVG
5	1.0500	14.28	19.51	33.79	56.00	-22.21	QP
6	1.0500	7.46	19.51	26.97	46.00	-19.03	AVG
7	1.5540	14.18	19.53	33.71	56.00	-22.29	QP
8	1.5540	5.60	19.53	25.13	46.00	-20.87	AVG
9	2.0220	13.07	19.55	32.62	56.00	-23.38	QP
10	2.0220	4.22	19.55	23.77	46.00	-22.23	AVG
11	3.2505	13.58	19.58	33.16	56.00	-22.84	QP
12	3.2505	5.49	19.58	25.07	46.00	-20.93	AVG



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Model :	C20

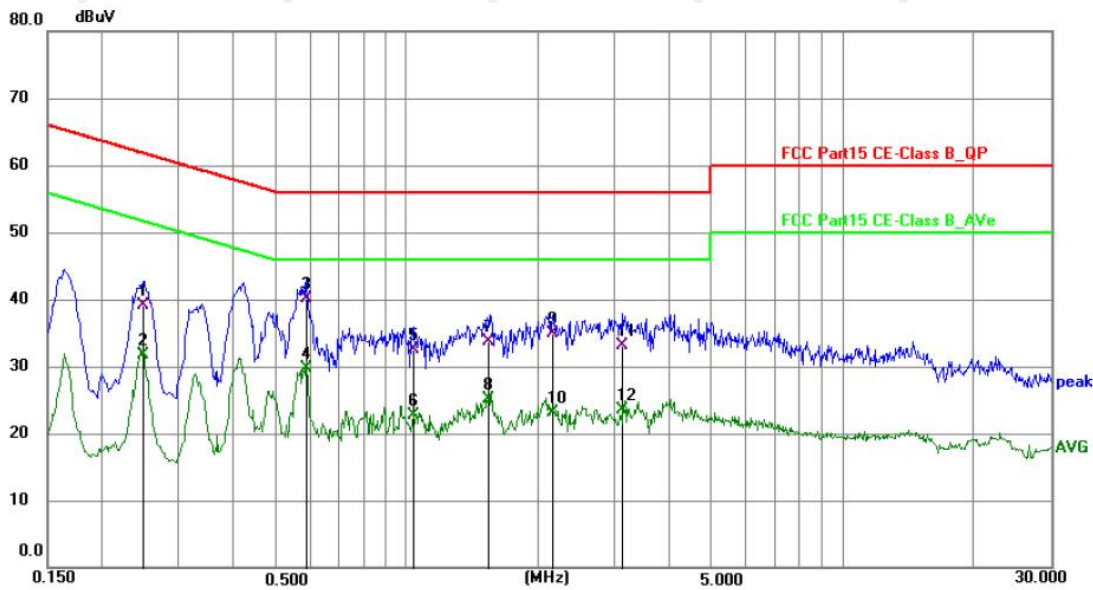

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2480	19.67	19.49	39.16	61.82	-22.66	QP
2	0.2480	12.18	19.49	31.67	51.82	-20.15	AVG
3 *	0.5885	20.67	19.49	40.16	56.00	-15.84	QP
4	0.5885	10.18	19.49	29.67	46.00	-16.33	AVG
5	1.0363	13.09	19.50	32.59	56.00	-23.41	QP
6	1.0363	3.25	19.50	22.75	46.00	-23.25	AVG
7	1.5494	14.10	19.52	33.62	56.00	-22.38	QP
8	1.5494	5.61	19.52	25.13	46.00	-20.87	AVG
9	2.1570	15.28	19.54	34.82	56.00	-21.18	QP
10	2.1570	3.60	19.54	23.14	46.00	-22.86	AVG
11	3.1290	13.61	19.57	33.18	56.00	-22.82	QP
12	3.1290	3.97	19.57	23.54	46.00	-22.46	AVG

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.

2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.


3.Measurement Level = Reading level + Correct Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Model :	C27

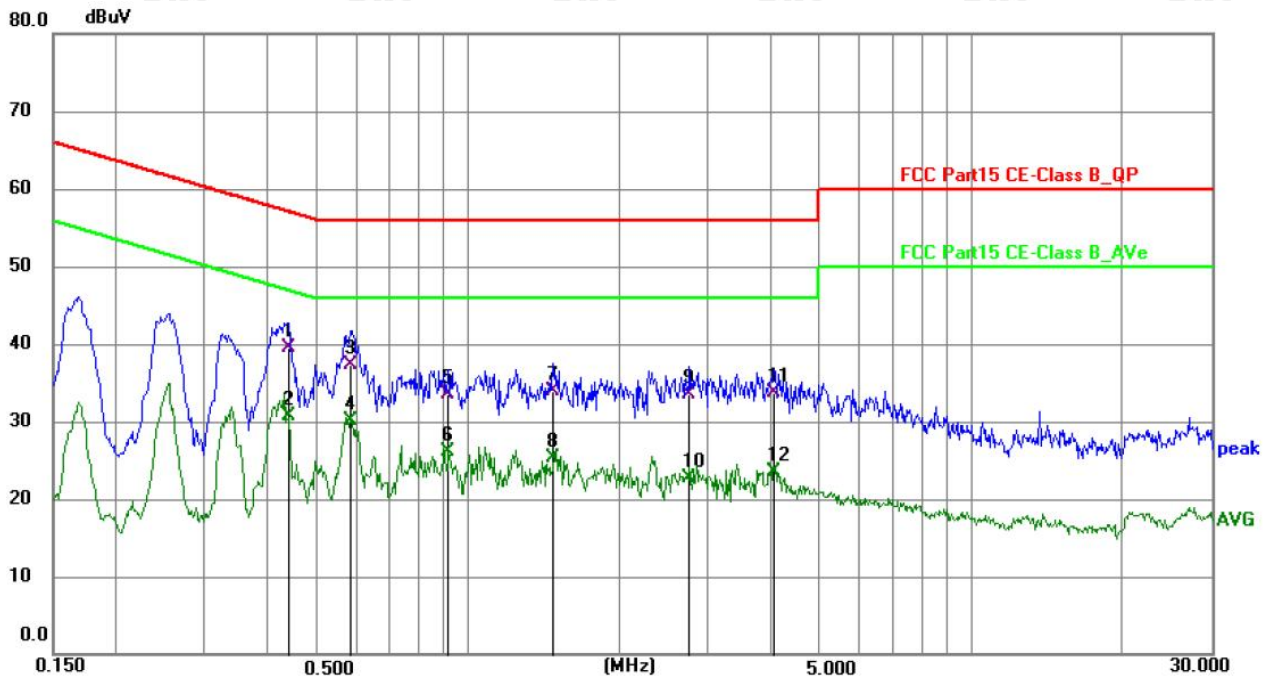

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4380	20.06	19.49	39.55	57.10	-17.55	QP
2	0.4380	11.16	19.49	30.65	47.10	-16.45	AVG
3	0.5820	17.80	19.49	37.29	56.00	-18.71	QP
4 *	0.5820	10.67	19.49	30.16	46.00	-15.84	AVG
5	0.9150	13.93	19.51	33.44	56.00	-22.56	QP
6	0.9150	6.64	19.51	26.15	46.00	-19.85	AVG
7	1.4775	14.45	19.52	33.97	56.00	-22.03	QP
8	1.4775	5.86	19.52	25.38	46.00	-20.62	AVG
9	2.7510	13.85	19.56	33.41	56.00	-22.59	QP
10	2.7510	3.12	19.56	22.68	46.00	-23.32	AVG
11	4.0693	14.13	19.59	33.72	56.00	-22.28	QP
12	4.0693	4.00	19.59	23.59	46.00	-22.41	AVG



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Model :	C27

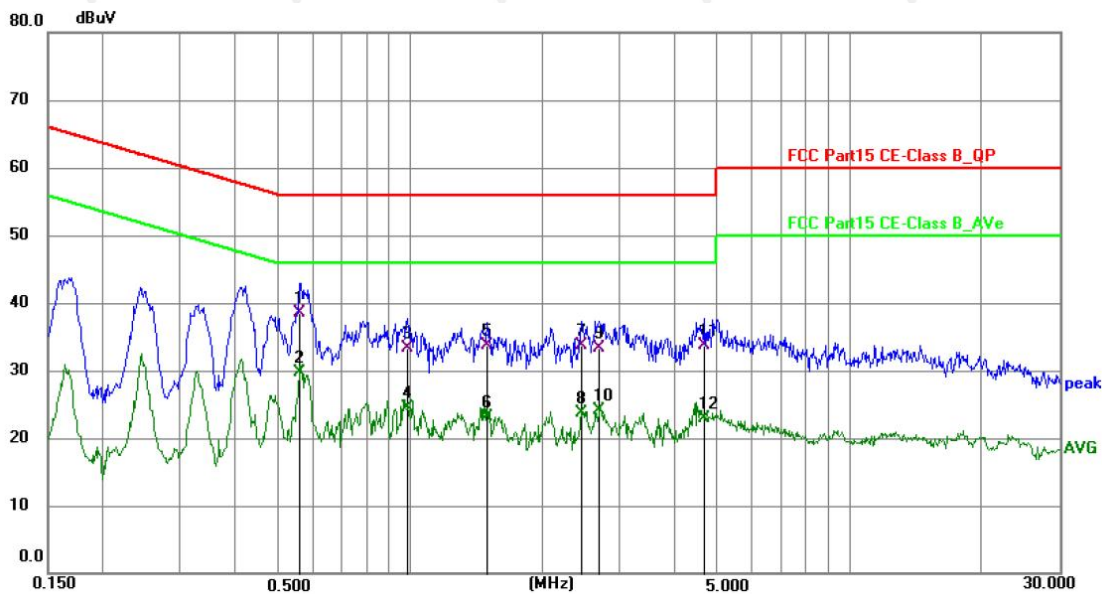

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5639	19.07	19.49	38.56	56.00	-17.44	QP
2 *	0.5639	10.17	19.49	29.66	46.00	-16.34	AVG
3	0.9870	13.79	19.50	33.29	56.00	-22.71	QP
4	0.9870	5.09	19.50	24.59	46.00	-21.41	AVG
5	1.5000	14.16	19.51	33.67	56.00	-22.33	QP
6	1.5000	3.68	19.51	23.19	46.00	-22.81	AVG
7	2.4584	14.23	19.54	33.77	56.00	-22.23	QP
8	2.4584	4.15	19.54	23.69	46.00	-22.31	AVG
9	2.6970	13.74	19.55	33.29	56.00	-22.71	QP
10	2.6970	4.64	19.55	24.19	46.00	-21.81	AVG
11	4.6814	14.09	19.60	33.69	56.00	-22.31	QP
12	4.6814	3.33	19.60	22.93	46.00	-23.07	AVG


- Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
 3.Measurement Level = Reading level + Correct Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Model :	C15

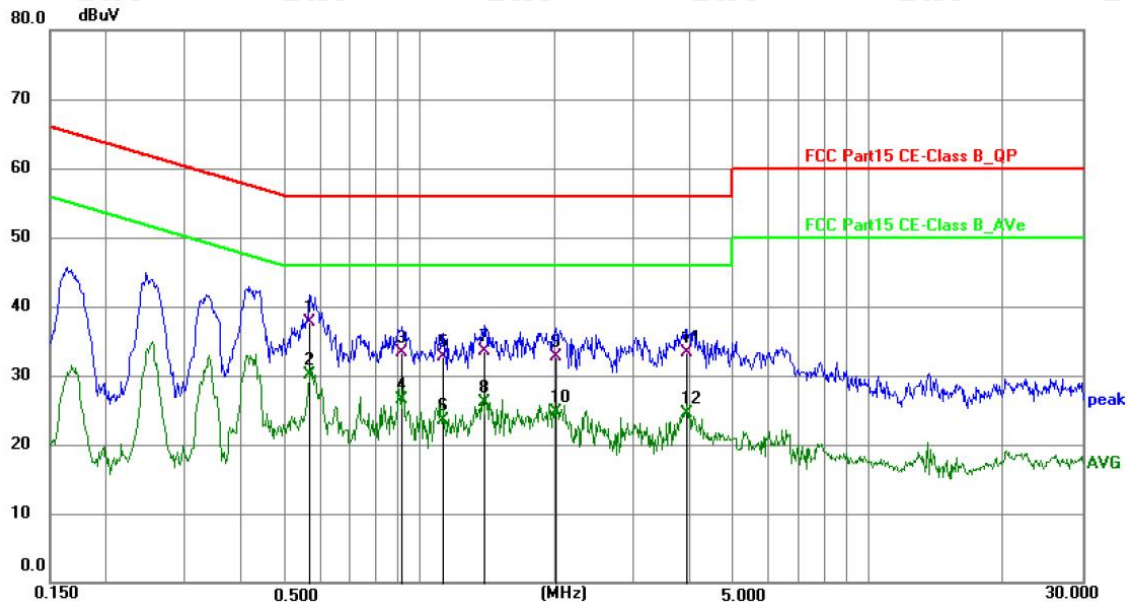

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5685	18.16	19.49	37.65	56.00	-18.35	QP
2 *	0.5685	10.67	19.49	30.16	46.00	-15.84	AVG
3	0.9150	13.78	19.51	33.29	56.00	-22.71	QP
4	0.9150	7.08	19.51	26.59	46.00	-19.41	AVG
5	1.1265	13.18	19.51	32.69	56.00	-23.31	QP
6	1.1265	3.98	19.51	23.49	46.00	-22.51	AVG
7	1.3920	14.07	19.52	33.59	56.00	-22.41	QP
8	1.3920	6.67	19.52	26.19	46.00	-19.81	AVG
9	2.0220	13.20	19.55	32.75	56.00	-23.25	QP
10	2.0220	5.12	19.55	24.67	46.00	-21.33	AVG
11	3.9300	13.70	19.59	33.29	56.00	-22.71	QP
12	3.9300	5.00	19.59	24.59	46.00	-21.41	AVG



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Model :	C15

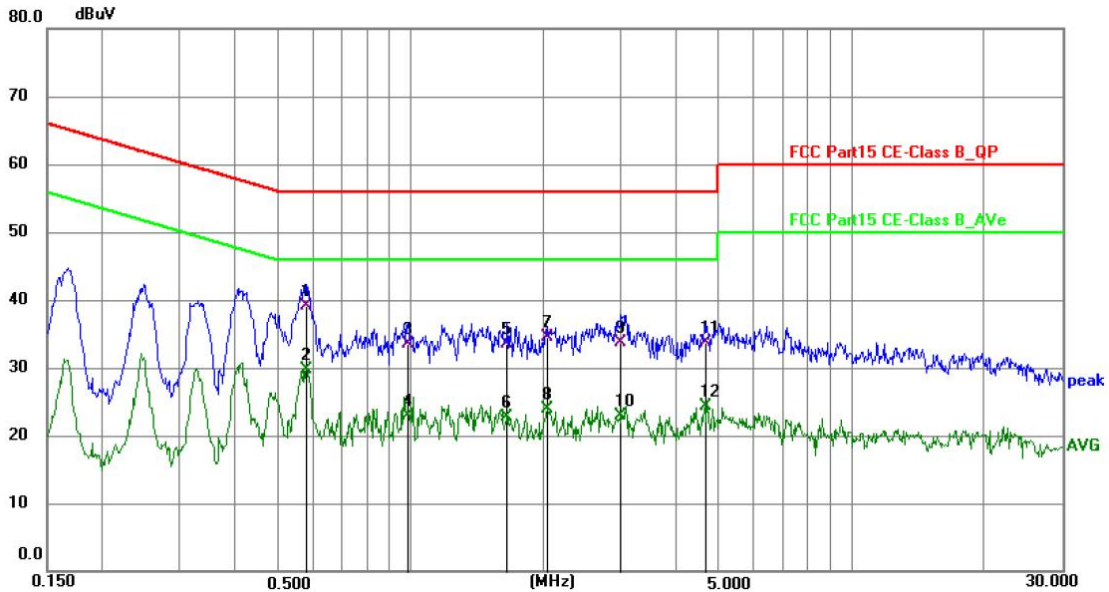

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5792	19.67	19.49	39.16	56.00	-16.84	QP
2 *	0.5792	10.12	19.49	29.61	46.00	-16.39	AVG
3	0.9870	13.96	19.50	33.46	56.00	-22.54	QP
4	0.9870	3.47	19.50	22.97	46.00	-23.03	AVG
5	1.6620	13.97	19.52	33.49	56.00	-22.51	QP
6	1.6620	3.22	19.52	22.74	46.00	-23.26	AVG
7	2.0400	15.05	19.54	34.59	56.00	-21.41	QP
8	2.0400	4.28	19.54	23.82	46.00	-22.18	AVG
9	2.9940	14.22	19.55	33.77	56.00	-22.23	QP
10	2.9940	3.26	19.55	22.81	46.00	-23.19	AVG
11	4.6814	14.02	19.60	33.62	56.00	-22.38	QP
12	4.6814	4.79	19.60	24.39	46.00	-21.61	AVG


- Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
 3.Measurement Level = Reading level + Correct Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Model :	C26

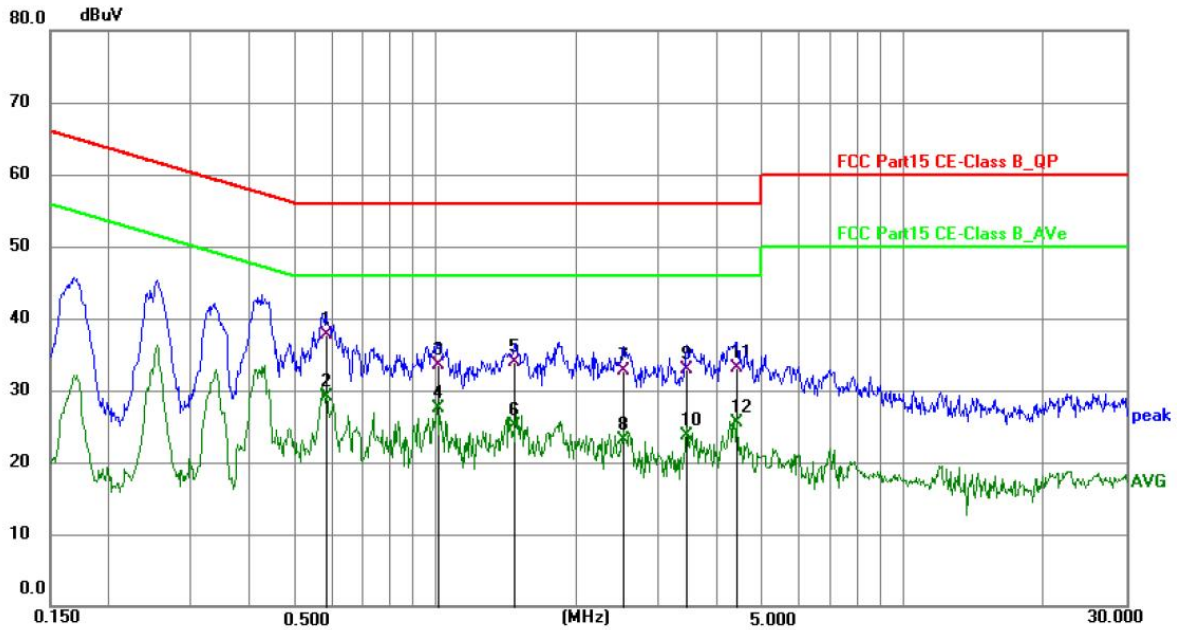

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5820	18.13	19.49	37.62	56.00	-18.38	QP
2 *	0.5820	9.64	19.49	29.13	46.00	-16.87	AVG
3	1.0140	13.95	19.51	33.46	56.00	-22.54	QP
4	1.0140	8.00	19.51	27.51	46.00	-18.49	AVG
5	1.4775	14.45	19.52	33.97	56.00	-22.03	QP
6	1.4775	5.67	19.52	25.19	46.00	-20.81	AVG
7	2.5170	13.05	19.56	32.61	56.00	-23.39	QP
8	2.5170	3.61	19.56	23.17	46.00	-22.83	AVG
9	3.4440	13.23	19.58	32.81	56.00	-23.19	QP
10	3.4440	4.10	19.58	23.68	46.00	-22.32	AVG
11	4.4203	13.56	19.60	33.16	56.00	-22.84	QP
12	4.4203	5.89	19.60	25.49	46.00	-20.51	AVG



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Model :	C26

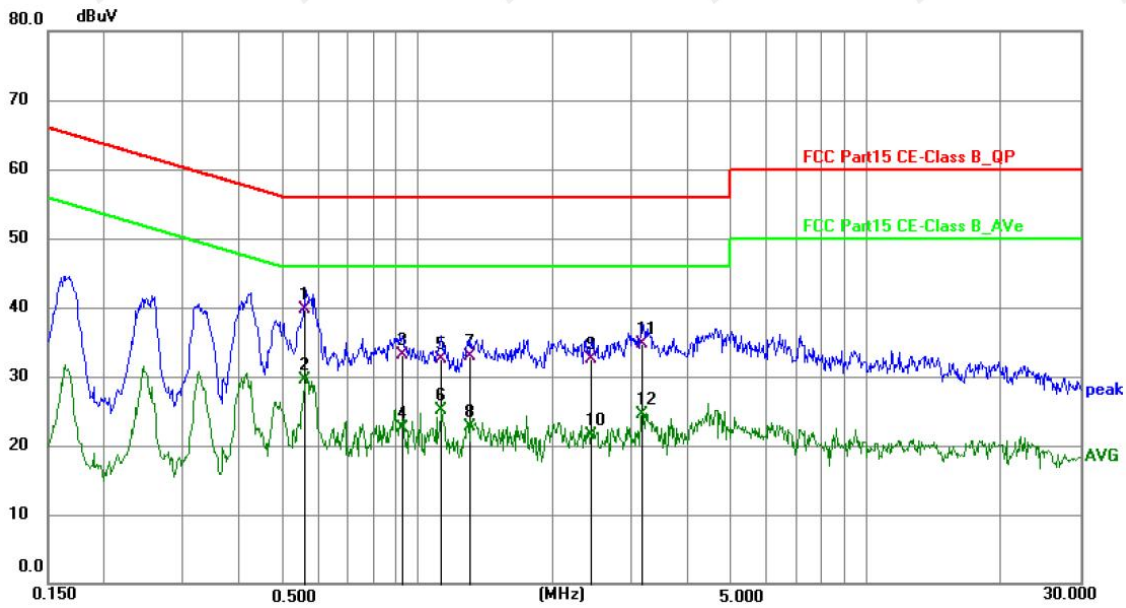

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.5639	20.22	19.49	39.71	56.00	-16.29	QP
2	0.5639	9.94	19.49	29.43	46.00	-16.57	AVG
3	0.9240	13.66	19.50	33.16	56.00	-22.84	QP
4	0.9240	3.09	19.50	22.59	46.00	-23.41	AVG
5	1.1310	13.04	19.50	32.54	56.00	-23.46	QP
6	1.1310	5.63	19.50	25.13	46.00	-20.87	AVG
7	1.3110	13.44	19.51	32.95	56.00	-23.05	QP
8	1.3110	3.24	19.51	22.75	46.00	-23.25	AVG
9	2.4405	12.95	19.54	32.49	56.00	-23.51	QP
10	2.4405	2.03	19.54	21.57	46.00	-24.43	AVG
11	3.1695	15.11	19.57	34.68	56.00	-21.32	QP
12	3.1695	4.96	19.57	24.53	46.00	-21.47	AVG

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.

2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.


3.Measurement Level = Reading level + Correct Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Model :	C17

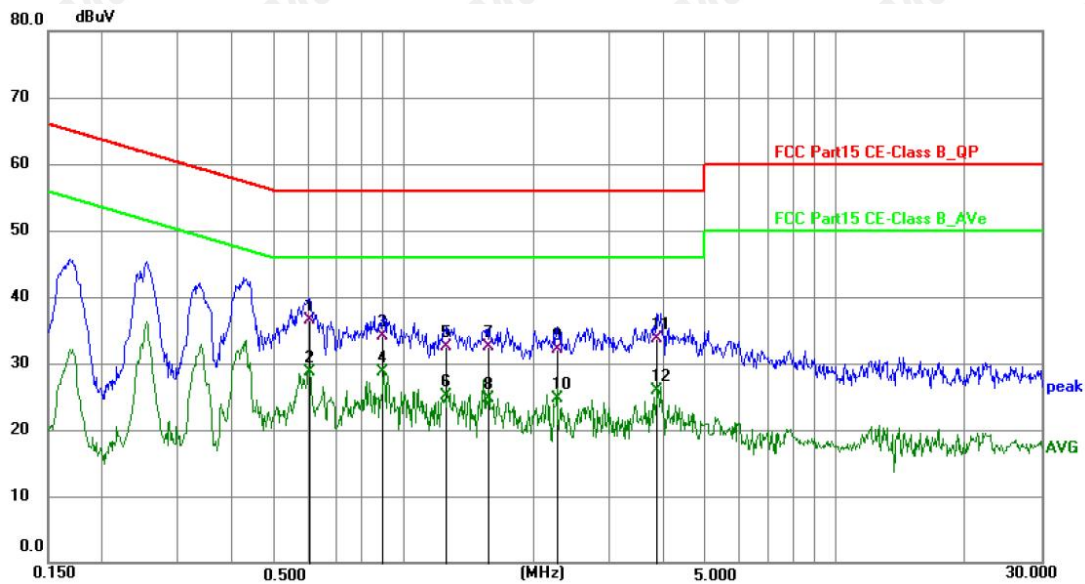


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.6045	17.10	19.49	36.59	56.00	-19.41	QP
2 *	0.6045	9.27	19.49	28.76	46.00	-17.24	AVG
3	0.8970	14.68	19.51	34.19	56.00	-21.81	QP
4	0.8970	9.13	19.51	28.64	46.00	-17.36	AVG
5	1.2570	13.07	19.52	32.59	56.00	-23.41	QP
6	1.2570	5.62	19.52	25.14	46.00	-20.86	AVG
7	1.5809	12.96	19.53	32.49	56.00	-23.51	QP
8	1.5809	5.14	19.53	24.67	46.00	-21.33	AVG
9	2.2650	12.56	19.55	32.11	56.00	-23.89	QP
10	2.2650	5.23	19.55	24.78	46.00	-21.22	AVG
11	3.8760	14.10	19.59	33.69	56.00	-22.31	QP
12	3.8760	6.36	19.59	25.95	46.00	-20.05	AVG



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Model :	C17

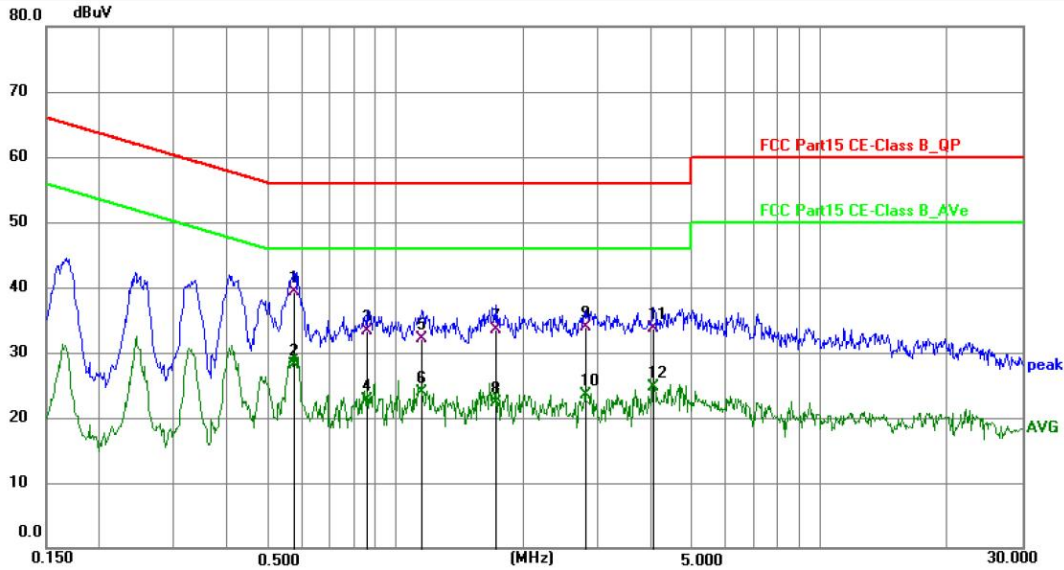

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1 *	0.5775	19.80	19.49	39.29	56.00	-16.71	QP
2	0.5775	8.70	19.49	28.19	46.00	-17.81	AVG
3	0.8610	13.89	19.49	33.38	56.00	-22.62	QP
4	0.8610	3.25	19.49	22.74	46.00	-23.26	AVG
5	1.1490	12.66	19.50	32.16	56.00	-23.84	QP
6	1.1490	4.34	19.50	23.84	46.00	-22.16	AVG
7	1.7295	14.06	19.53	33.59	56.00	-22.41	QP
8	1.7295	2.83	19.53	22.36	46.00	-23.64	AVG
9	2.8050	14.31	19.55	33.86	56.00	-22.14	QP
10	2.8050	3.96	19.55	23.51	46.00	-22.49	AVG
11	4.0693	14.18	19.58	33.76	56.00	-22.24	QP
12	4.0693	5.11	19.58	24.69	46.00	-21.31	AVG

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.

2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

3.Measurement Level = Reading level + Correct Factor



6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247,
 RSS-Gen §8.9, RSS-Gen §8.10
 Test Method : ANSI C63.10:2020
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

6.1 EUT Operation


Operating Environment :

Temperature : 23.5 °C
 Humidity : 51.1 % RH
 Atmospheric Pressure : 101.2kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

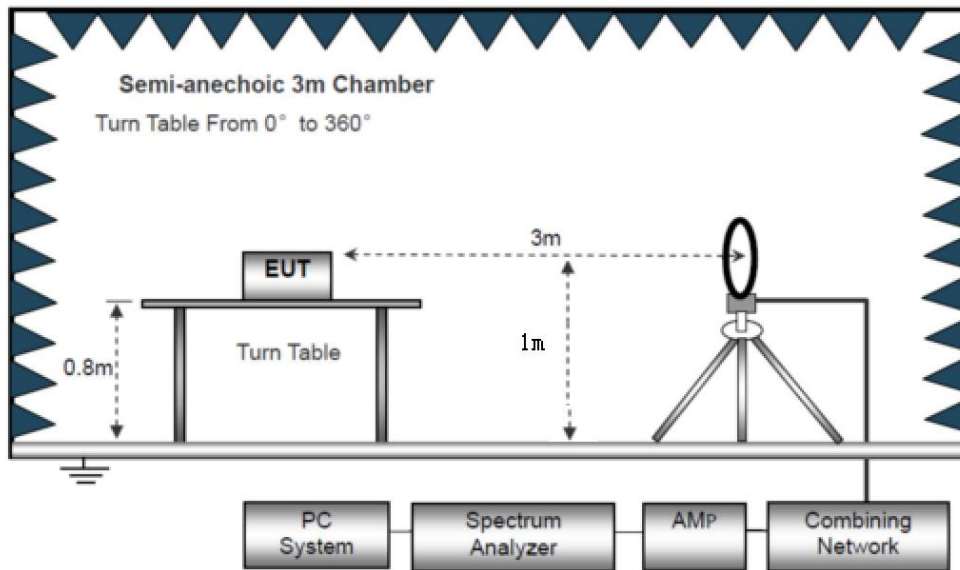

The test setup for emission measurement from 30 MHz to 1 GHz.

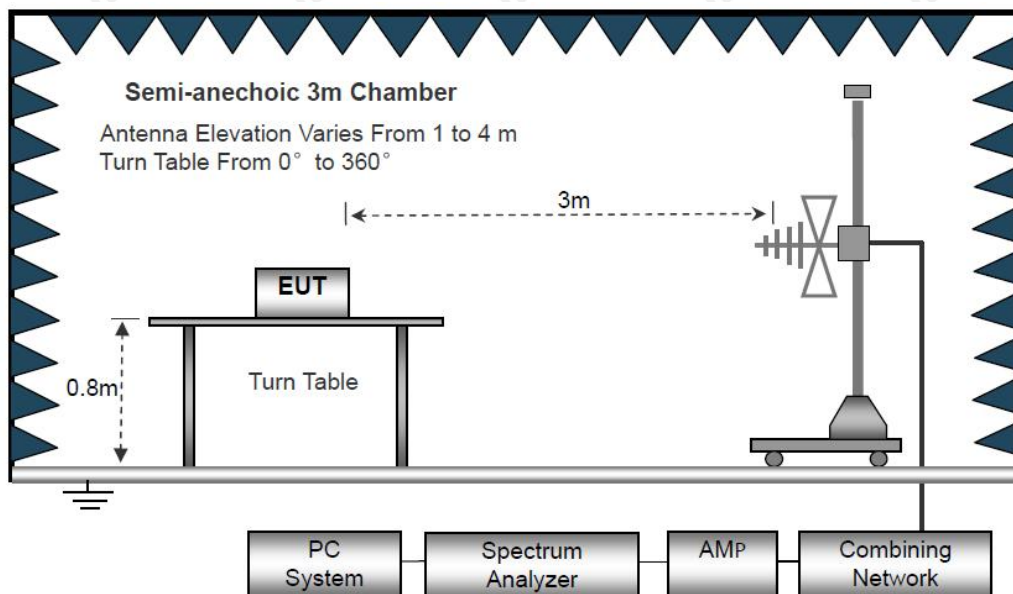

The test setup for emission measurement above 1 GHz

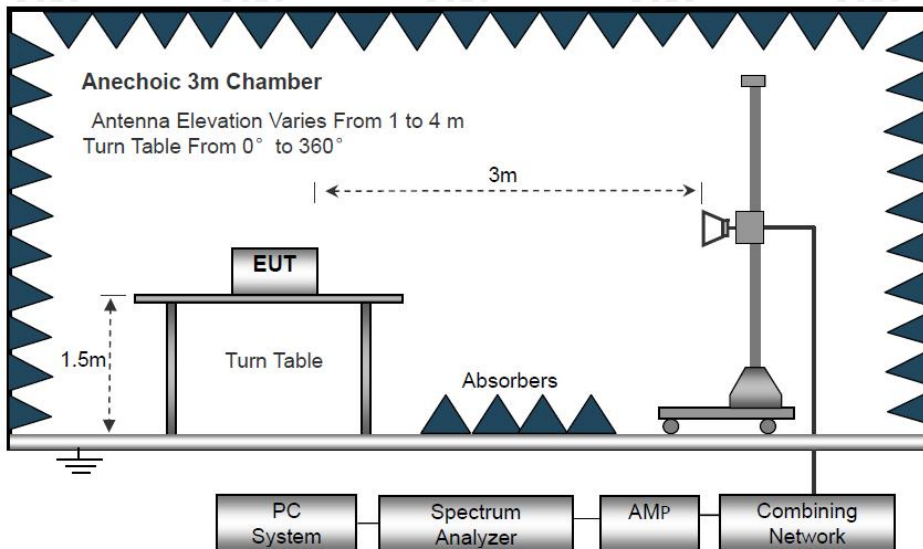

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value

6.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2020.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):



- 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarization and repeat 1) with vertical polarization.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear/ Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

For Average Measurement:

VBW=10Hz, when duty cycle is no less than 98 percent.

$VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);
 Limit line = Specific limits (dBuV) + distance extrapolation factor.



MAXLAB Testing Co.,Ltd.


Report No.: MAX250122110P01-R01

Test Frequency: 30MHz ~ 1GHz

Pass.

Please refer to the following test plots for the worst test mode (GFSK, Lowest Channel).

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Model:	M11

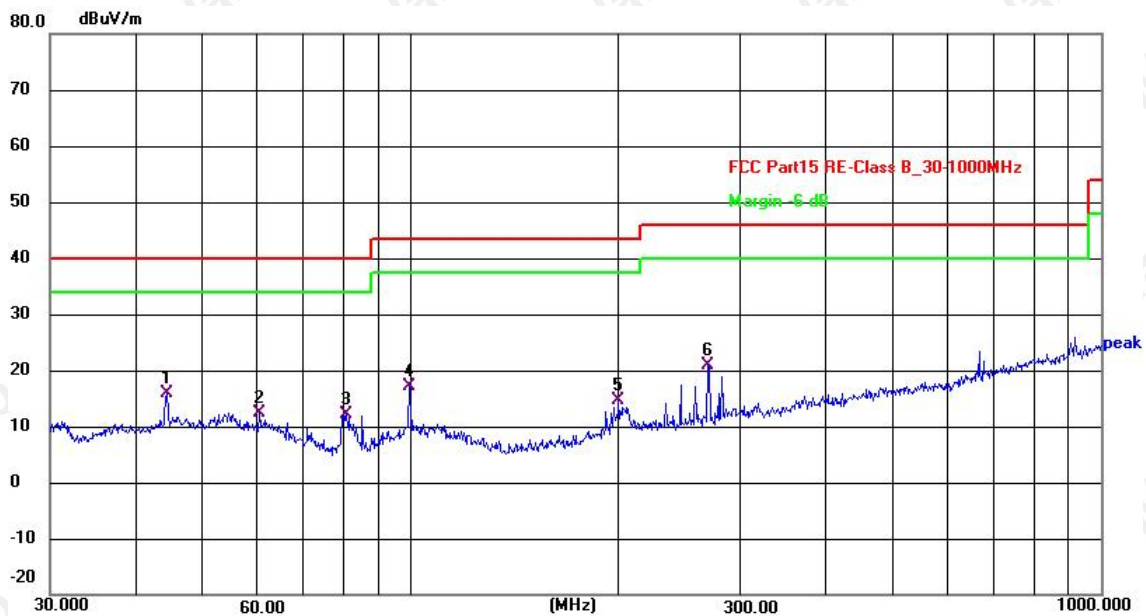

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.2752	30.30	-14.42	15.88	40.00	-24.12	QP
2	60.2800	27.40	-15.11	12.29	40.00	-27.71	QP
3	80.6440	32.06	-19.97	12.09	40.00	-27.91	QP
4	99.5281	33.18	-16.00	17.18	43.50	-26.32	QP
5	199.9855	31.19	-16.44	14.75	43.50	-28.75	QP
6	269.4284	35.23	-14.43	20.80	46.00	-25.20	QP


Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Model:	M11

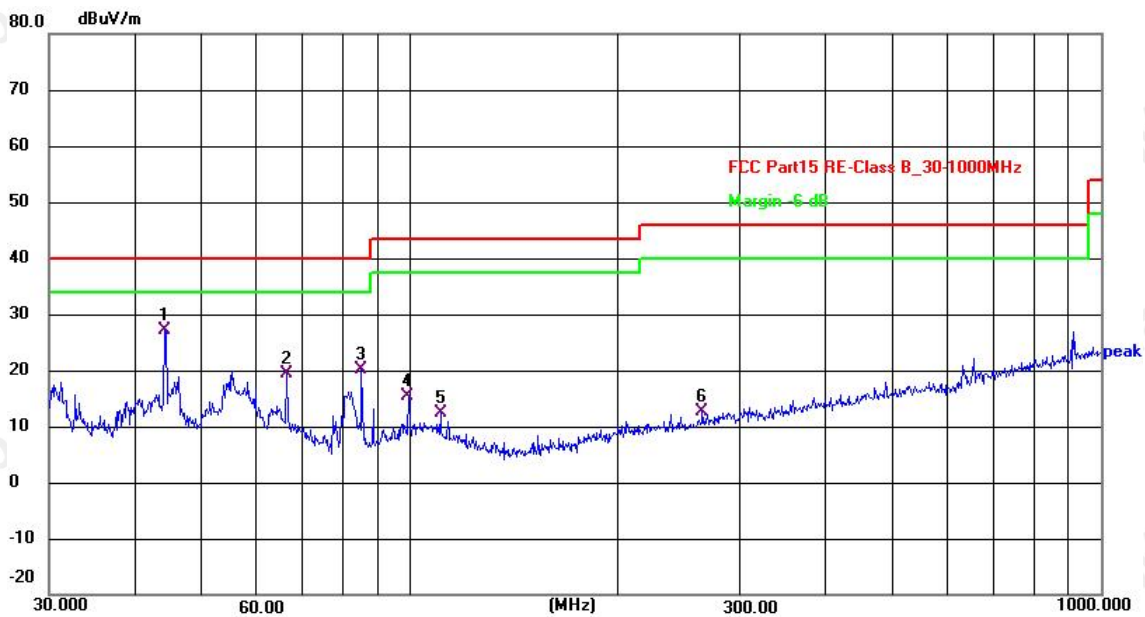

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.1202	41.62	-14.45	27.17	40.00	-12.83	QP
2	66.2662	36.39	-16.95	19.44	40.00	-20.56	QP
3	84.9995	39.40	-19.17	20.23	40.00	-19.77	QP
4	99.5279	31.31	-16.00	15.31	43.50	-28.19	QP
5	110.5686	28.23	-15.78	12.45	43.50	-31.05	QP
6	264.7456	27.22	-14.64	12.58	46.00	-33.42	QP


Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Model:	C20

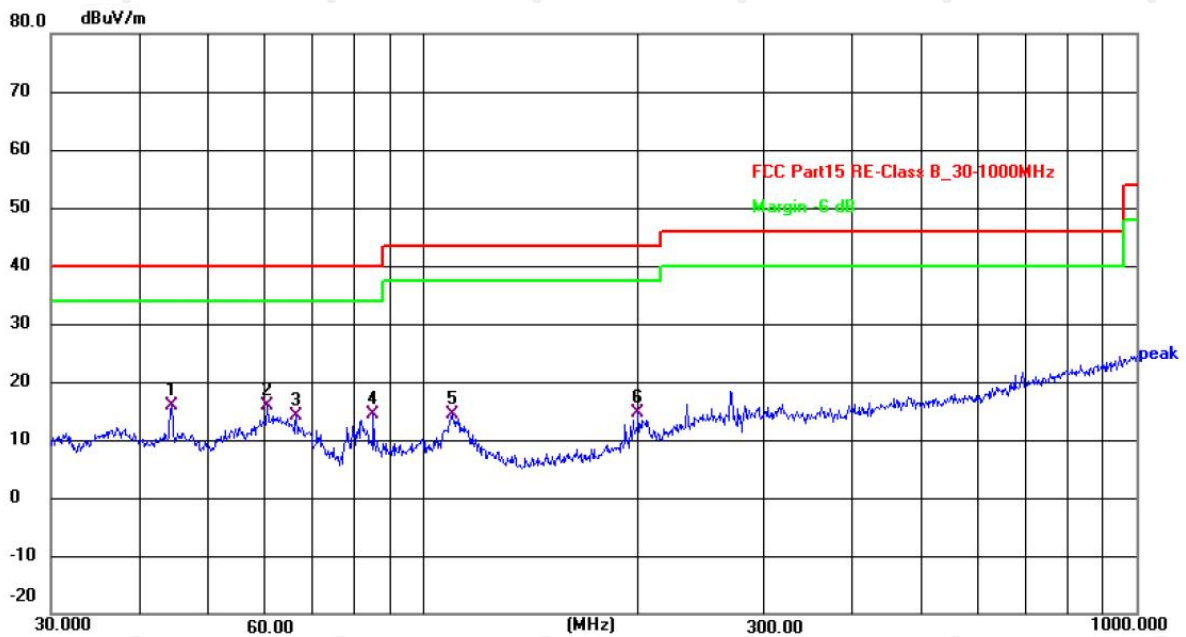

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.2751	30.30	-14.42	15.88	40.00	-24.12	QP
2	60.2800	30.90	-15.11	15.79	40.00	-24.21	QP
3	66.2660	31.05	-16.95	14.10	40.00	-25.90	QP
4	84.9993	33.64	-19.17	14.47	40.00	-25.53	QP
5	109.7960	30.02	-15.68	14.34	43.50	-29.16	QP
6	199.9855	31.19	-16.44	14.75	43.50	-28.75	QP


Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Model:	C20

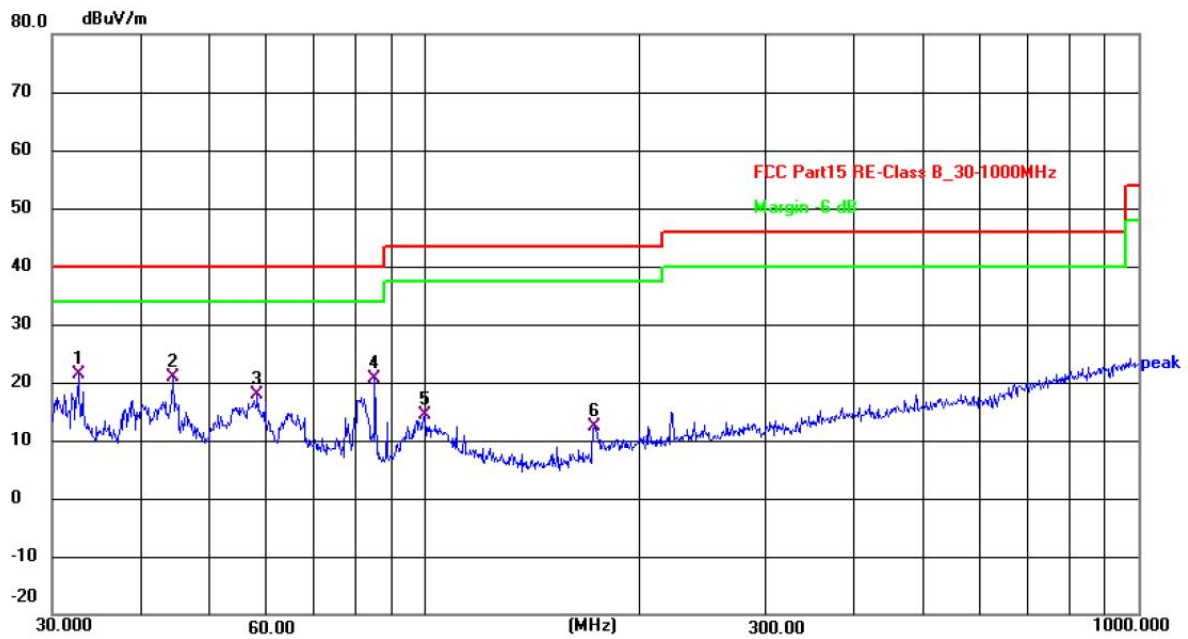

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.6340	37.80	-16.35	21.45	40.00	-18.55	QP
2	44.2751	35.30	-14.42	20.88	40.00	-19.12	QP
3	58.2030	32.67	-14.88	17.79	40.00	-22.21	QP
4	84.9993	39.90	-19.17	20.73	40.00	-19.27	QP
5	99.8777	30.33	-15.92	14.41	43.50	-29.09	QP
6	172.5987	30.77	-18.37	12.40	43.50	-31.10	QP


Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Model:	C27

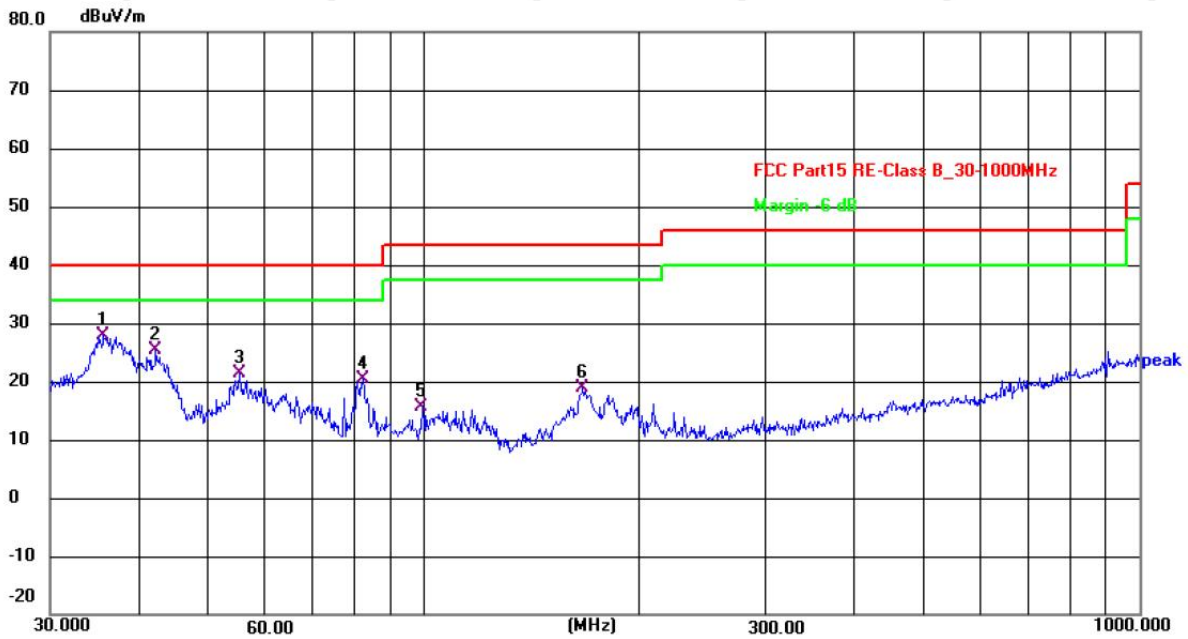

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.6240	43.93	-16.15	27.78	40.00	-12.22	QP
2	42.1540	39.99	-14.72	25.27	40.00	-14.73	QP
3	55.2207	36.14	-14.64	21.50	40.00	-18.50	QP
4	82.0704	40.03	-19.70	20.33	40.00	-19.67	QP
5	99.5279	31.73	-16.00	15.73	43.50	-27.77	QP
6	166.6511	37.63	-18.66	18.97	43.50	-24.53	QP


Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Model:	C27

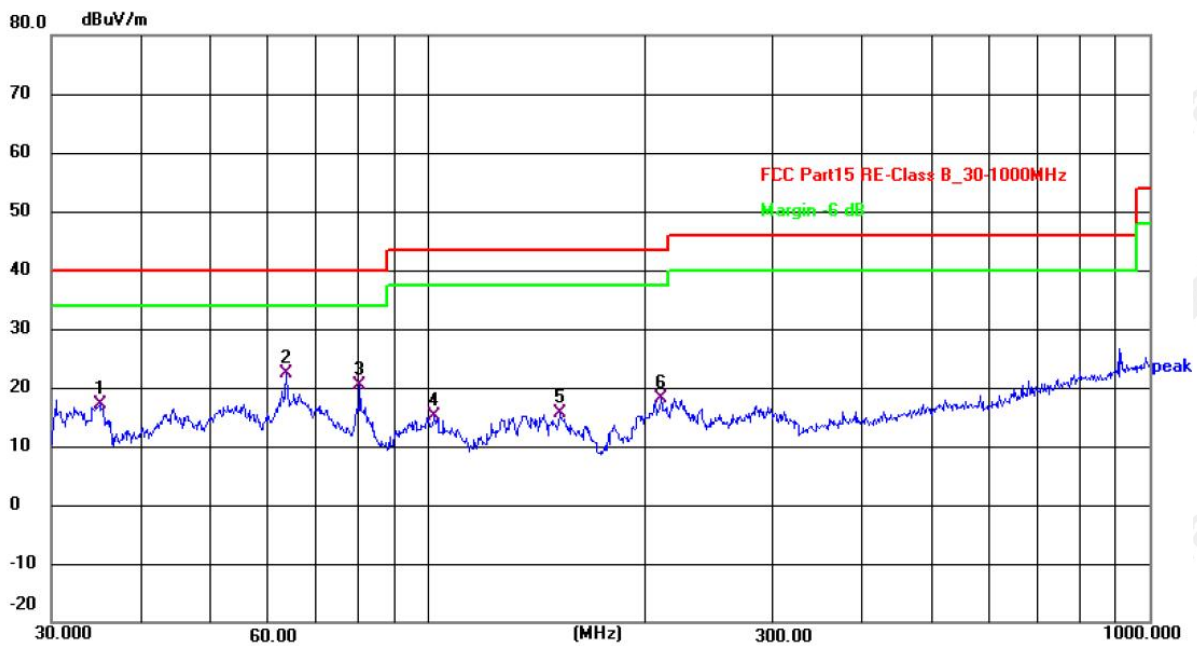

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.0048	33.42	-16.31	17.11	40.00	-22.89	QP
2	63.5356	38.43	-16.11	22.32	40.00	-17.68	QP
3	80.3617	40.45	-20.02	20.43	40.00	-19.57	QP
4	102.0013	30.87	-15.85	15.02	43.50	-28.48	QP
5	152.1297	34.80	-19.17	15.63	43.50	-27.87	QP
6	210.0481	34.16	-16.03	18.13	43.50	-25.37	QP


Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Model:	C15

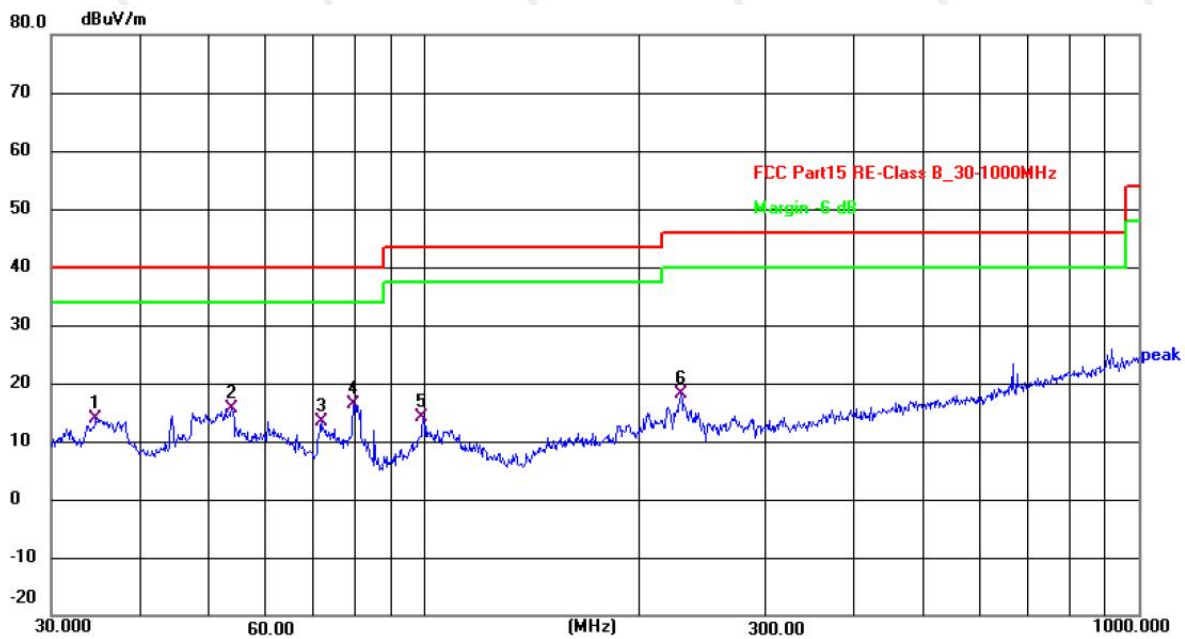

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	34.6385	30.31	-16.31	14.00	40.00	-26.00	QP
2	53.6931	30.25	-14.51	15.74	40.00	-24.26	QP
3	71.5805	31.77	-18.41	13.36	40.00	-26.64	QP
4	79.5210	36.25	-19.98	16.27	40.00	-23.73	QP
5	99.5279	30.18	-16.00	14.18	43.50	-29.32	QP
6	228.4901	33.49	-15.40	18.09	46.00	-27.91	QP


Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Model:	C15

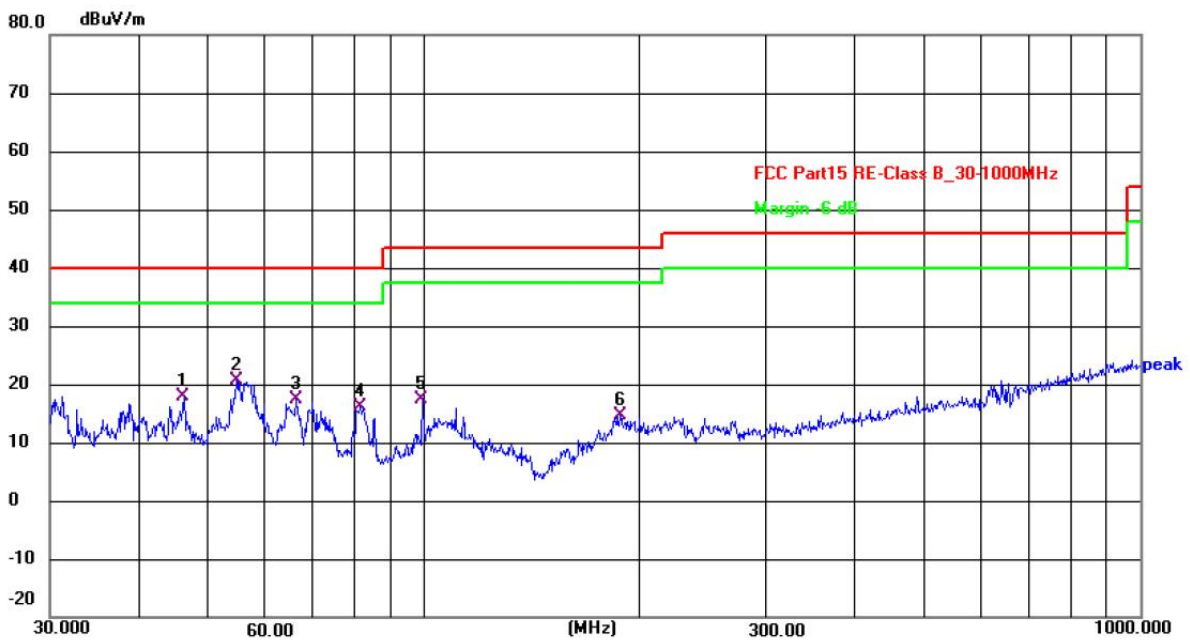

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	46.1779	32.24	-14.30	17.94	40.00	-22.06	QP
2	54.6428	35.11	-14.59	20.52	40.00	-19.48	QP
3	66.2660	34.39	-16.95	17.44	40.00	-22.56	QP
4	81.4970	35.92	-19.81	16.11	40.00	-23.89	QP
5	99.5279	33.31	-16.00	17.31	43.50	-26.19	QP
6	187.7530	31.51	-17.00	14.51	43.50	-28.99	QP


Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Model:	C26

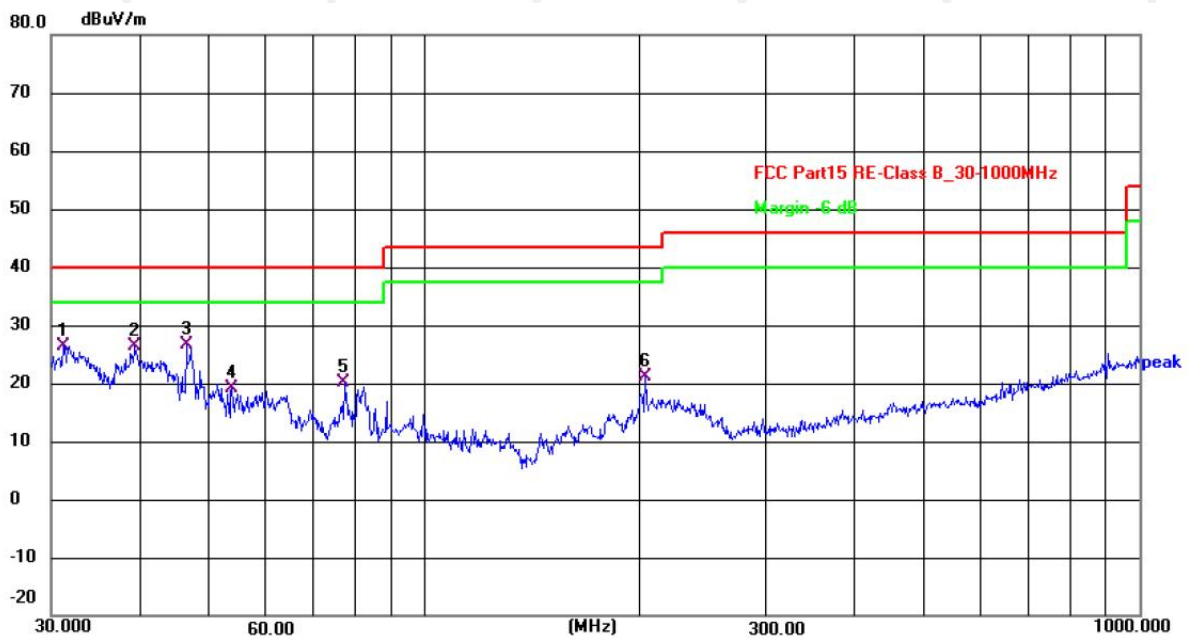

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.1797	42.86	-16.38	26.48	40.00	-13.52	QP
2	39.2991	41.50	-15.20	26.30	40.00	-13.70	QP
3	46.3402	41.02	-14.30	26.72	40.00	-13.28	QP
4	53.6931	33.70	-14.51	19.19	40.00	-20.81	QP
5	77.3210	39.77	-19.55	20.22	40.00	-19.78	QP
6	203.5226	37.33	-16.30	21.03	43.50	-22.47	QP


Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Model:	C26

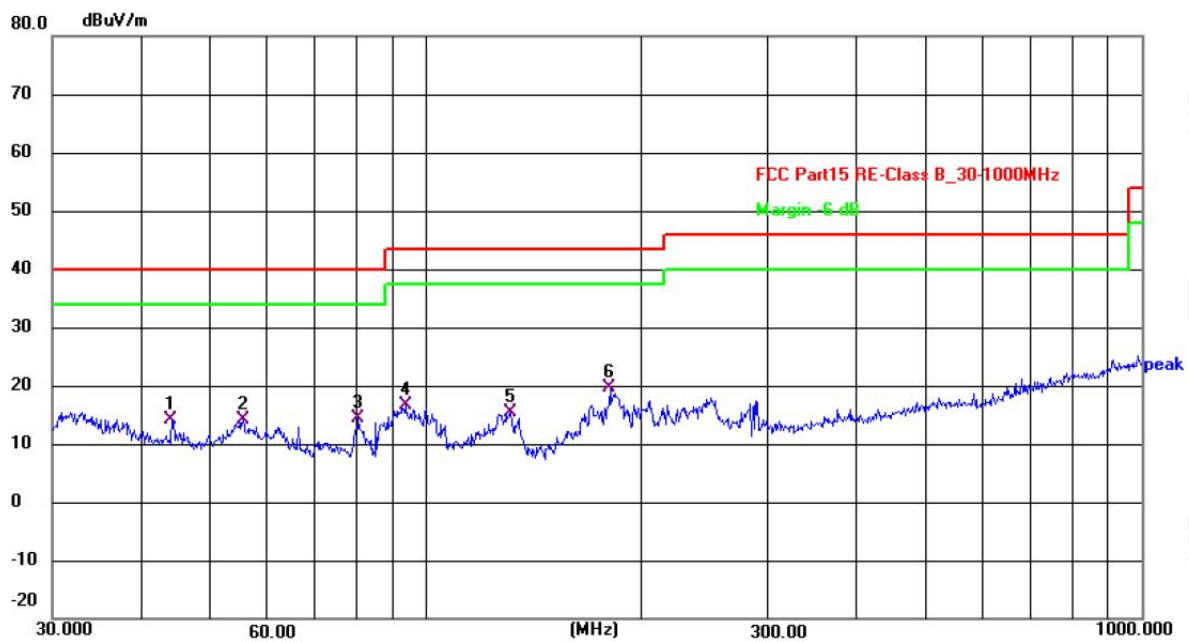

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.1200	28.54	-14.45	14.09	40.00	-25.91	QP
2	55.4147	28.85	-14.66	14.19	40.00	-25.81	QP
3	80.3617	34.45	-20.02	14.43	40.00	-25.57	QP
4	93.4402	34.08	-17.45	16.63	43.50	-26.87	QP
5	131.2965	34.48	-19.00	15.48	43.50	-28.02	QP
6	180.6484	37.10	-17.43	19.67	43.50	-23.83	QP


Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Model:	C17

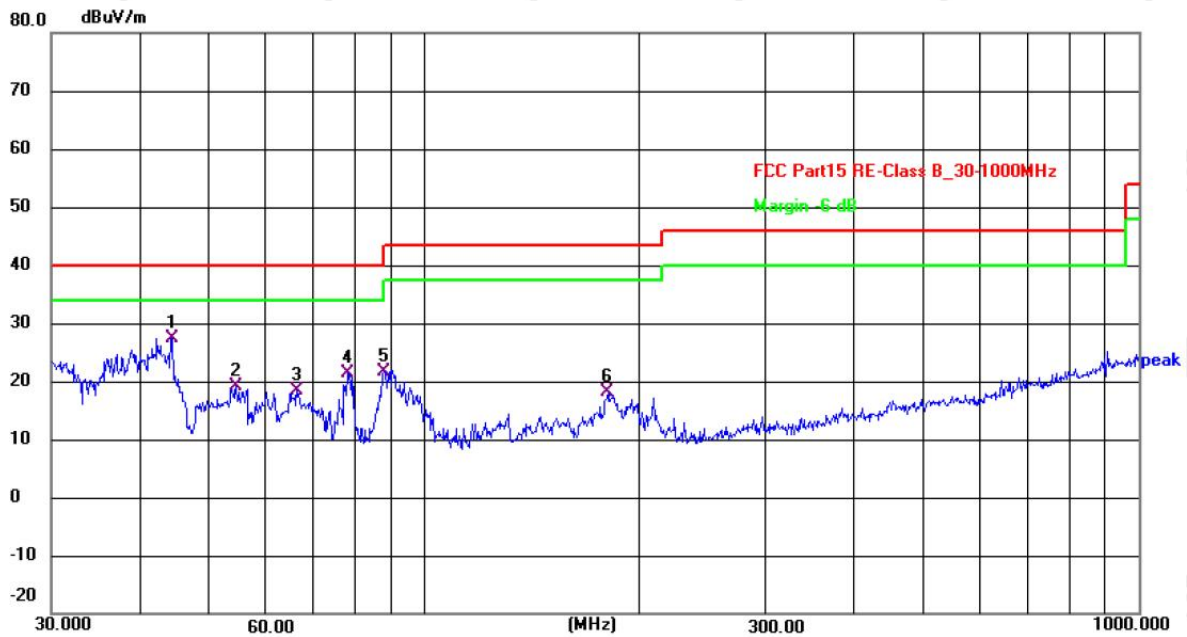

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	44.2751	41.88	-14.42	27.46	40.00	-12.54	QP
2	54.4515	33.67	-14.57	19.10	40.00	-20.90	QP
3	66.2660	35.32	-16.95	18.37	40.00	-21.63	QP
4	77.8653	41.09	-19.66	21.43	40.00	-18.57	QP
5	87.7245	40.20	-18.68	21.52	40.00	-18.48	QP
6	180.6484	35.61	-17.43	18.18	43.50	-25.32	QP


Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Model:	C17

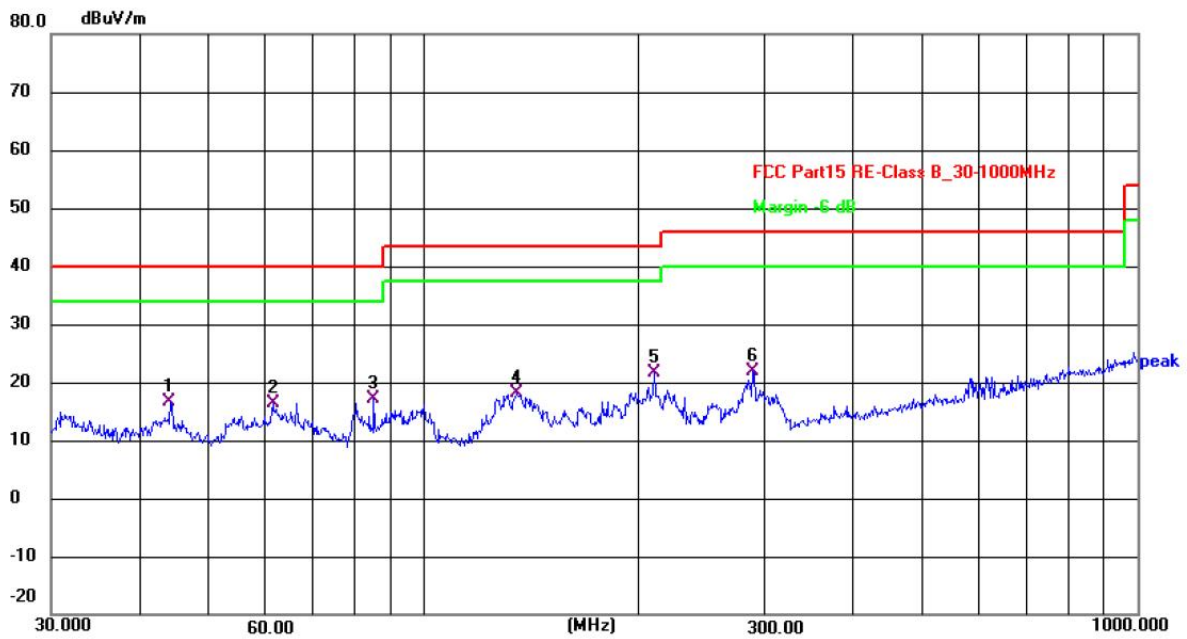

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.1200	31.04	-14.45	16.59	40.00	-23.41	QP
2	61.3462	31.80	-15.43	16.37	40.00	-23.63	QP
3	84.9993	36.24	-19.17	17.07	40.00	-22.93	QP
4	135.0318	37.42	-19.19	18.23	43.50	-25.27	QP
5	210.0481	37.66	-16.03	21.63	43.50	-21.87	QP
6	289.0020	35.58	-13.68	21.90	46.00	-24.10	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Test Frequency 1GHz-25GHz:

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	51.72	34.12	5.03	32.39	55.02	74.00	-18.98	Pk
V	4804.00	40.81	34.12	5.03	32.39	44.11	54.00	-9.89	AV
V	7206.00	46.82	32.54	6.29	35.86	56.43	74.00	-17.57	Pk
V	7206.00	35.09	32.54	6.29	35.86	44.70	54.00	-9.30	AV
V	9608.00	45.79	32.98	7.55	38.40	58.76	74.00	-15.24	Pk
V	9608.00	32.40	32.98	7.55	38.40	45.37	54.00	-8.63	AV
V	12010.00	45.37	32.09	8.93	39.00	61.21	74.00	-12.79	Pk
V	12010.00	27.16	32.09	8.93	39.00	43.00	54.00	-11.00	AV
H	4804.00	50.76	34.12	5.03	32.39	54.06	74.00	-19.94	Pk
H	4804.00	37.90	34.12	5.03	32.39	41.20	54.00	-12.80	AV
H	7206.00	46.34	32.54	6.29	35.86	55.95	74.00	-18.05	Pk
H	7206.00	30.90	32.54	6.29	35.86	40.51	54.00	-13.49	AV
H	9608.00	44.95	32.98	7.55	38.40	57.92	74.00	-16.08	Pk
H	9608.00	27.46	32.98	7.55	38.40	40.43	54.00	-13.57	AV
H	12010.00	40.70	32.09	8.93	39.00	56.54	74.00	-17.46	Pk
H	12010.00	26.71	32.09	8.93	39.00	42.55	54.00	-11.45	AV



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	49.26	34.07	5.09	32.59	52.87	74.00	-21.13	Pk
V	4880.00	38.85	34.07	5.09	32.59	42.46	54.00	-11.54	AV
V	7320.00	45.66	32.63	6.34	35.96	55.33	74.00	-18.67	Pk
V	7320.00	35.04	32.63	6.34	35.96	44.71	54.00	-9.29	AV
V	9760.00	41.17	32.92	7.59	38.40	54.24	74.00	-19.76	Pk
V	9760.00	30.19	32.92	7.59	38.40	43.26	54.00	-10.74	AV
V	12200.00	38.71	31.96	8.88	39.04	54.67	74.00	-19.33	Pk
V	12200.00	30.14	31.96	8.88	39.04	46.10	54.00	-7.90	AV
H	4880.00	50.65	34.07	5.09	32.59	54.26	74.00	-19.74	Pk
H	4880.00	38.98	34.07	5.09	32.59	42.59	54.00	-11.41	AV
H	7320.00	45.63	32.63	6.34	35.96	55.30	74.00	-18.70	Pk
H	7320.00	34.41	32.63	6.34	35.96	44.08	54.00	-9.92	AV
H	9760.00	41.35	32.92	7.59	38.40	54.42	74.00	-19.58	Pk
H	9760.00	30.71	32.92	7.59	38.40	43.78	54.00	-10.22	AV
H	12200.00	38.94	31.96	8.88	39.04	54.90	74.00	-19.10	Pk
H	12200.00	28.23	31.96	8.88	39.04	44.19	54.00	-9.81	AV



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	47.59	34.02	5.15	32.80	51.52	74.00	-22.48	Pk
V	4960.00	37.72	34.02	5.15	32.80	41.65	54.00	-12.35	AV
V	7440.00	44.04	32.71	6.40	36.05	53.78	74.00	-20.22	Pk
V	7440.00	33.83	32.71	6.40	36.05	43.57	54.00	-10.43	AV
V	9920.00	39.50	32.86	7.62	38.40	52.66	74.00	-21.34	Pk
V	9920.00	29.23	32.86	7.62	38.40	42.39	54.00	-11.61	AV
V	12400.00	39.30	31.82	8.84	39.08	55.40	74.00	-18.60	Pk
V	12400.00	25.29	31.82	8.84	39.08	41.39	54.00	-12.61	AV
H	4960.00	48.01	34.02	5.15	32.80	51.94	74.00	-22.06	Pk
H	4960.00	36.88	34.02	5.15	32.80	40.81	54.00	-13.19	AV
H	7440.00	43.82	32.71	6.40	36.05	53.56	74.00	-20.44	Pk
H	7440.00	31.17	32.71	6.40	36.05	40.91	54.00	-13.09	AV
H	9920.00	40.46	32.86	7.62	38.40	53.62	74.00	-20.38	Pk
H	9920.00	29.30	32.86	7.62	38.40	42.46	54.00	-11.54	AV
H	12400.00	38.52	31.82	8.84	39.08	54.62	74.00	-19.38	Pk
H	12400.00	28.37	31.82	8.84	39.08	44.47	54.00	-9.53	AV

Note: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	57.32	35.17	3.48	27.49	53.12	74.00	PK	PASS
	H	2390.00	49.34	35.17	3.48	27.49	45.14	54.00	AV	PASS
	H	2400.00	58.64	35.16	3.49	27.52	54.49	74.00	PK	PASS
	H	2400.00	49.41	35.16	3.49	27.52	45.26	54.00	AV	PASS
	V	2390.00	56.80	35.17	3.48	27.49	52.60	74.00	PK	PASS
	V	2390.00	49.03	35.17	3.48	27.49	44.83	54.00	AV	PASS
	V	2400.00	58.76	35.16	3.49	27.52	54.61	74.00	PK	PASS
	V	2400.00	49.13	35.16	3.49	27.52	44.98	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	57.15	35.11	3.56	27.75	53.35	74.00	PK	PASS
	H	2483.50	48.66	35.11	3.56	27.75	44.86	54.00	AV	PASS
	H	2500.00	58.67	35.10	3.57	27.80	54.94	74.00	PK	PASS
	H	2500.00	49.31	35.10	3.57	27.80	45.58	54.00	AV	PASS
	V	2483.50	57.28	35.11	3.56	27.75	53.48	74.00	PK	PASS
	V	2483.50	49.87	35.11	3.56	27.75	46.07	54.00	AV	PASS
V	2500.00	58.23	35.10	3.57	27.80	54.50	74.00	PK	PASS	
V	2500.00	49.32	35.10	3.57	27.80	45.59	54.00	AV	PASS	

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



7 Conduct Band Edge And Spurious Emissions Measurement

- Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
RSS-247 § 5.5
- Test Method : ANSI C63.10:2020
- Test Limit : Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
RSS-247 § 5.5:
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.2 Test Result

Please see the Appendix for the BLE data



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

8 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247, RSS-247

Test Method : ANSI C63.10:2020

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

8.2 Test Result

Please see the Appendix for the BLE data



9 Maximum Peak Output Power

- Test Requirement : FCC CFR47 Part 15 Section 15.247, RSS-247 § 5.4
- Test Method : ANSI C63.10:2020
- Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

RSS-247 § 5.4

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

9.1 Test Procedure

1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.

9.2 Test Result

Please see the Appendix for the BLE data



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

10 Power Spectral density

- Test Requirement : FCC CFR47 Part 15 Section 15.247,RSS-247 §5.2 (b)
- Test Method : ANSI C63.10:2020
- Test Limit : Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
- RSS-247 §5.2 (b)
The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

10.2 Test Result

Please see the Appendix for the BLE data



11 Antenna Application

11.1 Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

According to RSS-GEN section 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

11.2 Result

The antenna is PCB antenna, the Max gain of the antennas is -0.58 dBi, reference to the attachment for details.



MAXLAB Testing Co.,Ltd.

Report No.: MAX250122110P01-R01

12 Test Setup Photos and EUT Photos

Please see the attachment for details.

*****THE END REPORT*****