

承 認 書

SPECIFICATION FOR APPROVAL

客戶名稱
CUSTOMER : _____

客戶料號
CUSTOMER'S P/N : _____

料號
PART NUMBER : WAN1003F039M03

規格
DESCRIPTION : Chip Antenna 1003 M-Ant 470,868,915M Type 03

版本
VERSION : V1.3

日期
ISSUE DATE : 2023/07/12

客 戶 承 認 CUSTOMER APPROVED	

工 程 部 R&D CENTER		
承 認 APPROVAL	確 認 CHECKED	製 作 DRAWN
Ray	Tennyson	Snow



萬誠科技股份有限公司

11261 台北市北投區立功街 151 號 1 樓


電話: (02) 2898-2220
傳真: (02) 2898-5055

OneWave Electronic Co., Ltd.

1F, No. 151, Li Gong Street, Beitou District,
Taipei City 11261, Taiwan
TEL: +886 2 2898-2220
FAX: +886 2 2898-5055

1003 Chip antenna

For 470 / 868 / 915MHz Applications

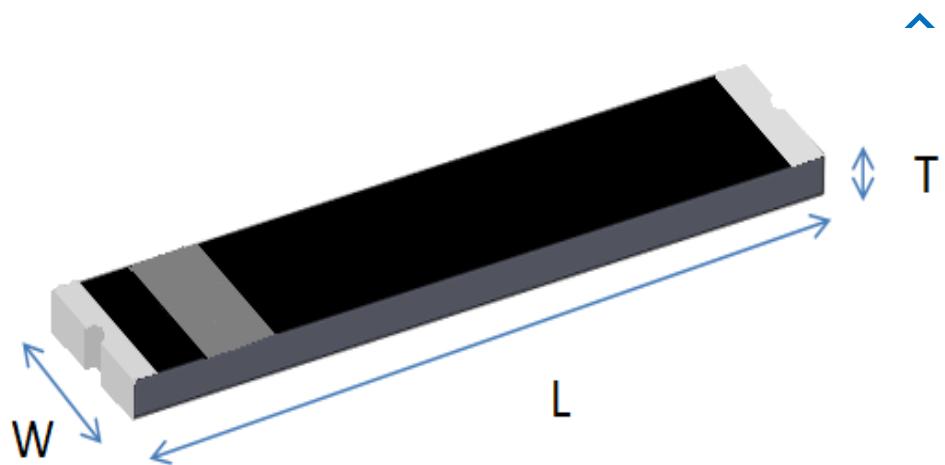

威士成科技

P/N: WAN1003F039M03

OneWave

	Dimension (mm)
L	10.50 ± 0.20
W	3.00 ± 0.20
T	1.23 ± 0.20

Part Number Information

WAN	1003	F	039	M	03
A	B	C	D	E	F

A	Product Series	Antenna
B	Dimension L x W	10 x 3mm ($\pm 0.2\text{mm}$)
C	Material	High K material
D	Working Frequency	470MHz / 868MHz / 915MHz
E	Feeding mode	Monopole & Single Feeding
F	Antenna type	Type = 03


1. Electrical Specification

Specification		
Part Number	WAN1003F039M03	
Central Frequency	470 / 868 / 915	MHz
Bandwidth	25 (Min.)	MHz
Return Loss	-10 (Max)	dB
Peak Gain	1.21 / 1.27 / 1.32	dBi
Impedance	50	Ohm
Operating Temperature	-40～+110	°C
Maximum Power	4	W
Resistance to Soldering Heats	10 (@ 260°C)	sec.
Polarization	Linear	
Azimuth Beamwidth	Omni-directional	
Termination	Cu / Sn (Leadless)	

Remark : Bandwidth & Peak Gain was measured under evaluation board of next page

2. Recommended PCB Pattern


Evaluation Board Dimension

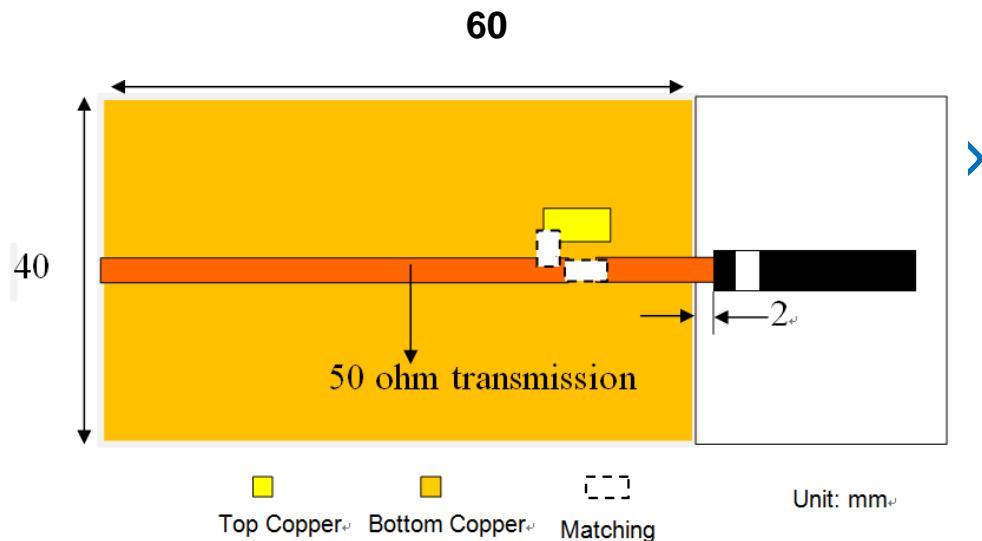


Suggested Matching Circuit

重要資訊：

匹配元件建議使用精準度高的電感 $\pm 0.1\text{~}0.3\text{nH}$ 、電容 $\pm 0.1\text{pF}$

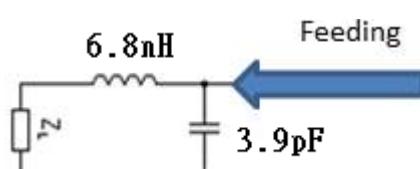

Evaluation Board Dimension

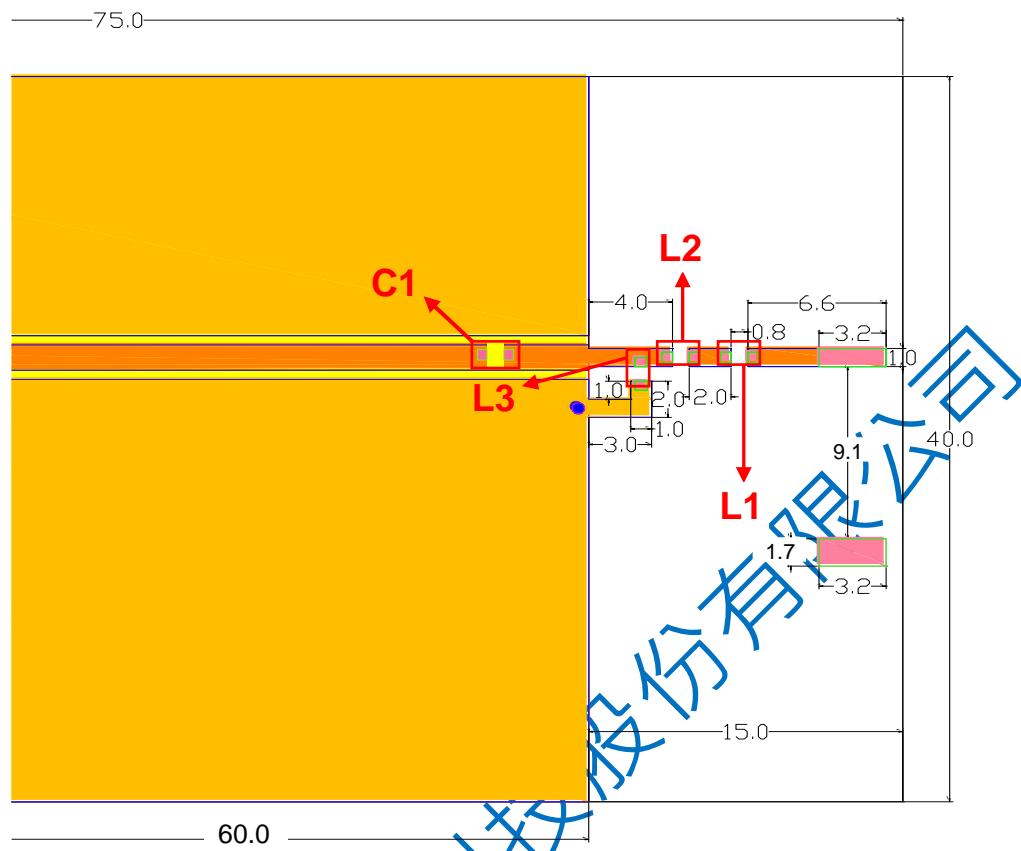


Suggested Matching Circuit

Fc [MHz]	Inductance[nH]			Capacitance[pF]
	L1	L2	L3	
470	10	120	15	3
868	2	39	8.2	0Ω
915	0Ω	36	6.8	0Ω

OneWave


FootPrint (Unit : mm)

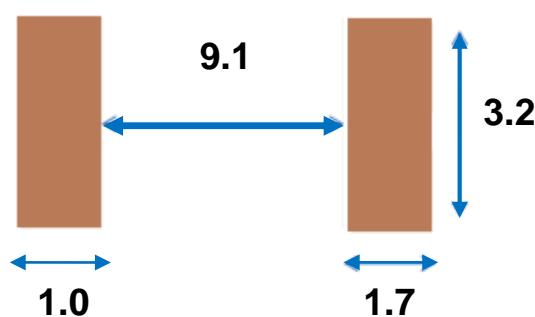


3. Measurement Results

Return Loss


915MHz

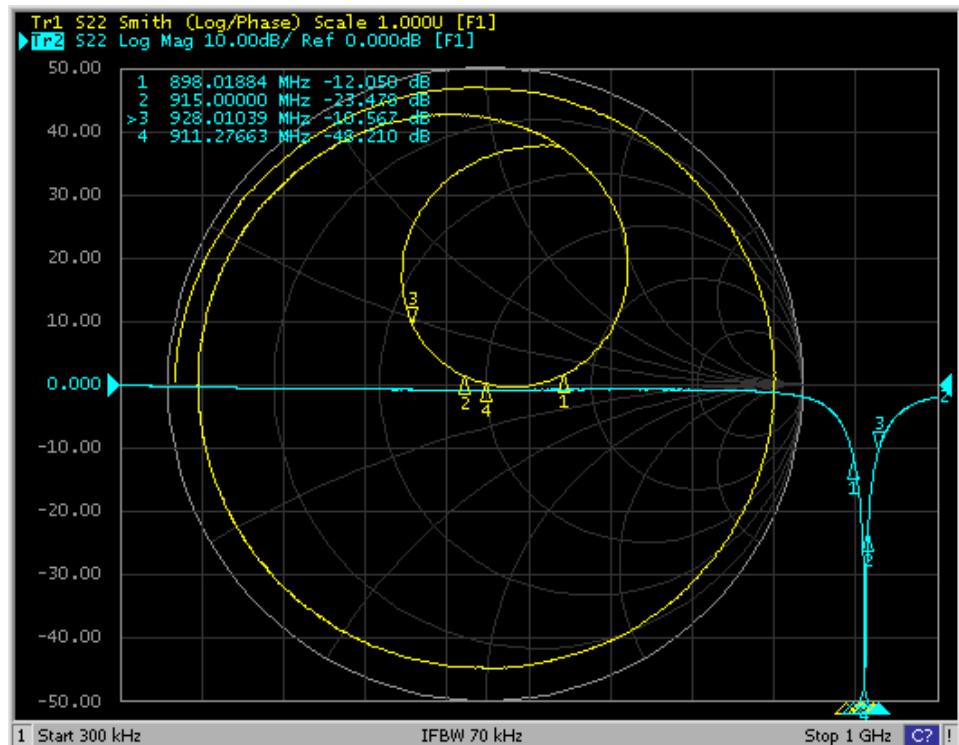

868MHz

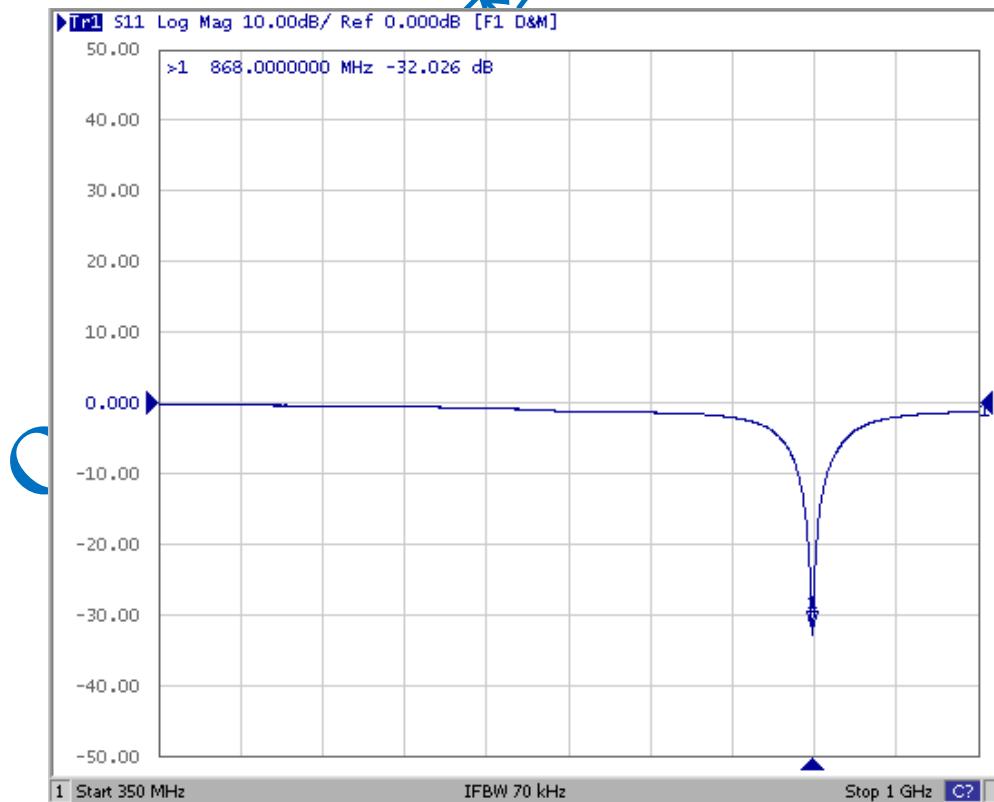


470MHz

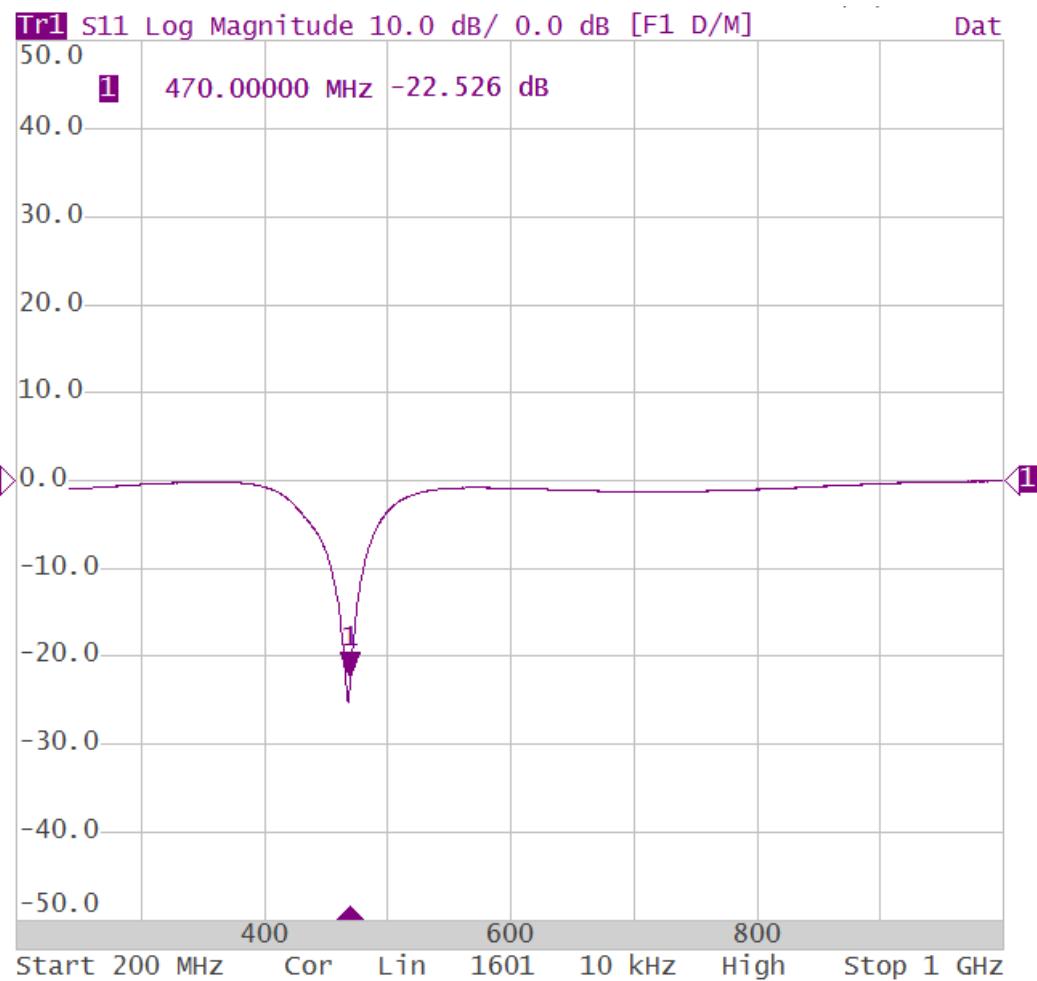


OneWave 寶島

Radiation Pattern


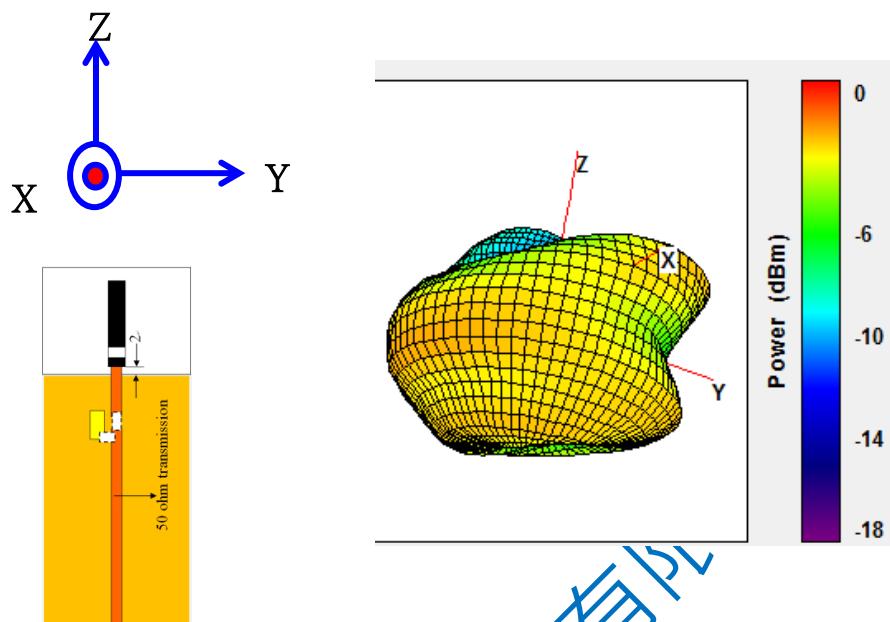


	Efficiency	Peak Gain	Directivity
915MHz	54.67 %	1.32 dBi	3.08 dBi
868MHz	50.67 %	1.27 dBi	3.58 dBi
470MHz	46.78 %	1.21 dBi	4.51 dBi

Chamber Coordinate System

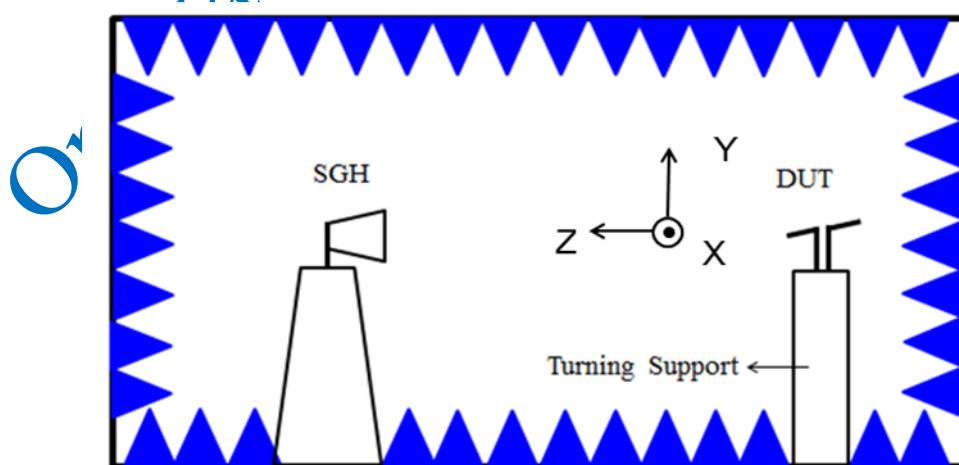


4. Reliability and Test Conditions

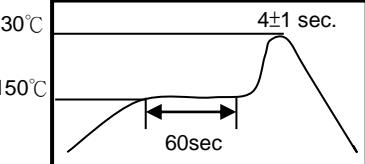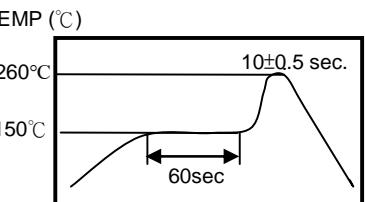ITEM	REQUIREMENTS	TEST CONDITION															
Solderability	<p>1. Wetting shall exceed 90% coverage 2. No visible mechanical damage</p> <p>TEMP (°C)</p> 	<p>Pre-heating temperature: 150°C / 60sec. Solder temperature: 230±5°C Duration: 4±1sec. Solder: Sn-Ag3.0-Cu0.5 Flux for lead free: rosin</p>															
Solder heat Resistance	<p>1. No visible mechanical damage 2. Central Freq. change :within ± 6%</p> <p>TEMP (°C)</p> 	<p>Pre-heating temperature: 150°C / 60sec. Solder temperature: 260±5°C Duration: 10±0.5sec. Solder: Sn-Ag3.0-Cu0.5 Flux for lead free: rosin</p>															
Component Adhesion (Push test)	1. No visible mechanical damage	<p>The device should be reflow soldered(230±5°C for 10sec.) to a tinned copper substrate A dynometer force gauge should be applied the side of the component. The device must with-ST-F 0.5 Kg without failure of the termination attached to component.</p>															
Component Adhesion (Pull test)	1. No visible mechanical damage	<p>Insert 10cm wire into the remaining open eye bend ,the ends of even wire lengths upward and wind together. Terminal shall not be remarkably damaged.</p>															
Thermal shock	<p>1. No visible mechanical damage 2. Central Freq. change :within ±6%</p> <table border="1"> <thead> <tr> <th>Phase</th><th>Temperature(°C)</th><th>Time(min)</th></tr> </thead> <tbody> <tr> <td>1</td><td>+110±5°C</td><td>30±3</td></tr> <tr> <td>2</td><td>Room Temperature</td><td>Within 3sec</td></tr> <tr> <td>3</td><td>-40±2°C</td><td>30±3</td></tr> <tr> <td>4</td><td>Room Temperature</td><td>Within 3sec</td></tr> </tbody> </table>	Phase	Temperature(°C)	Time(min)	1	+110±5°C	30±3	2	Room Temperature	Within 3sec	3	-40±2°C	30±3	4	Room Temperature	Within 3sec	<p>+110°C =>30±3min -40°C =>30±3min Test cycle: 10 cycles The chip shall be stabilized at normal condition for 2~3 hours before measuring.</p>
Phase	Temperature(°C)	Time(min)															
1	+110±5°C	30±3															
2	Room Temperature	Within 3sec															
3	-40±2°C	30±3															
4	Room Temperature	Within 3sec															
Resistance to High Temperature	<p>1. No visible mechanical damage 2. Central Freq. change :within ±6% 3. No disconnection or short circuit.</p>	<p>Temperature: +110±5°C Duration: 1000±12hrs The chip shall be stabilized at normal condition for 2~3 hours before measuring.</p>															
Resistance to Low Temperature	<p>1. No visible mechanical damage 2. Central Freq. change :within ±6% 3. No disconnection or short circuit.</p>	<p>Temperature: -40±5°C Duration: 1000±12hrs The chip shall be stabilized at normal condition for 2~3 hours before measuring.</p>															
Humidity	<p>1. No visible mechanical damage 2. Central Freq. change :within ±6% 3. No disconnection or short circuit.</p>	<p>Temperature: 40±2°C Humidity: 90% to 95% RH Duration: 1000±12hrs The chip shall be stabilized at normal condition for 2~3 hours before measuring.</p>															

5. Soldering and Mounting

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. The terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

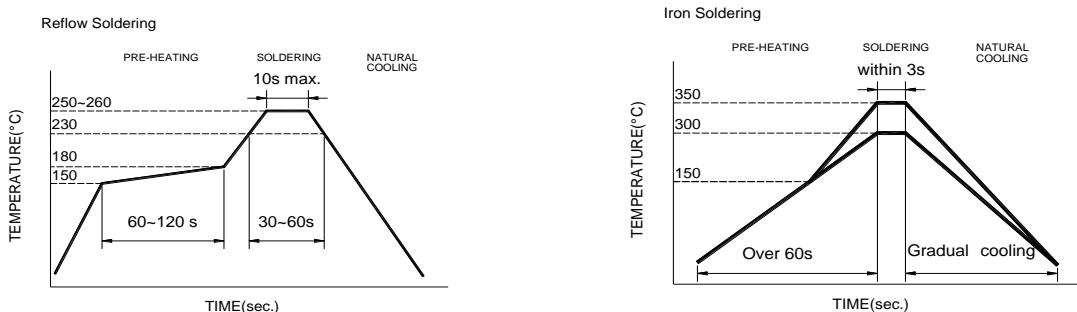


Recommended temperature profiles for re-flow soldering in Figure 1.

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

- Preheat circuit and products to 150°C
- Never contact the ceramic with the iron tip
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- 280°C tip temperature (max)
- 1.0mm tip diameter (max)
- Limit soldering time to 3 sec.


6. Packaging Information

◆ Tape Specification:

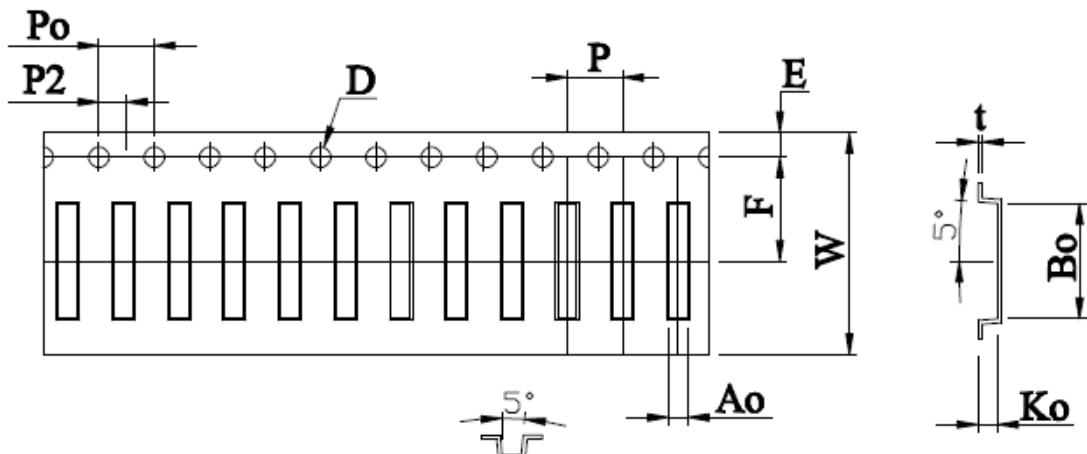

W	Ao	Bo	Ko	P	F	E	D	D1	Po	P2	t
24.0 ±0.30	3.61 ±0.10	11.78 ±0.10	2.49 ±0.10	8.00 ±0.10	11.5 ±0.10	1.75 ±0.10	1.50 ±0.10	1.50 ±0.15	4.00 ±0.10	2.00 ±0.10	0.305 ±0.02

◆ Reel Specification: (" 7", $\Phi 180$ mm)

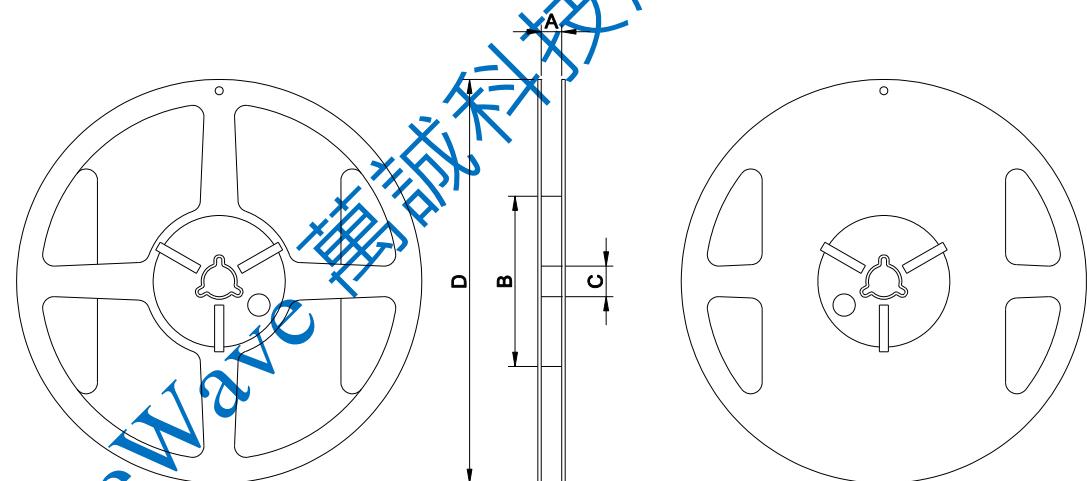

OneWave

Tape Width(mm)	A(mm)	B(mm)	C(mm)	D(mm)	Chip/Reel(pcs)
24	25±0.5	60±1.0	13.5±0.5	178±1.0	1000

7.Storage and Transportation Information

Storage Conditions

To maintain the solderability of terminal electrodes:

1. Temperature and humidity conditions: -10~ 40°C and 30~70% RH.
2. Recommended products should be used within 6 months from the time of delivery.
3. The packaging material should be kept where no chlorine or sulfur exists in the air.

Transportation Conditions

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.