



TEST REPORT

Applicant: Dynanic (Shenzhen) Technology Limited
Address of Applicant: 20th Floor, Building 4, Tianan Cloud Park, Bantian St., Longgang District, Shenzhen, China
Manufacturer/Factory: Dynanic (Shenzhen) Technology Limited
Address of Manufacturer: 20th Floor, Building 4, Tianan Cloud Park, Bantian St., Longgang District, Shenzhen, China
Product Name: Apollo P40 Projector
Model No.: U0320P
Trade Mark: ULTIMEA
FCC ID: 2A900-U0320P
IC: 29805-U0320P
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS 247 Issue 2
Date of Test: February.01, 2023- February.09, 2023
Date of report issued: February.10, 2023
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Remark:

The results shown in this test report refer only to the sample(s) tested , this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:

Project Engineer

Reviewed by:

Project Manager

Approved by:

Authorized Signature



Report Revision History

Report No.	Description	Issue Date
ET-23020042E	Original	February.10, 2023

Contents

	Page
1. TEST SUMMARY	4
2. GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 TEST MODE	7
2.3 DESCRIPTION OF SUPPORT UNITS	7
2.4 DEVIATION FROM STANDARDS.....	7
2.5 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
2.6 TEST FACILITY.....	7
2.7 TEST LOCATION.....	7
2.8 ADDITIONAL INSTRUCTIONS.....	7
3. TEST INSTRUMENTS LIST	8
4. TEST RESULTS AND MEASUREMENT DATA.....	9
4.1 ANTENNA REQUIREMENT	9
4.2 CONDUCTED EMISSIONS	10
4.3 CONDUCTED PEAK OUTPUT POWER	13
4.4 CHANNEL BANDWIDTH.....	15
4.5 POWER SPECTRAL DENSITY.....	19
4.6 BAND EDGES	22
Conducted Emission Method	22
Radiated Emission Method.....	25
4.7 SPURIOUS EMISSION.....	30
Conducted Emission Method	30
Radiated Emission Method.....	35
5. TEST SETUP PHOTO	52
6. EUT CONSTRUCTIONAL DETAILS	52

1. Test Summary

Test Item	Section	Result	Test by
Antenna requirement	FCC part 15.203/15.247 (c) RSS-Gen Issue5	Pass	/
AC Power Line Conducted Emission	FCC part 15.207 RSS-Gen Issue5	Pass	Qiao Li
Conducted Peak Output Power	FCC part 15.247 (b)(3) RSS 247 Issue 2	Pass	Yvan Fan
Channel Bandwidth	FCC part 15.247 (a)(2) RSS 247 Issue 2	Pass	Yvan Fan
Power Spectral Density	FCC part 15.247 (e) RSS 247 Issue 2	Pass	Yvan Fan
Band Edge	FCC part 15.247(d) RSS 247 Issue 2	Pass	Yvan Fan
Spurious Emission	FCC part 15.205/15.209 RSS 247 Issue 2	Pass	Qiao Li

Remark: Test according to ANSI C63.10:2013

Pass: The EUT complies with the essential requirements in the standard.

Measurement Uncertainty

Test Item	Uncertainty Criterion	Measurement Uncertainty	Notes
Occupied Channel Bandwidth	±5%	±0.55%	(1)
RF output power, conducted	±1.5dB	±0.99dB	(1)
Power Spectral Density, conducted	±3dB	±0.61dB	(1)
Unwanted Emissions, conducted	±3dB	±0.64dB	(1)
AC Power Line Conducted Emission	±6dB	± 3.02 dB	(1)
Radiated emissions Below 1GHz	±6dB	±4.30 dB	(1)
Radiated emissions Above 1GHz	±6dB	±4.35 dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

2. General Information

2.1 General Description of EUT

Product Name:	Apollo P40 Projector
Model No.:	U0320P
Test Model:	U0320P
Difference of model(s)	N/A
Hardware version:	JD9269E-YK6 V01 22294
Software version:	U0320P-V1.0
Sample(s) Status	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Integrated antenna
Antenna gain:	1.24dBi(Declare by applicant)
Power supply:	AC 100-220V 50/60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

2.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

2.3 Description of Support Units

None.

2.4 Deviation from Standards

None.

2.5 Abnormalities from Standard Conditions

None.

2.6 Test Facility

Test laboratory:	Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number:	L11864
A2LA Certificate Number:	6640.01
FCC Designation Number:	CN1326
FCC Test Firm Registration:	183064

2.7 Test Location

All tests were performed at:	
Laboratory location:	No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86 755 85259392
Fax:	+86 755 27219460

2.8 Additional Instructions

Test Software	SecureCRT.exe
Power level setup	Default

3. Test Instruments list

Conducted Emission

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI3	100605	2022.3.09	2023.3.08
2	amplifier	EMtrace	RP01A	50117	2022.3.09	2023.3.08
3	Artificial power network	schwarabeck	NSLK8127	8127483	2022.3.09	2023.3.08
4	Artificial power network	ETS	3186/2NM	1132	2022.3.09	2023.3.08
5	10dB attenuator	HUBER+SUHNER	10dB	/	2022.3.09	2023.3.08
6	Cable 4	HUBER SUNNER	3M	/	2022.3.09	2022.3.08
7	Absorbing Clamp	schwarabeck	MDS21	D69250	2022.3.11	2023.3.10

Radiated Emission & RF Conducted test:

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	100605	2022.3.09	2023.3.08
2	Broadband antenna	schwarabeck	VULB9168	1064	2022.3.11	2024.3.10
3	Horn antenna	schwarabeck	BBHA9120D	9120D-1145	2022.3.11	2024.3.10
4	amplifier	EMtrace	RP01A	50117	2022.3.09	2023.3.08
5	amplifier	Space-Dtronics	EWLAN0118G-P40	19113001	2022.3.09	2023.3.08
6	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2022.3.09	2023.3.08
7	Power detector box	MWRFTesT	MW100-PSB	MW201020JYT	2022.11.10	2023.11.09
8	Signal generator	Agilent	N5182A	MY49060455	2022.11.10	2023.11.09
9	Spectrum analyzer	Rohde&schwarz	FSV40	102137	2022.8.21	2023.8.20
10	amplifier	SKET	LNPA_1840-50	SK2019040302	2022.8.22	2023.8.21
11	Horn antenna	schwarabeck	BBHA 9170	946	2022.3.11	2024.3.10
12	Loop antenna	schwarabeck	FMZB 1519 B	1519	2022.3.11	2024.3.10
13	Cable 6	HUBER SUNNER	0.5M	/	2022.3.09	2023.3.08
14	Cable7	HUBER SUNNER	2.0M	/	2022.3.09	2023.3.08
15	Cable8	HUBER SUNNER	6.0M	/	2022.3.09	2023.3.08
16	Cable9	HUBER SUNNER	0.5M	/	2022.8.23	2023.8.22
17	Cable10	HUBER SUNNER	3.0M	/	2022.8.23	2023.8.22

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFTesT	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4. Test results and Measurement Data

4.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c) , RSS-Gen §6.8
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
<i>The antennas are Integrated antenna, the best case gain of the antennas are 1.24 dBi, reference to the appendix II for details</i>	


4.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207 RSS-Gen Issue5						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	150KHz to 30MHz						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.						
Test Instruments:	Refer to section 3.0 for details						
Test mode:	Refer to section 2.2 for details						
Test environment:	Temp.:	23.6°C	Humid.:	57%	Press.:	1012mbar	
Test voltage:	AC 120V, 60Hz						
Test results:	Pass						

Remark: Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.


Measurement data

Line:

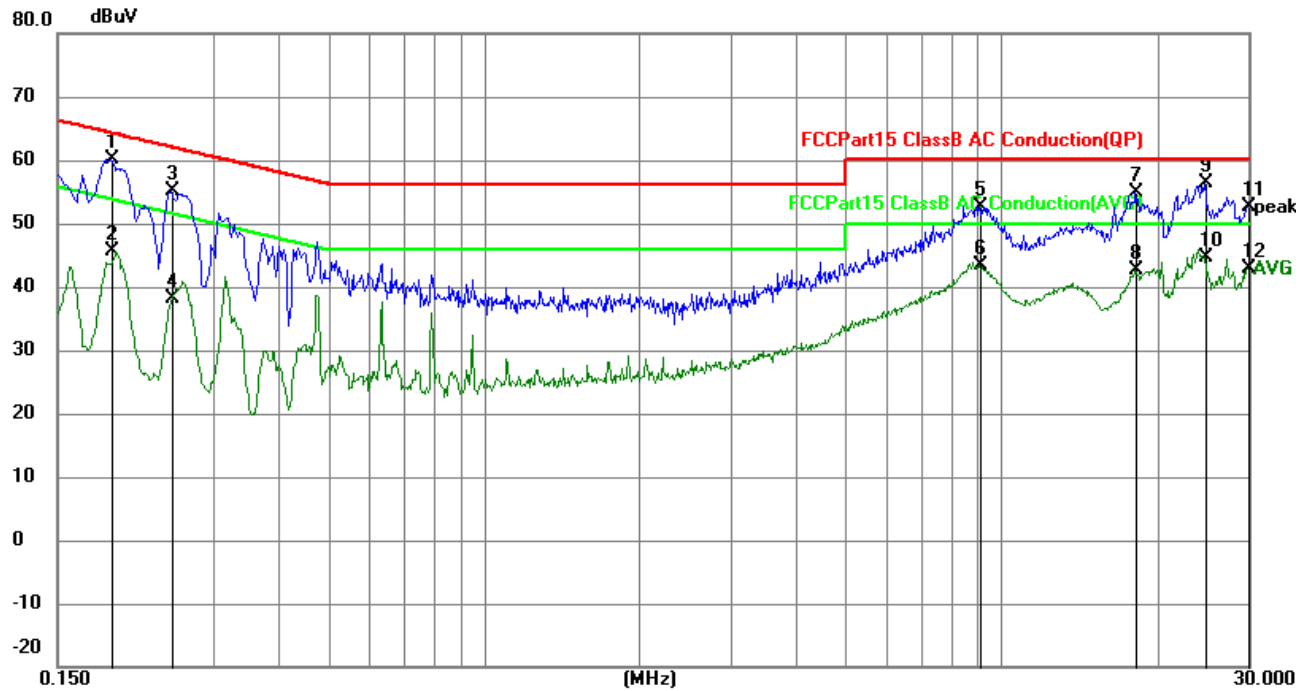

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1905	47.74	12.46	60.20	64.01	-3.81	QP
2	0.1905	33.14	12.46	45.60	54.01	-8.41	AVG
3	0.2490	42.63	12.42	55.05	61.79	-6.74	QP
4	0.2490	25.62	12.42	38.04	51.79	-13.75	AVG
5	9.0735	40.32	12.39	52.71	60.00	-7.29	QP
6	9.0735	30.95	12.39	43.34	50.00	-6.66	AVG
7	18.2040	42.33	12.51	54.84	60.00	-5.16	QP
8	18.2040	30.01	12.51	42.52	50.00	-7.48	AVG
9	24.6615	43.82	12.63	56.45	60.00	-3.55	QP
10	24.6615	32.07	12.63	44.70	50.00	-5.30	AVG
11	29.8725	40.03	12.70	52.73	60.00	-7.27	QP
12	29.8725	30.21	12.70	42.91	50.00	-7.09	AVG

Neutral:

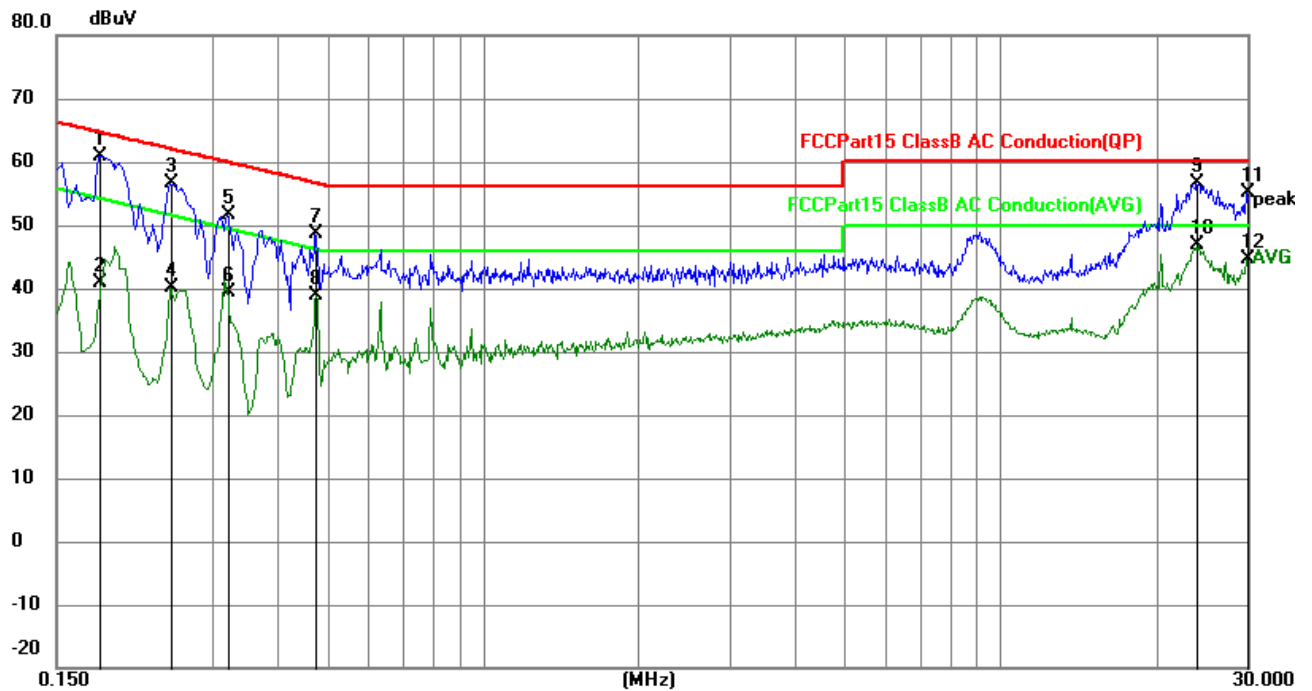


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1814	48.44	12.47	60.91	64.42	-3.51	QP
2	0.1814	28.53	12.47	41.00	54.42	-13.42	AVG
3	0.2489	44.09	12.42	56.51	61.79	-5.28	QP
4	0.2489	27.61	12.42	40.03	51.79	-11.76	AVG
5	0.3209	39.13	12.39	51.52	59.68	-8.16	QP
6	0.3209	26.87	12.39	39.26	49.68	-10.42	AVG
7	0.4737	36.23	12.37	48.60	56.45	-7.85	QP
8	0.4737	26.39	12.37	38.76	46.45	-7.69	AVG
9	23.9862	43.98	12.61	56.59	60.00	-3.41	QP
10	23.9862	34.17	12.61	46.78	50.00	-3.22	AVG
11	29.9175	42.49	12.70	55.19	60.00	-4.81	QP
12	29.9175	31.83	12.70	44.53	50.00	-5.47	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

4.3 Conducted Peak Output Power

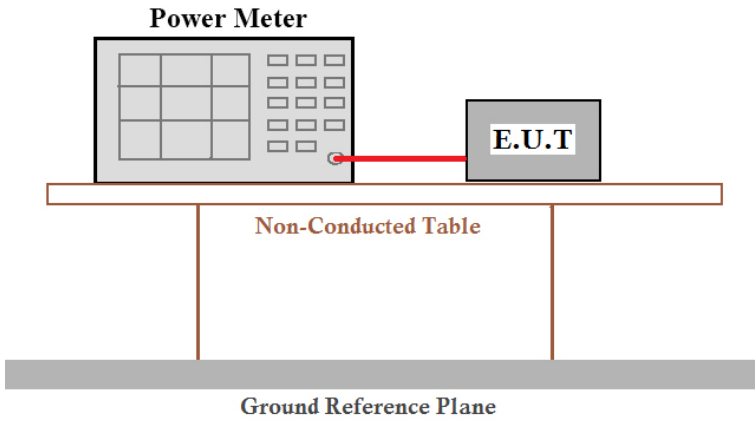Test Requirement :	FCC Part15 C Section 15.247 (b)(3) RSS 247 Issue 2
Test Method :	KDB 558074 D01 15.247 Meas Guidance v05r02
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup. A Power Meter, represented by a rectangular box with a grid of buttons and a display, is connected to an E.U.T. (Equipment Under Test), represented by a smaller rectangular box, via a red cable. Both the Power Meter and the E.U.T. are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick horizontal bar.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass




Measurement Data

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	12.72	13.61	13.47	11.82	30.00	Pass
Middle	12.61	13.21	13.43	11.78		
Highest	12.68	13.36	12.81	11.79		

4

4.4Channel Bandwidth

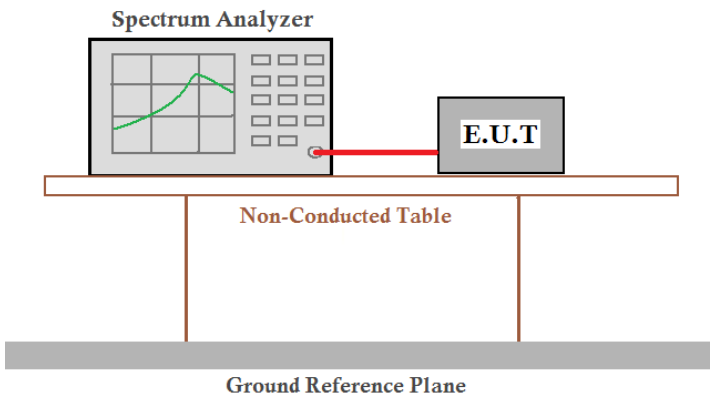Test Requirement :	FCC Part15 C Section 15.247 (a)(2) RSS 247 Issue 2
Test Method :	KDB 558074 D01 15.247 Meas Guidance v05r02
Limit:	>500KHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data

Test CH	-6dB Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	9.57	16.323	17.59	35.709	>500	Pass
Middle	10.052	16.349	17.551	36.319		
Highest	9.093	16.316	17.55	36.32		


Test CH	99% Channel Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	14.791	16.518	17.748	36.163	/	Pass
Middle	14.765	16.555	17.724	36.227		
Highest	14.753	16.534	17.705	36.229		

Test plot as follows:






4.5 Power Spectral Density

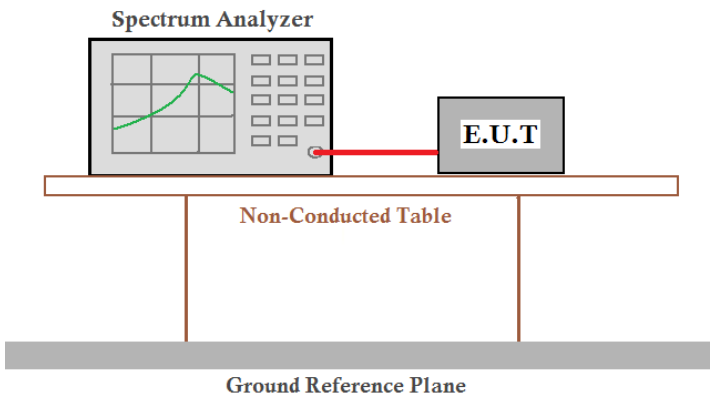
Test Requirement:	FCC Part15 C Section 15.247 (e), RSS-247 §5.2.b RSS 247 Issue 2
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02
Limit:	8dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data

Test CH	Power Spectral Density (dBm/3kHz)				Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-10.863	-17.094	-16.733	-21.324	8.00	Pass
Middle	-10.918	-17.497	-16.78	-21.991		
Highest	-8.536	-17.386	-16.083	-21.485		


Test plot as follows:

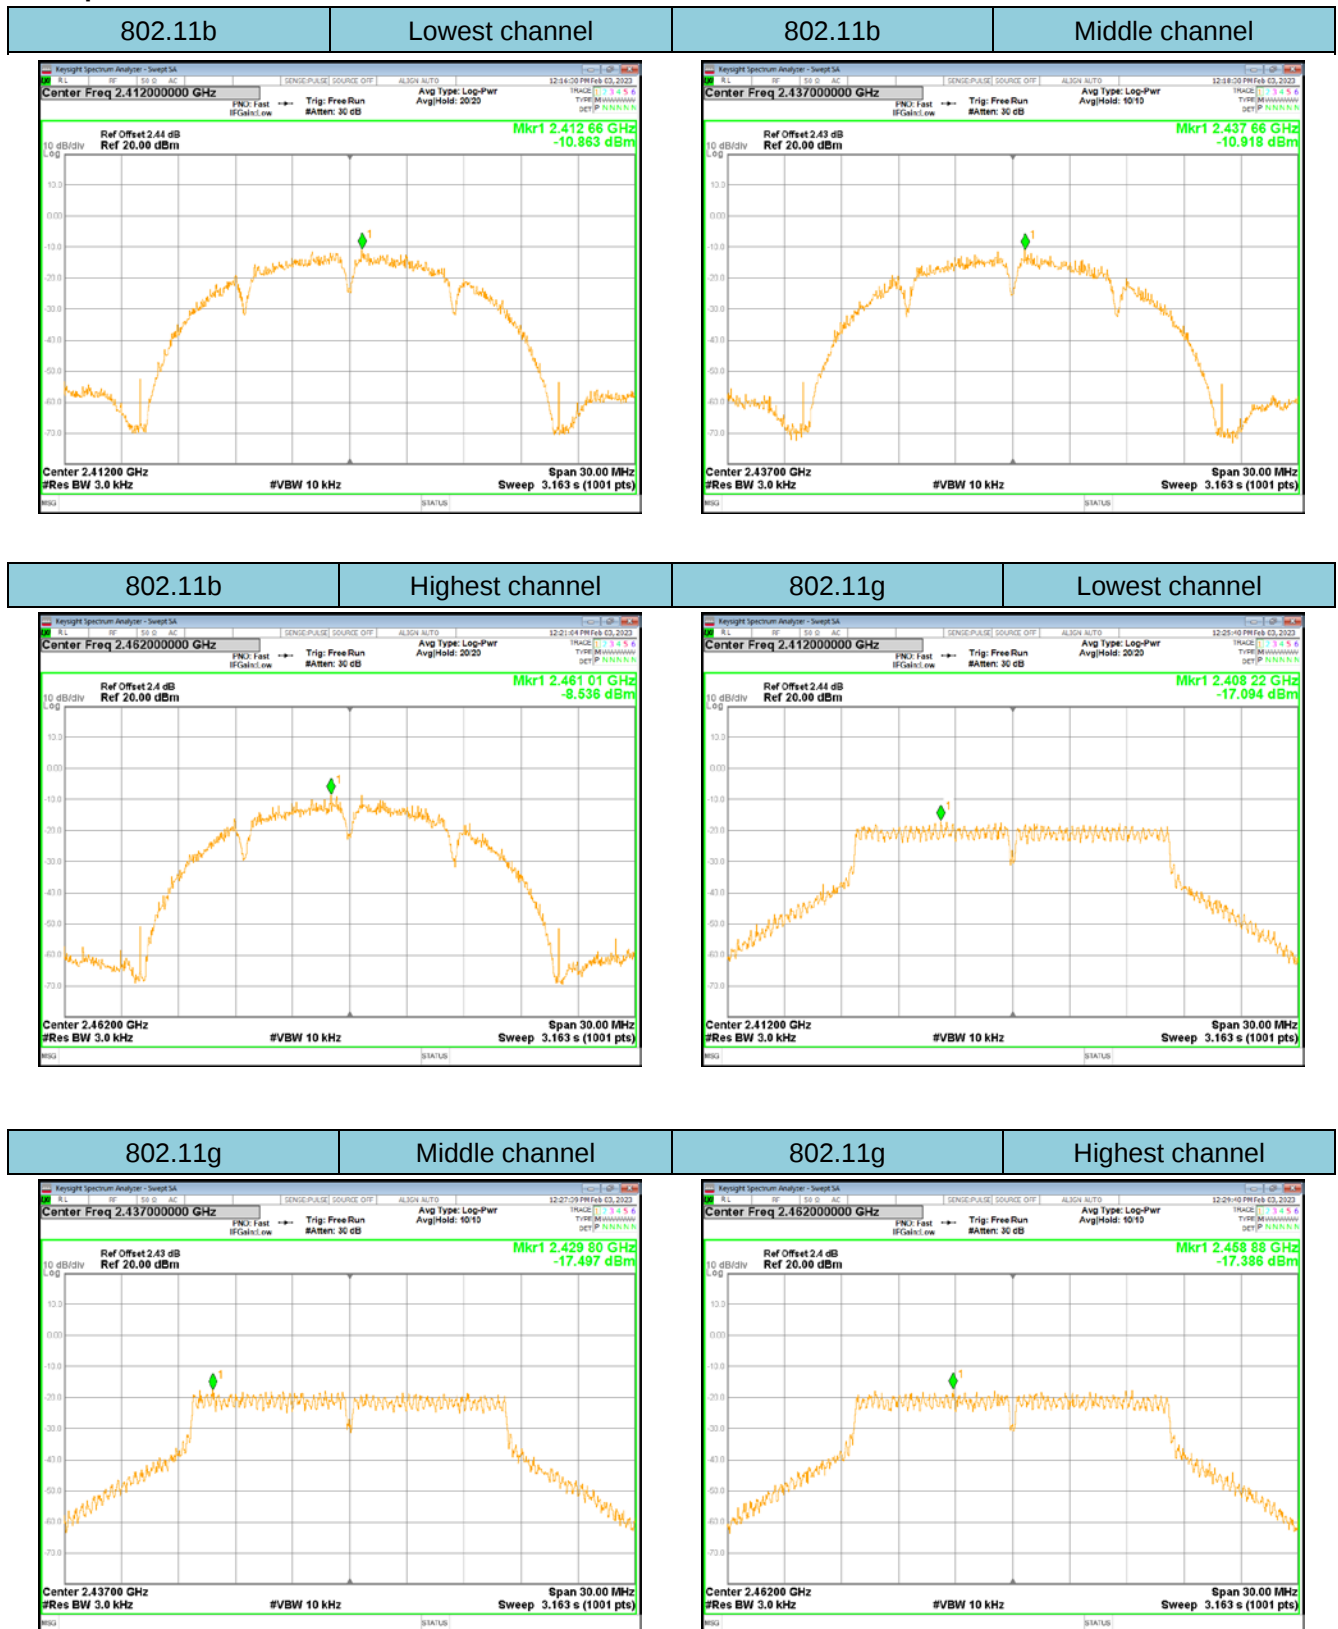

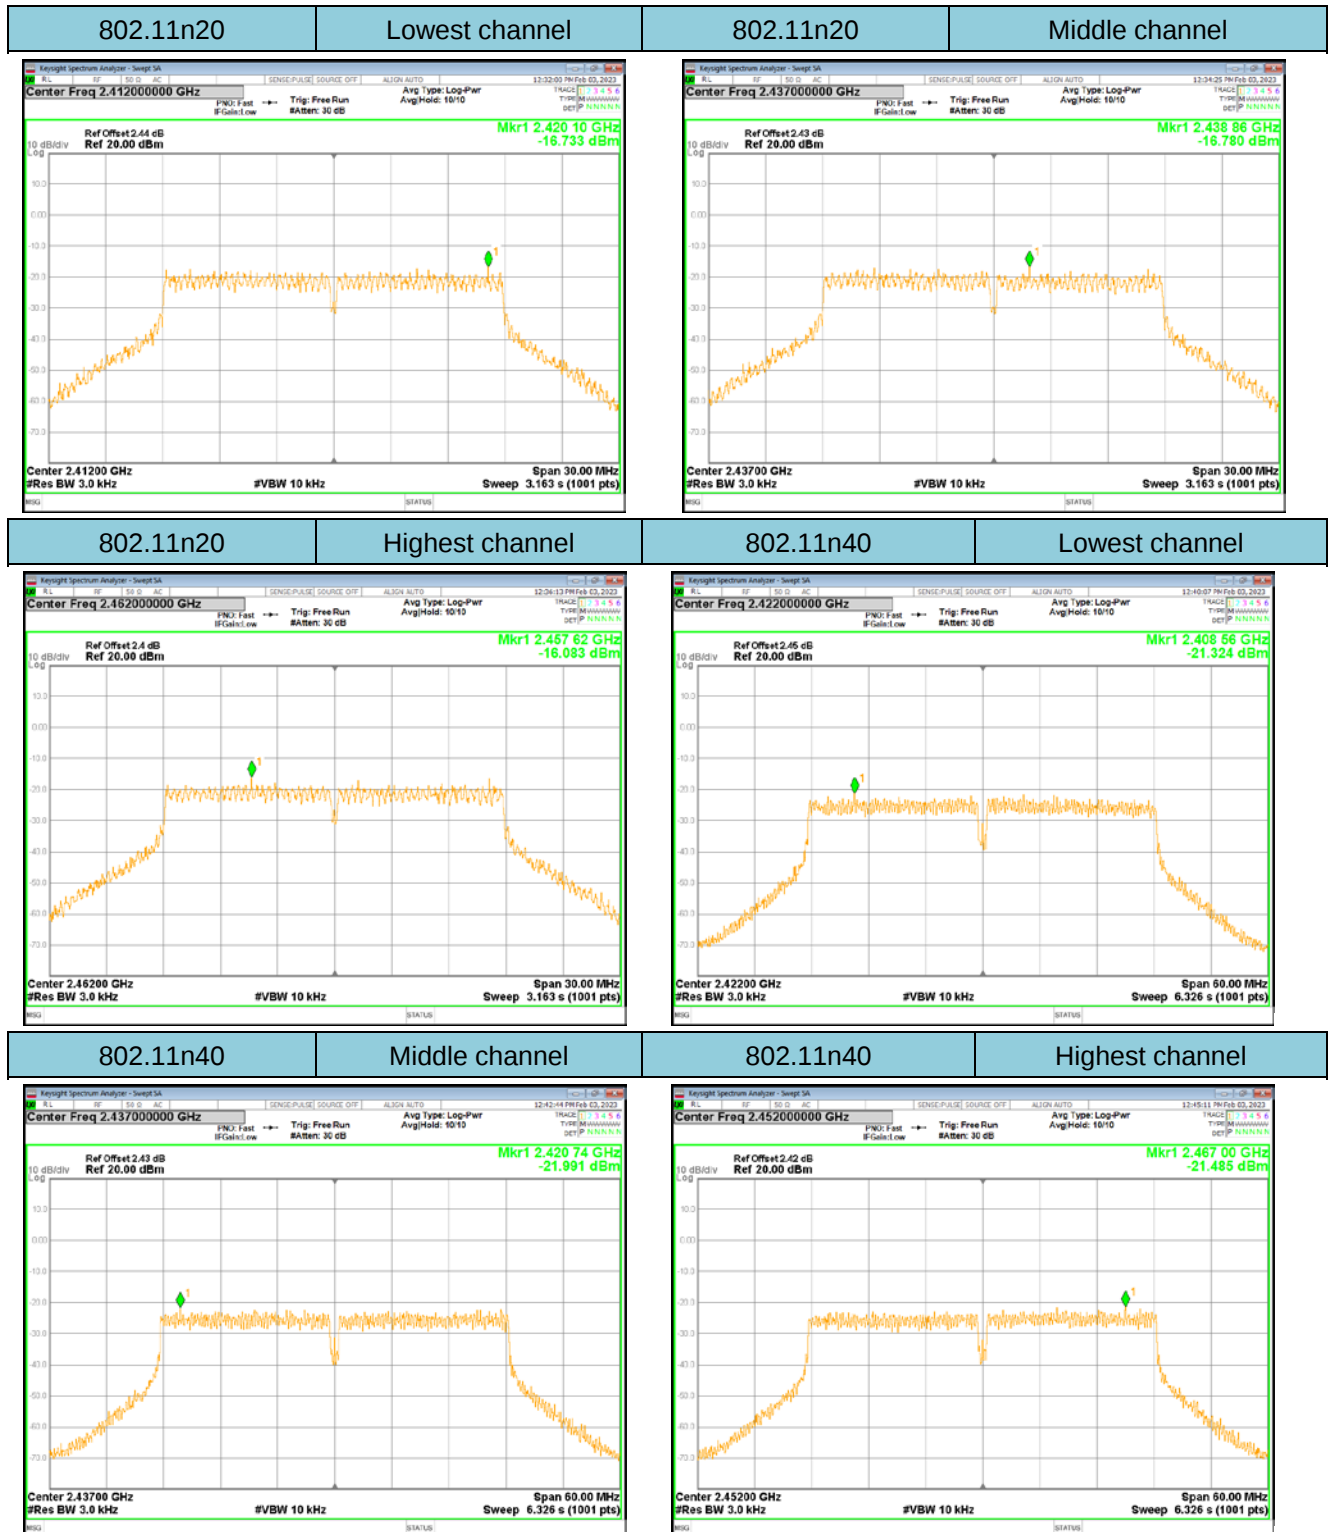

4.6 Band edges


Conducted Emission Method

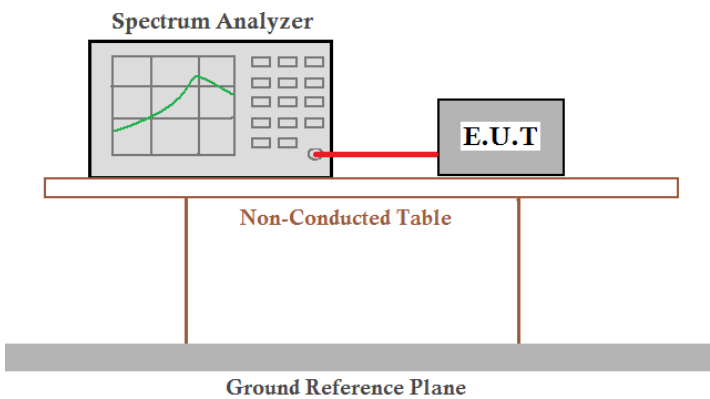Test Requirement:	FCC Part15 C Section 15.247 (d), RSS-247 §5.2.b RSS 247 Issue 2
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass


Test plot as follows:

Test mode:

802.11b

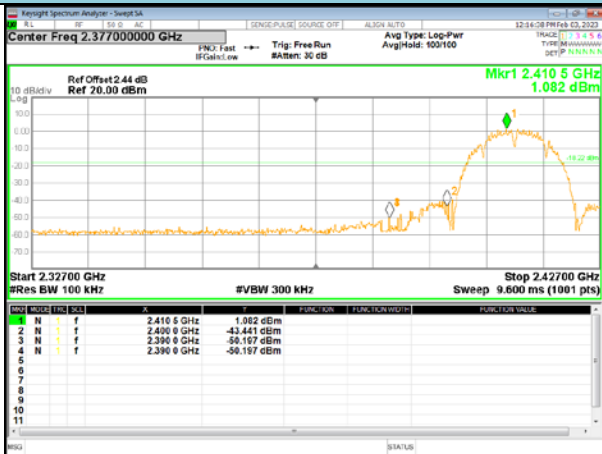


Lowest channel

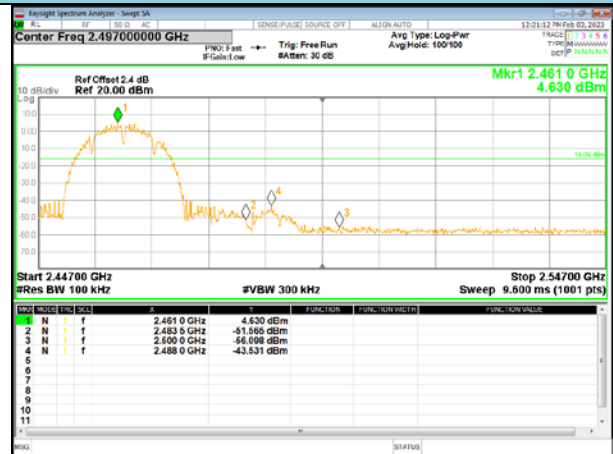


Highest channel

Test mode:

802.11g

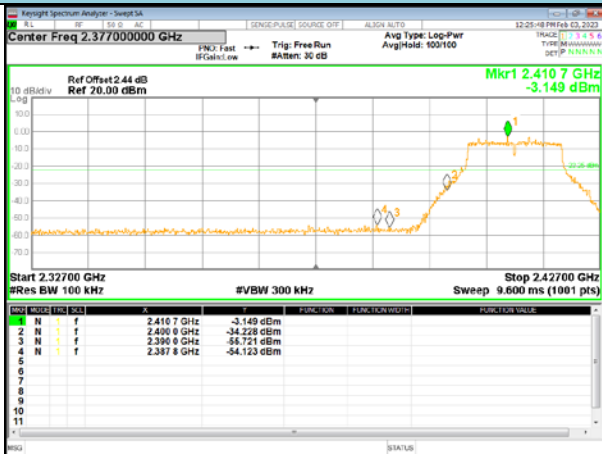


Lowest channel

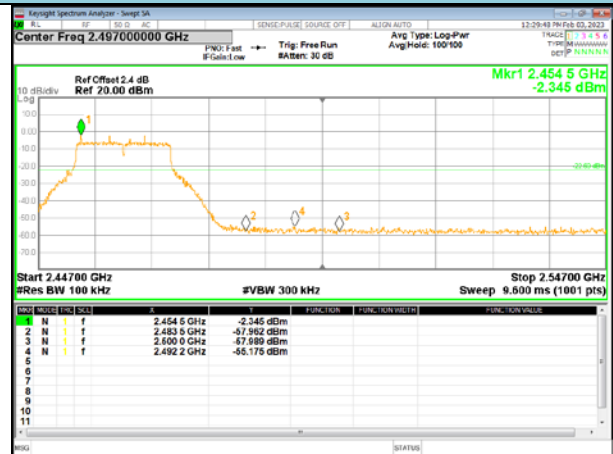


Highest channel

Test mode: 802.11n20

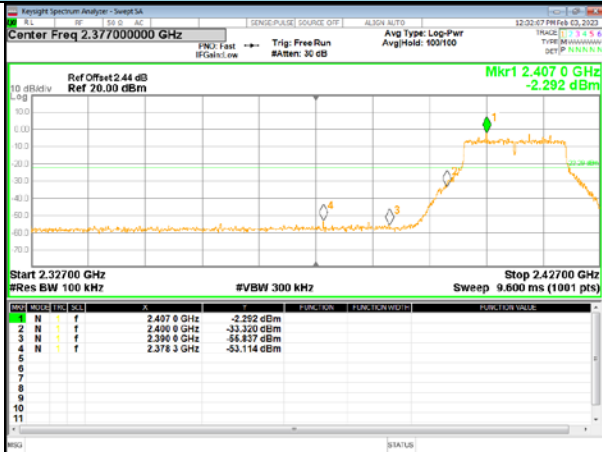


Lowest channel

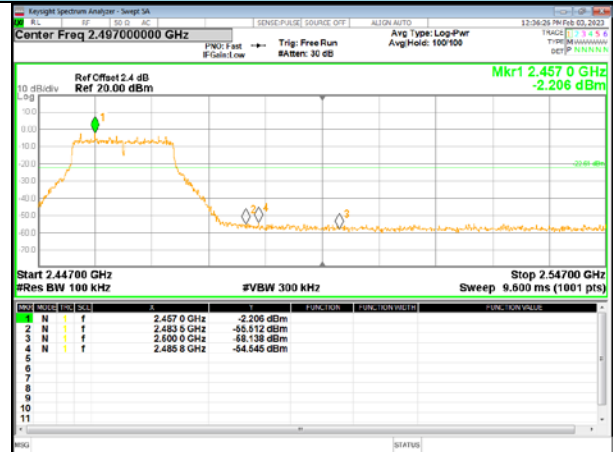


Highest channel

Test mode: 802.11n40

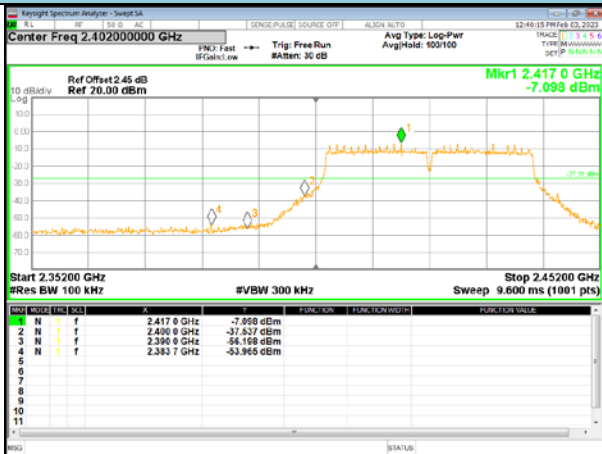


Lowest channel

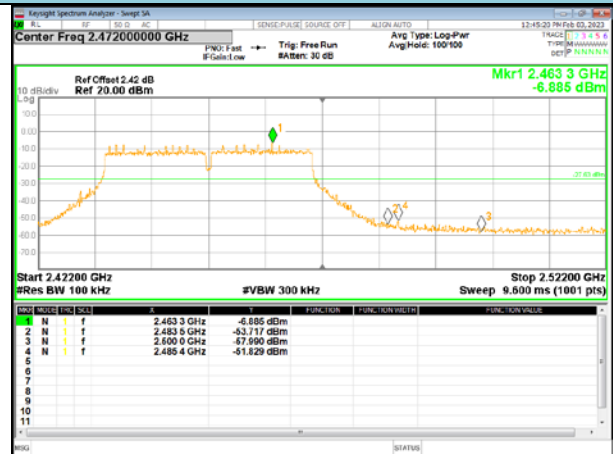

Highest channel

Radiated Emission Method

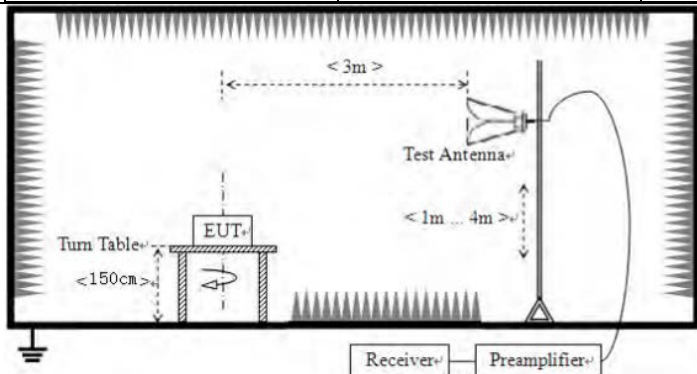Test Requirement:	FCC Part15 C Section 15.209 and 15.205, RSS-Gen §8.9 §8.10 RSS 247 Issue 2				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.				
Test Instruments:	Refer to section 3.0 for details				
Test mode:	Refer to section 2.2 for details				
Test results:	Pass				

Measurement data:

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	67.16	27.4	3.43	45.4	52.59	74	-21.41	Horizontal
2390.00	68.94	27.1	3.43	45.4	54.07	74	-19.93	Horizontal
2310.00	65.59	27.4	3.43	45.4	51.02	74	-22.98	Vertical
2390.00	64.21	27.1	3.43	45.4	49.34	74	-24.66	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	54.98	27.4	3.43	45.4	40.41	74	-33.59	Horizontal
2390.00	54.64	27.1	3.43	45.4	39.77	74	-34.23	Horizontal
2310.00	51.93	27.4	3.43	45.4	37.36	74	-36.64	Vertical
2390.00	55.70	27.1	3.43	45.4	40.83	74	-33.17	Vertical

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	66.50	27.8	3.56	45.4	52.46	74	-21.54	Horizontal
2500.00	67.24	27.8	3.56	45.4	53.20	74	-20.80	Horizontal
2483.50	66.45	27.8	3.56	45.4	52.41	74	-21.59	Vertical
2500.00	67.07	27.8	3.56	45.4	53.03	74	-20.97	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	58.27	27.8	3.56	45.4	44.23	74	-29.77	Horizontal
2500.00	52.51	27.8	3.56	45.4	38.47	74	-35.53	Horizontal
2483.50	58.97	27.8	3.56	45.4	44.93	74	-29.07	Vertical
2500.00	55.59	27.8	3.56	45.4	41.55	74	-32.45	Vertical

Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	64.09	27.4	3.43	45.4	49.52	74	64.09	Horizontal
2390.00	64.18	27.1	3.43	45.4	49.31	74	64.18	Horizontal
2310.00	69.31	27.4	3.43	45.4	54.74	74	69.31	Vertical
2390.00	69.23	27.1	3.43	45.4	54.36	74	69.23	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	52.16	27.4	3.43	45.4	37.59	74	52.16	Horizontal
2390.00	55.55	27.1	3.43	45.4	40.68	74	55.55	Horizontal
2310.00	58.29	27.4	3.43	45.4	43.72	74	58.29	Vertical
2390.00	60.72	27.1	3.43	45.4	45.85	74	60.72	Vertical

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	66.77	27.8	3.56	45.4	52.73	74	-21.27	Horizontal
2500.00	68.38	27.8	3.56	45.4	54.34	74	-19.66	Horizontal
2483.50	70.12	27.8	3.56	45.4	56.08	74	-17.92	Vertical
2500.00	67.10	27.8	3.56	45.4	53.06	74	-20.94	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	57.02	27.8	3.56	45.4	42.98	74	-31.02	Horizontal
2500.00	57.41	27.8	3.56	45.4	43.37	74	-30.63	Horizontal
2483.50	59.38	27.8	3.56	45.4	45.34	74	-28.66	Vertical
2500.00	55.62	27.8	3.56	45.4	41.58	74	-32.42	Vertical

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	60.60	27.4	3.43	45.4	46.03	74	-27.97	Horizontal
2390.00	65.15	27.1	3.43	45.4	50.28	74	-23.72	Horizontal
2310.00	62.59	27.4	3.43	45.4	48.02	74	-25.98	Vertical
2390.00	61.99	27.1	3.43	45.4	47.12	74	-26.88	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	55.05	27.4	3.43	45.4	40.48	74	-33.52	Horizontal
2390.00	51.87	27.1	3.43	45.4	37.00	74	-37.00	Horizontal
2310.00	51.31	27.4	3.43	45.4	36.74	74	-37.26	Vertical
2390.00	51.00	27.1	3.43	45.4	36.13	74	-37.87	Vertical

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	67.43	27.8	3.56	45.4	53.39	74	-20.61	Horizontal
2500.00	70.36	27.8	3.56	45.4	56.32	74	-17.68	Horizontal
2483.50	64.40	27.8	3.56	45.4	50.36	74	-23.64	Vertical
2500.00	65.75	27.8	3.56	45.4	51.71	74	-22.29	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	55.08	27.8	3.56	45.4	41.04	74	-32.96	Horizontal
2500.00	58.02	27.8	3.56	45.4	43.98	74	-30.02	Horizontal
2483.50	50.99	27.8	3.56	45.4	36.95	74	-37.05	Vertical
2500.00	58.93	27.8	3.56	45.4	44.89	74	-29.11	Vertical

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	70.20	27.4	3.43	45.4	55.63	74	-18.37	Horizontal
2390.00	62.59	27.1	3.43	45.4	47.72	74	-26.28	Horizontal
2310.00	68.28	27.4	3.43	45.4	53.71	74	-20.29	Vertical
2390.00	62.76	27.1	3.43	45.4	47.89	74	-26.11	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	55.96	27.4	3.43	45.4	41.39	74	-32.61	Horizontal
2390.00	56.94	27.1	3.43	45.4	42.07	74	-31.93	Horizontal
2310.00	56.65	27.4	3.43	45.4	42.08	74	-31.92	Vertical
2390.00	50.44	27.1	3.43	45.4	35.57	74	-38.43	Vertical

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	68.72	27.8	3.56	45.4	54.68	74	-19.32	Horizontal
2500.00	63.96	27.8	3.56	45.4	49.92	74	-24.08	Horizontal
2483.50	67.17	27.8	3.56	45.4	53.13	74	-20.87	Vertical
2500.00	65.72	27.8	3.56	45.4	51.68	74	-22.32	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	59.35	27.8	3.56	45.4	45.31	74	-28.69	Horizontal
2500.00	59.50	27.8	3.56	45.4	45.46	74	-28.54	Horizontal
2483.50	50.81	27.8	3.56	45.4	36.77	74	-37.23	Vertical
2500.00	50.46	27.8	3.56	45.4	36.42	74	-37.58	Vertical

Remarks:

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

4.7 Spurious Emission

Conducted Emission Method


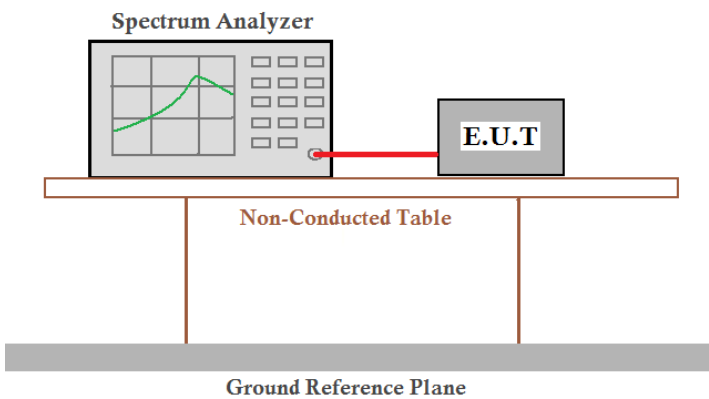
Test Requirement:	FCC Part15 C Section 15.247 (d), RSS-Gen §8.9 §8.10 RSS 247 Issue 2
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remark: /

Test plot as follows:



802.11b

Lowest channel

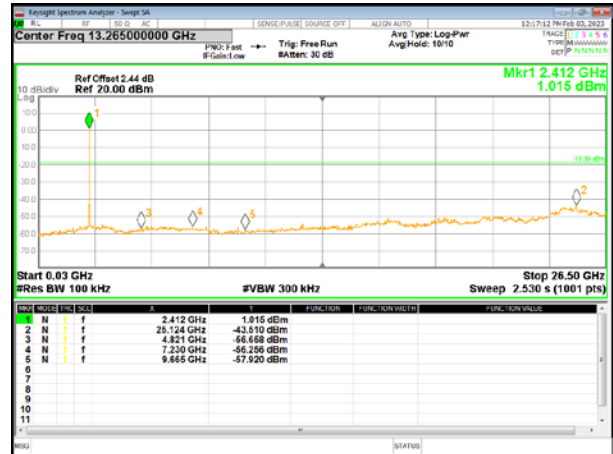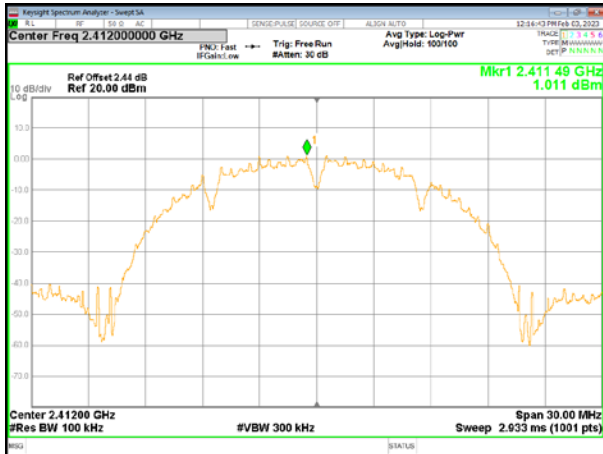



30MHz~25GHz

Middle channel

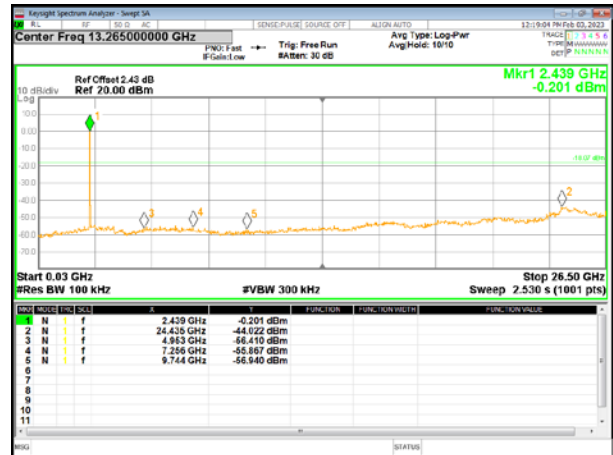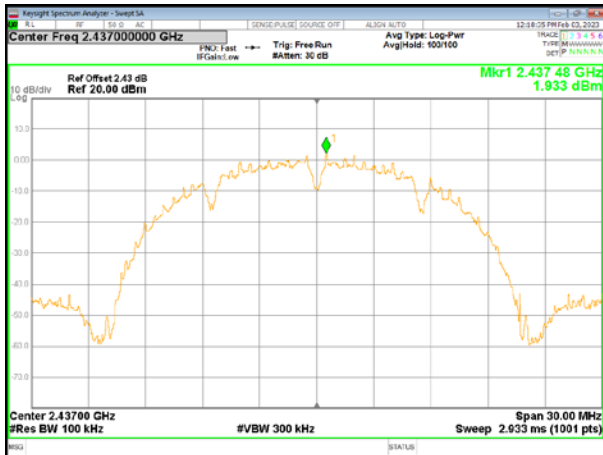

30MHz~25GHz

Highest channel

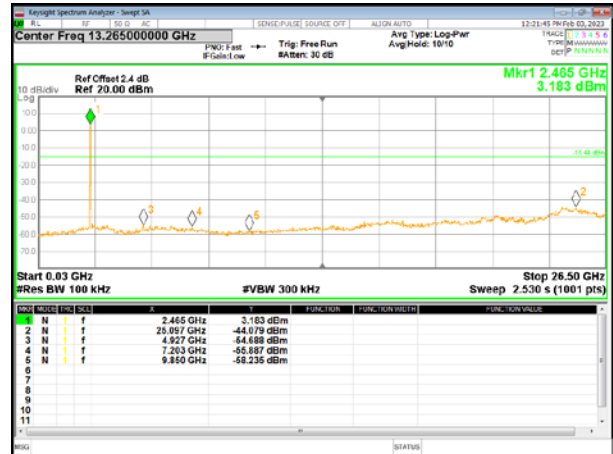
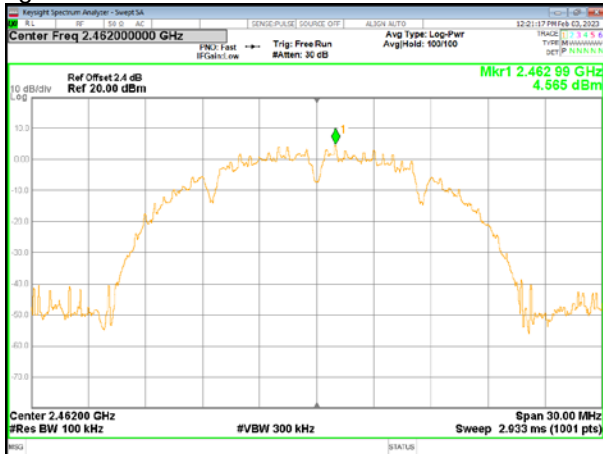


30MHz~25GHz





802.11g

Lowest channel

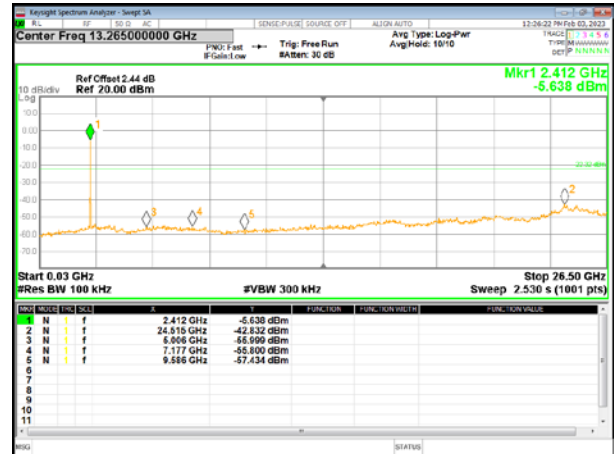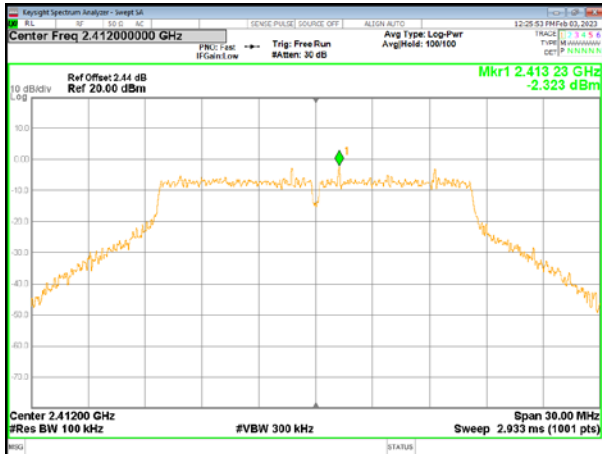



30MHz~25GHz

Middle channel

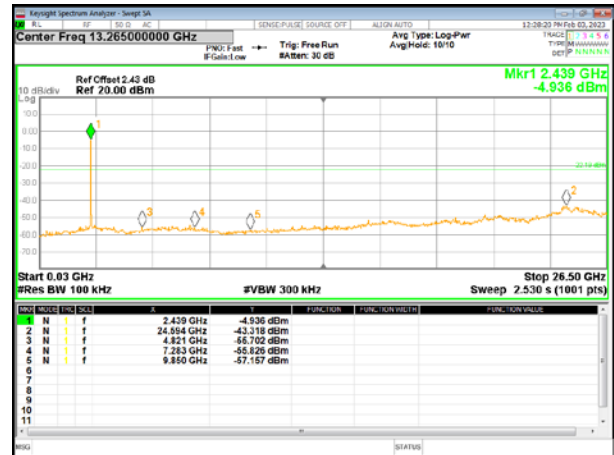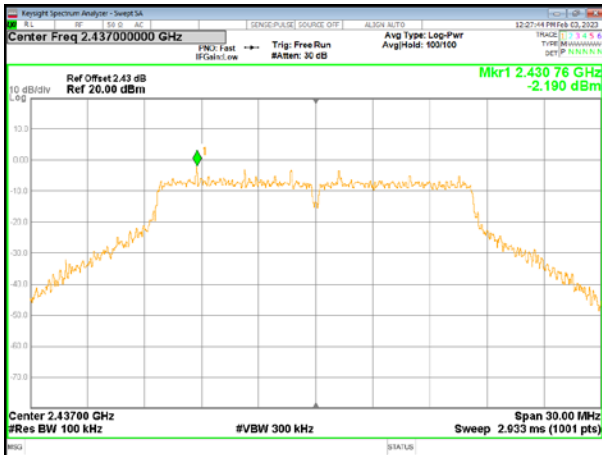

30MHz~25GHz



Highest channel

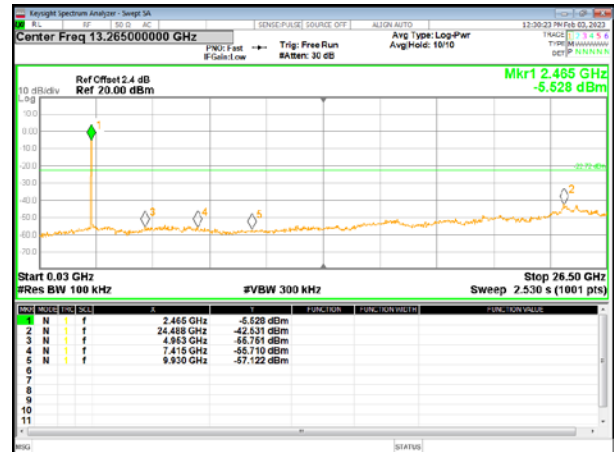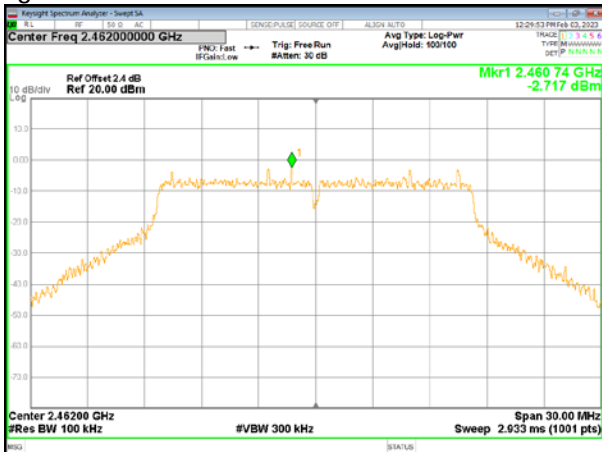

30MHz~25GHz



802.11n20

Lowest channel

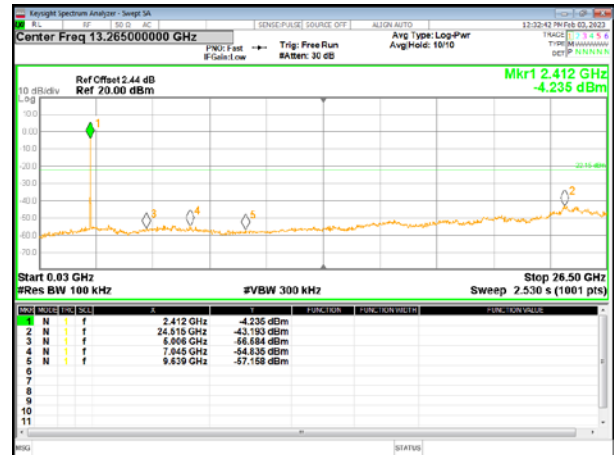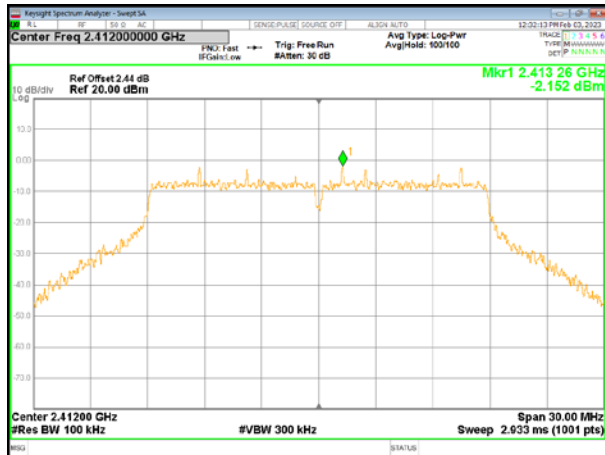



30MHz~25GHz

Middle channel

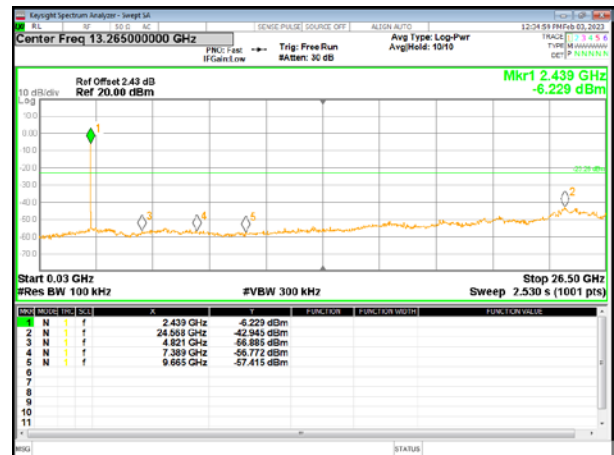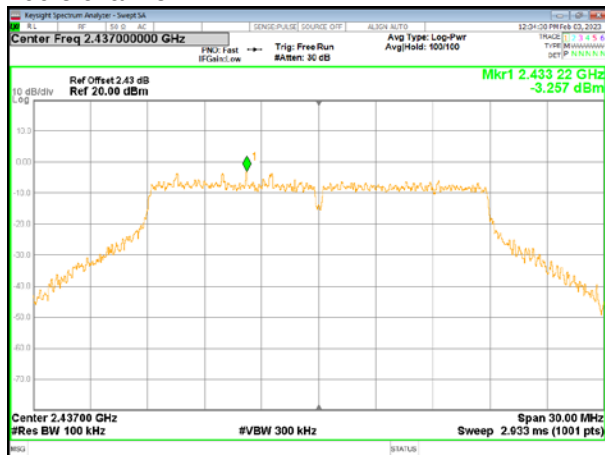

30MHz~25GHz



Highest channel

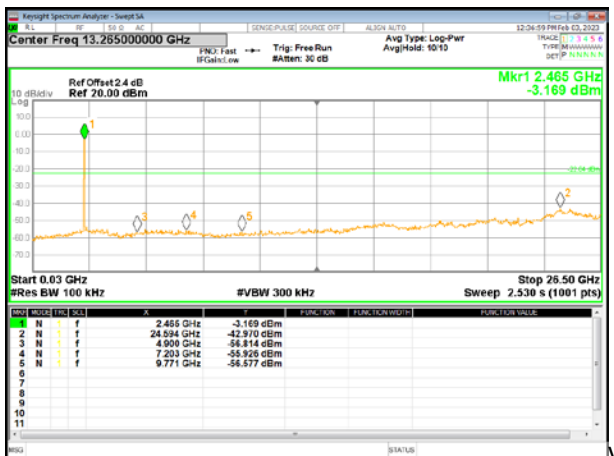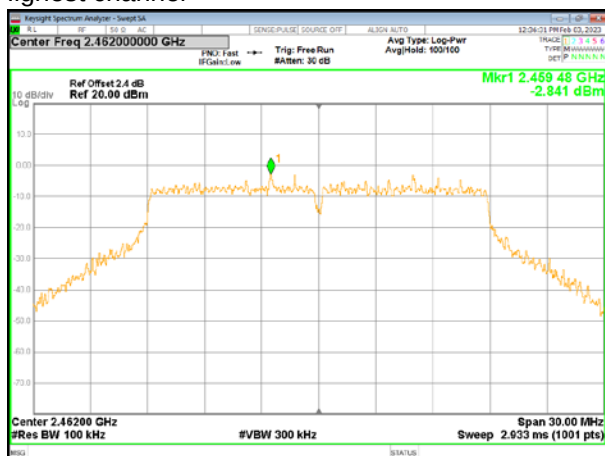

30MHz~25GHz



802.11n40

Lowest channel

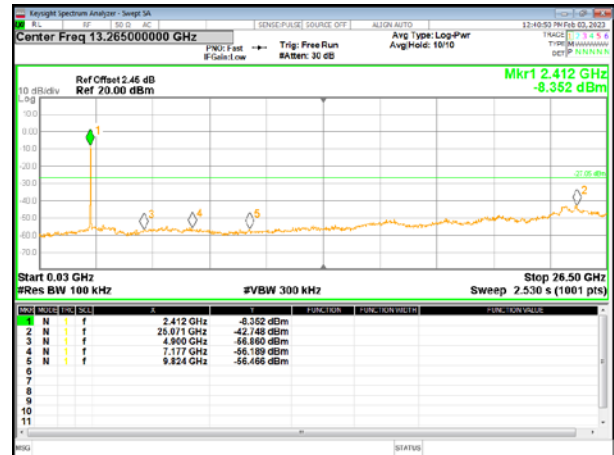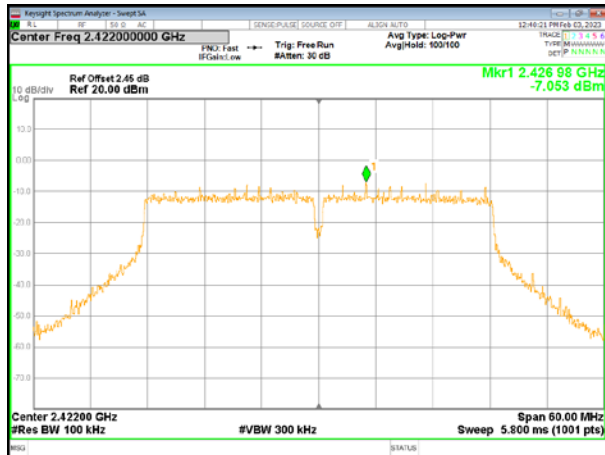



30MHz~25GHz

Middle channel

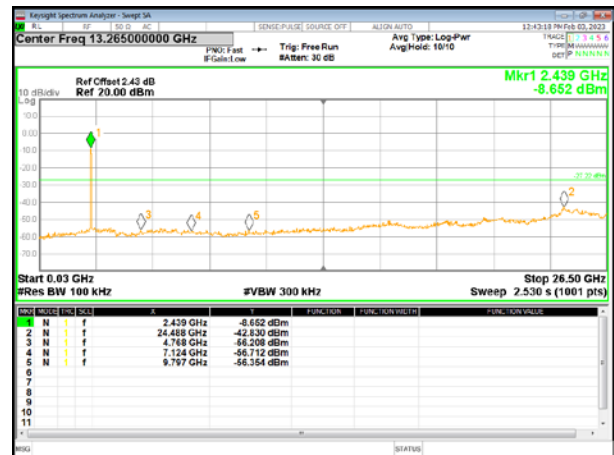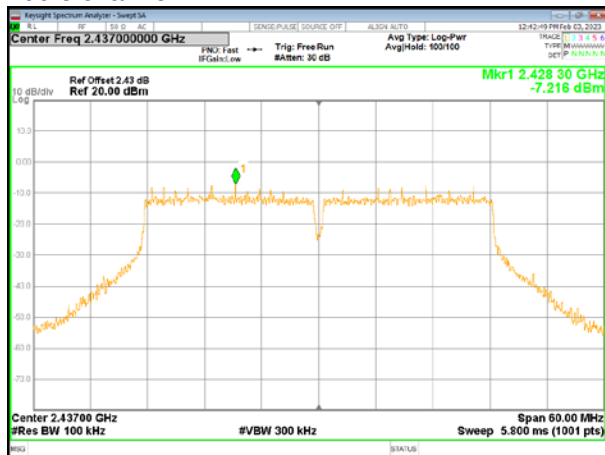


30MHz~25GHz



Highest channel

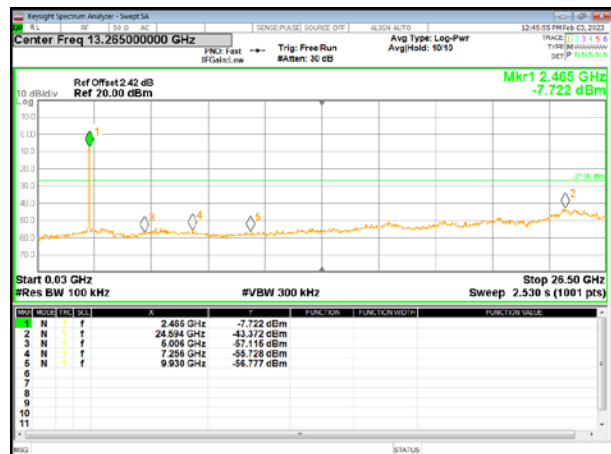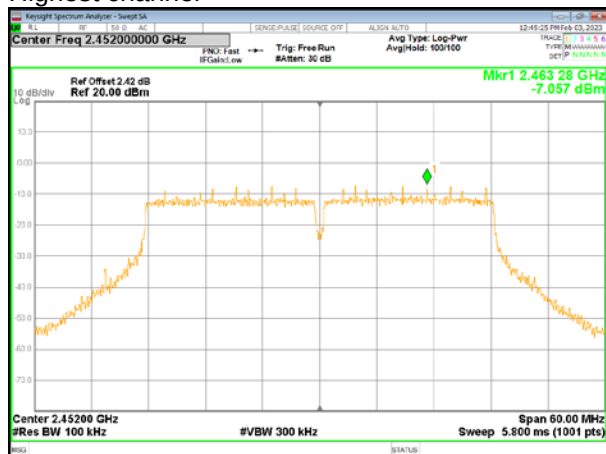

30MHz~25GHz

Radiated Emission Method

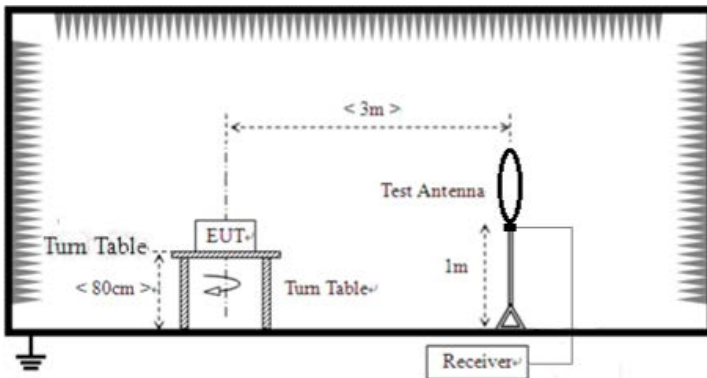Test Requirement:	FCC Part15 C Section 15.209 , RSS-Gen §8.9 §8.10 RSS 247 Issue 2				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
For radiated emissions from 30MHz to1GHz					

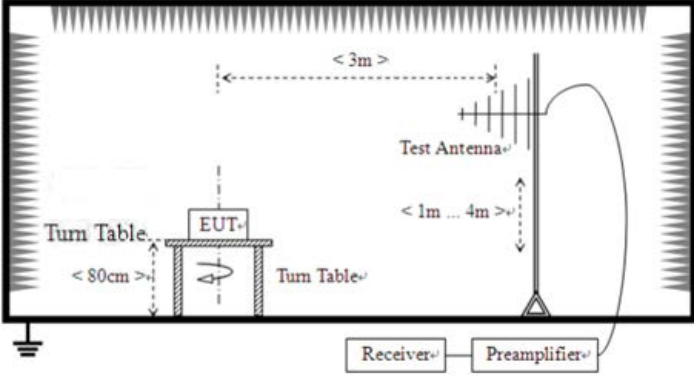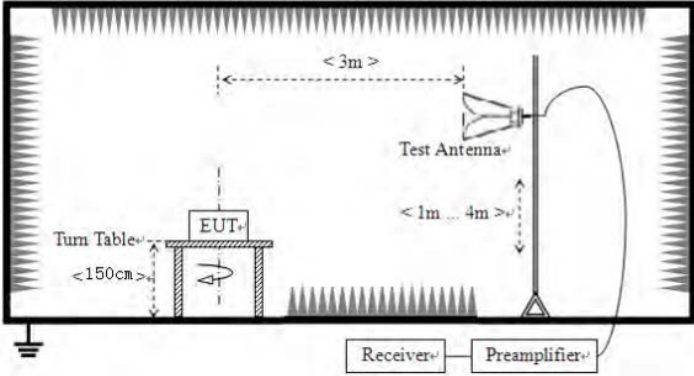	 For radiated emissions above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details



Test environment:	Temp.:	25.6 °C	Humid.:	55%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remarks:

- 1. The report only shows the worst mode (802.11n20)*
- 2. Pre-scan all kind of the place mode (X-axis, Y-(axis, Z-axis), and found the Y-axis which it is worse case.*

Measurement data:


■ **9kHz~30MHz**

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

■ Below 1GHz

Vertical:


80.0 dBuV/m

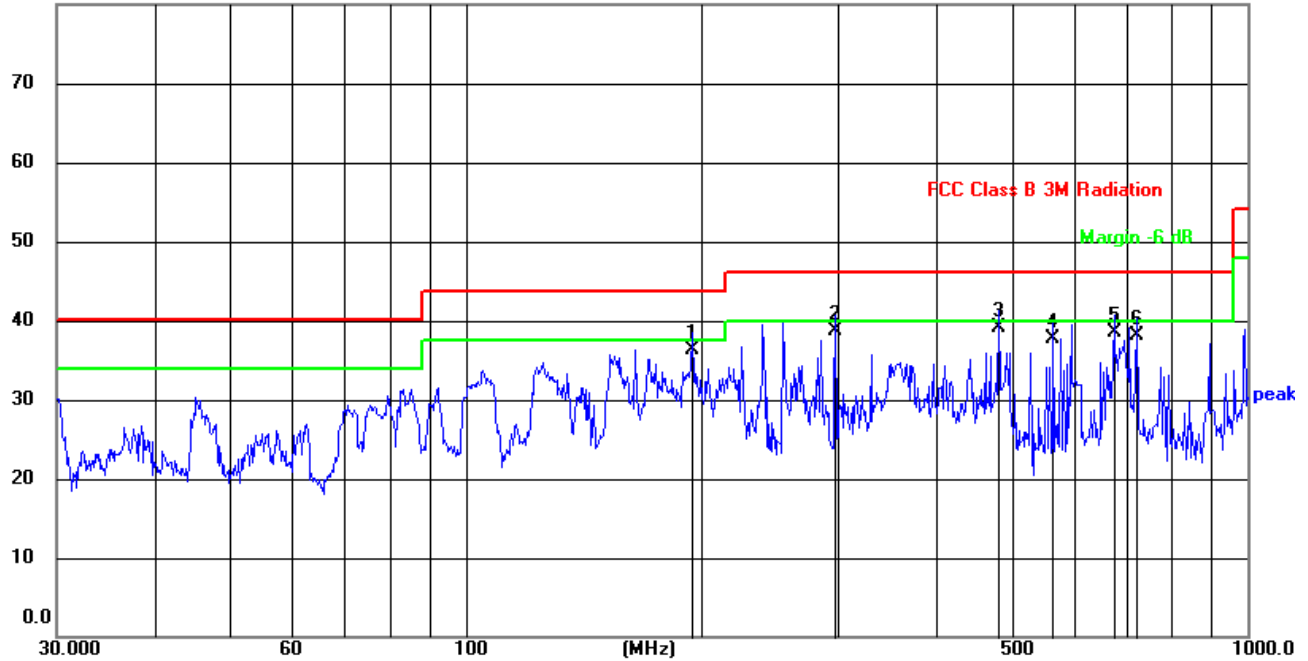

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	195.1363	55.09	-18.69	36.40	43.50	-7.10	QP
2	297.2238	56.69	-17.99	38.70	46.00	-7.30	QP
3	480.5276	53.37	-14.17	39.20	46.00	-6.80	QP
4	564.6387	49.82	-12.12	37.70	46.00	-8.30	QP
5	675.2078	47.97	-9.37	38.60	46.00	-7.40	QP
6	721.7258	46.81	-8.61	38.20	46.00	-7.80	QP

Horizontal:

80.0 dBuV/m

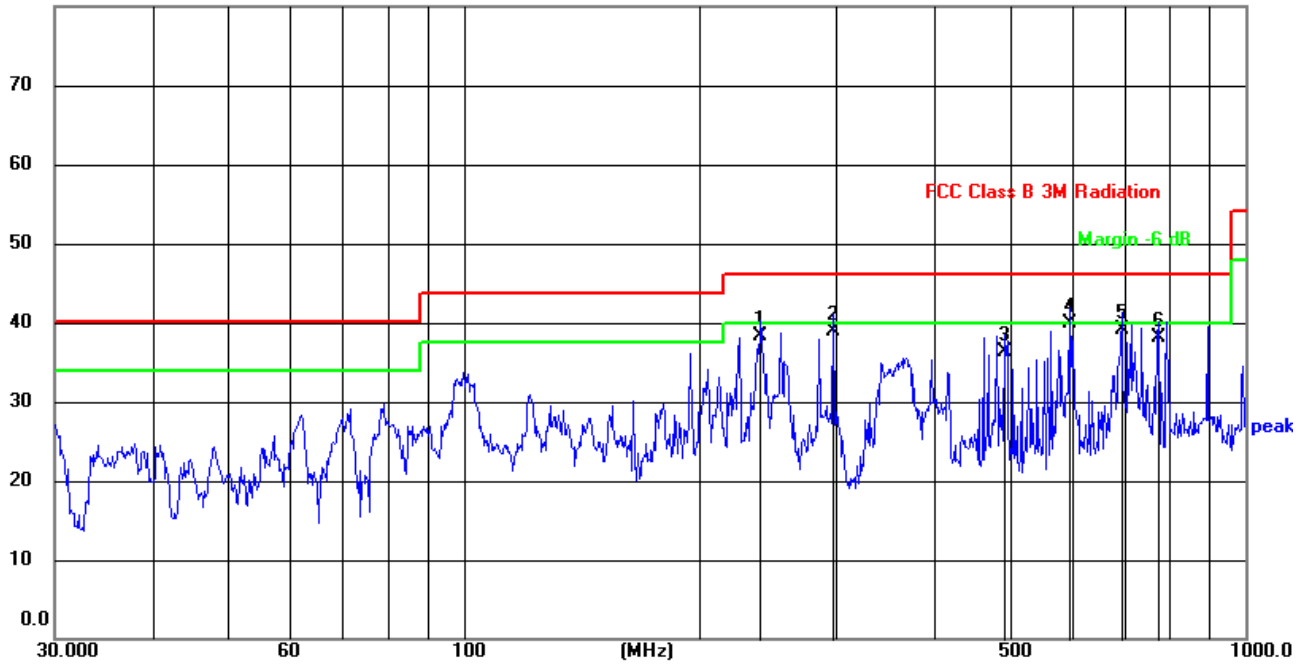

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	239.9873	56.66	-18.36	38.30	46.00	-7.70	QP
2	297.2240	57.40	-18.50	38.90	46.00	-7.10	QP
3	492.4685	50.31	-13.91	36.40	46.00	-9.60	QP
4	595.1327	50.31	-10.41	39.90	46.00	-6.10	QP
5	694.4174	48.40	-9.20	39.20	46.00	-6.80	QP
6	774.1584	45.91	-7.81	38.10	46.00	-7.90	QP

Remarks:

Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Factor - Preamplifier Factor

■ Above 1GHz

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	54.23	32.1	5.96	45.5	46.79	74.00	-27.21	Vertical
7236.00	53.48	36.6	6.93	45.6	51.41	74.00	-22.59	Vertical
9648.00	58.52	38.6	8.02	46.2	58.94	74.00	-15.06	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	54.47	32.1	5.96	45.5	47.03	74.00	-26.97	Horizontal
7236.00	56.04	36.6	6.93	45.6	53.97	74.00	-20.03	Horizontal
9648.00	55.34	38.6	8.02	46.2	55.76	74.00	-18.24	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	48.99	32.1	5.96	45.5	41.55	54.00	-12.45	Vertical
7236.00	48.39	36.6	6.93	45.6	46.32	54.00	-7.68	Vertical
9648.00	45.26	38.6	8.02	46.2	45.68	54.00	-8.32	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	47.71	32.1	5.96	45.5	40.27	54.00	-13.73	Horizontal
7236.00	48.24	36.6	6.93	45.6	46.17	54.00	-7.83	Horizontal
9648.00	47.11	38.6	8.02	46.2	47.53	54.00	-6.47	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	55.75	32.40	5.96	45.5	48.61	74.00	-25.39	Vertical
7311.00	53.33	36.60	6.93	45.6	51.26	74.00	-22.74	Vertical
9748.00	55.03	38.00	8.02	46.2	54.85	74.00	-19.15	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	56.53	32.40	5.96	45.5	49.39	74.00	-24.61	Horizontal
7311.00	58.30	36.60	6.93	45.6	56.23	74.00	-17.77	Horizontal
9748.00	56.68	38.00	8.02	46.2	56.50	74.00	-17.50	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	43.16	32.40	5.96	45.5	36.02	54.00	-17.98	Vertical
7311.00	45.18	36.60	6.93	45.6	43.11	54.00	-10.89	Vertical
9748.00	43.59	38.000	8.02	46.2	43.41	54.00	-10.59	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	47.36	32.40	5.96	45.5	40.22	54.00	-13.78	Horizontal
7311.00	43.37	36.60	6.93	45.6	41.30	54.00	-12.70	Horizontal
9748.00	44.33	38.000	8.02	46.2	44.15	54.00	-9.85	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	53.33	32.8	5.96	45.7	46.39	74.00	-27.61	Vertical
7386.00	54.39	36.4	6.93	45.8	51.92	74.00	-22.08	Vertical
9848.00	56.64	38.2	8.02	46.2	56.66	74.00	-17.34	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	57.87	32.8	5.96	45.7	50.93	74.00	-23.07	Horizontal
7386.00	55.03	36.4	6.93	45.8	52.56	74.00	-21.44	Horizontal
9848.00	53.08	38.2	8.02	46.2	53.10	74.00	-20.90	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	46.70	32.8	5.96	45.7	39.76	54.00	-14.24	Vertical
7386.00	46.57	36.4	6.93	45.8	44.10	54.00	-9.90	Vertical
9848.00	45.37	38.2	8.02	46.2	45.39	54.00	-8.61	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	44.60	32.8	5.96	45.7	37.66	54.00	-16.34	Horizontal
7386.00	44.04	36.4	6.93	45.8	41.57	54.00	-12.43	Horizontal
9848.00	45.54	38.2	8.02	46.2	45.56	54.00	-8.44	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.

Test mode:	802.11g	Test channel:	lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	56.95	32.1	5.96	45.5	49.51	74.00	-24.49	Vertical
7236.00	58.22	36.6	6.93	45.6	56.15	74.00	-17.85	Vertical
9648.00	54.12	38.6	8.02	46.2	54.54	74.00	-19.46	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	57.57	32.1	5.96	45.5	50.13	74.00	-23.87	Horizontal
7236.00	54.02	36.6	6.93	45.6	51.95	74.00	-22.05	Horizontal
9648.00	57.23	38.6	8.02	46.2	57.65	74.00	-16.35	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	46.67	32.1	5.96	45.5	39.23	54.00	-14.77	Vertical
7236.00	44.54	36.6	6.93	45.6	42.47	54.00	-11.53	Vertical
9648.00	43.61	38.6	8.02	46.2	44.03	54.00	-9.97	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	43.78	32.1	5.96	45.5	36.34	54.00	-17.66	Horizontal
7236.00	46.95	36.6	6.93	45.6	44.88	54.00	-9.12	Horizontal
9648.00	43.81	38.6	8.02	46.2	44.23	54.00	-9.77	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.

Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	53.61	32.40	5.96	45.5	46.47	74.00	-27.53	Vertical
7311.00	58.35	36.60	6.93	45.6	56.28	74.00	-17.72	Vertical
9748.00	53.50	38.00	8.02	46.2	53.32	74.00	-20.68	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	53.65	32.40	5.96	45.5	46.51	74.00	-27.49	Horizontal
7311.00	53.79	36.60	6.93	45.6	51.72	74.00	-22.28	Horizontal
9748.00	54.14	38.00	8.02	46.2	53.96	74.00	-20.04	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	46.68	32.40	5.96	45.5	39.54	54.00	-14.46	Vertical
7311.00	44.08	36.60	6.93	45.6	42.01	54.00	-11.99	Vertical
9748.00	45.18	38.000	8.02	46.2	45.00	54.00	-9.00	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	45.25	32.40	5.96	45.5	38.11	54.00	-15.89	Horizontal
7311.00	43.08	36.60	6.93	45.6	41.01	54.00	-12.99	Horizontal
9748.00	42.69	38.000	8.02	46.2	42.51	54.00	-11.49	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	58.83	32.8	5.96	45.7	51.89	74.00	-22.11	Vertical
7386.00	58.22	36.4	6.93	45.8	55.75	74.00	-18.25	Vertical
9848.00	54.25	38.2	8.02	46.2	54.27	74.00	-19.73	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	55.04	32.8	5.96	45.7	48.10	74.00	-25.90	Horizontal
7386.00	55.45	36.4	6.93	45.8	52.98	74.00	-21.02	Horizontal
9848.00	57.77	38.2	8.02	46.2	57.79	74.00	-16.21	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	44.95	32.8	5.96	45.7	38.01	54.00	-15.99	Vertical
7386.00	48.73	36.4	6.93	45.8	46.26	54.00	-7.74	Vertical
9848.00	42.55	38.2	8.02	46.2	42.57	54.00	-11.43	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	44.34	32.8	5.96	45.7	37.40	54.00	-16.60	Horizontal
7386.00	44.16	36.4	6.93	45.8	41.69	54.00	-12.31	Horizontal
9848.00	45.99	38.2	8.02	46.2	46.01	54.00	-7.99	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	55.48	32.1	5.96	45.5	48.04	74.00	-25.96	Vertical
7236.00	56.68	36.6	6.93	45.6	54.61	74.00	-19.39	Vertical
9648.00	56.24	38.6	8.02	46.2	56.66	74.00	-17.34	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	55.70	32.1	5.96	45.5	48.26	74.00	-25.74	Horizontal
7236.00	53.82	36.6	6.93	45.6	51.75	74.00	-22.25	Horizontal
9648.00	56.58	38.6	8.02	46.2	57.00	74.00	-17.00	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	44.82	32.1	5.96	45.5	37.38	54.00	-16.62	Vertical
7236.00	45.97	36.6	6.93	45.6	43.90	54.00	-10.10	Vertical
9648.00	48.19	38.6	8.02	46.2	48.61	54.00	-5.39	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	44.76	32.1	5.96	45.5	37.32	54.00	-16.68	Horizontal
7236.00	45.31	36.6	6.93	45.6	43.24	54.00	-10.76	Horizontal
9648.00	45.87	38.6	8.02	46.2	46.29	54.00	-7.71	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*” , means this data is the too weak instrument of signal is unable to test.*

Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	57.41	32.1	5.96	45.5	49.97	74.00	-24.03	Vertical
7311.00	55.37	36.6	6.93	45.6	53.30	74.00	-20.70	Vertical
9748.00	58.44	38.6	8.02	46.2	58.86	74.00	-15.14	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	54.90	32.1	5.96	45.5	47.46	74.00	-26.54	Horizontal
7311.00	58.77	36.6	6.93	45.6	56.70	74.00	-17.30	Horizontal
9748.00	56.33	38.6	8.02	46.2	56.75	74.00	-17.25	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	44.55	32.1	5.96	45.5	37.11	54.00	-16.89	Vertical
7311.00	46.24	36.6	6.93	45.6	44.17	54.00	-9.83	Vertical
9748.00	42.08	38.6	8.02	46.2	42.50	54.00	-11.50	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	46.34	32.1	5.96	45.5	38.90	54.00	-15.10	Horizontal
7311.00	48.62	36.6	6.93	45.6	46.55	54.00	-7.45	Horizontal
9748.00	42.06	38.6	8.02	46.2	42.48	54.00	-11.52	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*” , means this data is the too weak instrument of signal is unable to test.*

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	53.28	32.8	5.96	45.7	46.34	74.00	-27.66	4924.00
7386.00	58.07	36.4	6.93	45.8	55.60	74.00	-18.40	7386.00
9848.00	53.71	38.2	8.02	46.2	53.73	74.00	-20.27	9848.00
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	57.09	32.8	5.96	45.7	50.15	74.00	-23.85	Horizontal
7386.00	53.56	36.4	6.93	45.8	51.09	74.00	-22.91	Horizontal
9848.00	55.85	38.2	8.02	46.2	55.87	74.00	-18.13	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	48.45	32.8	5.96	45.7	41.51	54.00	-12.49	Vertical
7386.00	46.08	36.4	6.93	45.8	43.61	54.00	-10.39	Vertical
9848.00	43.57	38.2	8.02	46.2	43.59	54.00	-10.41	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	46.94	32.8	5.96	45.7	40.00	54.00	-14.00	Horizontal
7386.00	45.12	36.4	6.93	45.8	42.65	54.00	-11.35	Horizontal
9848.00	42.91	38.2	8.02	46.2	42.93	54.00	-11.07	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1 Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “*”, means this data is too weak instrument of signal is unable to test.

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	54.15	32.1	5.96	45.5	46.71	74.00	-27.29	Vertical
7266.00	57.00	36.8	6.93	45.6	55.13	74.00	-18.87	Vertical
9688.00	54.86	38.1	8.02	46.2	54.78	74.00	-19.22	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4844.00	57.33	32.1	5.96	45.5	49.89	74.00	-24.11	Horizontal
7266.00	53.78	36.8	6.93	45.6	51.91	74.00	-22.09	Horizontal
9688.00	56.80	38.1	8.02	46.2	56.72	74.00	-17.28	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	48.97	32.1	5.96	45.5	41.53	54.00	-12.47	Vertical
7266.00	45.01	36.8	6.93	45.6	43.14	54.00	-10.86	Vertical
9688.00	46.12	38.1	8.02	46.2	46.04	54.00	-7.96	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4844.00	47.83	32.1	5.96	45.5	40.39	54.00	-13.61	Horizontal
7266.00	47.61	36.8	6.93	45.6	45.74	54.00	-8.26	Horizontal
9688.00	42.96	38.1	8.02	46.2	42.88	54.00	-11.12	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.

Test mode:	802.11n(HT40)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	54.52	32.1	5.96	45.5	47.08	74.00	-26.92	Vertical
7311.00	55.80	36.6	6.93	45.6	53.73	74.00	-20.27	Vertical
9748.00	54.60	38.6	8.02	46.2	55.02	74.00	-18.98	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	54.62	32.1	5.96	45.5	47.18	74.00	-26.82	Horizontal
7311.00	54.44	36.6	6.93	45.6	52.37	74.00	-21.63	Horizontal
9748.00	56.13	38.6	8.02	46.2	56.55	74.00	-17.45	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	43.41	32.1	5.96	45.5	35.97	54.00	-18.03	Vertical
7311.00	47.51	36.6	6.93	45.6	45.44	54.00	-8.56	Vertical
9748.00	44.77	38.6	8.02	46.2	45.19	54.00	-8.81	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	43.58	32.1	5.96	45.5	36.14	54.00	-17.86	Horizontal
7311.00	44.53	36.6	6.93	45.6	42.46	54.00	-11.54	Horizontal
9748.00	44.43	38.6	8.02	46.2	44.85	54.00	-9.15	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	55.31	32.8	5.96	45.7	48.37	74.00	-25.63	Vertical
7356.00	58.42	36.2	6.93	45.8	55.75	74.00	-18.25	Vertical
9808.00	57.81	38.4	8.02	46.2	58.03	74.00	-15.97	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4904.00	54.57	32.8	5.96	45.7	47.63	74.00	-26.37	Horizontal
7356.00	55.95	36.2	6.93	45.8	53.28	74.00	-20.72	Horizontal
9808.00	54.46	38.4	8.02	46.2	54.68	74.00	-19.32	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	46.45	32.8	5.96	45.7	39.51	54.00	-14.49	Vertical
7356.00	45.32	36.2	6.93	45.8	42.65	54.00	-11.35	Vertical
9808.00	43.83	38.4	8.02	46.2	44.05	54.00	-9.95	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4904.00	44.42	32.8	5.96	45.7	37.48	54.00	-16.52	Horizontal
7356.00	44.90	36.2	6.93	45.8	42.23	54.00	-11.77	Horizontal
9808.00	41.73	38.4	8.02	46.2	41.95	54.00	-12.05	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “*”, means this data is the too weak instrument of signal is unable to test.

5. Test Setup Photo

Reference to the **appendix I** for details.

6. EUT Constructional Details

Reference to the **appendix II** external photos and **appendix III** internal photos for details.

-----End-----