

Soundlab Technology Company Limited

Specification For Approval

Manufacturer: Soundlab Technology Company Limited

Address: Microlab Industrial Zone, No.2, BaoziSouth Road, KengziSub-district , Pingshan District,
ShenzhenCity, GuangdongProvince, P. R.China

Model No.: 2.4antenna

Part name: U3300


Product specification

Quick Reference Data

	Antenna module on the system board	
Frequenc Range	2400 ~ 2500GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	6 0.2 %	
Gain (dBi)	1.9 (Avg Gain XY-plane)	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	V ertical & Horizontal	
V . S .W . R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board

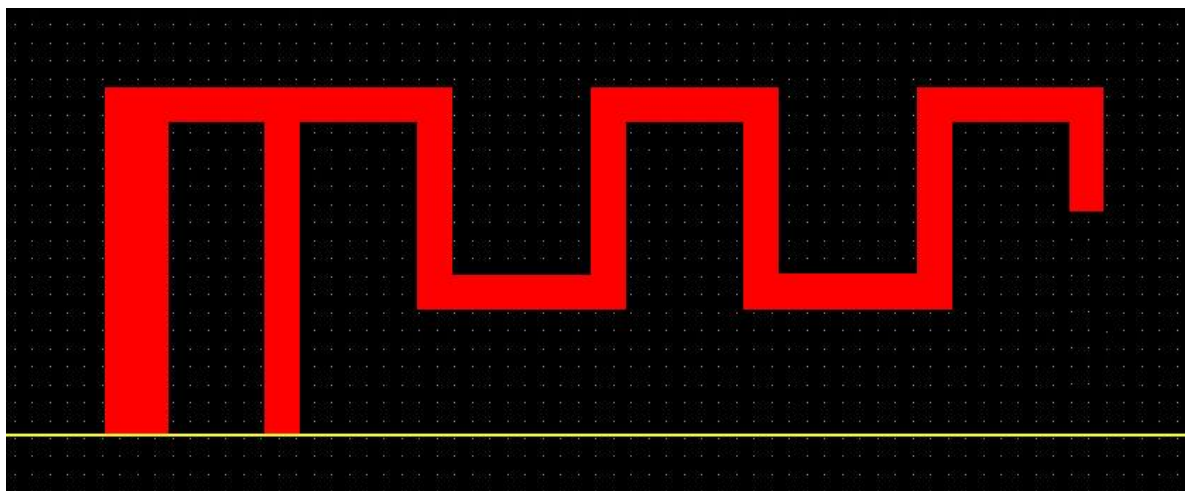


Antenna Gain

Gain Table



Unit in dBi @2.44GHz	XY-plane	XZ-plane	YZ-plane	Efficiency
----------------------	----------	----------	----------	------------

	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.2	-0.5	1.9	-3.6	1.1	-3.0	6 0.2 %


Return Loss

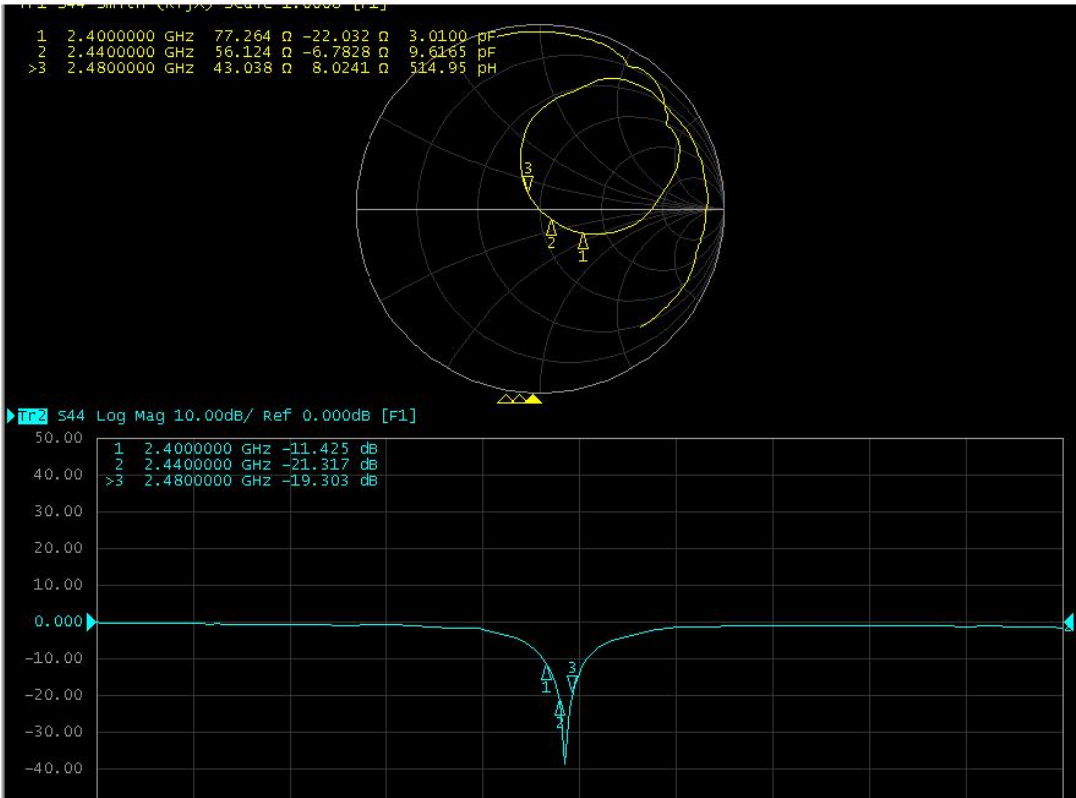


The Environment of Antenna Radiation Pattern

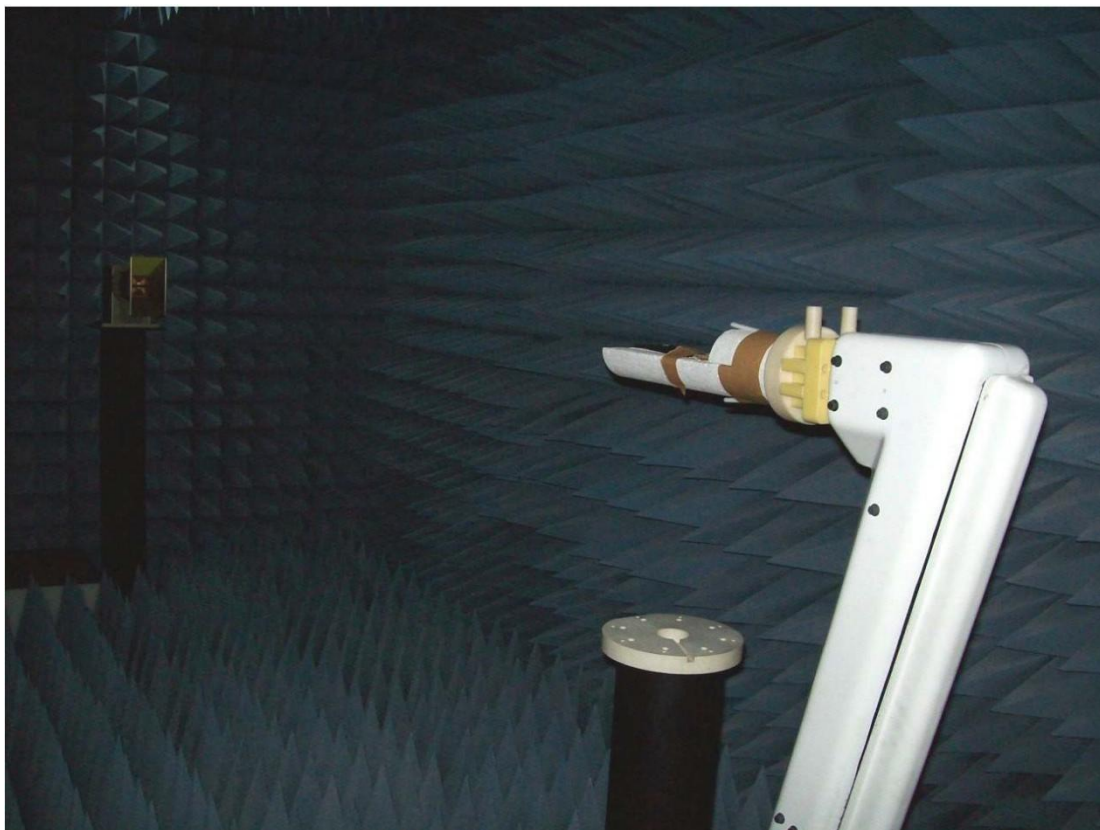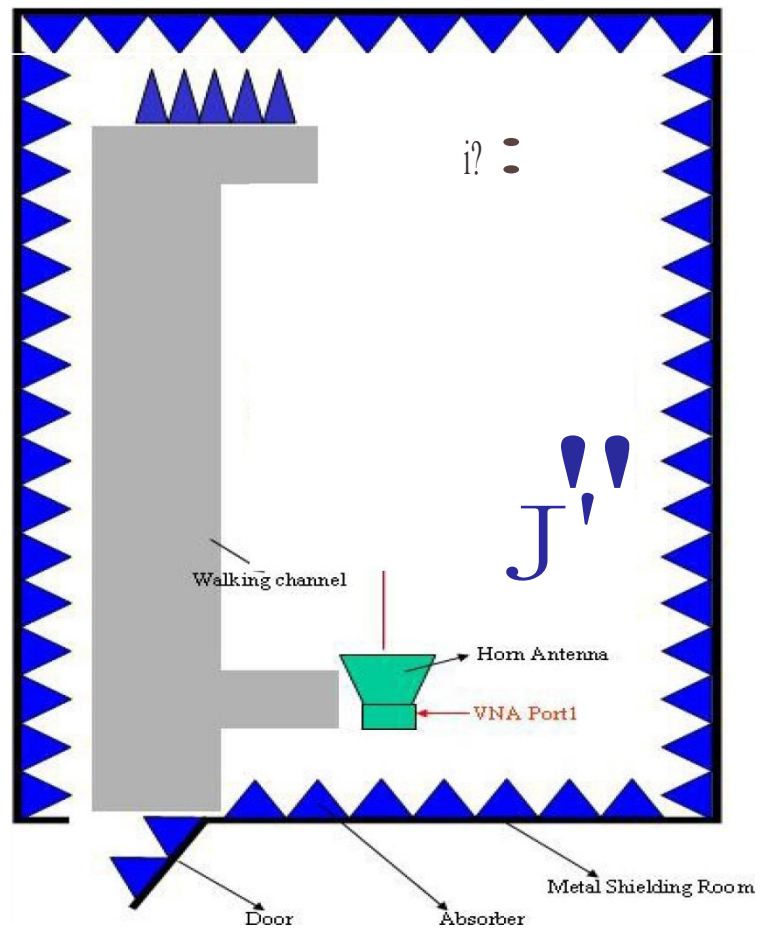


3D radiation pattern diagram

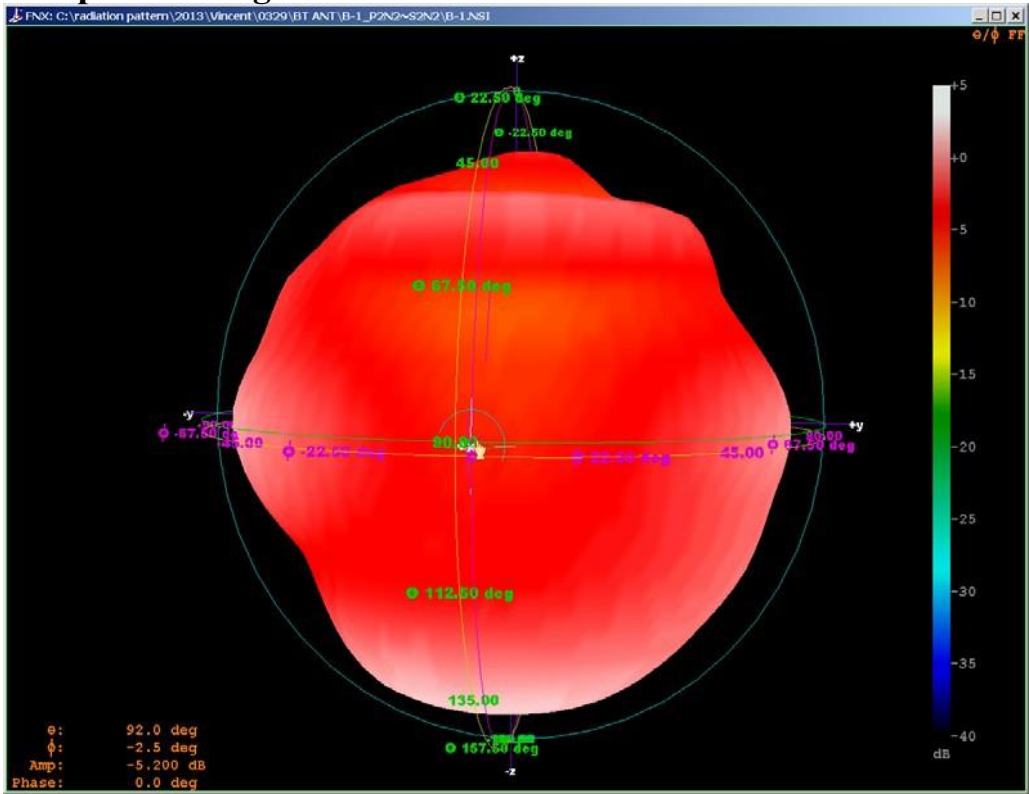


XY-plane

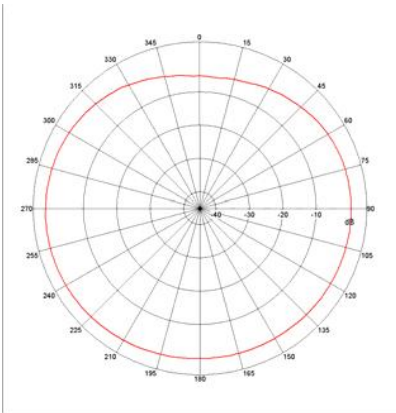

XZ-plane

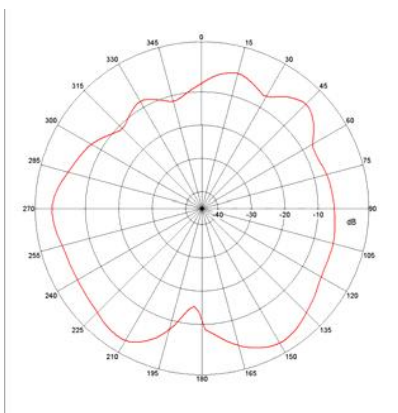

YZ-plane

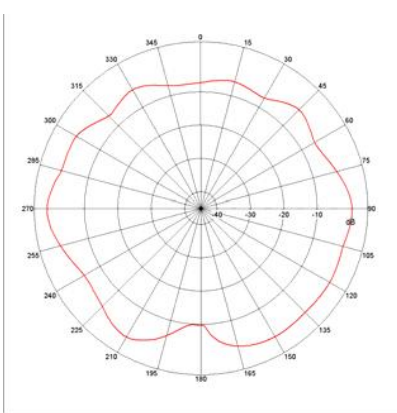

Antenna Photo & Length (mm)

