



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2021-11-03

Test Report

Report No.: CQASZ20250701518E-03

Applicant: Ultimea Technology (Shenzhen) Limited

Address of Applicant: 20th Floor, Building 4, Tianan Cloud Park, Bantian St., Longgang District, Shenzhen, China

Equipment Under Test (EUT):

EUT Name: Soundbar

Model No.: U442A, U442B, U442C, U442D, U442E, U442F, U4421, U422A, U422B, U422C, U422D, U422E, U422F, U422G

Test Model No.: U442A

Brand Name: ULTIMEA

FCC ID: 2A9OO-U442AS

Standards: 47 CFR Part 15, Subpart C

Date of Receipt: 2025-7-2

Date of Test: 2025-7-2 to 2025-8-1

Date of Issue: 2025-9-10

Test Result: PASS*

*In the configuration tested, the EUT complied with the standards specified above

Tested By: lewis zhou

(Lewis Zhou)

Reviewed By: Timo Lei

(Timo Lei)

Approved By: Jack Ai

(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20250701518E-03	Rev.01	Initial report	2025-9-10

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10 (2013)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10 (2013)	PASS

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT AND MODE	8
4.4 DESCRIPTION OF SUPPORT UNITS	8
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	9
4.6 TEST LOCATION	10
4.7 TEST FACILITY	10
4.8 DEVIATION FROM STANDARDS	10
4.9 ABNORMALITIES FROM STANDARD CONDITIONS	10
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	10
4.11 EQUIPMENT LIST	11
5 TEST RESULTS AND MEASUREMENT DATA	12
5.1 ANTENNA REQUIREMENT	12
5.2 CONDUCTED EMISSIONS	13
5.3 RADIATED EMISSION	20
5.4 20DB BANDWIDTH	32
6 PHOTOGRAPHS	35
6.1 RADIATED SPURIOUS EMISSION	35
6.2 CONDUCTED EMISSIONS TEST SETUP	36
6.3 RF CONDUCTED MEASUREMENT	37
6.4 EUT CONSTRUCTIONAL DETAILS	38
*** END OF REPORT ***	38

4 General Information

4.1 Client Information

Applicant:	Ultimaea Technology (Shenzhen) Limited
Address of Applicant:	20th Floor, Building 4, Tianan Cloud Park, Bantian St., Longgang District, Shenzhen, China
Manufacturer:	Ultimaea Technology (Shenzhen) Limited
Address of Manufacturer:	20th Floor, Building 4, Tianan Cloud Park, Bantian St., Longgang District, Shenzhen, China
Factory:	Zhuhai Fenda Technology Co., Ltd.
Address of Factory:	3/F Building 3, 3/F Building 4, Building 5, 629 Damen Road, Sanzao Town, Jinwan District, Zhuhai City)

4.2 General Description of EUT

EUT Name:	Soundbar
Model No.:	U442A, U442B, U442C, U442D, U442E, U442F, U4421, U422A, U422B, U422C, U422D, U422E, U422F, U422G
Test Model No.:	U442A
Trade Mark:	ULTIMEA
Software Version:	V1.0
Hardware Version:	U4422-MF
Frequency Range:	5735MHz~5840MHz
Modulation Type:	GFSK
Number of Channels:	22
Sample Type:	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Test Software of EUT:	Syncomm Debug Tool
Antenna Type:	PCB antenna
Antenna Gain:	3dBI
Power Supply:	<p>Master: MODEL NO.:FX65B-180360C Input:100-240V~ 50/60Hz 1.5A Output:18V= 3.6A</p> <p>Master: MODEL NO.:FX96W-180500D1 Input:100-240V~ 50/60Hz 1.5A Output:18V= 5A</p>

Simultaneous Transmission	<input checked="" type="checkbox"/> Simultaneous TX is supported and evaluated in this report. <input type="checkbox"/> Simultaneous TX is not supported.
------------------------------	--

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5735MHz	13	5795MHz	25	/	37	/
2	5740MHz	14	5800MHz	36	/	38	/
3	5745MHz	15	5805MHz	27	/	39	/
4	5750MHz	16	5810MHz	28	/	40	/
5	5755MHz	17	5815MHz	29	/	41	/
6	5760MHz	18	5820MHz	30	/	42	/
7	5765MHz	19	5825MHz	31	/	43	/
8	5770MHz	20	5830MHz	32	/	44	/
9	5775MHz	21	5835MHz	33	/	45	/
10	5780MHz	22	5840MHz	34	/	46	/
11	5785MHz	23	/	35	/	47	/
12	5790MHz	24	/	36	/	48	/

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH1)	5735MHz
The Middle channel(CH11)	5785MHz
The Highest channel(CH22)	5840MHz

4.3 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	27 °C
Humidity:	59 % RH
Atmospheric Pressure:	1009mbar
Temperature:	26 °C
Humidity:	59 % RH
Atmospheric Pressure:	1009mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009mbar
Test mode:	
Transmitting mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	5.12dB	(1)
Radiated Emission	Above 1GHz	4.60dB	(1)
Conducted Disturbance	0.15~30MHz	3.34dB	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.7 Test Facility

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.

4.10 Other Information Requested by the Customer

None.

4.11 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2023/11/01	2026/10/31
Spectrum analyzer	R&S	FSU26	CQA-038	2023/9/7	2026/9/6
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2024/9/2	2025/9/1
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2024/9/2	2025/9/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2024/9/2	2025/9/1
Bilog Antenna	R&S	HL562	CQA-011	2024/9/2	2025/9/1
Horn Antenna	R&S	HF906	CQA-012	2024/9/2	2025/9/1
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2024/9/2	2025/9/1
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2024/9/2	2025/9/1
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2024/9/2	2025/9/1
Antenna Connector	CQA	RFC-01	CQA-080	2024/9/2	2025/9/1
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2024/9/2	2025/9/1
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2024/9/2	2025/9/1
EMI Test Receiver	R&S	ESPI3	CQA-013	2024/9/2	2025/9/1
LISN	R&S	ENV216	CQA-003	2024/9/2	2025/9/1
Coaxial cable	CQA	N/A	CQA-C009	2024/9/2	2025/9/1

Note:

The temporary antenna connector is soldered on the pcb board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:	

The antenna is PCB antenna.
The connection/connection type between the antenna to the EUT's antenna port is: permanently attachment.
This is either permanently attachment or a unique coupling that satisfies the requirement.


5.2 Conducted Emissions

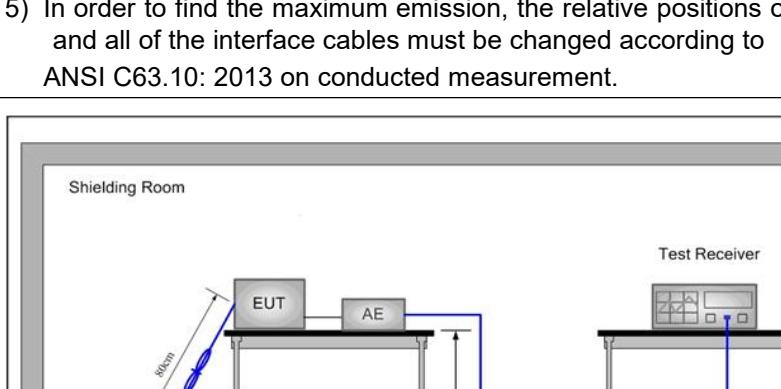Test Requirement:	47 CFR Part 15C Section 15.207														
Test Method:	ANSI C63.10: 2013														
Test Frequency Range:	150kHz to 30MHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
	* Decreases with the logarithm of the frequency.														
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Setup:															

Test Mode:	Charge +Transmitting mode.
Final Test Mode:	Charge +Transmitting mode
Test Results:	Pass

Measurement Data
U442A

Live line:

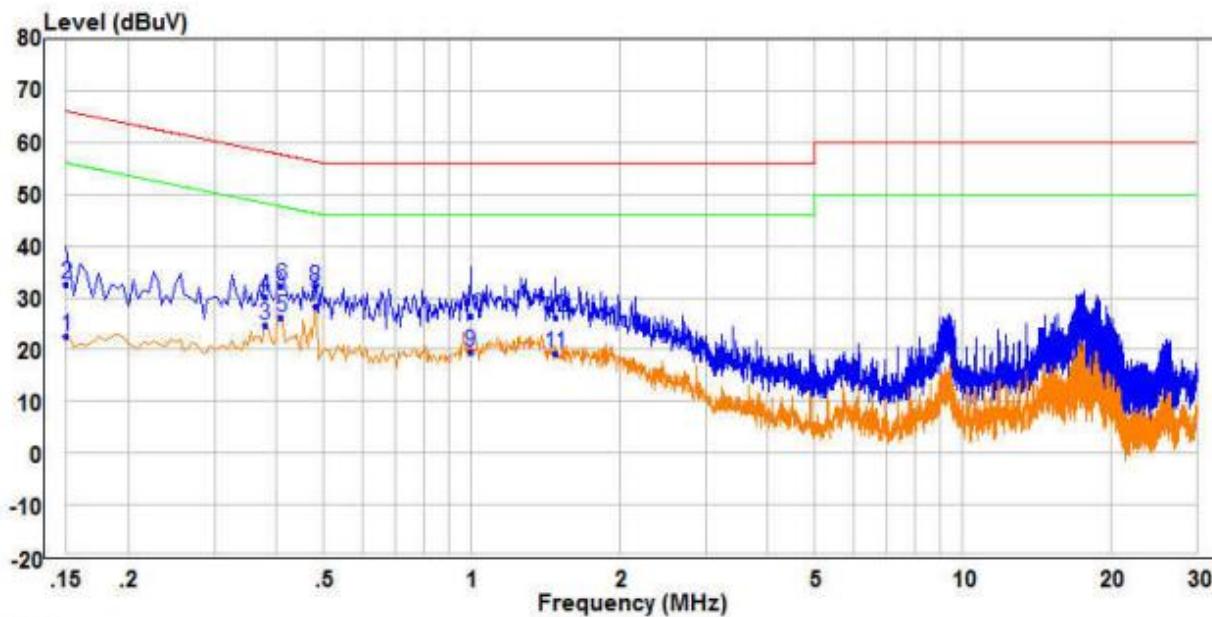


Freq	Read		Limit Level	Over Line	Over Limit	Over Remark	Pol/Phase	
	Level	Factor						
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.150	12.98	9.70	22.68	56.00	-33.32	Average Line	
2	0.150	22.92	9.70	32.62	66.00	-33.38	QP Line	
3	0.380	15.15	9.59	24.74	48.28	-23.54	Average Line	
4	0.380	20.55	9.59	30.14	58.28	-28.14	QP Line	
5	0.410	16.59	9.62	26.21	47.65	-21.44	Average Line	
6	0.410	22.71	9.62	32.33	57.65	-25.32	QP Line	
7	PP	0.480	18.66	9.68	28.34	-18.00	Average Line	
8	QP	0.480	22.29	9.68	31.97	56.34	-24.37	QP Line
9	0.995	9.82	9.70	19.52	46.00	-26.48	Average Line	
10	0.995	16.69	9.70	26.39	56.00	-29.61	QP Line	
11	1.480	8.38	10.79	19.17	46.00	-26.83	Average Line	
12	1.480	15.51	10.79	26.30	56.00	-29.70	QP Line	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

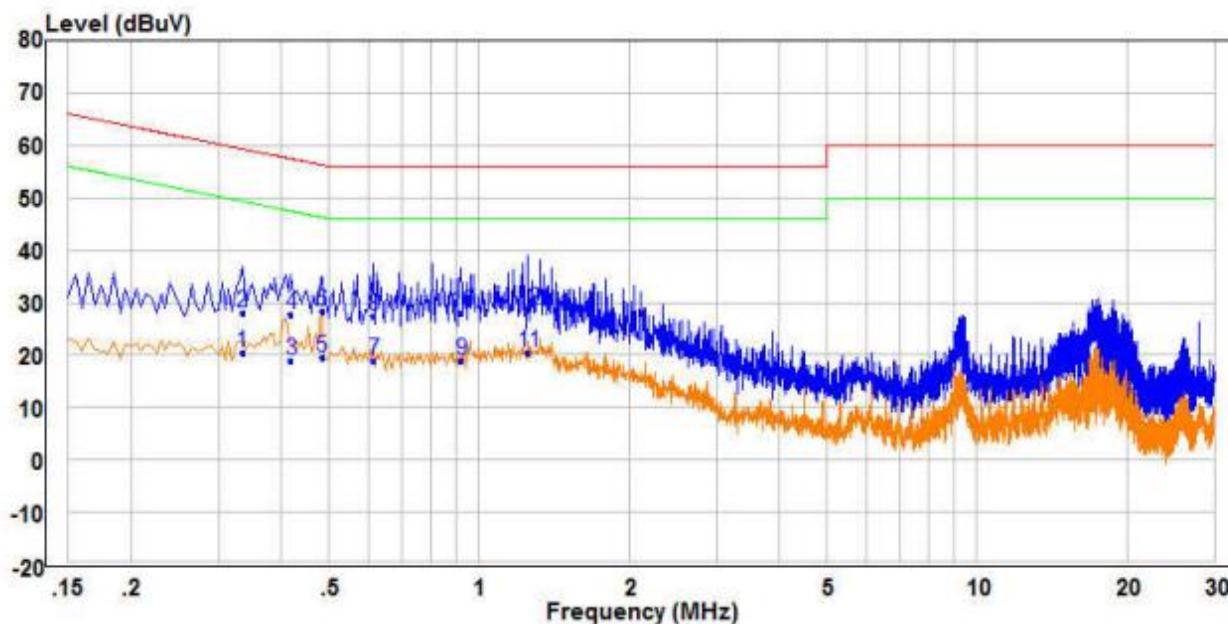


Freq	Read		Limit Line	Over Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV					
1	0.335	10.77	9.53	20.30	49.33	-29.03	Average
2	0.335	18.40	9.53	27.93	59.33	-31.40	QP
3	0.420	9.17	9.62	18.79	47.45	-28.66	Average
4	0.420	17.98	9.62	27.60	57.45	-29.85	QP
5	0.485	9.87	9.69	19.56	46.25	-26.69	Average
6	0.485	18.64	9.69	28.33	56.25	-27.92	QP
7	0.615	9.03	9.82	18.85	46.00	-27.15	Average
8	0.615	17.67	9.82	27.49	56.00	-28.51	QP
9	0.920	9.27	9.75	19.02	46.00	-26.98	Average
10	0.920	18.40	9.75	28.15	56.00	-27.85	QP
11	PP	1.255	10.73	9.71	20.44	46.00	-25.56
12	QP	1.255	19.06	9.71	28.77	56.00	-27.23

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

U4421

Live line:

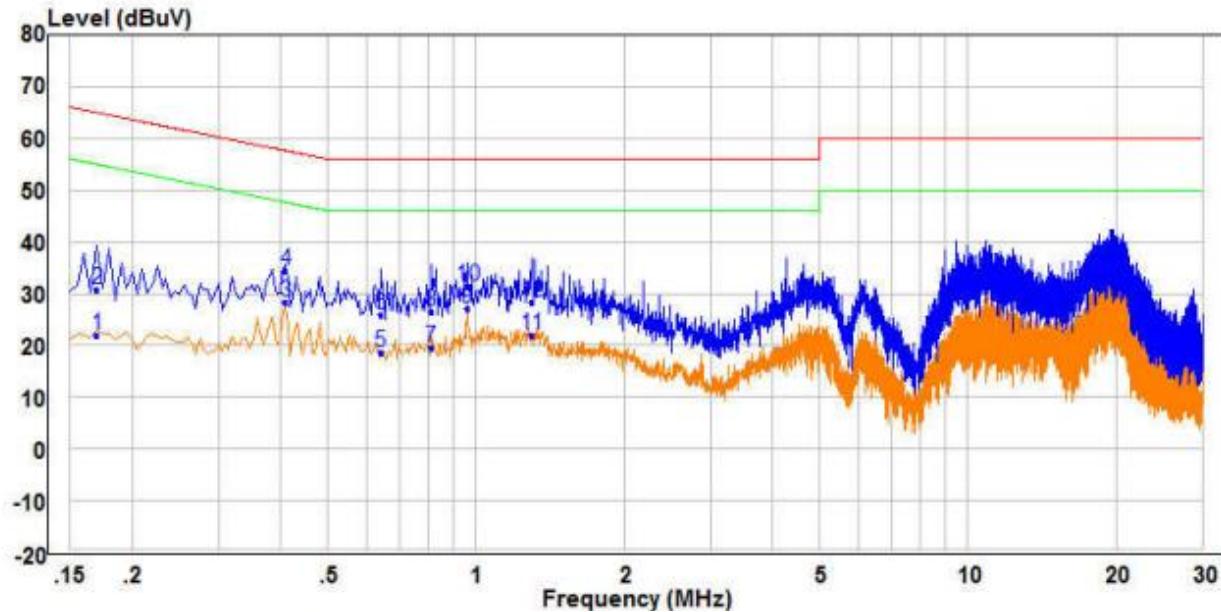


Freq	Read	Limit		Over	Pol/Phase		
	Level	Factor	Level	Line		Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.170	12.21	9.66	21.87	54.96	-33.09	Average Line
2	0.170	21.25	9.66	30.91	64.96	-34.05	QP Line
3	0.410	18.75	9.62	28.37	47.65	-19.28	Average Line
4 QP	0.410	24.94	9.62	34.56	57.65	-23.09	QP Line
5	0.640	8.79	9.84	18.63	46.00	-27.37	Average Line
6	0.640	16.04	9.84	25.88	56.00	-30.12	QP Line
7	0.810	9.73	9.83	19.56	46.00	-26.44	Average Line
8	0.810	16.64	9.83	26.47	56.00	-29.53	QP Line
9 PP	0.960	17.32	9.73	27.05	46.00	-18.95	Average Line
10	0.960	21.68	9.73	31.41	56.00	-24.59	QP Line
11	1.300	11.48	10.44	21.92	46.00	-24.08	Average Line
12	1.300	17.83	10.44	28.27	56.00	-27.73	QP Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

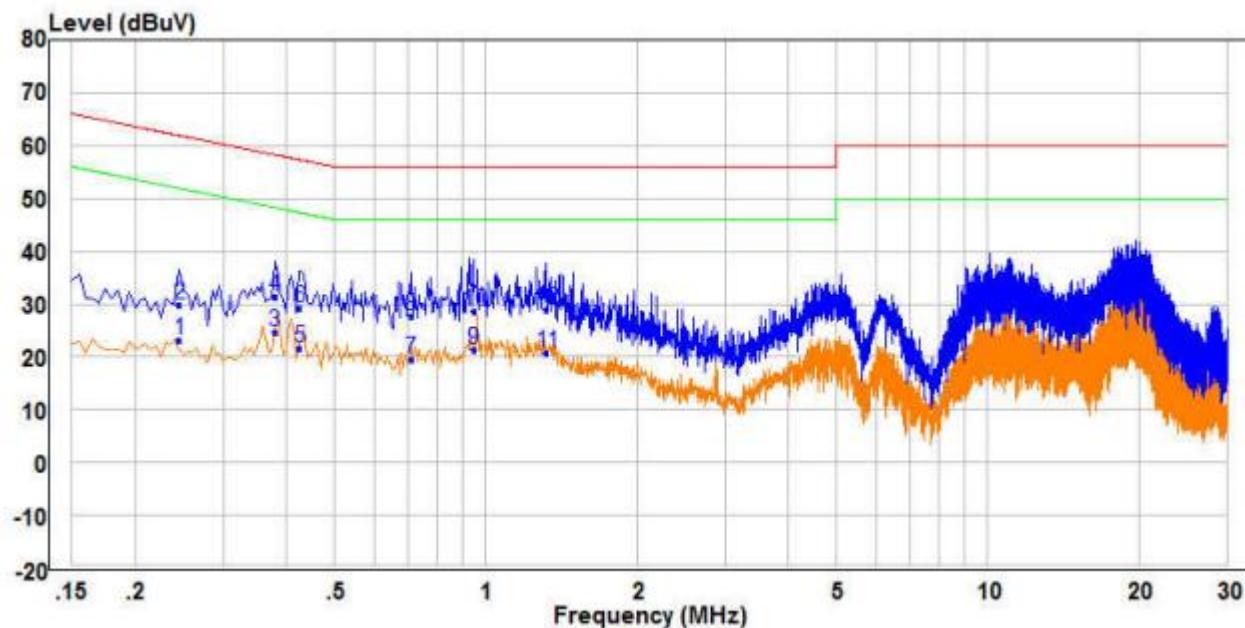


Freq	Read		Level	Limit	Over	Line	Limit	Remark	Pol/Phase
	MHz	dBuV		dB					
1	0.245	13.52	9.54	23.06	51.92	-28.86	Average		Neutral
2	0.245	20.22	9.54	29.76	61.92	-32.16	QP		Neutral
3 PP	0.380	15.24	9.58	24.82	48.28	-23.46	Average		Neutral
4	0.380	21.75	9.58	31.33	58.28	-26.95	QP		Neutral
5	0.425	11.91	9.63	21.54	47.35	-25.81	Average		Neutral
6	0.425	19.66	9.63	29.29	57.35	-28.06	QP		Neutral
7	0.710	9.67	9.89	19.56	46.00	-26.44	Average		Neutral
8	0.710	17.80	9.89	27.69	56.00	-28.31	QP		Neutral
9	0.945	11.50	9.74	21.24	46.00	-24.76	Average		Neutral
10	0.945	18.84	9.74	28.58	56.00	-27.42	QP		Neutral
11	1.320	11.06	9.72	20.78	46.00	-25.22	Average		Neutral
12 QP	1.320	19.37	9.72	29.09	56.00	-26.91	QP		Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

U422A

Live line:

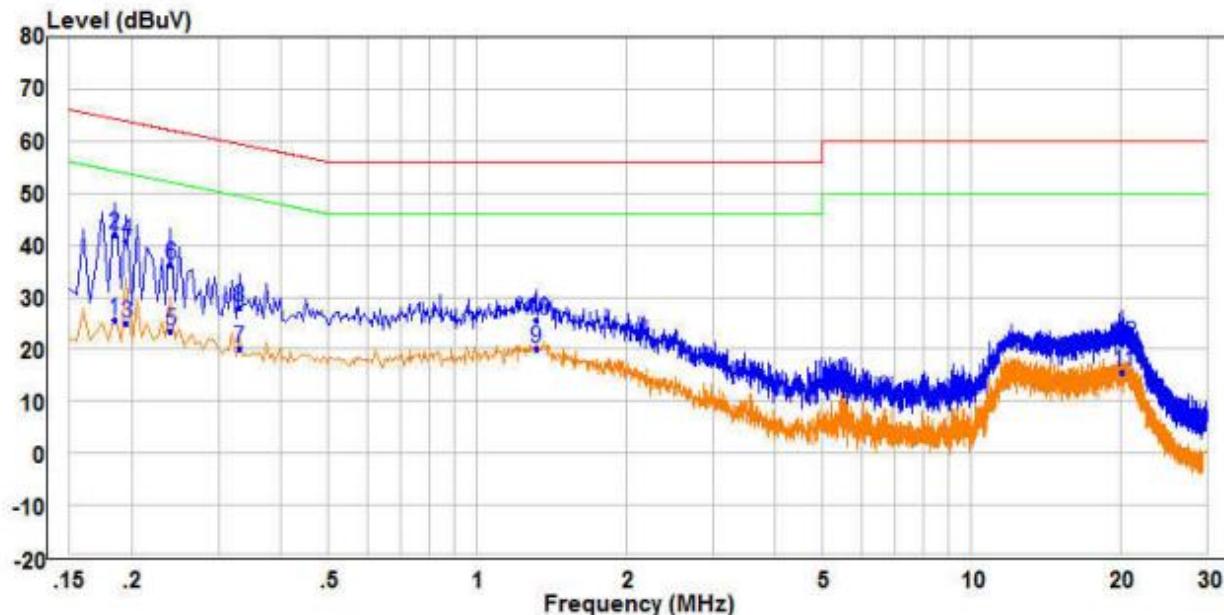


Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz			dBuV	dB		
1	0.185	16.08	9.64	25.72	54.26	-28.54	Average Line
2 PP	0.185	32.51	9.64	42.15	64.26	-22.11	QP Line
3	0.195	15.50	9.62	25.12	53.82	-28.70	Average Line
4	0.195	31.23	9.62	40.85	63.82	-22.97	QP Line
5	0.240	13.94	9.56	23.50	52.10	-28.60	Average Line
6	0.240	26.69	9.56	36.25	62.10	-25.85	QP Line
7	0.330	10.49	9.53	20.02	49.45	-29.43	Average Line
8	0.330	18.55	9.53	28.08	59.45	-31.37	QP Line
9 AV	1.315	9.63	10.47	20.10	46.00	-25.90	Average Line
10	1.315	15.16	10.47	25.63	56.00	-30.37	QP Line
11	20.290	5.62	9.85	15.47	50.00	-34.53	Average Line
12	20.290	11.16	9.85	21.01	60.00	-38.99	QP Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

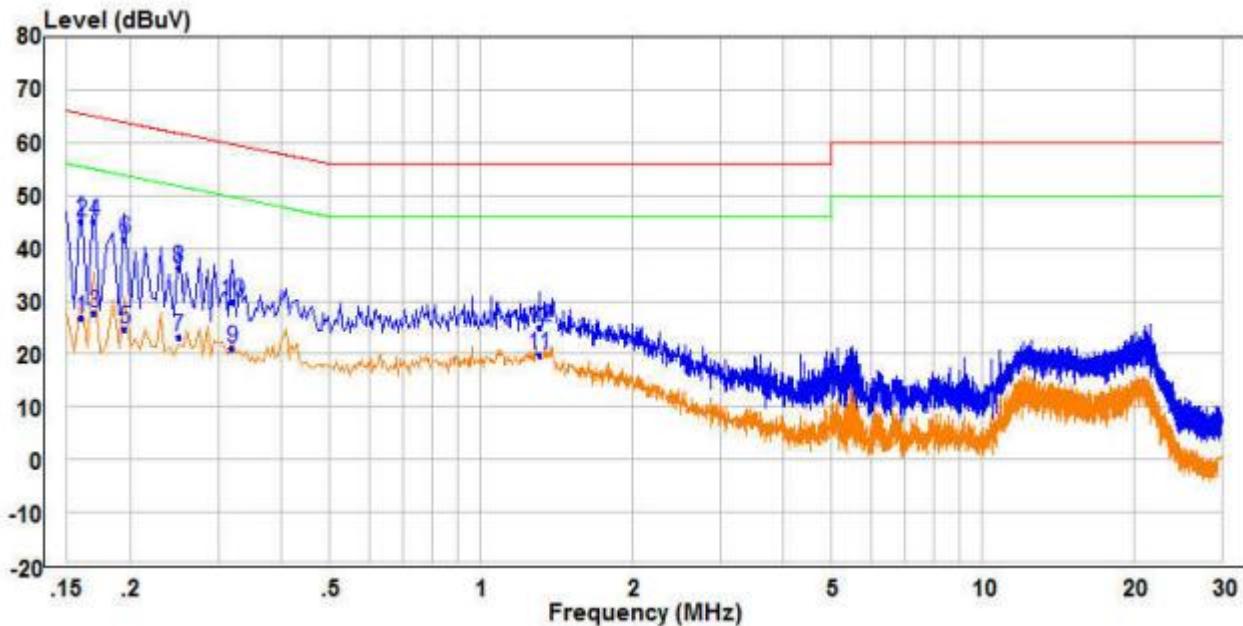




Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz			dBuV	dB		
1	0.160	17.06	9.68	26.74	55.46	-28.72	Average
2	0.160	35.35	9.68	45.03	65.46	-20.43	QP
3	0.170	18.01	9.66	27.67	54.96	-27.29	Average
4 PP	0.170	35.27	9.66	44.93	64.96	-20.03	QP
5	0.195	15.08	9.62	24.70	53.82	-29.12	Average
6	0.195	31.98	9.62	41.60	63.82	-22.22	QP
7	0.250	13.55	9.54	23.09	51.76	-28.67	Average
8	0.250	26.65	9.54	36.19	61.76	-25.57	QP
9	0.320	11.56	9.51	21.07	49.71	-28.64	Average
10	0.320	20.20	9.51	29.71	59.71	-30.00	QP
11 AV	1.305	10.09	9.72	19.81	46.00	-26.19	Average
12	1.305	15.36	9.72	25.08	56.00	-30.92	QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Radiated Emission

Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For fundamental frequency, RBW=5MHz, VBW=5MHz, Peak detector is for PK value, RMS detector is for Average value.					
Limit: (Spurious Emissions and band edge)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.					
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.0		Average Value	
		114.0		Peak Value	

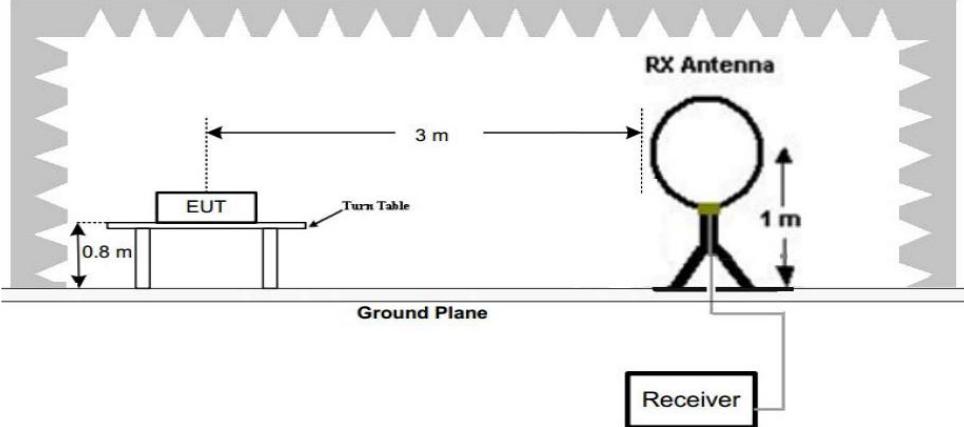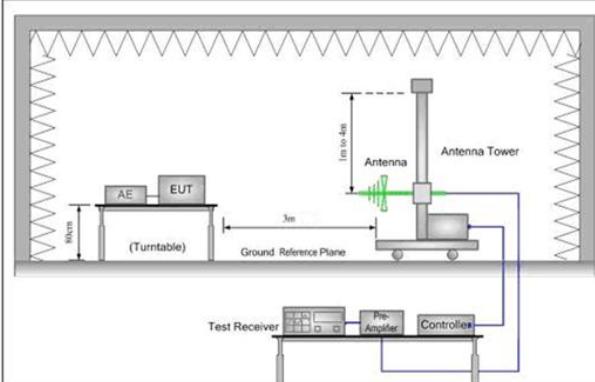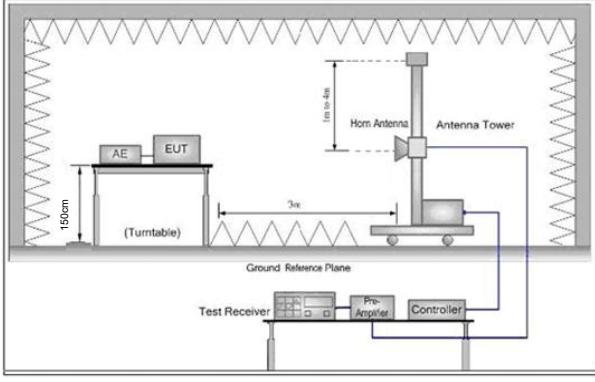
Test Setup:	
	<p>Figure 1. Below 30MHz</p>  
Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table</p>

	<p>was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <ul style="list-style-type: none">e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.g. Test the EUT in the lowest channel, the middle channel, the Highest channelh. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting mode,
Final Test Mode:	For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data


30MHz~1GHz U442A

Test mode:	Transmitting	Vertical
------------	--------------	----------

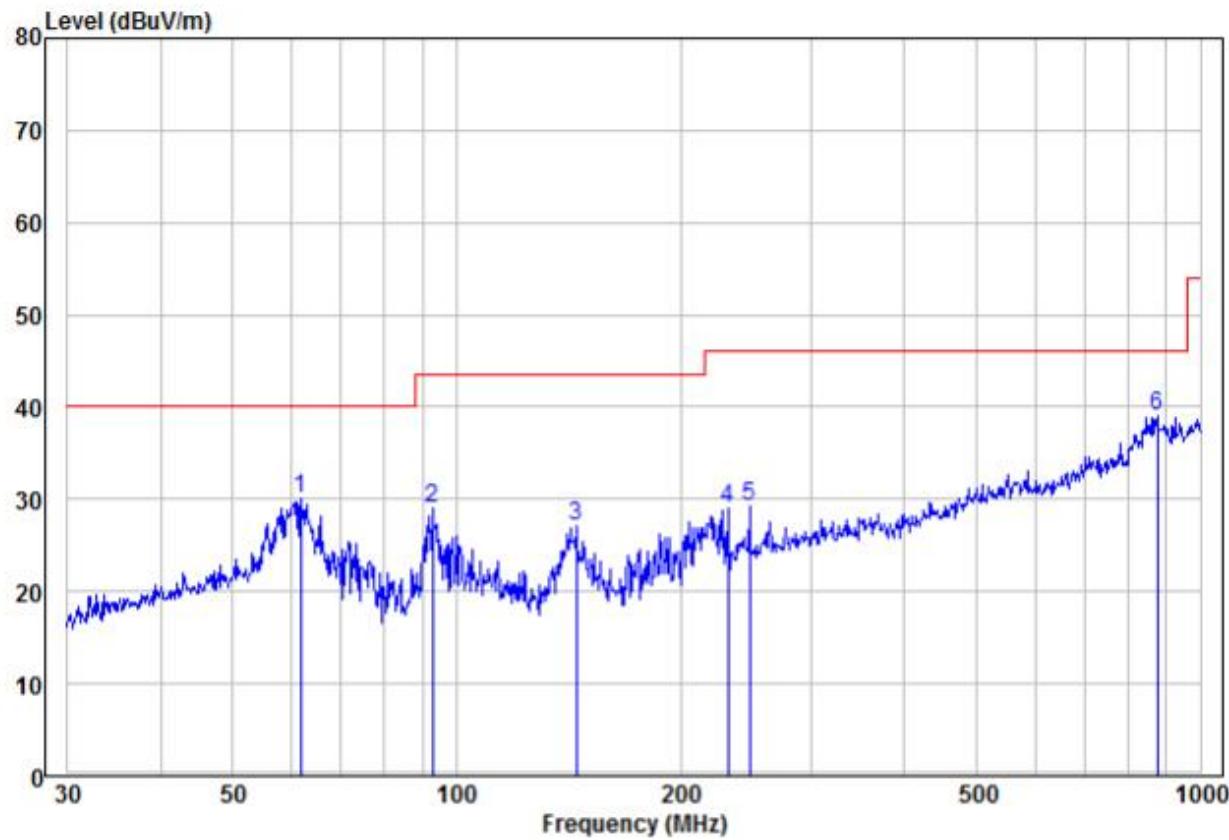

Freq	Read		Limit	Over	Pol/Phase			
	Freq	Level	Factor	Level	Line	Limit	Remark	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	61.78	17.71	12.35	30.06	40.00	-9.94	Peak	VERTICAL
2	92.79	17.25	11.85	29.10	43.50	-14.40	Peak	VERTICAL
3	144.84	17.48	9.68	27.16	43.50	-16.34	Peak	VERTICAL
4	231.72	13.96	15.01	28.97	46.00	-17.03	Peak	VERTICAL
5	247.68	12.89	16.31	29.20	46.00	-16.80	Peak	VERTICAL
6 pp	875.25	9.60	29.43	39.03	46.00	-6.97	Peak	VERTICAL

Test mode:	Transmitting	Horizontal
------------	--------------	------------

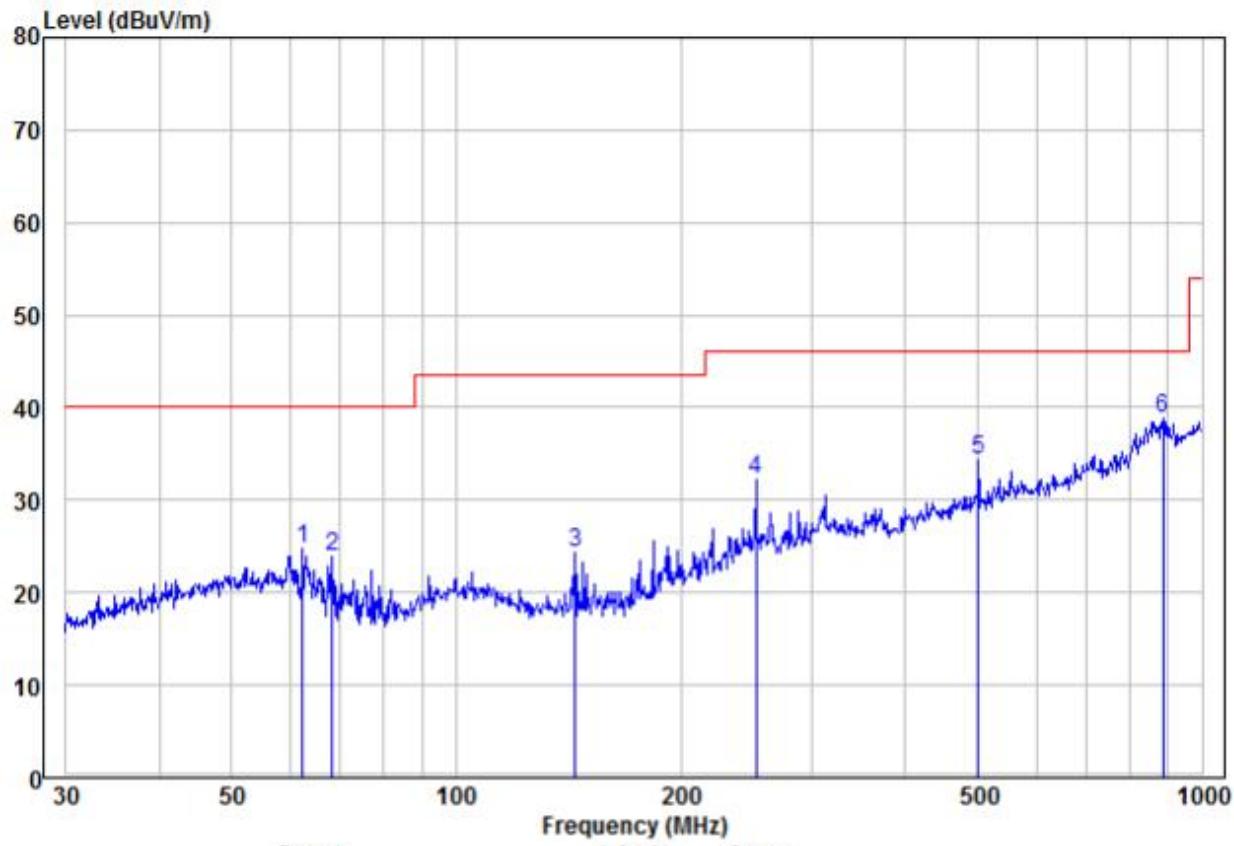


	Read	Limit	Over				
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase

	MHz	dB _{UV}	dB/m	dB _{UV} /m	dB _{UV} /m	dB		
1	62.21	12.54	12.22	24.76	40.00	-15.24	Peak	HORIZONTAL
2	68.15	13.43	10.46	23.89	40.00	-16.11	Peak	HORIZONTAL
3	144.33	14.66	9.67	24.33	43.50	-19.17	Peak	HORIZONTAL
4	252.06	15.74	16.43	32.17	46.00	-13.83	Peak	HORIZONTAL
5	501.18	12.54	21.84	34.38	46.00	-11.62	Peak	HORIZONTAL
6 pp	887.61	9.10	29.62	38.72	46.00	-7.28	Peak	HORIZONTAL


30MHz~1GHz U4421

Test mode: Transmitting Vertical

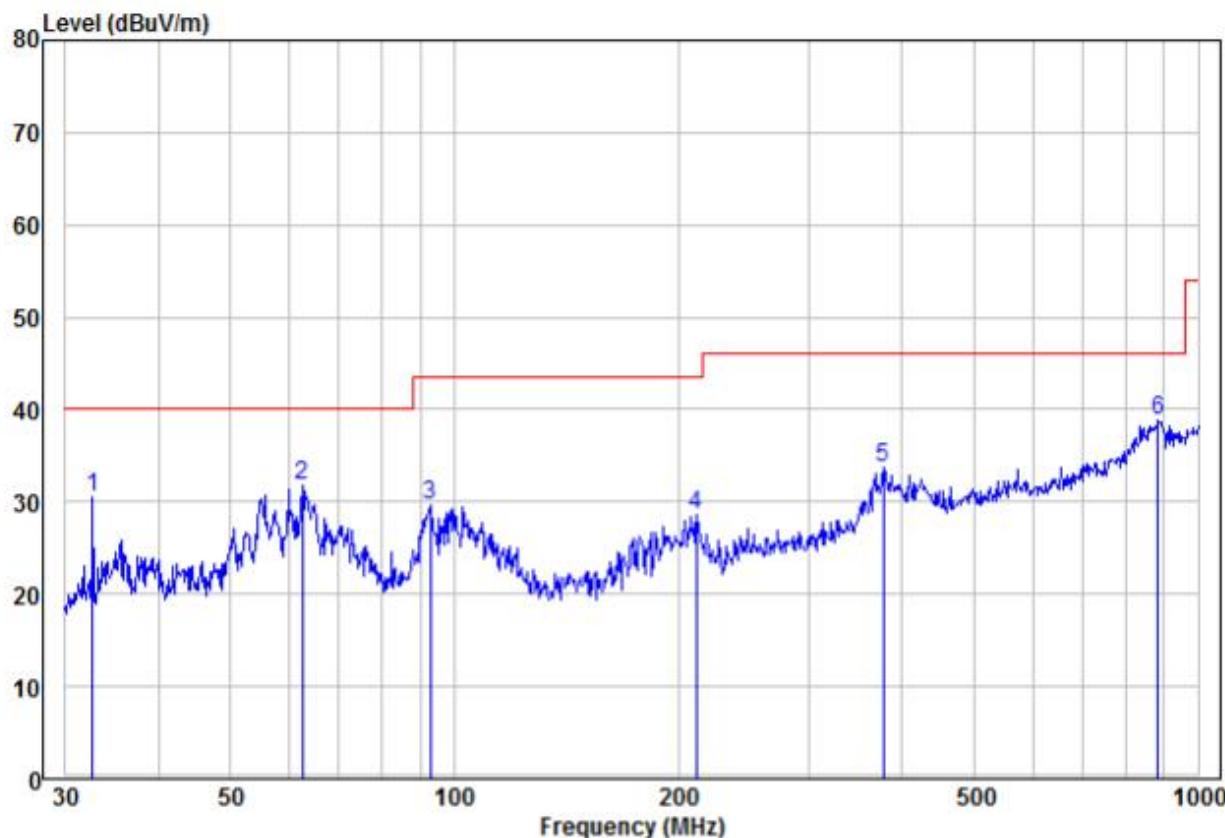

	Read			Limit			Over	Remark	Pol/Phase
	Freq	Level	Factor	Level	Line	Limit			
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
1	32.63	20.92	9.57	30.49	40.00	-9.51	Peak		VERTICAL
2	62.43	19.71	12.16	31.87	40.00	-8.13	Peak		VERTICAL
3	92.79	17.88	11.85	29.73	43.50	-13.77	Peak		VERTICAL
4	211.53	15.24	13.33	28.57	43.50	-14.93	Peak		VERTICAL
5	377.26	14.98	18.64	33.62	46.00	-12.38	Peak		VERTICAL
6 pp	884.50	9.19	29.58	38.77	46.00	-7.23	Peak		VERTICAL


Test mode:	Transmitting	Horizontal
------------	--------------	------------

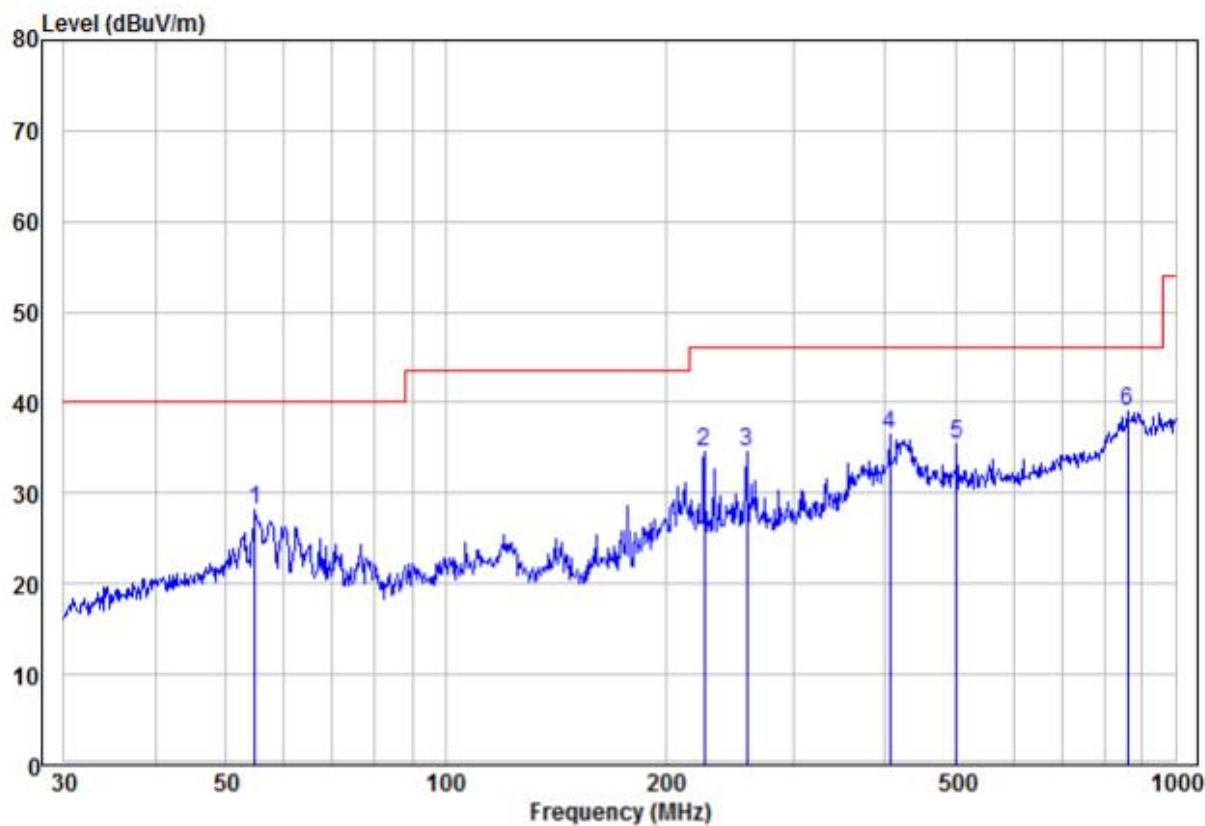

Freq	Read		Limit		Over		Remark	Pol/Phase
	Freq	Level	Factor	Level	Line	Limit		
	MHz	dB _{UV}	dB/m	dB _{UV} /m	dB _{UV} /m	dB		
1	54.83	14.36	13.82	28.18	40.00	-11.82	Peak	HORIZONTAL
2	226.10	20.15	14.33	34.48	46.00	-11.52	Peak	HORIZONTAL
3	258.33	17.99	16.60	34.59	46.00	-11.41	Peak	HORIZONTAL
4	406.09	17.10	19.32	36.42	46.00	-9.58	Peak	HORIZONTAL
5	501.18	13.56	21.84	35.40	46.00	-10.60	Peak	HORIZONTAL
6 pp	860.04	9.93	29.21	39.14	46.00	-6.86	Peak	HORIZONTAL

30MHz~1GHz U422A

Test mode: Transmitting Vertical

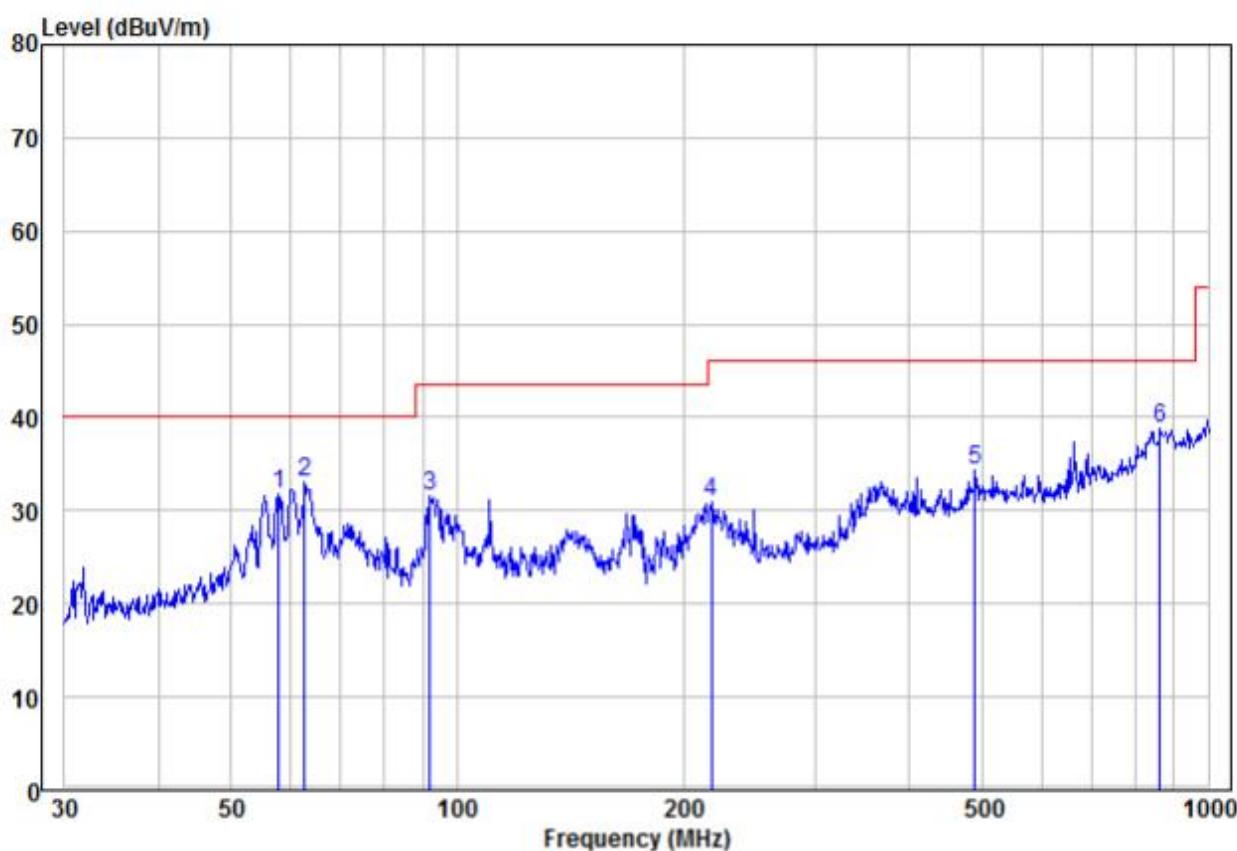


Read	Freq	Level	Factor	Limit		Over	Remark	Pol/Phase
				Line	dBuV/m			
	MHz	dBuV		dB/m	dBuV/m		dB	
1	57.80	18.39	13.30	31.69	40.00	-8.31	Peak	VERTICAL
2 pp	62.65	20.96	12.10	33.06	40.00	-6.94	Peak	VERTICAL
3	92.14	19.91	11.74	31.65	43.50	-11.85	Peak	VERTICAL
4	218.31	17.45	13.52	30.97	46.00	-15.03	Peak	VERTICAL
5	489.03	12.92	21.48	34.40	46.00	-11.60	Peak	VERTICAL
6	863.06	9.62	29.25	38.87	46.00	-7.13	Peak	VERTICAL

Test mode:

Transmitting

Horizontal

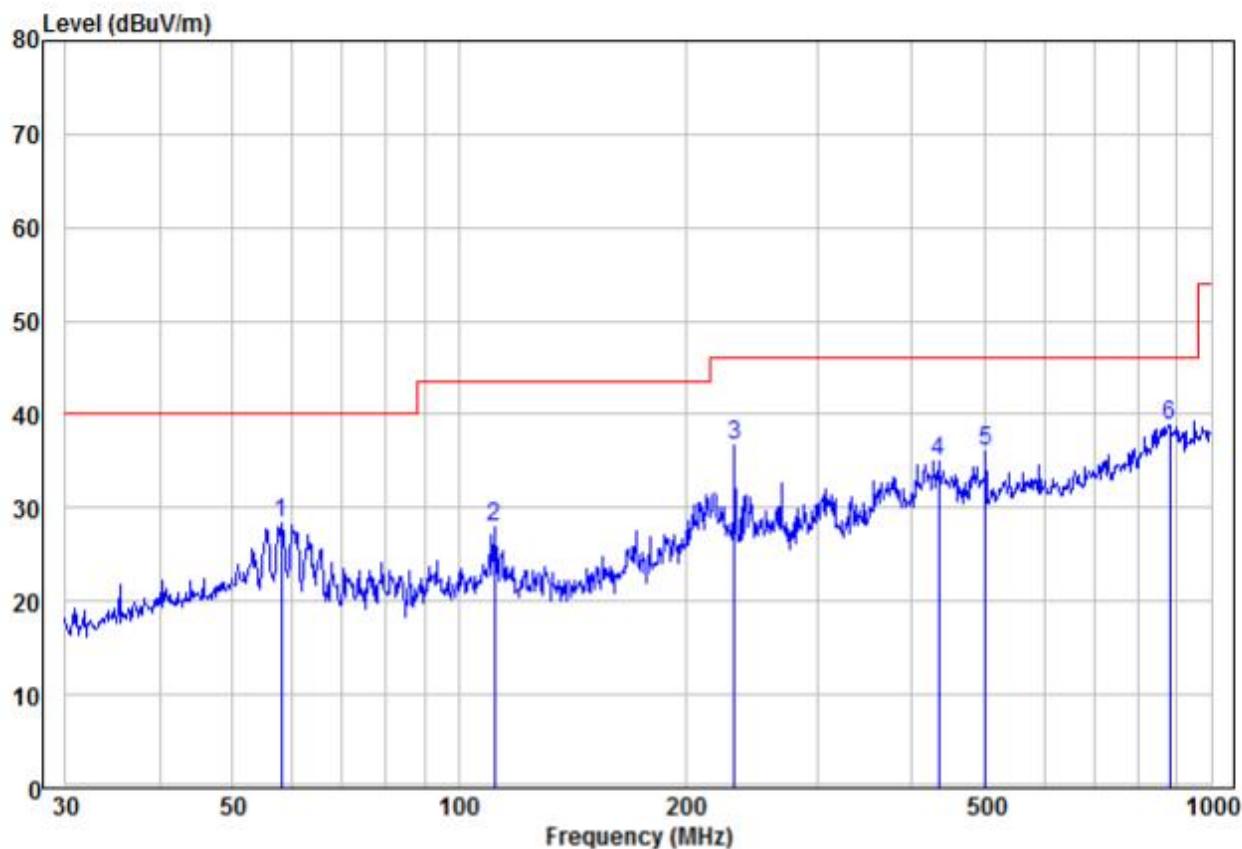

Read Freq	Level		Limit		Over Line		Over Limit Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	58.00	15.01	13.26	28.27	40.00	-11.73	Peak	HORIZONTAL
2	111.35	15.38	12.54	27.92	43.50	-15.58	Peak	HORIZONTAL
3	232.53	21.54	15.10	36.64	46.00	-9.36	Peak	HORIZONTAL
4	434.07	15.07	19.93	35.00	46.00	-11.00	Peak	HORIZONTAL
5	501.18	14.11	21.84	35.95	46.00	-10.05	Peak	HORIZONTAL
6 pp	881.41	9.36	29.52	38.88	46.00	-7.12	Peak	HORIZONTAL

Above 1GHz							
Test mode:		Transmitting		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
5725	45.99	-9.39	36.60	74	-37.40	Peak	H
5725	45.63	-9.39	36.24	54	-17.76	AVG	H
5735	99.18	-9.33	89.85	114	-24.15	peak	H
5735	95.57	-9.33	86.24	94	-7.76	AVG	H
11470	55.72	-4.28	51.44	74	-22.56	peak	H
11470	43.24	-4.28	38.96	54	-15.04	AVG	H
17205	52.49	1.13	53.62	74	-20.38	peak	H
17205	37.42	1.13	38.55	54	-15.45	AVG	H
5725	62.35	-9.39	52.96	74	-21.04	peak	V
5725	44.74	-9.39	35.35	54	-18.65	AVG	V
5735	94.48	-9.33	85.15	114	-28.85	peak	V
5735	92.98	-9.33	83.65	94	-10.35	AVG	V
11470	56.83	-4.28	52.55	74	-21.45	peak	V
11470	43.21	-4.28	38.93	54	-15.07	AVG	V
17205	50.80	1.13	51.93	74	-22.07	peak	V
17205	36.35	1.13	37.48	54	-16.52	AVG	V


Test mode:		Transmitting		Test channel:		Middle	
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
5785	99.84	-9.37	90.47	114	-23.53	peak	H
5785	96.38	-9.37	87.01	94	-6.99	AVG	H
11570	55.21	-4.14	51.07	74	-22.93	peak	H
11570	42.13	-4.14	37.99	54	-16.01	AVG	H
17355	51.16	0.56	51.72	74	-22.28	peak	H
17355	36.87	0.56	37.43	54	-16.57	AVG	H
5785	95.42	-9.36	86.06	114	-27.94	peak	V
5785	93.68	-9.36	84.32	94	-9.68	AVG	V
11570	55.80	-4.14	51.66	74	-22.34	peak	V
11570	42.32	-4.14	38.18	54	-15.82	AVG	V
17355	52.67	0.56	53.23	74	-20.77	peak	V
17355	36.87	0.56	37.43	54	-16.57	AVG	V

Test mode:		Transmitting		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
5840	99.27	-9.23	90.04	114	-23.96	peak	H
5840	97.09	-9.23	87.86	94	-6.14	AVG	H
11680	56.46	-4.03	52.43	74	-22.89	peak	H
11680	43.62	-4.03	39.59	54	-16.45	AVG	H
17520	52.22	1.68	53.90	74	-20.90	peak	H
17520	36.37	1.68	38.05	54	-13.85	AVG	H
5840	96.78	-9.23	87.55	114	-25.39	peak	V
5840	95.43	-9.23	86.20	94	-9.82	AVG	V
11680	56.66	-4.03	52.63	74	-21.54	peak	V
11680	42.85	-4.03	38.82	54	-15.62	AVG	V
17520	53.31	1.68	54.99	74	-19.57	peak	V
17520	35.82	1.68	37.50	54	-14.57	AVG	V

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 10GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

5.4 20dB Bandwidth

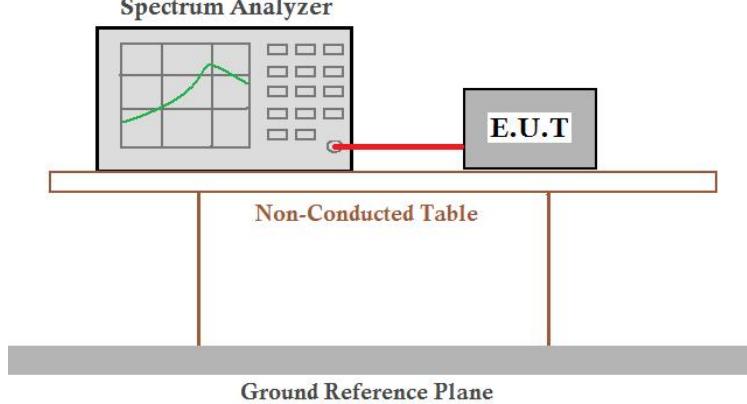
Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2013
Test Setup:	<p style="text-align: center;">Spectrum Analyzer</p> 
Test Mode:	Transmitting with GFSK modulation.
Limit:	N/A
Test Results:	Pass

Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	3.846	Pass
Middle	3.87	Pass
Highest	3.878	Pass


Test plot as follows:

Test channel:	Lowest
---------------	--------

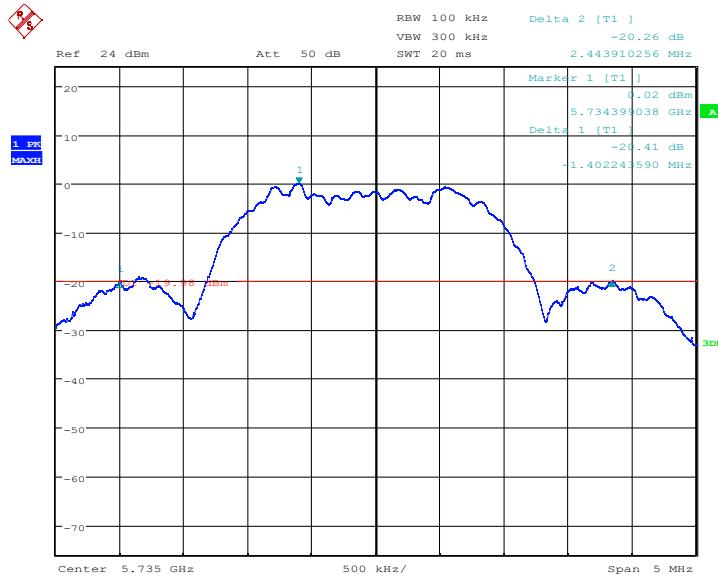


Date: 30.JUL.2025 14:32:43

Test channel:	Middle
---------------	--------

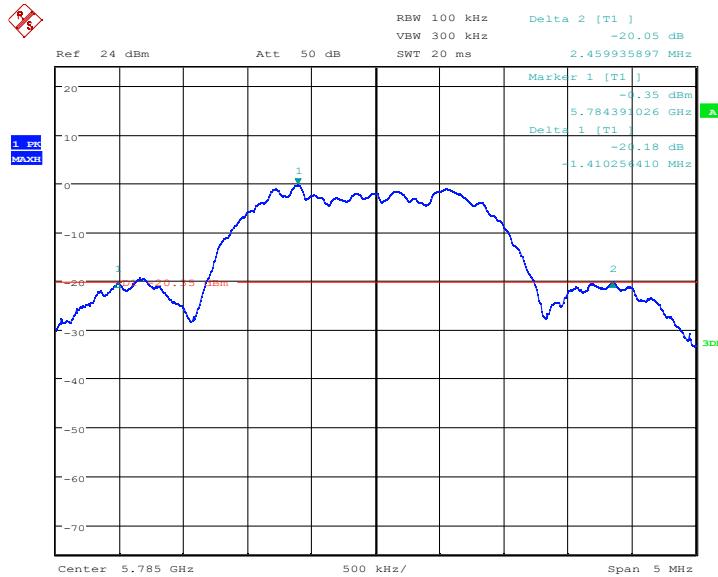

Date: 30.JUL.2025 14:35:55

Test channel:	Highest
---------------	---------

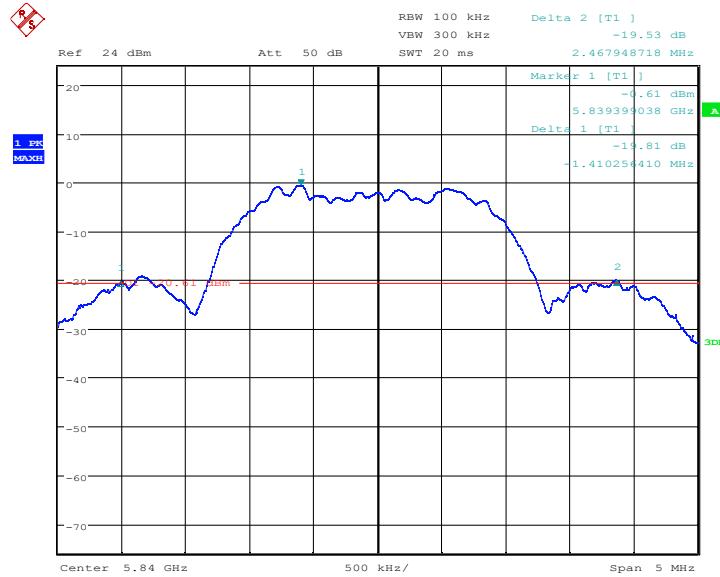


Date: 30.JUL.2025 14:41:09


6 Photographs

6.1 Radiated Spurious Emission

9kHz~30MHz:

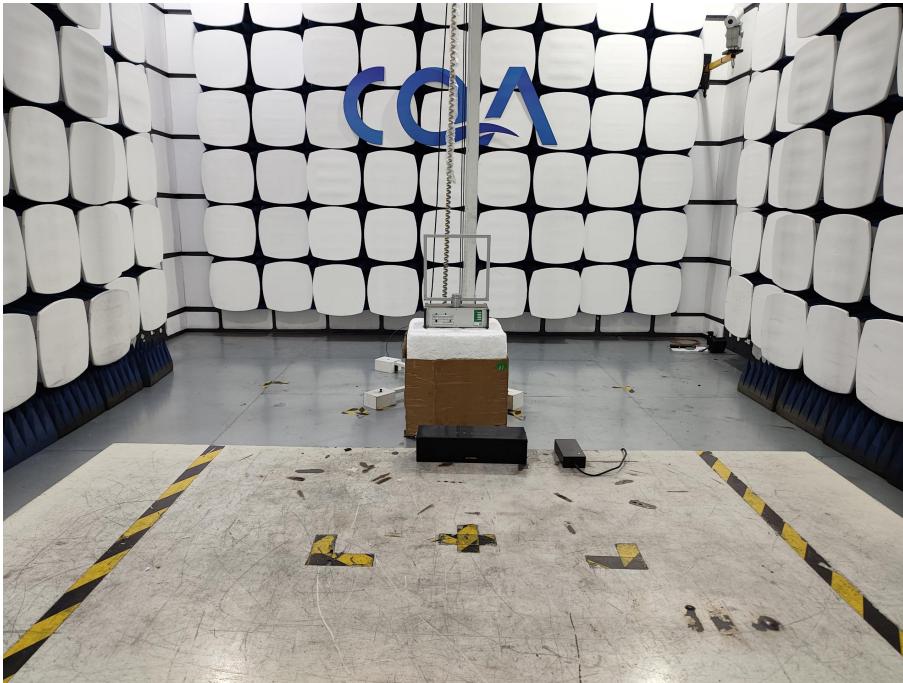


30MHz~1GHz:

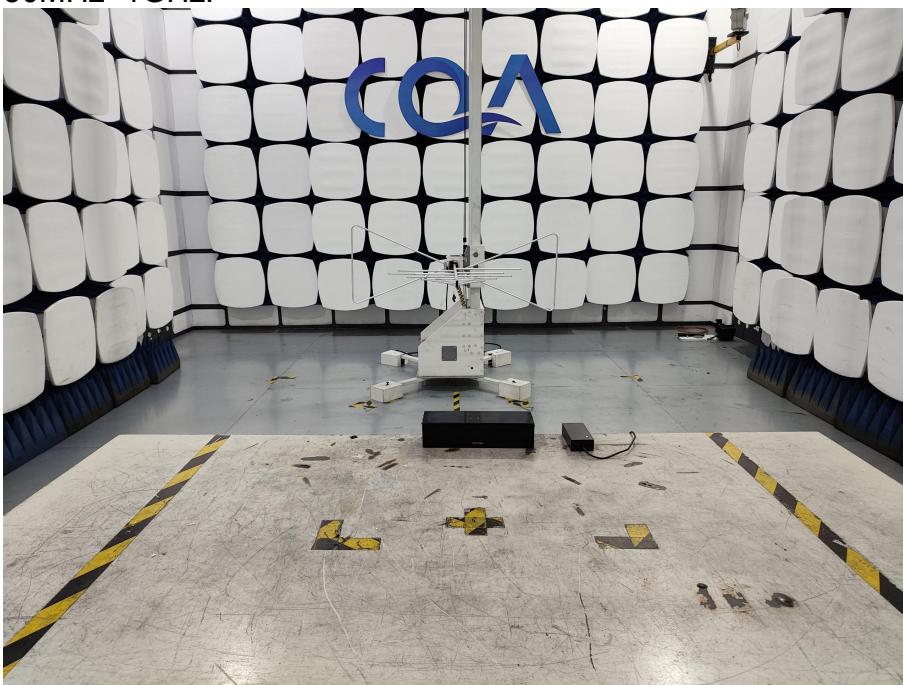


Above 1GHz:



6.2 Conducted Emissions Test Setup

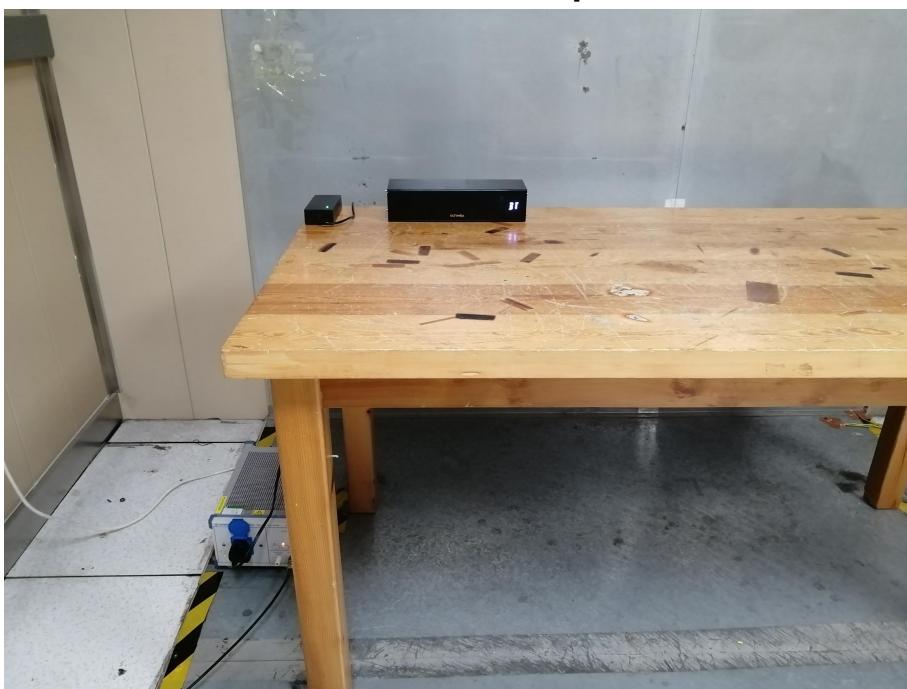

6.3 RF Conducted measurement

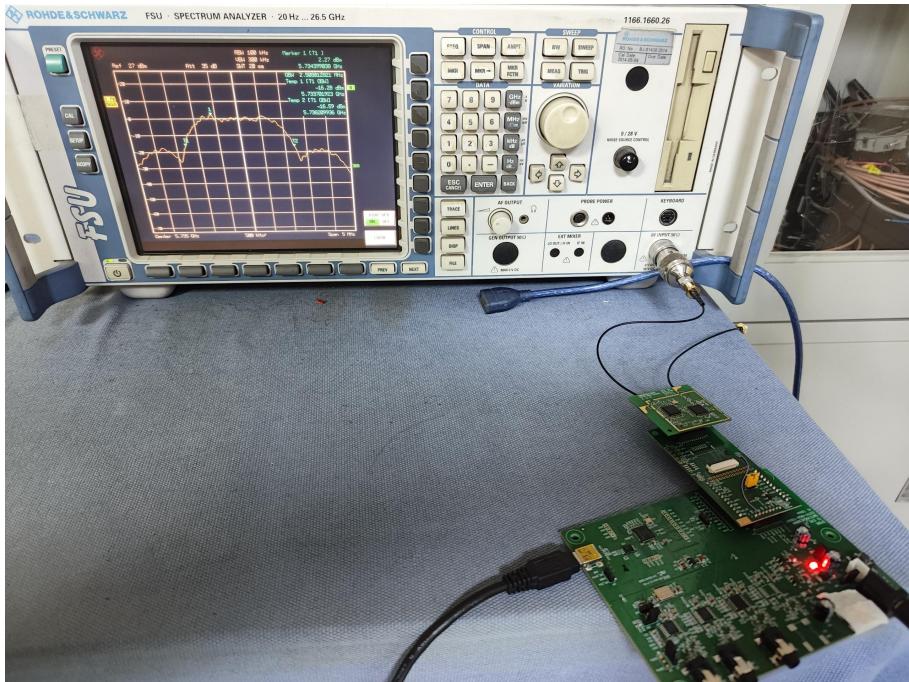

6.4 EUT Constructional Details

Refer to APPENDIX 2 PHOTOGRAPHS OF EUT for CQASZ20250701518E-01.

***** END OF REPORT *****