

**TEST REPORT****FCC Rules Part 15.247****Report Reference No.**.....: MTEB24110061-R**FCC ID**.....: 2A9P5-B8

Compiled by

( position+printed name+signature)....: File administrators Alisa Luo



Supervised by

( position+printed name+signature)....: Test Engineer Sunny Deng



Approved by

( position+printed name+signature)....: Manager Yvette Zhou

**Date of issue**.....: **Nov. 07, 2024****Representative Laboratory Name**.....: **Shenzhen Most Technology Service Co., Ltd.**Address .....: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,  
Nanshan, Shenzhen, Guangdong, China.**Applicant's name**.....: **Dongguan Qiaomai Electronics Co., Ltd.**Address .....: Room 401, Building 1, No. 25, Liuhua Road, Dongcheng Street,  
Dongguan City, Guangdong Province**Test specification/ Standard** .....: **FCC Rules Part 15.247**

TRF Originator .....: Shenzhen Most Technology Service Co., Ltd.

**Shenzhen Most Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....: Wireless Headphones

Trade Mark .....: RORSOU

Model/Type reference .....: B8

Listed Models .....: N/A

Modulation Type .....: GFSK, π/4DQPSK, 8DPSK

Operation Frequency .....: From 2402MHz to 2480MHz

Hardware Version .....: v1.2

Software Version .....: v138

Rating .....: DC 3.7V by Battery  
DC 5V by USB PortResult .....: **PASS**

**TEST REPORT**

Equipment under Test : Wireless Headphones

Model /Type : B8

Listed Models : N/A

Remark : N/A

Applicant : Dongguan Qiaomai Electronics Co., Ltd.

Address : Room 401, Building 1, No. 25, Liuhua Road, Dongcheng Street, Dongguan City, Guangdong Province

Manufacturer : Dongguan LEER Electronics Co., Ltd

Address : No. 27, Liuhua Road, Dongcheng Street, Dongguan City, Guangdong Province

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1 REVISION HISTORY .....</b>	<b>4</b>
<b>2 TEST STANDARDS .....</b>	<b>5</b>
<b>3 SUMMARY .....</b>	<b>6</b>
3.1 General Remarks .....	6
3.2 Product Description .....	6
3.3 Equipment Under Test .....	6
3.4 Short description of the Equipment under Test (EUT) .....	6
3.5 EUT operation mode .....	7
3.6 Block Diagram of Test Setup .....	7
3.7 Test Item (Equipment Under Test) Description* .....	7
3.8 Auxiliary Equipment (AE) Description .....	7
3.9 Antenna Information* .....	7
3.10 Related Submittal(s) / Grant (s) .....	8
3.11 Modifications .....	8
3.12 EUT configuration .....	8
<b>4 TEST ENVIRONMENT .....</b>	<b>9</b>
4.1 Address of the test laboratory .....	9
4.2 Environmental conditions .....	9
4.3 Summary of measurement results .....	10
4.4 Statement of the measurement uncertainty .....	10
4.5 Equipments Used during the Test .....	11
<b>5 TEST CONDITIONS AND RESULTS .....</b>	<b>12</b>
5.1 AC Power Conducted Emission.....	12
5.2 Radiated Emission .....	15
5.3 Maximum Peak Output Power .....	21
5.4 20dB Bandwidth .....	22
5.5 Frequency Separation.....	23
5.6 Number of hopping frequency .....	24
5.7 Time of Occupancy (Dwell Time) .....	25
5.8 Spurious RF Conducted Emission .....	26
5.9 Pseudorandom Frequency Hopping Sequence .....	27
5.10 Antenna Requirement .....	28
<b>6 TEST SETUP PHOTOS OF THE EUT .....</b>	<b>29</b>
<b>7 PHOTOS OF THE EUT .....</b>	<b>30</b>
APPENDIX I. Duty Cycle.....	31
APPENDIX II. Dwell Time .....	36
APPENDIX III. Number Of Hopping Channel.....	39
APPENDIX IV. Conducted Peak Output Power .....	41
APPENDIX V. 99% Bandwidth .....	42
APPENDIX VI. 20dB Bandwidth .....	44
APPENDIX VII. Carrier Frequencies Separation .....	46
APPENDIX VIII. Conducted Out Of Band Emission.....	48

## 1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2024.11.07	Initial Issue	Alisa Luo

## **2 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

### 3 SUMMARY

#### 3.1 General Remarks

Date of receipt of test sample	:	2024.11.03
Testing commenced on	:	2024.11.04
Testing concluded on	:	2024.11.07

#### 3.2 Product Description

Product Name:	Wireless Headphones
Model/Type reference:	B8
Power Supply:	DC 3.7V by Battery DC 5V by USB Port
Testing sample ID:	MTYP07327
<b>Bluetooth :</b>	
Supported Type:	Bluetooth BR/EDR
Modulation:	GFSK, π/4DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB antenna
Antenna gain:	1.68dBi

#### 3.3 Equipment Under Test

##### Power supply system utilised

Power supply voltage	:	<input type="radio"/>	230V / 50 Hz	<input type="radio"/>	120V / 60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		

DC 3.7V by Battery  
DC 5V by USB Port

#### 3.4 Short description of the Equipment under Test (EUT)

This is a Wireless Headphones For more details, refer to the user's manual of the EUT.


### 3.5 EUT operation mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

#### Operation Frequency:

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

### 3.6 Block Diagram of Test Setup

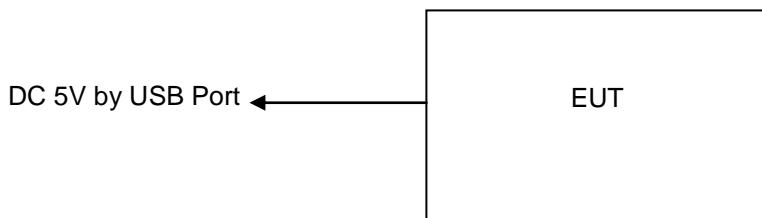

### 3.7 Test Item (Equipment Under Test) Description\*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A					
EUT B					

\*: declared by the applicant. According to customers information EUTs A and B are the same devices.

### 3.8 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1	Adapter	UP0512		

### 3.9 Antenna Information\*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	PCB antenna	2.4 – 2.5 GHz	---	1.68dBi
Antenna 2					

\*: declared by the applicant.

### 3.10 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### 3.11 Modifications

No modifications were implemented to meet testing criteria.

### 3.12 EUT configuration

**The following peripheral devices and interface cables were connected during the measurement:**

- supplied by the manufacturer

- Supplied by the lab

<input checked="" type="radio"/>	ADAPTER	M/N:	UP0512
		Manufacturer:	Salcomp (Shenzhen) Co., Ltd.

## **4 TEST ENVIRONMENT**

### **4.1 Address of the test laboratory**

#### **Shenzhen Most Technology Service Co., Ltd.**

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.  
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010  
SVSWR requirement for radiated emission above 1GHz.

#### **Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC-Designation No.: CN1315**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### **A2LA-Lab Cert. No.: 6343.01**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### **4.2 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

### 4.3 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(a)(1)	Carrier Frequency separation	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.247(a)(1)	Number of Hopping channels	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Full	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	Compliant
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.247(a)(1)	Spectrumbandwidth of aFHSS system20dB bandwidth	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(b)(1)	Maximum outputpower	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	Band edgecompliance conducted	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Compliant
§15.205	Band edgecompliance radiated	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	TX spuriousemissions conducted	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	TX spuriousemissions radiated	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.209(a)	TX spurious Emissions radiated Below 1GHz	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.107(a) §15.207	Conducted Emissions 9KHz-30 MHz	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Middle	Compliant

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

### 4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 4.5 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware versions	Last Cal.
1.	L.I.S.N.	R&S	ENV216	100093	/	2024/03/15
2	Three-phase artificial power network	Schwarzbeck Mess	NNLK8129	8129178	/	2024/03/15
3.	Receiver	R&S	ESCI	100492	V3.0-10-2	2024/03/15
4	Receiver	R&S	ESPI	101202	V3.0-10-2	2024/03/15
5	Spectrum analyzer	Agilent	9020A	MT-E306	A14.16	2024/03/15
6	Bilong Antenna	Sunol Sciences	JB3	A121206	/	2024/08/15
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	/	2024/03/15
8	Loop antenna	Beijing Daze	ZN30900B	/	/	2024/03/15
9	Horn antenna	R&S	OBH100400	26999002	/	2024/03/15
10	Wireless Communication Test Set	R&S	CMW500	/	CMW-BASE-3.7.21	2024/03/15
11	Spectrum analyzer	R&S	FSP	100019	V4.40 SP2	2024/03/15
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	/	2024/03/15
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	/	2024/03/15
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	/	2024/03/15
15	Pre-amplifier	Agilent	83051A	MT-E392	/	2024/03/15
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	/	2024/03/15
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	/	2024/03/15
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	/	2024/03/15
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	/	2024/03/15
20	Power meter	R&S	NRVS	100444	/	2024/03/15

Note: The Cal.Interval was one year.

## 5 TEST CONDITIONS AND RESULTS

### 5.1 AC Power Conducted Emission

#### TEST CONFIGURATION

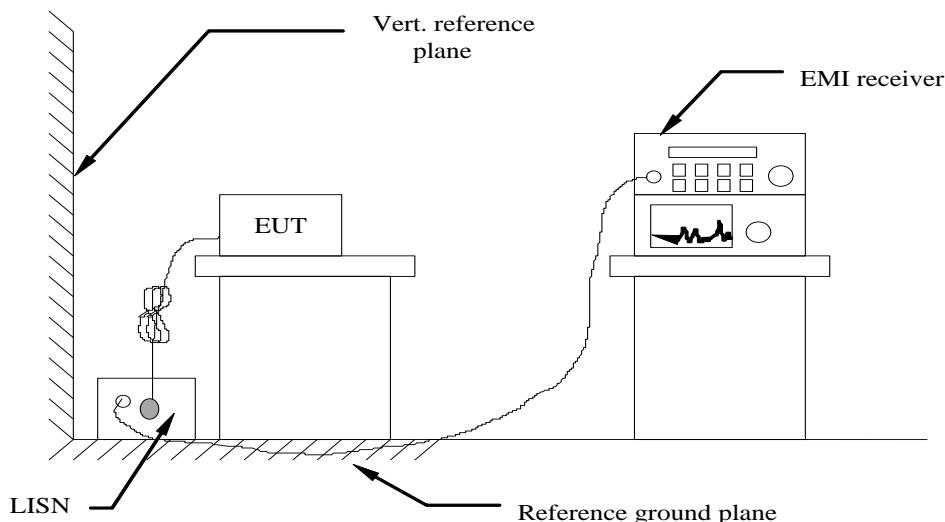

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 5V power, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

## Remark:

1. GFSK,  $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK Middle Channel was reported as below:

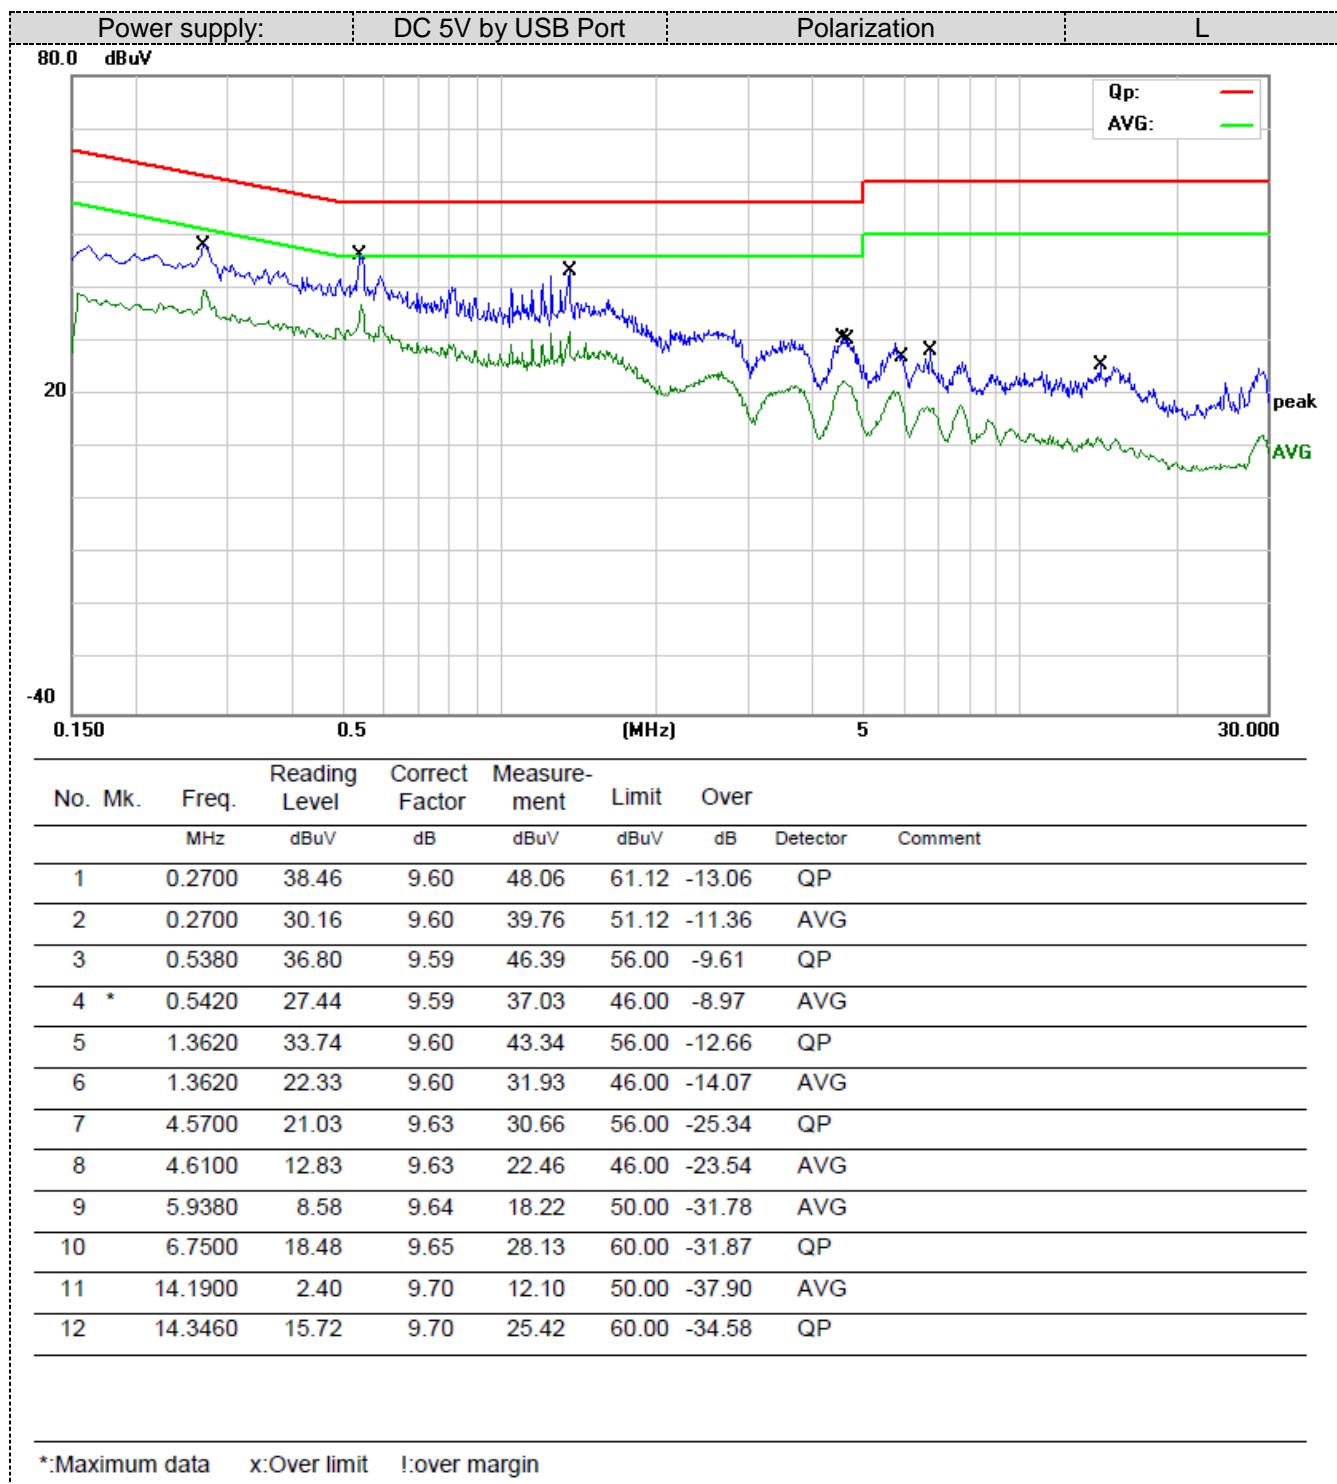


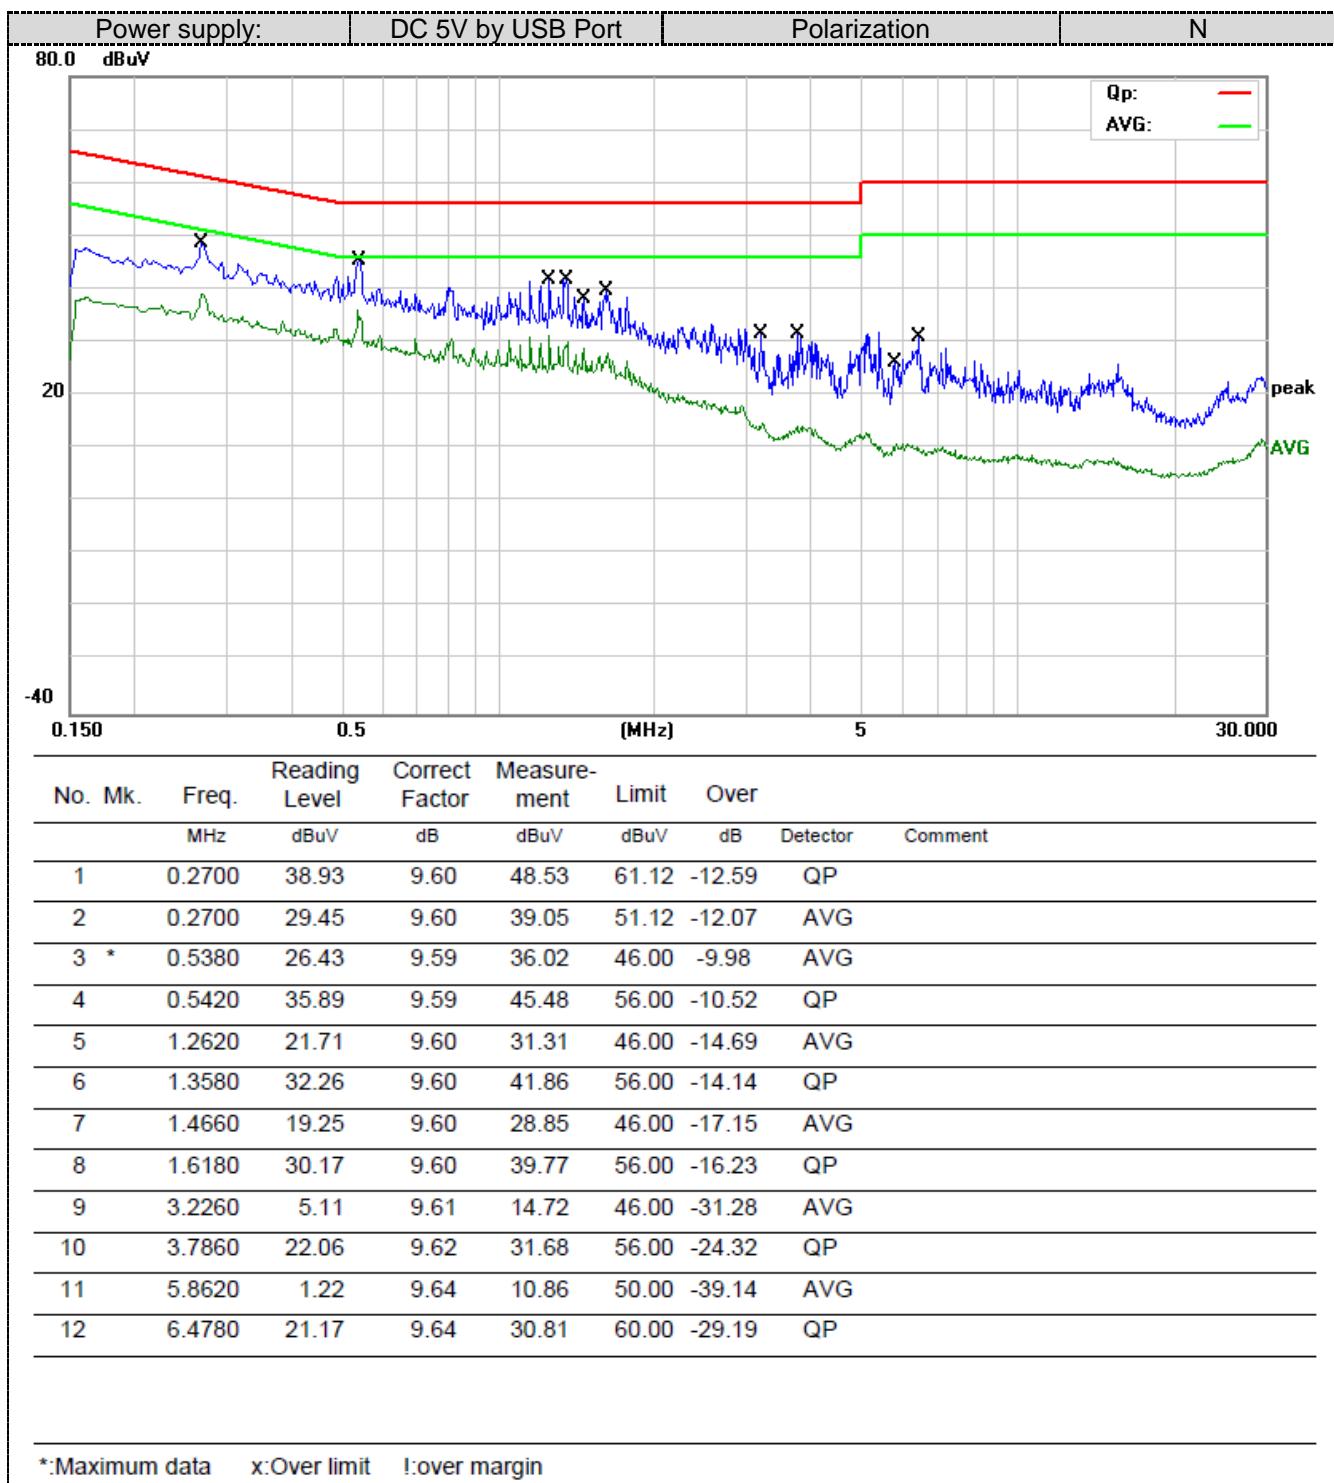


## 5.2 Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

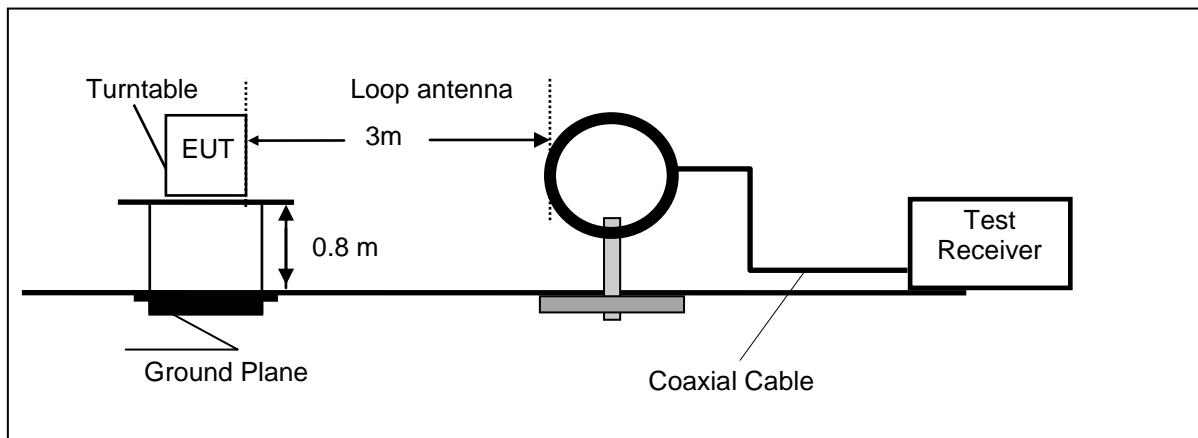

Frequency range 30MHz – 1000MHz

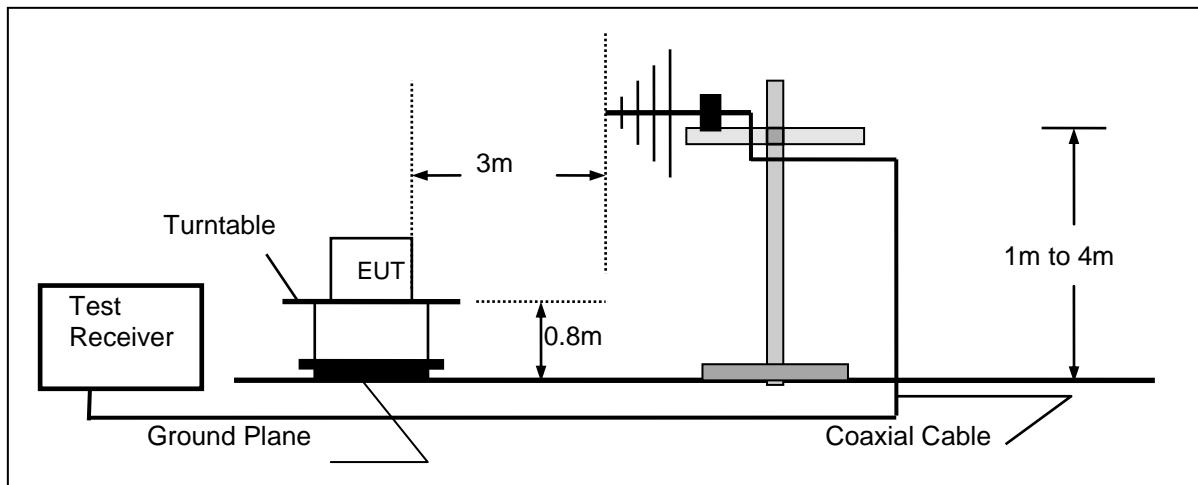

Frequency range above 1GHz-25GHz

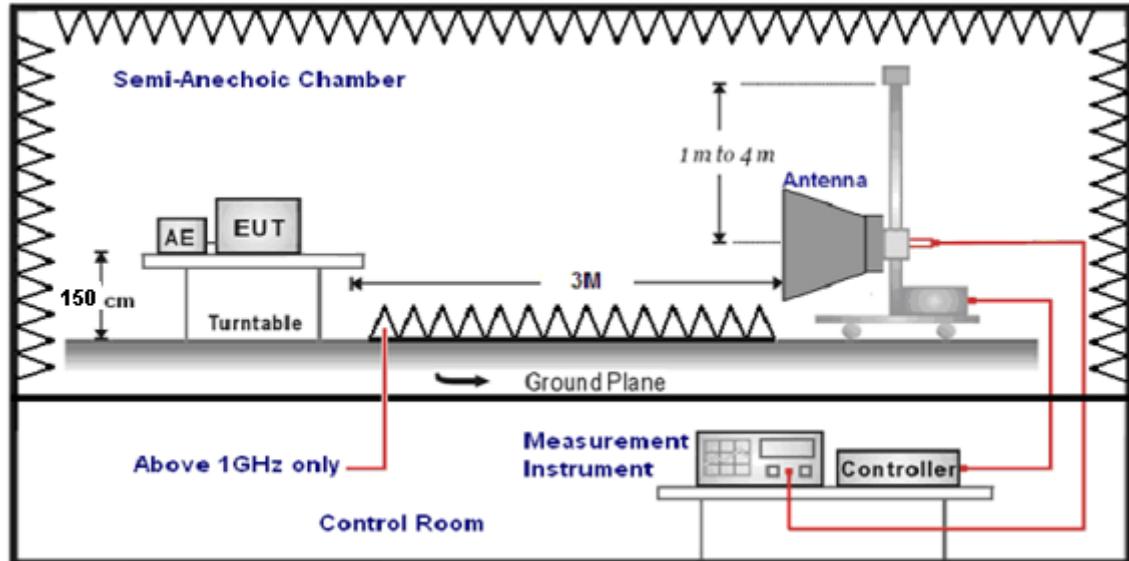

## TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz; the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

## Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$Transd=AF + CL - AG$$

## RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


## TEST RESULTS

### Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. We measured Radiated Emission at GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
3. For below 1GHz testing recorded worst at GFSK DH5 middle channel.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
5. Remark: Result=Reading value+Factor

### For 30MHz-1GHz

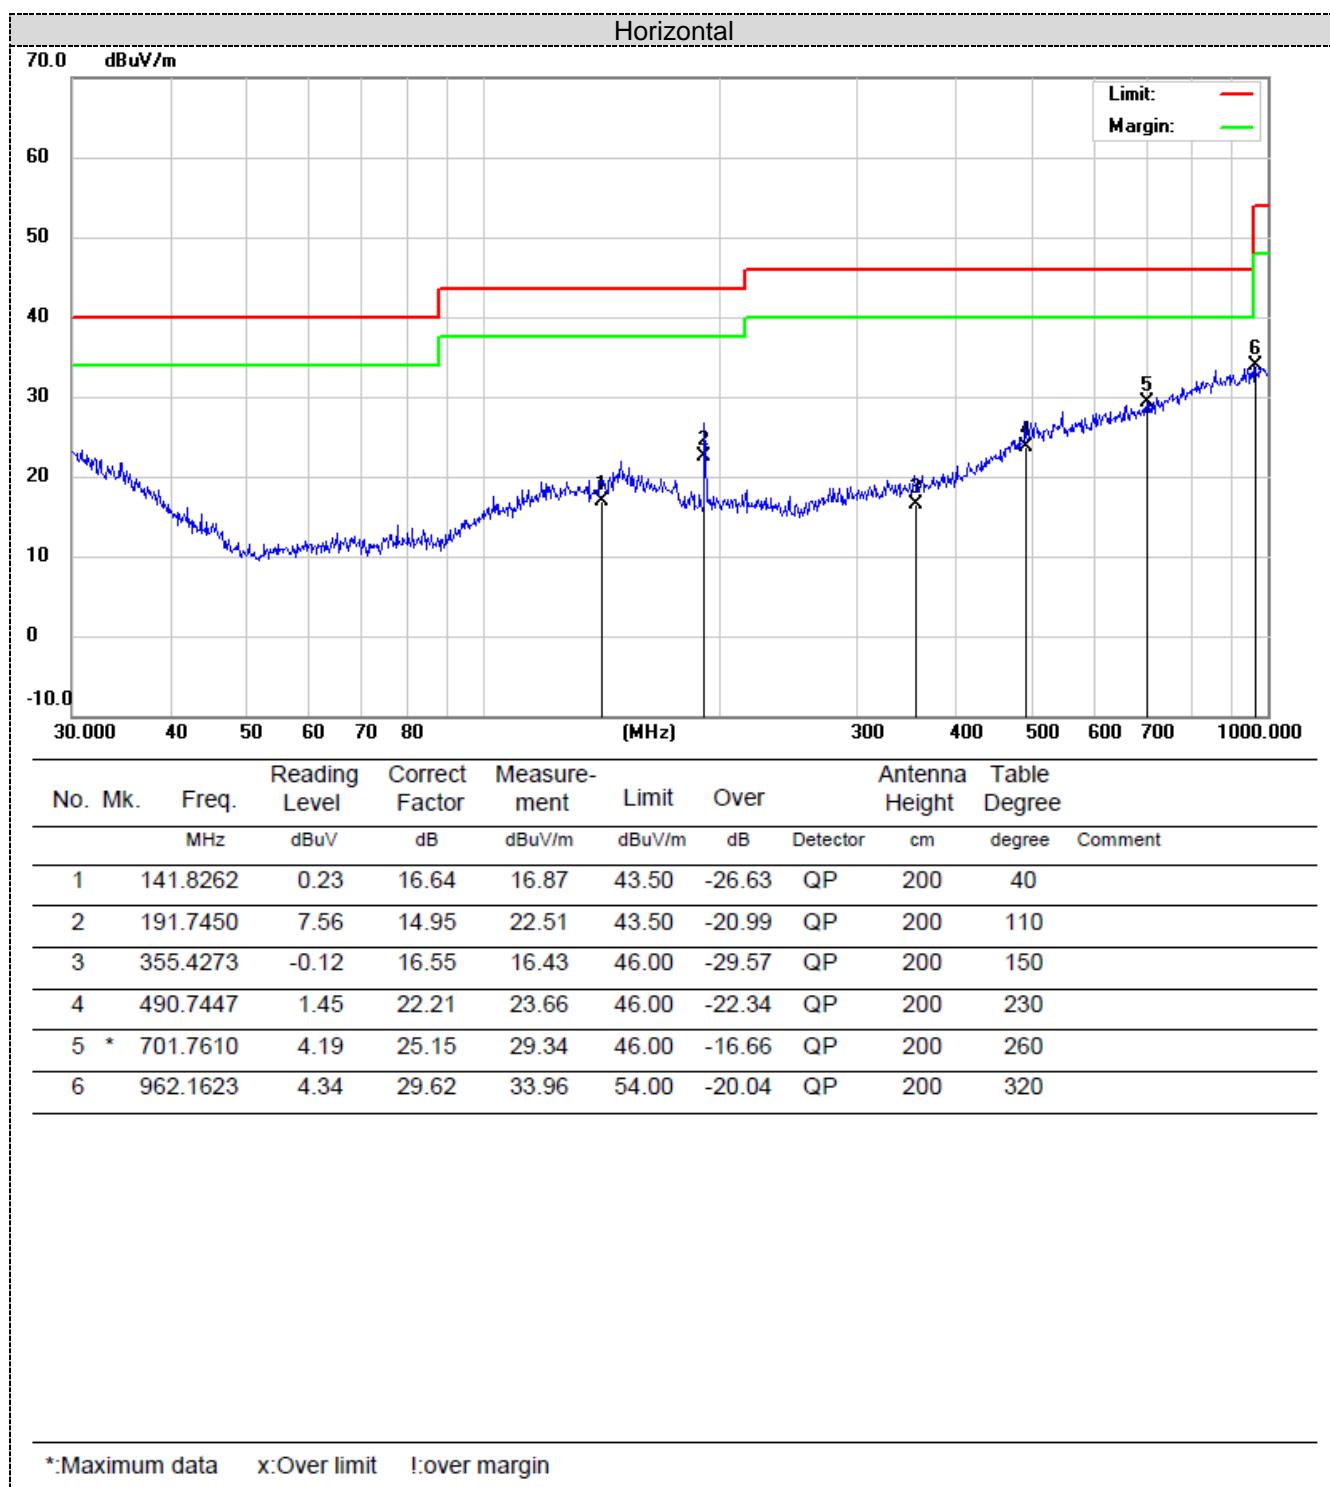

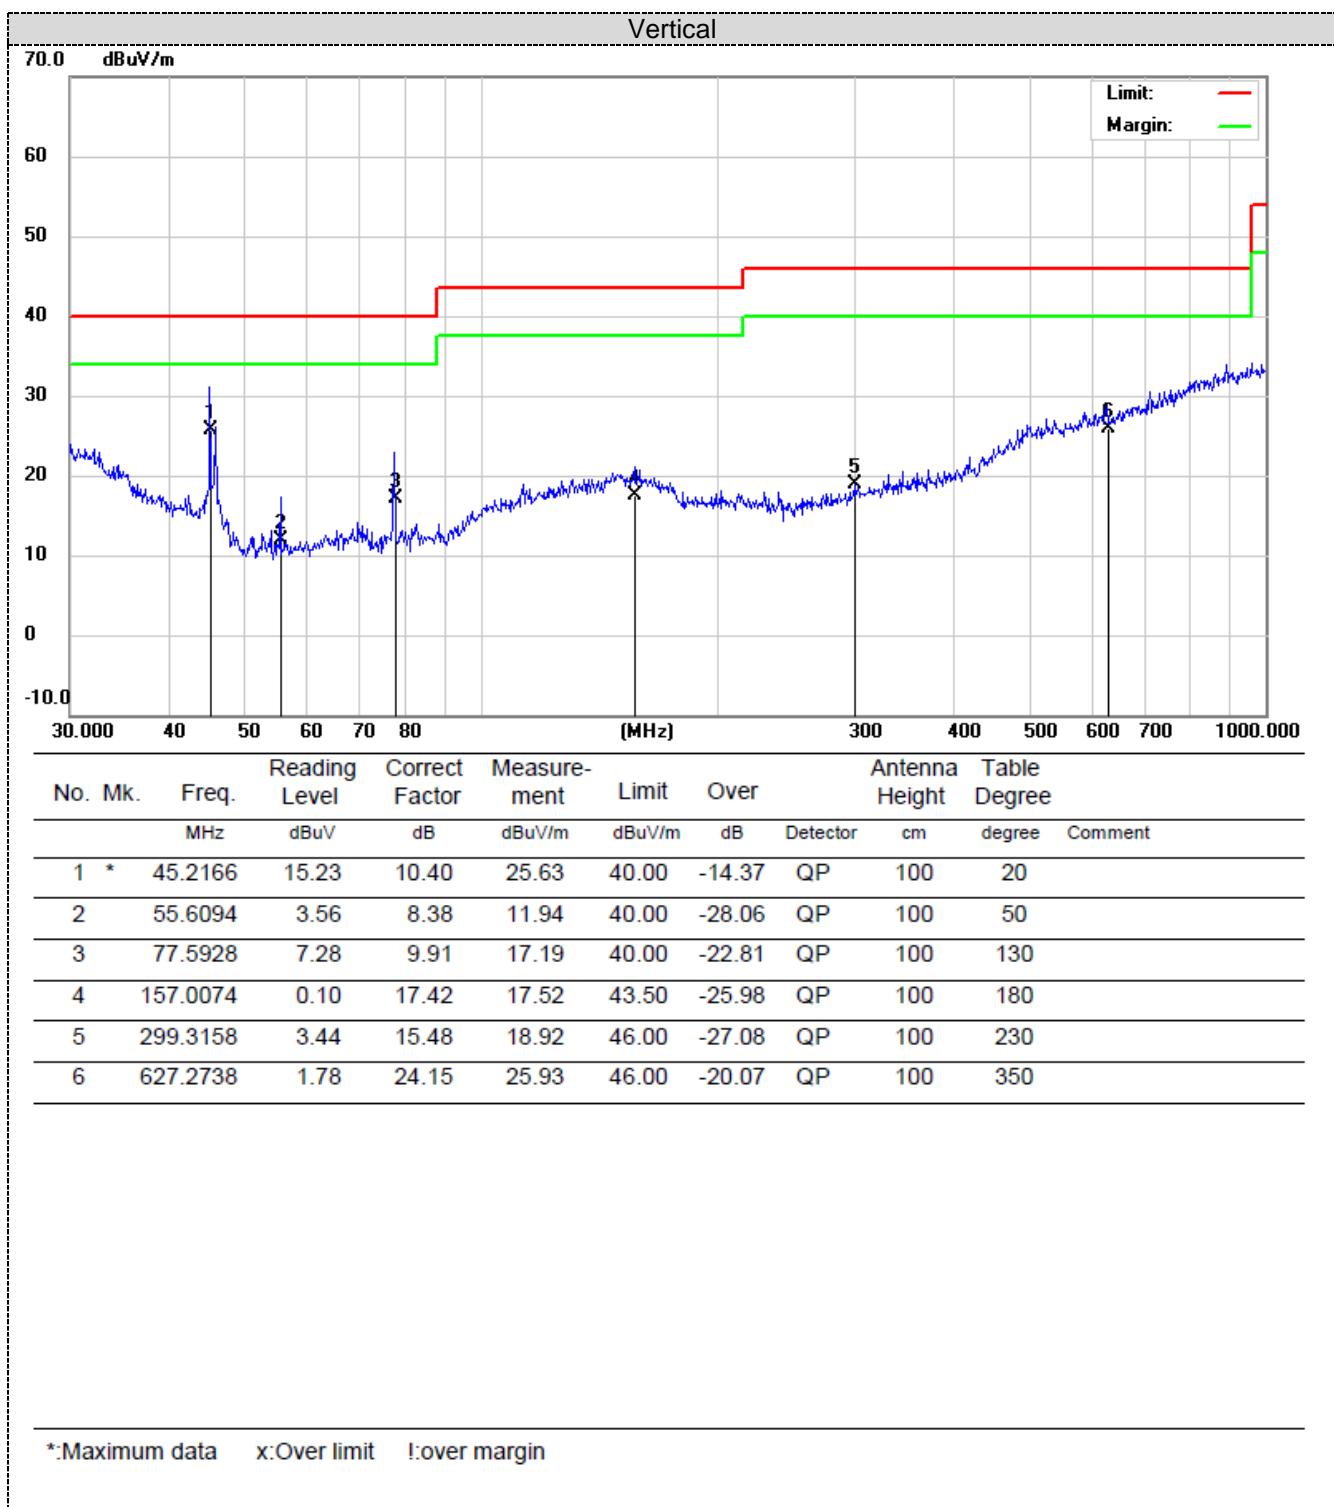

## For 1GHz to 25GHz

Note: GFSK, π/4DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

## GFSK (above 1GHz)

Frequency(MHz):		2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	52.54	PK	74	21.46	50.64	31.42	6.98	36.5
4804	43.97	AV	54	10.03	42.07	31.42	6.98	36.5
7206	52.38	PK	74	21.62	41.78	37.03	8.87	35.3
7206	43.17	AV	54	10.83	32.57	37.03	8.87	35.3

Frequency(MHz):		2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	52.59	PK	74	21.41	50.69	31.42	6.98	36.5
4804	45.49	AV	54	8.51	43.59	31.42	6.98	36.5
7206	50.9	PK	74	23.1	40.3	37.03	8.87	35.3
7206	43.44	AV	54	10.56	32.84	37.03	8.87	35.3

Frequency(MHz):		2441		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	56.48	PK	74	17.52	54.42	30.98	7.58	36.5
4882	45.19	AV	54	8.81	43.13	30.98	7.58	36.5
7323	52.39	PK	74	21.61	41.47	37.66	8.56	35.3
7323	41.09	AV	54	12.91	30.17	37.66	8.56	35.3

Frequency(MHz):		2441		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	53.66	PK	74	20.34	51.6	30.98	7.58	36.5
4882	42.62	AV	54	11.38	40.56	30.98	7.58	36.5
7323	53.43	PK	74	20.57	42.51	37.66	8.56	35.3
7323	41.51	AV	54	12.49	30.59	37.66	8.56	35.3

Frequency(MHz):		2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	56.36	PK	74	17.64	53.29	31.47	7.8	36.2
4960	46.02	AV	54	7.98	42.95	31.47	7.8	36.2
7440	56.26	PK	74	17.74	44.52	38.32	8.72	35.3
7440	42.42	AV	54	11.58	30.68	38.32	8.72	35.3

Frequency(MHz):		2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	56.65	PK	74	17.35	53.58	31.47	7.8	36.2
4960	46.76	AV	54	7.24	43.69	31.47	7.8	36.2
7440	52.6	PK	74	21.4	40.86	38.32	8.72	35.3
7440	42.89	AV	54	11.11	31.15	38.32	8.72	35.3

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier

3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

### Results of Band Edges Test (Radiated)

Note: GFSK,  $\pi/4$ DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

#### GFSK

Frequency(MHz):		2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390	57.35	PK	74	16.65	62.76	27.49	3.32	36.22
2390	39.34	AV	54	14.66	44.75	27.49	3.32	36.22
Frequency(MHz):		2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390	54.83	PK	74	19.17	60.24	27.49	3.32	36.22
2390	40.71	AV	54	13.29	46.12	27.49	3.32	36.22
Frequency(MHz):		2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.5	55.22	PK	74	18.78	60.73	27.45	3.38	36.34
2483.5	42.44	AV	54	11.56	47.95	27.45	3.38	36.34
Frequency(MHz):		2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.5	58.21	PK	74	15.79	63.72	27.45	3.38	36.34
2483.5	41.38	AV	54	12.62	46.89	27.45	3.38	36.34

#### REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)- Pre-amplifier
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.

### 5.3 Maximum Peak Output Power


#### Limit

The Maximum Peak Output Power Measurement is 125mW (20.97).

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the powersensor.

#### Test Configuration



#### Test Results

See Appendix IV

## 5.4 20dB Bandwidth

### Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### Test Configuration



### Test Results

See Appendix VI

## 5.5 Frequency Separation


### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $2/3 * 20$ dB bandwidth of the hopping channel, whichever is greater.

### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

### TEST CONFIGURATION



### TEST RESULTS

See Appendix VII

## 5.6 Number of hopping frequency


### Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

### Test Configuration



### Test Results

See Appendix III

## 5.7 Time of Occupancy (Dwell Time)


### Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

### Test Configuration



### Test Results

See Appendix II

## 5.8 Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and mwasure frequenyy range from 9KHz to 25GHz.

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### Test Results

See Appendix VIII

## 5.9 Pseudorandom Frequency Hopping Sequence

### TEST APPLICABLE


#### For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nice-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence: $2^9 - 1 = 511$  bits
- Longest sequence of zeros:8(non-inverted signal)

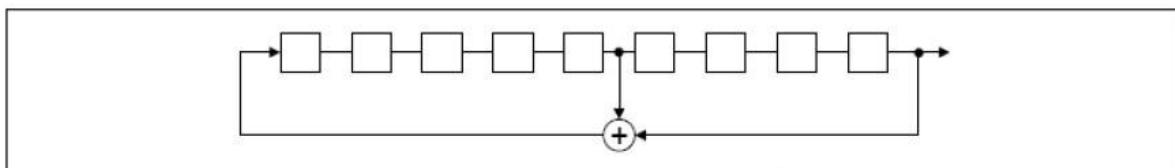

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

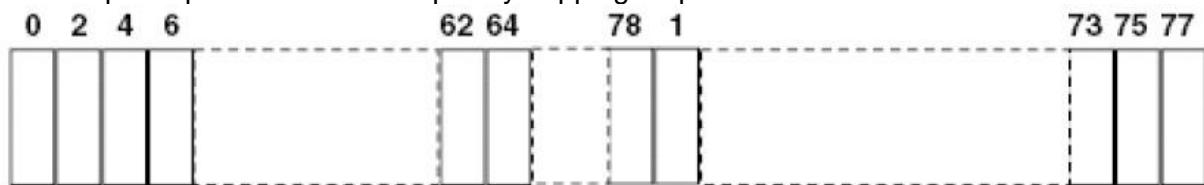

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

## 5.10 Antenna Requirement

### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **Refer to statement below for compliance**



The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **Antenna Connected Construction**

The directional gains of antenna used for transmitting is 1.68dBi, and the antenna is an PCB antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

Results: Compliance.

## **6 Test Setup Photos of the EUT**

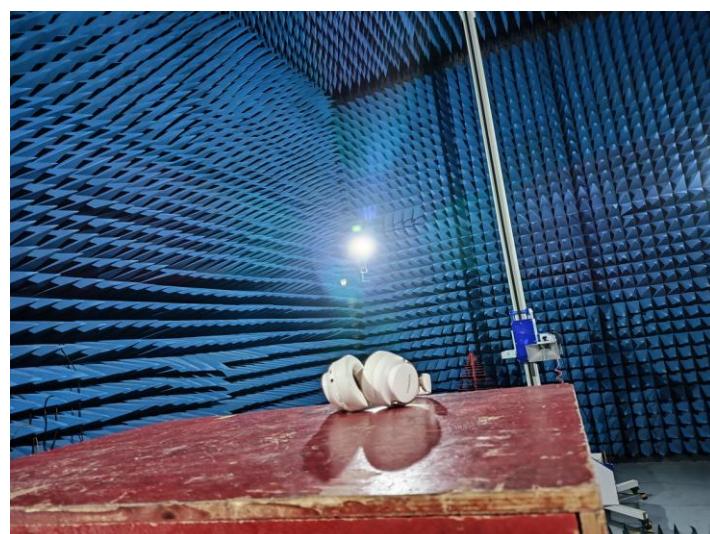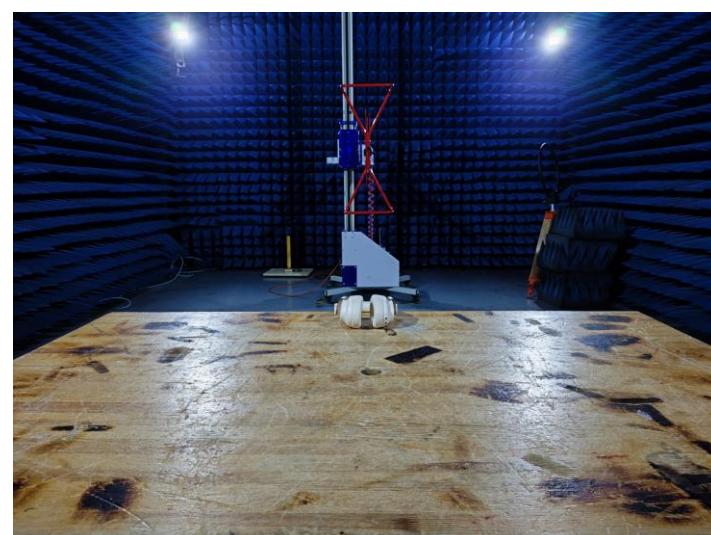

## **7 Photos of the EUT**


See related photo report.


## APPENDIX I. Duty Cycle


### Test Result


Modulation	packets	Channel	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
GFSK	DH5	0	0.102	0.625	16.26	0.1626	7.8888
		39	2.886	3.748	77.00	0.7700	1.1351
		78	2.886	3.748	77.00	0.7700	1.1351
$\pi/4$ DQPSK	2-DH5	0	2.890	3.748	77.11	0.7711	1.1289
		39	2.890	3.748	77.11	0.7711	1.1289
		78	2.890	3.748	77.11	0.7711	1.1289
8DPSK	3-DH5	0	2.892	3.748	77.16	0.7716	1.1261
		39	2.892	3.748	77.16	0.7716	1.1261
		78	2.894	3.748	77.21	0.7721	1.1233


### Test Graphs

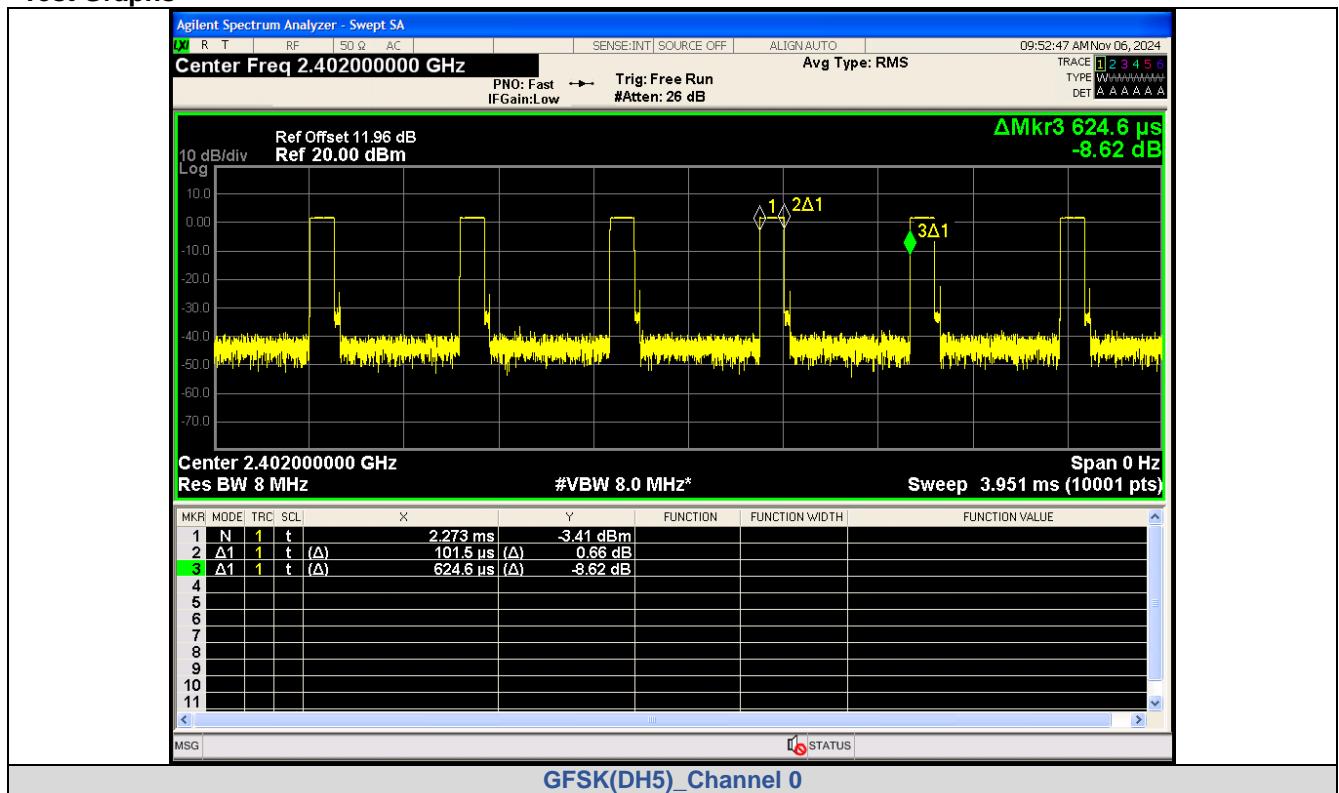

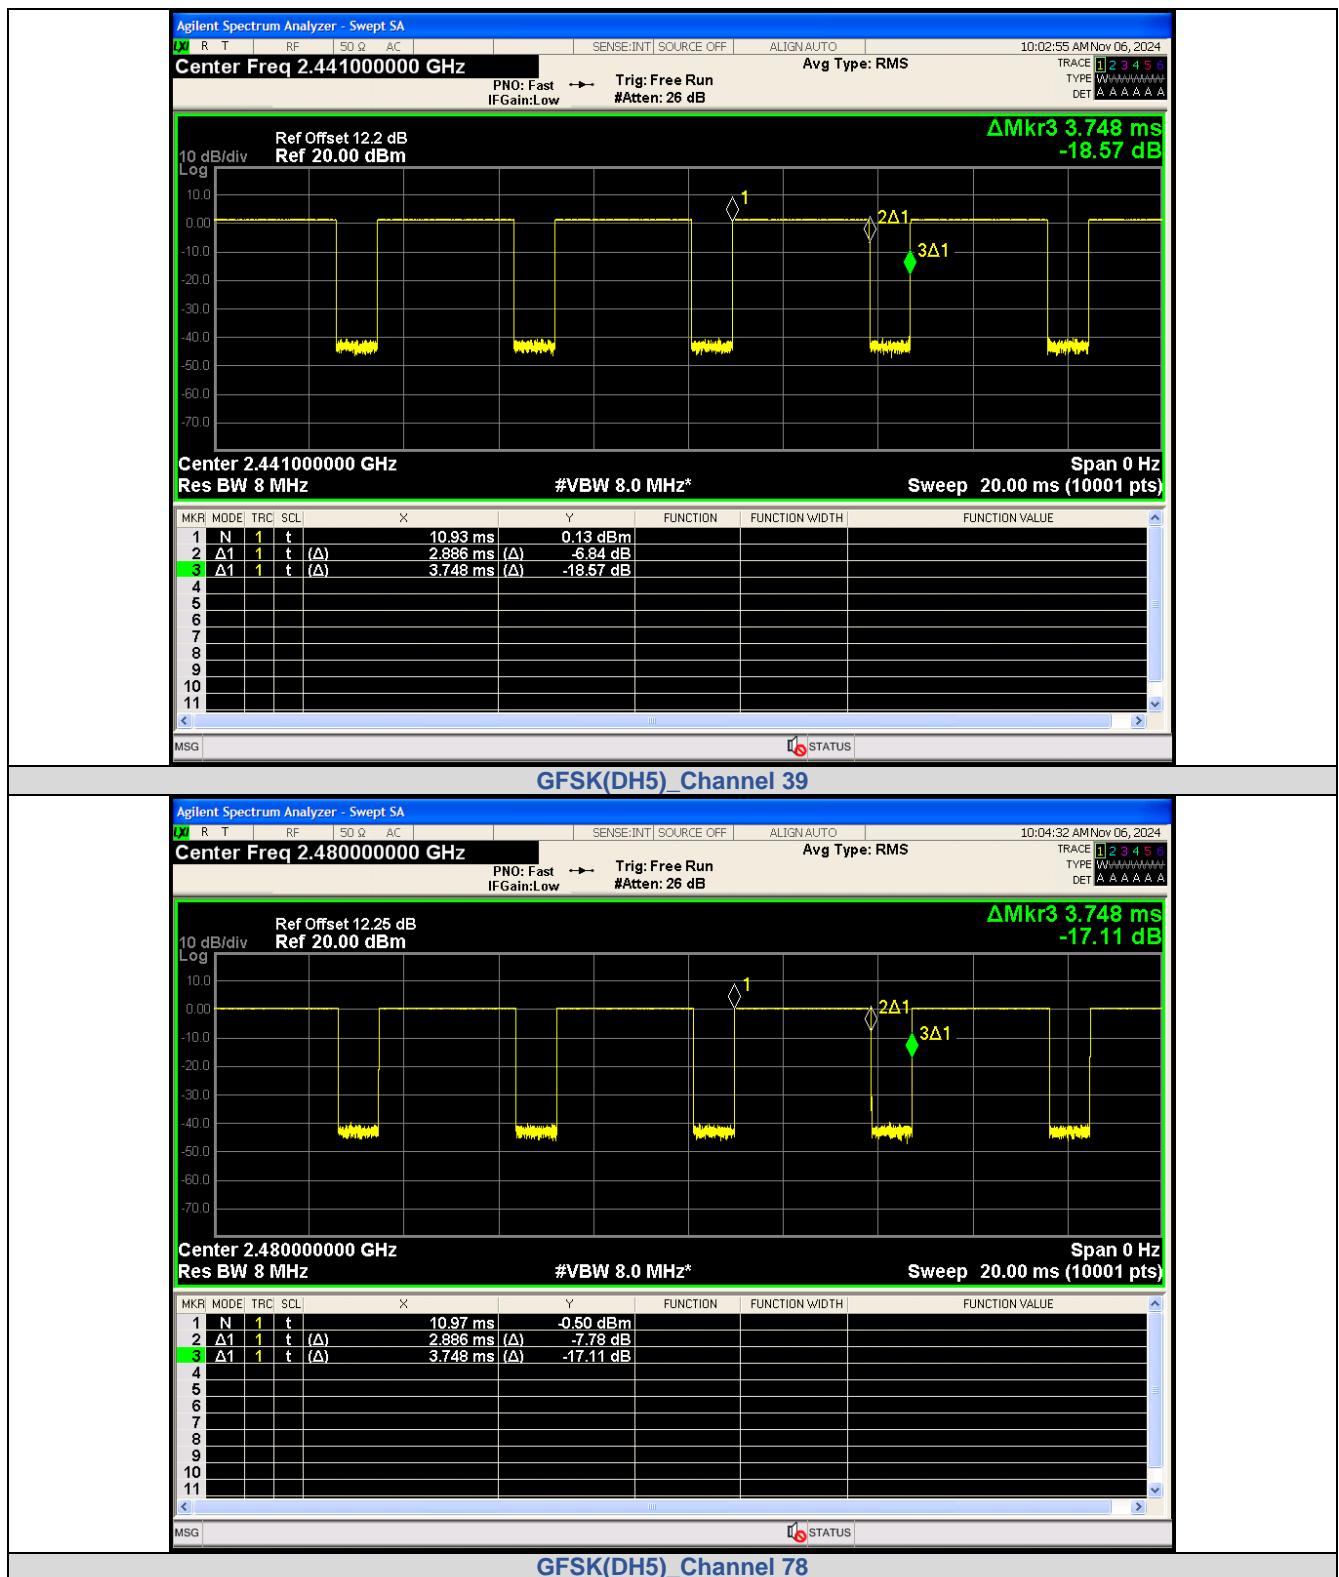

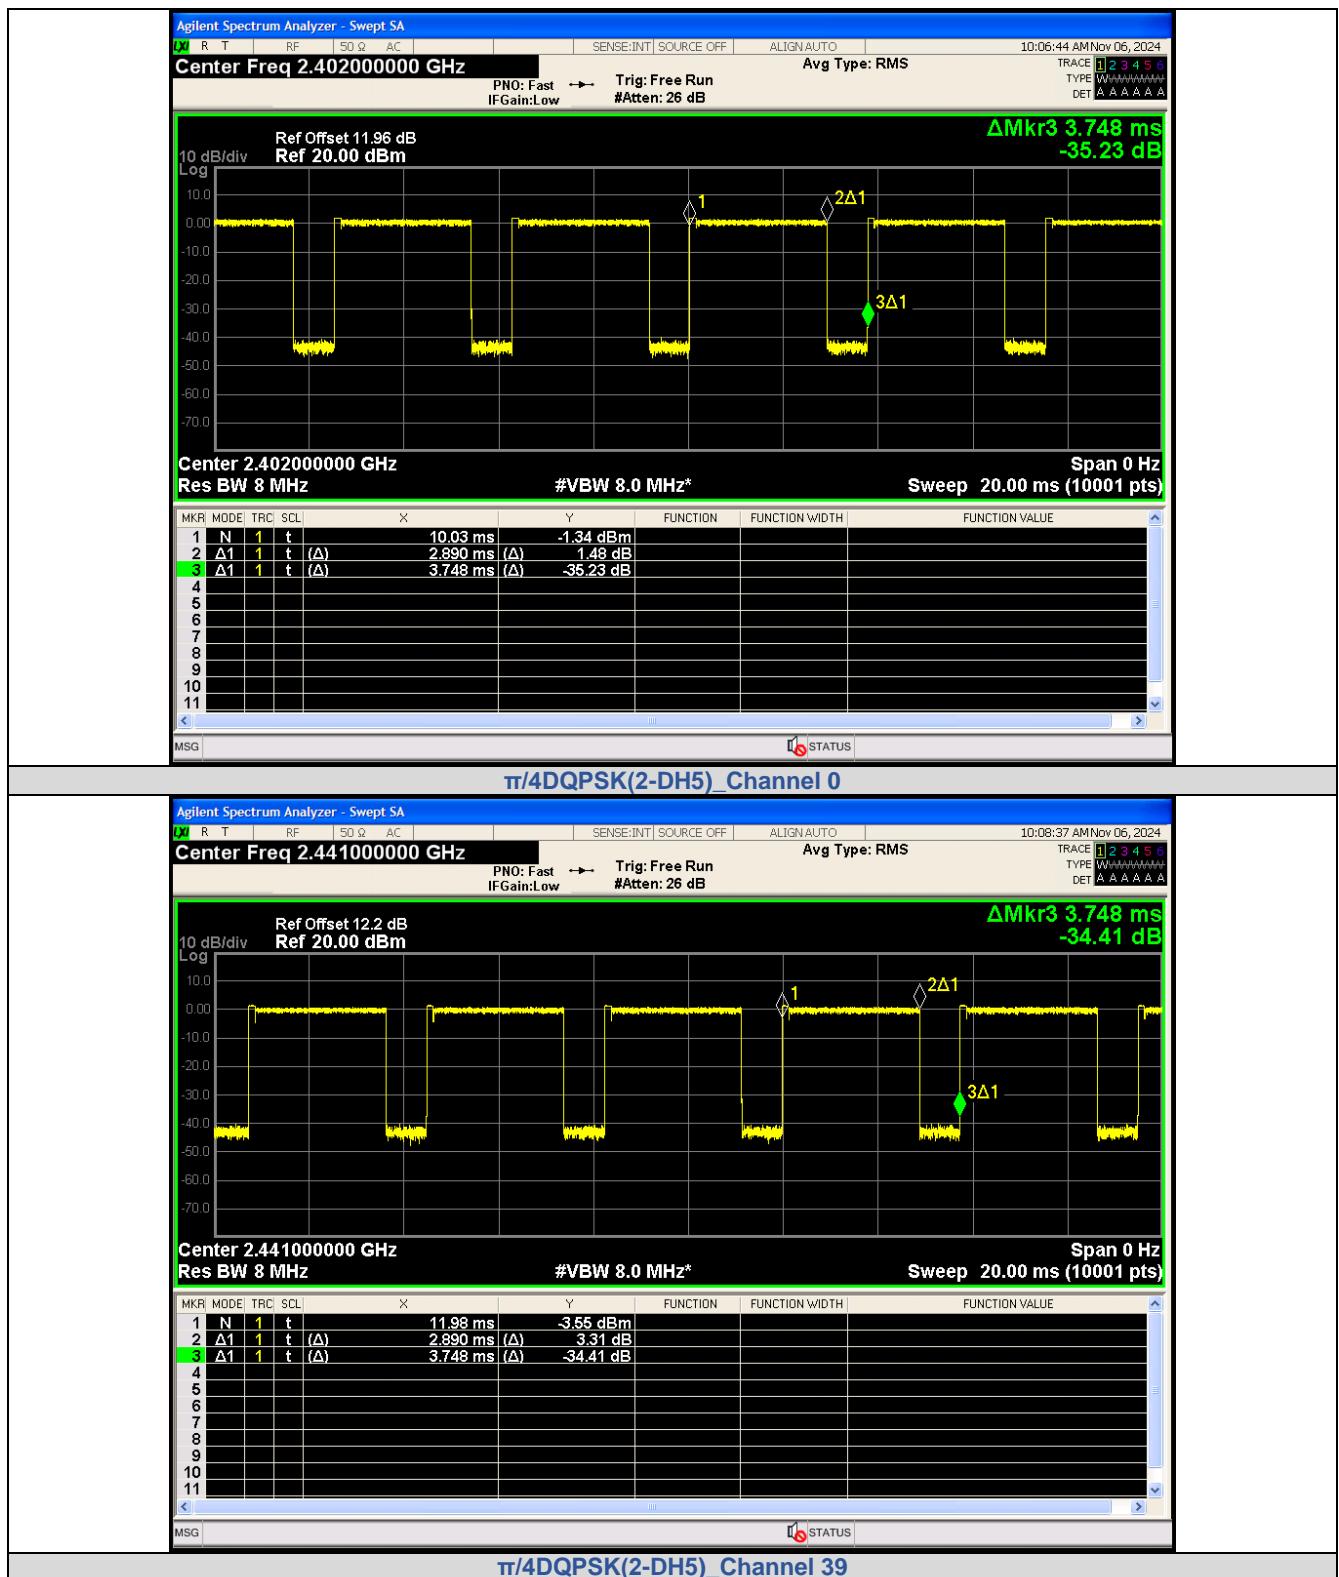

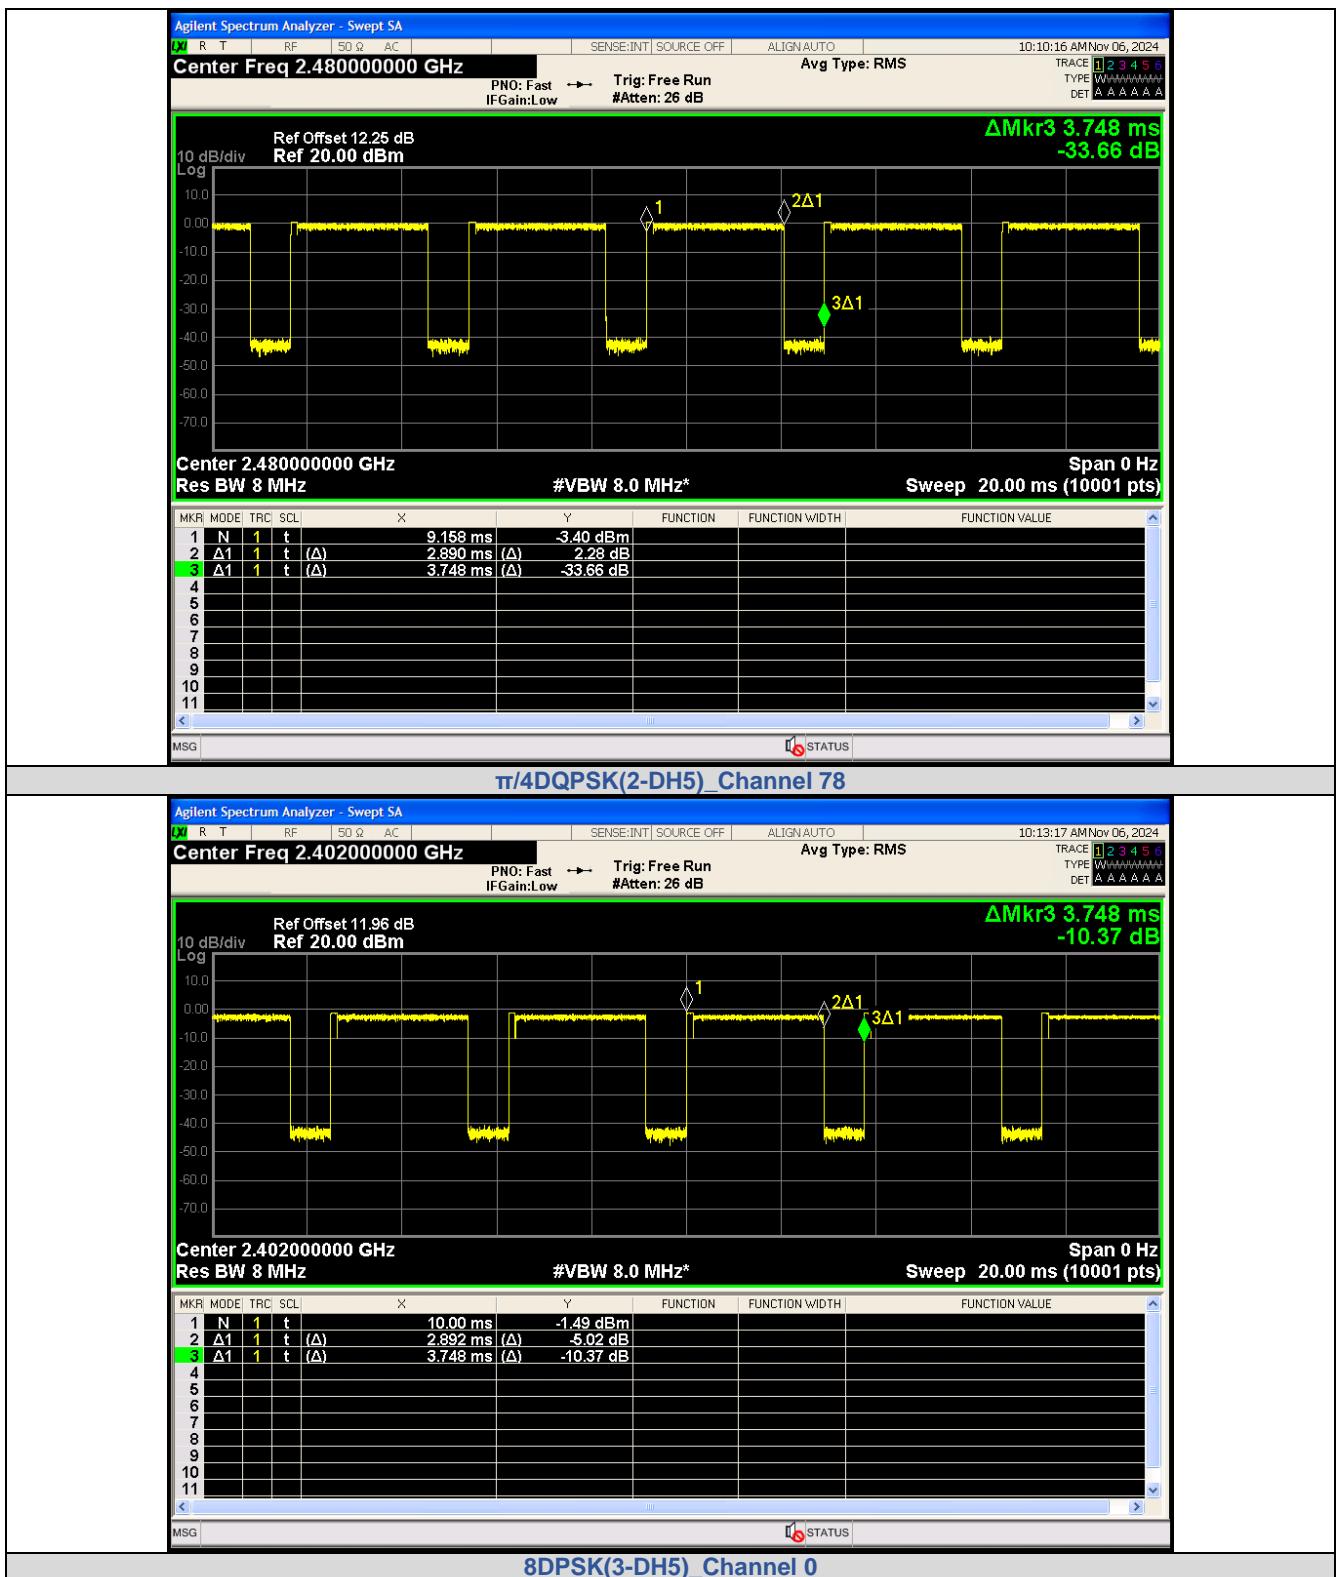

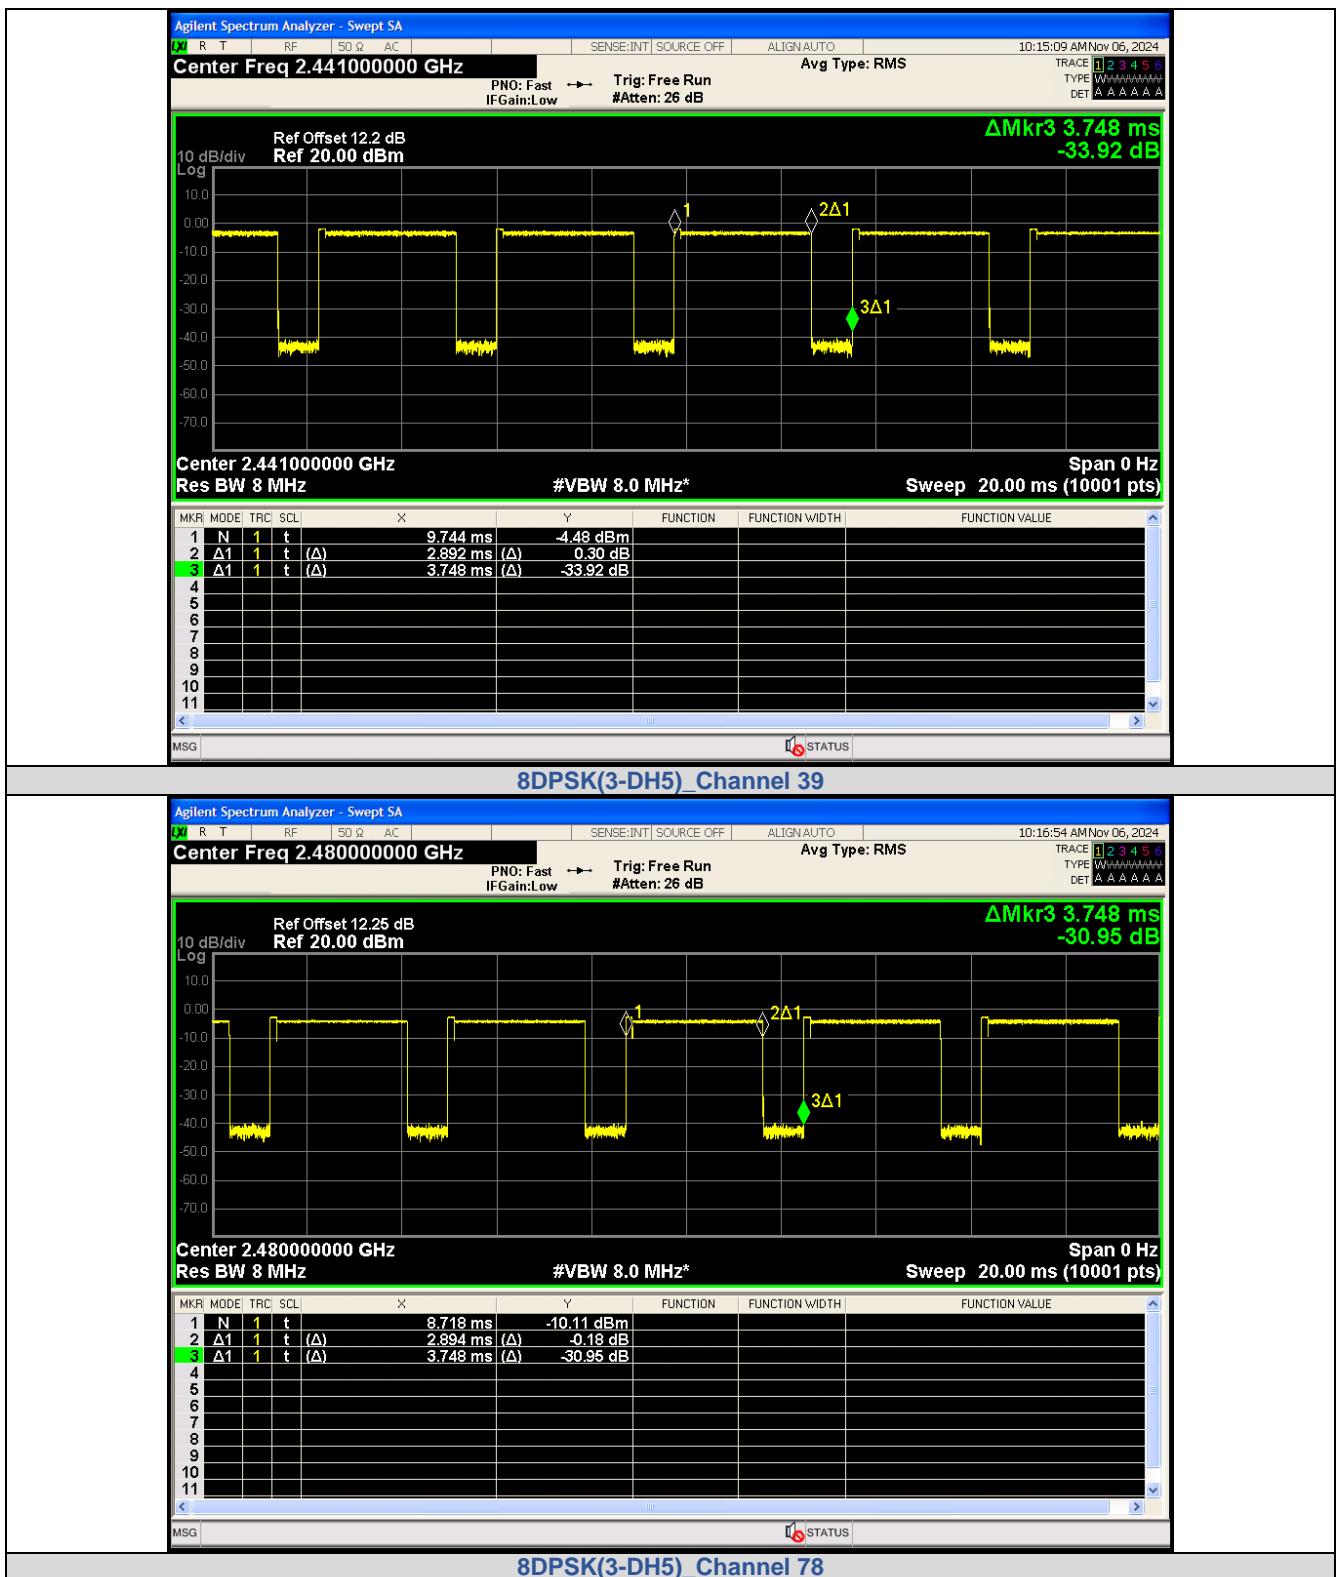



## APPENDIX II. Dwell Time


### Test Result

Modulation	Packet	Channel	Pulse Width (ms)	Number of Pulses in 31.6 seconds	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH1	CH39 (2441MHz)	0.3816	316	120.59	< 400	PASS
	DH3		1.656	164	271.58		PASS
	DH5		2.880	112	322.56		PASS
π/4DQPSK	2-DH1	CH39 (2441MHz)	0.3900	311	121.29	< 400	PASS
	2-DH3		1.632	154	251.33		PASS
	2-DH5		2.896	119	344.62		PASS
8DPSK	3-DH1	CH39 (2441MHz)	0.3912	316	123.62	< 400	PASS
	3-DH3		1.656	162	268.27		PASS
	3-DH5		2.896	107	309.87		PASS


### Test Graphs

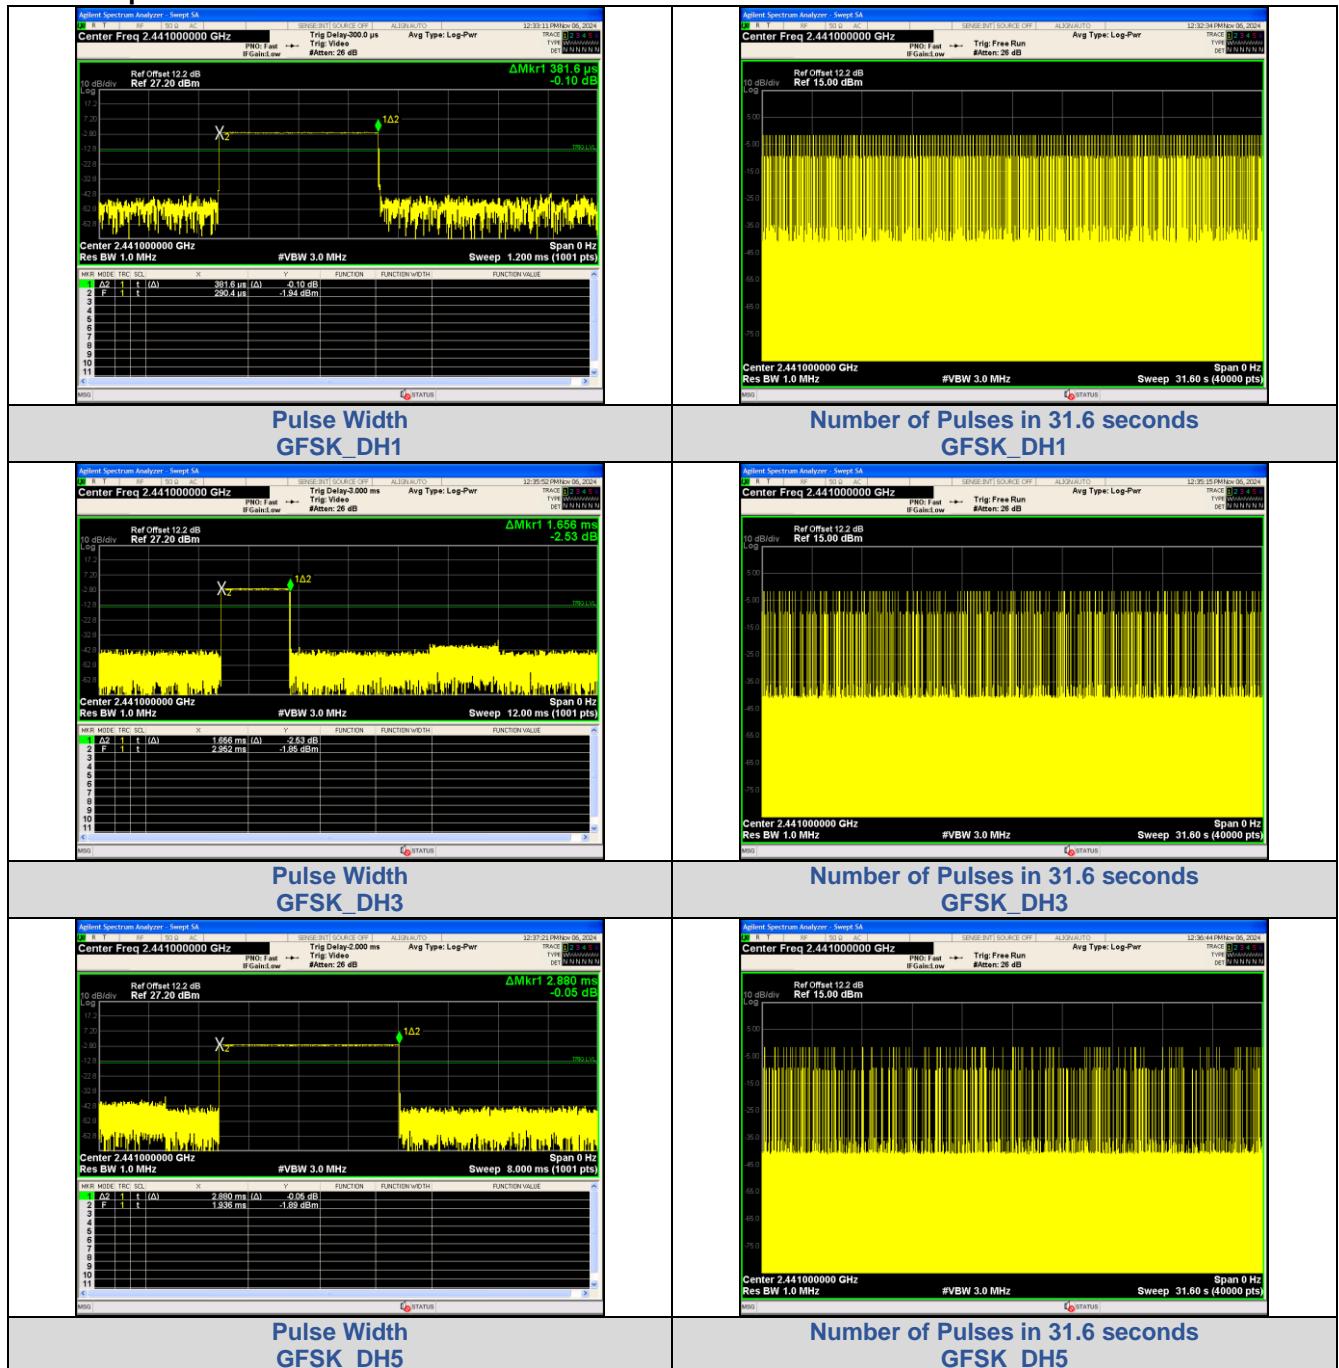

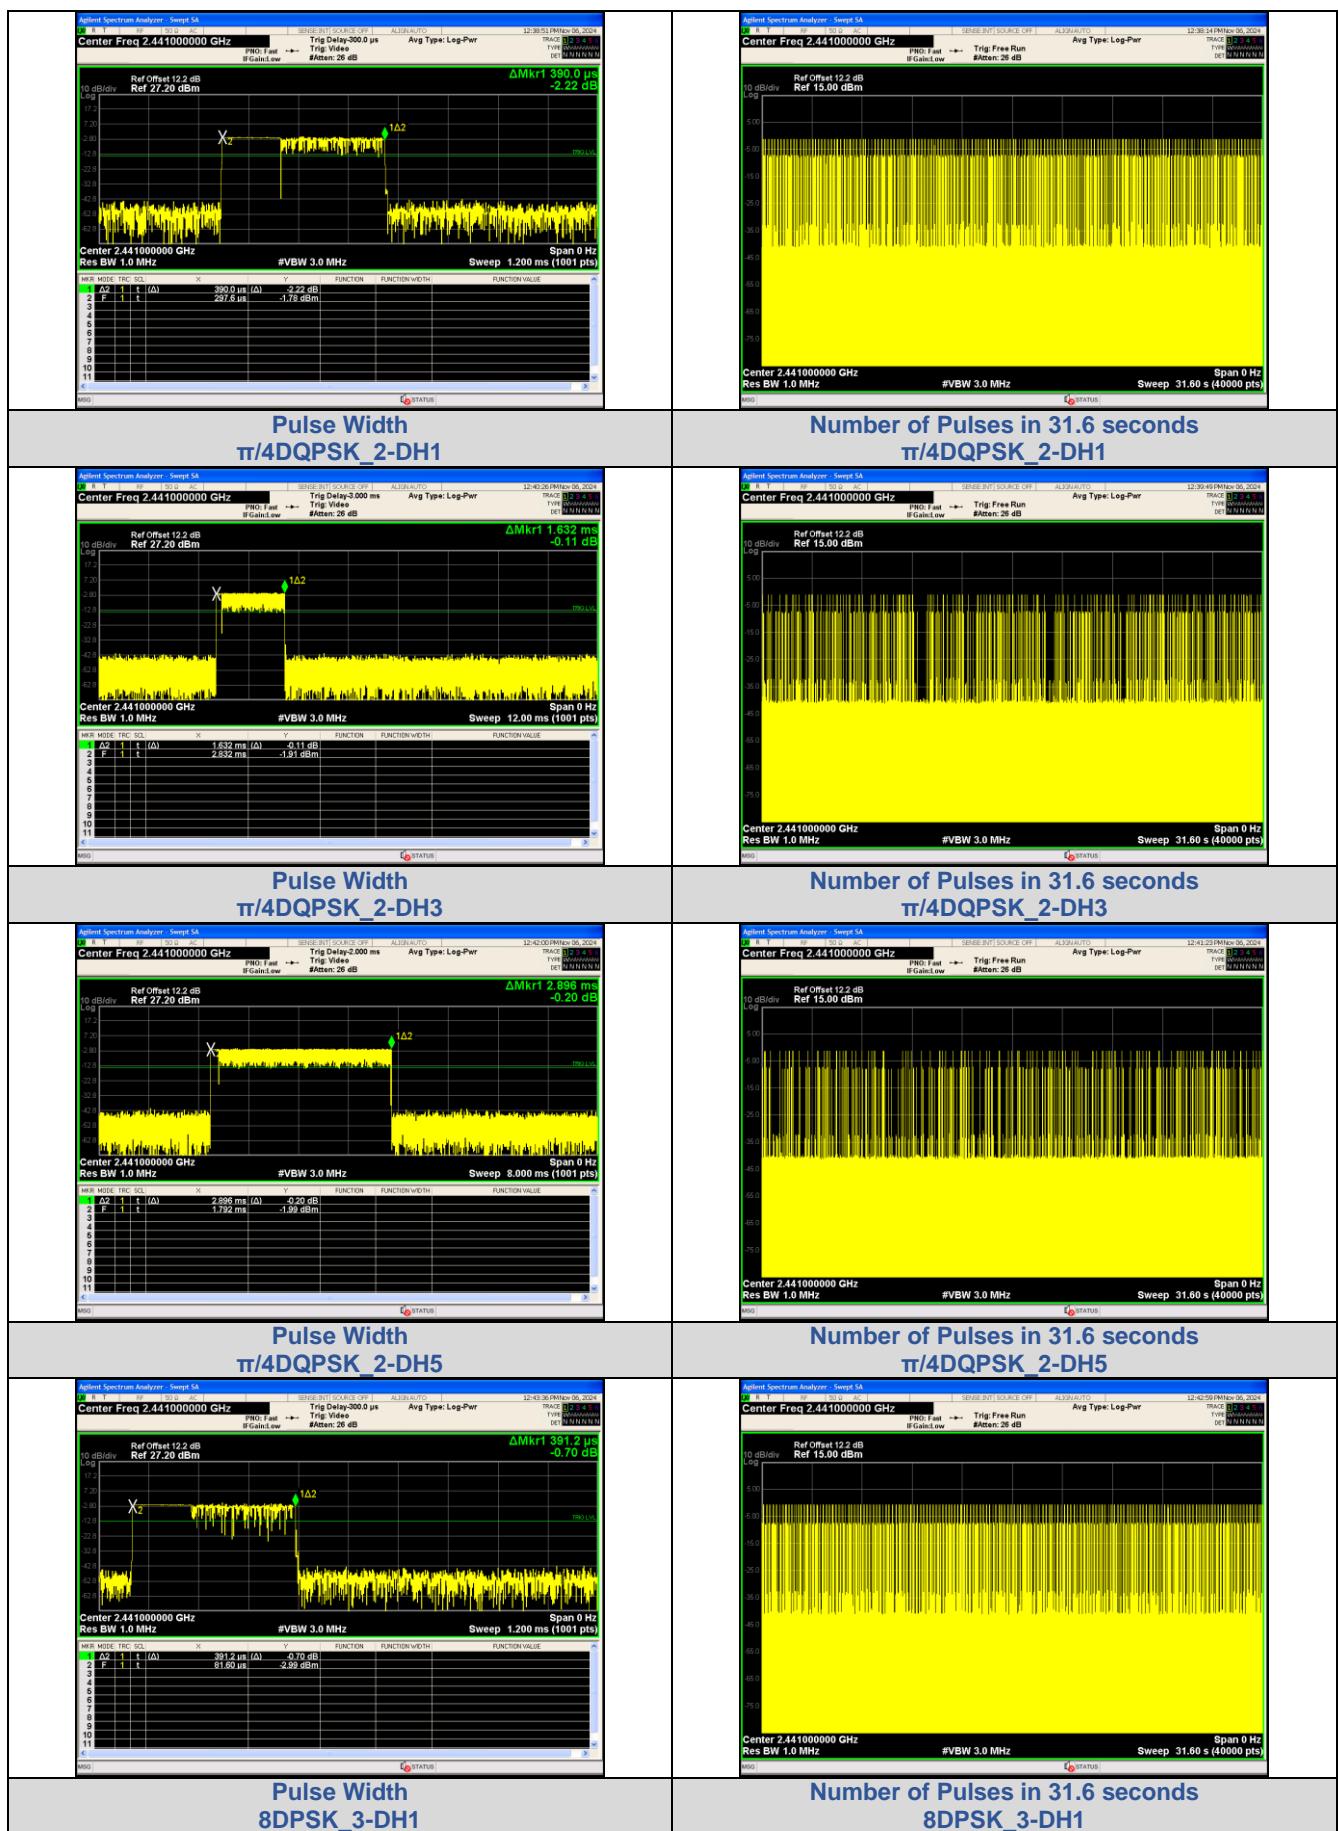


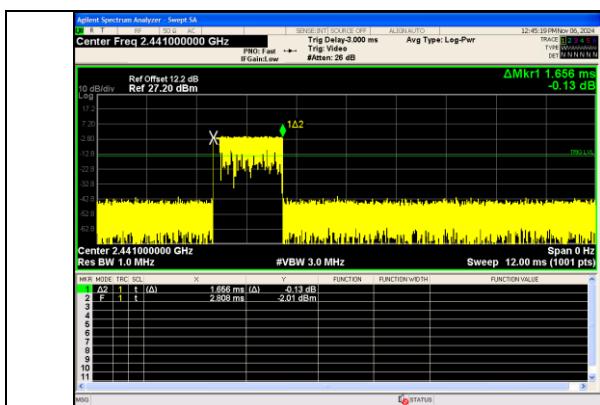


## Pulse Width 8DPSK\_3-DH3

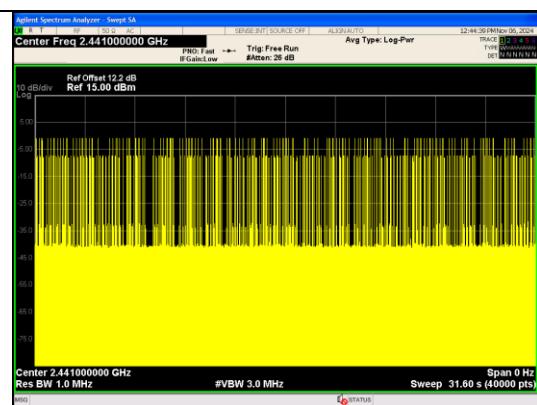

## Number of Pulses in 31.6 seconds 8DPSK\_3-DH3

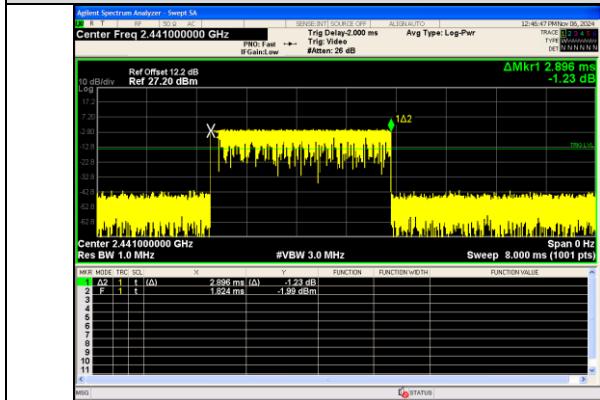

## Pulse Width 8DPSK\_3-DH5

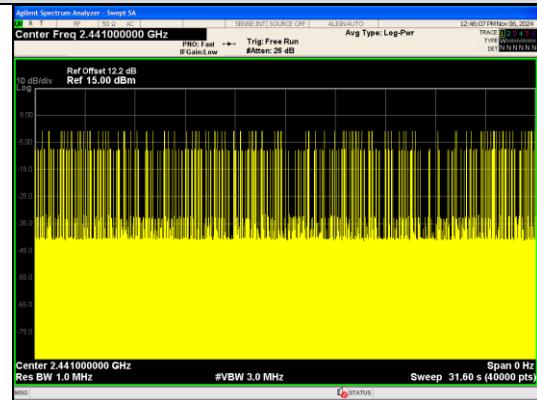



## Number of Pulses in 31.6 seconds 8DPSK\_3-DH5

## APPENDIX III. Number Of Hopping Channel Test Result

Modulation	Packet	Number of Hopping Channel	Limit	Result
GFSK	DH5	79	15	PASS
GFSK	DH5	79	15	PASS
GFSK	DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS

### Test Graphs

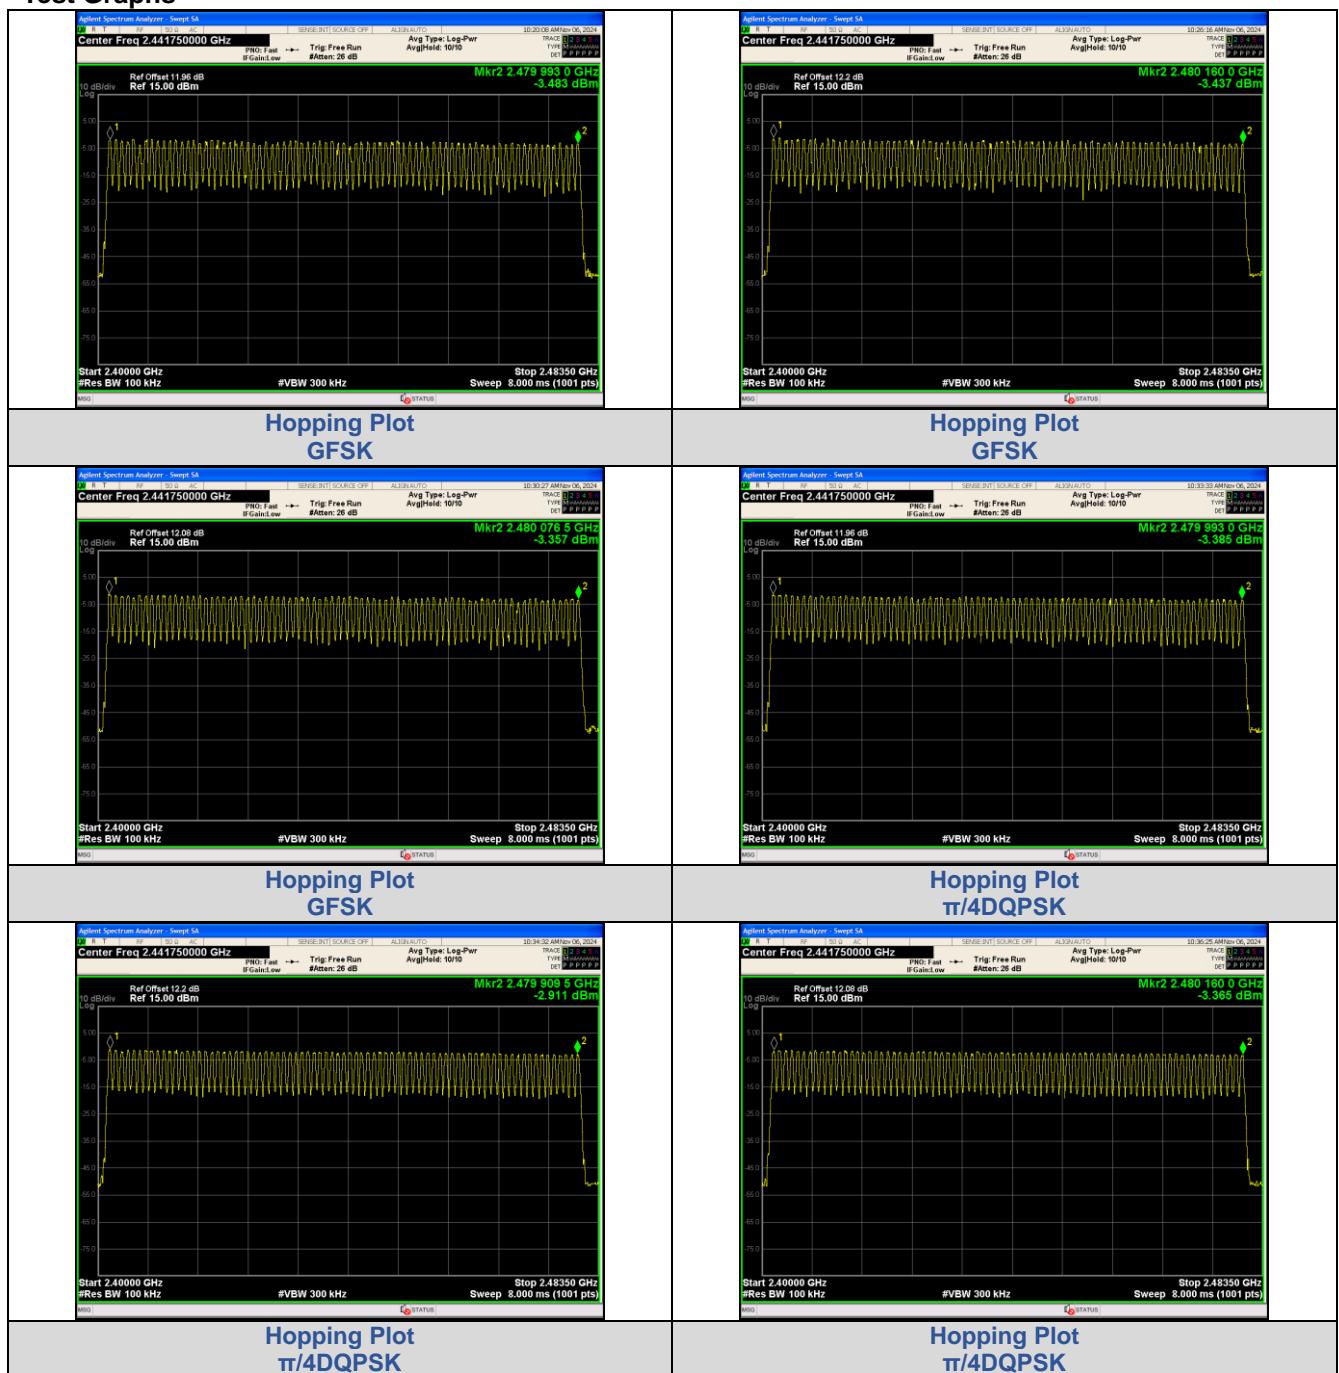

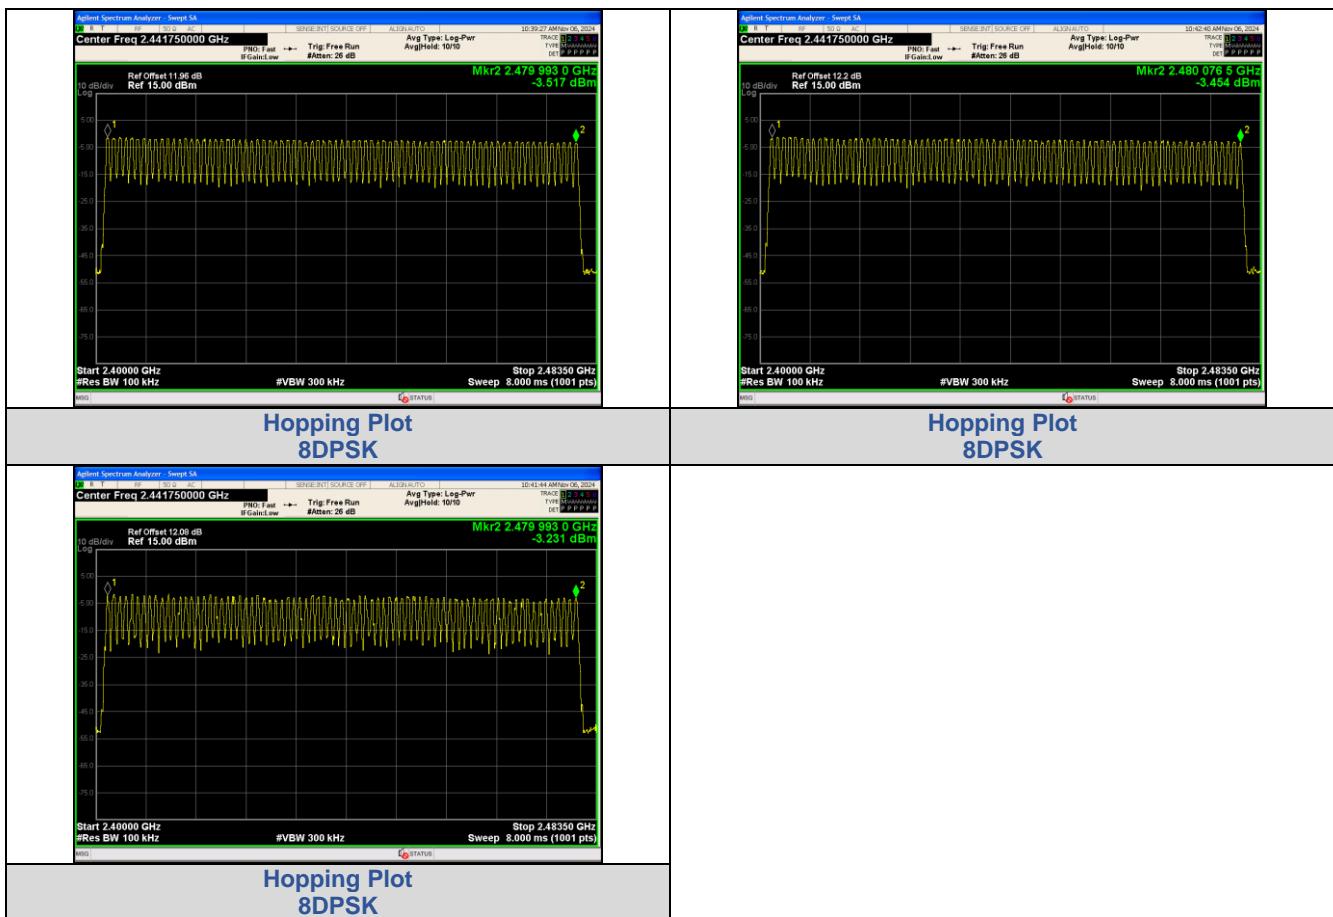

## APPENDIX IV. Conducted Peak Output Power Test Result


Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Max. Avg. Power (dBm)	Limit (dBm)	Result
GFSK	DH5	0	1.687	1.475	None	≤30	PASS
		39	1.434	1.391	None		PASS
		78	0.718	1.180	None		PASS
π/4DQPSK	2-DH5	0	2.892	1.946	None	≤20.97	PASS
		39	2.294	1.696	None		PASS
		78	1.593	1.443	None		PASS
8DPSK	3-DH5	0	0.246	1.058	None	≤20.97	PASS
		39	-0.482	0.895	None		PASS
		78	-1.242	0.751	None		PASS


## APPENDIX V. 99% Bandwidth

### Test Result

Modulation	Channel	Center Frequency (MHz)	99% BW (MHz)
GFSK	0	2402	1.0120
	39	2441	0.86297
	78	2480	0.86915
$\pi/4$ DQPSK	0	2402	1.1853
	39	2441	1.1842
	78	2480	1.1756
8DPSK	0	2402	1.1946
	39	2441	1.1919
	78	2480	1.1899

### Test Graphs

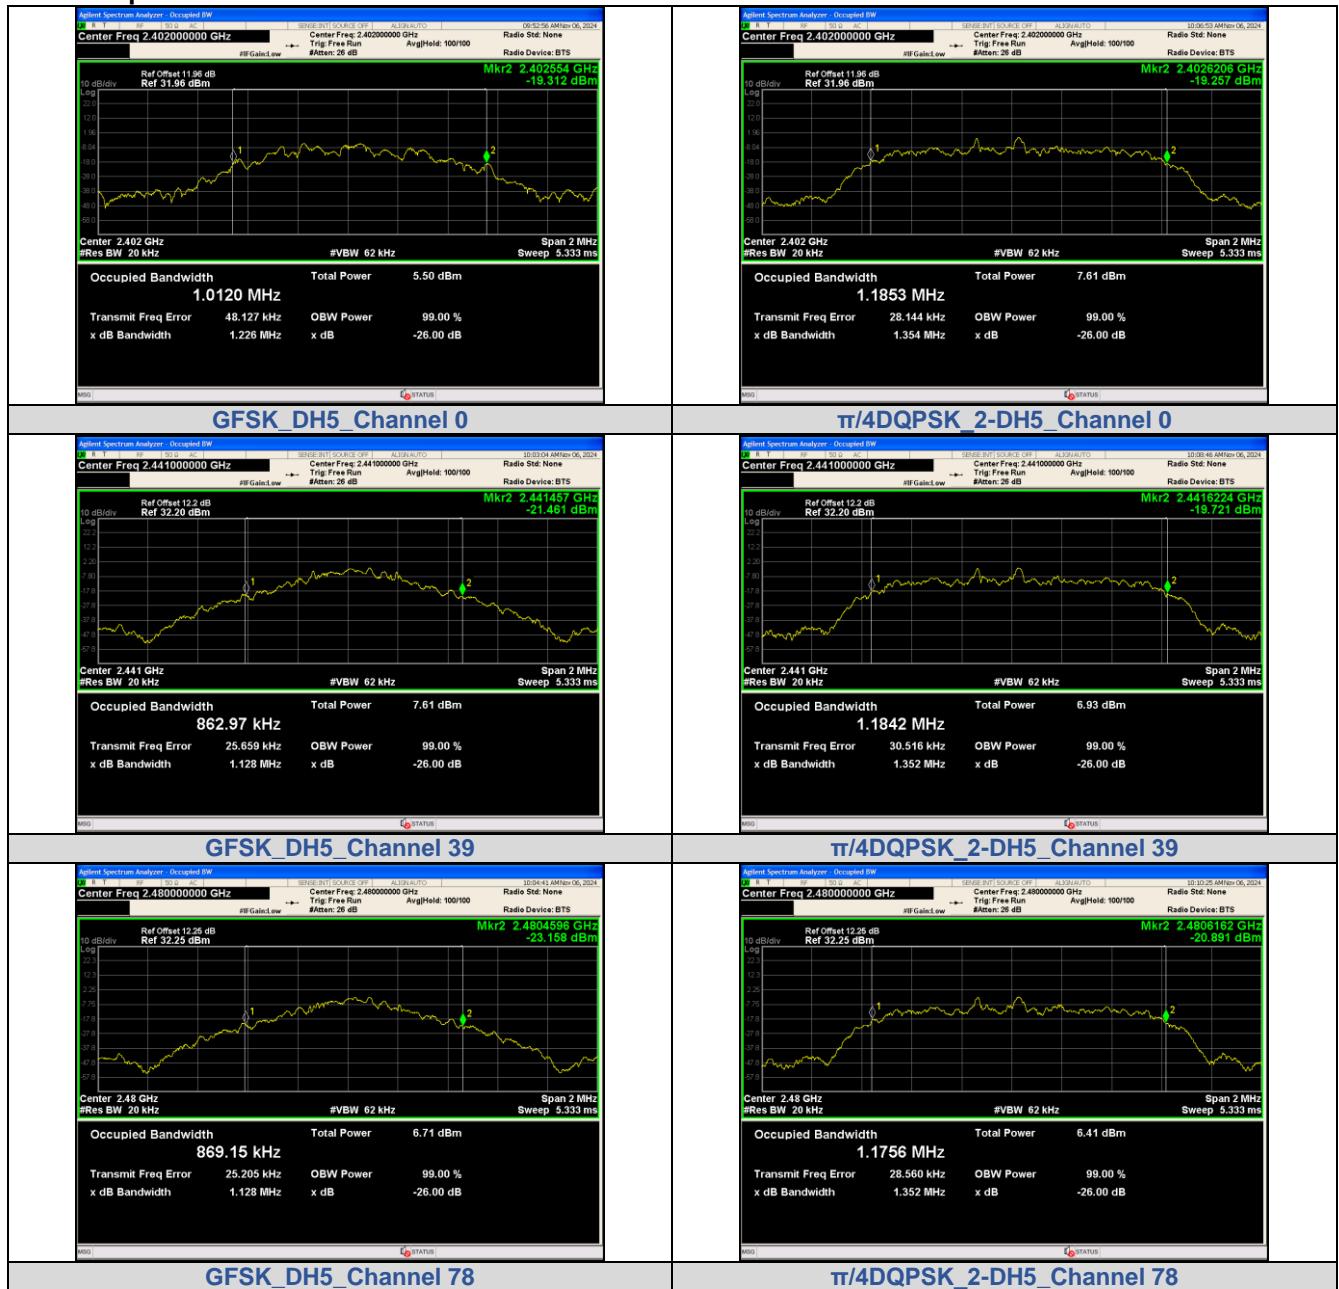

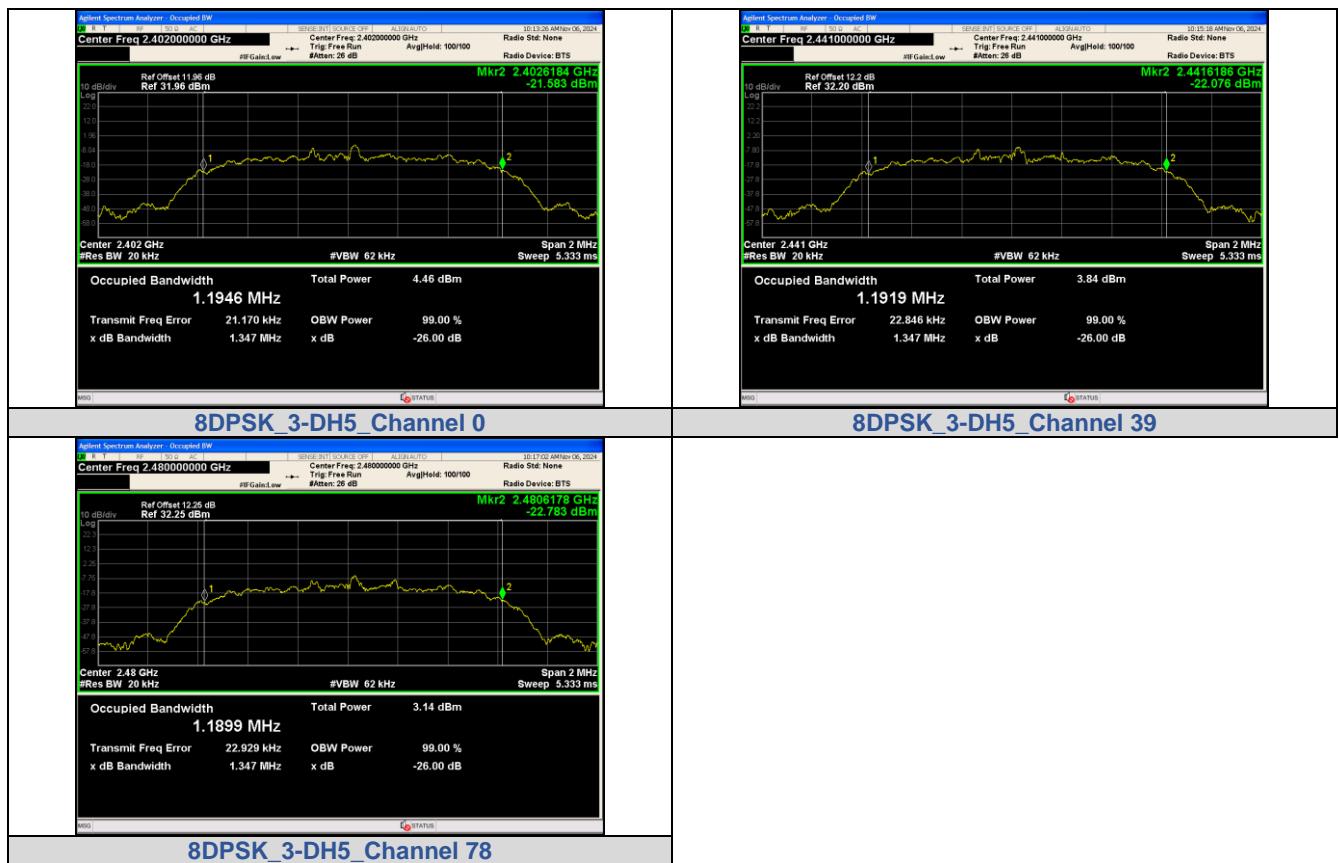



## APPENDIX VI. 20dB Bandwidth

### Test Result

Modulation	Channel	Center Frequency (MHz)	20 dB Bandwidth (MHz)
GFSK	0	2402 MHz	1.099
	39	2441 MHz	0.9545
	78	2480 MHz	0.9584
$\pi/4$ DQPSK	0	2402 MHz	1.283
	39	2441 MHz	1.282
	78	2480 MHz	1.281
8DPSK	0	2402 MHz	1.298
	39	2441 MHz	1.301
	78	2480 MHz	1.294

### Test Graphs

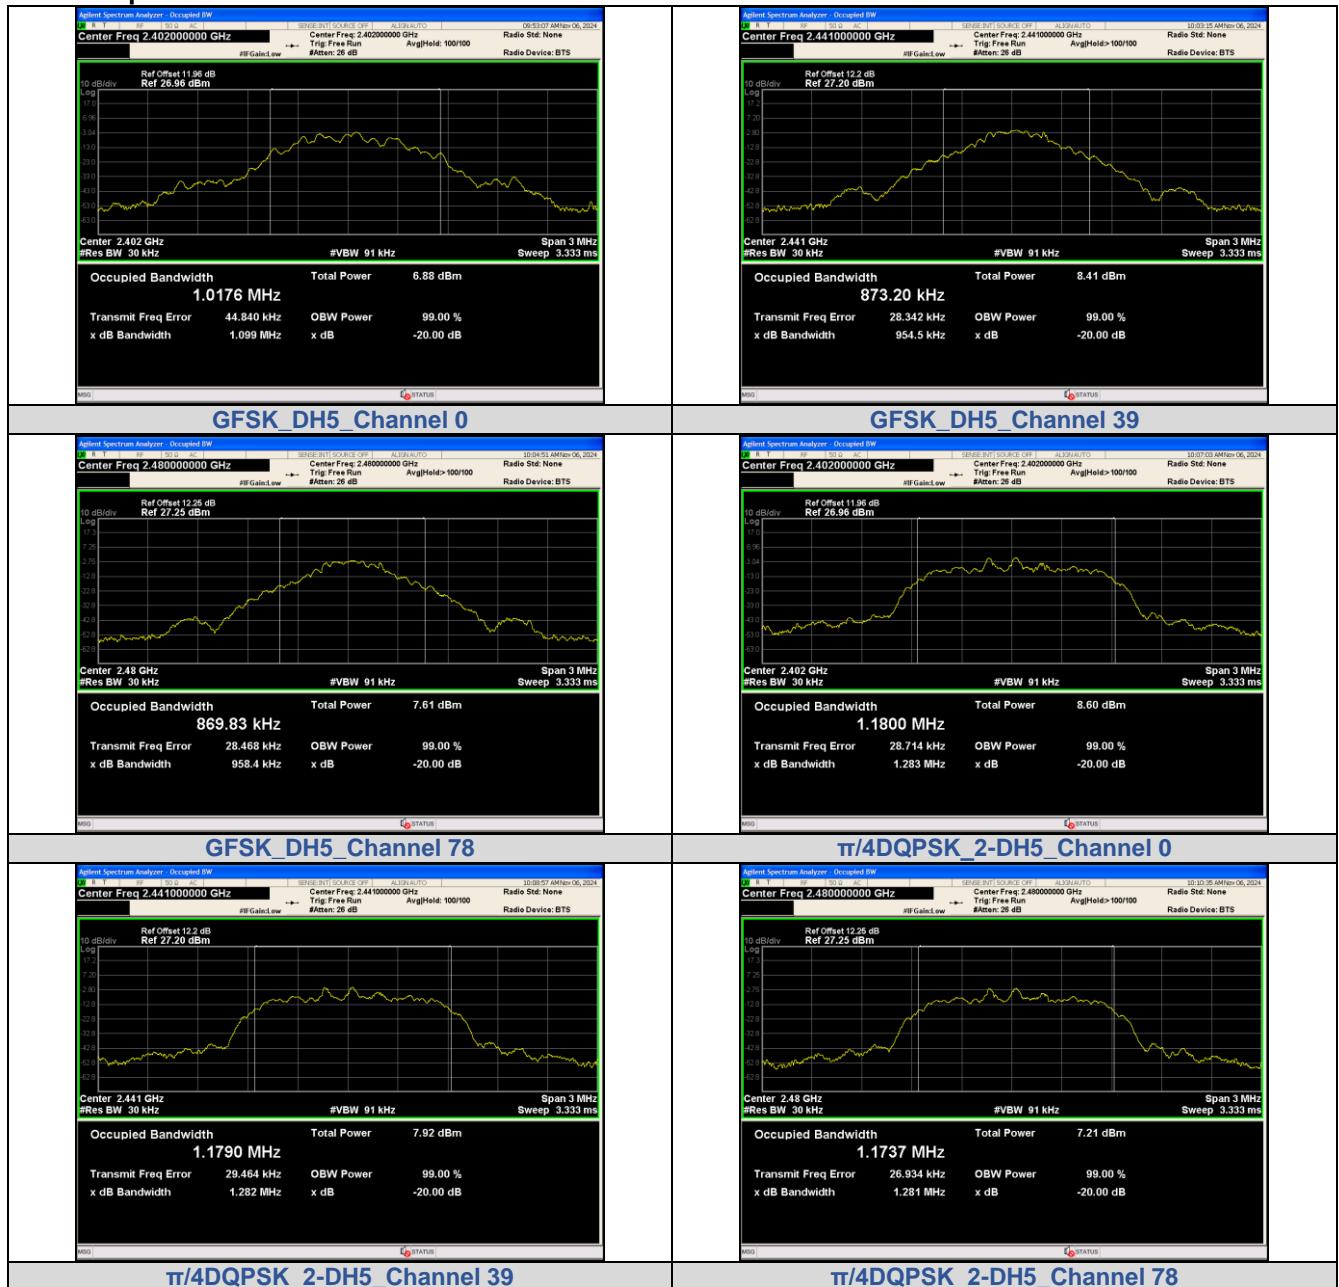

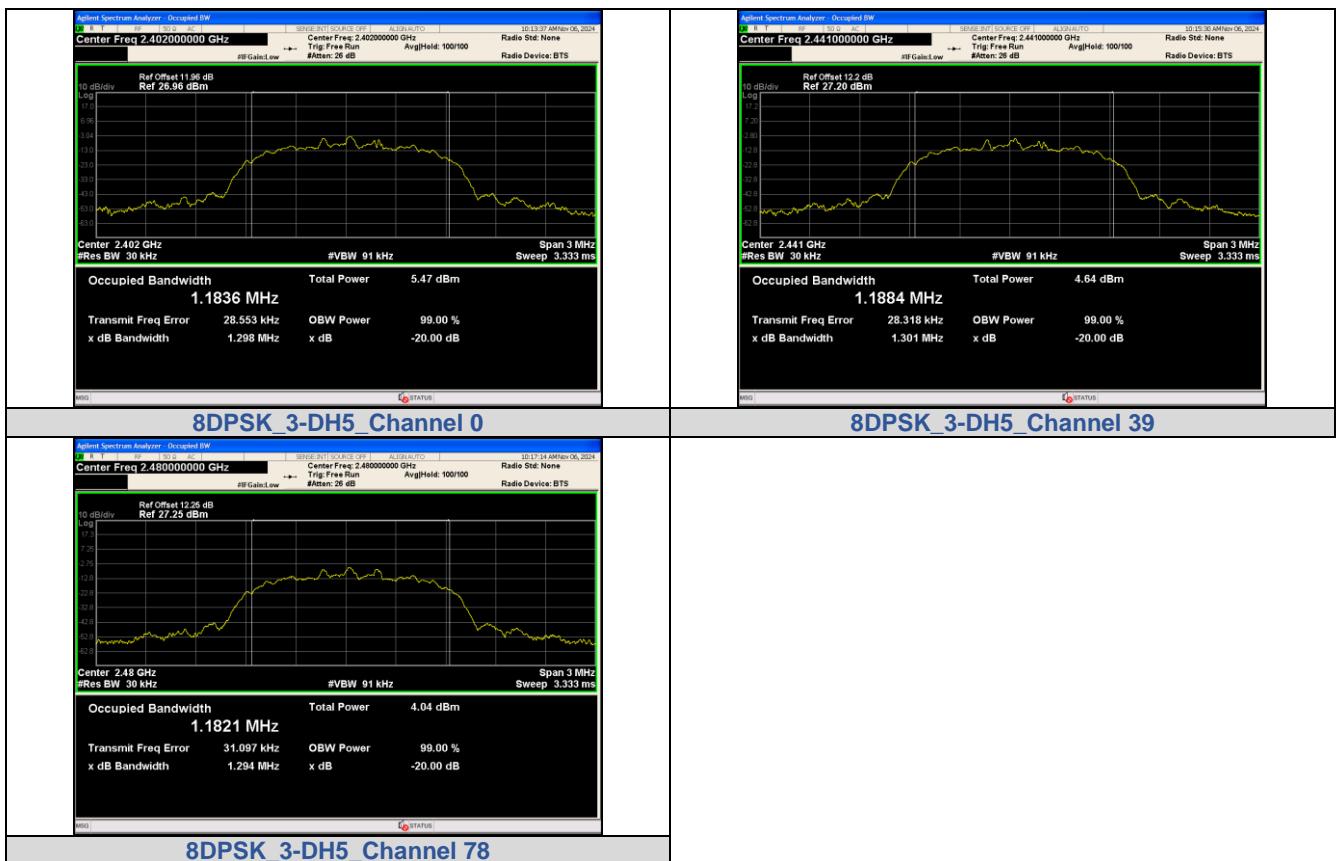



## APPENDIX VII. Carrier Frequencies Separation

### Test Result

Modulation	Packet	Left Center frequency (MHz)	Right Center frequency (MHz)	Hopping Frequency Separation (MHz)	Limit (MHz)	Result
GFSK	DH5	2440.0147	2441.195	1.1803	0.733	PASS
GFSK	DH5	2440.0858	2441.1776	1.0918	0.636	PASS
GFSK	DH5	2440.0786	2441.1821	1.1035	0.639	PASS
$\pi/4$ DQPSK	2-DH5	2439.8788	2440.8803	1.0015	0.855	PASS
$\pi/4$ DQPSK	2-DH5	2440.0453	2440.9997	0.9544	0.855	PASS
$\pi/4$ DQPSK	2-DH5	2440.027	2441.0459	1.0189	0.854	PASS
8DPSK	3-DH5	2440.0324	2441.0042	0.9718	0.865	PASS
8DPSK	3-DH5	2439.8473	2441.0504	1.2031	0.867	PASS
8DPSK	3-DH5	2439.9883	2441.0267	1.0384	0.863	PASS

### Test Graphs

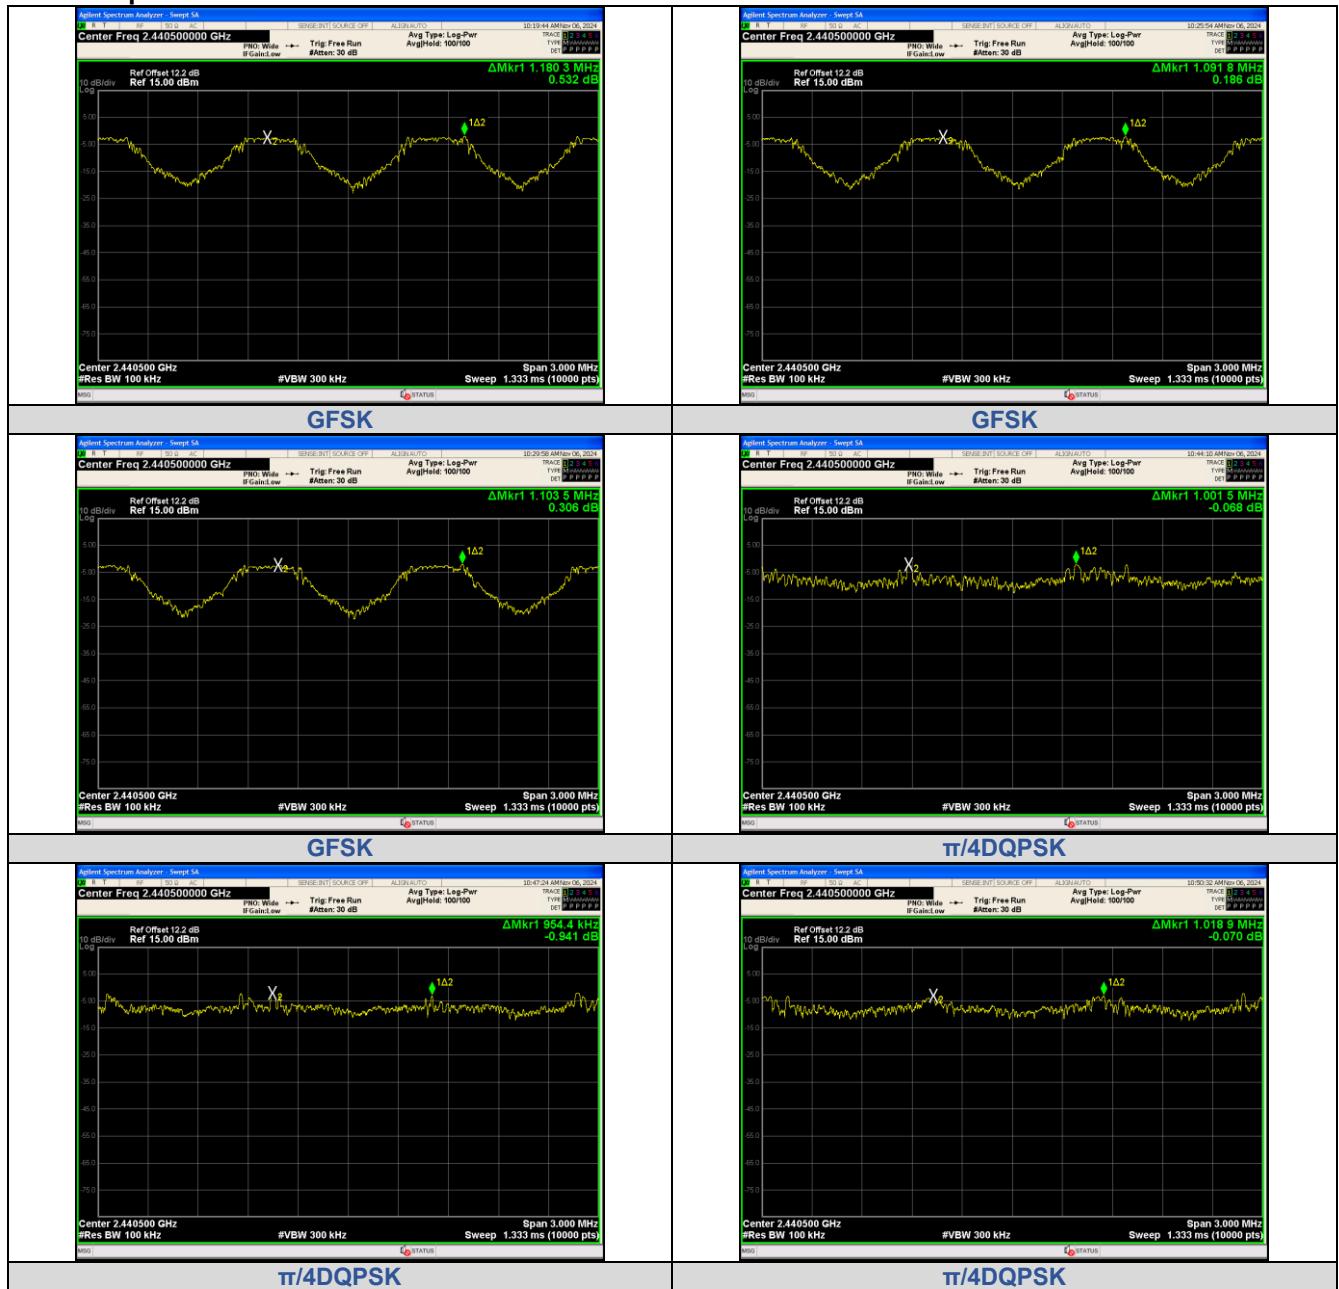

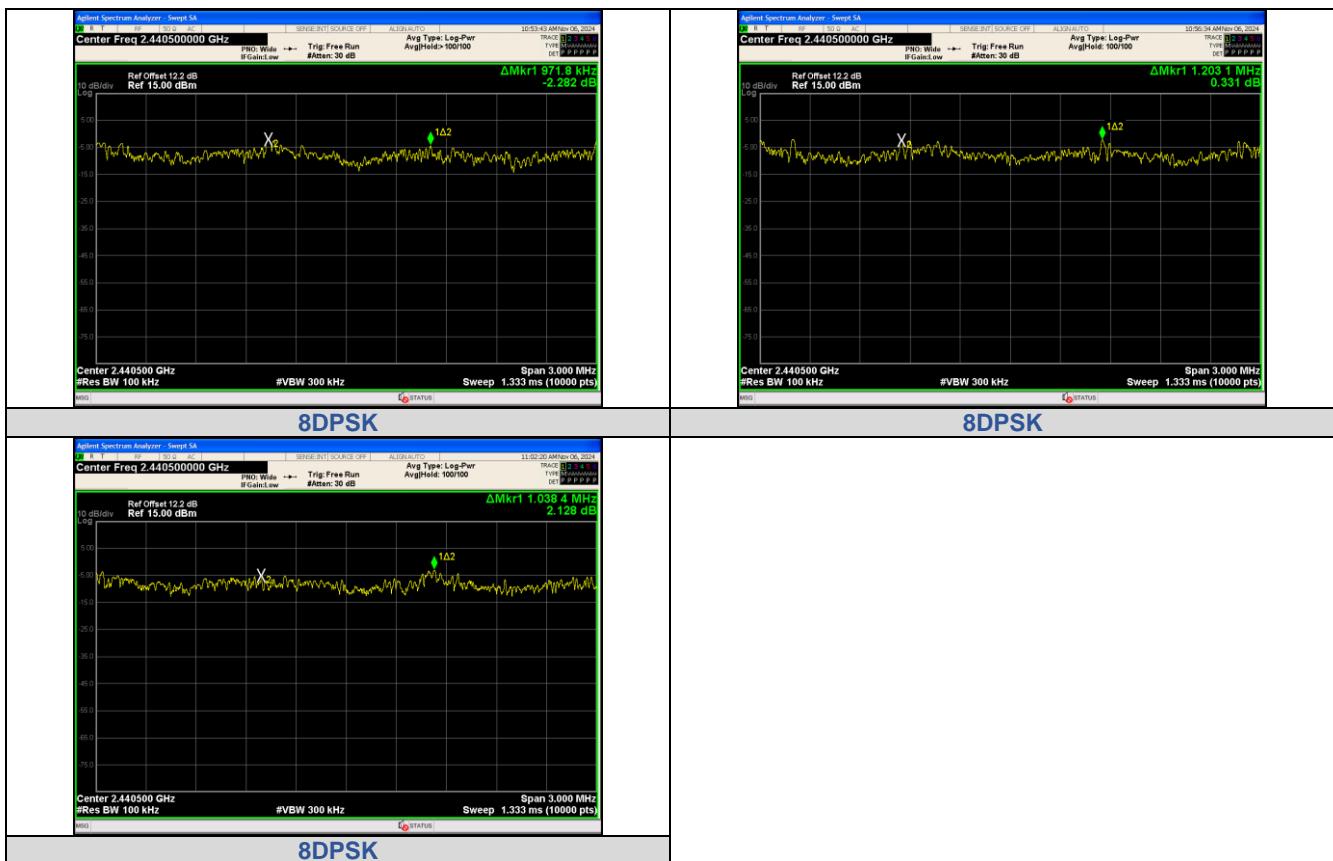

## APPENDIX VIII. Conducted Out Of Band Emission

### Test Result

#### Non-Hopping


Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	0	2400.00	-50.772	-18.62	-32.152	PASS
			4803.76	-44.930	-18.62	-26.310	PASS
			7205.93	-47.910	-18.62	-29.290	PASS
			9608.11	-39.571	-18.62	-20.951	PASS
		39	4881.79	-41.951	-18.78	-23.171	PASS
			7323.30	-47.626	-18.78	-28.846	PASS
			9764.17	-40.786	-18.78	-22.006	PASS
		78	2483.50	-52.050	-19.54	-32.510	PASS
			4959.83	-44.788	-19.54	-25.248	PASS
			7440.03	-49.428	-19.54	-29.888	PASS
			9920.24	-40.662	-19.54	-21.122	PASS
$\pi/4$ DQPSK	2-DH5	0	2400.00	-49.647	-18.09	-31.557	PASS
			4804.38	-44.746	-18.09	-26.656	PASS
			7205.93	-53.331	-18.09	-35.241	PASS
			9608.11	-40.464	-18.09	-22.374	PASS
		39	4881.79	-44.808	-18.77	-26.038	PASS
			7323.30	-52.597	-18.77	-33.827	PASS
			9764.17	-40.477	-18.77	-21.707	PASS
		78	2483.50	-52.580	-19.47	-33.110	PASS
			4959.83	-47.152	-19.47	-27.682	PASS
			7440.03	-51.467	-19.47	-31.997	PASS
			9920.24	-40.798	-19.47	-21.328	PASS
8DPSK	3-DH5	0	2400.00	-49.604	-21.27	-28.334	PASS
			4804.38	-45.946	-21.27	-24.676	PASS
			7206.56	-53.644	-21.27	-32.374	PASS
			9608.11	-41.853	-21.27	-20.583	PASS
		39	4881.79	-46.337	-22.4	-23.937	PASS
			7323.30	-54.057	-22.4	-31.657	PASS
			9764.17	-41.727	-22.4	-19.328	PASS
		78	2483.50	-51.282	-22.81	-28.472	PASS
			4959.83	-46.762	-22.81	-23.952	PASS
			7440.66	-56.065	-22.81	-33.255	PASS
			9920.24	-41.934	-22.81	-19.124	PASS









#### Hopping


Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	
GFSK	DH5	Hopping	2397.93	-49.411	-21.28	-28.131	PASS	
			2400.00	-51.049	-21.28	-29.769	PASS	
			2483.50	-50.304	-22.75	-27.554	PASS	
			2395.97	-49.364	-21.36	-28.004	PASS	
			2400.00	-50.684	-21.36	-29.324	PASS	
			2483.50	-50.926	-22.86	-28.066	PASS	
			2397.79	-50.274	-21.39	-28.884	PASS	
			2400.00	-52.225	-21.39	-30.835	PASS	
			2483.50	-50.952	-22.92	-28.032	PASS	
			2397.92	-49.784	-21.23	-28.554	PASS	
			2400.00	-51.604	-21.23	-30.374	PASS	
			2483.50	-51.444	-22.98	-28.464	PASS	
$\pi/4$ DQPSK	2-DH5		2398.91	-49.419	-21.45	-27.969	PASS	
			2400.00	-51.326	-21.45	-29.876	PASS	
			2483.50	-51.298	-23.17	-28.128	PASS	
			2397.21	-49.496	-21.3	-28.196	PASS	
			2400.00	-51.912	-21.3	-30.612	PASS	
			2483.50	-50.846	-22.91	-27.936	PASS	
			2398.94	-48.642	-21.36	-27.282	PASS	
			2400.00	-48.722	-21.36	-27.362	PASS	
			2483.50	-51.281	-22.73	-28.551	PASS	
8DPSK	3-DH5		2400.00	-48.722	-21.36	-27.362	PASS	
			2483.50	-51.281	-22.73	-28.551	PASS	

			2398.58	-48.878	-21.58	-27.298	PASS
			2400.00	-51.711	-21.58	-30.131	PASS
			2483.50	-50.976	-22.77	-28.206	PASS
			2396.39	-49.913	-21.32	-28.593	PASS
			2400.00	-51.904	-21.32	-30.584	PASS
			2483.50	-51.444	-22.95	-28.494	PASS


## Test Graphs

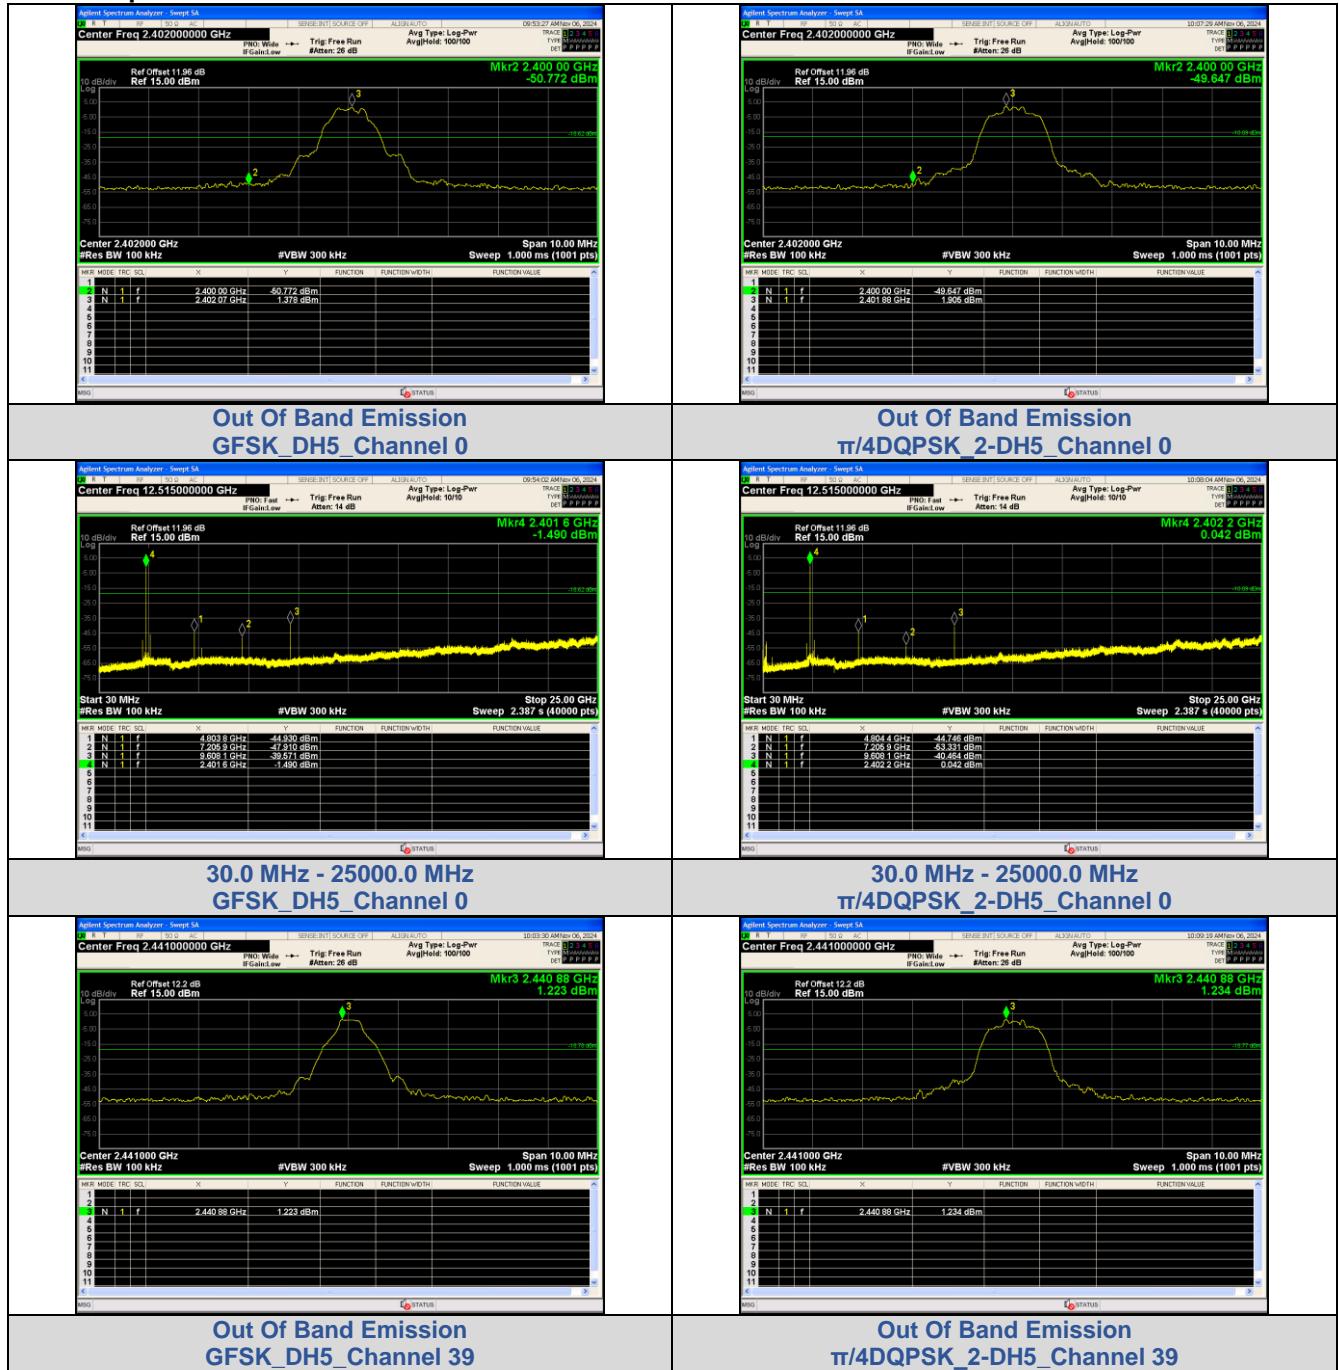

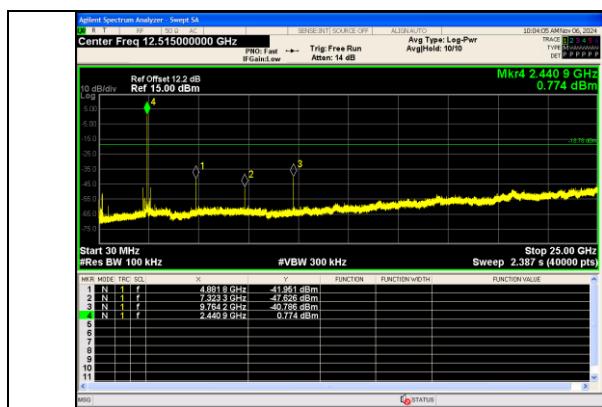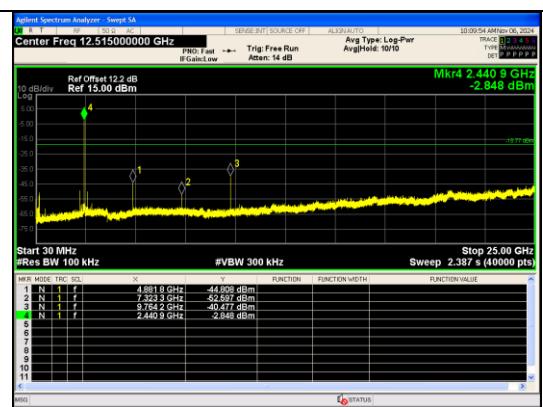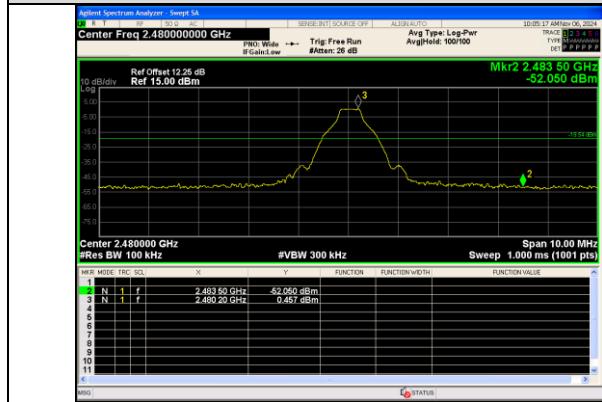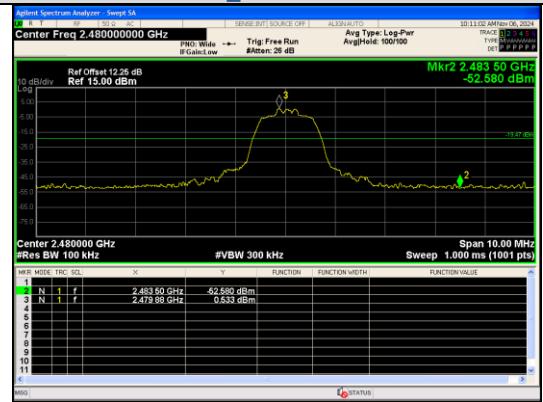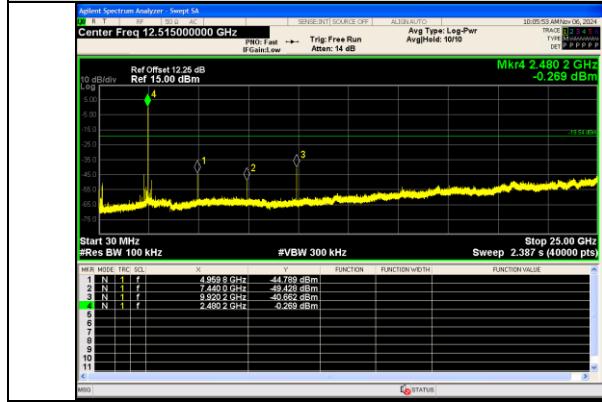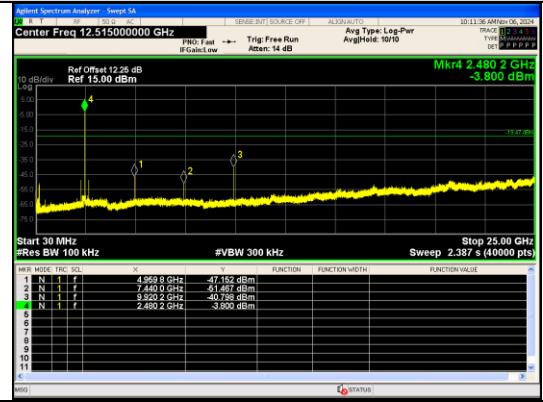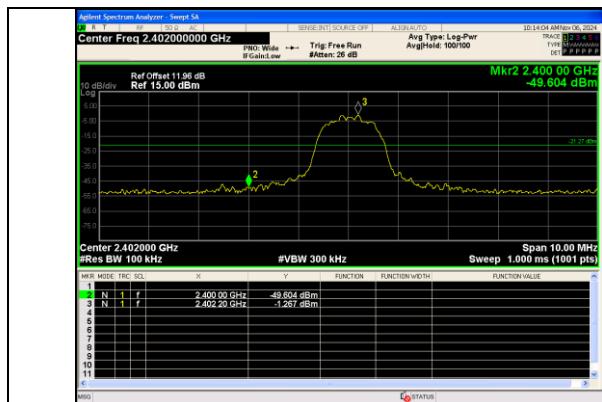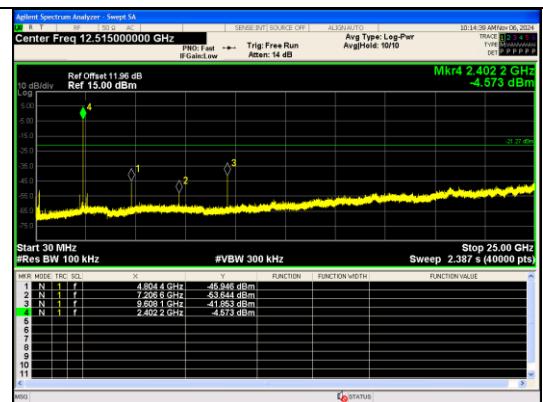
30.0 MHz - 25000.0 MHz  
GFSK\_DH5\_Channel 3930.0 MHz - 25000.0 MHz  
4DQPSK\_2-DH5\_Channel 39Out Of Band Emission  
GFSK\_DH5\_Channel 78Out Of Band Emission  
4DQPSK\_2-DH5\_Channel 7830.0 MHz - 25000.0 MHz  
GFSK\_DH5\_Channel 7830.0 MHz - 25000.0 MHz  
4DQPSK\_2-DH5\_Channel 78Out Of Band Emission  
8DPSK\_3-DH5\_Channel 030.0 MHz - 25000.0 MHz  
8DPSK\_3-DH5\_Channel 0

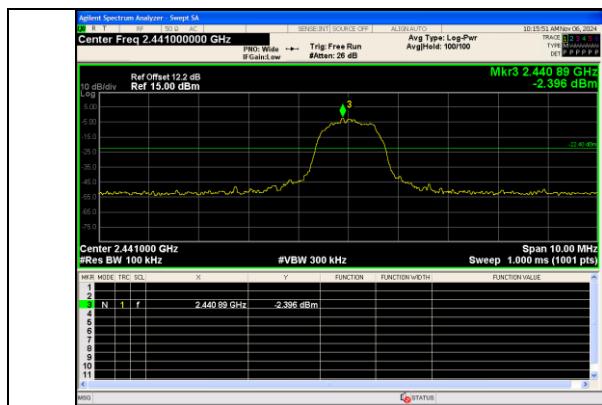


Out Of Band Emission  
8DPSK\_3-DH5\_Channel 39

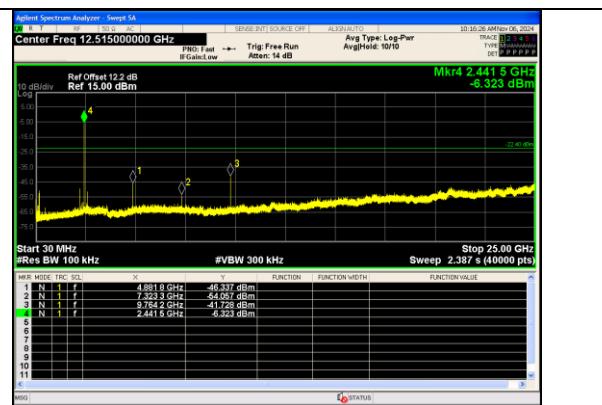


30.0 MHz - 25000.0 MHz  
8DPSK\_3-DH5\_Channel 39

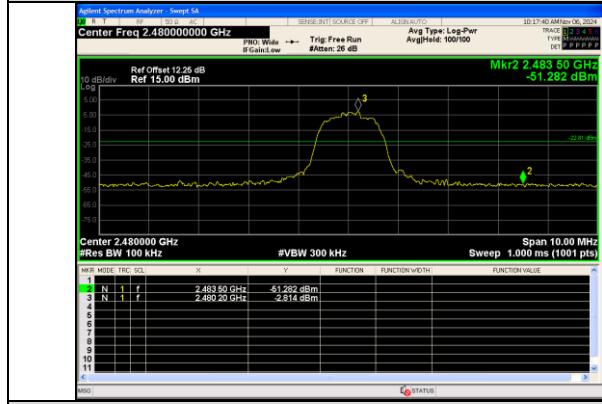


## Out Of Band Emission 8DPSK\_3-DH5\_Channel 78

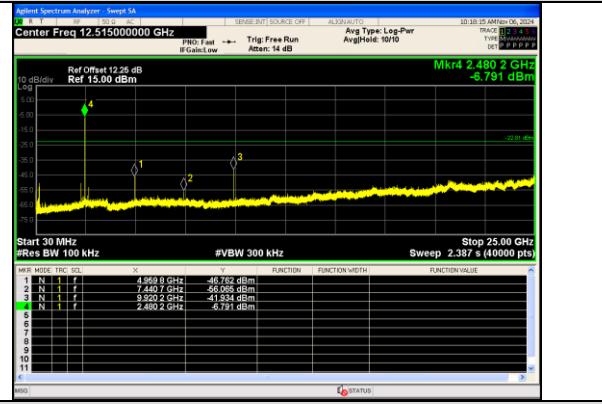

30.0 MHz - 25000.0 MHz  
8DPSK\_3-DH5\_Channel 78

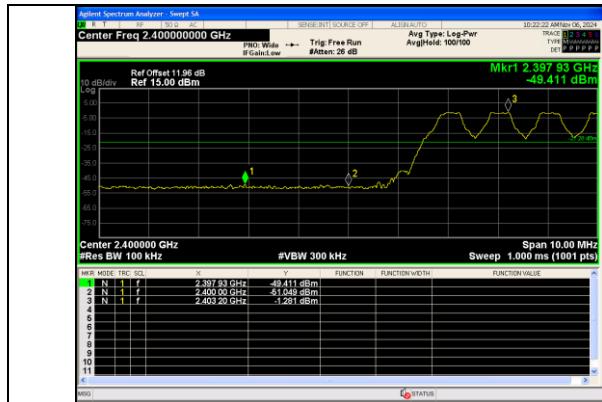


## Out Of Band Emission(Left) GFSK\_DH5\_Channel Hopping

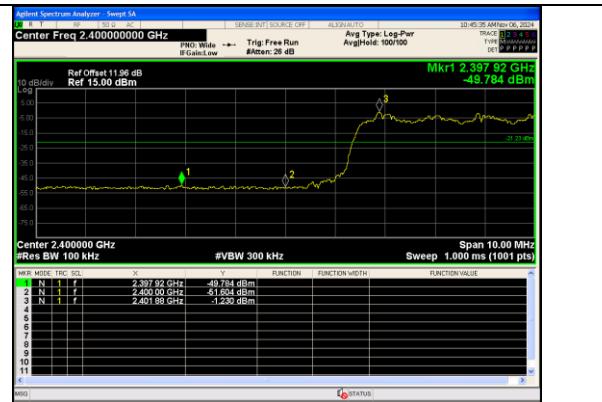



## Out Of Band Emission(Left) $\pi/4$ DQPSK\_2-DH5\_Channel Hopping




## Out Of Band Emission (Right) GFSK DH5 Channel Hopping

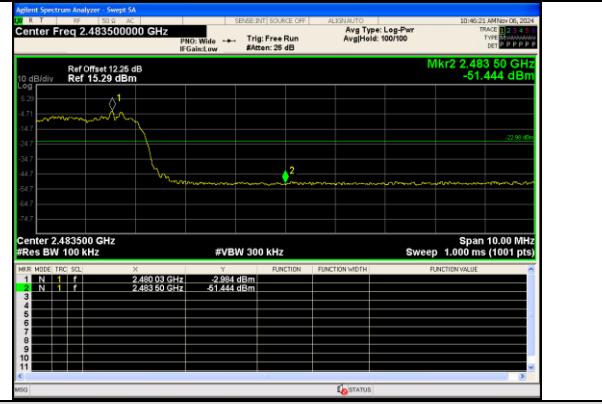

## Out Of Band Emission (Right) $\pi/4$ DQPSK\_2-DH5\_Channel Hopping

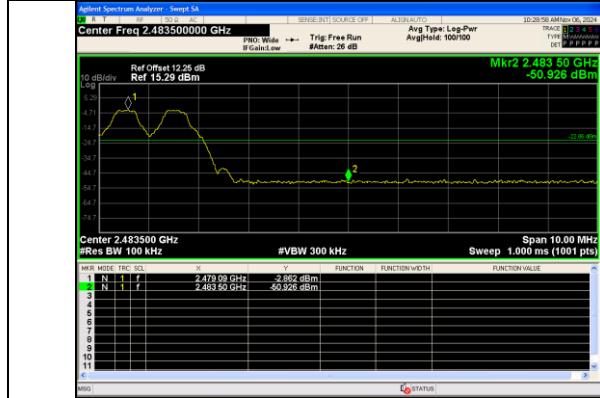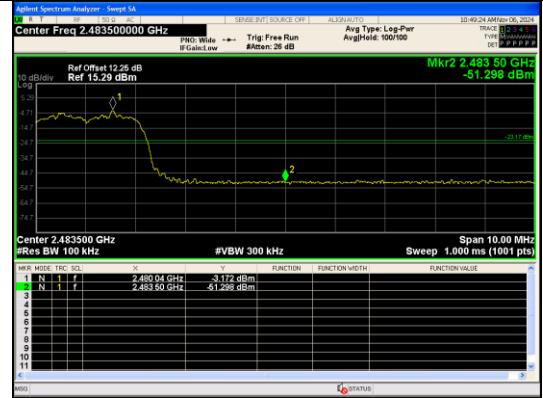Out Of Band Emission(Left)  
GFSK\_DH5\_Channel HoppingOut Of Band Emission(Left)  
pi/4DQPSK\_2-DH5\_Channel HoppingOut Of Band Emission(Left)  
GFSK\_DH5\_Channel HoppingOut Of Band Emission(Left)  
pi/4DQPSK\_2-DH5\_Channel HoppingOut Of Band Emission(Left)  
GFSK\_DH5\_Channel HoppingOut Of Band Emission(Left)  
pi/4DQPSK\_2-DH5\_Channel HoppingOut Of Band Emission(Left)  
GFSK\_DH5\_Channel HoppingOut Of Band Emission(Left)  
pi/4DQPSK\_2-DH5\_Channel Hopping

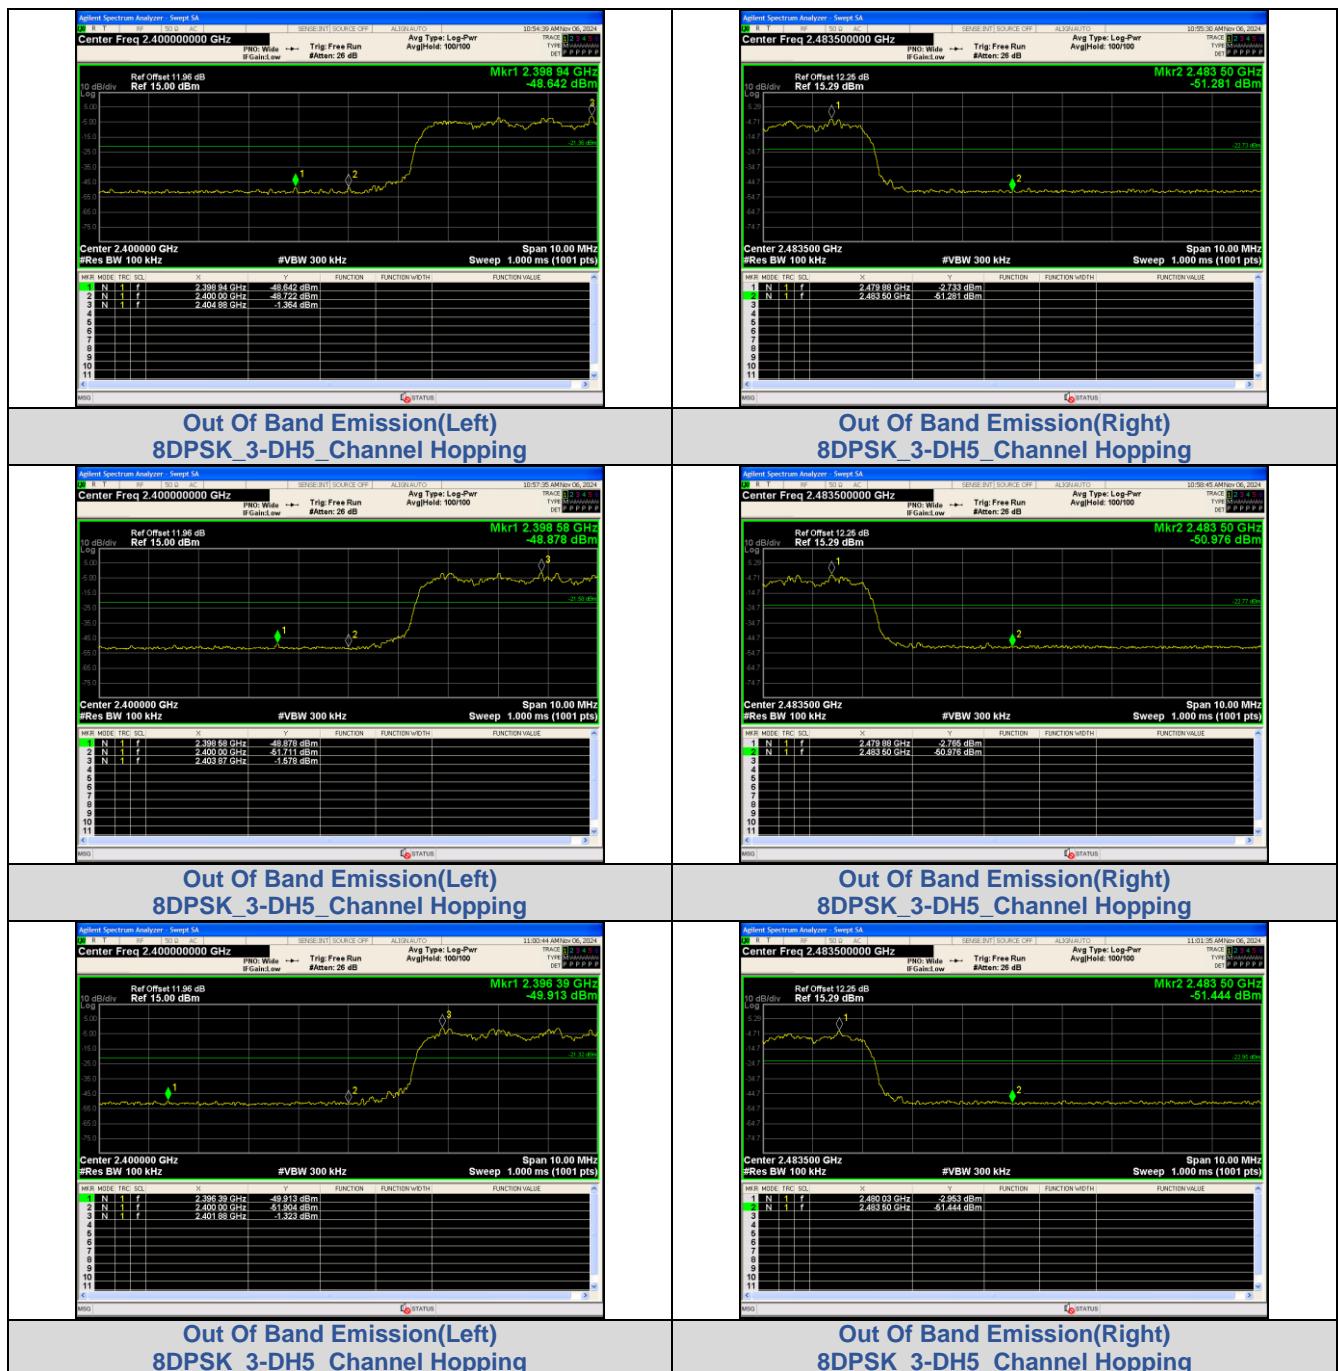

\*\*\*\*\* End of Report \*\*\*\*\*