



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

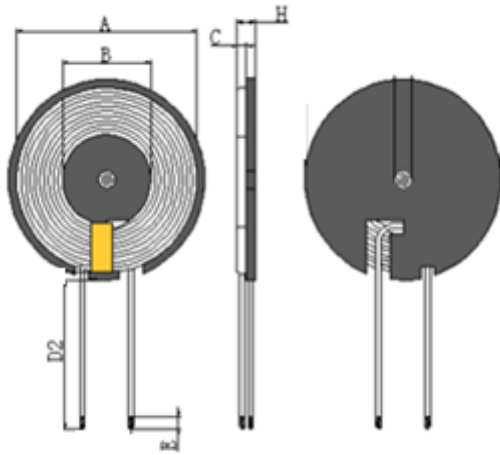

2. SCHEMATICS:



A	B	C	D2	E	H				I
50±1.0	20.5±0.5	0.8±0.05	60±3	3±1.5	2.4MAX				

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	silk-covered wire 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR		Q value	HI-POT
TEST	Coil plus magnetic plate	S-F			
CON	100KHz, 0.25V	AT 25°C			
SPEC	6.5uH±10%	85mΩ Max			

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	silk-covered wire	2UEW	NANJINGJINNINGCO,LTD	
2	Lead-free Solder Bar	Lead-free Solder Bar	QIAODO	
3	magnetic sheet	ø50*0.8 magnetic sheet L	TAIYI CO.,LTD	
4	Glue	9999	LIANCHENG CO.,LTD	
5	high-temperature adhesive tape	8mm	CUDAK CO.,LTD	
6	Glue	ø40/3m	CUDAK CO.,LTD	
7			CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD

PART NO

TITLE