



RF Exposure Evaluation

FCC ID: 2A9Q9-EPB-RG25

Product Name:	Regal 10000mAh 20W PD Power Bank w/ Wireless & Watch Chgr
Product Model No.:	EPB-RG25
Test Auxiliary:	AC/DC Adapter, Phone, Watch
Test Auxiliary Model No.:	HW-200200CP1, iPhone 12, iWatch S2
Operation Frequency:	ANT 1:115kHz-205kHz ANT 2: 115kHz-350kHz
Modulation Type:	ASK
Antenna Type:	Loop Coil Antenna
Power Supply:	Lightning Input: 5V $\leq$ 2A, 9V $\leq$ 2A Type-C Input: 5V $\leq$ 3A, 9V $\leq$ 2A, 12V $\leq$ 1.5A 18W Max Type-C Output: 5V $\leq$ A, 9V $\leq$ 2.2A, 12V $\leq$ 1.67A 20W Max Wireless Output for phone: 5W/7.5W/10W/15W Output for watch: 2W
Battery Capacity:	10000mAh, 3.85V, 38.5Wh
Transmitting Mode	Keep the EUT in continuously wireless charging mode



a. EUT mode of adapter input + wireless charge output:

Test Modes:	Test Coil	Description:
Mode 1	ANT 1	AC/DC Adapter + EUT + Phone (Battery Status: <1%)
Mode 2		AC/DC Adapter + EUT + Phone (Battery Status: 50%)
Mode 3		AC/DC Adapter + EUT + Phone (Battery Status: >98%)
Mode 4	ANT 2	AC/DC Adapter + EUT + Watch (Battery Status: <1%)
Mode 5		AC/DC Adapter + EUT + Watch (Battery Status: 50%)
Mode 6		AC/DC Adapter + EUT + Watch (Battery Status: >98%)

b. EUT mode of wireless charge output:

Test Modes:	Test Coil	Description:
Mode 1a	ANT 1	EUT + Phone (Battery Status: <1%)
Mode 2a		EUT + Phone (Battery Status: 50%)
Mode 3a		EUT + Phone (Battery Status: >98%)
Mode 4a	ANT 2	EUT + Watch (Battery Status: <1%)
Mode 5a		EUT + Watch (Battery Status: 50%)
Mode 6a		EUT + Watch (Battery Status: >98%)

Note: Both a and b were tested, and only the test data for Mode b was recorded.

The EUT cannot be charged both ANT 1 and ANT 2 during use.



TABLE OF CONTENTS

RF Exposure Evaluation	1
1 Measuring Standard	4
2 Requirements	4
3 Method Of Measurement	5
4 Test Instruments list	6
5 Test Result	7
6 Test Set-up Photo	17
Test distance: 20cm	17
Test distance: 6cm	20



1 Measuring Standard

1.1 KDB 680106 D01 Wireless Power Transfer v04

1.2 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	H-filed	$\pm 0.93\text{dB}$
2	E-filed	$\pm 0.51\text{dB}$

2 Requirements

2.1 According to the item 5.2 of KDB 680106 D01v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

a) The power transfer frequency is below 1 MHz.

Yes. The device operates in the frequency from 115kHz to 350kHz.

b) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.

Yes. The maximum output power of the primary coil is 15watts.

c) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact).

Yes. Client device is placed directly in contact with the transmitter.

d) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).

NO. The EUT is a portable wireless charger.

e) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes.

The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures

Yes. The EUT coil is evaluated at maximum output power and the test results are less than 50% of the limit.

f) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well.

NO. The EUT has two coil.




3 Method Of Measurement

3.1 Applicable Standard


According to S1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB 680106 D01 Wireless Power Transfer v04.

3.2 Block diagram of Test Setup

For mobile exposure conditions:

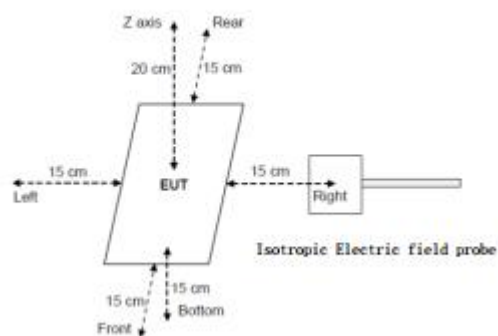

For portable exposure conditions:

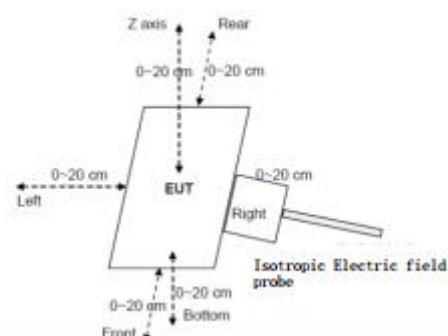

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 20 cm-0cm measured from the center of the top, and 20cm-0cm measured from the center of the rest.

3.3 For mobile exposure conditions:

- The RF exposure test was performed in an echoic chamber
- E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair
- The highest emission level was recorded and compared with limit
- The EUT was measured according to the dictates of KDB 680106 D01v04

3.4 For portable exposure conditions:

- The RF exposure test was performed in an echoic chamber
- E and H-field measurements should be made with the probe at 0 cm for all side of the EUT.
- The highest emission level was recorded and compared with limit.

For portable exposure conditions:

Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm starting from as close as possible out to 10cm



3.5 Limits for Maximum Permissible Exposure (MPE):

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

3.6 Test Procedure:

- 1) The RF exposure test was performed on 360 degree turn table in an echoic chamber.
- 2) 20 cm-0cm measured from the center of the top, and 20cm-0cm measured from the center of the rest sides.
- 3) The turn table was rotated 360 degree to search of highest strength.
- 4) The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- 5) The EUT were measured according to the dictates of KDB 680106 D01v04.

4 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	180ZX10220	Sep. 29, 2024	Sep. 28, 2025
Magnetic field probe 100cm ²	Narda	ELT probe 100cm ²	M0675	Sep. 29, 2024	Sep. 28, 2025



5 Test Result

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Time:	Jan 09, 2025

ANT 1

H-Filed Strength at (distance from 6cm to 20cm at 2cm iteration) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (uT)	Position Right (uT)	Position Rear (uT)	Position Front (uT)	Position Top (uT)	Position BOTTOM (uT)
20	<1%	0.0174	0.0176	0.0173	0.0175	0.0171	0.0170
18	<1%	0.0233	0.0236	0.0231	0.0234	0.0229	0.0228
16	<1%	0.0320	0.0325	0.0318	0.0322	0.0316	0.0313
14	<1%	0.0456	0.0462	0.0452	0.0459	0.0449	0.0446
12	<1%	0.0674	0.0684	0.0669	0.0679	0.0664	0.0660
10	<1%	0.1043	0.1058	0.1036	0.1051	0.1028	0.1021
8	<1%	0.1695	0.1719	0.1682	0.1707	0.1670	0.1658
6	<1%	0.2876	0.2917	0.2855	0.2896	0.2834	0.2814

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position BOTTOM (A/m)	50% Limits (A/m)	Limits (A/m)
20	<1%	0.0139	0.0141	0.0138	0.0140	0.0137	0.0136	0.815	1.63
18	<1%	0.0186	0.0189	0.0185	0.0187	0.0183	0.0182	0.815	1.63
16	<1%	0.0256	0.0260	0.0254	0.0258	0.0252	0.0251	0.815	1.63
14	<1%	0.0365	0.0370	0.0362	0.0367	0.0359	0.0357	0.815	1.63
12	<1%	0.0539	0.0547	0.0535	0.0543	0.0532	0.0528	0.815	1.63
10	<1%	0.0835	0.0847	0.0829	0.0841	0.0822	0.0816	0.815	1.63
8	<1%	0.1357	0.1375	0.1346	0.1365	0.1336	0.1326	0.815	1.63
6	<1%	0.2302	0.2334	0.2284	0.2317	0.2267	0.2251	0.815	1.63



H-Filed Strength at (distance from 6cm to 20cm at 2cm iteration) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (uT)	Position Right (uT)	Position Rear (uT)	Position Front (uT)	Position Top (uT)	Position Bottom (uT)
20	50%	0.0170	0.0173	0.0171	0.0168	0.0165	0.0166
18	50%	0.0228	0.0231	0.0229	0.0224	0.0221	0.0223
16	50%	0.0313	0.0318	0.0316	0.0309	0.0304	0.0306
14	50%	0.0446	0.0452	0.0449	0.0439	0.0433	0.0436
12	50%	0.0660	0.0669	0.0664	0.0650	0.0640	0.0645
10	50%	0.1021	0.1036	0.1028	0.1006	0.0991	0.0998
8	50%	0.1658	0.1682	0.1670	0.1634	0.1609	0.1622
6	50%	0.2814	0.2855	0.2834	0.2772	0.2731	0.2751

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position Bottom (A/m)	50% Limits (A/m)	Limits (A/m)
20	50%	0.0136	0.0138	0.0137	0.0134	0.0132	0.0133	0.815	1.63
18	50%	0.0182	0.0185	0.0183	0.0179	0.0177	0.0178	0.815	1.63
16	50%	0.0251	0.0254	0.0252	0.0247	0.0243	0.0245	0.815	1.63
14	50%	0.0357	0.0362	0.0359	0.0351	0.0346	0.0349	0.815	1.63
12	50%	0.0528	0.0535	0.0532	0.0520	0.0512	0.0516	0.815	1.63
10	50%	0.0816	0.0829	0.0822	0.0804	0.0792	0.0798	0.815	1.63
8	50%	0.1326	0.1346	0.1336	0.1307	0.1287	0.1297	0.815	1.63
6	50%	0.2251	0.2284	0.2267	0.2218	0.2185	0.2201	0.815	1.63



H-Filed Strength at (distance from 6cm to 20cm at 2cm iteration) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (uT)	Position Right (uT)	Position Rear (uT)	Position Front (uT)	Position Top (uT)	Position Bottom (uT)
20	>98%	0.0168	0.0169	0.0170	0.0161	0.0163	0.0164
18	>98%	0.0224	0.0226	0.0228	0.0216	0.0218	0.0219
16	>98%	0.0309	0.0311	0.0313	0.0297	0.0299	0.0302
14	>98%	0.0439	0.0443	0.0446	0.0423	0.0426	0.0429
12	>98%	0.0650	0.0655	0.0660	0.0626	0.0630	0.0635
10	>98%	0.1006	0.1013	0.1021	0.0968	0.0976	0.0983
8	>98%	0.1634	0.1646	0.1658	0.1573	0.1585	0.1597
6	>98%	0.2772	0.2793	0.2814	0.2669	0.2689	0.2710

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position Bottom (A/m)	50% Limits (A/m)	Limits (A/m)
20	>98%	0.0134	0.0135	0.0136	0.0129	0.0130	0.0131	0.815	1.63
18	>98%	0.0179	0.0181	0.0182	0.0173	0.0174	0.0175	0.815	1.63
16	>98%	0.0247	0.0249	0.0251	0.0238	0.0240	0.0241	0.815	1.63
14	>98%	0.0351	0.0354	0.0357	0.0338	0.0341	0.0344	0.815	1.63
12	>98%	0.0520	0.0524	0.0528	0.0501	0.0504	0.0508	0.815	1.63
10	>98%	0.0804	0.0810	0.0816	0.0774	0.0780	0.0786	0.815	1.63
8	>98%	0.1307	0.1317	0.1326	0.1258	0.1268	0.1278	0.815	1.63
6	>98%	0.2218	0.2234	0.2251	0.2135	0.2152	0.2168	0.815	1.63

Note: A/m = uT/1.25



H-Filed Strength at (distance from 4cm to 0cm) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position Bottom (A/m)	50% Limits (A/m)	Limits (A/m)
4	<1%	0.3944	0.4001	0.3916	0.3972	0.3887	0.3859	0.815	1.63
4	50%	0.3859	0.3916	0.3887	0.3802	0.3745	0.3774	0.815	1.63
4	>98%	0.3802	0.3830	0.3859	0.3660	0.3689	0.3717	0.815	1.63
2	<1%	0.6192	0.6278	0.6144	0.6233	0.6100	0.6055	0.815	1.63
2	50%	0.6055	0.6144	0.6100	0.5966	0.5877	0.5922	0.815	1.63
2	>98%	0.5966	0.6011	0.6055	0.5744	0.5788	0.5833	0.815	1.63
0	<1%	0.7460	0.7563	0.7402	0.7510	0.7349	0.7295	0.815	1.63
0	50%	0.7295	0.7402	0.7349	0.7188	0.7081	0.7134	0.815	1.63
0	>98%	0.7188	0.7241	0.7295	0.6920	0.6973	0.7027	0.815	1.63

Note: Biot-Savar law:

1. Magnetic field on the axis of a current-carrying circle coil:

$$B = \frac{\mu_0 I R^2}{2(R^2 + X^2)^{\frac{3}{2}}}$$

R is the coil outside diameter radius.

X is the distance from the test point to the center of the coil circle.

B is the magnetic magnetic field.

2. According to the KDB 680106, the model needs to be validated by probe measurements at the two points closest to the surface of the device, in 2cm increments, and if there is a 30% agreement between the model and the (E-field and/or h-field) probe measurements, the validation is considered sufficient.

3. We derived the field strengths at 10cm to 8cm and 8cm to 6cm, respectively, which are close to the actual test values, based on the field strength at 6 cm, the field strength at 4cm and 2cm and 0 cm can be deduced.

4. A table of error data between the assessed and measured values:

distance (cm)	Measurements (A/m)	distance (cm)	Assessed (A/m)	Error (%)	Limit (%)
10	0.0829	\	\	\	\
8	0.1342	10 to 8	0.1307	2.61	<30
6	0.2289	8 to 6	0.2218	3.10	<30



5. Calculation process:

distance (cm)	Battery Level:	Position Left (A/m)
8	<1%	0.1357
6	<1%	0.2302
4	<1%	0.3944
2	<1%	0.6192
0	<1%	0.7460

$$8\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.1357 * 2(0.055^2 + 0.08^2)^{\frac{3}{2}} = 0.000248332$$

$$\text{To 6cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000248332}{2(0.055^2+0.06^2)^{\frac{3}{2}}} = 0.2302$$

$$6\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.2302 * 2(0.055^2 + 0.06^2)^{\frac{3}{2}} = 0.000248332$$

$$\text{To 4cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000248332}{2(0.055^2+0.04^2)^{\frac{3}{2}}} = 0.3944$$

$$4\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.3944 * 2(0.055^2 + 0.04^2)^{\frac{3}{2}} = 0.000248332$$

$$\text{To 2cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000248332}{2(0.055^2+0.02^2)^{\frac{3}{2}}} = 0.6192$$

$$2\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.6189 * 2(0.055^2 + 0.02^2)^{\frac{3}{2}} = 0.000248332$$

$$\text{To 0cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000248332}{2(0.055^2+0^2)^{\frac{3}{2}}} = 0.7460$$



ANT 2

H-Filed Strength at (distance from 6cm to 20cm at 2cm iteration) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (uT)	Position Right (uT)	Position Rear (uT)	Position Front (uT)	Position Top (uT)	Position BOTTOM (uT)
20	<1%	0.0171	0.0174	0.0173	0.0177	0.0165	0.0170
18	<1%	0.0232	0.0235	0.0231	0.0230	0.0221	0.0224
16	<1%	0.0313	0.0319	0.0318	0.0313	0.0304	0.0308
14	<1%	0.0447	0.0457	0.0449	0.0454	0.0437	0.0436
12	<1%	0.0663	0.0674	0.0665	0.0699	0.0644	0.0650
10	<1%	0.1024	0.1038	0.1030	0.1627	0.0995	0.1001
8	<1%	0.1658	0.1684	0.1671	0.1268	0.1611	0.1626
6	<1%	0.2818	0.2858	0.2839	0.2542	0.2735	0.2751

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position BOTTOM (A/m)	50% Limits (A/m)	Limits (A/m)
20	<1%	0.0137	0.0139	0.0139	0.0141	0.0132	0.0136	0.815	1.63
18	<1%	0.0185	0.0188	0.0185	0.0184	0.0177	0.0179	0.815	1.63
16	<1%	0.0251	0.0255	0.0254	0.0250	0.0244	0.0246	0.815	1.63
14	<1%	0.0358	0.0366	0.0359	0.0364	0.0350	0.0349	0.815	1.63
12	<1%	0.0530	0.0539	0.0532	0.0559	0.0515	0.0520	0.815	1.63
10	<1%	0.0819	0.0830	0.0824	0.1302	0.0796	0.0801	0.815	1.63
8	<1%	0.1331	0.1347	0.1337	0.1015	0.1289	0.1301	0.815	1.63
6	<1%	0.2258	0.2286	0.2271	0.2033	0.2188	0.2201	0.815	1.63



H-Filed Strength at (distance from 6cm to 20cm at 2cm iteration) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (uT)	Position Right (uT)	Position Rear (uT)	Position Front (uT)	Position Top (uT)	Position Bottom (uT)
20	50%	0.0172	0.0174	0.0175	0.0175	0.0169	0.0170
18	50%	0.0229	0.0236	0.0230	0.0232	0.0225	0.0225
16	50%	0.0316	0.0321	0.0318	0.0316	0.0308	0.0309
14	50%	0.0447	0.0456	0.0454	0.0452	0.0436	0.0437
12	50%	0.0663	0.0672	0.0668	0.0698	0.0643	0.0647
10	50%	0.1023	0.1037	0.1029	0.1632	0.0992	0.1000
8	50%	0.1658	0.1684	0.1675	0.1270	0.1612	0.1627
6	50%	0.2816	0.2857	0.2838	0.2541	0.2732	0.2753

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position Bottom (A/m)	50% Limits (A/m)	Limits (A/m)
20	50%	0.0138	0.0139	0.0140	0.0140	0.0135	0.0136	0.815	1.63
18	50%	0.0183	0.0189	0.0184	0.0186	0.0180	0.0180	0.815	1.63
16	50%	0.0253	0.0257	0.0255	0.0253	0.0246	0.0247	0.815	1.63
14	50%	0.0358	0.0365	0.0363	0.0362	0.0349	0.0349	0.815	1.63
12	50%	0.0530	0.0538	0.0534	0.0558	0.0515	0.0518	0.815	1.63
10	50%	0.0819	0.0830	0.0823	0.1305	0.0794	0.0800	0.815	1.63
8	50%	0.1326	0.1347	0.1340	0.1016	0.1289	0.1301	0.815	1.63
6	50%	0.2253	0.2286	0.2270	0.2033	0.2186	0.2202	0.815	1.63



H-Filed Strength at (distance from 6cm to 20cm at 2cm iteration) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (uT)	Position Right (uT)	Position Rear (uT)	Position Front (uT)	Position Top (uT)	Position Bottom (uT)
20	>98%	0.0173	0.0174	0.0174	0.0176	0.0165	0.0171
18	>98%	0.0231	0.0235	0.0232	0.0234	0.0222	0.0223
16	>98%	0.0316	0.0321	0.0318	0.0315	0.0306	0.0310
14	>98%	0.0449	0.0456	0.0453	0.0451	0.0438	0.0436
12	>98%	0.0662	0.0674	0.0667	0.0698	0.0640	0.0646
10	>98%	0.1022	0.1036	0.1030	0.1630	0.0995	0.1001
8	>98%	0.1658	0.1685	0.1673	0.1269	0.1611	0.1627
6	>98%	0.2819	0.2856	0.2836	0.2546	0.2733	0.2755

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position Bottom (A/m)	50% Limits (A/m)	Limits (A/m)
20	>98%	0.0138	0.0139	0.0139	0.0141	0.0132	0.0136	0.815	1.63
18	>98%	0.0185	0.0188	0.0185	0.0187	0.0177	0.0178	0.815	1.63
16	>98%	0.0252	0.0257	0.0254	0.0252	0.0245	0.0248	0.815	1.63
14	>98%	0.0359	0.0365	0.0362	0.0360	0.0350	0.0349	0.815	1.63
12	>98%	0.0529	0.0539	0.0533	0.0558	0.0512	0.0517	0.815	1.63
10	>98%	0.0817	0.0829	0.0824	0.1304	0.0796	0.0801	0.815	1.63
8	>98%	0.1326	0.1348	0.1338	0.1015	0.1288	0.1301	0.815	1.63
6	>98%	0.2255	0.2285	0.2269	0.2037	0.2187	0.2204	0.815	1.63

Note: A/m = uT/1.25



H-Filed Strength at (distance from 4cm to 0cm) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position Bottom (A/m)	50% Limits (A/m)	Limits (A/m)
4	<1%	0.3871	0.4037	0.3931	0.3903	0.3913	0.3902	0.815	1.63
4	50%	0.3884	0.3932	0.3911	0.3902	0.3766	0.3798	0.815	1.63
4	>98%	0.3848	0.3872	0.3901	0.3866	0.3694	0.3727	0.815	1.63
2	<1%	0.6074	0.6291	0.6197	0.6122	0.6126	0.6087	0.815	1.63
2	50%	0.6107	0.6154	0.6110	0.5590	0.5878	0.5953	0.815	1.63
2	>98%	0.5984	0.6021	0.6056	0.6041	0.5829	0.5855	0.815	1.63
0	<1%	0.7317	0.7599	0.7413	0.7483	0.7368	0.7322	0.815	1.63
0	50%	0.7334	0.7446	0.7394	0.7339	0.7118	0.7157	0.815	1.63
0	>98%	0.7238	0.7261	0.7345	0.7714	0.6984	0.7051	0.815	1.63

Note: Biot-Savar law:

1. Magnetic field on the axis of a current-carrying circle coil:

$$B = \frac{\mu_0 I R^2}{2(R^2 + X^2)^{\frac{3}{2}}}$$

R is the coil outside diameter radius.

X is the distance from the test point to the center of the coil circle.

B is the magnetic magnetic field.

2. According to the KDB 680106, the model needs to be validated by probe measurements at the two points closest to the surface of the device, in 2cm increments, and if there is a 30% agreement between the model and the (E-field and/or h-field) probe measurements, the validation is considered sufficient.

3. We derived the field strengths at 10cm to 8cm and 8cm to 6cm, respectively, which are close to the actual test values, based on the field strength at 6 cm, the field strength at 4cm and 2cm and 0 cm can be deduced.

4. A table of error data between the assessed and measured values:

distance (cm)	Measurements (A/m)	distance (cm)	Assessed (A/m)	Error (%)	Limit (%)
10	0.0819	\	\	\	\
8	0.1331	10 to 8	0.1326	0.38	<30
6	0.2258	8 to 6	0.2255	0.13	<30



5. Calculation process:

distance (cm)	Battery Level:	Position Left (A/m)
8	<1%	0.1331
6	<1%	0.2258
4	<1%	0.3871
2	<1%	0.6074
0	<1%	0.7317

$$8\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.1331 * 2(0.055^2 + 0.08^2)^{\frac{3}{2}} = 0.000243490$$

$$\text{To 6cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000243490}{2(0.055^2+0.06^2)^{\frac{3}{2}}} = 0.2302$$

$$6\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.2302 * 2(0.055^2 + 0.06^2)^{\frac{3}{2}} = 0.000243490$$

$$\text{To 4cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000243490}{2(0.055^2+0.04^2)^{\frac{3}{2}}} = 0.3944$$

$$4\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.3944 * 2(0.055^2 + 0.04^2)^{\frac{3}{2}} = 0.000243490$$

$$\text{To 2cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000243490}{2(0.055^2+0.02^2)^{\frac{3}{2}}} = 0.6192$$

$$2\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.6189 * 2(0.055^2 + 0.02^2)^{\frac{3}{2}} = 0.000243490$$


$$\text{To 0cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000243490}{2(0.055^2+0^2)^{\frac{3}{2}}} = 0.7460$$





6 Test Set-up Photo

Probe	Length	Width	Radius
	11cm	11cm	5.5cm

Test distance: 20cm

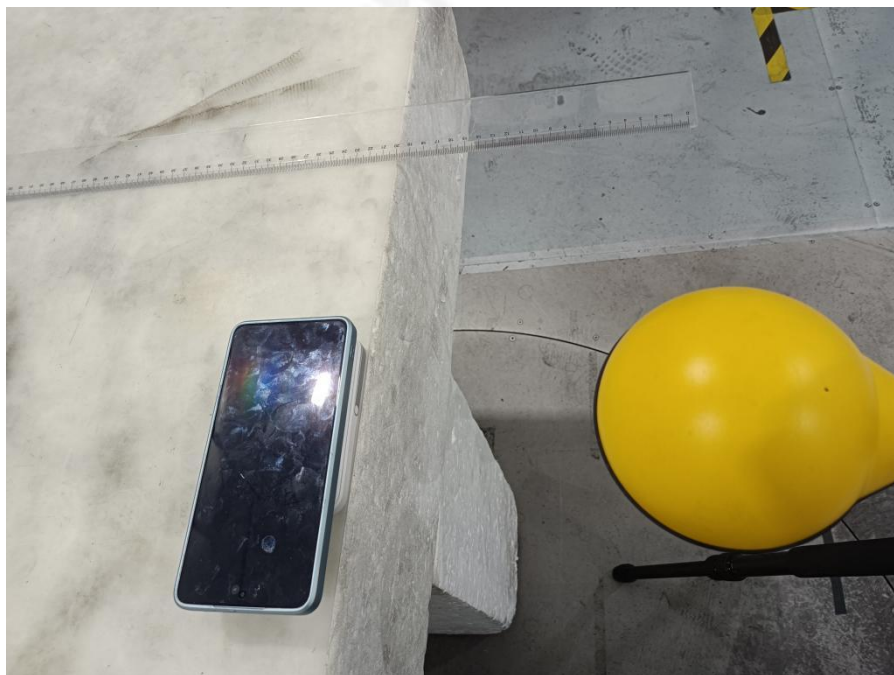

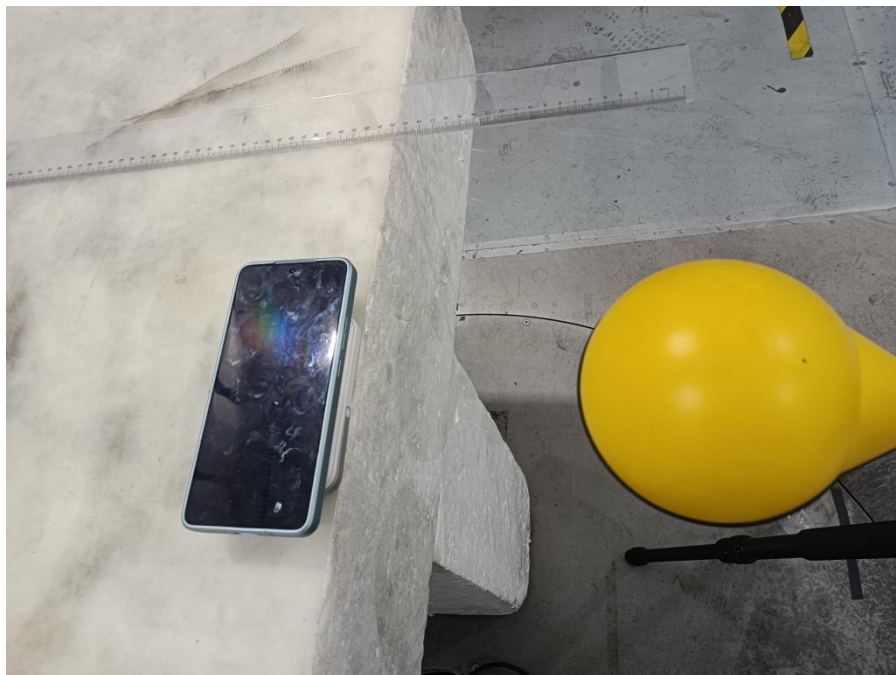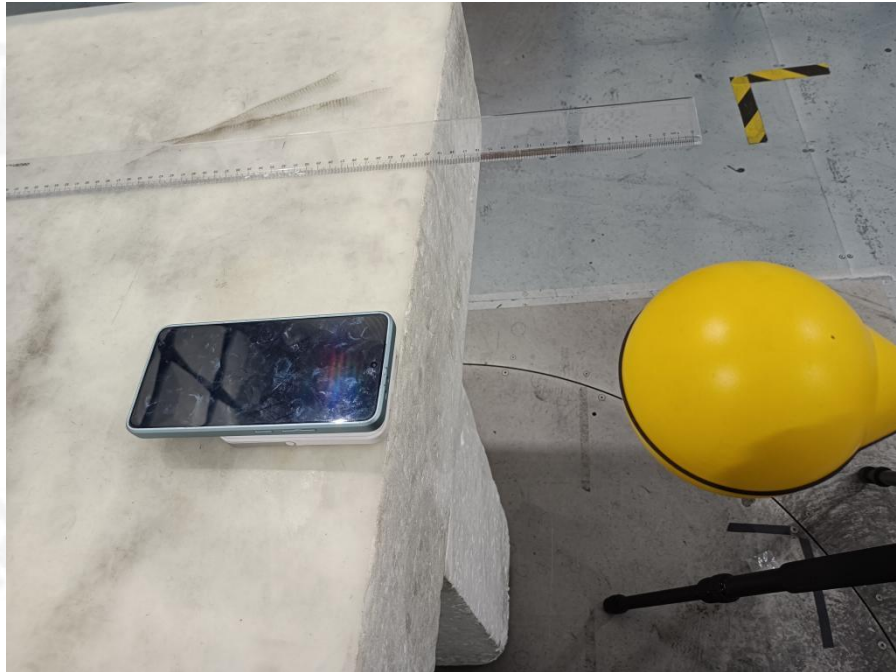



Test distance: 6cm

