

# acknowledgment

Customer name: Shenzhen Yi Zhong Technology Co., Ltd.

Customer data: 03020800065

Our model number: G43.5\*5.3\*0.65-6.5UH-20MM

Sample delivery date: May 21, 2025

Supply side: Dongguan Jerice Technology Co., Ltd.

Draw up	Audit	Permission granted
Wang Liying	Deng xianggui	Lu Rusheng

Client acknowledges:

Qualified	Disqualified	Admit it
Notes		

Dongguan Jerice Technology Co., Ltd.



Tel: \_\_\_\_\_

Fax: 86+13632701380

Address: 96 Long Wu Road, Tai Ling Shan, Dongguan (3F, building L, Kam Hung Tat Science and Technology Park)

Customer name	Customer data	Our model number	Version	Date
Yi Zhong	03020800065	G43.5*5.3*0.65-6.5UH-20MM	A0	May21, 2025

一、 Floor plan: unit: MM

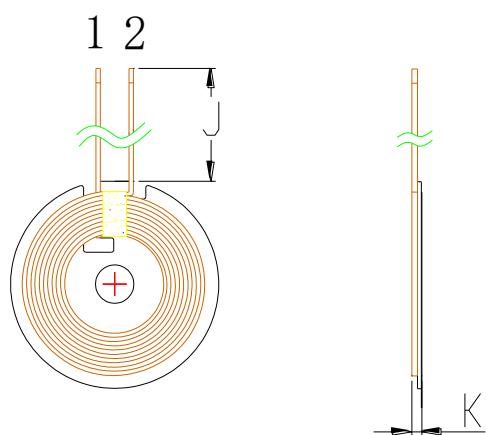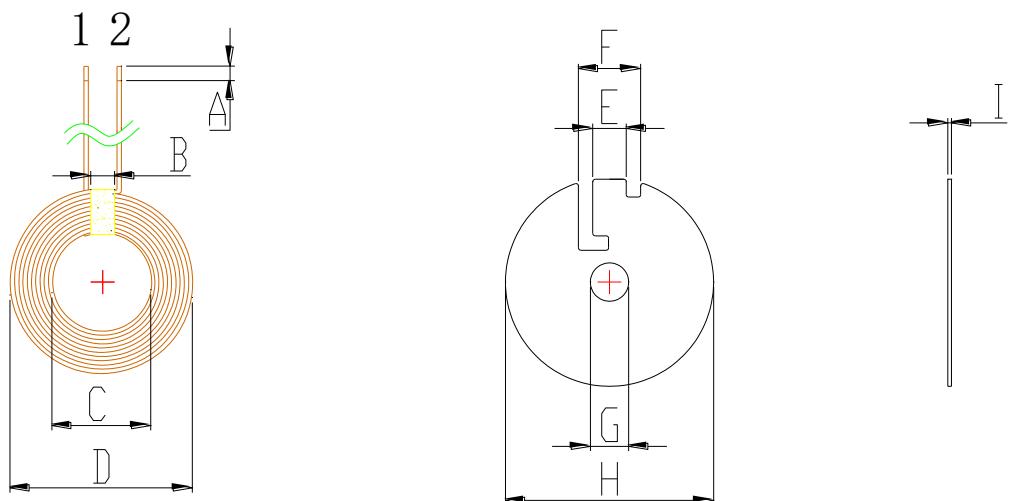

A	2.0±1
B	8
C	20.5±0.2
D	39 MAX
E	7.0±0.3
F	13±0.5
G	5±0.2
H	43.5±0.3
I	0.65±0.1
J	20±1
K	1.5 MAX

二、 Product parameters:

Feet	Line diameter	Number of turns	Notes
1 - 2	0.08*24*2P	10T	silk covered wire



---

### 三、 Technical Requirements:

1. Fix the thread head and tail to prevent the thread from loosening and breaking.
2. According to customer's requirements, cut the excessively long thread ends and plate them with tin, and the depth of tin plating shall be  $2\pm1$  mm.
3. Put appropriate white glue on the magnetic disk and attach the coil, and ensure that the surface of the product is clean and tidy during the process.
4. The hard magnetic sheet used has a round hole and is not damaged.



### 四、 Electrical parameter:

1. Inductance value,

$$\text{PIN } 1 - 2 = 6.5 \pm 0.3 \text{UH}$$

The above inductances and Q values are based on Quanhua 1062A instrument and 100KHZ/1.0Vrms as standard or equivalent instrument.

五、 Bill of materials:

NO	Name	Material Quality	Suppliers	Notes
1	silk covered wire	0.08*24*2P	Uyghur or equivalent	
2	Disk	G43.5*5.3*0.65 Hard base wood	TX or equivalent	
3	Tin	High temperature and environmental protection	Thorland or equivalent	
4	White glue	BY882	Treasure month or equivalent	
5	Double-sided glue	42*8mm	Hung Fai or equivalent	
6	High temperature adhesive tape	8MM		