

FCC TEST REPORT

FCC ID: 2A9Q9-M2198Q

Report No. : SSP25050264-1E

Prepared For : Shenzhen Zhongyi Technology Co., Ltd
10000mAh Portable Wireless Charging Station &

Product Name : Magsafe Power Bank Built-in Cables(3-In-1)

Model Name : M2198Q

FCC Rule : FCC Part 15 Subpart C

Date of Issue : 2025-06-07

Prepared By : Shenzhen CCUT Quality Technology Co., Ltd.



Shenzhen CCUT Quality Technology Co., Ltd.

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,
Guangdong, China; (Tel.:+86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated
without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant:	Shenzhen Zhongyi Technology Co., Ltd Room 401, No.4 Road One, Shangxue Scienceand Technology City, Xinxue Address of Applicant.....:	Community, Bantian Street, Longgang District, Shenzhen China
Manufacturer:	Shenzhen Zhongyi Technology Co., Ltd Room 401, No.4 Road One, Shangxue Scienceand Technology City, Xinxue Address of Manufacturer.....:	Community, Bantian Street, Longgang District, Shenzhen China
Product Name:	10000mAh Portable Wireless Charging Station & Magsafe Power Bank Built-in Cables(3-In-1)	
Brand Name:	-	
Main Model:	M2198Q	
Series Models:	25013-BLK-1	
Test Standard:	FCC Part 15 Subpart C ANSI C63.4-2014 ANSI C63.10-2013	
Date of Test	2025-05-22 to 2025-06-06	
Test Result:	PASSED	
Tested Engineer	<u>Colin Chen</u> (Colin Chen)	
Project Manager:	<u>Lorzix Luo</u> (Lorzix Luo)	
Authorized Signatory:	<u>Lahm Peng</u> (Lahm Peng)	
Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.		

CONTENTS

1. General Information.....	5
1.1 Product Information	5
1.2 Test Setup Information.....	6
1.3 Compliance Standards.....	7
1.4 Test Facilities.....	7
1.5 List of Measurement Instruments	8
1.6 Measurement Uncertainty	8
2. Summary of Test Results.....	9
3. Antenna Requirement.....	10
3.1 Standard and Limit.....	10
3.2 Test Result.....	10
4. Conducted Emissions	11
4.1 Standard and Limit.....	11
4.2 Test Procedure.....	11
4.3 Test Data and Results	12
5. Radiated Emissions	17
5.1 Standard and Limit.....	17
5.2 Test Procedure.....	17
5.3 Test Data and Results	19
6. Occupied Bandwidth	36
6.1 Standard and Limit.....	36
6.2 Test Procedure.....	36
6.3 Test Data and Results	36

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2025-06-07	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	10000mAh Portable Wireless Charging Station & Magsafe Power Bank Built-in Cables(3-In-1)
Trade Name:	-
Main Model:	M2198Q
Series Models:	25013-BLK-1
Rated Voltage:	Type-C Input: 5V=3A, 9V=2A, 12V=1.5A (18W Max) USB-A Output: 5V=3A, 9V=2A, 12V=1.5A (18W Max) Type-C Output: 5V=2.8A, 9V=2A, 12V=1.5A (18W Max) Type-C1 Cable Output: 5V=3A, 9V=2.22A, 12V=1.67A (20W Max) Type-C2 Cable Output: 5V=2.4A (12W Max) Watch Wireless Output: 2W (Max) Wireless Output: 5W, 7.5W, 10W, 15W (Max)
Battery:	DC 3.85V, 10000mAh, 38.5Wh
Test Sample No:	SSP25050264-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	
Note 2: The color of appearance and model name of series models listed are different from the main model, but the circuit and the electronic construction are the same, declared by the manufacturer.	

Wireless Specification	
Wireless Standard:	Wireless charging
Operating Frequency:	Wireless charging Output (Phone):110.5kHz-205kHz, Wireless charging Output (Watch): 310kHz-340kHz
Modulation:	ASK
Antenna Gain:	0dBi
Type of Antenna:	Coil Antenna
Type of Device:	☒ Portable Device ☐ Mobile Device ☐ Modular Device

1.2 Test Setup Information

List of Test Modes			
Test Mode	Description		Remark
TM1	Wireless charging 15W(Phone)		-
TM2	Wireless charging 10W(Phone)		-
TM3	Wireless charging 7.5W(Phone)		-
TM4	Wireless charging 5W(Phone)		-
TM5	Wireless charging 2W(Watch)		
TM6	Wireless charging 5W(Phone)+Charging		In charging mode, wireless charging only supports 5W
TM7	Wireless charging 2W(Watch)+Charging		In charging mode, wireless charging only supports 2W
TM8	Wireless charging 5W (Phone) +Wireless charging 2W (Watch)		Charging is not supported when working simultaneously
Note: All modes above have been tested and only the worst modes: TM1, TM5, TM6, TM7 data are represented in the report.			
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
USB Cable	100	Unshielded	Without Ferrite
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Dummy load(15W)	YBZ	YBZ-001	N/A
Dummy load(5W)	YBZ	YBZ-002	N/A
Adapter	UGREEN	CD289	90324

1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

1.4 Test Facilities

Laboratory Name:	Shenzhen CCUT Quality Technology Co., Ltd. 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6983.01
FCC Registration No.:	583813
FCC Designation No.:	CN1373
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

1.5 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Conducted Emissions					
AMN	ROHDE&SCHWARZ	ENV216	101097	2024-08-07	2025-08-06
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2024-08-07	2025-08-06
Test Cable	N/A	Cable 5	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	EMEC-3A1+	N/A	N/A
Radiated Emissions					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2024-08-07	2025-08-06
Amplifier	SCHWARZBECK	BBV 9743B	00251	2024-08-07	2025-08-06
Amplifier	HUABO	YXL0518-2.5-45	--	2024-08-07	2025-08-06
Loop Antenna	DAZE	ZN30900C	21104	2024-08-03	2025-08-02
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2024-08-03	2025-08-02
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2024-08-03	2025-08-02
Attenuator	QUANJUDA	6dB	220731	2024-08-07	2025-08-06
Test Cable	N/A	Cable 1	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 2	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 3	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 4	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	FA-03A2 RE+	N/A	N/A
Conducted RF Testing					
RF Test System	MWRFTTest	MW100-RFCB	220418SQS-37	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	ATO-90521	2024-08-07	2025-08-06

1.6 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Emissions	9kHz ~ 30MHz	±1.64 dB
Radiated Emissions	9kHz ~ 30MHz	±2.88 dB
	30MHz ~ 1GHz	±3.32 dB
	1GHz ~ 18GHz	±3.50 dB
	18GHz ~ 40GHz	±3.66 dB
Occupied Bandwidth	9kHz ~ 26GHz	±4.0 %

2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.203	Antenna Requirement	Passed
FCC Part 15.207	Conducted Emissions	Passed
FCC Part 15.209	Radiated Emissions	Passed
FCC Part 15.215(c)	Occupied Bandwidth	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

3. Antenna Requirement

3.1 Standard and Limit

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an Coil antenna, fulfill the requirement of this section.

4. Conducted Emissions

4.1 Standard and Limit


According to the rule FCC Part 15.207, Conducted emissions limit, the limit for a wireless device as below:

Frequency of Emission (MHz)	Conducted emissions (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz
 Note 2: The lower limit applies at the band edges

4.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.2.

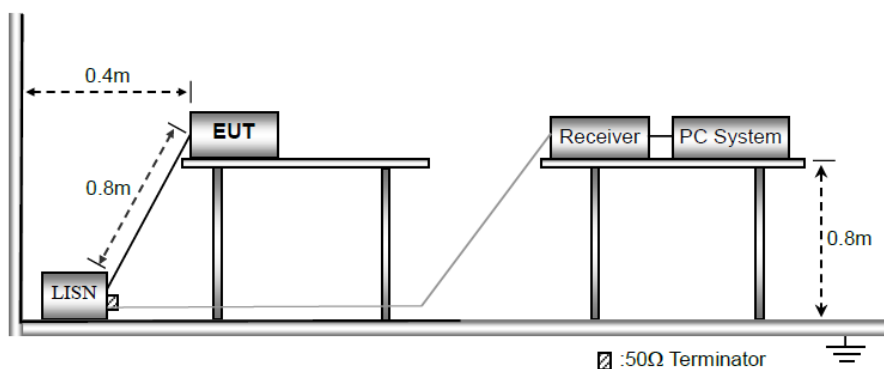

Test Setup Block Diagram

a) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following is the setting of the receiver

Attenuation: 10dB

Start Frequency: 0.15MHz

Stop Frequency: 30MHz

IF Bandwidth: 9kHz

c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

f) LISN is at least 80 cm from nearest part of EUT chassis.

g) For the actual test configuration, please refer to the related Item - photographs of the test setup.


4.3 Test Data and Results

Based on all tested mode data, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case TM6 and TM7 as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Conducted Emissions


Tested Mode:	TM6
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

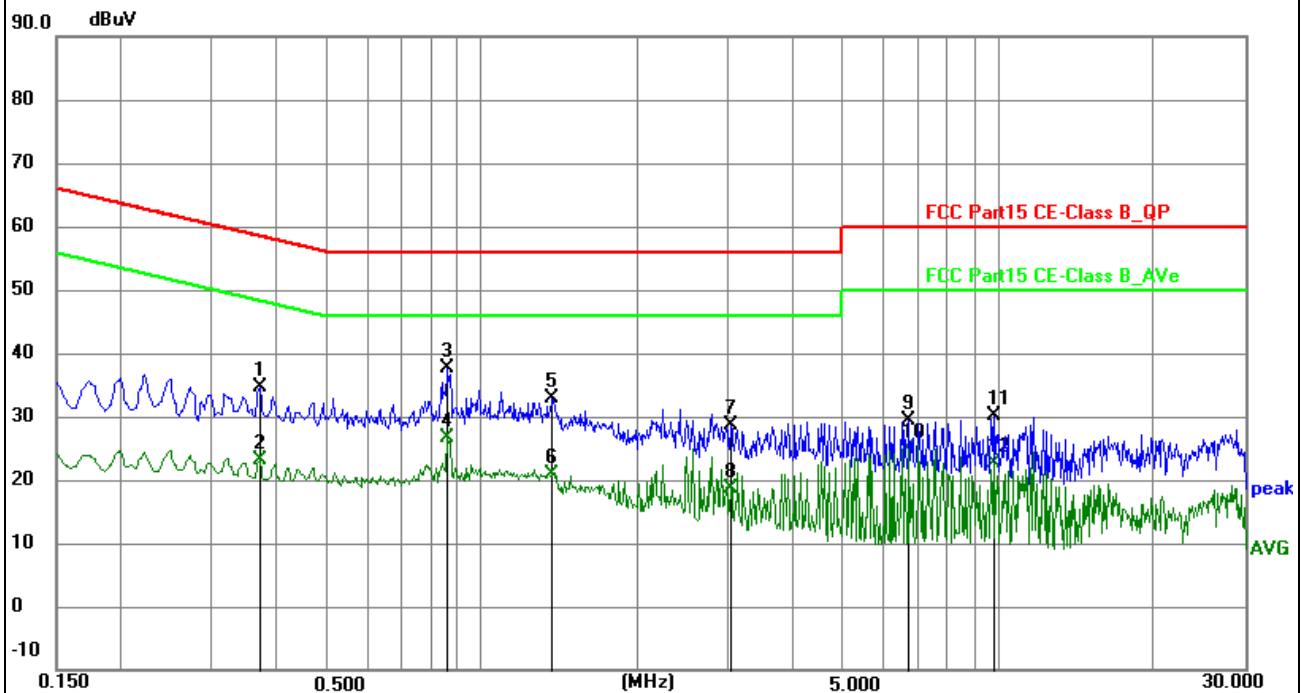

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3704	25.27	9.39	34.66	58.49	-23.83	QP	P	
2	0.3704	13.79	9.39	23.18	48.49	-25.31	AVG	P	
3 *	0.8610	28.34	9.39	37.73	56.00	-18.27	QP	P	
4	0.8610	17.21	9.39	26.60	46.00	-19.40	AVG	P	
5	1.3695	23.37	9.44	32.81	56.00	-23.19	QP	P	
6	1.3695	11.54	9.44	20.98	46.00	-25.02	AVG	P	
7	3.0390	19.18	9.50	28.68	56.00	-27.32	QP	P	
8	3.0390	9.22	9.50	18.72	46.00	-27.28	AVG	P	
9	6.7200	19.71	9.58	29.29	60.00	-30.71	QP	P	
10	6.7200	15.23	9.58	24.81	50.00	-25.19	AVG	P	
11	9.8385	20.61	9.56	30.17	60.00	-29.83	QP	P	
12	9.8385	13.07	9.56	22.63	50.00	-27.37	AVG	P	

Test Plots and Data of Conducted Emissions


Tested Mode:	TM6
Test Voltage:	AC 120V/60Hz
Test Power Line:	Live
Remark:	

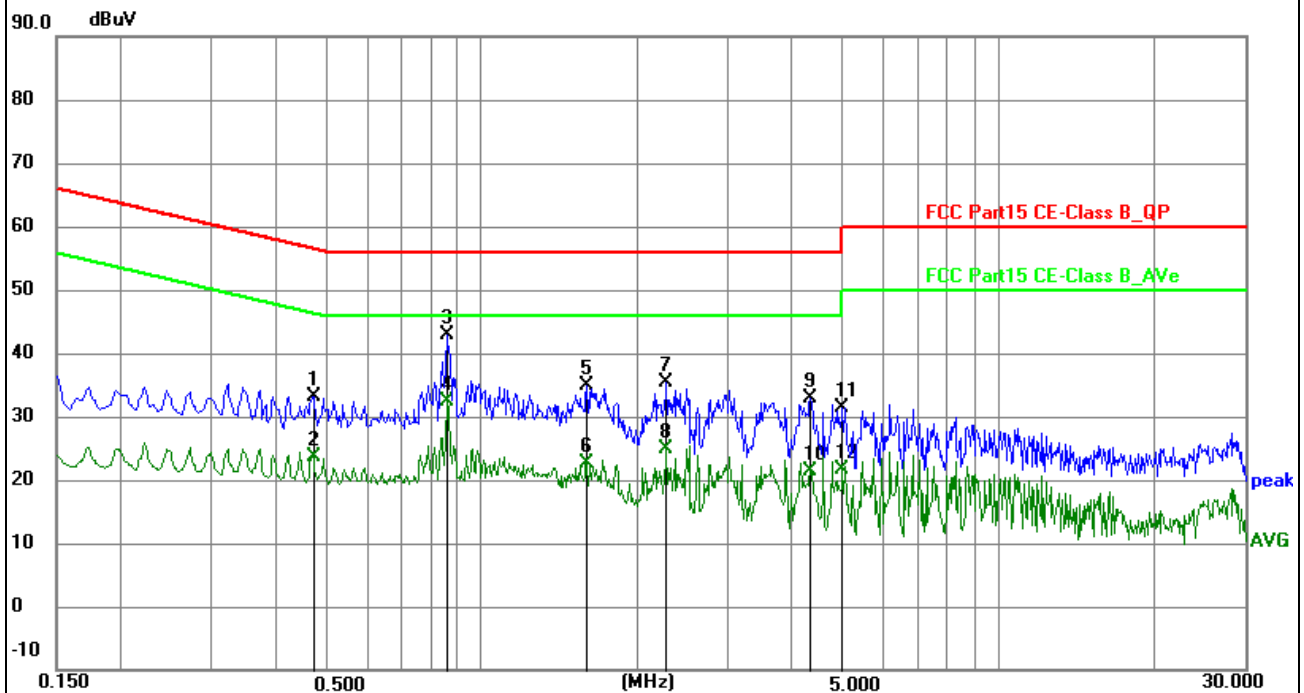

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4695	23.59	9.58	33.17	56.52	-23.35	QP	P	
2	0.4695	14.11	9.58	23.69	46.52	-22.83	AVG	P	
3 *	0.8565	33.22	9.58	42.80	56.00	-13.20	QP	P	
4	0.8565	22.80	9.58	32.38	46.00	-13.62	AVG	P	
5	1.5945	25.12	9.64	34.76	56.00	-21.24	QP	P	
6	1.5945	12.88	9.64	22.52	46.00	-23.48	AVG	P	
7	2.2740	25.73	9.67	35.40	56.00	-20.60	QP	P	
8	2.2740	15.18	9.67	24.85	46.00	-21.15	AVG	P	
9	4.3215	23.17	9.73	32.90	56.00	-23.10	QP	P	
10	4.3215	11.69	9.73	21.42	46.00	-24.58	AVG	P	
11	5.0010	21.66	9.76	31.42	60.00	-28.58	QP	P	
12	5.0010	11.81	9.76	21.57	50.00	-28.43	AVG	P	

Test Plots and Data of Conducted Emissions


Tested Mode:	TM7
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

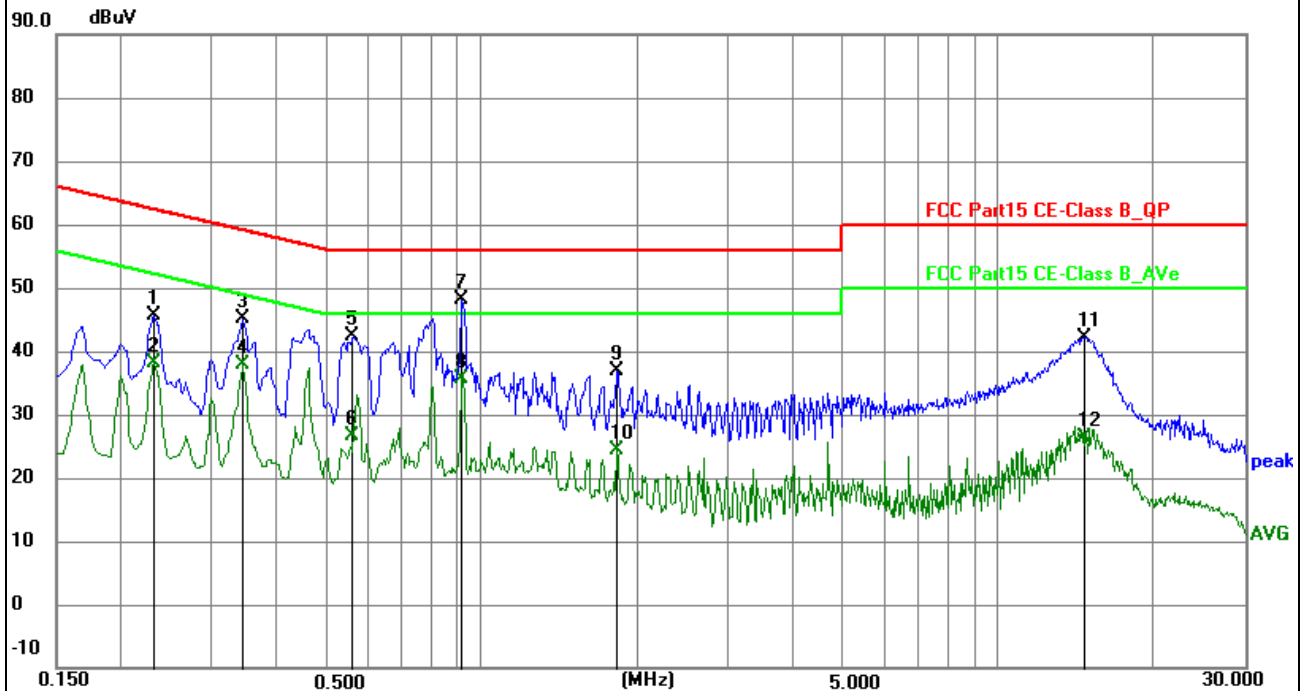

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2310	36.49	9.26	45.75	62.41	-16.66	QP	P	
2	0.2310	28.87	9.26	38.13	52.41	-14.28	AVG	P	
3	0.3435	35.80	9.39	45.19	59.12	-13.93	QP	P	
4	0.3435	28.44	9.39	37.83	49.12	-11.29	AVG	P	
5	0.5639	33.03	9.37	42.40	56.00	-13.60	QP	P	
6	0.5639	17.16	9.37	26.53	46.00	-19.47	AVG	P	
7 *	0.9150	38.81	9.38	48.19	56.00	-7.81	QP	P	
8	0.9150	26.18	9.38	35.56	46.00	-10.44	AVG	P	
9	1.8285	27.53	9.46	36.99	56.00	-19.01	QP	P	
10	1.8285	14.81	9.46	24.27	46.00	-21.73	AVG	P	
11	14.6895	32.70	9.53	42.23	60.00	-17.77	QP	P	
12	14.6895	16.75	9.53	26.28	50.00	-23.72	AVG	P	

Test Plots and Data of Conducted Emissions

Tested Mode:	TM7
Test Voltage:	AC 120V/60Hz
Test Power Line:	Live
Remark:	

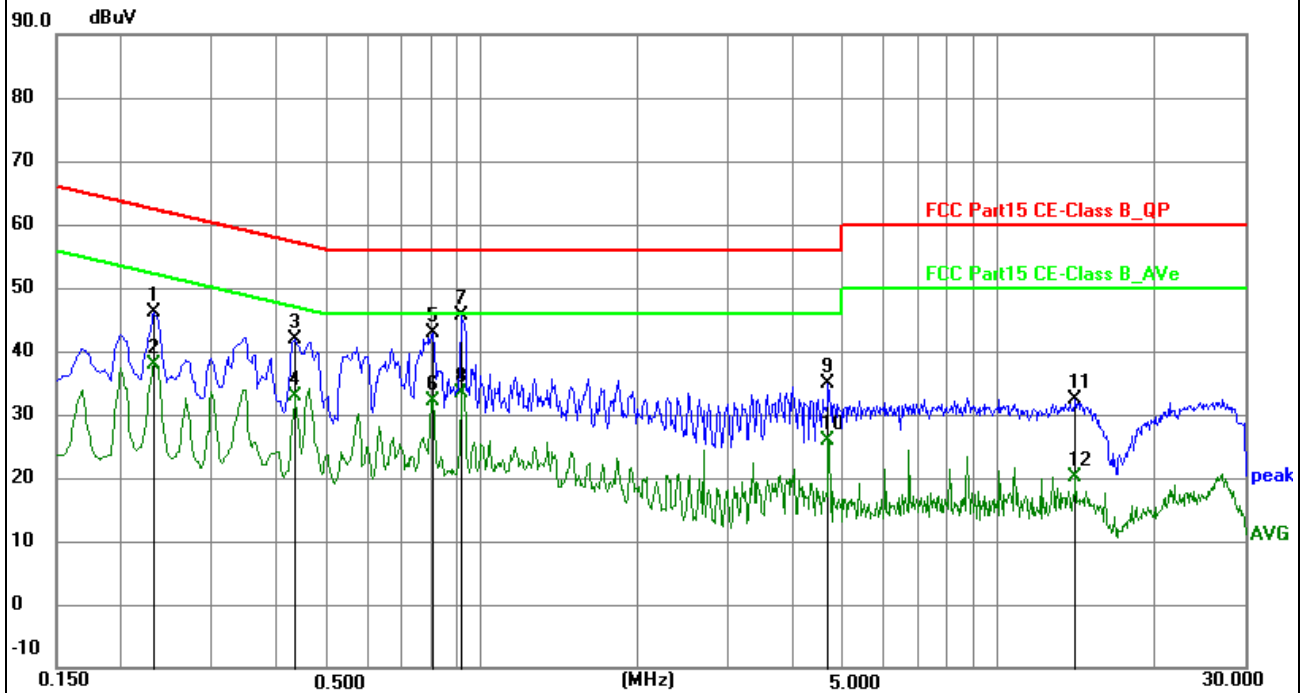

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2310	36.67	9.45	46.12	62.41	-16.29	QP	P	
2	0.2310	28.48	9.45	37.93	52.41	-14.48	AVG	P	
3	0.4335	32.41	9.57	41.98	57.19	-15.21	QP	P	
4	0.4335	23.36	9.57	32.93	47.19	-14.26	AVG	P	
5	0.8025	33.30	9.61	42.91	56.00	-13.09	QP	P	
6	0.8025	22.44	9.61	32.05	46.00	-13.95	AVG	P	
7 *	0.9105	36.04	9.57	45.61	56.00	-10.39	QP	P	
8	0.9105	23.76	9.57	33.33	46.00	-12.67	AVG	P	
9	4.6950	25.21	9.75	34.96	56.00	-21.04	QP	P	
10	4.6950	16.25	9.75	26.00	46.00	-20.00	AVG	P	
11	14.1000	22.62	9.73	32.35	60.00	-27.65	QP	P	
12	14.1000	10.42	9.73	20.15	50.00	-29.85	AVG	P	

5. Radiated Emissions

5.1 Standard and Limit


According to the rule FCC Part 15.209, Radiated emission limit for a wireless device as below:

Frequency of Emission (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3
Note: The more stringent limit applies at transition frequencies.		


Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

5.2 Test Procedure


Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6.

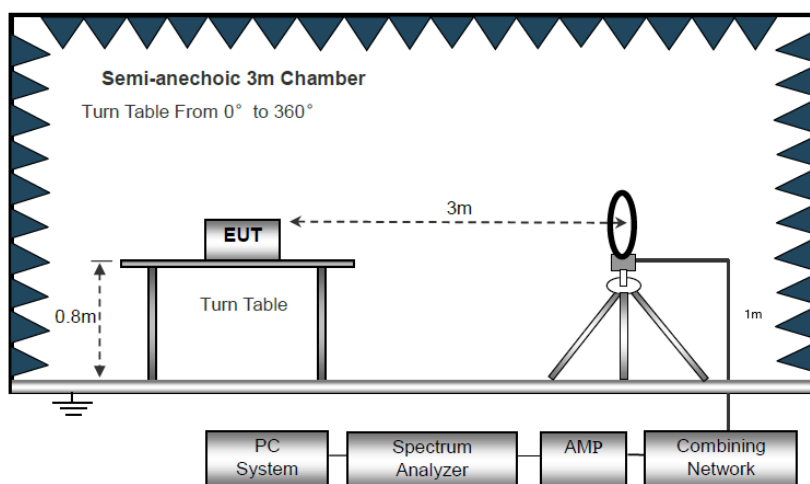

Block Diagram of Radiated Emission Below 30MHz

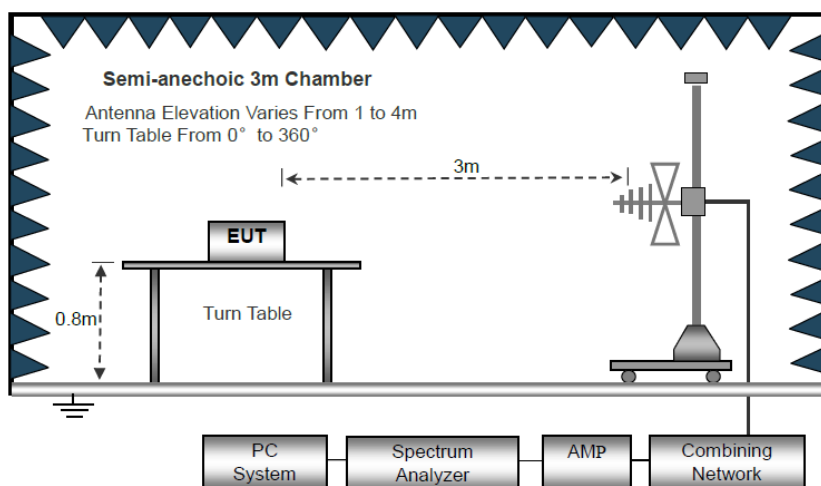

Block Diagram of Radiated Emission From 30MHz to 1GHz

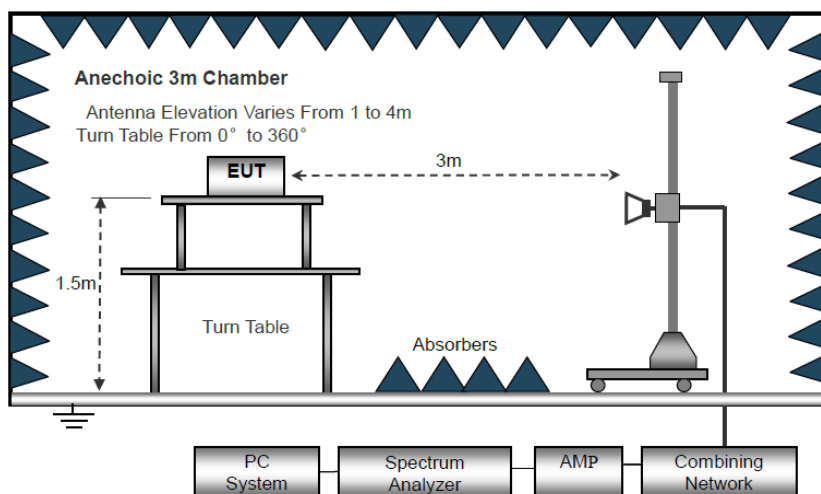

Block Diagram of Radiated Emission Above 1GHz


- a) The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- b) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- c) Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured
RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$, 10kHz for $f < 30\text{MHz}$
VBW $\geq$ RBW, Sweep = auto
Detector function = peak
Trace = max hold
- d) Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- e) The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.
- f) For the actual test configuration, please refer to the related item - EUT test photos.

5.3 Test Data and Results


Based on all mode tested data, the EUT complied with the FCC Part 15.209 standard limit for a wireless device, and with the worst case TM1 and TM6 and TM5 and TM7 as below:

Test Data of Radiated Emissions from 9kHz to 30MHz

Test Mode:	TM6	Phase:	Coplaner
Test Voltage:	Wireless charging 5W(Phone)+Charging		
Remark:			

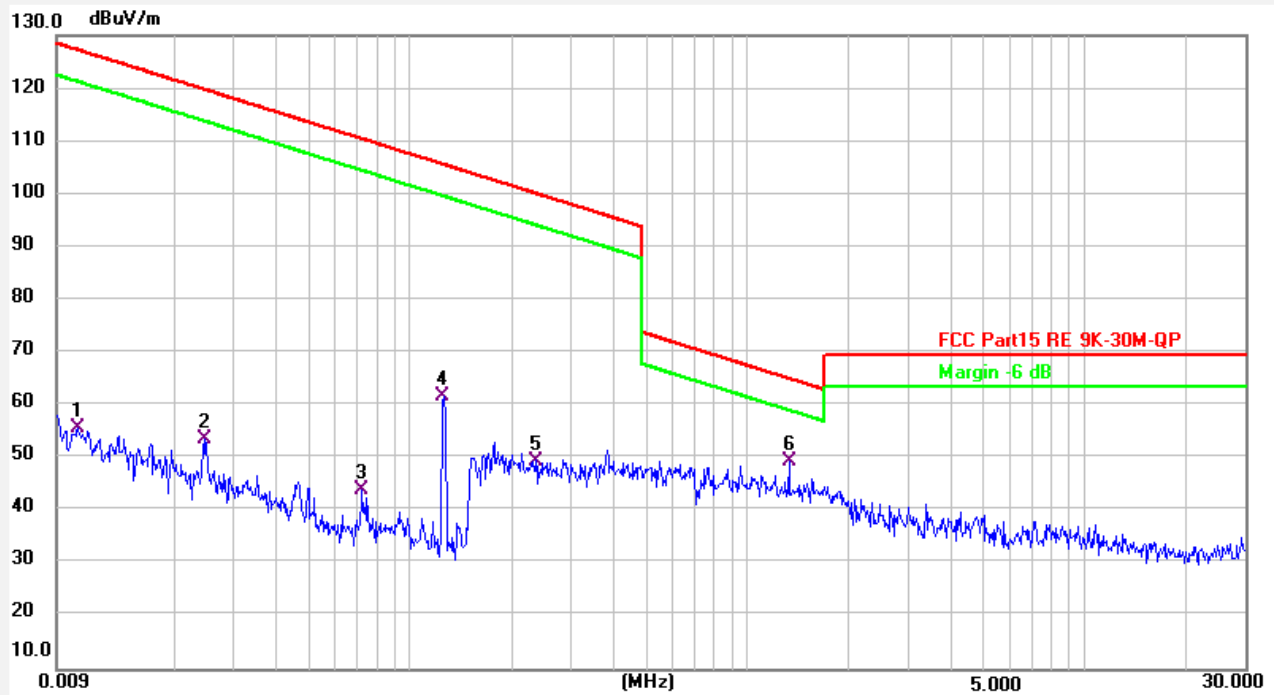


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0104	19.88	35.90	55.78	127.24	-71.46	QP	100	0	P	
2	0.0245	19.08	34.44	53.52	119.81	-66.29	QP	100	0	P	
3	0.0720	17.96	26.21	44.17	110.45	-66.28	QP	100	0	P	
4	0.1259	36.26	25.40	61.66	105.60	-43.94	QP	100	0	P	
5	0.2353	23.83	25.77	49.60	100.17	-50.57	QP	100	0	P	
6 *	1.3237	23.51	25.97	49.48	65.16	-15.68	QP	100	0	P	

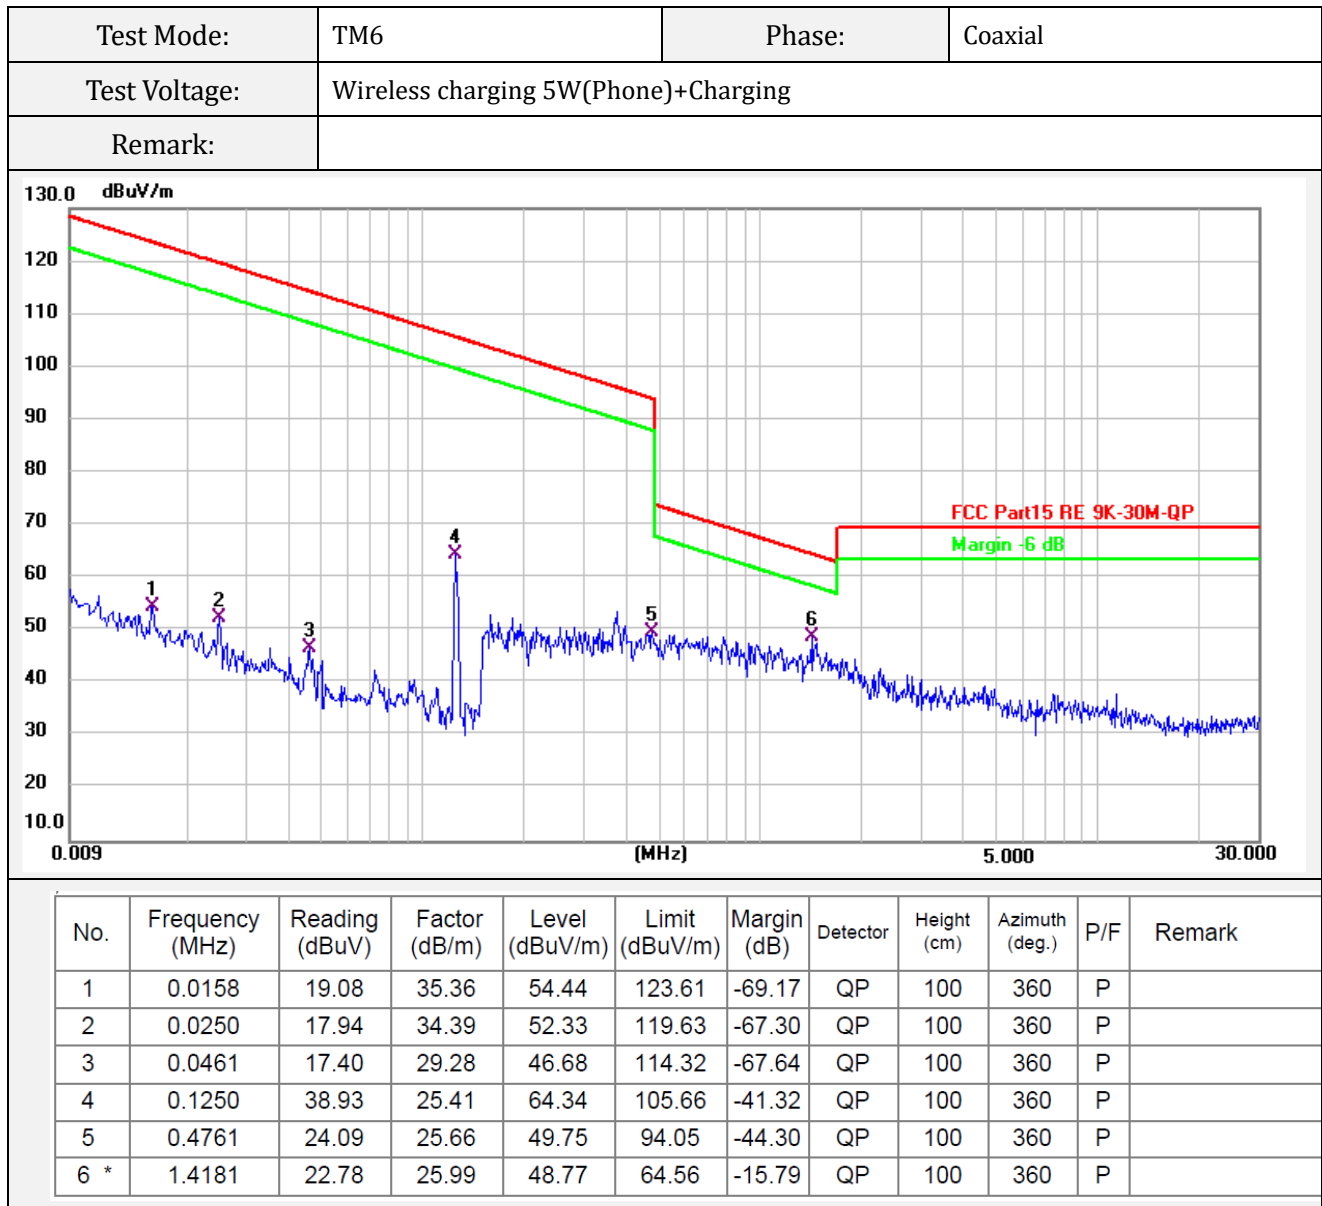


Test Data of Radiated Emissions from 9kHz to 30MHz

Test Mode:	TM7	Phase:	Coplaner
Test Voltage:	Wireless charging 2W(Watch)+Charging		
Remark:			

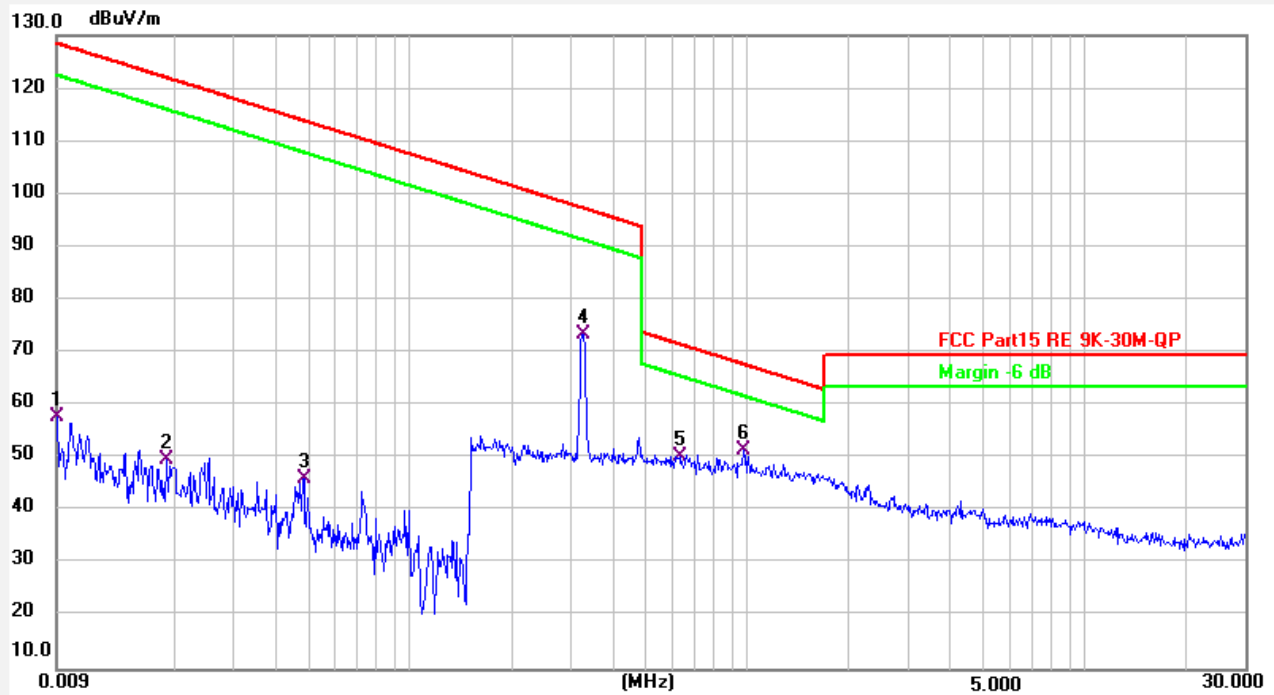


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0090	21.82	36.05	57.87	128.50	-70.63	QP	100	0	P	
2	0.0190	14.87	35.01	49.88	122.01	-72.13	QP	100	0	P	
3	0.0483	17.41	28.65	46.06	113.91	-67.85	QP	100	0	P	
4	0.3251	47.61	25.81	73.42	97.36	-23.94	QP	100	0	P	
5	0.6271	24.76	25.67	50.43	71.66	-21.23	QP	100	0	P	
6 *	0.9735	25.72	25.91	51.63	67.83	-16.20	QP	100	0	P	

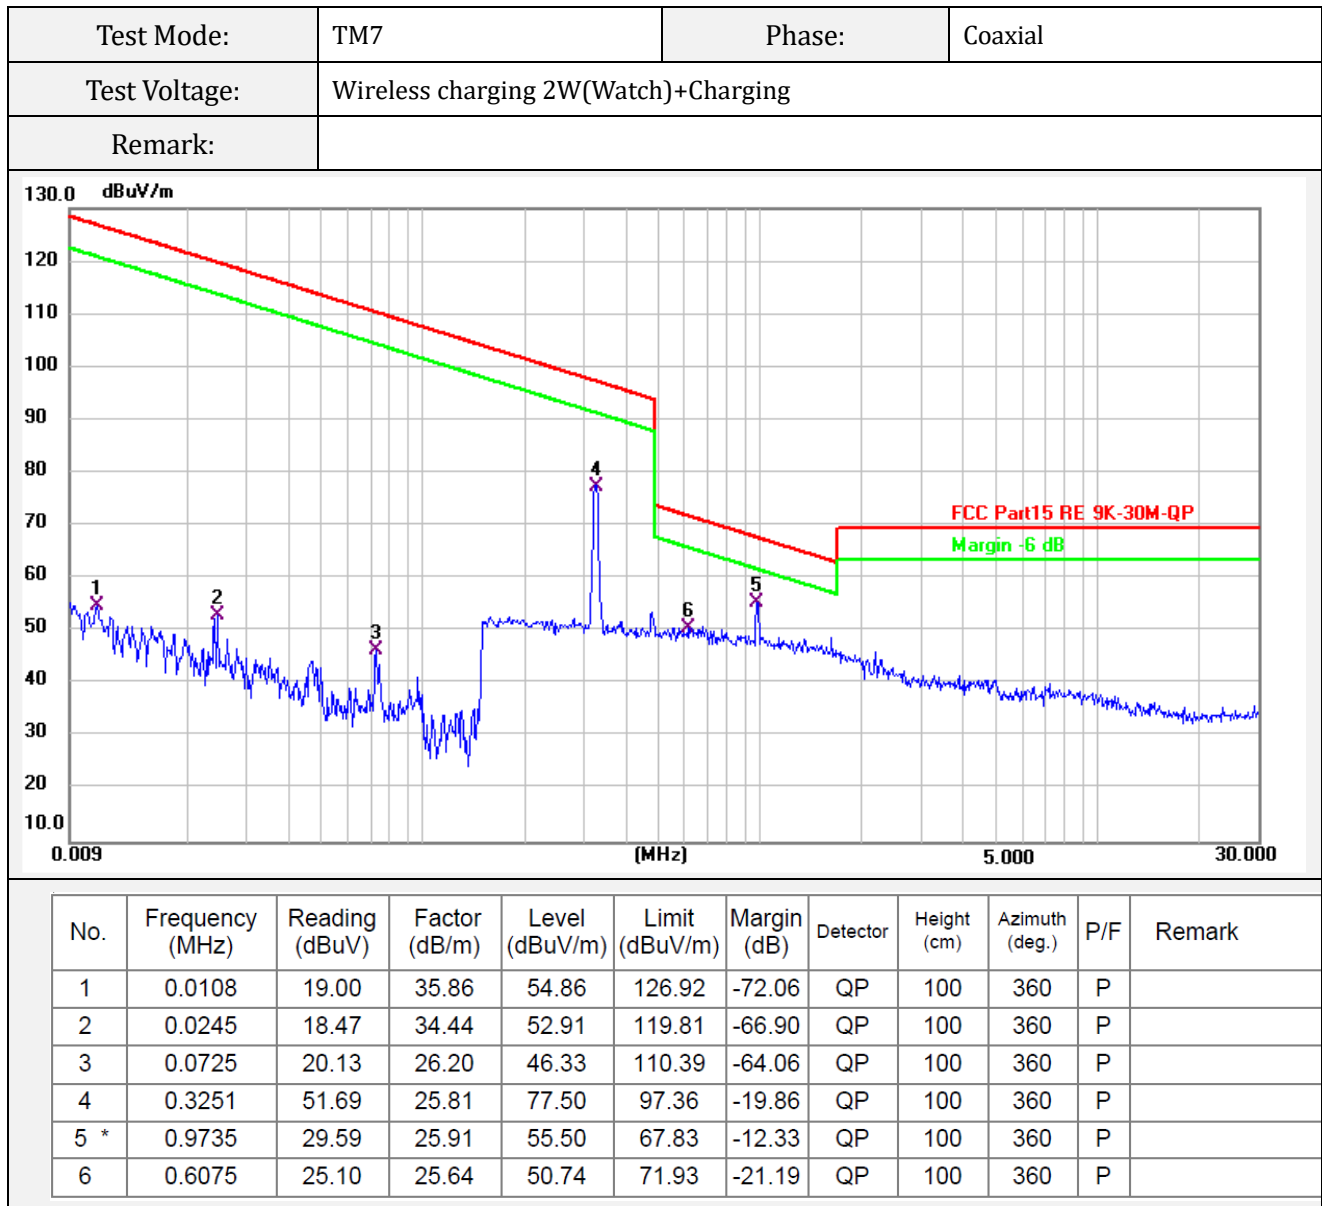


Test Data of Radiated Emissions from 9kHz to 30MHz

Test Mode:	TM1	Phase:	Coplaner
Test Voltage:	Wireless charging 15W (Phone)		
Remark:			

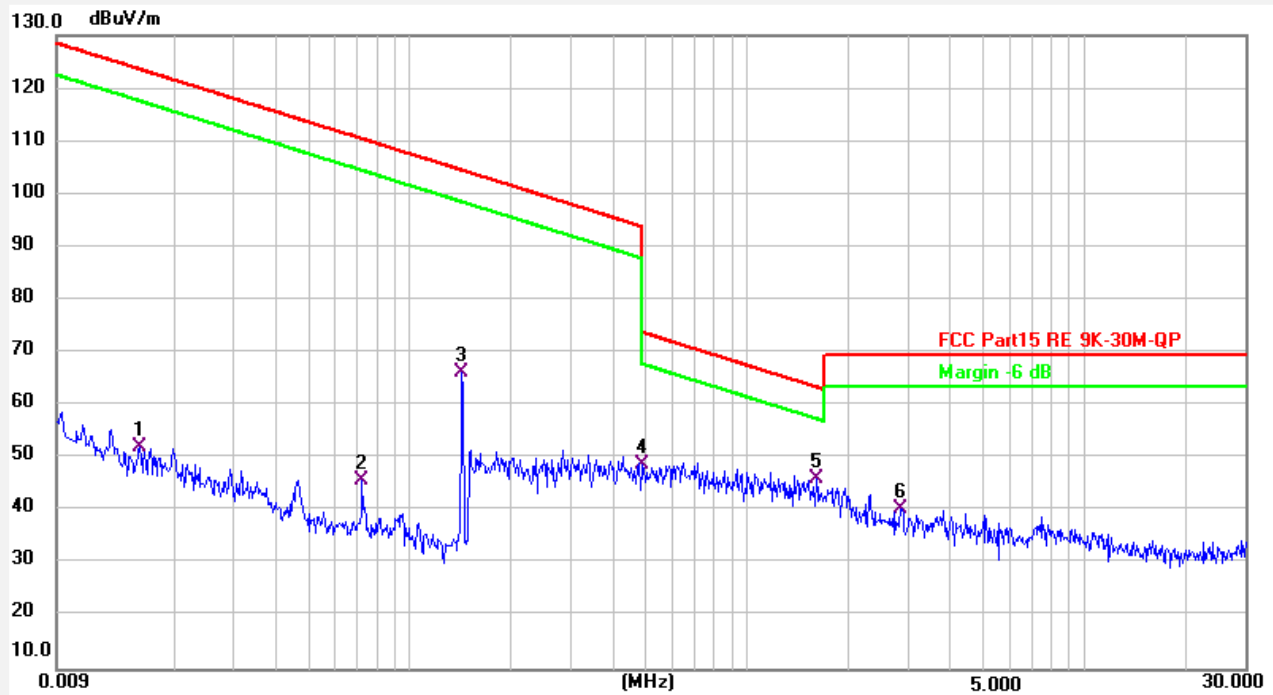


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0158	16.88	35.36	52.24	123.61	-71.37	QP	100	0	P	
2	0.0723	19.58	26.20	45.78	110.41	-64.63	QP	100	0	P	
3	0.1425	40.58	25.61	66.19	104.52	-38.33	QP	100	0	P	
4	0.4890	23.17	25.64	48.81	93.82	-45.01	QP	100	0	P	
5 *	1.5933	20.03	26.02	46.05	63.55	-17.50	QP	100	0	P	
6	2.8540	14.21	26.25	40.46	69.50	-29.04	QP	100	0	P	

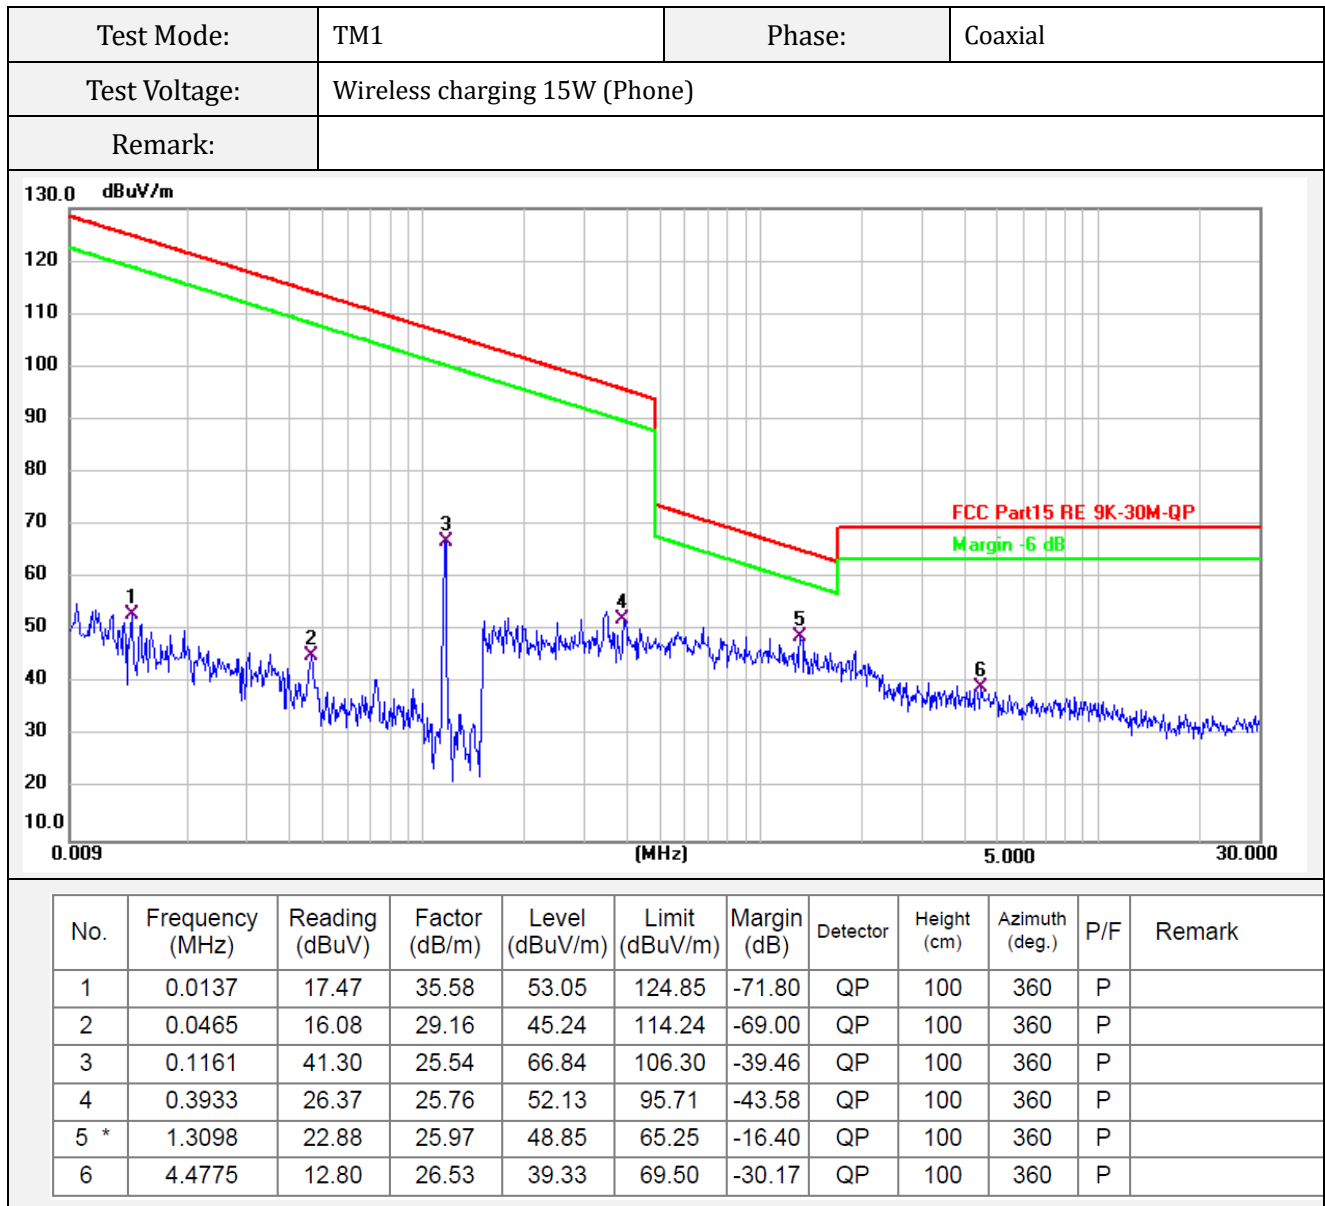


Test Data of Radiated Emissions from 9kHz to 30MHz

Test Mode:	TM5	Phase:	Coplaner
Test Voltage:	Wireless charging 2W (Watch)		
Remark:			

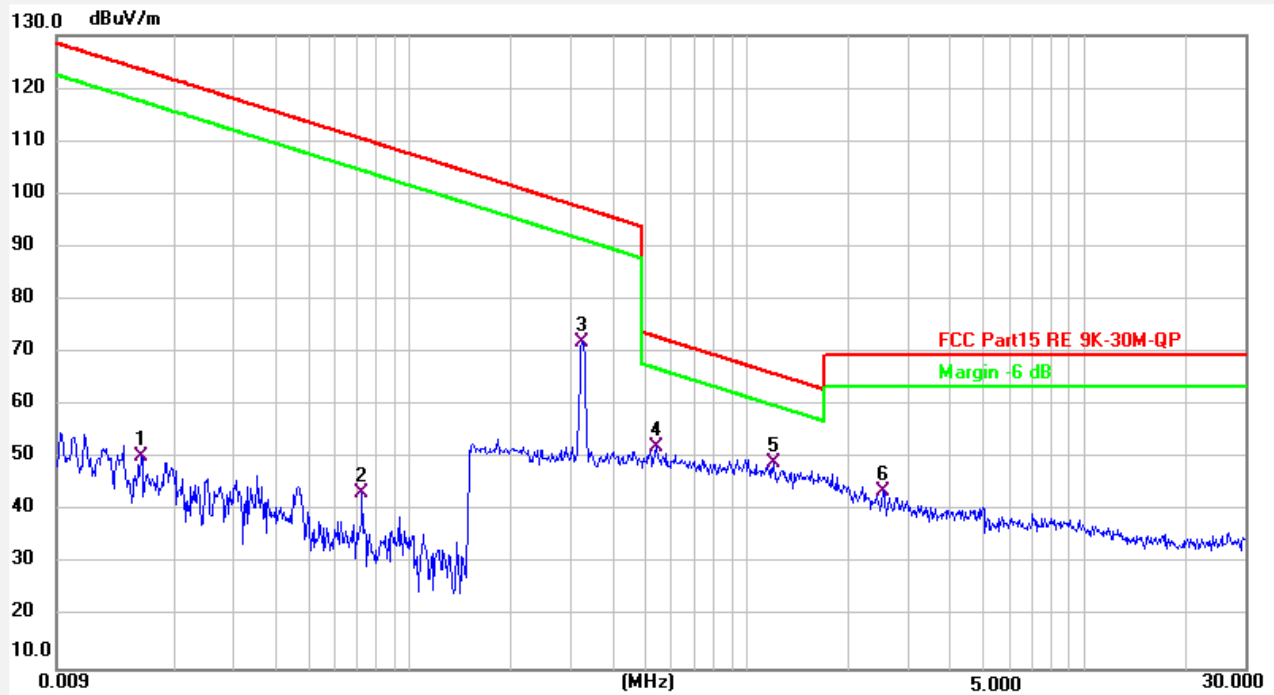

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0160	15.02	35.33	50.35	123.51	-73.16	QP	100	0	P	
2	0.0723	17.35	26.20	43.55	110.41	-66.86	QP	100	0	P	
3	0.3234	46.30	25.80	72.10	97.41	-25.31	QP	100	0	P	
4	0.5350	26.40	25.63	52.03	73.04	-21.01	QP	100	0	P	
5 *	1.1970	23.13	25.95	49.08	66.04	-16.96	QP	100	0	P	
6	2.5266	17.46	26.19	43.65	69.50	-25.85	QP	100	0	P	

Test Mode:	TM5	Phase:	Coaxial
Test Voltage:	Wireless charging 2W (Watch)		
Remark:			

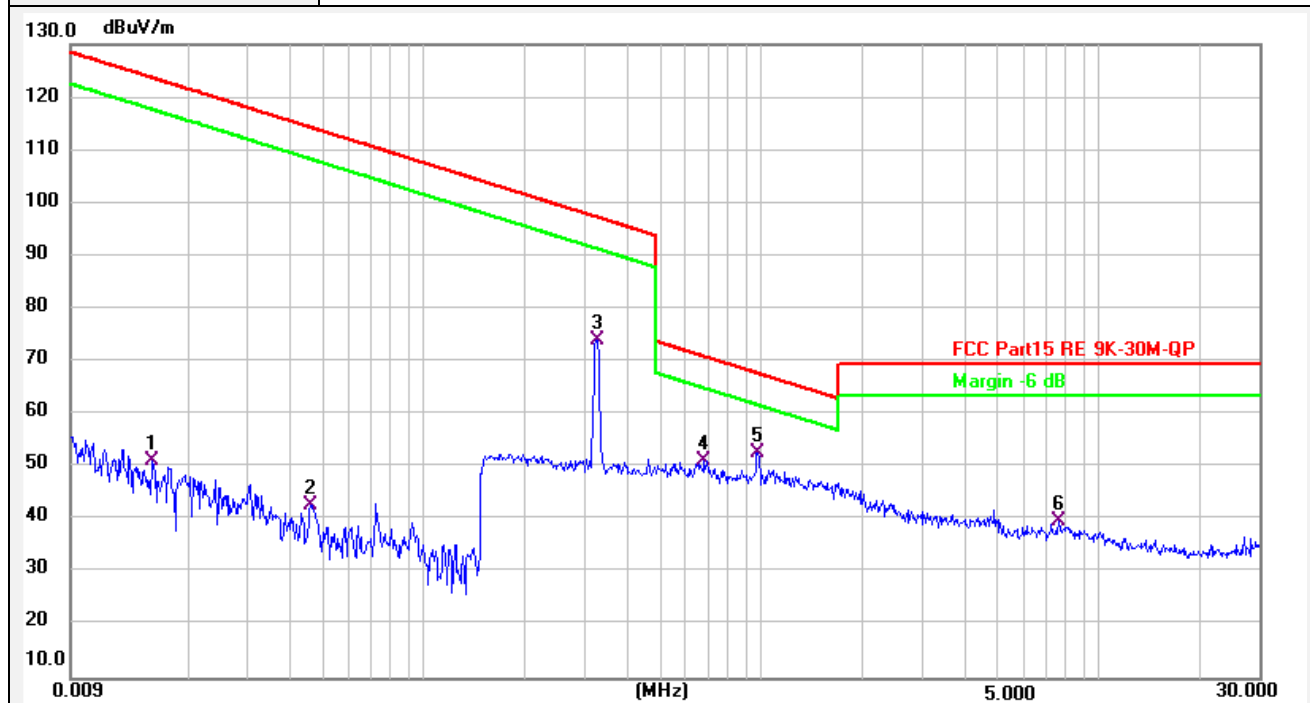

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0157	16.02	35.36	51.38	123.67	-72.29	QP	100	360	P	
2	0.0462	13.70	29.24	42.94	114.30	-71.36	QP	100	360	P	
3	0.3251	48.23	25.81	74.04	97.36	-23.32	QP	100	360	P	
4	0.6790	25.64	25.71	51.35	70.96	-19.61	QP	100	360	P	
5 *	0.9735	26.85	25.91	52.76	67.83	-15.07	QP	100	360	P	
6	7.5657	12.87	26.91	39.78	69.50	-29.72	QP	100	360	P	

Note:

Pre-scan in the all of mode, the worst case in of was recorded.


Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

Margin = Reading - Limit.

Test Plots and Data of Radiated Emissions from 30MHz to 1GHz


Tested Mode:	TM1
Test Antenna Polarization:	Horizontal
Remark:	

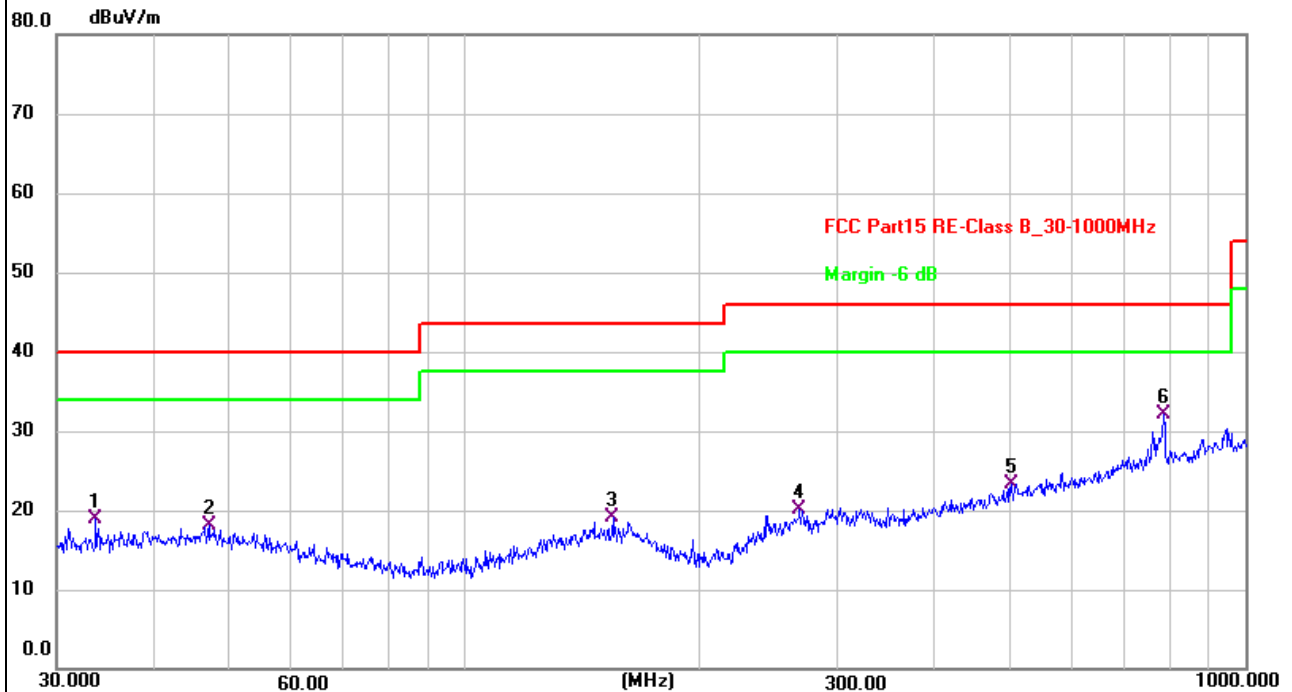

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	33.6802	27.87	-9.04	18.83	40.00	-21.17	QP	100	115	P	
2	46.9948	26.49	-8.31	18.18	40.00	-21.82	QP	100	115	P	
3	154.8204	26.91	-7.80	19.11	43.50	-24.39	QP	100	105	P	
4	268.4853	29.40	-9.38	20.02	46.00	-25.98	QP	100	11	P	
5	501.1790	26.54	-3.25	23.29	46.00	-22.71	QP	100	219	P	
6 *	785.0935	30.79	1.33	32.12	46.00	-13.88	QP	100	11	P	

Test Plots and Data of Radiated Emissions from 30MHz to 1GHz


Tested Mode:	TM1
Test Antenna Polarization:	Vertical
Remark:	

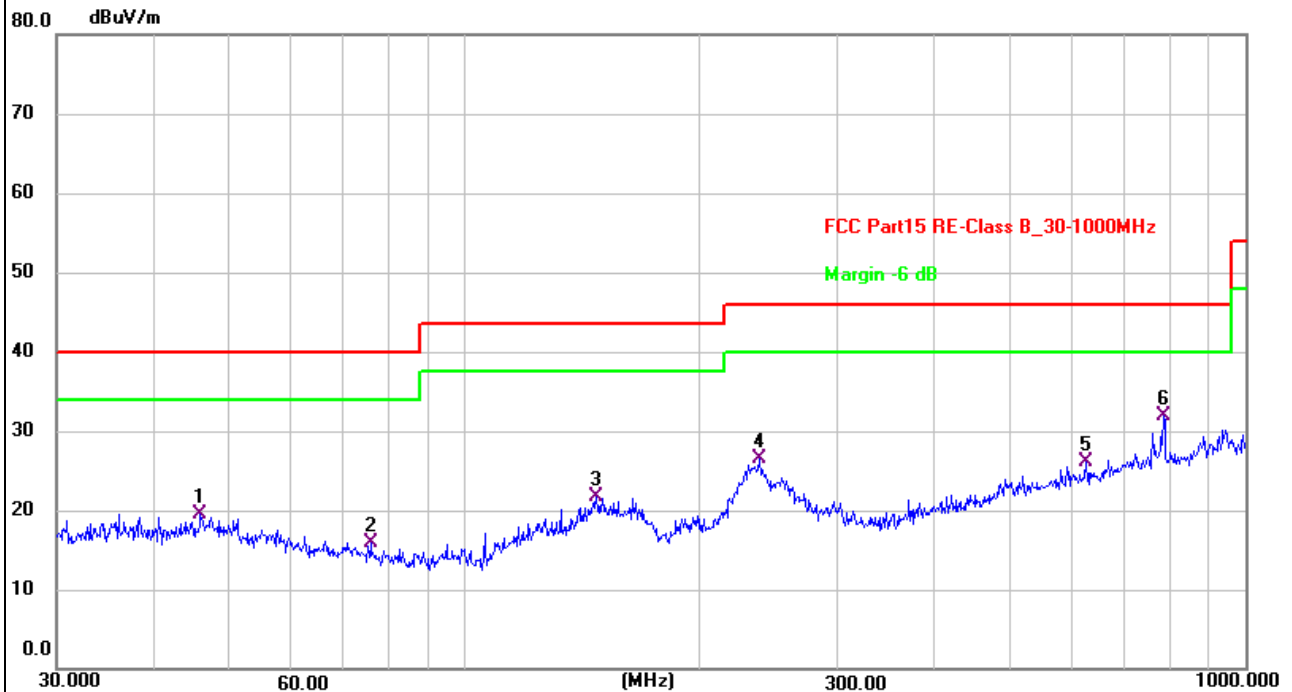

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	45.8553	27.75	-8.27	19.48	40.00	-20.52	QP	100	244	P	
2	75.7114	28.34	-12.35	15.99	40.00	-24.01	QP	100	48	P	
3	147.4036	29.61	-7.86	21.75	43.50	-21.75	QP	100	348	P	
4	238.3102	37.00	-10.56	26.44	46.00	-19.56	QP	100	110	P	
5	625.0780	27.37	-1.22	26.15	46.00	-19.85	QP	100	214	P	
6 *	785.0935	30.53	1.33	31.86	46.00	-14.14	QP	100	69	P	

Test Plots and Data of Radiated Emissions from 30MHz to 1GHz


Tested Mode:	TM6
Test Antenna Polarization:	Horizontal
Remark:	

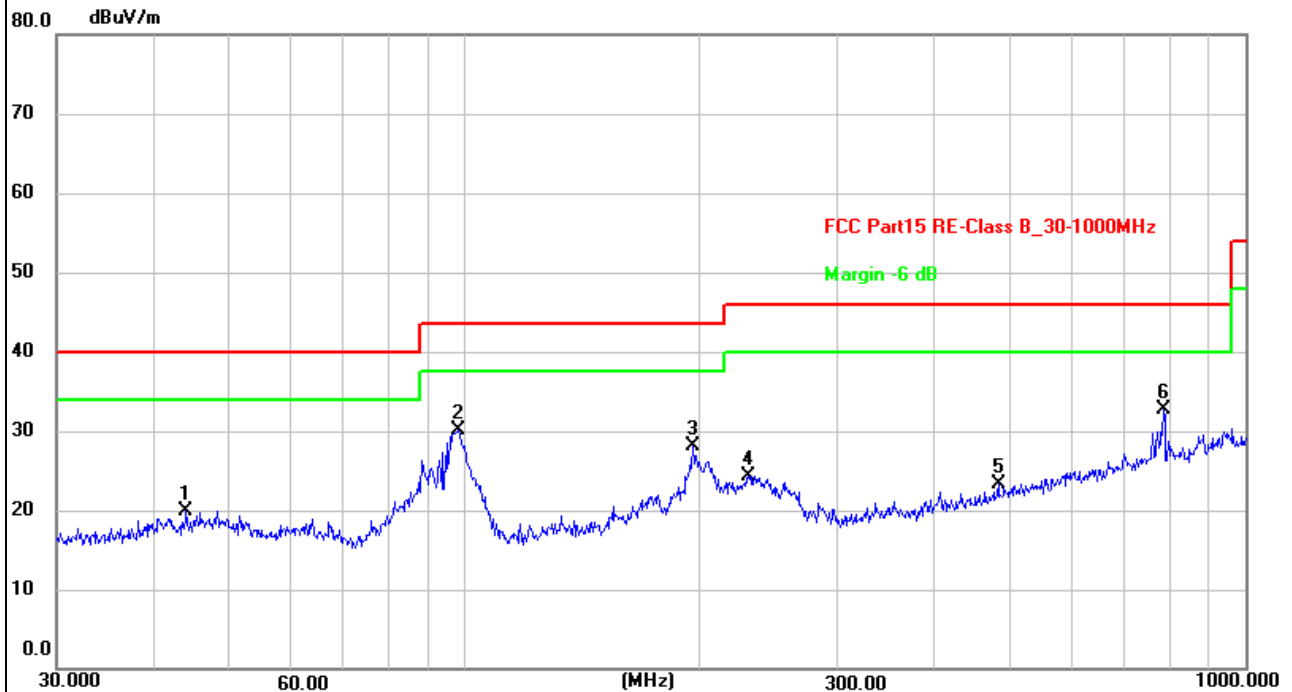

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	43.9658	28.16	-8.27	19.89	40.00	-20.11	QP	200	235	P	
2 *	98.1419	42.53	-12.37	30.16	43.50	-13.34	QP	200	4	P	
3	195.8220	39.86	-11.68	28.18	43.50	-15.32	QP	200	328	P	
4	230.9068	35.45	-11.05	24.40	46.00	-21.60	QP	200	307	P	
5	482.2156	27.08	-3.71	23.37	46.00	-22.63	QP	200	131	P	
6	785.0935	31.31	1.33	32.64	46.00	-13.36	QP	200	317	P	

Test Plots and Data of Radiated Emissions from 30MHz to 1GHz


Tested Mode:	TM6
Test Antenna Polarization:	Vertical
Remark:	

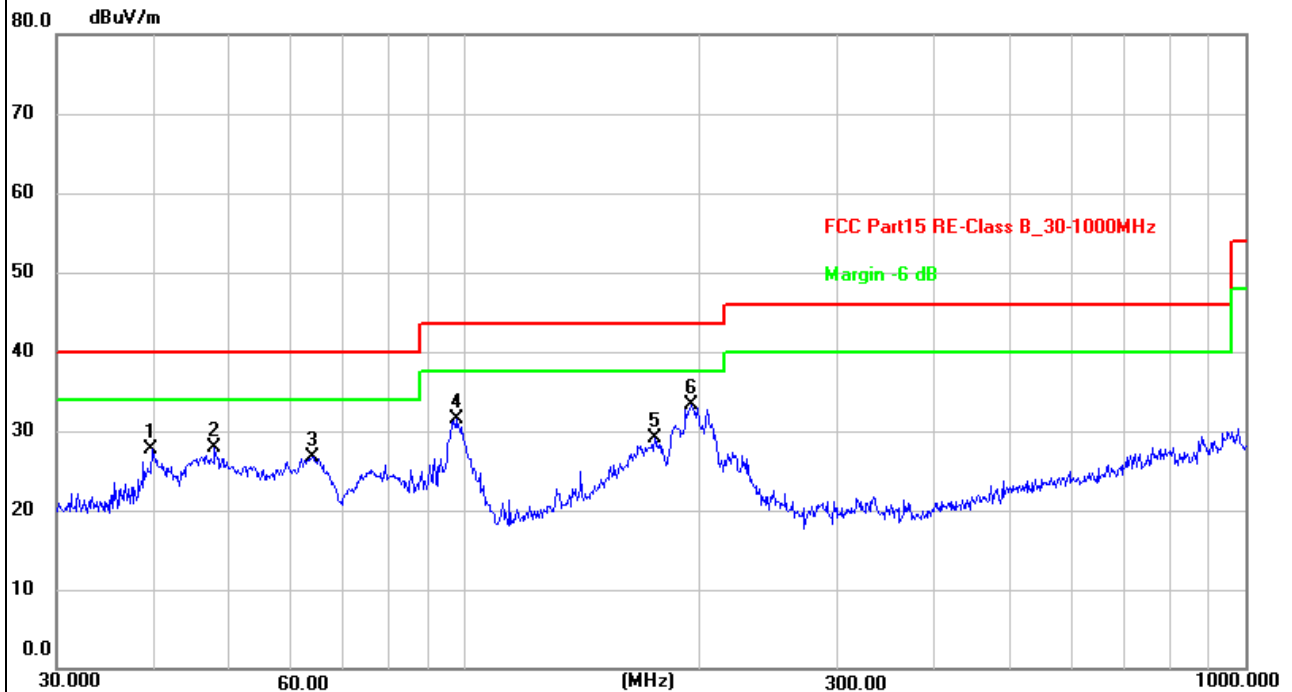

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	39.7146	36.00	-8.35	27.65	40.00	-12.35	QP	100	339	P	
2	47.8260	36.27	-8.33	27.94	40.00	-12.06	QP	100	184	P	
3	63.7588	37.27	-10.62	26.65	40.00	-13.35	QP	100	10	P	
4	97.4560	43.83	-12.42	31.41	43.50	-12.09	QP	100	80	P	
5	175.0368	38.74	-9.67	29.07	43.50	-14.43	QP	100	245	P	
6 *	195.1365	44.90	-11.61	33.29	43.50	-10.21	QP	100	245	P	

Test Plots and Data of Radiated Emissions from 30MHz to 1GHz


Tested Mode:	TM5
Test Antenna Polarization:	Horizontal
Remark:	

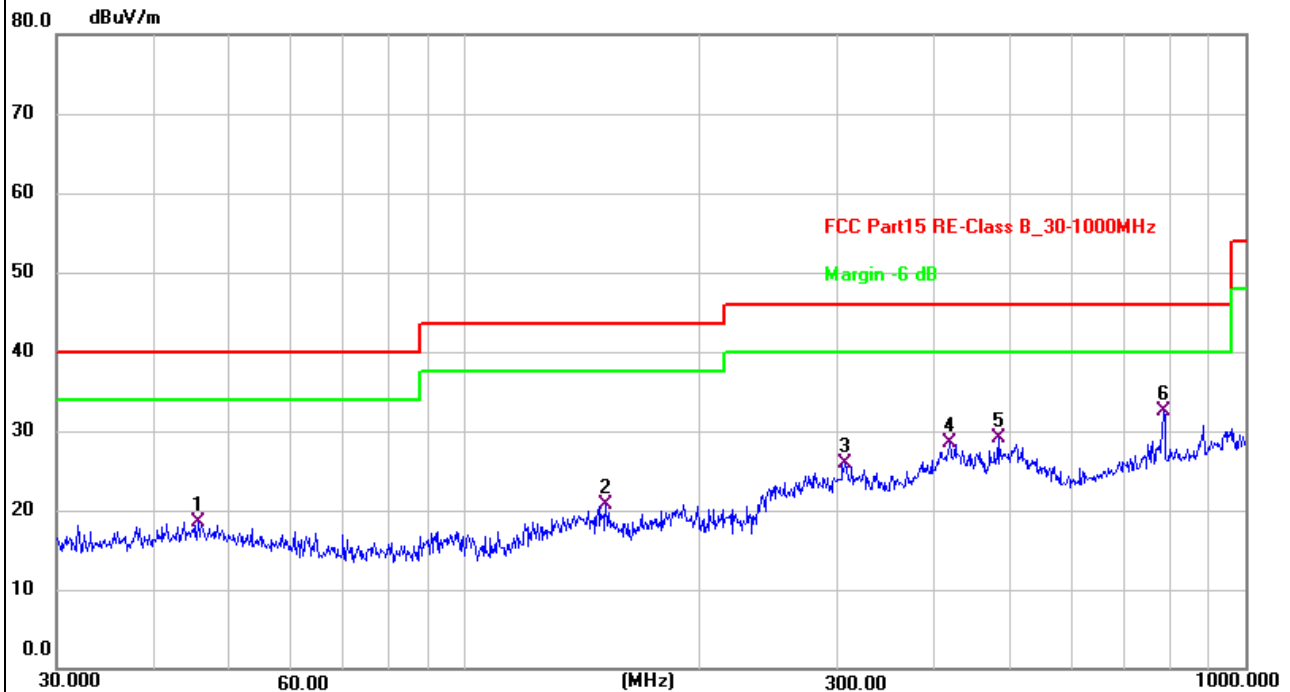

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	45.5348	26.86	-8.28	18.58	40.00	-21.42	QP	100	84	P	
2	151.5972	28.53	-7.75	20.78	43.50	-22.72	QP	100	332	P	
3	306.7537	33.72	-7.79	25.93	46.00	-20.07	QP	100	12	P	
4	417.6411	33.79	-5.21	28.58	46.00	-17.42	QP	100	199	P	
5	482.2156	32.77	-3.71	29.06	46.00	-16.94	QP	100	177	P	
6 *	785.0935	31.10	1.33	32.43	46.00	-13.57	QP	100	360	P	

Test Plots and Data of Radiated Emissions from 30MHz to 1GHz


Tested Mode:	TM5
Test Antenna Polarization:	Vertical
Remark:	

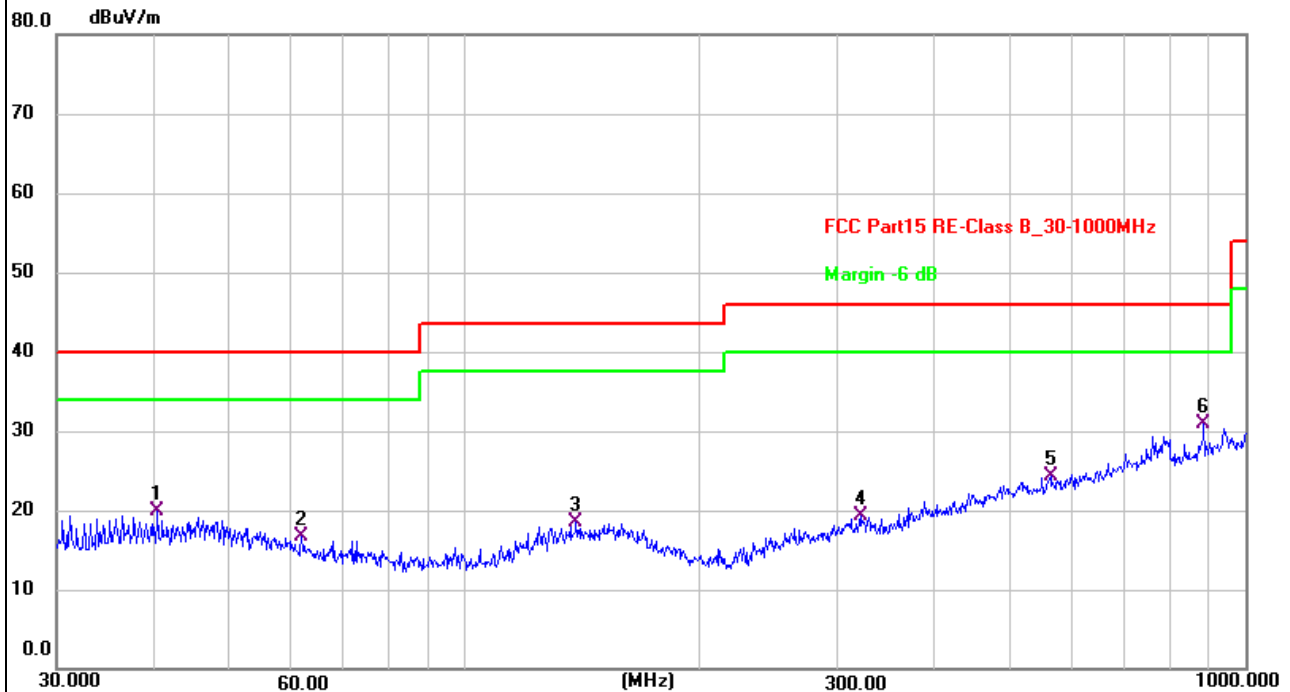

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	40.4172	28.16	-8.30	19.86	40.00	-20.14	QP	100	266	P	
2	61.7781	26.99	-10.26	16.73	40.00	-23.27	QP	100	266	P	
3	138.8735	26.74	-8.29	18.45	43.50	-25.05	QP	100	48	P	
4	321.0608	26.47	-7.22	19.25	46.00	-26.75	QP	100	224	P	
5	562.6624	26.68	-2.46	24.22	46.00	-21.78	QP	100	244	P	
6 *	884.5029	28.54	2.29	30.83	46.00	-15.17	QP	100	110	P	

Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode:	TM7
Test Antenna Polarization:	Horizontal
Remark:	

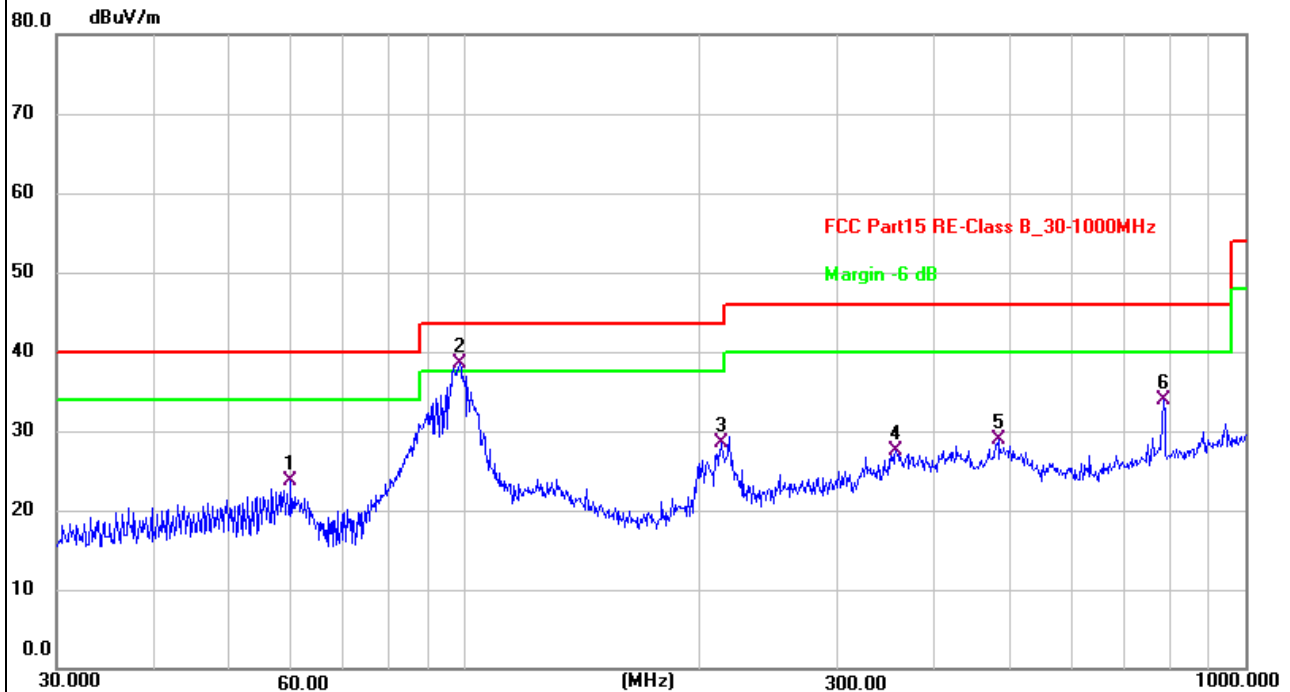


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	59.8588	33.55	-9.93	23.62	40.00	-16.38	QP	100	276	P	
2 *	98.4866	50.90	-12.34	38.56	43.50	-4.94	QP	200	11	P	
3	213.0151	40.30	-11.89	28.41	43.50	-15.09	QP	100	307	P	
4	356.6758	34.69	-7.15	27.54	46.00	-18.46	QP	100	9	P	
5	482.2156	32.71	-3.71	29.00	46.00	-17.00	QP	100	183	P	
6	785.0935	32.58	1.33	33.91	46.00	-12.09	QP	100	215	P	

Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode: TM7

Test Antenna Polarization: Vertical

Remark:

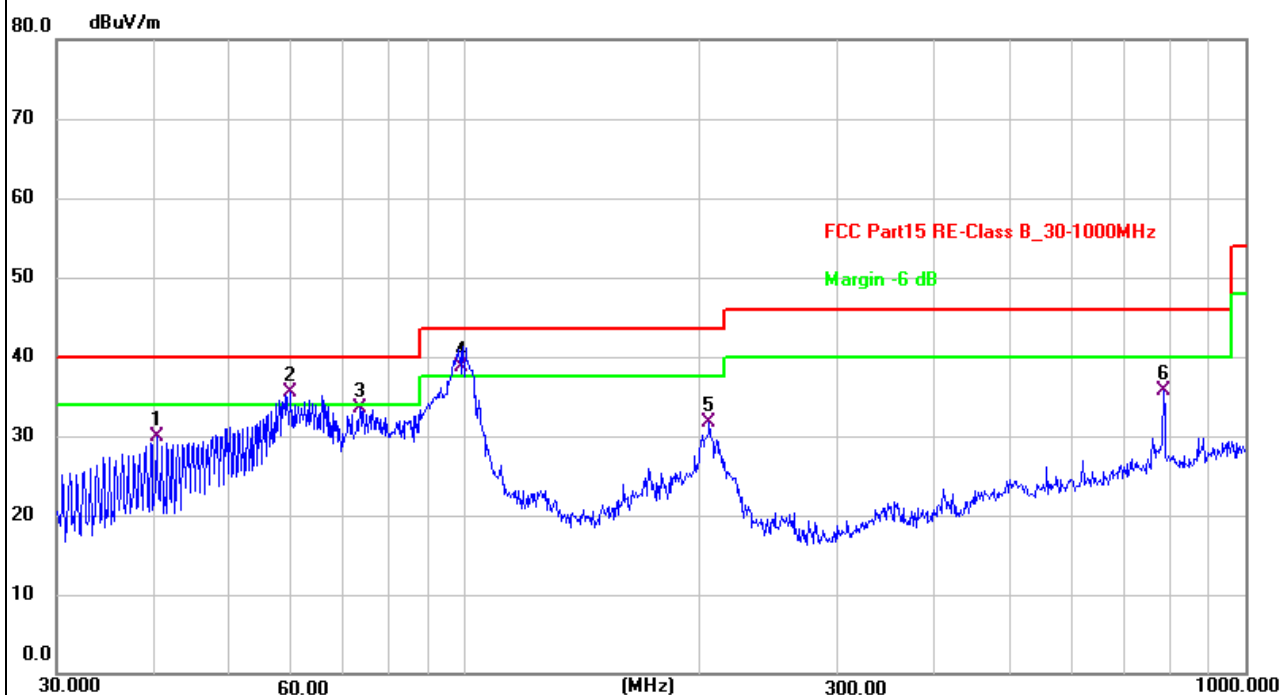

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	40.2757	38.14	-8.30	29.84	40.00	-10.16	QP	100	308	P	
2 *	59.8588	45.37	-9.93	35.44	40.00	-4.56	QP	100	349	P	
3	73.3593	45.53	-12.10	33.43	40.00	-6.57	QP	100	101	P	
4 !	98.8831	50.94	-12.31	38.63	43.50	-4.87	QP	100	349	P	
5	205.6751	43.60	-11.98	31.62	43.50	-11.88	QP	100	215	P	
6	785.0935	34.33	1.33	35.66	46.00	-10.34	QP	100	19	P	

Note 1: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Note 2: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

Note 3: For 9kHz-30MHz, Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits (dBuV) + distance extrapolation factor.

Note 4: Level = Reading + Factor, Margin = Level – Limit.

6. Occupied Bandwidth

6.1 Standard and Limit

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, section 6.9, the emission bandwidth test method as follows.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
 - 2) Set the spectrum analyzer to any one measured frequency within its operating range.
 - 3) Set RBW = 1% of the 20 dB bandwidth, VBW = RBW.
 - 4) Set Sweep = Auto, Detector function = peak, Trace = max hold.
 - 5) Set a reference level on the measuring instrument equal to the highest peak value.
 - 6) Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level.
- Record the frequency difference as the emission bandwidth.

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.




Test Setup Block Diagram

6.3 Test Data and Results

Phone


Test Frequency	20dB Bandwidth	99% Bandwidth
132.6kHz	75Hz	97Hz

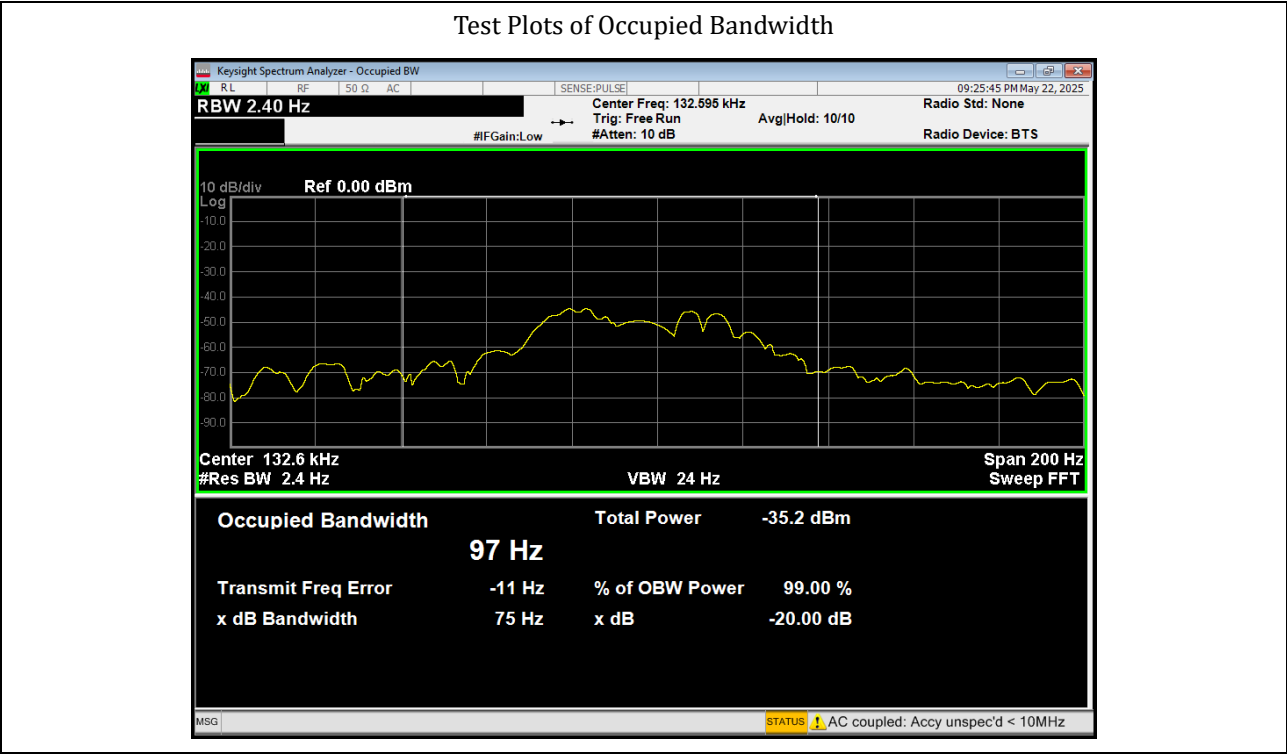

Watch

Test Frequency	20dB Bandwidth	99% Bandwidth
325.8kHz	501Hz	530Hz

Test Plots of Occupied Bandwidth

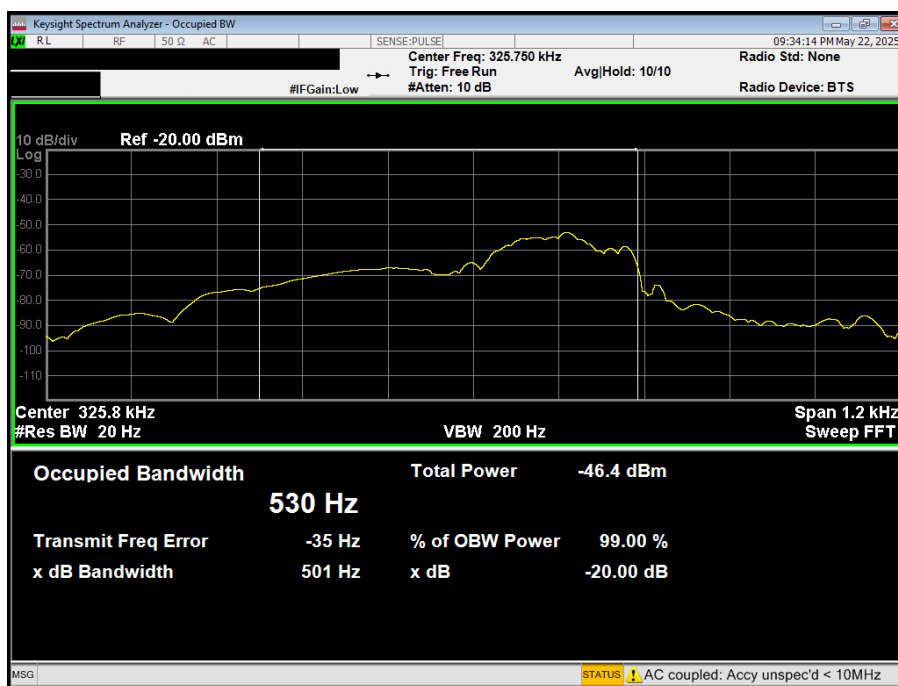

***** END OF REPORT *****