



SAR TEST REPORT

Product Name: Smartphone

Model Name: A161

FCC ID : 2A9SN-A161

Issued For : INOI Limited

Office 302, Dominion Centre 43-59, Queens Road, East Wanchai, Hong Kong, China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Chen Hsong Industrial Park, No.177 Renmin West Road, Jinsha Community, Kengzi Street, Pingshan New District, Shenzhen, China

Report Number: LGT22L038HA01

Sample Received Date: Dec. 16, 2022

Date of Test: Dec. 23, 2022~ Feb. 04, 2023

Date of Issue: Feb. 08, 2023

Head:0.577 W/kg

Max. SAR (1g):

Body: 0.663 W/kg

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2. Test Standards and Limits	8
3. SAR Measurement System	9
3.1 Definition of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
4. Tissue Simulating Liquids	12
4.1 Simulating Liquids Parameter Check	12
5. SAR System Validation	14
5.1 Validation System	14
5.2 Validation Result	15
6. SAR Evaluation Procedures	16
7. EUT Test Position	17
7.1 Define Two Imaginary Lines on the Handset	17
7.2 Hotspot mode exposure position condition	18
8. Uncertainty	19
8.1 Measurement Uncertainty	19
8.2 System validation uncertainty	20
9. Conducted Power Measurement	21
9.1 Test Result:	21
9.2 Tune Up Power:	24
10. EUT and Test Setup Photo	42
10.1 EUT Photos	42
10.2 Setup Photos	45
11. SAR Result Summary	51
11.1 Head SAR	51
11.2 Body-worn and Hotspot SAR	54
12. Equipment List	60
Appendix A. System Validation Plots	61
Appendix B. SAR Test Plots	73



Revision History

Rev.	Issue Date	Contents
00	Feb. 08, 2023	Initial Issue



TEST REPORT CERTIFICATION

Applicant INOI Limited
Address Office 302, Dominion Centre 43-59, Queens Road, East Wanchai, Hong Kong, China
Manufacture INOI Limited
Address Office 302, Dominion Centre 43-59, Queens Road, East Wanchai, Hong Kong, China
Product Name Smartphone
Trademark INOI
Model Name A161
Sample number Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
ANSI/IEEE Std. C95.1-1992 FCC 47 CFR Part 2 (2.1093) IEEE 1528: 2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Manager





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	Smartphone		
Trademark	INOI		
Model Name	A161		
Series Model	N/A		
Model Difference	N/A		
Device Category	Portable		
Product stage	Production unit		
RF Exposure Environment	General Population / Uncontrolled		
IMEI	IMEI 1:355180270855175 IMEI 2:355180270855183		
Hardware Version	V1.1		
Software Version	N/A		
Frequency Range	GSM 850: 824 ~ 849 MHz PCS 1900: 1850 ~ 1910 MHz WCDMA Band II: 1850 ~ 1910 MHz WCDMA Band IV: 1710 ~ 1755 MHz WCDMA Band V: 824 ~ 849 MHz LTE Band 2: 1850 ~ 1910 MHz LTE Band 4: 1710 ~ 1755 MHz LTE Band 5: 824 ~ 849 MHz LTE Band 7: 2500 ~ 2570 MHz LTE Band 12: 699 ~ 716 MHz LTE Band 13: 777 ~ 787 MHz LTE Band 17: 704 ~ 716 MHz WLAN 802.11b/g/n20: 2412 MHz ~ 2462 MHz WLAN 802.11n40: 2422 MHz ~ 2452 MHz Bluetooth: 2402 ~ 2480 MHz		
Max. Reported SAR(1g): (Limit: 1.6W/kg)	Mode	Head (W/ kg)	Body Worn and Hotspot (W/ kg)
	GSM 850	0.197	0.270
	PCS 1900	0.191	0.241
	WCDMA Band II	0.577	0.465
	WCDMA Band IV	0.567	0.493
	WCDMA Band V	0.165	0.210
	LTE Band 2	0.370	0.663
	LTE Band 4	0.220	0.399
	LTE Band 5	0.149	0.231
	LTE Band 7	0.252	0.378
	LTE Band 12	0.068	0.323
	LTE Band 13	0.091	0.387
	LTE Band 17	0.122	0.358



	2.4G WLAN	0.153	0.086
	Bluetooth	0.037	0.048
1-g Sum SAR		0.730	0.794
Battery	Rated Voltage:3.8V Capacity: 3500mAh		
Description test modes	SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM 1 is used to tested.		
Operating Mode:	GSM: GSM Voice; GPRS/EGPRS Class 12 WCDMA: RMC, HSDPA, HSUPA Release 6 LTE: QPSK, 16QAM 2.4G WLAN: 802.11b(DSSS): CCK, DQPSK, DBPSK 802.11g(OFDM): BPSK, QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK, QPSK,16-QAM,64-QAM Bluetooth: GFSK + π /4DQPSK+8DPSK BLE: GFSK		
Antenna Specification	GSM/WCDMA/LTE: FPC Antenna Bluetooth: FPC Antenna WLAN: FPC Antenna		
Operating Mode	Maximum continuous output		
SIM Card	Support dual-SIM, dual standby, the multiple SIM card with two lines cannot trans mitting at the same time		
Hotspot Mode	Support		
DTM Mode	Not Support		



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Chen Hsong Industrial Park, No.177 Renmin West Road, Jinsha Community, Kengzi Street, Pingshan New District, Shenzhen, China
Accreditation Certificate	FCC Registration No.: 746540
	A2LA Certificate No.: 6727.01
	IC Registration No.: CN0136



2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D04 v01	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
9	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.4 8.0 20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.08 1.6 4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE
GENERAL POPULATION/UNCONTROLLED EXPOSURE
PARTIAL BODY LIMIT
1.6 W/kg



3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue;

ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

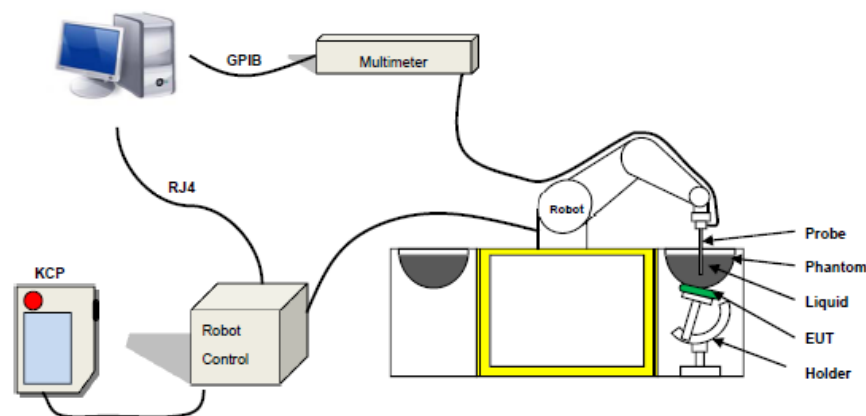

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 1g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 04/22 EPG0364 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 600 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Probe



3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.




Figure-SN 06/22 SAM 148



Figure-SN 06/22 ELLI 51

3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The uncertainty due to the liquid conductivity and permittivity arises from two different sources. The first source of error is the deviation of the liquid conductivity from its target value (max _ 5 %) and the second source of error arises from the measurement procedures used to assess conductivity. The uncertainty shall be assessed using a rectangular probability For 1 g averaging, the maximum weighting coefficient for SAR is 0,5.

IEEE SCC-34/SC-2 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head and body tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table.

Frequency	ϵ_r		σ 1g S/m	
	Head	Body	Head	Body
300	45.3	45.3	0.87	0.87
450	43.5	43.5	0.87	0.87
900	41.5	41.5	0.97	0.97
1450	40.5	40.5	1.20	1.20
1800	40.0	40.0	1.40	1.40
2450	39.2	39.2	1.80	1.80
3000	38.5	38.5	2.40	2.40
5200	36.0	36.0	4.70	4.70



LIQUID MEASUREMENT RESULTS

Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency (MHz)	Temp. [°C]					
2022-12-23	22.0	54	750	21.7	Permittivity	41.90	42.83	2.22	±5
					Conductivity	0.89	0.92	3.37	±5
2022-12-27	20.9	48	835	20.5	Permittivity	41.50	41.06	-1.06	±5
					Conductivity	0.90	0.91	1.11	±5
2023-02-03	23.0	53	1800	22.7	Permittivity	40.00	40.17	0.43	±5
					Conductivity	1.40	1.40	0.00	±5
2023-02-03	23.0	53	1900	22.6	Permittivity	40.00	40.95	2.38	±5
					Conductivity	1.40	1.38	-1.43	±5
2023-02-04	20.7	46	2450	20.4	Permittivity	39.20	40.24	2.65	±5
					Conductivity	1.80	1.74	-3.33	±5
2023-02-04	20.8	46	2600	20.5	Permittivity	39.00	39.79	2.03	±5
					Conductivity	1.96	1.90	-3.06	±5




5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

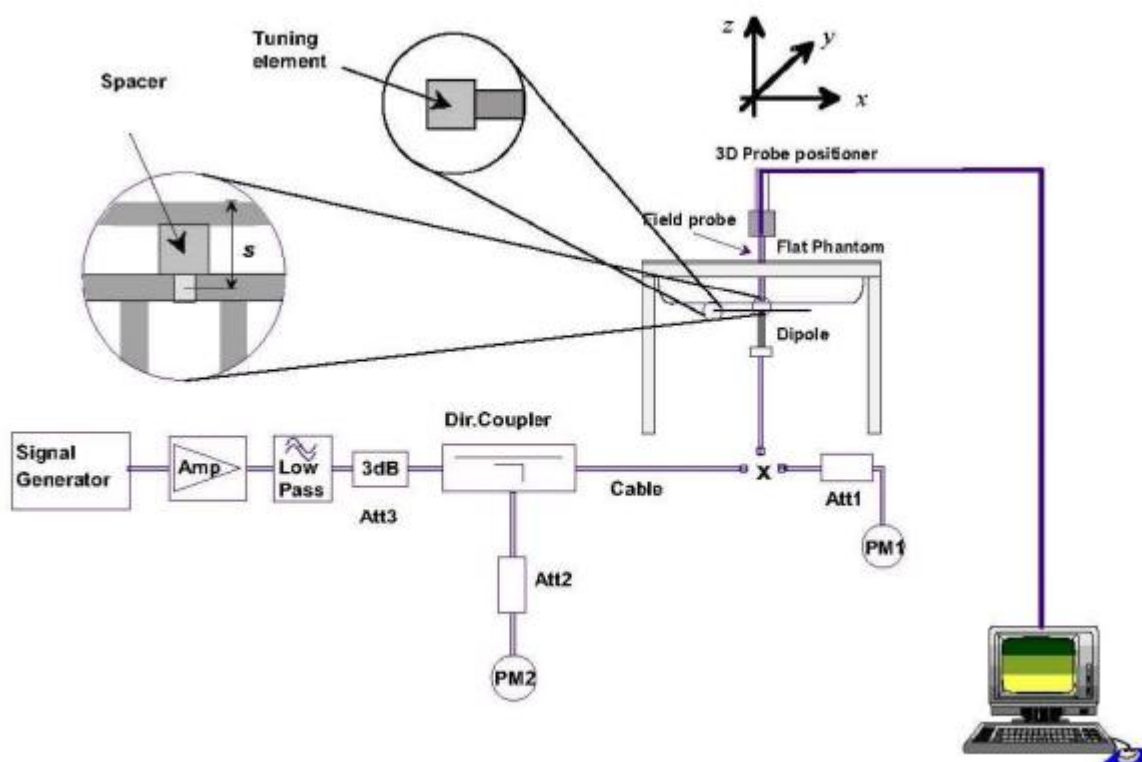



5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of $\pm 10\%$.

Date	Freq.	Power	Tested Value	Normalized SAR	Target SAR	Tolerance	Limit
	(MHz)	(mW)	(W/Kg)	(W/kg)	1g(W/kg)	(%)	(%)
2022-12-23	750	100	0.829	8.29	8.27	0.24	10
2022-12-27	835	100	0.983	9.83	9.75	0.82	10
2023-02-03	1800	100	3.879	38.79	39.06	-0.69	10
2023-02-03	1900	100	4.091	40.91	40.85	0.15	10
2023-02-04	2450	100	5.447	54.47	54.28	0.35	10
2023-02-04	2600	100	5.663	56.63	56.58	0.09	10

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



.

6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

➤ Area Scan& Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.


When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7. EUT Test Position

This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.


7.1 Define Two Imaginary Lines on the Handset

- (1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the handset.
- (2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

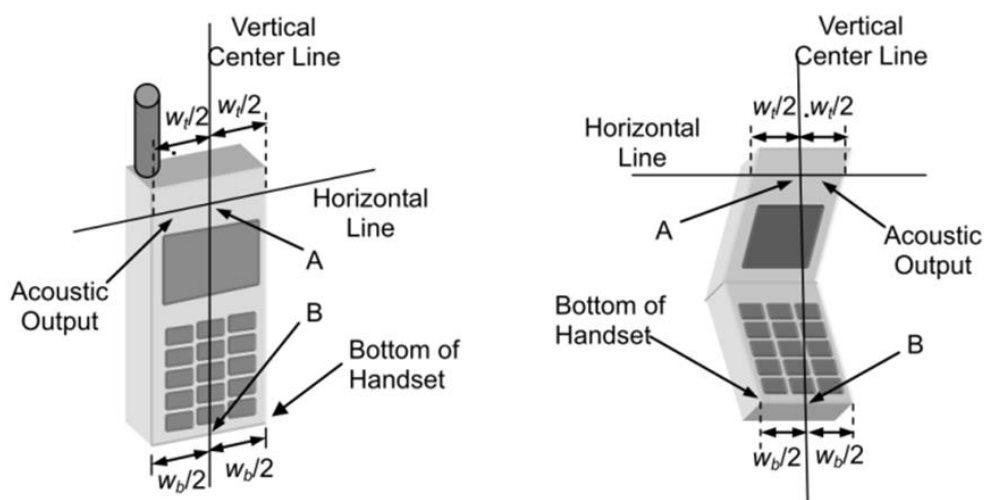

Cheek Position


- 1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- 2) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost

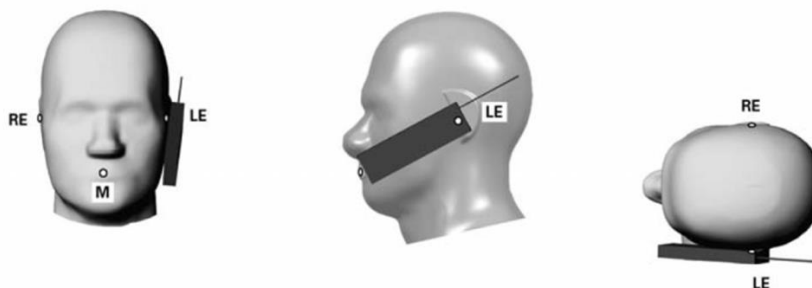




Title Position

- (1) To position the device in the “cheek” position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.

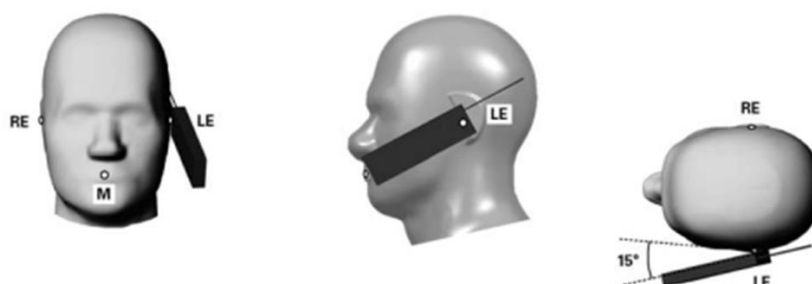


Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported* SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported* SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

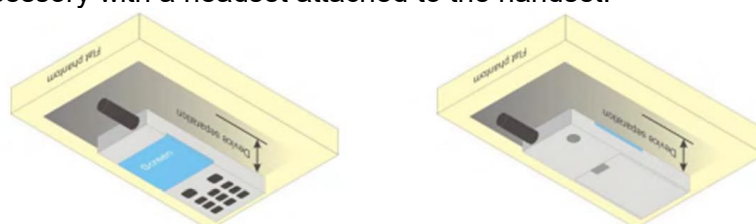

7.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

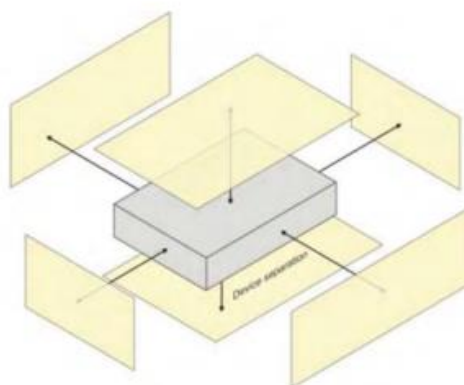



8. Uncertainty

8.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty Component	Tol (+/- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+/-%)	10g Ui (+/-%)	vi
Measurement System								
Probe calibration	5.8	N	1	1	1	5.8	5.8	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	2.41	2.41	∞
Boundary effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	1.81	1.81	∞
RF ambient conditions- Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions- reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, Interpolation and Integration Algorithms for Max, SAR	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	2.6	N	1	1	1	2.60	2.60	11
Device holder uncertainty	3	N	1	1	1	3.00	3.00	7
Output Power Variation - SAR Drift Measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	2	N	1	1	0.84	2.00	1.68	∞
Liquid Conductivity - Measurement Uncertainty)	4	N	1	0.78	0.71	3.12	2.84	5
Liquid Permittivity - Measurement Uncertainty	5	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity (Temperature Uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid Permittivity (Temperature Uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.47	10.34	
Expanded Uncertainty (95% Confidence interval)		K				20.95	20.69	



8.2 System validation uncertainty

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System								
Probe calibration	5.8	N	1	1	1	5.8	5.8	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	1	1	2.02	2.02	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	0.71	0.71	∞
System detection limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	0	N	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions- Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions- reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, Interpolation and Integration Algorithms for Max, SAR	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Dipole								
Deviation of Experimental Source from Numerical Source	5	N	1	1	1	5.00	5.00	∞
Input Power and SAR Drift Measurement	0.5	R	$\sqrt{3}$	1	1	0.29	0.29	∞
Dipole Axis to Liquid Distance	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	2	N	1	1	0.84	2.00	1.68	∞
Liquid Conductivity - Measurement Uncertainty)	4	N	1	0.78	0.71	3.12	2.84	5
Liquid Permittivity - Measurement Uncertainty	5	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity (Temperature Uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid Permittivity (Temperature Uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.16	10.03	
Expanded Uncertainty (95% Confidence interval)		K				20.32	20.06	



9. Conducted Power Measurement

9.1 Test Result:

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1-Slot)	33.48	33.75	33.77	30.24	30.18	30.16
GPRS (GMSK, 1-Slot)	33.50	33.79	33.82	30.21	30.17	30.14
GPRS (GMSK, 2-Slot)	31.35	31.58	31.65	28.12	27.95	27.74
GPRS (GMSK, 3-Slot)	29.46	29.68	29.74	26.49	26.33	26.12
GPRS (GMSK, 4-Slot)	27.27	27.44	27.55	24.50	24.34	24.13
EGPRS (8PSK, 1-Slot)	26.00	26.45	26.30	26.48	27.33	25.68
EGPRS (8PSK, 2-Slot)	24.73	25.12	25.04	24.96	25.56	23.89
EGPRS (8PSK, 3-Slot)	21.65	22.53	22.32	21.67	22.82	20.41
EGPRS (8PSK, 4-Slot)	19.80	20.83	20.40	19.24	20.26	17.29
Remark: GPRS, CS4 coding scheme. EGPRS, MCS5 coding scheme. Multi-Slot Class 8, Support Max 4 downlink, 1 uplink, 5 working link Multi-Slot Class 10, Support Max 4 downlink, 2 uplink, 5 working link Multi-Slot Class 12, Support Max 4 downlink, 4 uplink, 5 working link						

Frame- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1-Slot)	24.45	24.72	24.74	21.21	21.15	21.13
GPRS (GMSK, 1-Slot)	24.47	24.76	24.79	21.18	21.14	21.11
GPRS (GMSK, 2-Slot)	25.33	25.56	25.63	22.10	21.93	21.72
GPRS (GMSK, 3-Slot)	25.20	25.42	25.48	22.23	22.07	21.86
GPRS (GMSK, 4-Slot)	24.26	24.43	24.54	21.49	21.33	21.12
EGPRS (8PSK, 1-Slot)	16.97	17.42	17.27	17.45	18.30	16.65
EGPRS (8PSK, 2-Slot)	18.71	19.10	19.02	18.94	19.54	17.87
EGPRS (8PSK, 3-Slot)	17.39	18.27	18.06	17.41	18.56	16.15
EGPRS (8PSK, 4-Slot)	16.79	17.82	17.39	16.23	17.25	14.28
Remark: 1. SAR testing was performed on the maximum frame-averaged power mode. 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum Burst - averaged power based on time slots. The calculated method is shown as below: Frame-averaged power = Burst averaged power (1 TX Slot) – 9.03 dB Frame-averaged power = Burst averaged power (2 TX Slots) – 6.02 dB Frame-averaged power = Burst averaged power (3 TX Slots) - 4.26 dB Frame-averaged power = Burst averaged power (4 TX Slots) – 3.01 dB						



WCDMA

Band	WCDMA Band 2			WCDMA Band 4			WCDMA Band 5		
Channel	9262	9400	9538	9262	9400	9538	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6	1852.4	1880	1907.6	1852.4	1880	1907.6
RMC 12.2Kbps	23.23	23.30	22.98	23.46	23.45	23.52	22.92	22.89	22.97
HSDPA Subtest-1	21.23	20.94	20.73	23.29	22.88	22.73	22.77	21.78	21.15
HSDPA Subtest-2	20.87	20.73	20.29	22.89	22.53	22.62	22.26	21.73	20.80
HSDPA Subtest-3	20.52	20.47	19.86	22.60	22.41	22.15	21.92	21.40	20.58
HSDPA Subtest-4	20.07	20.32	20.10	22.25	22.11	22.23	21.56	21.25	20.36
HSUPA Subtest-1	21.34	20.85	20.67	23.27	22.66	22.60	22.61	21.34	20.91
HSUPA Subtest-2	21.15	20.95	20.77	23.18	22.91	22.70	22.40	21.69	21.10
HSUPA Subtest-3	21.00	20.53	20.01	23.07	22.41	22.37	21.95	21.43	20.71
HSUPA Subtest-4	21.08	20.95	20.76	23.03	22.81	22.71	22.26	21.70	20.99
HSUPA Subtest-5	20.96	20.49	20.29	23.01	22.21	22.35	21.89	21.40	20.81

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM (db)	MPR (db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$MAX(CM-1,0)$
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



2.4G WLAN

2.4GWIFI				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
802.11b	1	2412	13.35	21.63
	7	2437	14.92	31.05
	11	2462	13.95	24.83
802.11g	1	2412	16.14	41.11
	7	2437	17.29	53.58
	11	2462	16.61	45.81
802.11n-HT20	1	2412	16.11	40.83
	7	2437	17.23	52.84
	11	2462	16.26	42.27

Bluetooth

BT				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	5.39	3.46
	39	2441	3.63	2.31
	78	2480	2.74	1.88
$\pi/4$ -QPSK(2Mbps)	0	2402	5.79	3.79
	39	2441	4.47	2.80
	78	2480	4.34	2.72
8DPSK(3Mbps)	0	2402	6.05	4.03
	39	2441	4.78	3.01
	78	2480	4.67	2.93

BLE

BLE				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	-2.59	0.55
	19	2440	-2.07	0.62
	39	2480	-3.89	0.41



9.2 Tune Up Power:

Mode	GSM850(AVG)	GSM1900(AVG)
GSM/PCS	33±1dBm	29.5±1dBm
GPRS (1 Slot)	33±1dBm	29.5±1dBm
GPRS (2 Slot)	31±1dBm	27.5±1dBm
GPRS (3 Slot)	29±1dBm	25.5±1dBm
GPRS (4 Slot)	27±1dBm	24±1dBm
EDGE (1 Slot)	25.5±1dBm	27±1dBm
EDGE (2 Slot)	24.5±1dBm	25±1dBm
EDGE (3 Slot)	22±1dBm	22±1dBm
EDGE (4 Slot)	20±1dBm	19.5±1dBm

Mode	WCDMA Band II (AVG)	WCDMA Band V (AVG)	WCDMA Band IV(AVG)
RMR	22.5±1dBm	23±1dBm	22±1dBm
HSDPA Subtest-1	20.5±1dBm	22.5±1dBm	22±1dBm
HSDPA Subtest-2	20±1dBm	22±1dBm	21.5±1dBm
HSDPA Subtest-3	20±1dBm	22±1dBm	21±1dBm
HSDPA Subtest-4	20±1dBm	21.5±1dBm	21±1dBm
HSUPA Subtest-1	20.5±1dBm	22.5±1dBm	22±1dBm
HSUPA Subtest-2	20.5±1dBm	22.5±1dBm	21.5±1dBm
HSUPA Subtest-3	20.5±1dBm	22.5±1dBm	21±1dBm
HSUPA Subtest-4	20.5±1dBm	22.5±1dBm	21.5±1dBm
HSUPA Subtest-5	20±1dBm	22.5±1dBm	21±1dBm

Mode	BT(AVG)
GFSK	4.5±1dBm
$\pi/4$ -DQPSK	5±1dBm
8DPSK	5.5±1dBm

Mode	BLE(AVG)
GFSK(1Mbps)	-1±1dBm

Mode	2.4G WLAN(AVG)
802.11b	14±1dBm
802.11g	16.5±1dBm
802.11n(HT 20)	16.4±1dBm



BW[MHz]	RB Size	Mode	Band 2	Band 4	Band 5	Band 7
1.4	1	QPSK	23±1dBm	23±1dBm	23.5±1dBm	N/A
1.4	3		23±1dBm	23±1dBm	23.5±1dBm	N/A
1.4	6		22±1dBm	22±1dBm	22±1dBm	N/A
1.4	1	16- QAM	23±1dBm	23±1dBm	23±1dBm	N/A
1.4	3		22.5±1dBm	22±1dBm	22.5±1dBm	N/A
1.4	6		21±1dBm	21±1dBm	21.5±1dBm	N/A
3	1	QPSK	23±1dBm	23±1dBm	23±1dBm	N/A
3	8		22±1dBm	22±1dBm	22.5±1dBm	N/A
3	15		22±1dBm	22±1dBm	22±1dBm	N/A
3	1	16- QAM	22±1dBm	23±1dBm	23±1dBm	N/A
3	8		21±1dBm	21±1dBm	22±1dBm	N/A
3	15		21±1dBm	21±1dBm	21.5±1dBm	N/A
5	1	QPSK	23±1dBm	23±1dBm	23±1dBm	23±1dBm
5	12		22±1dBm	22±1dBm	22.5±1dBm	22±1dBm
5	25		22±1dBm	22±1dBm	22.5±1dBm	22±1dBm
5	1	16- QAM	22±1dBm	22.5±1dBm	22.5±1dBm	22±1dBm
5	12		21±1dBm	21±1dBm	21.5±1dBm	21±1dBm
5	25		21±1dBm	21±1dBm	21.5±1dBm	21.5±1dBm
10	1	QPSK	23±1dBm	23±1dBm	23.5±1dBm	23±1dBm
10	25		22±1dBm	22±1dBm	22.5±1dBm	22.5±1dBm
10	50		22±1dBm	22±1dBm	22±1dBm	22±1dBm
10	1	16- QAM	23±1dBm	23±1dBm	23.5±1dBm	23.5±1dBm
10	25		21±1dBm	21±1dBm	21.5±1dBm	21±1dBm
10	50		21±1dBm	21±1dBm	21.5±1dBm	21.5±1dBm
15	1	QPSK	23±1dBm	23±1dBm	N/A	23±1dBm
15	36		22±1dBm	22±1dBm	N/A	22±1dBm
15	75		22±1dBm	22±1dBm	N/A	22±1dBm
15	1	16- QAM	23±1dBm	23±1dBm	N/A	23±1dBm
15	36		21.5±1dBm	21±1dBm	N/A	21.5±1dBm
15	75		21±1dBm	21±1dBm	N/A	21.5±1dBm
20	1	QPSK	23±1dBm	23±1dBm	N/A	23.5±1dBm
20	50		22±1dBm	22±1dBm	N/A	22±1dBm
20	100		22±1dBm	22±1dBm	N/A	22±1dBm
20	1	16- QAM	22.5±1dBm	22±1dBm	N/A	22.5±1dBm
20	50		21±1dBm	21±1dBm	N/A	21.5±1dBm
20	100		21±1dBm	21±1dBm	N/A	21±1dBm



BW[MHz]	RB Size	Mode	Band 12	Band 13	Band 17
1.4	1	QPSK	23.5±1dBm	N/A	N/A
1.4	3		23.5±1dBm	N/A	N/A
1.4	6		22.5±1dBm	N/A	N/A
1.4	1	16- QAM	23.5±1dBm	N/A	N/A
1.4	3		22.5±1dBm	N/A	N/A
1.4	6		22±1dBm	N/A	N/A
3	1	QPSK	23.5±1dBm	N/A	N/A
3	8		22.5±1dBm	N/A	N/A
3	15		22.5±1dBm	N/A	N/A
3	1	16- QAM	23.5±1dBm	N/A	N/A
3	8		22±1dBm	N/A	N/A
3	15		22±1dBm	N/A	N/A
5	1	QPSK	23.5±1dBm	23.1±1dBm	23.2±1dBm
5	12		22.5±1dBm	22.5±1dBm	22.5±1dBm
5	25		22.5±1dBm	22.5±1dBm	22.5±1dBm
5	1	16- QAM	22.5±1dBm	23±1dBm	22.5±1dBm
5	12		22±1dBm	22±1dBm	21.5±1dBm
5	25		22±1dBm	22±1dBm	21.5±1dBm
10	1	QPSK	23.5±1dBm	23.5±1dBm	23.5±1dBm
10	25		22.5±1dBm	23±1dBm	22.5±1dBm
10	50		22.5±1dBm	22.5±1dBm	22.5±1dBm
10	1	16- QAM	23±1dBm	23.5±1dBm	23.1±1dBm
10	25		22±1dBm	22±1dBm	22±1dBm
10	50		22±1dBm	22±1dBm	22±1dBm
15	1	QPSK	N/A	N/A	N/A
15	36		N/A	N/A	N/A
15	75		N/A	N/A	N/A
15	1	16- QAM	N/A	N/A	N/A
15	36		N/A	N/A	N/A
15	75		N/A	N/A	N/A
20	1	QPSK	N/A	N/A	N/A
20	50		N/A	N/A	N/A
20	100		N/A	N/A	N/A
20	1	16- QAM	N/A	N/A	N/A
20	50		N/A	N/A	N/A
20	100		N/A	N/A	N/A



LTE Conducted Power

General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.72	23.46	23.65
1.4	1	2		23.75	23.53	23.65
1.4	1	5		23.78	23.52	23.66
1.4	3	0		23.66	23.69	23.61
1.4	3	1		23.60	23.64	23.62
1.4	3	2		23.65	23.65	23.61
1.4	6	0		22.69	22.56	22.73
1.4	1	0	16-QAM	23.60	22.75	22.92
1.4	1	2		23.59	22.72	22.92
1.4	1	5		23.64	22.67	22.91
1.4	3	0		22.85	22.67	23.06
1.4	3	1		22.90	22.68	23.07
1.4	3	2		22.89	22.64	23.07
1.4	6	0		21.79	21.65	21.95
3	1	0	QPSK	23.55	23.66	23.59
3	1	7		23.59	23.65	23.58
3	1	14		23.59	23.68	23.61
3	8	0		22.78	22.56	22.64
3	8	4		22.62	22.67	22.62
3	8	7		22.71	22.64	22.65
3	15	0		22.71	22.65	22.58
3	1	0	16-QAM	22.89	22.36	22.58
3	1	7		22.84	22.35	22.69
3	1	14		22.85	22.35	22.68
3	8	0		21.72	21.58	21.67
3	8	4		21.72	21.57	21.61
3	8	7		21.74	21.52	21.61
3	15	0		21.87	21.72	21.64



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.55	23.66	23.59
5	1	12		23.59	23.65	23.58
5	1	24		23.59	23.68	23.61
5	12	0		22.78	22.56	22.64
5	12	6		22.62	22.67	22.62
5	12	11		22.71	22.64	22.65
5	25	0		22.71	22.65	22.58
5	1	0	16-QAM	22.89	22.36	22.58
5	1	12		22.84	22.35	22.69
5	1	24		22.85	22.35	22.68
5	12	0		21.72	21.58	21.67
5	12	6		21.72	21.57	21.61
5	12	11		21.74	21.52	21.61
5	25	0		21.87	21.72	21.64
10	1	0	QPSK	23.61	23.76	23.63
10	1	24		23.64	23.71	23.67
10	1	49		23.68	23.74	23.76
10	25	0		22.70	22.66	22.66
10	25	12		22.69	22.68	22.69
10	25	24		22.65	22.67	22.74
10	50	0		22.75	22.67	22.55
10	1	0	16-QAM	23.70	22.69	22.61
10	1	24		23.85	22.71	22.51
10	1	49		23.89	22.66	22.69
10	25	0		21.74	21.80	21.70
10	25	12		21.65	21.78	21.68
10	25	24		21.73	21.71	21.74
10	50	0		21.78	21.71	21.63



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.58	23.75	23.56
15	1	37		23.70	23.63	23.60
15	1	74		23.69	23.64	23.67
15	36	0		22.59	22.77	22.54
15	36	18		22.62	22.59	22.61
15	36	39		22.73	22.67	22.55
15	75	0		22.65	22.61	22.69
15	1	0	16-QAM	23.78	22.74	23.20
15	1	38		23.84	22.70	23.31
15	1	75		23.84	22.70	23.43
15	36	0		21.67	21.89	21.59
15	36	18		21.77	21.85	21.67
15	36	39		22.13	21.79	21.66
15	75	0		21.86	21.74	21.76
20	1	0	QPSK	23.72	23.73	23.73
20	1	49		23.68	23.68	23.69
20	1	99		23.75	23.78	23.70
20	50	0		22.71	22.59	22.60
20	50	24		22.66	22.73	22.58
20	50	49		22.66	22.56	22.73
20	100	0		22.74	22.56	22.58
20	1	0	16-QAM	22.44	22.41	22.91
20	1	49		22.46	22.51	22.91
20	1	99		22.53	22.44	23.04
20	50	0		21.79	21.68	21.64
20	50	24		21.84	21.69	21.78
20	50	49		21.89	21.73	21.74
20	100	0		21.84	21.66	21.75



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.64	23.28	23.73
1.4	1	2		23.67	23.36	23.77
1.4	1	5		23.69	23.28	23.80
1.4	3	0		23.59	23.39	23.43
1.4	3	1		23.62	23.44	23.47
1.4	3	2		23.58	23.38	23.40
1.4	6	0		22.60	22.38	22.55
1.4	1	0	16-QAM	23.54	23.11	22.97
1.4	1	2		23.51	23.12	22.99
1.4	1	5		23.51	23.08	22.95
1.4	3	0		22.82	22.47	22.87
1.4	3	1		22.84	22.53	22.85
1.4	3	2		22.82	22.48	22.83
1.4	6	0		21.70	21.41	21.72
3	1	0	QPSK	23.47	23.31	23.78
3	1	7		23.45	23.37	23.78
3	1	14		23.37	23.33	23.79
3	8	0		22.59	22.36	22.60
3	8	4		22.63	22.41	22.52
3	8	7		22.51	22.38	22.57
3	15	0		22.51	22.39	22.61
3	1	0	16-QAM	23.59	23.06	22.98
3	1	7		23.57	23.12	22.94
3	1	14		23.53	23.11	23.01
3	8	0		21.58	21.66	21.65
3	8	4		21.53	21.71	21.62
3	8	7		21.50	21.67	21.66
3	15	0		21.75	21.51	21.65



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.57	23.40	23.34
5	1	12		23.46	23.48	23.24
5	1	24		23.46	23.49	23.28
5	12	0		22.57	22.31	22.64
5	12	6		22.59	22.36	22.61
5	12	11		22.51	22.38	22.48
5	25	0		22.54	22.38	22.49
5	1	0	16-QAM	22.80	22.11	23.06
5	1	12		22.74	22.12	22.89
5	1	24		22.72	22.21	22.97
5	12	0		21.55	21.40	21.62
5	12	6		21.46	21.32	21.61
5	12	11		21.53	21.37	21.61
5	25	0		21.64	21.54	21.76
10	1	0	QPSK	23.49	23.42	23.65
10	1	24		23.38	23.50	23.67
10	1	49		23.40	23.61	23.66
10	25	0		22.55	22.33	22.62
10	25	12		22.54	22.48	22.56
10	25	24		22.51	22.49	22.49
10	50	0		22.52	22.41	22.66
10	1	0	16-QAM	23.59	22.45	22.80
10	1	24		23.47	22.47	22.71
10	1	49		23.50	22.61	22.81
10	25	0		21.58	21.50	21.61
10	25	12		21.58	21.53	21.68
10	25	24		21.48	21.51	21.80
10	50	0		21.64	21.53	21.69



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.54	23.41	23.67
15	1	37		23.42	23.51	23.73
15	1	74		23.36	23.59	23.69
15	36	0		22.38	22.44	22.54
15	36	18		22.54	22.49	22.61
15	36	39		22.34	22.37	22.54
15	75	0		22.50	22.45	22.52
15	1	0	16-QAM	23.59	22.48	23.30
15	1	38		23.53	22.55	23.33
15	1	75		23.55	22.62	23.35
15	36	0		21.61	21.58	21.61
15	36	18		21.56	21.63	21.66
15	36	39		21.56	21.60	21.67
15	75	0		21.61	21.51	21.73
20	1	0	QPSK	23.65	23.36	23.58
20	1	49		23.51	23.40	23.68
20	1	99		23.49	23.59	23.67
20	50	0		22.54	22.48	22.51
20	50	24		22.54	22.45	22.60
20	50	49		22.46	22.57	22.59
20	100	0		22.47	22.46	22.63
20	1	0	16-QAM	22.35	22.62	22.69
20	1	49		22.22	22.70	22.80
20	1	99		22.15	22.80	22.78
20	50	0		21.65	21.41	21.60
20	50	24		21.61	21.51	21.62
20	50	49		21.58	21.58	21.72
20	100	0		21.58	21.52	21.62



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	24.08	23.81	23.98
1.4	1	2		24.09	23.86	23.91
1.4	1	5		24.11	23.86	23.90
1.4	3	0		23.99	24.04	23.93
1.4	3	1		24.04	23.95	23.83
1.4	3	2		23.99	23.97	23.87
1.4	6	0		22.94	22.93	22.87
1.4	1	0	16-QAM	23.73	23.61	23.82
1.4	1	2		23.78	23.72	23.73
1.4	1	5		23.72	23.63	23.73
1.4	3	0		23.09	23.04	23.14
1.4	3	1		23.04	22.99	23.03
1.4	3	2		23.07	23.01	23.03
1.4	6	0		22.15	22.27	22.33
3	1	0	QPSK	23.96	23.95	23.89
3	1	7		23.92	23.84	23.92
3	1	14		23.93	23.88	23.84
3	8	0		22.85	22.93	22.85
3	8	4		22.86	22.93	22.87
3	8	7		23.03	22.81	22.78
3	15	0		22.95	22.88	22.81
3	1	0	16-QAM	23.61	23.32	23.69
3	1	7		23.53	23.36	23.80
3	1	14		23.69	23.38	23.76
3	8	0		22.19	22.06	21.79
3	8	4		22.18	22.40	21.73
3	8	7		22.20	22.28	22.10
3	15	0		22.08	22.42	21.93



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.88	23.92	23.77
5	1	12		23.87	23.81	23.83
5	1	24		23.87	23.86	23.77
5	12	0		22.77	22.99	22.96
5	12	6		23.04	22.86	22.84
5	12	11		22.94	22.83	22.97
5	25	0		23.00	22.95	22.93
5	1	0	16-QAM	23.02	22.63	22.90
5	1	12		22.99	22.67	22.88
5	1	24		23.11	22.52	22.80
5	12	0		21.93	21.98	22.30
5	12	6		21.94	22.27	21.82
5	12	11		21.89	22.20	21.85
5	25	0		22.10	22.36	21.88
10	1	0	QPSK	23.94	24.08	23.85
10	1	24		23.97	24.03	24.03
10	1	49		24.09	24.03	23.95
10	25	0		23.02	22.97	22.80
10	25	12		22.93	22.95	22.83
10	25	24		22.86	22.82	22.95
10	50	0		22.92	22.92	22.79
10	1	0	16-QAM	23.92	22.87	22.79
10	1	24		24.07	22.97	22.81
10	1	49		24.09	22.94	22.75
10	25	0		21.94	22.04	22.34
10	25	12		22.01	22.35	22.26
10	25	24		21.89	22.34	22.01
10	50	0		21.99	22.46	22.34



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.82	23.73	23.75
5	1	12		23.88	23.75	23.78
5	1	24		23.89	23.73	23.81
5	12	0		22.91	22.78	22.90
5	12	6		22.89	22.88	22.93
5	12	11		22.94	22.89	22.89
5	25	0		22.94	22.80	22.95
5	1	0	16-QAM	22.61	22.83	22.87
5	1	12		22.66	22.92	22.90
5	1	24		22.72	22.93	22.94
5	12	0		21.80	21.90	21.85
5	12	6		21.79	21.86	21.78
5	12	11		21.82	21.84	21.83
5	25	0		21.95	21.86	22.06
10	1	0	QPSK	23.79	23.77	23.82
10	1	24		23.79	23.82	23.86
10	1	49		23.79	23.88	23.87
10	25	0		22.93	22.85	22.79
10	25	12		22.92	22.85	22.84
10	25	24		22.91	22.82	23.00
10	50	0		22.96	22.75	22.82
10	1	0	16-QAM	23.88	22.82	22.76
10	1	24		24.00	22.92	22.82
10	1	49		23.98	22.96	22.92
10	25	0		21.85	21.93	21.86
10	25	12		21.83	21.94	21.91
10	25	24		21.87	21.92	21.97
10	50	0		21.87	22.01	21.89



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.69	23.68	23.83
15	1	37		23.67	23.78	23.86
15	1	74		23.63	23.86	23.95
15	36	0		22.84	22.75	22.72
15	36	18		22.86	22.75	22.80
15	36	39		22.68	22.78	22.91
15	75	0		22.79	22.83	22.85
15	1	0	16-QAM	23.83	22.82	23.64
15	1	38		23.92	22.90	23.68
15	1	75		23.85	22.98	23.75
15	36	0		21.94	21.89	21.92
15	36	18		21.96	22.00	21.86
15	36	39		21.94	22.04	21.96
15	75	0		22.00	21.91	21.90
20	1	0	QPSK	23.75	23.72	24.03
20	1	49		23.69	23.85	23.97
20	1	99		23.66	24.00	24.08
20	50	0		22.92	22.73	22.84
20	50	24		22.87	22.78	22.74
20	50	49		22.68	22.85	22.83
20	100	0		22.75	22.78	22.89
20	1	0	16-QAM	22.70	23.13	22.75
20	1	49		22.58	23.18	22.68
20	1	99		22.51	23.16	22.81
20	50	0		22.00	21.79	21.89
20	50	24		21.94	21.94	21.89
20	50	49		22.01	21.94	21.96
20	100	0		21.88	21.88	21.91



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	24.15	24.02	24.12
1.4	1	2		24.23	24.16	24.12
1.4	1	5		24.19	24.11	24.14
1.4	3	0		24.24	24.19	24.01
1.4	3	1		24.20	24.24	24.07
1.4	3	2		24.14	24.23	23.99
1.4	6	0		23.21	23.09	22.92
1.4	1	0	16-QAM	24.11	23.46	23.74
1.4	1	2		24.13	23.63	23.61
1.4	1	5		24.20	23.65	23.60
1.4	3	0		23.36	23.07	23.38
1.4	3	1		23.39	23.06	23.21
1.4	3	2		23.39	23.05	23.26
1.4	6	0		22.62	22.12	22.53
3	1	0	QPSK	24.06	24.12	24.17
3	1	7		23.95	24.17	24.16
3	1	14		23.98	24.13	24.15
3	8	0		23.26	23.00	23.15
3	8	4		23.19	23.05	23.09
3	8	7		23.27	23.08	22.99
3	15	0		23.19	23.06	23.11
3	1	0	16-QAM	24.06	23.55	23.71
3	1	7		24.00	23.63	23.69
3	1	14		24.05	23.64	23.55
3	8	0		22.37	22.37	21.93
3	8	4		22.37	22.36	21.94
3	8	7		22.40	22.14	22.44
3	15	0		22.55	22.24	22.06



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.03	24.15	24.12
5	1	12		23.98	24.14	24.02
5	1	24		23.98	24.14	23.98
5	12	0		23.27	22.95	23.19
5	12	6		23.21	23.12	23.13
5	12	11		23.26	23.08	23.08
5	25	0		23.20	23.04	23.13
5	1	0	16-QAM	23.23	22.74	23.08
5	1	12		23.31	22.77	23.06
5	1	24		23.23	22.94	22.83
5	12	0		22.49	22.00	22.02
5	12	6		22.45	22.05	22.00
5	12	11		22.44	22.10	21.94
5	25	0		22.59	22.25	21.97
10	1	0	QPSK	24.09	24.12	24.04
10	1	24		24.09	24.28	23.90
10	1	49		24.13	24.28	23.95
10	25	0		23.26	23.13	23.13
10	25	12		23.29	23.20	23.16
10	25	24		22.97	23.29	23.18
10	50	0		23.18	23.06	23.15
10	1	0	16-QAM	23.17	23.07	23.77
10	1	24		23.15	22.96	23.80
10	1	49		23.17	23.12	23.76
10	25	0		22.52	22.23	22.11
10	25	12		22.59	22.20	22.48
10	25	24		22.17	22.58	22.12
10	50	0		22.61	22.18	22.50



LTE Band 13 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.93	23.96	23.94
5	1	12		23.92	23.89	24.00
5	1	24		24.03	23.98	23.99
5	12	0		22.99	23.05	23.02
5	12	6		23.14	23.37	22.93
5	12	11		23.10	22.93	23.09
5	25	0		23.06	23.38	23.17
5	1	0	16-QAM	23.11	22.61	23.33
5	1	12		23.18	23.06	23.09
5	1	24		23.58	22.69	22.95
5	12	0		22.31	22.28	22.49
5	12	6		22.40	22.44	22.48
5	12	11		22.39	22.35	22.06
5	25	0		22.54	22.49	22.43
10	1	0	QPSK	/	23.86	/
10	1	24		/	23.99	/
10	1	49		/	24.11	/
10	25	0		/	23.07	/
10	25	12		/	23.52	/
10	25	24		/	22.99	/
10	50	0		/	23.38	/
10	1	0	16-QAM	/	23.94	/
10	1	24		/	24.48	/
10	1	49		/	24.03	/
10	25	0		/	22.29	/
10	25	12		/	22.35	/
10	25	24		/	22.43	/
10	50	0		/	22.46	/




LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.09	24.02	24.02
5	1	12		24.14	23.95	24.01
5	1	24		24.17	24.02	23.92
5	12	0		23.15	23.11	23.11
5	12	6		23.02	23.17	23.17
5	12	11		23.06	23.21	23.08
5	25	0		23.06	23.25	23.07
5	1	0	16-QAM	22.73	23.13	23.11
5	1	12		22.71	23.19	23.13
5	1	24		22.75	23.10	22.97
5	12	0		22.02	22.17	21.94
5	12	6		22.03	22.47	22.00
5	12	11		22.15	22.04	21.97
5	25	0		22.18	22.44	22.18
10	1	0	QPSK	23.98	24.11	24.29
10	1	24		23.99	23.96	24.14
10	1	49		23.95	24.00	24.17
10	25	0		23.00	23.04	23.04
10	25	12		23.16	23.17	23.14
10	25	24		23.23	23.18	23.21
10	50	0		23.11	23.18	23.21
10	1	0	16-QAM	24.00	23.03	22.99
10	1	24		23.89	23.17	23.11
10	1	49		24.00	23.11	22.94
10	25	0		21.95	22.26	22.20
10	25	12		21.98	22.50	22.53
10	25	24		22.05	22.08	22.09
10	50	0		22.07	22.54	22.47

10. EUT and Test Setup Photo

10.1 EUT Photos

Front side

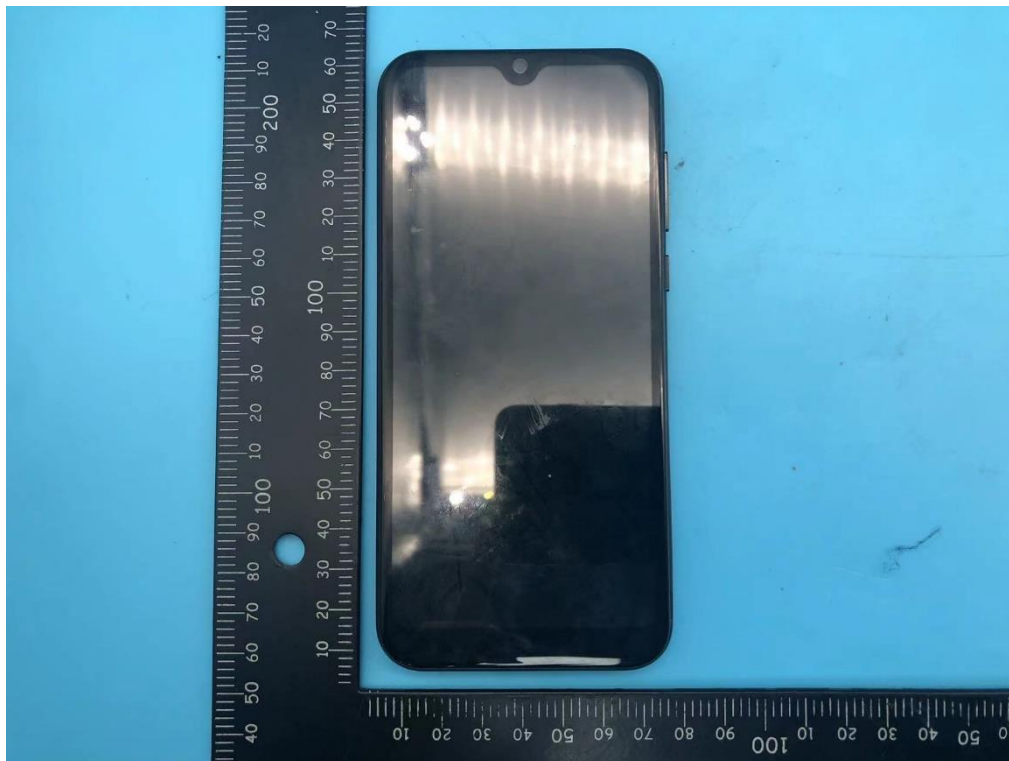

Back side





Right Edge



Left Edge





Top Edge




Bottom Edge




10.2 Setup Photos


Right Touch

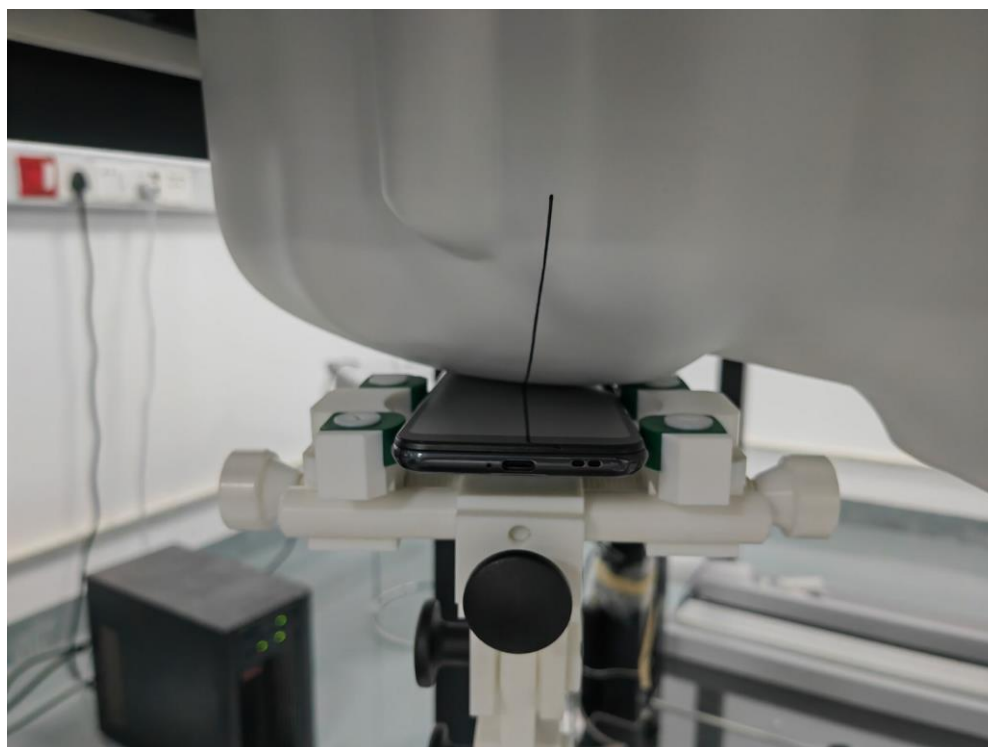


Right Tilt

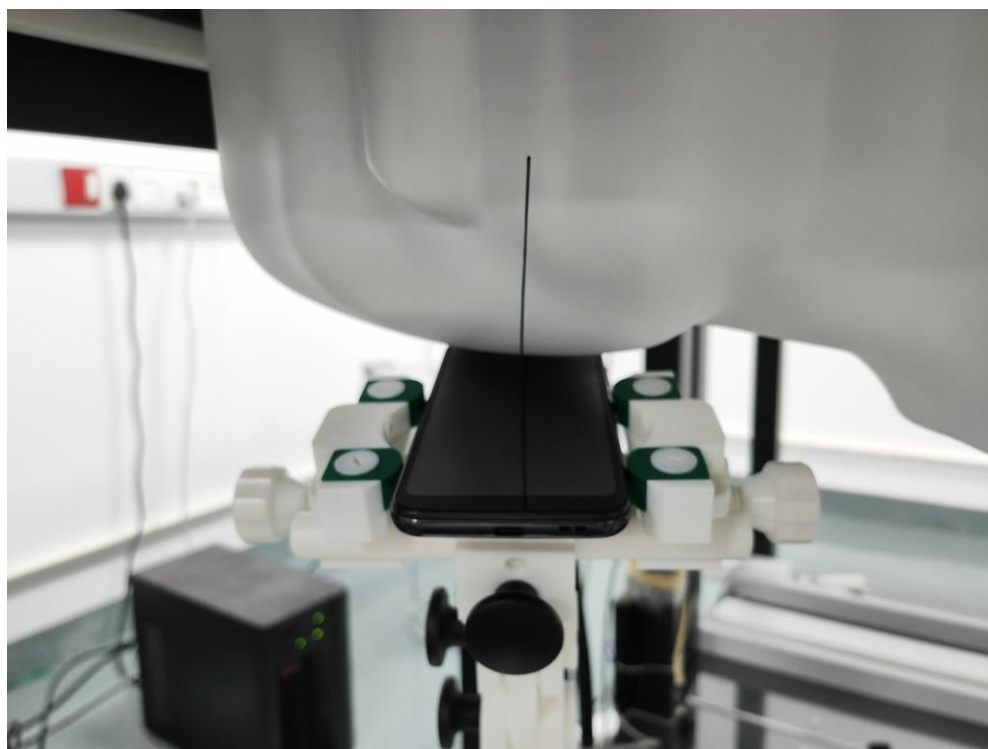


Left Touch

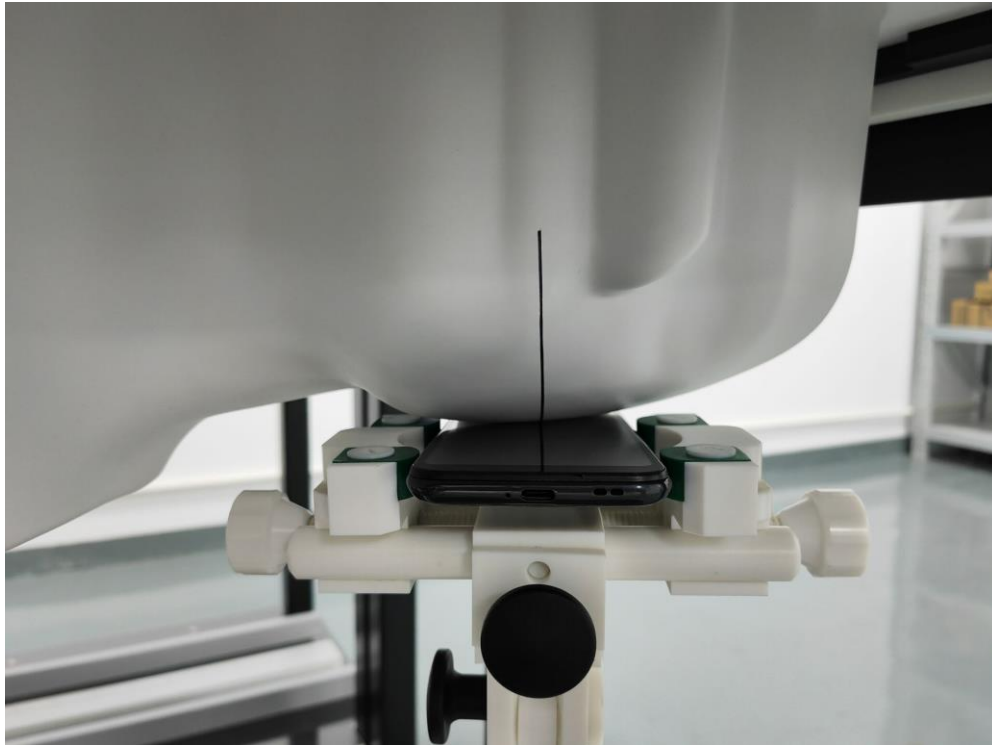

Left Tilt

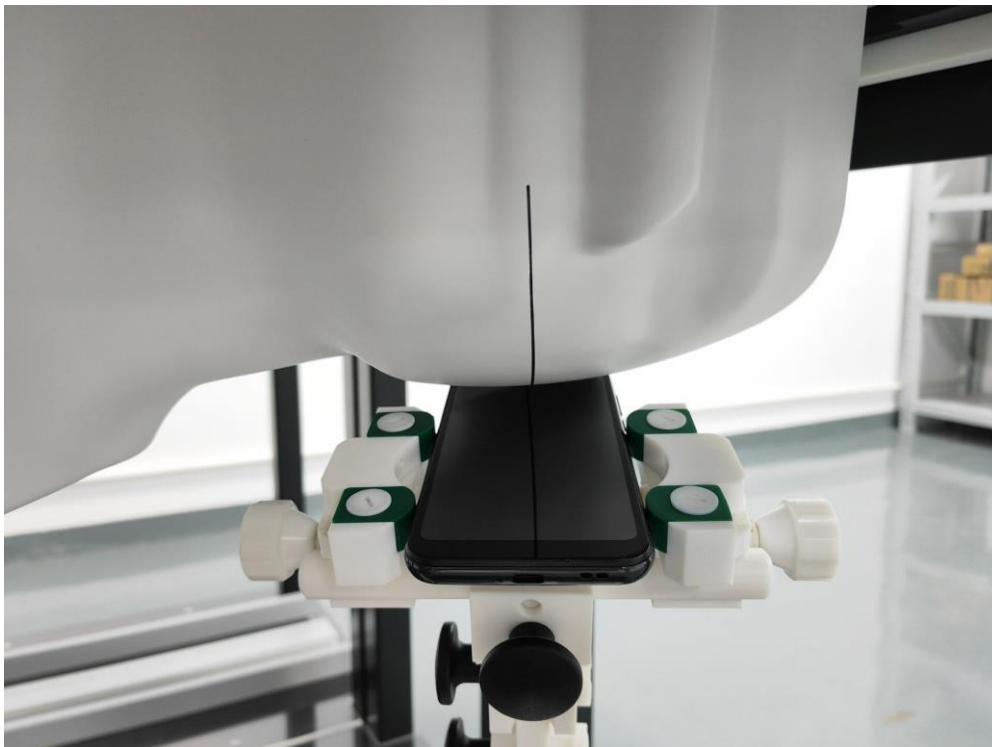

Body Front side (separation distance is 10mm)

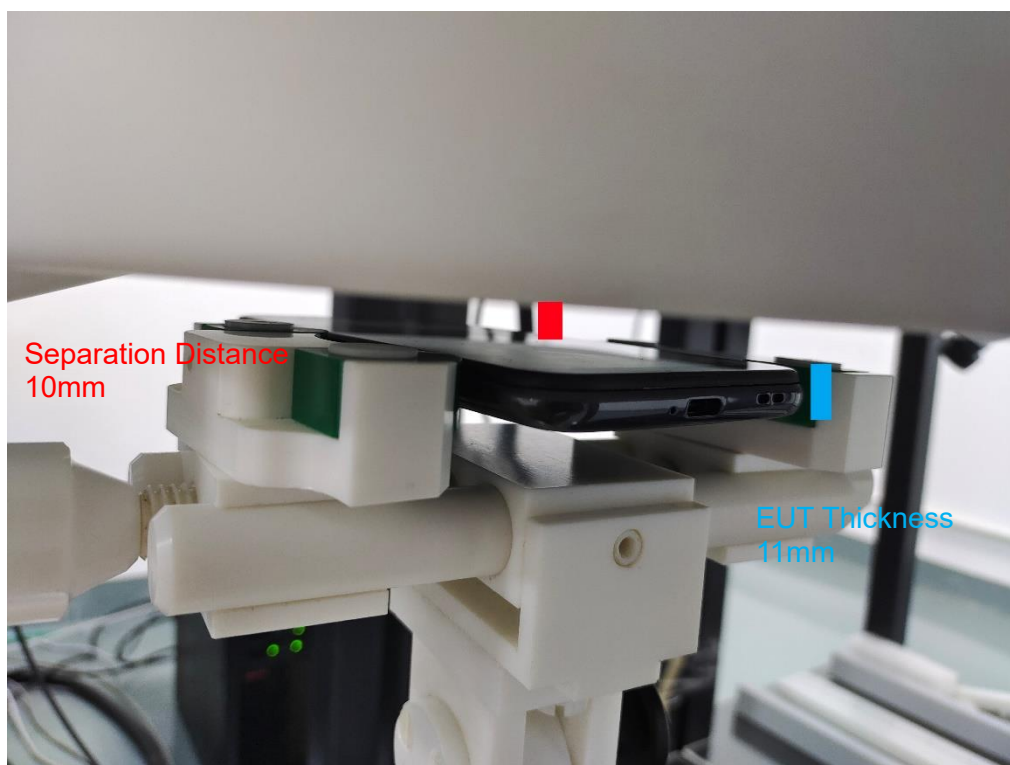

Body Back side (separation distance 10mm)



Body Left side (separation distance is 10mm)




Body Right side (separation distance is 10mm)




Body Top side (separation distance is 10mm)




Body Bottom side (separation distance is 10mm)

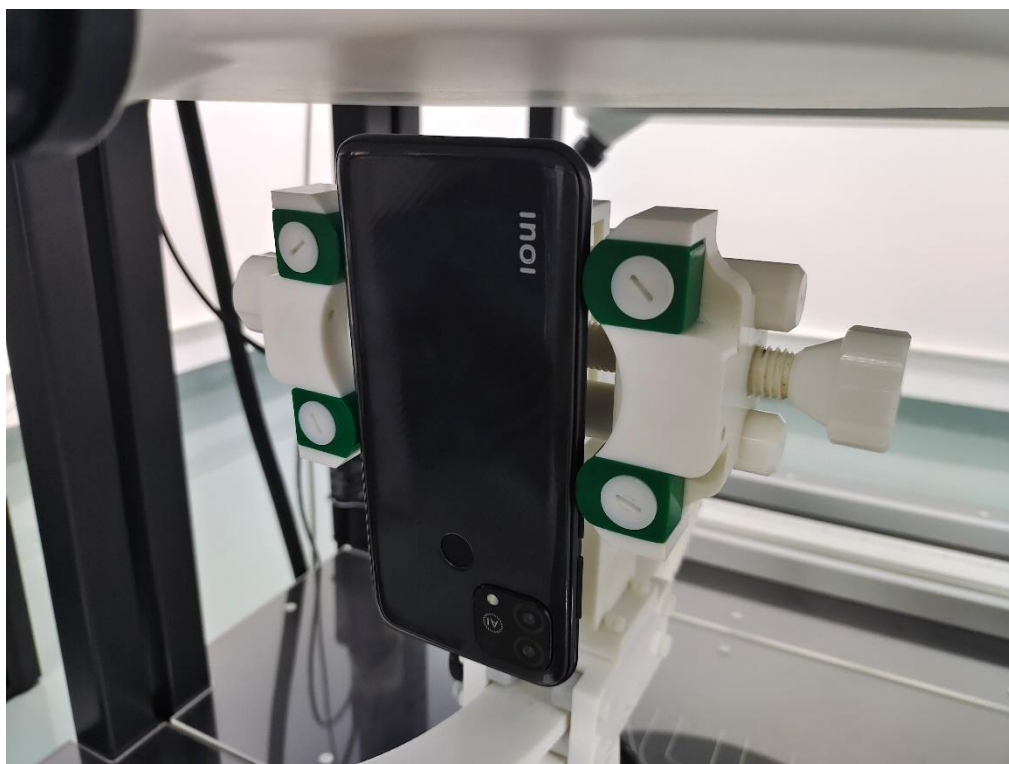

Liquid depth (15 cm)

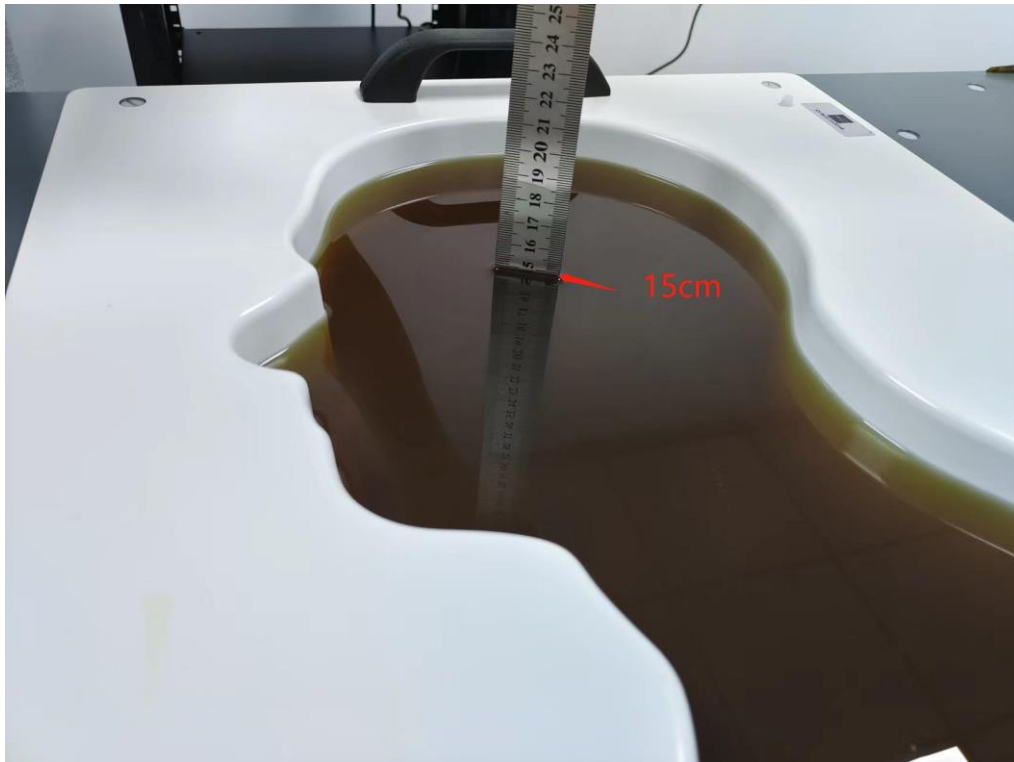

Liquid depth (15 cm)

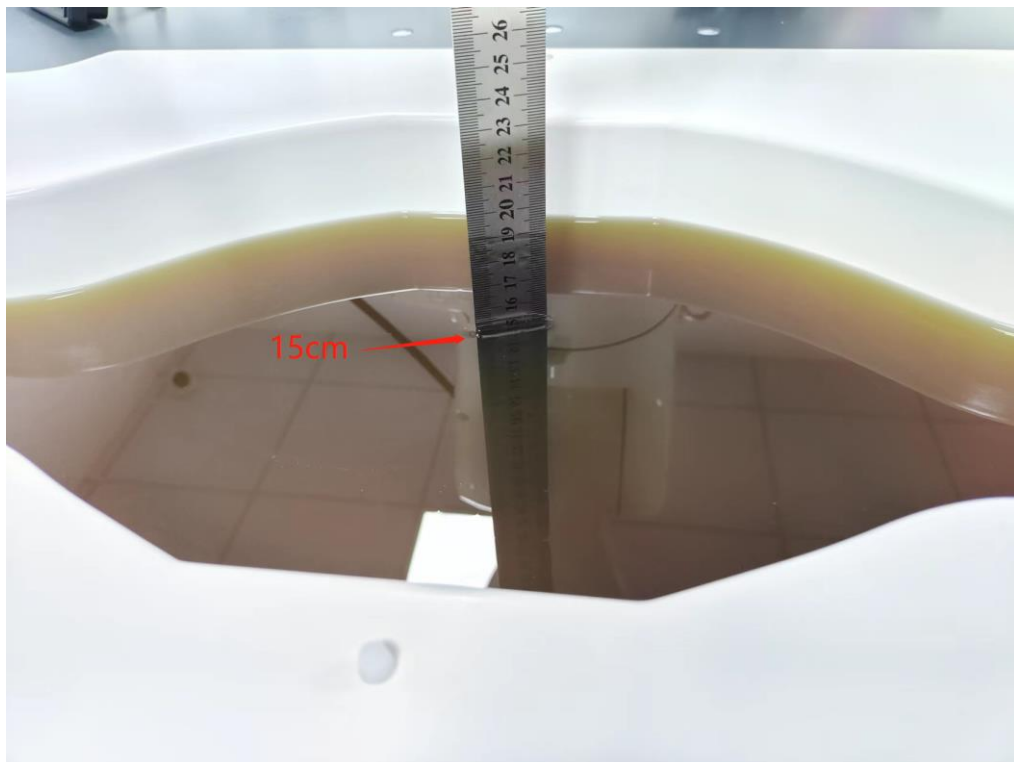



11. SAR Result Summary

11.1 Head SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
GSM850	GSM	Right Cheek	848.8	0.160	-3.65	34.00	33.77	0.169	/
		Right Tilt	848.8	0.147	3.19	34.00	33.77	0.155	/
		Left Cheek	848.8	0.187	2.79	34.00	33.77	0.197	1
		Left Tilt	848.8	0.159	-0.61	34.00	33.77	0.168	/
PCS 1900	GSM	Right Cheek	1850.2	0.128	2.75	30.50	30.24	0.136	/
		Right Tilt	1850.2	0.114	-3.86	30.50	30.24	0.121	/
		Left Cheek	1850.2	0.180	-3.19	30.50	30.24	0.191	3
		Left Tilt	1850.2	0.157	-3.03	30.50	30.24	0.167	/
WCDMA Band II	RMC	Right Cheek	1880	0.236	3.48	23.50	23.30	0.247	/
		Right Tilt	1880	0.204	-0.31	23.50	23.30	0.214	/
		Left Cheek	1852.4	0.520	1.64	23.50	23.23	0.553	/
		Left Cheek	1880	0.551	-1.85	23.50	23.30	0.577	5
		Left Cheek	1907.6	0.466	1.74	23.50	22.98	0.525	/
		Left Tilt	1880	0.483	1.13	23.50	23.30	0.506	/
WCDMA Band IV	RMC	Right Cheek	1752.4	0.354	2.24	24.00	23.52	0.395	/
		Right Tilt	1752.4	0.283	-2.17	24.00	23.52	0.316	/
		Left Cheek	1752.4	0.508	-1.47	24.00	23.52	0.567	7
		Left Tilt	1752.4	0.416	2.36	24.00	23.52	0.465	/
WCDMA Band V	RMC	Right Cheek	826.4	0.164	-2.56	23.00	22.97	0.165	9
		Right Tilt	826.4	0.122	-1.24	23.00	22.97	0.123	/
		Left Cheek	826.4	0.163	-2.71	23.00	22.97	0.164	/
		Left Tilt	826.4	0.124	0.57	23.00	22.97	0.125	/

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas.No.
LTE Band 2	20M	QPSK	1	0	Right Cheek	1880	0.221	0.81	24	23.78	0.232	/
			50	0	Right Cheek	1880	0.150	2.18	23	22.73	0.160	/
			1	0	Right Tilt	1880	0.182	3.17	24	23.78	0.191	/
			50	0	Right Tilt	1880	0.124	2.03	23	22.73	0.132	/
			1	0	Left Cheek	1880	0.352	2.18	24	23.78	0.370	11
			50	0	Left Cheek	1880	0.247	3.94	23	22.73	0.263	/
			1	0	Left Tilt	1880	0.261	-0.66	24	23.78	0.275	/
			50	0	Left Tilt	1880	0.195	-1.83	23	22.73	0.208	/
LTE Band 4	20M	QPSK	1	0	Right Cheek	1745	0.179	1.11	24	23.68	0.193	/
			50	0	Right Cheek	1745	0.125	0.79	23	22.6	0.137	/
			1	0	Right Tilt	1745	0.158	4.00	24	23.68	0.170	/
			50	0	Right Tilt	1745	0.106	-3.04	23	22.6	0.116	/
			1	0	Left Cheek	1745	0.204	-3.54	24	23.68	0.220	13
			50	0	Left Cheek	1745	0.163	-3.19	23	22.6	0.179	/
			1	0	Left Tilt	1745	0.182	1.29	24	23.68	0.196	/
			50	0	Left Tilt	1745	0.125	0.79	23	22.6	0.137	/



			50	0	Left Tilt	1745	0.129	-2.16	23	22.6	0.141	/
LTE Band 5	10M	QPSK	1	0	Right Cheek	829	0.136	-2.09	24.5	24.09	0.149	15
			25	0	Right Cheek	829	0.102	-3.08	22.5	23.02	0.090	/
			1	0	Right Tilt	829	0.118	-0.72	24.5	24.09	0.130	/
			25	0	Right Tilt	829	0.092	2.87	22.5	23.02	0.082	/
			1	0	Left Cheek	829	0.120	-0.21	24.5	24.09	0.132	/
			25	0	Left Cheek	829	0.099	-2.13	22.5	23.02	0.088	/
			1	0	Left Tilt	829	0.100	-3.89	24.5	24.09	0.110	/
			25	0	Left Tilt	829	0.084	2.86	22.5	23.02	0.075	/
LTE Band 7	20M	QPSK	1	0	Right Cheek	2560	0.124	-0.14	24.5	24.08	0.137	/
			50	0	Right Cheek	2510	0.087	-3.25	23	22.92	0.089	/
			1	0	Right Tilt	2560	0.101	2.23	24.5	24.08	0.111	/
			50	0	Right Tilt	2510	0.075	-0.89	23	22.92	0.076	/
			1	0	Left Cheek	2560	0.229	-3.65	24.5	24.08	0.252	17
			50	0	Left Cheek	2510	0.126	-3.73	23	22.92	0.128	/
			1	0	Left Tilt	2560	0.181	-0.11	24.5	24.08	0.199	/
			50	0	Left Tilt	2510	0.102	3.52	23	22.92	0.104	/
LTE Band 12	10M	QPSK	1	0	Right Cheek	707.5	0.043	-1.93	24.5	24.28	0.045	/
			25	0	Right Cheek	707.5	0.034	-3.19	23.5	23.29	0.036	/
			1	0	Right Tilt	707.5	0.037	-2.90	24.5	24.28	0.039	/
			25	0	Right Tilt	707.5	0.028	-2.91	23.5	23.29	0.029	/
			1	0	Left Cheek	707.5	0.065	0.12	24.5	24.28	0.068	19
			25	0	Left Cheek	707.5	0.052	-1.95	23.5	23.29	0.055	/
			1	0	Left Tilt	707.5	0.055	-0.53	24.5	24.28	0.058	/
			25	0	Left Tilt	707.5	0.047	-3.10	23.5	23.29	0.049	/
LTE Band 13	10M	QPSK	1	0	Right Cheek	782	0.040	2.61	24.5	24.11	0.044	/
			25	0	Right Cheek	782	0.037	-3.57	24	23.52	0.041	/
			1	0	Right Tilt	782	0.038	-0.57	24.5	24.11	0.042	/
			25	0	Right Tilt	782	0.033	-0.53	24	23.52	0.037	/
			1	0	Left Cheek	782	0.083	2.69	24.5	24.11	0.091	21
			25	0	Left Cheek	782	0.075	3.59	24	23.52	0.084	/
			1	0	Left Tilt	782	0.071	-0.85	24.5	24.11	0.078	/
			25	0	Left Tilt	782	0.062	-2.15	24	23.52	0.069	/
LTE Band 17	10M	QPSK	1	0	Right Cheek	711	0.104	-0.62	24.5	24.29	0.109	/
			25	0	Right Cheek	709	0.087	2.98	23.5	23.23	0.093	/
			1	0	Right Tilt	711	0.090	-4.00	24.5	24.29	0.094	/
			25	0	Right Tilt	709	0.076	-3.25	23.5	23.23	0.081	/
			1	0	Left Cheek	711	0.116	-0.75	24.5	24.29	0.122	23
			25	0	Left Cheek	709	0.097	-2.79	23.5	23.23	0.103	/
			1	0	Left Tilt	711	0.102	0.67	24.5	24.29	0.107	/
			25	0	Left Tilt	709	0.090	-2.36	23.5	23.23	0.096	/



Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
2.4G WLAN	802.11g	Right Cheek	2437	0.135	2.88	17.50	17.29	0.142	/
		Right Tilt	2437	0.146	3.23	17.50	17.29	0.153	25
		Left Cheek	2437	0.102	-1.96	17.50	17.29	0.107	/
		Left Tilt	2437	0.089	2.76	17.50	17.29	0.093	/
BT	8DPSK(3Mbps)	Right Cheek	2402	0.030	0.02	6.50	6.05	0.033	/
		Right Tilt	2402	0.033	0.81	6.50	6.05	0.037	27
		Left Cheek	2402	0.025	1.31	6.50	6.05	0.028	/
		Left Tilt	2402	0.028	-1.12	6.50	6.05	0.031	/

Note:

1. Per KDB 447498 D04, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. Scaled SAR(W/kg) = Measured SAR(W/kg) *Tune-up Scaling Factor
2. Per KDB 865664 D01, Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg



11.2 Body-worn and Hotspot SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
GSM850	GPRS Data-2 Slot	Front Side	848.8	0.170	0.67	32.00	31.65	0.184	/
		Back Side	848.8	0.249	0.36	32.00	31.65	0.270	2
		Left Side	848.8	0.140	1.40	32.00	31.65	0.152	/
		Right Side	848.8	0.107	0.89	32.00	31.65	0.116	/
		Top Side	848.8	0.053	-2.83	32.00	31.65	0.057	/
		Bottom Side	848.8	0.037	0.40	32.00	31.65	0.040	/
PCS 1900	GPRS Data-3 Slot	Front Side	1850.2	0.236	3.34	26.50	26.49	0.237	/
		Back Side	1850.2	0.240	0.25	26.50	26.49	0.241	4
		Left Side	1850.2	0.143	-1.36	26.50	26.49	0.143	/
		Right Side	1850.2	0.120	1.55	26.50	26.49	0.120	/
		Top Side	1850.2	0.047	-1.04	26.50	26.49	0.047	/
		Bottom Side	1850.2	0.178	-0.51	26.50	26.49	0.178	/
WCDMA Band II	RMC	Front Side	1880	0.444	1.84	23.50	23.30	0.465	6
		Back Side	1880	0.438	-2.00	23.50	23.30	0.459	/
		Left Side	1880	0.271	3.89	23.50	23.30	0.284	/
		Right Side	1880	0.219	-3.82	23.50	23.30	0.229	/
		Top Side	1880	0.060	3.74	23.50	23.30	0.063	/
		Bottom Side	1880	0.389	-0.17	23.50	23.30	0.407	/
WCDMA Band IV	RMC	Front Side	1752.4	0.304	-3.99	24.00	23.52	0.340	/
		Back Side	1752.4	0.441	2.49	24.00	23.52	0.493	8
		Left Side	1752.4	0.149	3.91	24.00	23.52	0.166	/
		Right Side	1752.4	0.132	0.55	24.00	23.52	0.147	/
		Top Side	1752.4	0.100	2.63	24.00	23.52	0.112	/
		Bottom Side	1752.4	0.324	3.27	24.00	23.52	0.362	/
WCDMA Band V	RMC	Front Side	826.4	0.175	3.27	23.00	22.97	0.176	/
		Back Side	826.4	0.209	-1.23	23.00	22.97	0.210	10
		Left Side	826.4	0.111	1.04	23.00	22.97	0.112	/
		Right Side	826.4	0.093	-1.68	23.00	22.97	0.094	/
		Top Side	826.4	0.071	3.14	23.00	22.97	0.071	/
		Bottom Side	826.4	0.044	-0.36	23.00	22.97	0.044	/



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas.No.
LTE Band 2	20M	QPSK	1	0	Front side	1880	0.389	-3.72	24	23.78	0.409	/
			50	0	Front side	1880	0.258	2.62	23	22.73	0.275	/
			1	0	Back Side	1860	0.598	2.08	24	23.75	0.633	/
			1	0	Back Side	1880	0.630	-0.27	24	23.78	0.663	12
			1	0	Back Side	1900	0.550	-2.26	24	23.7	0.589	/
			50	0	Back Side	1880	0.512	-2.06	23	22.73	0.545	/
			1	0	Left Side	1880	0.257	-3.67	24	23.78	0.270	/
			50	0	Left Side	1880	0.137	1.92	23	22.73	0.146	/
			1	0	Right Side	1880	0.164	0.33	24	23.78	0.173	/
			50	0	Right Side	1880	0.105	-2.33	23	22.73	0.112	/
			1	0	Top Side	1880	0.037	1.19	24	23.78	0.039	/
			50	0	Top Side	1880	0.025	-3.33	23	22.73	0.027	/
			1	0	Bottom Side	1880	0.303	2.11	24	23.78	0.319	/
			50	0	Bottom Side	1880	0.175	2.26	23	22.73	0.186	/
LTE Band 4	20M	QPSK	1	0	Front side	1745	0.182	1.32	24	23.68	0.196	/
			50	0	Front side	1745	0.167	-0.40	23	22.6	0.183	/
			1	0	Back Side	1745	0.371	0.17	24	23.68	0.399	14
			50	0	Back Side	1745	0.299	2.13	23	22.6	0.328	/
			1	0	Left Side	1745	0.136	-2.36	24	23.68	0.146	/
			50	0	Left Side	1745	0.122	-1.80	23	22.6	0.134	/
			1	0	Right Side	1745	0.113	-2.97	24	23.68	0.122	/
			50	0	Right Side	1745	0.091	-1.13	23	22.6	0.100	/
			1	0	Top Side	1745	0.030	-2.49	24	23.68	0.032	/
			50	0	Top Side	1745	0.022	-1.38	23	22.6	0.024	/
			1	0	Bottom Side	1745	0.266	-0.58	24	23.68	0.286	/
			50	0	Bottom Side	1745	0.218	-3.27	23	22.6	0.239	/
LTE Band 5	10M	QPSK	1	0	Front side	829	0.115	-3.10	24.5	24.09	0.126	/
			25	0	Front side	829	0.107	-0.13	22.5	23.02	0.095	/
			1	0	Back Side	829	0.210	1.55	24.5	24.09	0.231	16
			25	0	Back Side	829	0.163	-1.25	22.5	23.02	0.145	/
			1	0	Left Side	829	0.085	-3.41	24.5	24.09	0.093	/
			25	0	Left Side	829	0.066	1.67	22.5	23.02	0.059	/
			1	0	Right Side	829	0.072	-3.46	24.5	24.09	0.079	/
			25	0	Right Side	829	0.061	-2.47	22.5	23.02	0.054	/
			1	0	Top Side	829	0.028	3.59	24.5	24.09	0.031	/
			25	0	Top Side	829	0.020	2.78	22.5	23.02	0.018	/
			1	0	Bottom Side	829	0.040	-3.77	24.5	24.09	0.044	/
			25	0	Bottom Side	829	0.033	2.92	22.5	23.02	0.029	/
LTE Band 7	20M	QPSK	1	0	Front side	2560	0.250	2.11	24.5	24.08	0.275	/
			50	0	Front side	2510	0.172	-0.08	23	22.92	0.175	/
			1	0	Back Side	2560	0.343	-3.07	24.5	24.08	0.378	18
			50	0	Back Side	2510	0.236	-3.82	23	22.92	0.240	/
			1	0	Left Side	2560	0.188	3.59	24.5	24.08	0.207	/
			50	0	Left Side	2510	0.130	3.74	23	22.92	0.132	/
			1	0	Right Side	2560	0.146	3.44	24.5	24.08	0.161	/
			50	0	Right Side	2510	0.109	-0.61	23	22.92	0.111	/
			1	0	Top Side	2560	0.041	-1.54	24.5	24.08	0.045	/



			50	0	Top Side	2510	0.028	-1.26	23	22.92	0.029	/
			1	0	Bottom Side	2560	0.179	0.96	24.5	24.08	0.197	/
			50	0	Bottom Side	2510	0.111	1.30	23	22.92	0.113	/
LTE Band 12	10M	QPSK	1	0	Front side	707.5	0.194	-1.58	24.5	24.28	0.204	/
			25	0	Front side	707.5	0.155	0.84	23.5	23.29	0.163	/
			1	0	Back Side	707.5	0.307	0.89	24.5	24.28	0.323	20
			25	0	Back Side	707.5	0.249	-1.21	23.5	23.29	0.261	/
			1	0	Left Side	707.5	0.148	2.03	24.5	24.28	0.156	/
			25	0	Left Side	707.5	0.120	-0.54	23.5	23.29	0.126	/
			1	0	Right Side	707.5	0.127	2.43	24.5	24.28	0.134	/
			25	0	Right Side	707.5	0.111	0.11	23.5	23.29	0.116	/
			1	0	Top Side	707.5	0.080	3.05	24.5	24.28	0.084	/
			25	0	Top Side	707.5	0.073	3.86	23.5	23.29	0.077	/
			1	0	Bottom Side	707.5	0.228	-0.53	24.5	24.28	0.240	/
			25	0	Bottom Side	707.5	0.176	1.03	23.5	23.29	0.185	/
LTE Band 13	10M	QPSK	1	0	Front side	782	0.210	-1.80	24.5	24.11	0.230	/
			25	0	Front side	782	0.185	-2.65	24	23.52	0.207	/
			1	0	Back Side	782	0.354	0.33	24.5	24.11	0.387	22
			25	0	Back Side	782	0.277	-1.29	24	23.52	0.309	/
			1	0	Left Side	782	0.162	-2.65	24.5	24.11	0.177	/
			25	0	Left Side	782	0.141	-0.63	24	23.52	0.157	/
			1	0	Right Side	782	0.117	3.18	24.5	24.11	0.128	/
			25	0	Right Side	782	0.086	-3.83	24	23.52	0.096	/
			1	0	Top Side	782	0.045	3.57	24.5	24.11	0.049	/
			25	0	Top Side	782	0.024	3.79	24	23.52	0.027	/
			1	0	Bottom Side	782	0.197	-2.83	24.5	24.11	0.216	/
			25	0	Bottom Side	782	0.139	1.83	24	23.52	0.155	/
LTE Band 17	10M	QPSK	1	0	Front side	711	0.227	3.22	24.5	24.29	0.238	/
			25	0	Front side	709	0.193	2.71	23.5	23.23	0.205	/
			1	0	Back Side	711	0.341	3.92	24.5	24.29	0.358	24
			25	0	Back Side	709	0.242	-1.62	23.5	23.23	0.258	/
			1	0	Left Side	711	0.166	-2.09	24.5	24.29	0.174	/
			25	0	Left Side	709	0.150	-1.17	23.5	23.23	0.160	/
			1	0	Right Side	711	0.142	3.18	24.5	24.29	0.149	/
			25	0	Right Side	709	0.105	3.12	23.5	23.23	0.112	/
			1	0	Top Side	711	0.069	-3.93	24.5	24.29	0.072	/
			25	0	Top Side	709	0.039	2.16	23.5	23.23	0.042	/
			1	0	Bottom Side	711	0.218	-2.60	24.5	24.29	0.229	/
			25	0	Bottom Side	709	0.190	-1.29	23.5	23.23	0.202	/



Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
2.4GHz WLAN	802.11g	Front Side	2437	0.052	-2.31	17.50	17.29	0.055	/
		Back Side	2437	0.082	2.26	17.50	17.29	0.086	26
		Left Side	2437	0.045	-1.47	17.50	17.29	0.047	/
		Right Side	2437	0.052	3.27	17.50	17.29	0.055	/
		Top Side	2437	0.059	-2.99	17.50	17.29	0.062	/
		Bottom Side	2437	0.030	2.20	17.50	17.29	0.031	/
BT	8DPSK(3Mbps)	Front Side	2402	0.040	1.57	6.50	6.05	0.044	/
		Back Side	2402	0.043	2.80	6.50	6.05	0.048	28
		Left Side	2402	0.035	-0.85	6.50	6.05	0.039	/
		Right Side	2402	0.032	-1.53	6.50	6.05	0.035	/
		Top Side	2402	0.039	-1.57	6.50	6.05	0.043	/
		Bottom Side	2402	0.019	1.15	6.50	6.05	0.021	/

Note:

1. The test separation of all above table is 5mm.
2. Per KDB 447498 D04, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. Scaled SAR(W/kg) = Measured SAR(W/kg) *Tune-up Scaling Factor
3. When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.



Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

Position	Simultaneous State
Head	1. GSM + 2.4GHz WLAN/5G WLAN
	2. GSM + Bluetooth
	3. WCDMA + 2.4GHz WLAN/5G WLAN
	4. WCDMA + Bluetooth
	5. LTE + 2.4GHz WLAN/5G WLAN
	6. LTE + Bluetooth
Body	1. GSM + 2.4GHz WLAN/5G WLAN
	2. GSM + Bluetooth
	3. WCDMA + 2.4GHz WLAN/5G WLAN
	4. WCDMA + Bluetooth
	5. LTE + 2.4GHz WLAN/5G WLAN
	6. LTE + Bluetooth

NOTE:

1. Bluetooth and WLAN can't simultaneous transmission at the same time.
2. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
3. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
4. KDB 447498 Appendix E, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$SAR_{est} = 1.6 \cdot P_{ant} / P_{th} [W/kg]$.

P_{ant} is maximum time-averaged power or effective radiated power (ERP), whichever is greater, and P_{th} is defined in Formula KDB 447498 (B.2). When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



Simultaneous Mode	Position	Mode	Max. 1-g SAR	1-g Sum SAR
			(W/kg)	(W/kg)
GSM + 2.4G WLAN	Head	GSM	0.197	0.350
		2.4G WLAN	0.153	
	Body	GSM	0.270	0.356
		2.4G WLAN	0.086	
GSM + Bluetooth	Head	GSM	0.197	0.234
		Bluetooth	0.037	
	Body	GSM	0.270	0.318
		Bluetooth	0.048	
WCDMA + 2.4G WLAN	Head	WCDMA	0.577	0.730
		2.4G WLAN	0.153	
	Body	WCDMA	0.493	0.579
		2.4G WLAN	0.086	
WCDMA + Bluetooth	Head	WCDMA	0.577	0.614
		Bluetooth	0.037	
	Body	WCDMA	0.493	0.541
		Bluetooth	0.048	
LTE + 2.4G WLAN	Head	LTE	0.370	0.523
		2.4G WLAN	0.153	
	Body	LTE	0.663	0.749
		2.4G WLAN	0.086	
LTE + Bluetooth	Head	LTE	0.370	0.407
		Bluetooth	0.037	
	Body	LTE	0.663	0.711
		Bluetooth	0.048	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



12. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	DIP0G750	SN 06/22 DIP0G750-638	2022.02.11	2023.02.10
835MHz Dipole	MVG	DIP0G835	SN 06/22 DIP0G835-639	2022.02.11	2023.02.10
1800MHz Dipole	MVG	DIP1G800	SN 06/22 DIP1G800-640	2022.02.11	2023.02.10
1900MHz Dipole	MVG	DIP1G900	SN 06/22 DIP1G900-641	2022.02.11	2023.02.10
2450MHz Dipole	MVG	GIP2G450	SN 06/22 DIP2G450-645	2022.02.11	2023.02.10
2600MHz Dipole	MVG	DIP2G600	SN 06/22 DIP2G600-646	2022.02.11	2023.02.10
E-Field Probe	MVG	EPGO364	SN 04/22 EPGO364	2022.02.11	2023.02.10
Dielectric Probe Kit	MVG	OCPG 87	SN 06/22 OCPG87	2022.02.11	2023.02.10
Antenna	MVG	ANTA 73	SN 06/22 ANTA 73	N/A	N/A
Ellipsoid Phantom	MVG	ELLI 51	SN 06/22 ELLI 51	N/A	N/A
Phantom	MVG	SAM 148	SN 06/22 SAM148	N/A	N/A
Phone holder	MVG	MSH 117	SN 06/22 MSH 117	N/A	N/A
Laptop holder	MVG	LSH 36	SN 06/22 LSH 38	N/A	N/A
Directional coupler	SHW	SHWDCP	202203280013	N/A	N/A
Network Analyzer	Agilent	E5071C	MY46418070	2022.03.28	2023.03.27
Multi Meter	Keithley	DMM6500	DMM6500	2022.05.05	2023.05.04
Signal Generator	Keithley	N5182B	MY59100717	2022.04.29	2023.04.28
Wireless Communication Test Set	R&S	CMW500	137737	2022.04.29	2023.04.28
Power Sensor	R&S	Z11	116184	2022.03.28	2023.03.27
Temperature hygrometer	N/A	ST-W2318	N/A	2022.05.05	2023.05.04
Thermograph	N/A	TP101	N/A	2022.05.05	2023.05.04



Appendix A. System Validation Plots

System Performance Check Data (750MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-12-23

Experimental conditions.


Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW
Frequency (MHz)	750.000
Relative permittivity	42.83
Conductivity (S/m)	0.92
Probe	SN 04/22 EPGO364
ConvF	1.69
Crest factor:	1:1

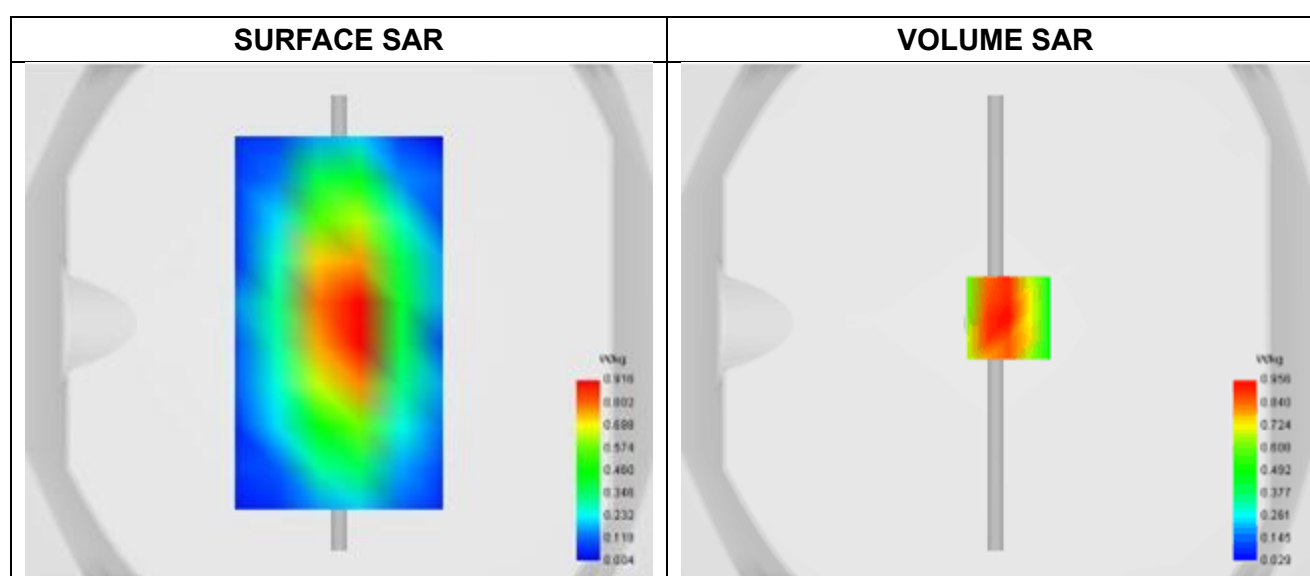

Maximum location: X=5.00, Y=9.00 ; SAR Peak: 1.52 W/kg

SAR 10g (W/Kg)	0.528927
SAR 1g (W/Kg)	0.829360

Z Axis Scan

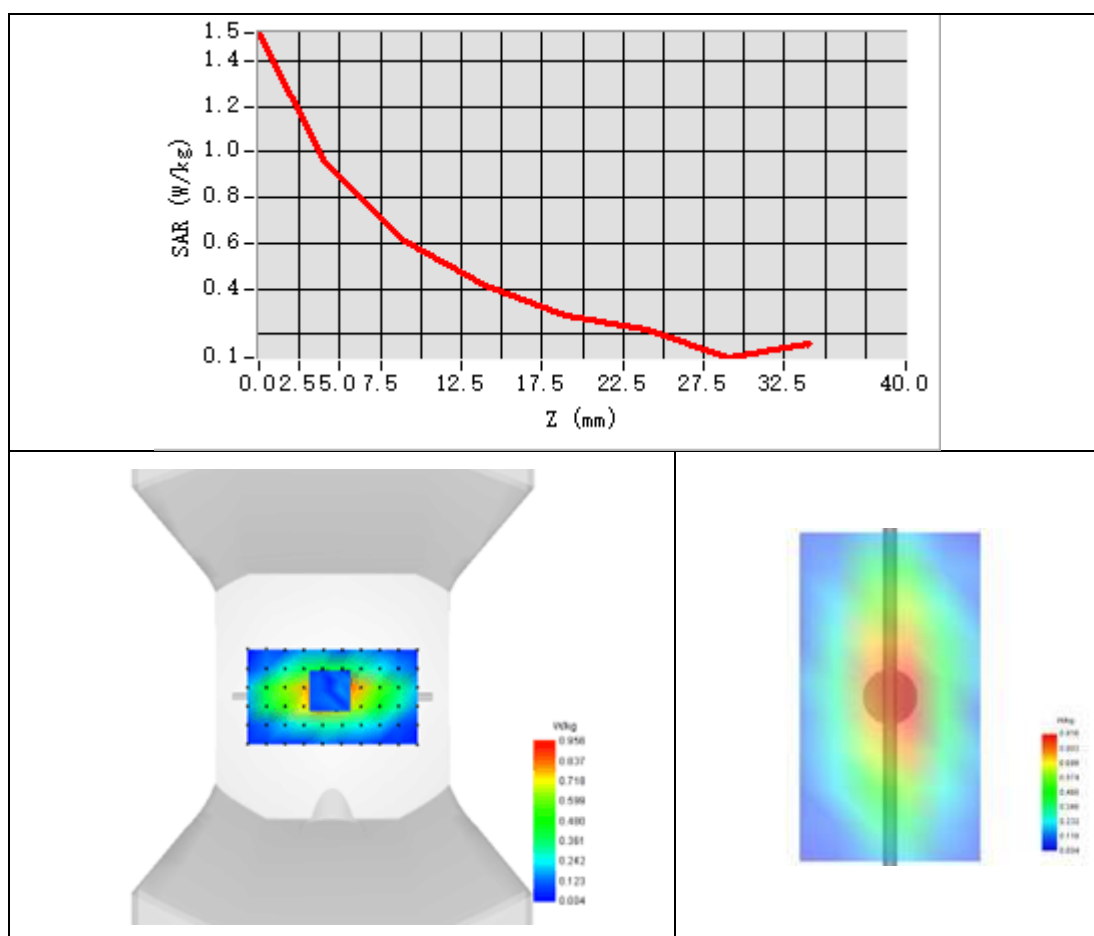



System Performance Check Data (835MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-12-27

Experimental conditions.


Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW
Frequency (MHz)	835.000
Relative permittivity	41.06
Conductivity (S/m)	0.91
Probe	SN 04/22 EPGO364
ConvF	1.72
Crest factor:	1:1

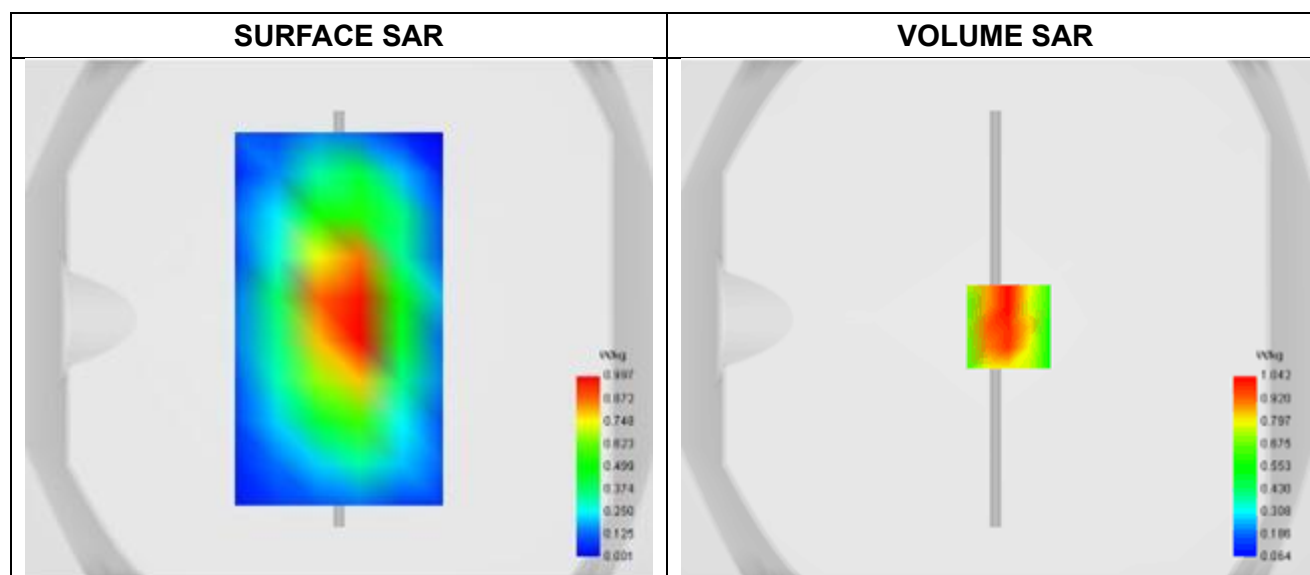

Maximum location: X=5.00, Y=5.00 ; SAR Peak: 1.45 W/kg

SAR 10g (W/Kg)	0.600469
SAR 1g (W/Kg)	0.982620

Z Axis Scan

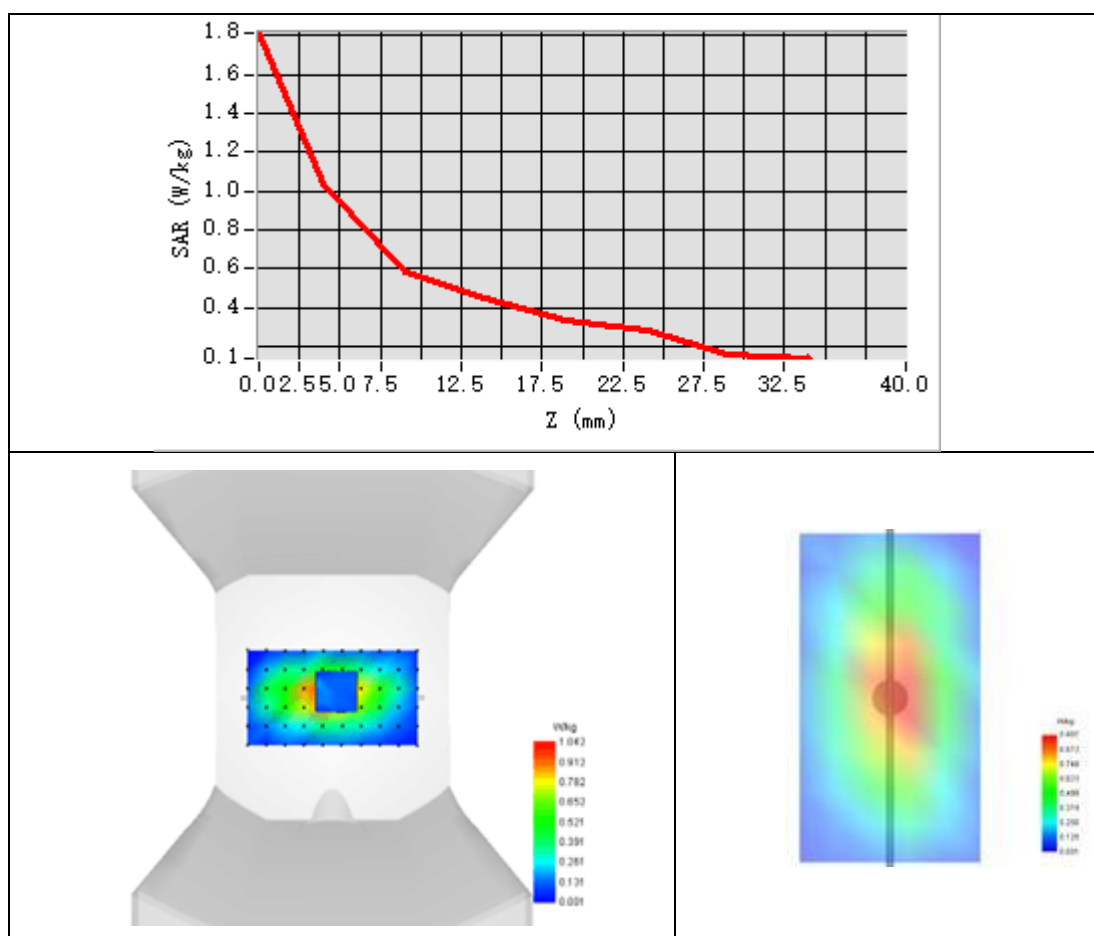



System Performance Check Data (1800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2023-02-03

Experimental conditions.


Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW
Frequency (MHz)	1800.000
Relative permittivity	40.17
Conductivity (S/m)	1.40
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

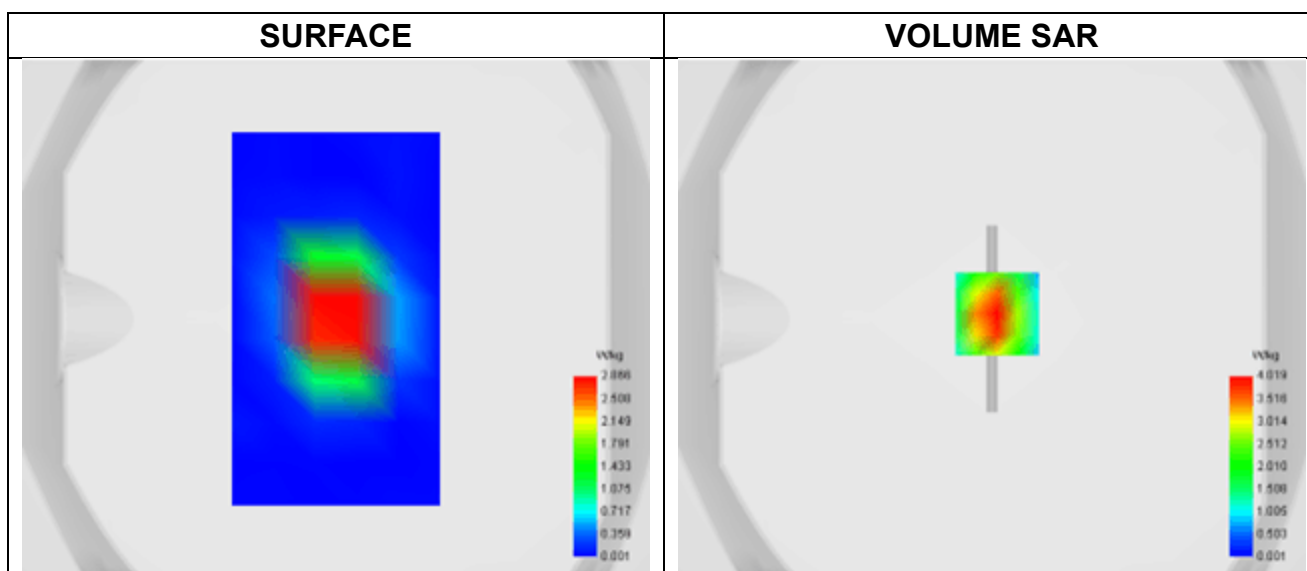

Maximum location: X=3.00, Y=3.00 ; SAR Peak: 6.84 W/kg

SAR 10g (W/Kg)	2.021354
SAR 1g (W/Kg)	3.879367

Z Axis Scan

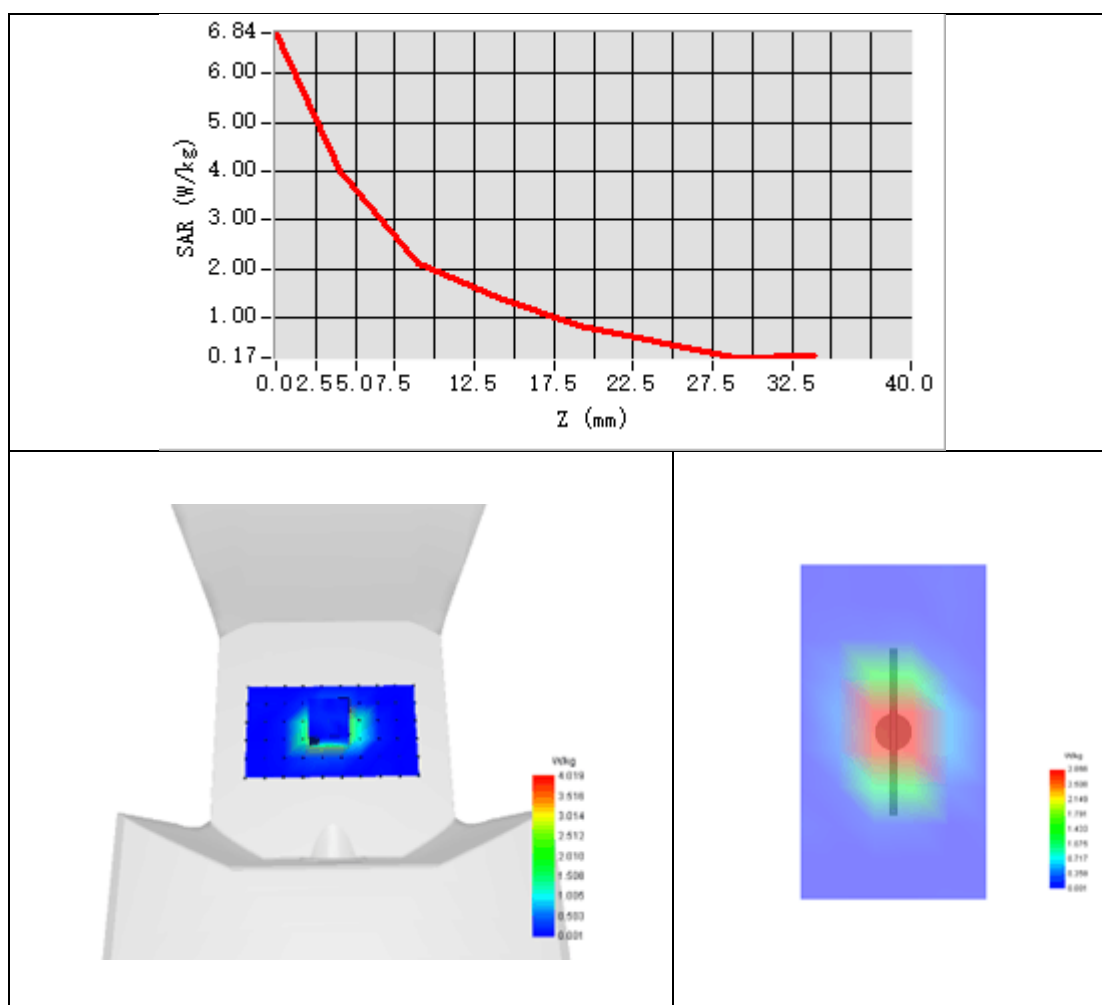



System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2023-02-03

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW
Frequency (MHz)	1900.000
Relative permittivity	40.95
Conductivity (S/m)	1.38
Probe	SN 04/22 EPGO364
ConvF	2.25
Crest factor:	1:1

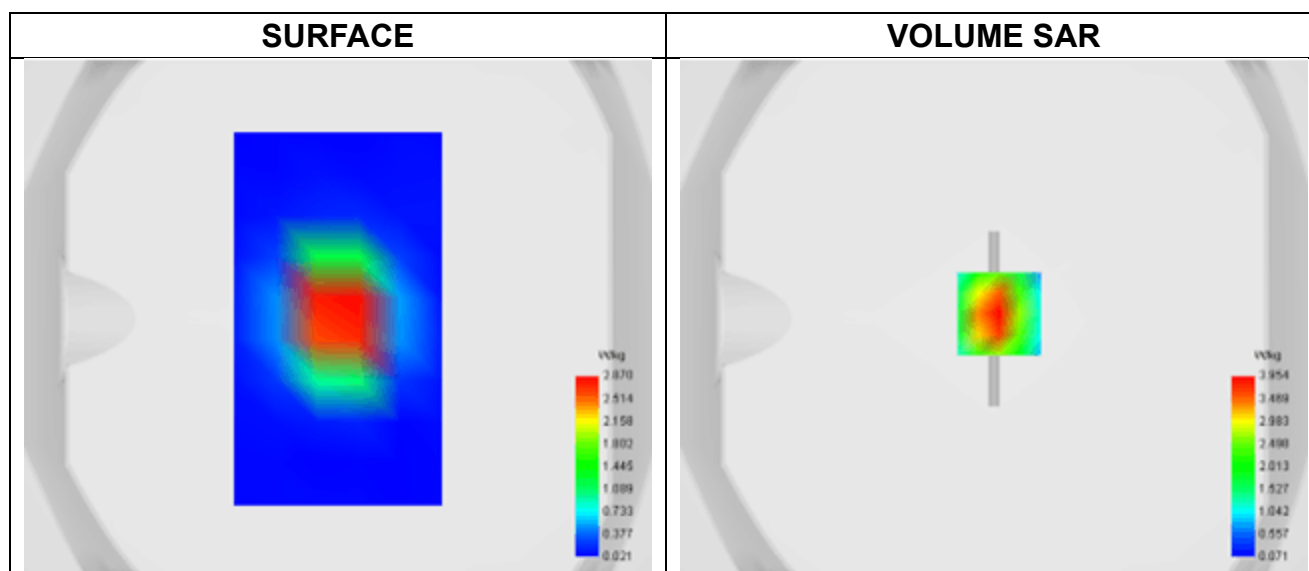


Maximum location: X=5.00, Y=1.00 ; SAR Peak: 6.89 W/kg

SAR 10g (W/Kg)	2.063135
SAR 1g (W/Kg)	4.090770



Z Axis Scan

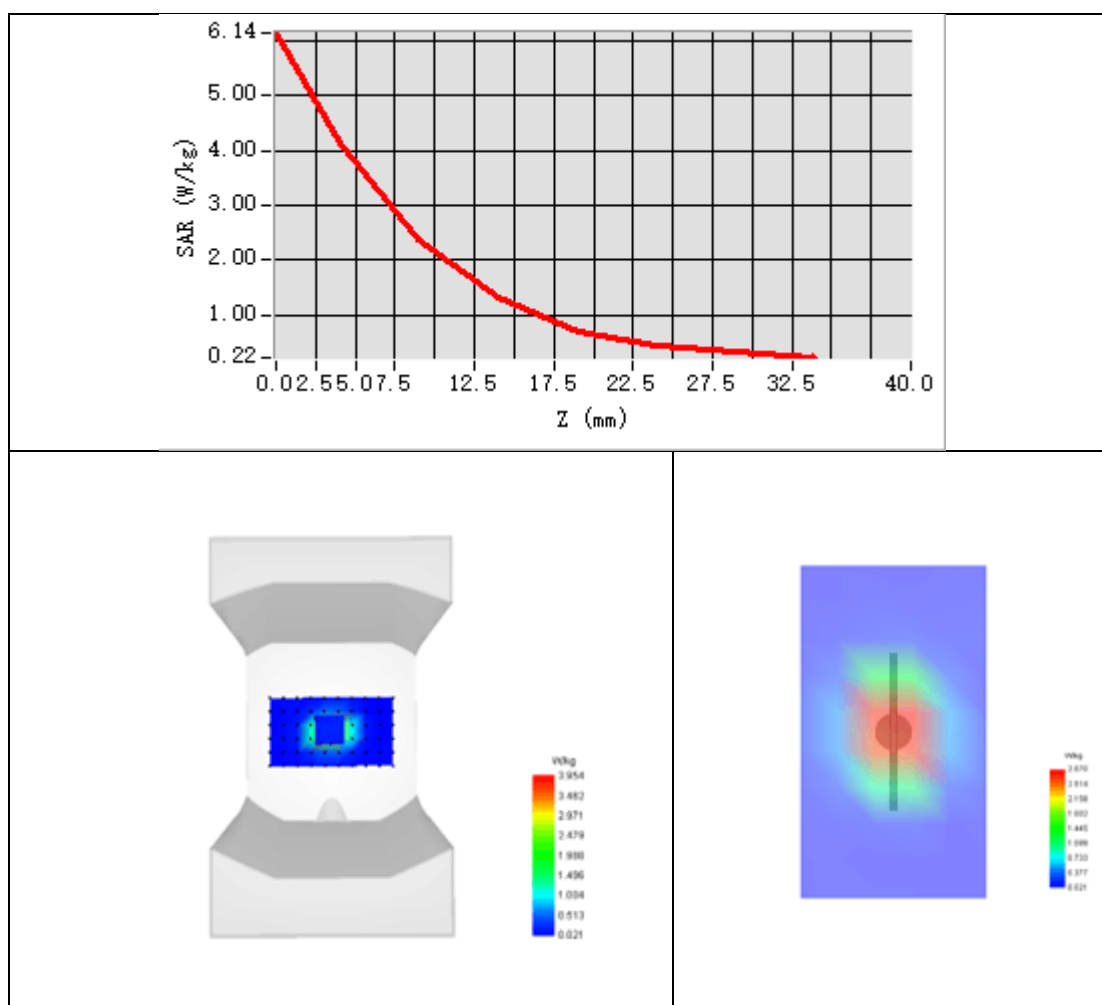



System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2023-02-04

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW
Frequency (MHz)	2450.000
Relative permittivity	40.24
Conductivity (S/m)	1.74
Probe	SN 04/22 EPGO364
ConvF	2.33
Crest factor:	1:1

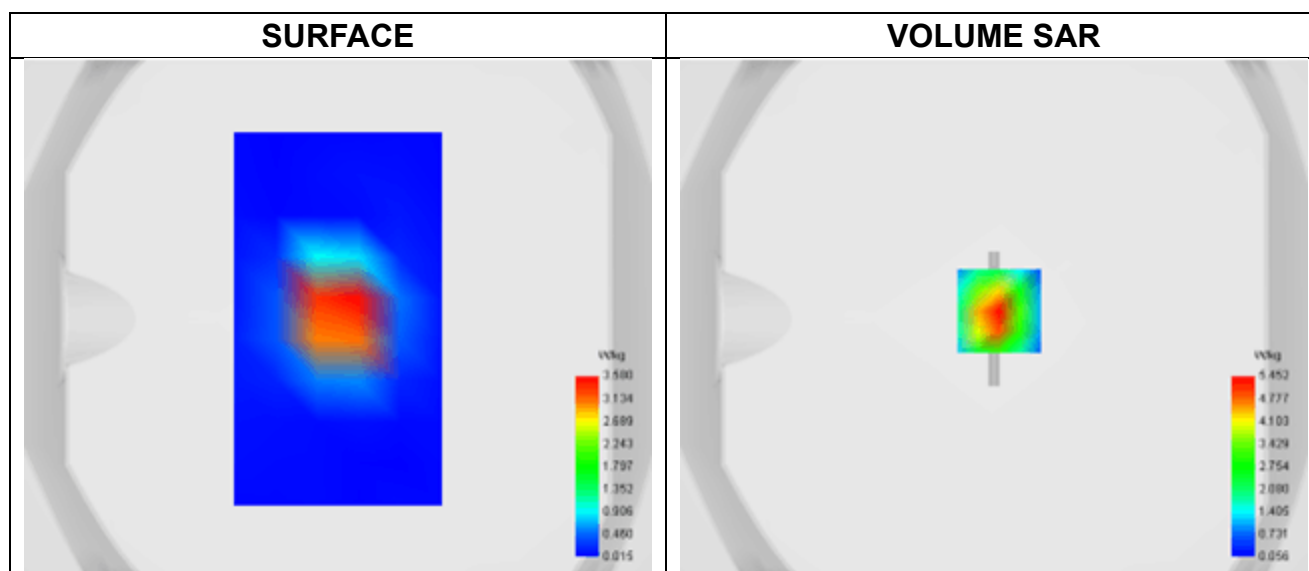


Maximum location: X=5.00, Y=3.00 ; SAR Peak: 8.39 W/kg

SAR 10g (W/Kg)	2.381046
SAR 1g (W/Kg)	5.446930



Z Axis Scan

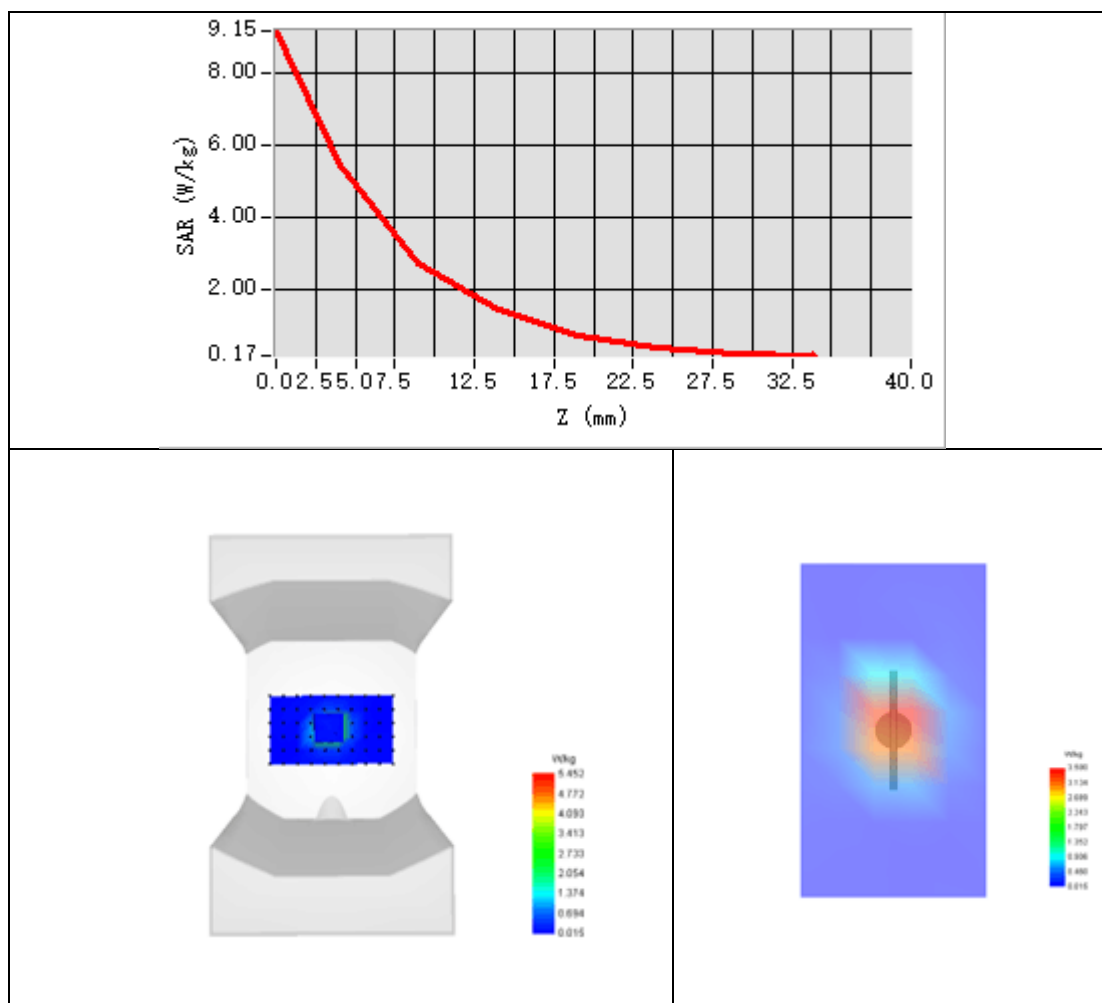



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2023-02-04

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.79
Conductivity (S/m)	1.90
Probe	SN 04/22 EPGO364
ConvF	2.36
Crest factor:	1:1

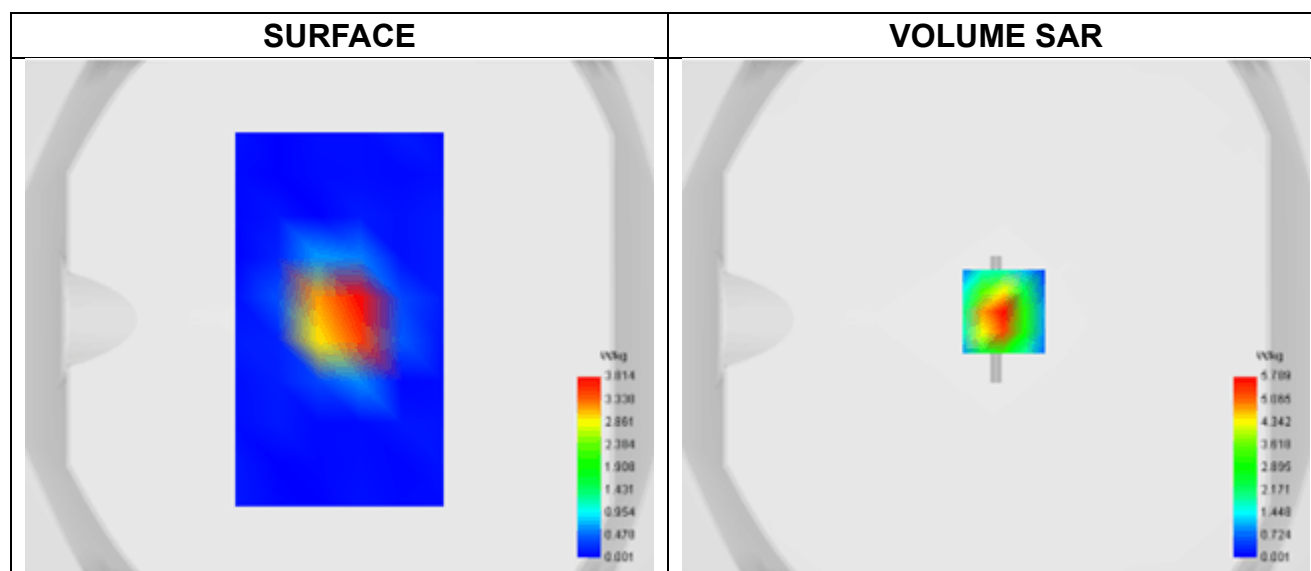


Maximum location: X=3.00, Y=3.00 ; SAR Peak: 9.58 W/kg

SAR 10g (W/Kg)	2.433681
SAR 1g (W/Kg)	5.662544



Z Axis Scan

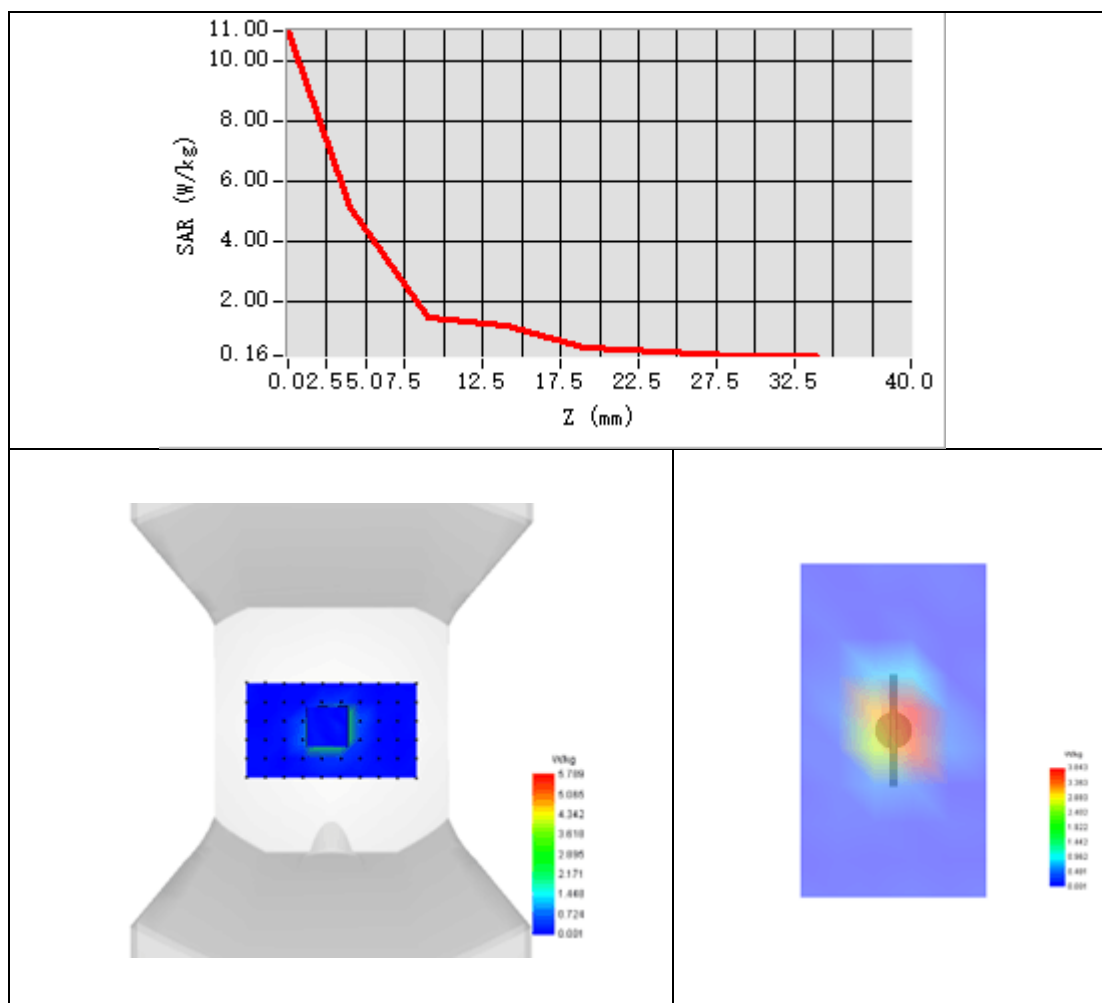




Appendix B. SAR Test Plots

Plot 1:

Test Date	2022-12-27
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GSM850
Signal	TDMA (GSM)
Frequency	848.8
SAR 10g (W/Kg)	0.136
SAR 1g (W/Kg)	0.187

Maximum location: X=-55.00, Y=-28.00 ; SAR Peak: 0.29 W/kg

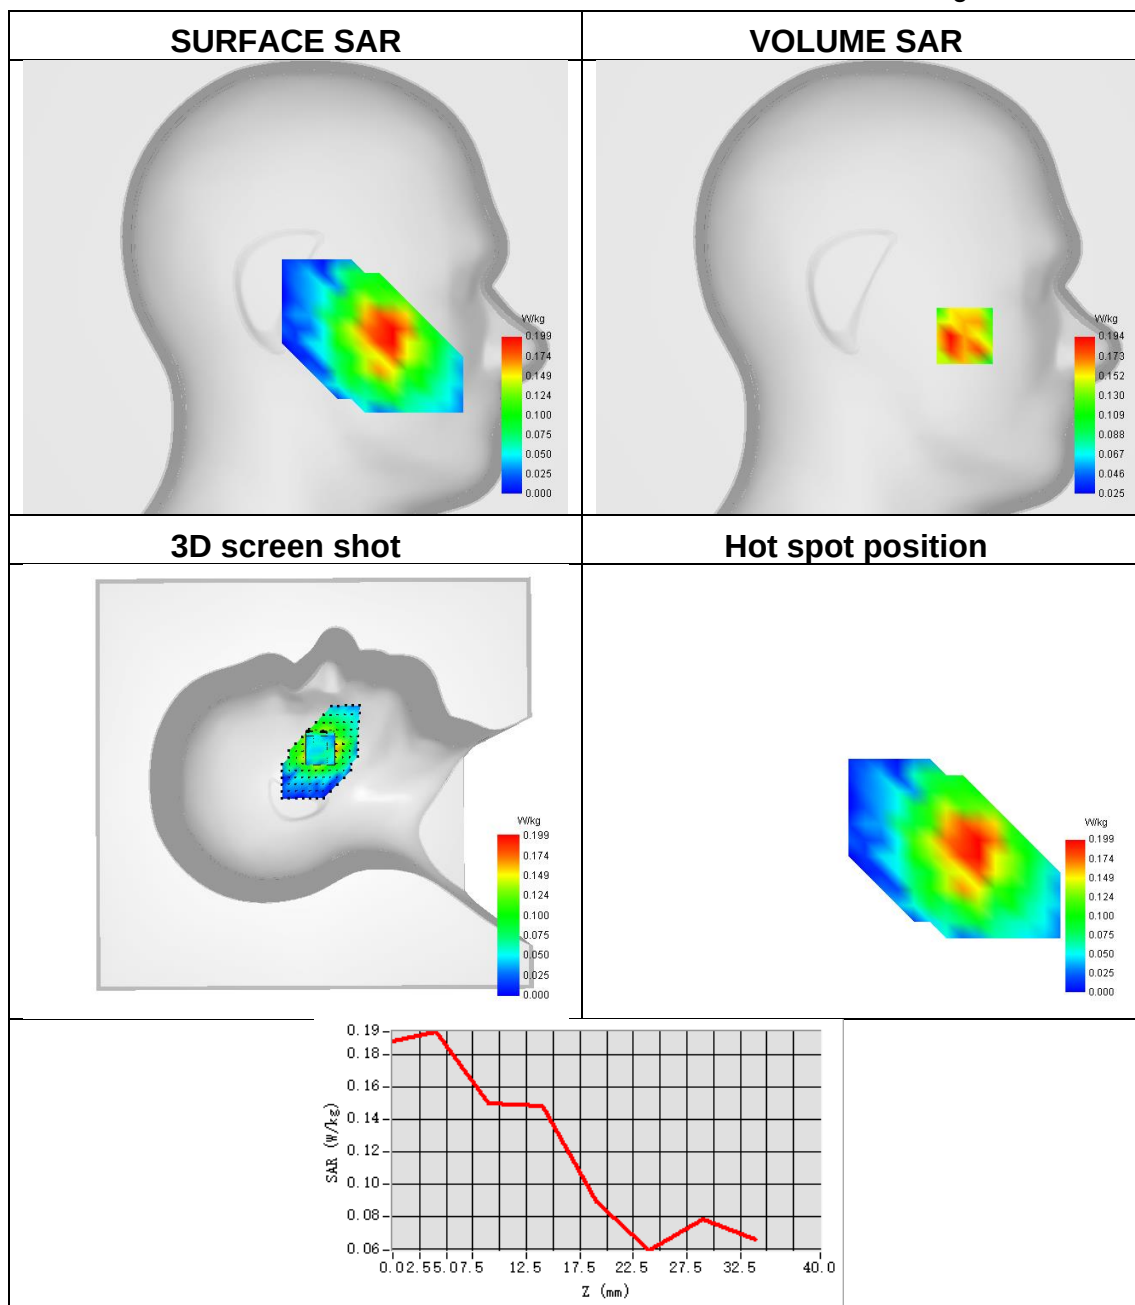




Plot 2:

Test Date	2022-12-27
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	848.8
SAR 10g (W/Kg)	0.167
SAR 1g (W/Kg)	0.249


Maximum location: X=-13.00, Y=61.00 ; SAR Peak: 0.37 W/kg

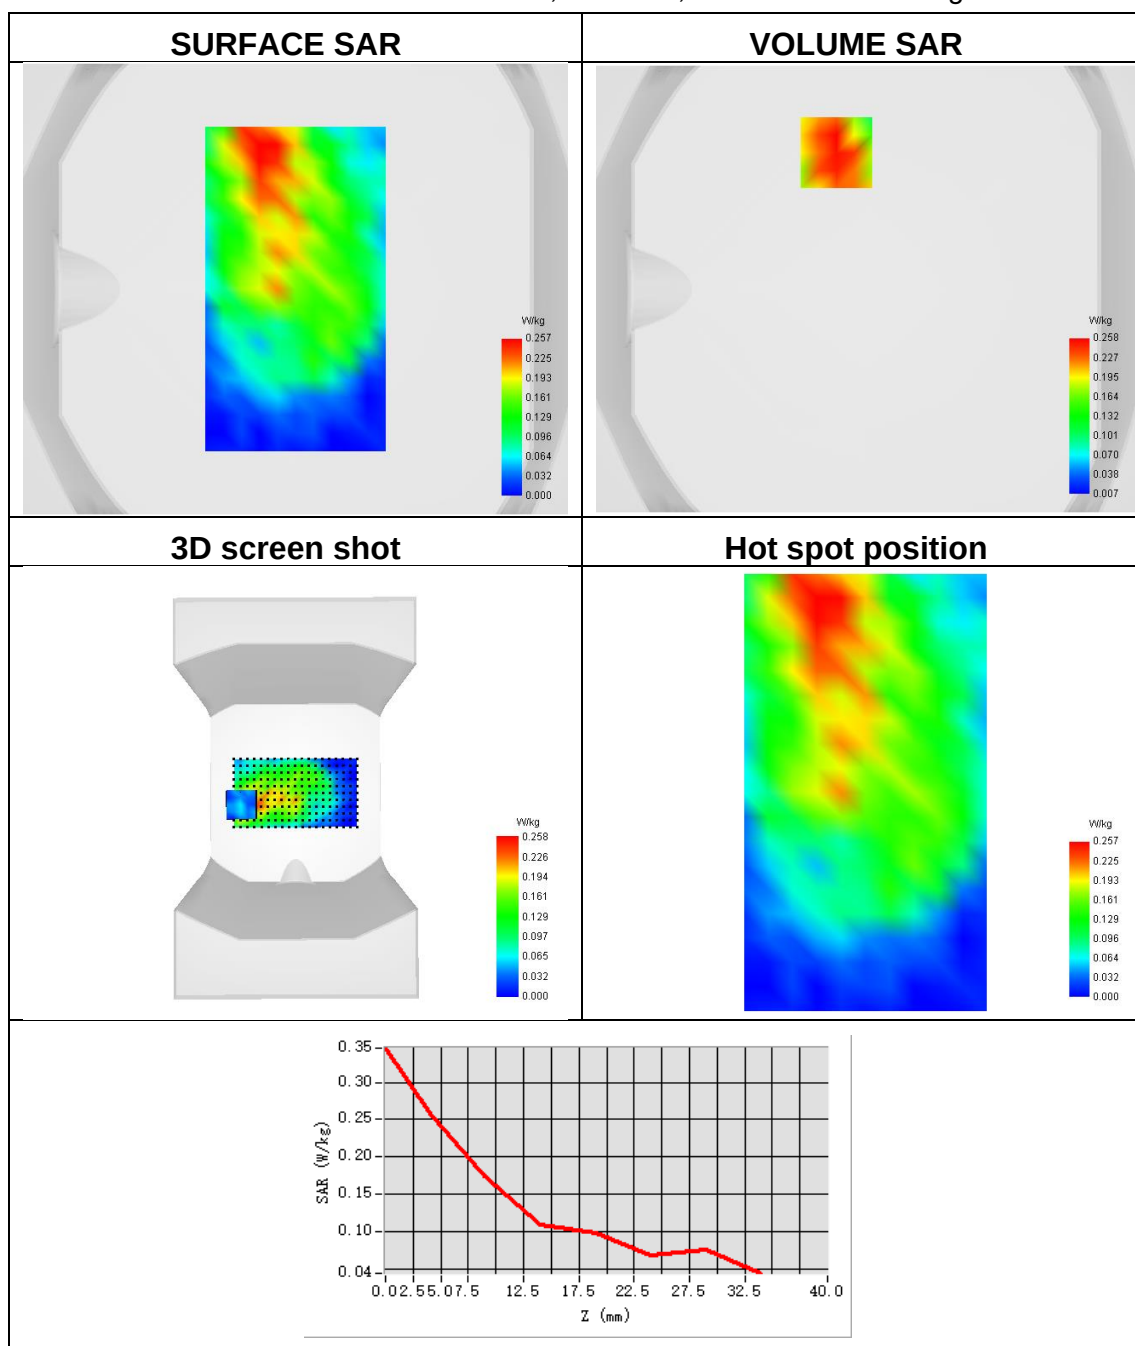

Plot 3:

Test Date	2023-02-03
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Signal	TDMA (GSM)
Frequency	1850.2
SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.180

Maximum location: X=-48.00, Y=-47.00 ; SAR Peak: 0.30 W/kg

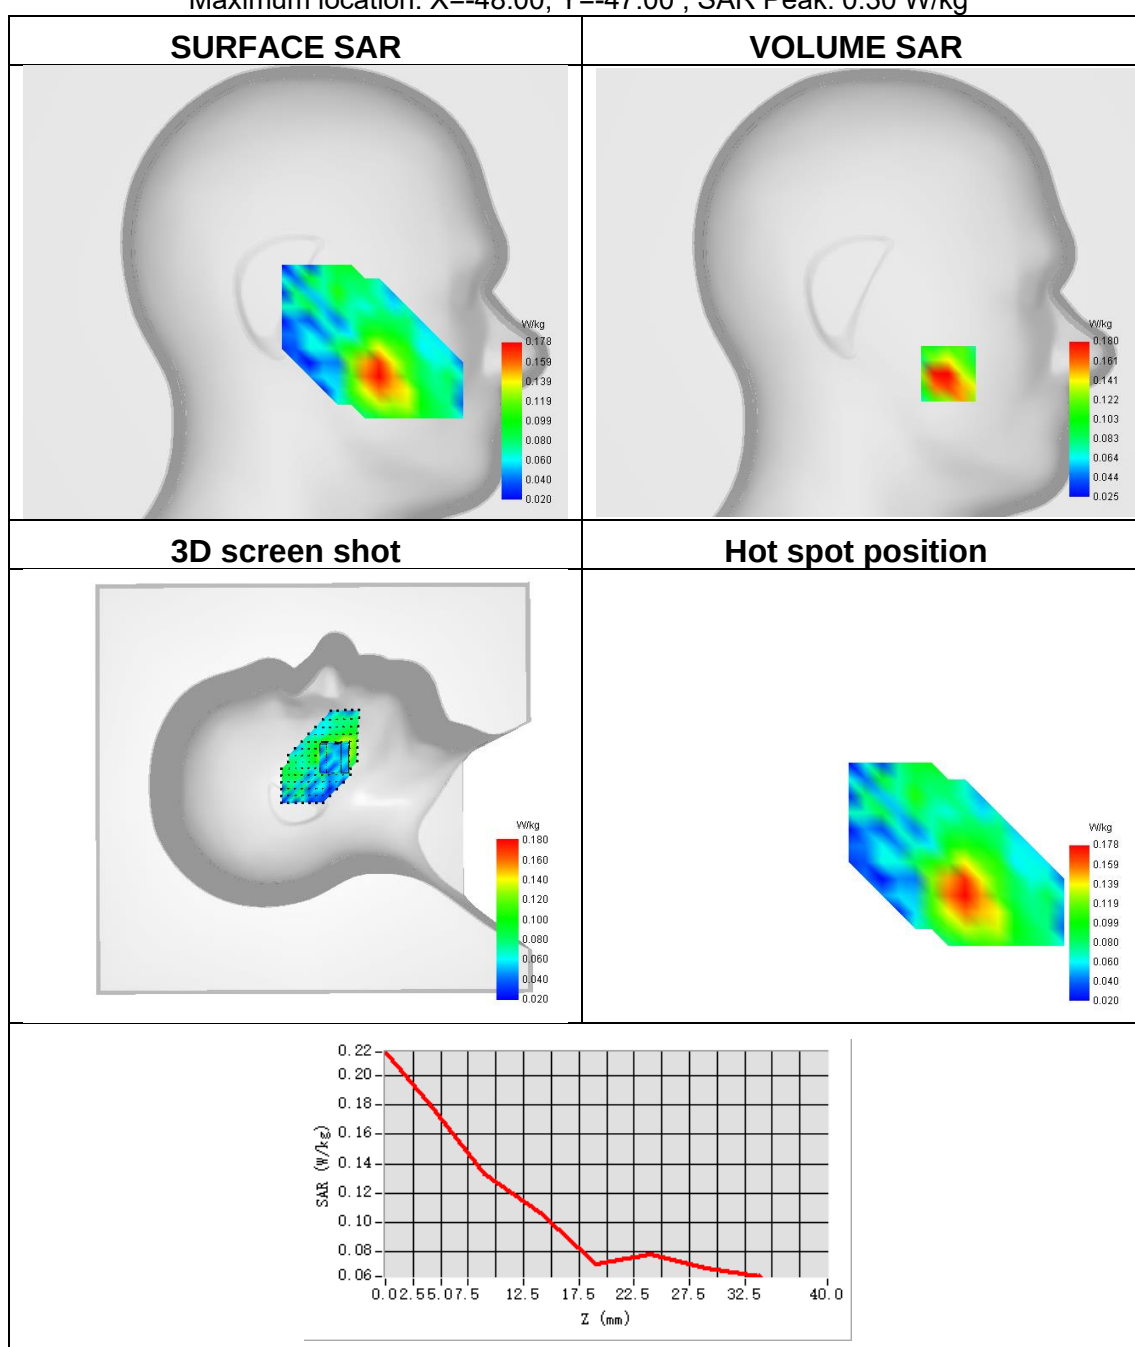




Plot 4:

Test Date	2023-02-03
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1850.2
SAR 10g (W/Kg)	0.126
SAR 1g (W/Kg)	0.240


Maximum location: X=23.00, Y=-22.00 ; SAR Peak: 0.41 W/kg

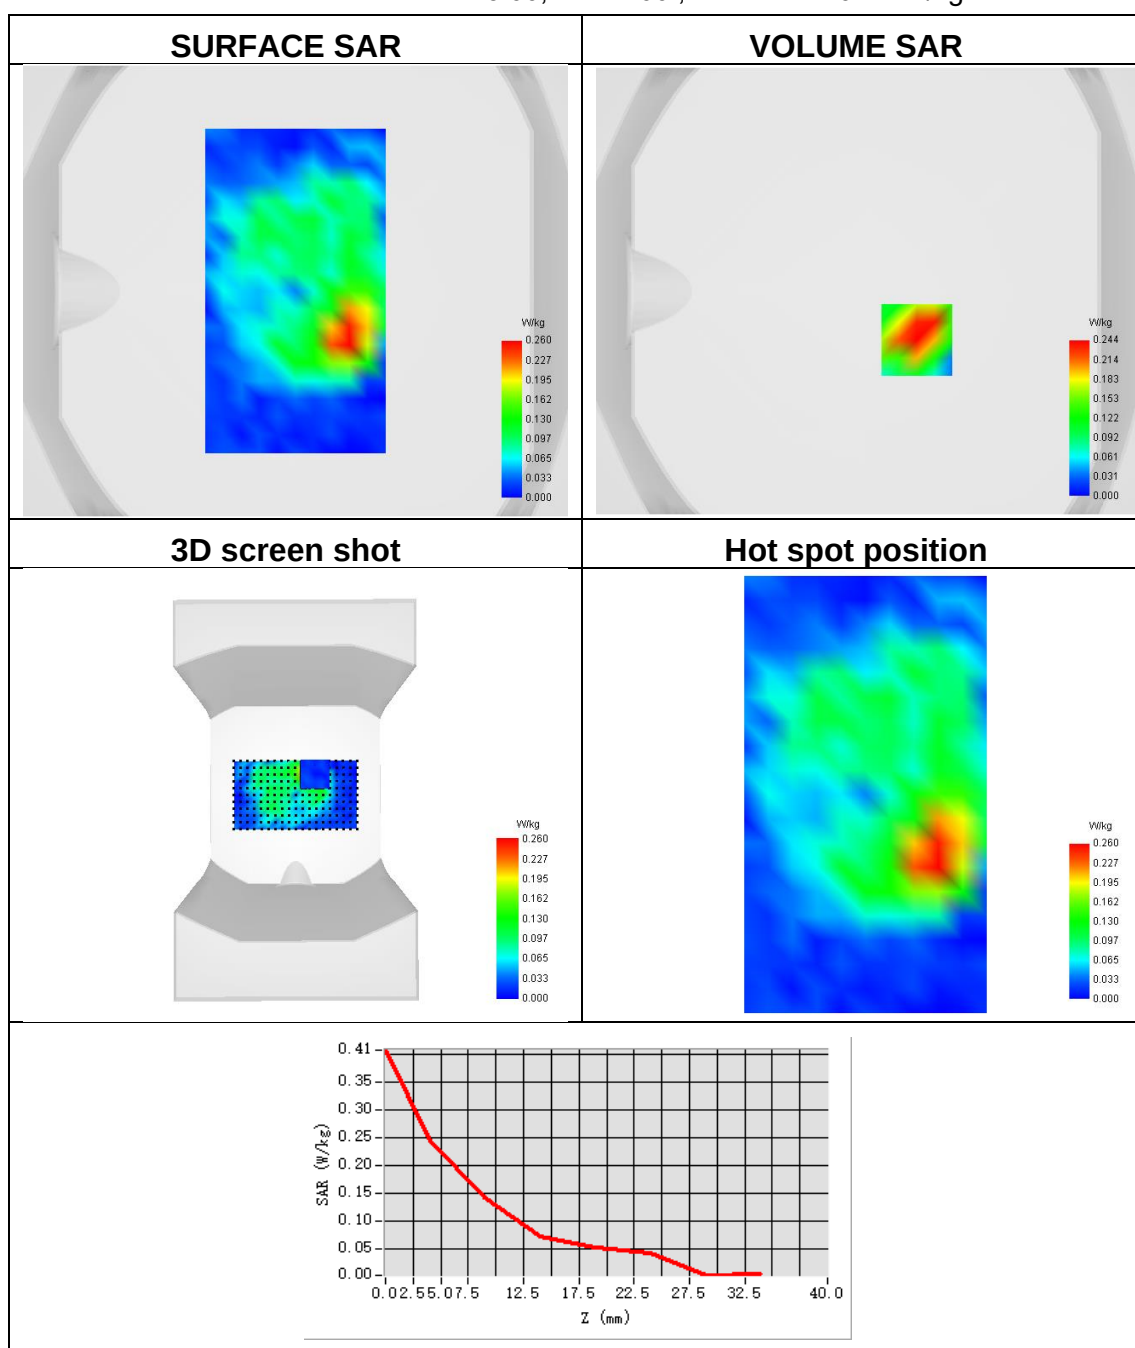

Plot 5:

Test Date	2023-02-03
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1880
SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.551

Maximum location: X=-56.00, Y=-49.00 ; SAR Peak: 0.87 W/kg

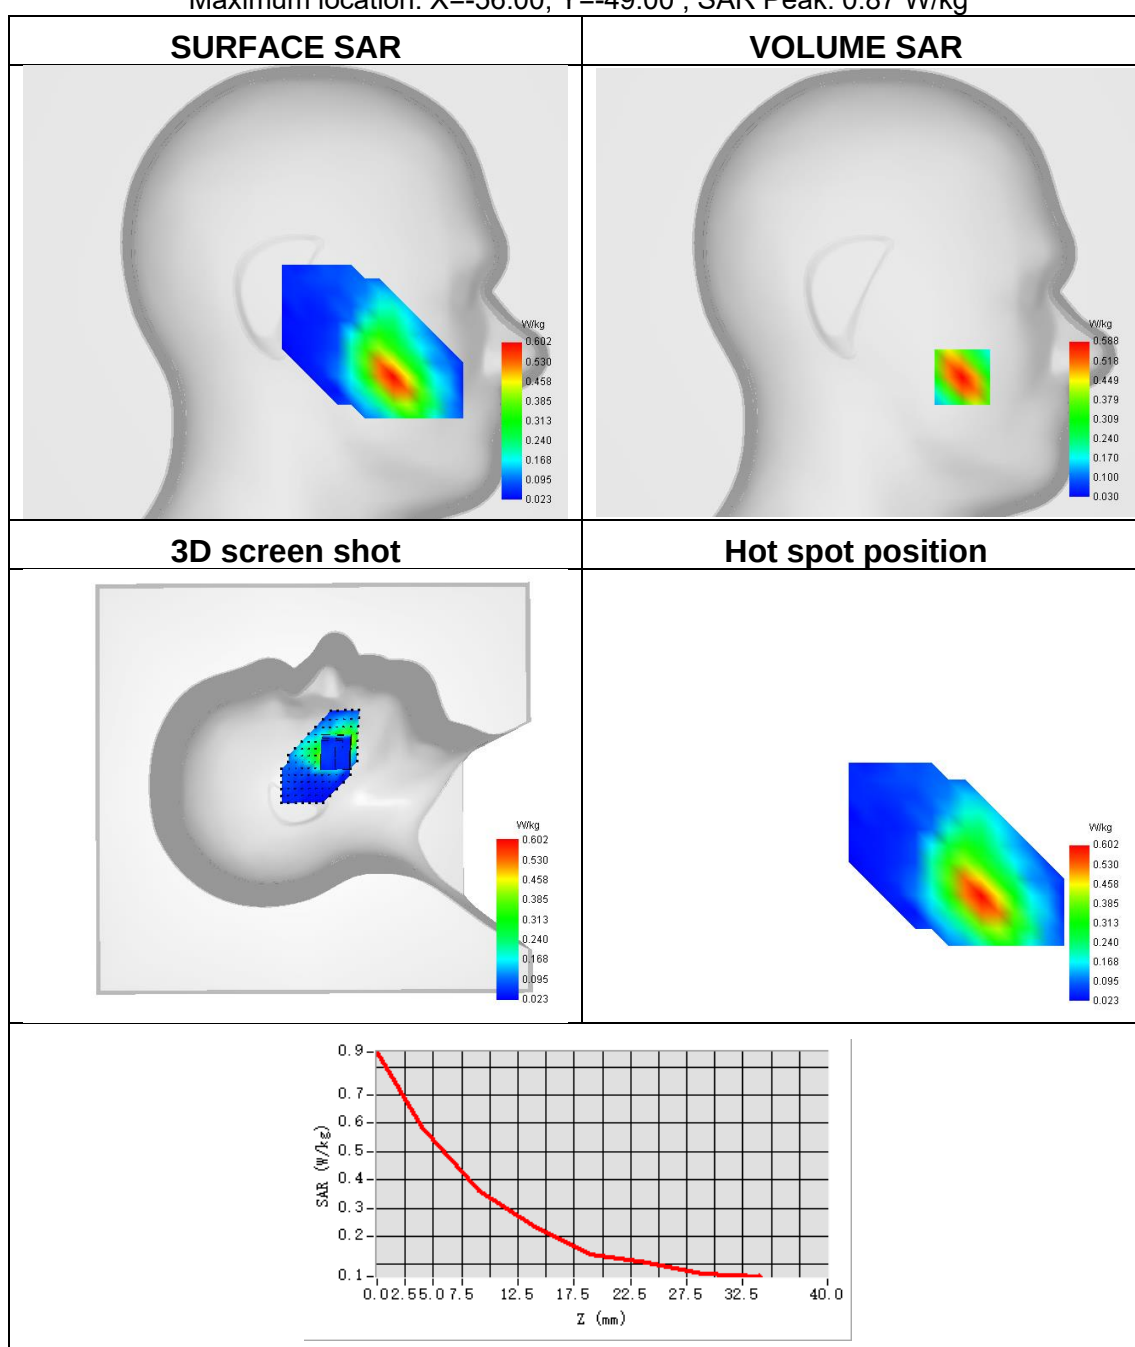




Plot 6:

Test Date	2023-02-03
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1880
SAR 10g (W/Kg)	0.260
SAR 1g (W/Kg)	0.444

Maximum location: X=-7.00, Y=6.00 ; SAR Peak: 0.69 W/kg

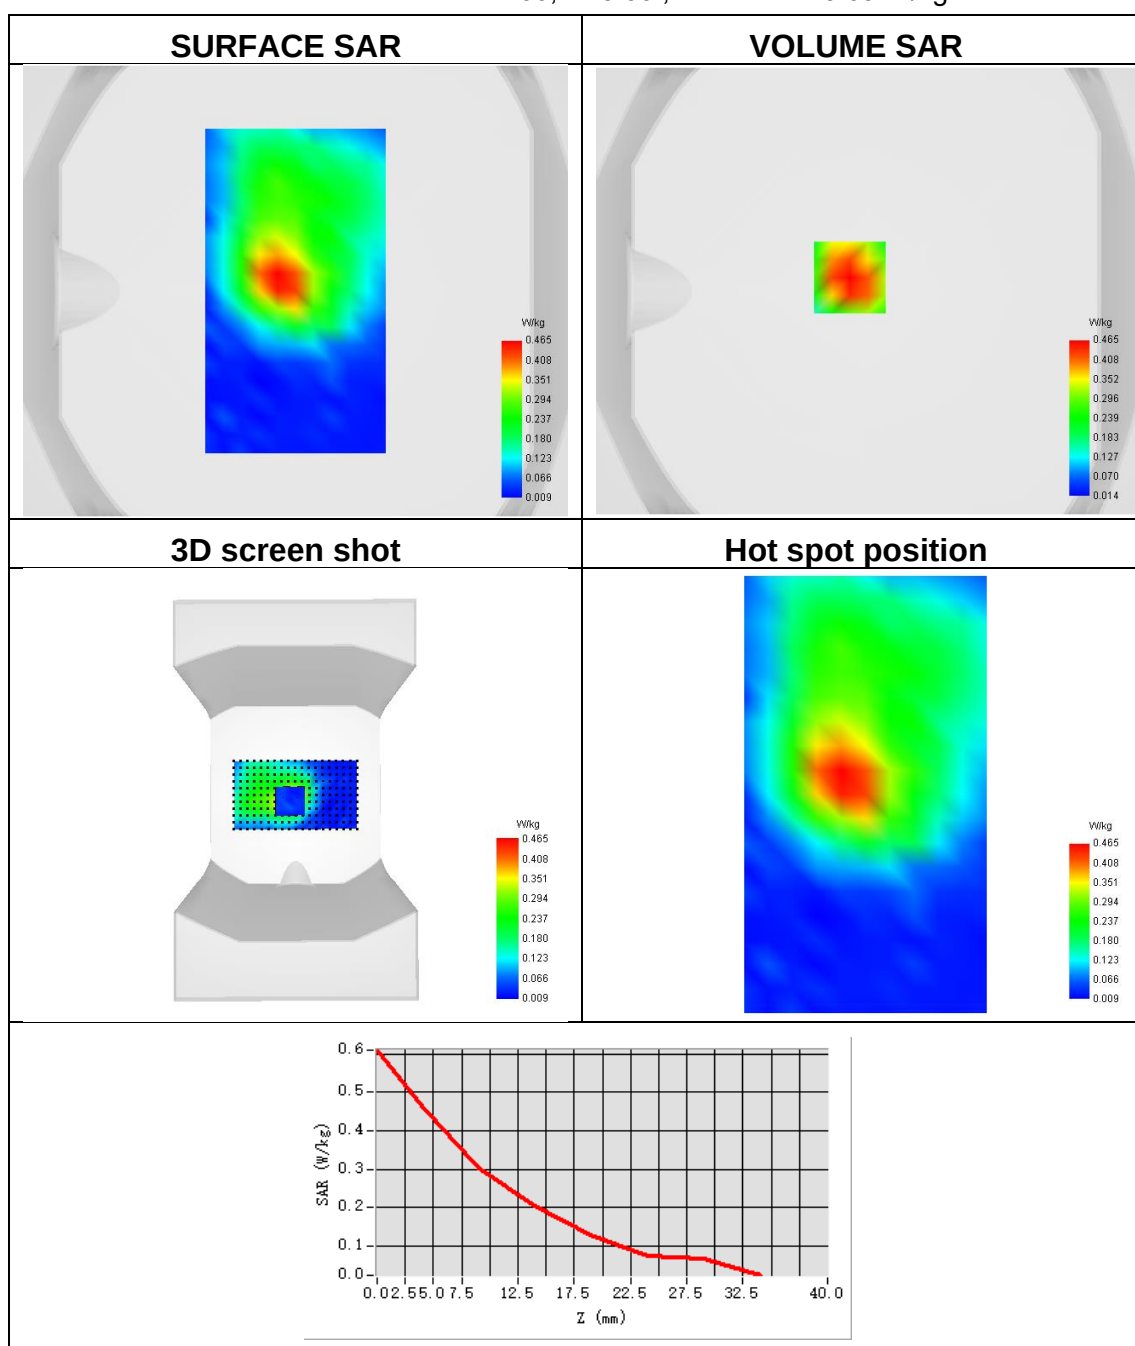




Plot 7:

Test Date	2023-02-03
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1752.4
SAR 10g (W/Kg)	0.301
SAR 1g (W/Kg)	0.508

Maximum location: X=-49.00, Y=-47.00 ; SAR Peak: 0.77 W/kg

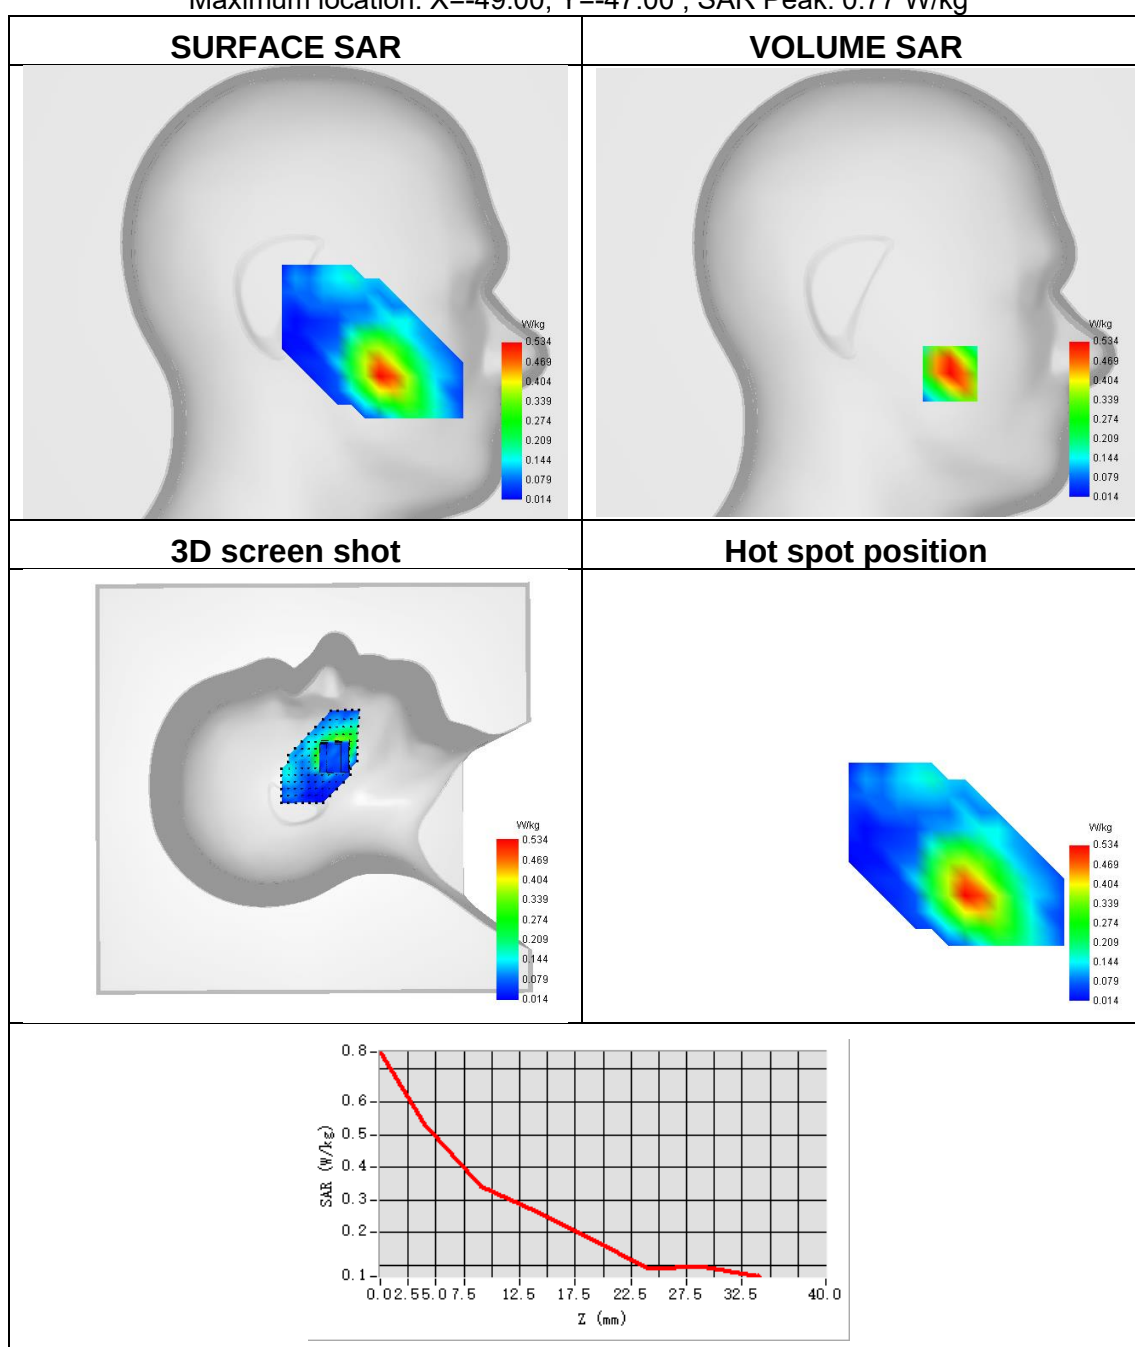




Plot 8:

Test Date	2023-02-03
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1752.4
SAR 10g (W/Kg)	0.240
SAR 1g (W/Kg)	0.441


Maximum location: X=-7.00, Y=0.00 ; SAR Peak: 0.73 W/kg

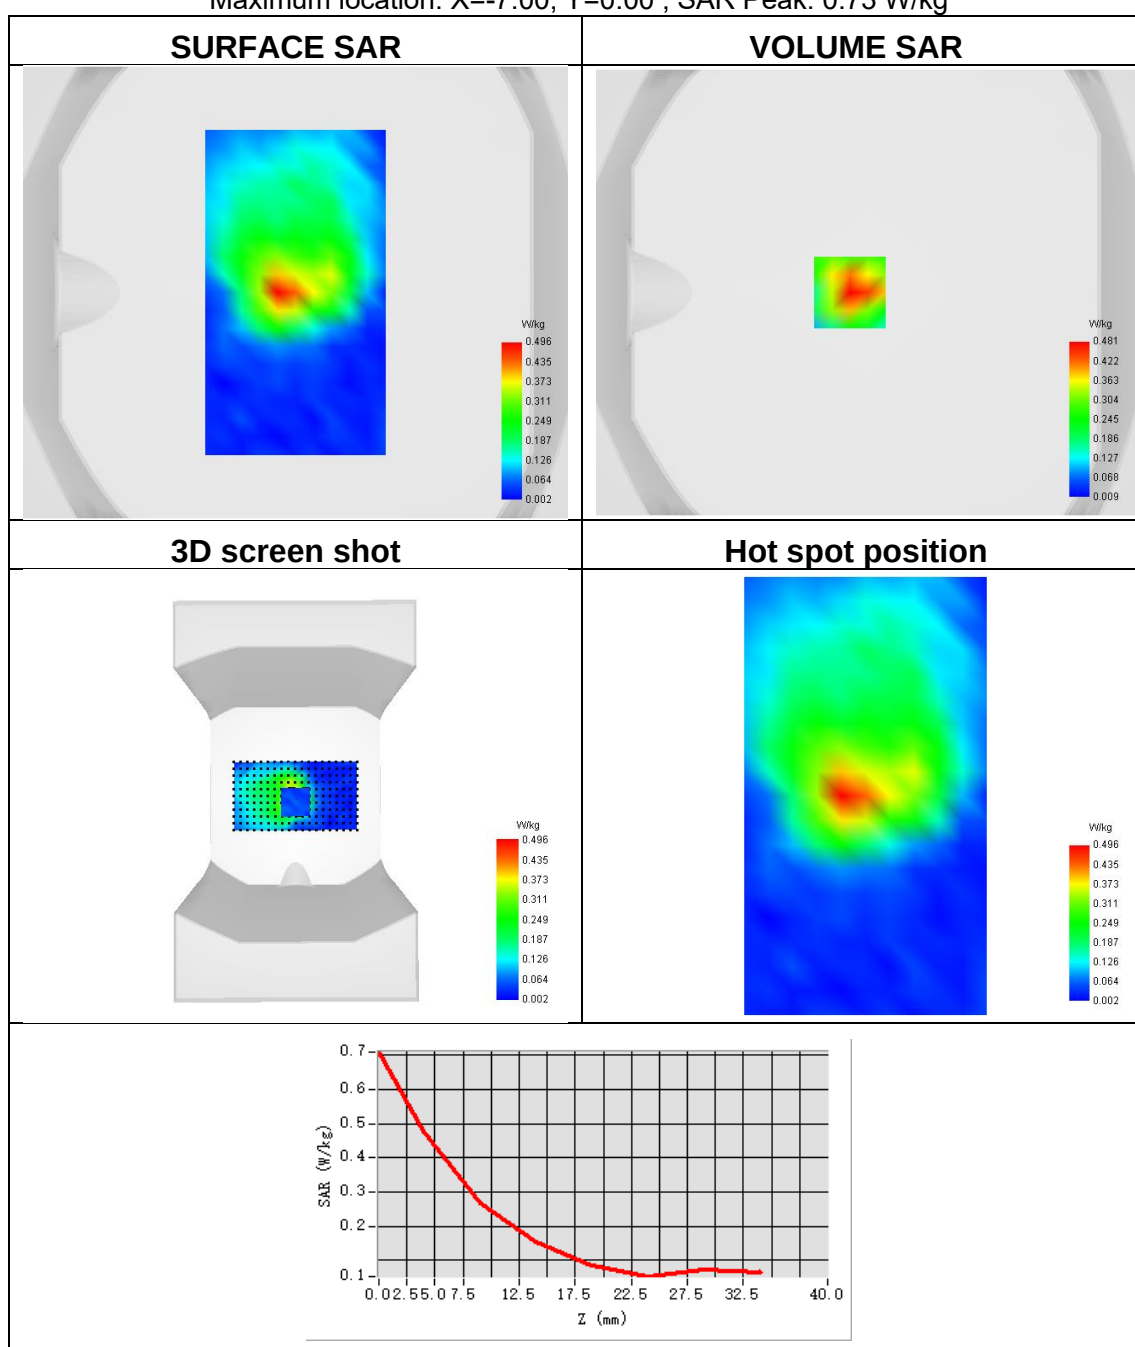

Plot 9:

Test Date	2022-12-27
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	Band 5 (850)
Signal	WCDMA
Frequency	826.4
SAR 10g (W/Kg)	0.111
SAR 1g (W/Kg)	0.164

Maximum location: X=-48.00, Y=-32.00 ; SAR Peak: 0.27 W/kg

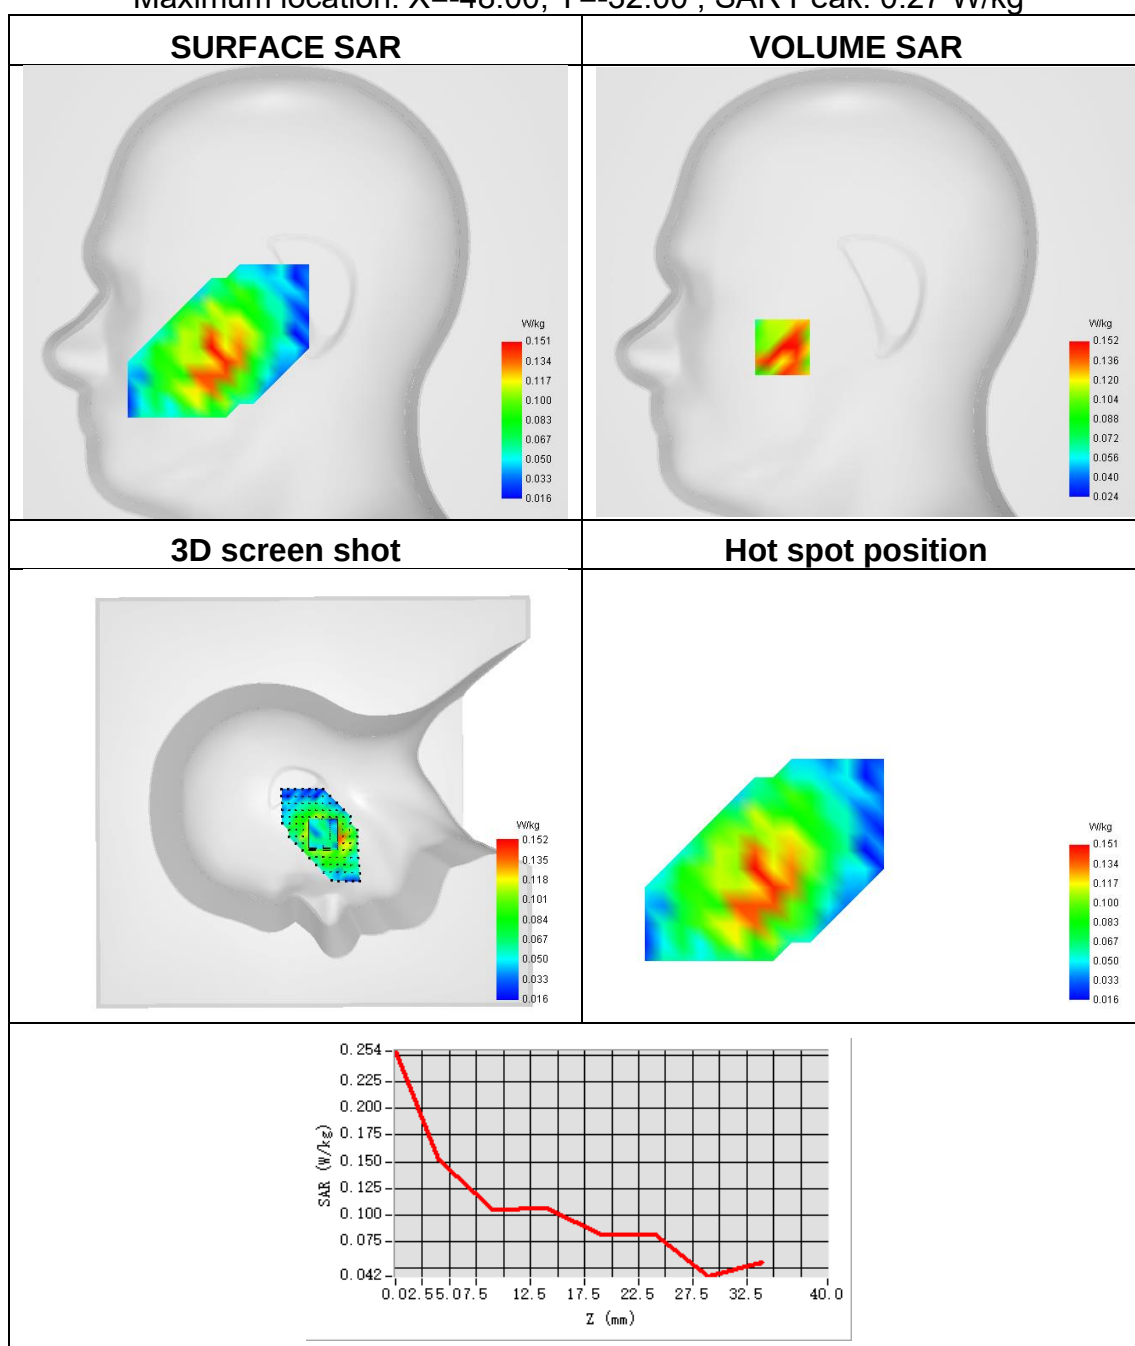




Plot 10:

Test Date	2022-12-27
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	826.4
SAR 10g (W/Kg)	0.152
SAR 1g (W/Kg)	0.209


Maximum location: X=-16.00, Y=48.00 ; SAR Peak: 0.31 W/kg

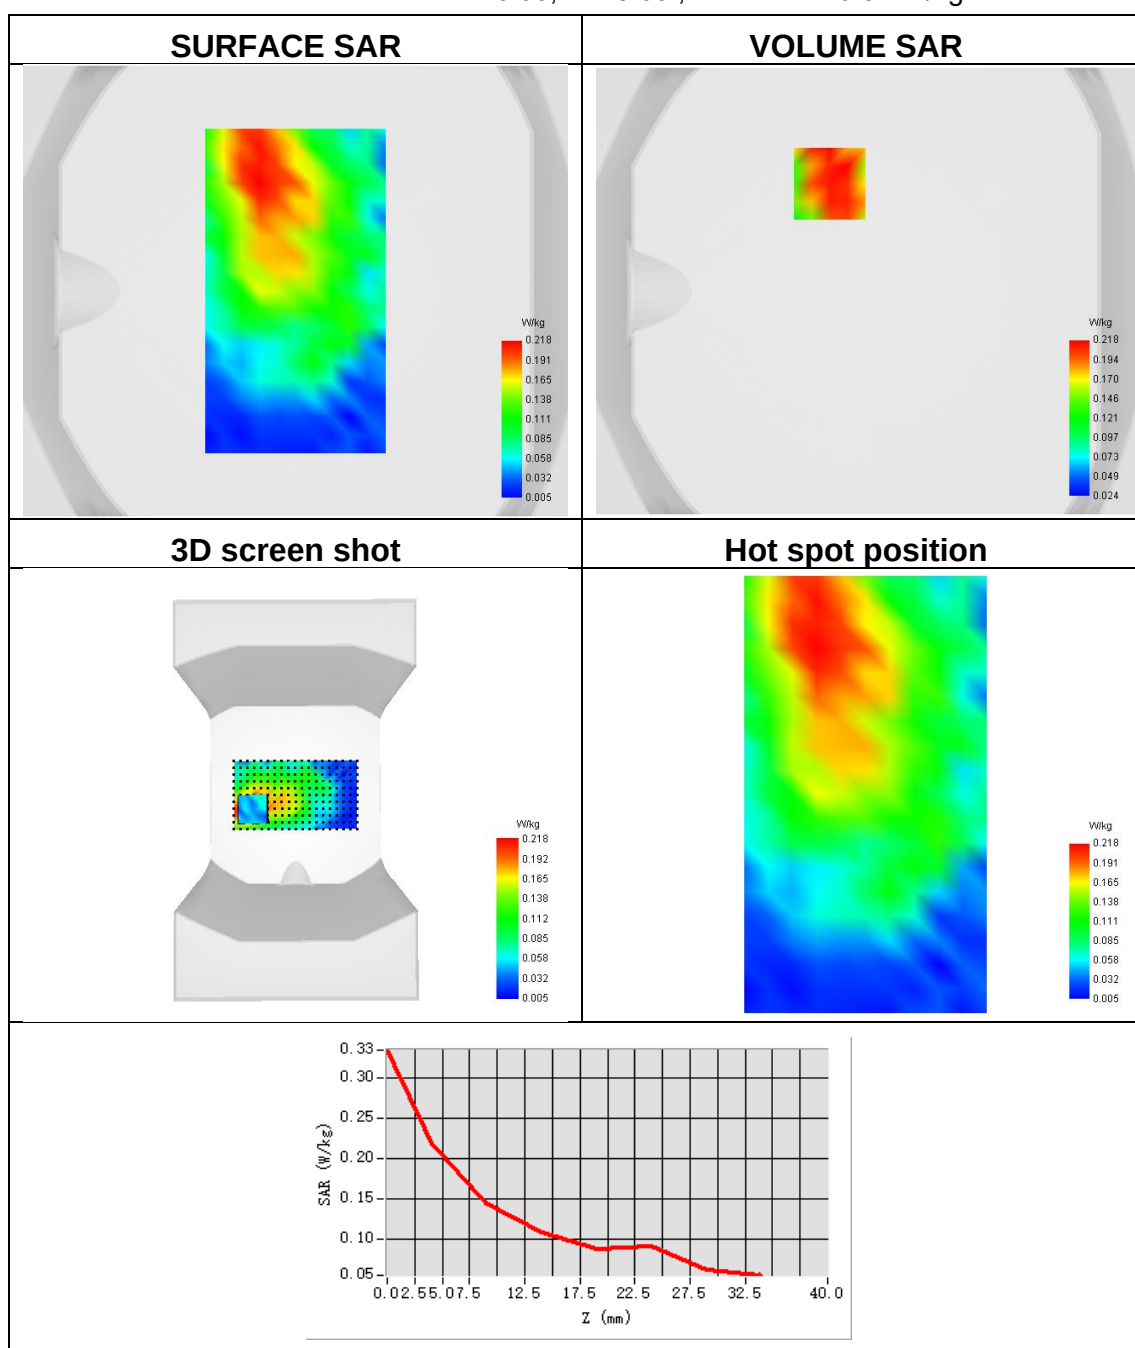

Plot 11:

Test Date	2023-02-03
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.202
SAR 1g (W/Kg)	0.352

Maximum location: X=-50.00, Y=-55.00 ; SAR Peak: 0.60 W/kg

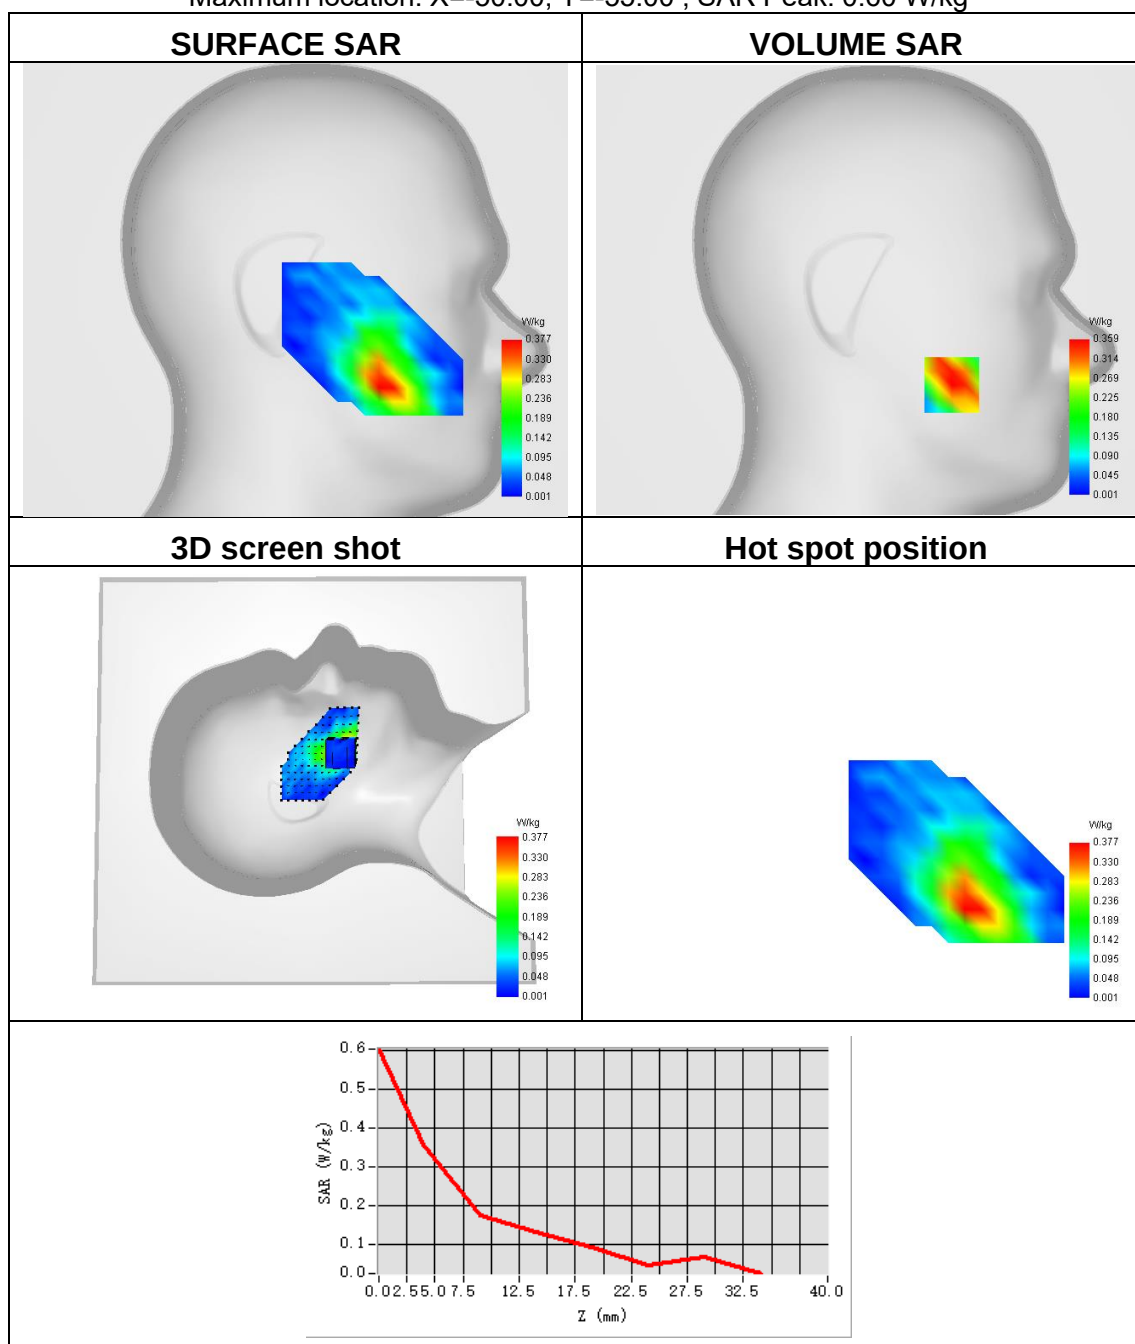




Plot 12:

Test Date	2023-02-03
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.308
SAR 1g (W/Kg)	0.630


Maximum location: X=22.00, Y=-39.00 ; SAR Peak: 1.11 W/kg

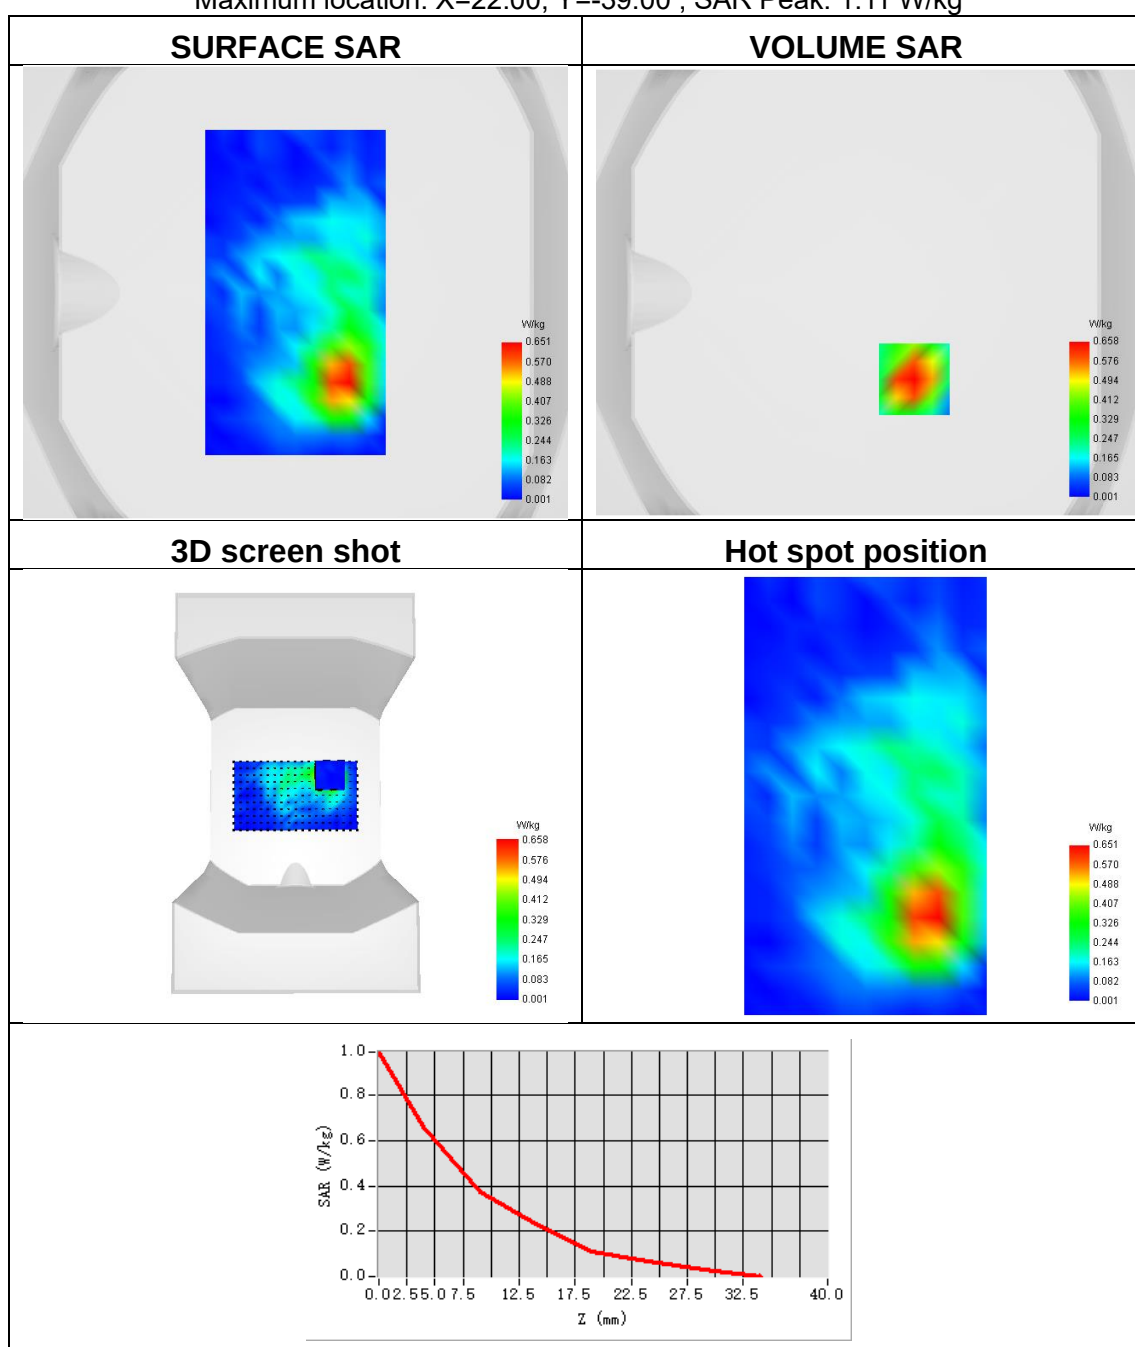

Plot 13:

Test Date	2023-02-03
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.110
SAR 1g (W/Kg)	0.204

Maximum location: X=-50.00, Y=-39.00 ; SAR Peak: 0.35 W/kg

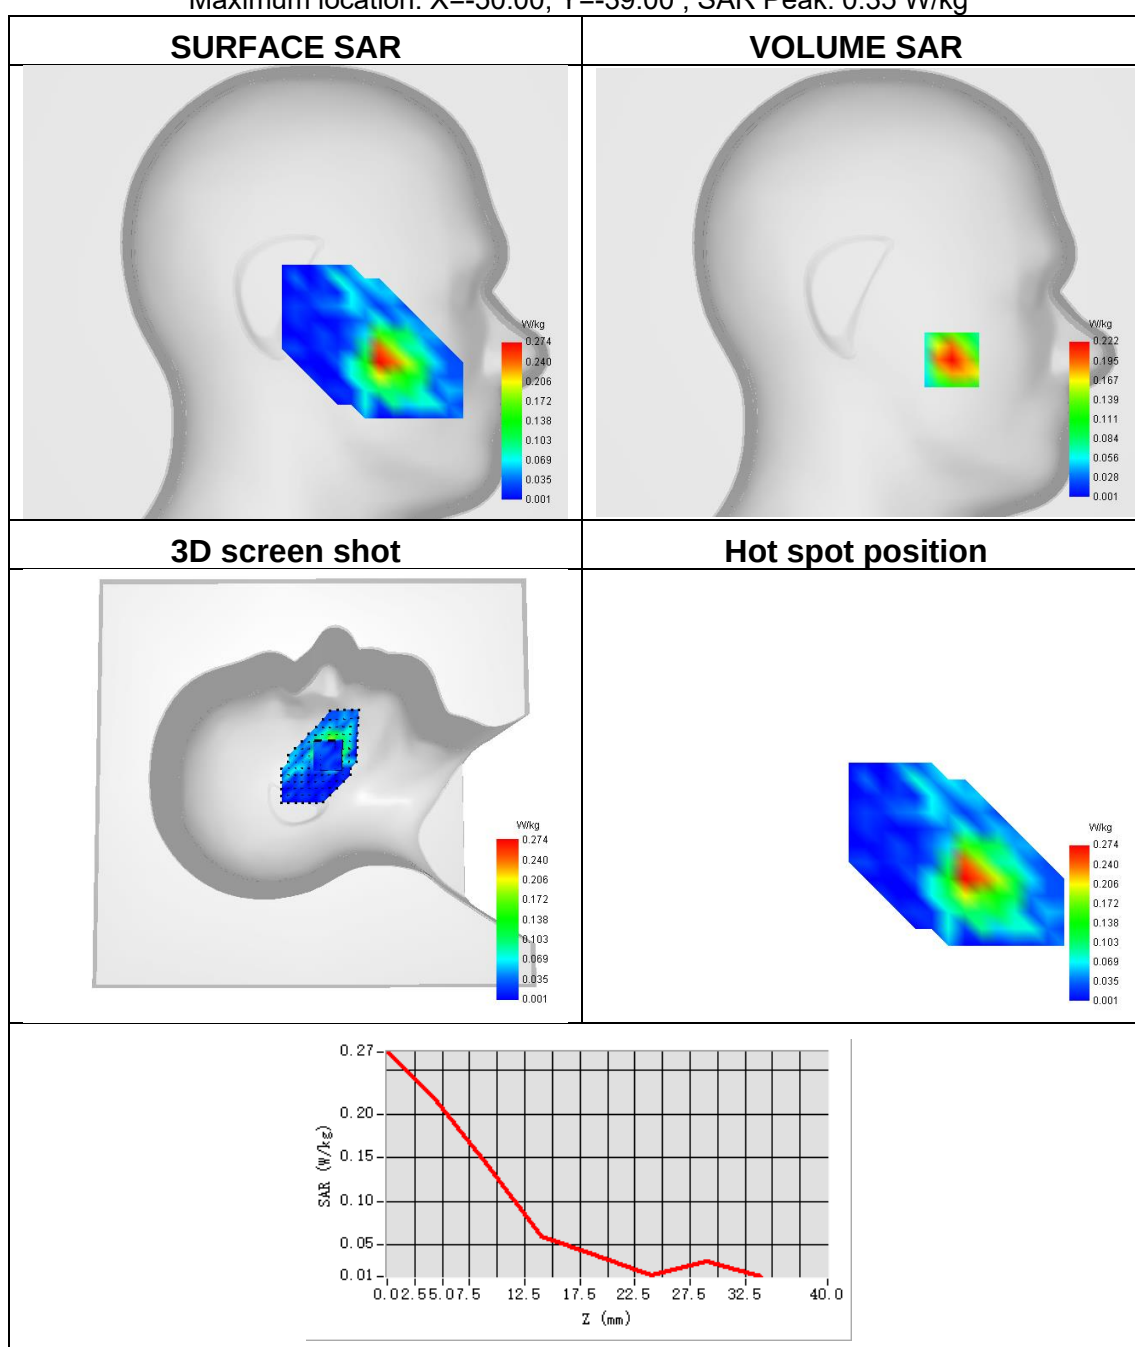




Plot 14:

Test Date	2023-02-03
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.185
SAR 1g (W/Kg)	0.371

Maximum location: X=-7.00, Y=31.00 ; SAR Peak: 0.75 W/kg

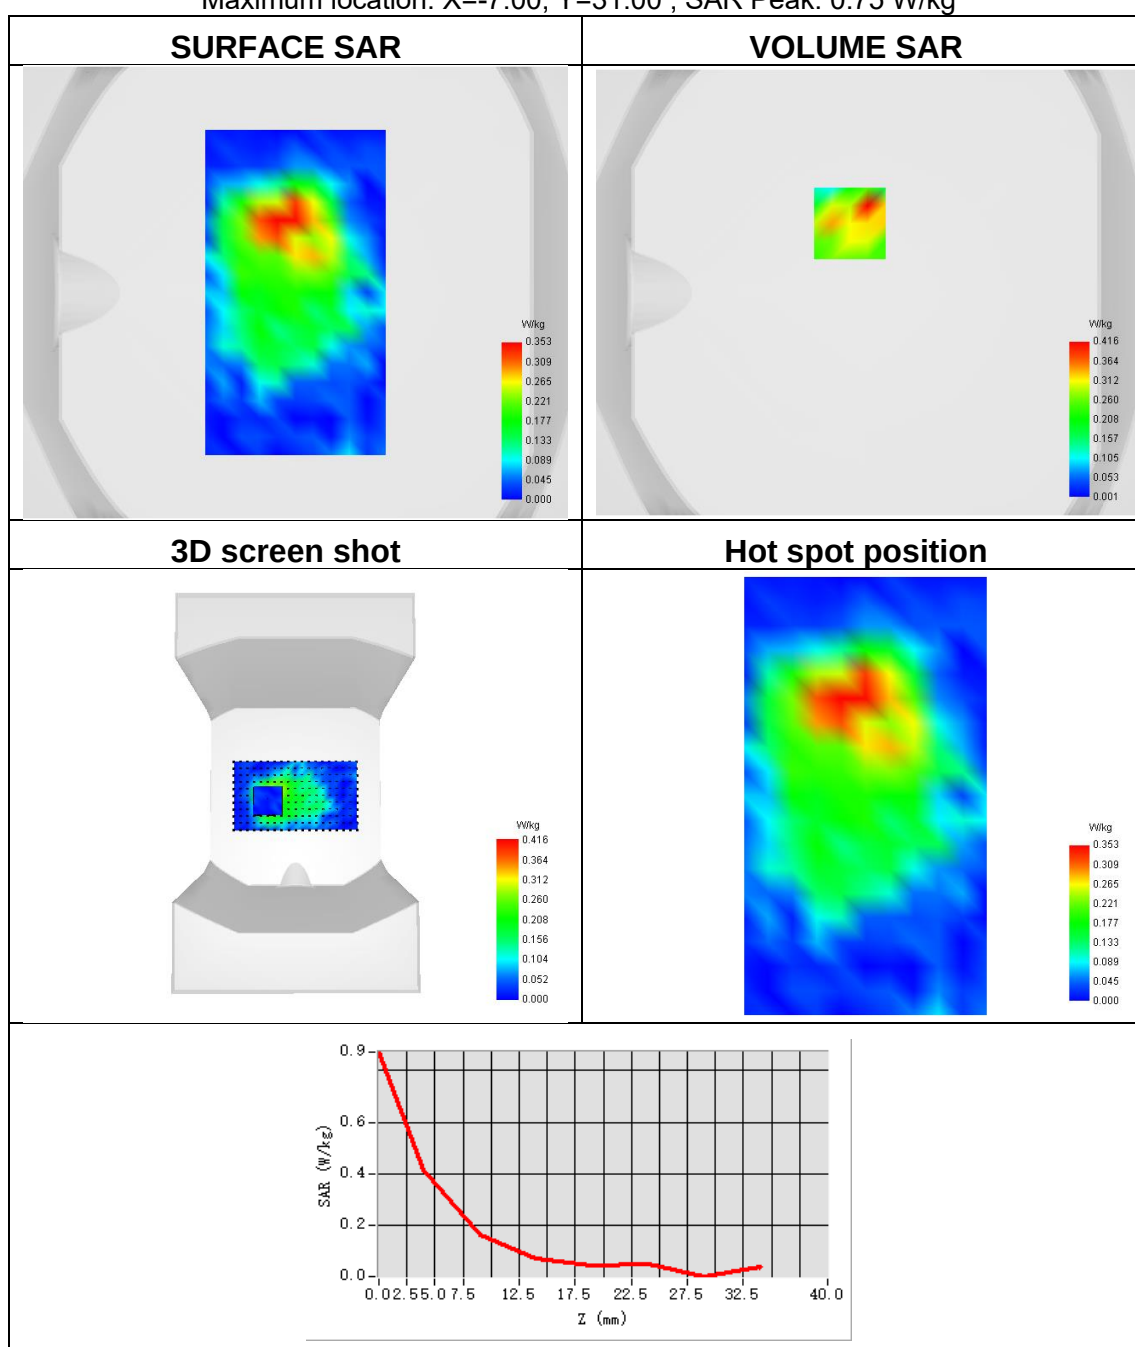




Plot 15:

Test Date	2022-12-27
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	829
SAR 10g (W/Kg)	0.107
SAR 1g (W/Kg)	0.136

Maximum location: X=-24.00, Y=-8.00 ; SAR Peak: 0.22 W/kg

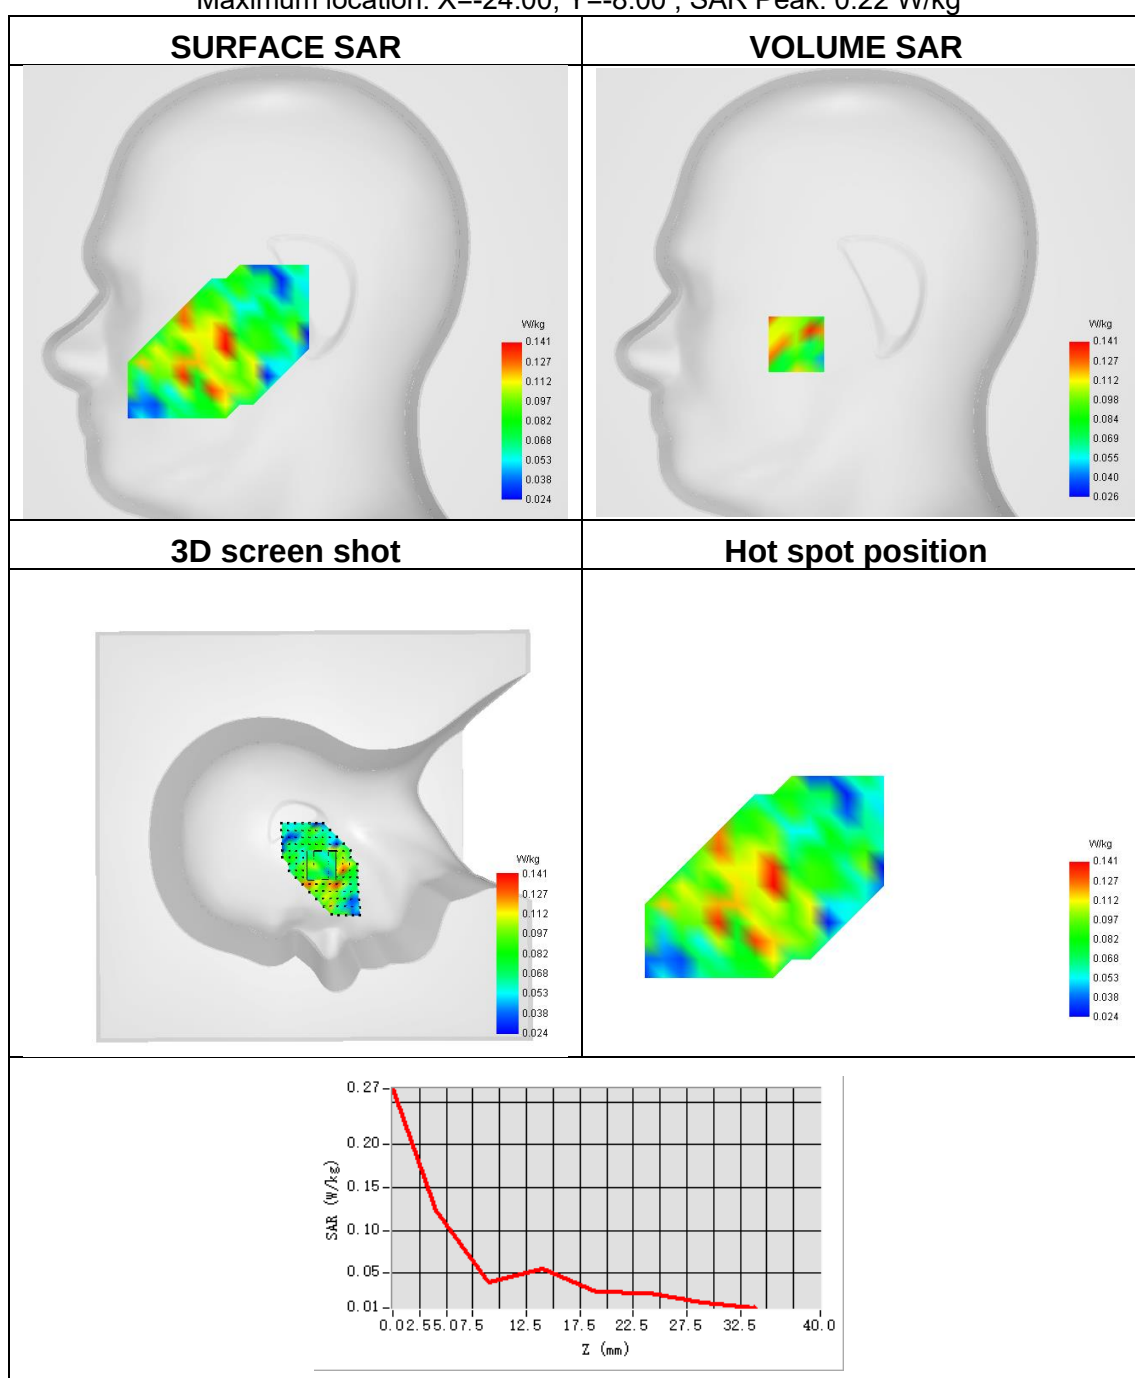




Plot 16:

Test Date	2022-12-27
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	829
SAR 10g (W/Kg)	0.147
SAR 1g (W/Kg)	0.210

Maximum location: X=-15.00, Y=54.00 ; SAR Peak: 0.29 W/kg

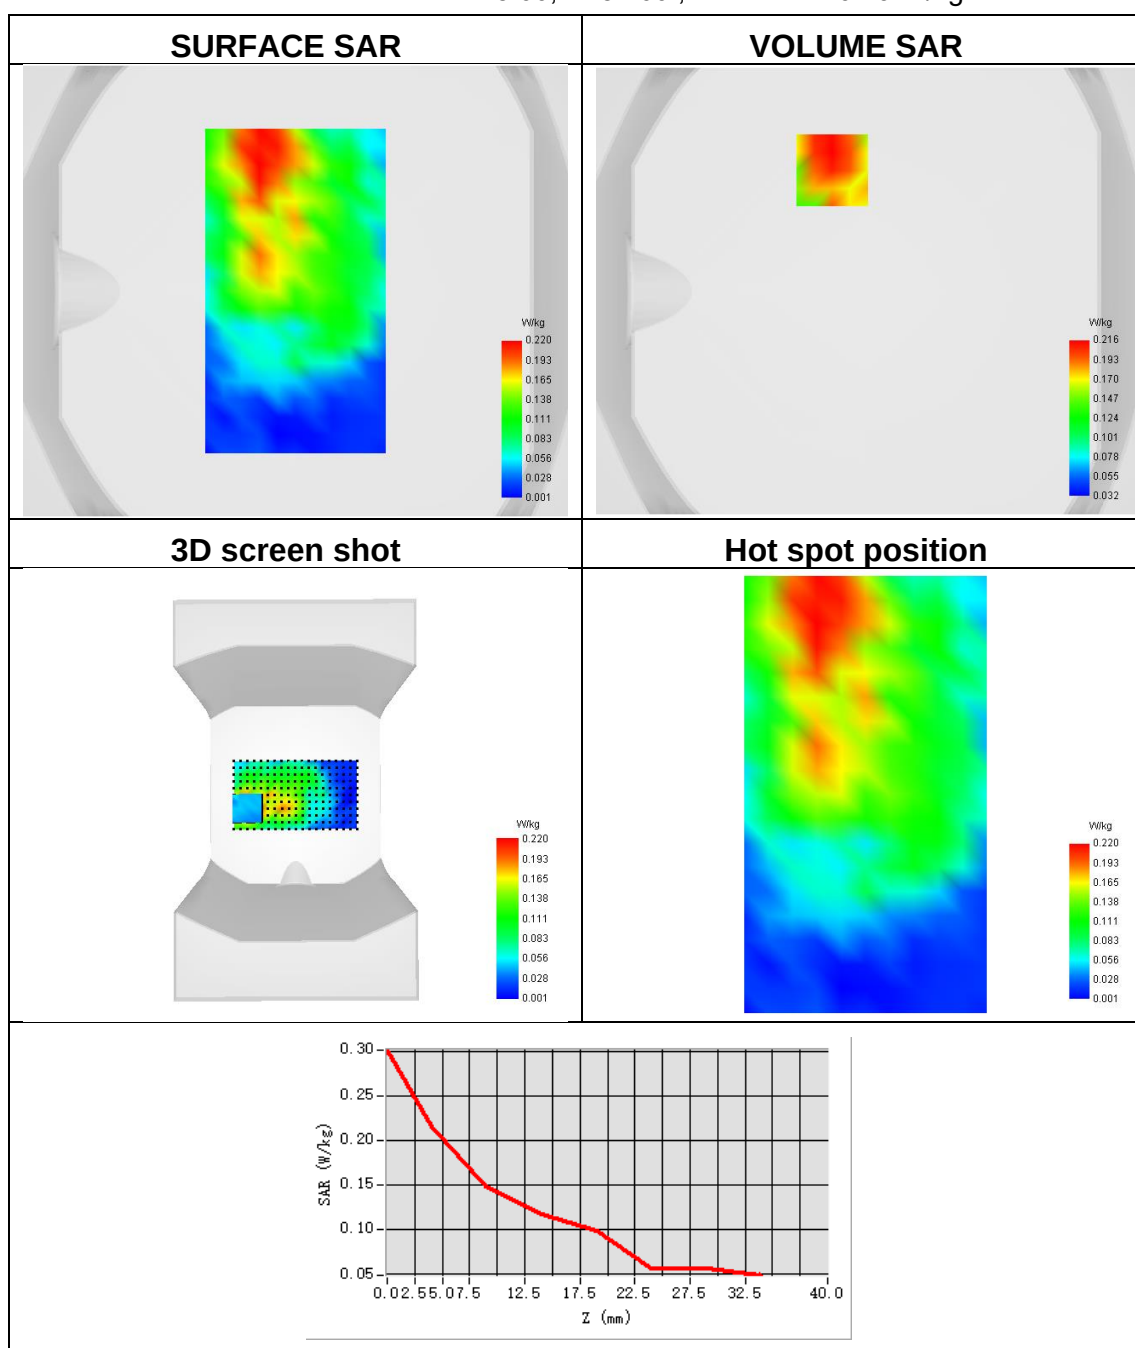




Plot 17:

Test Date	2023-02-04
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2560
SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.229


Maximum location: X=-48.00, Y=-51.00 ; SAR Peak: 0.41 W/kg

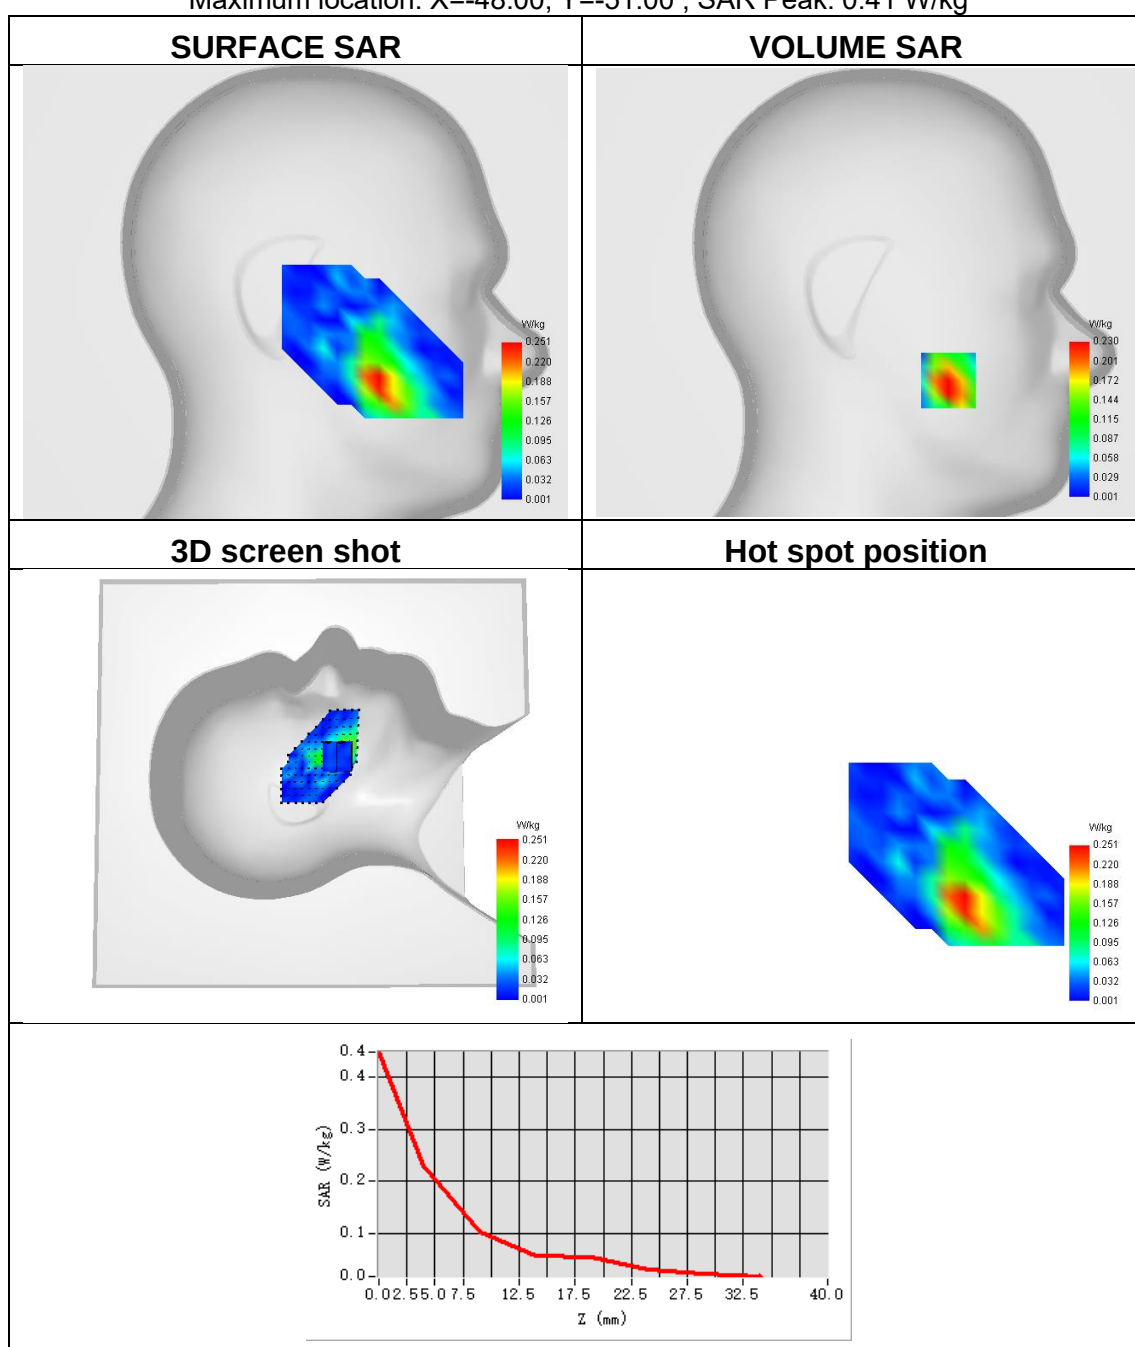

Plot 18:

Test Date	2023-02-04
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2560
SAR 10g (W/Kg)	0.140
SAR 1g (W/Kg)	0.343


Maximum location: X=17.00, Y=6.00 ; SAR Peak: 0.74 W/kg

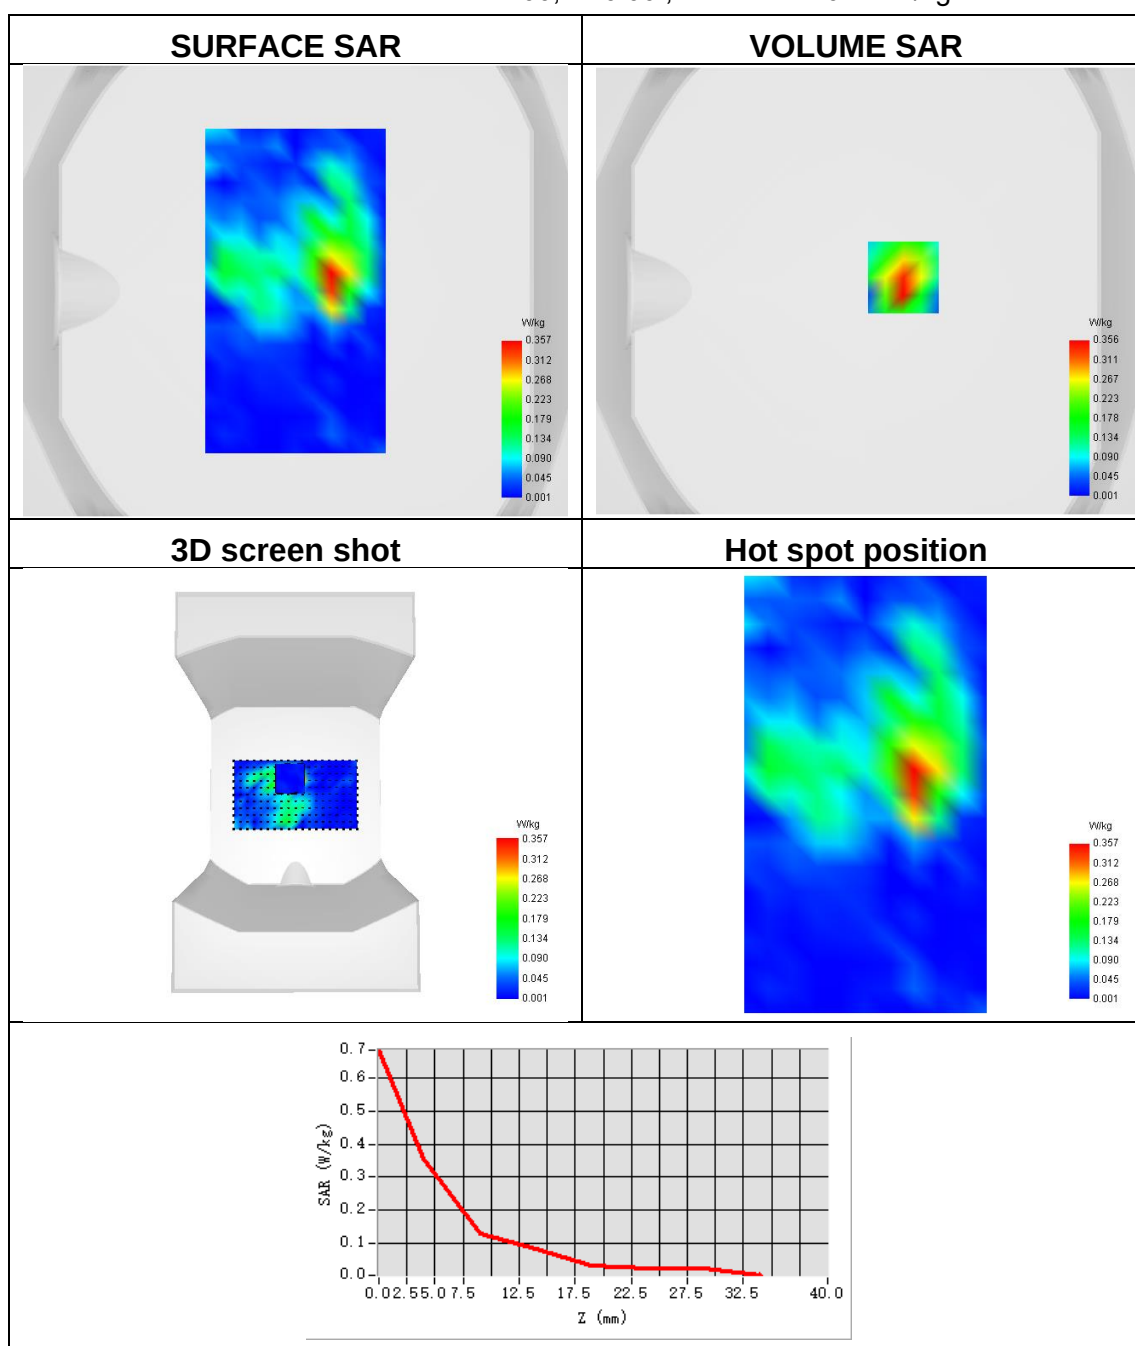

Plot 19:

Test Date	2022-12-23
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	707.5
SAR 10g (W/Kg)	0.036
SAR 1g (W/Kg)	0.065

Maximum location: X=-48.00, Y=-32.00 ; SAR Peak: 0.15 W/kg

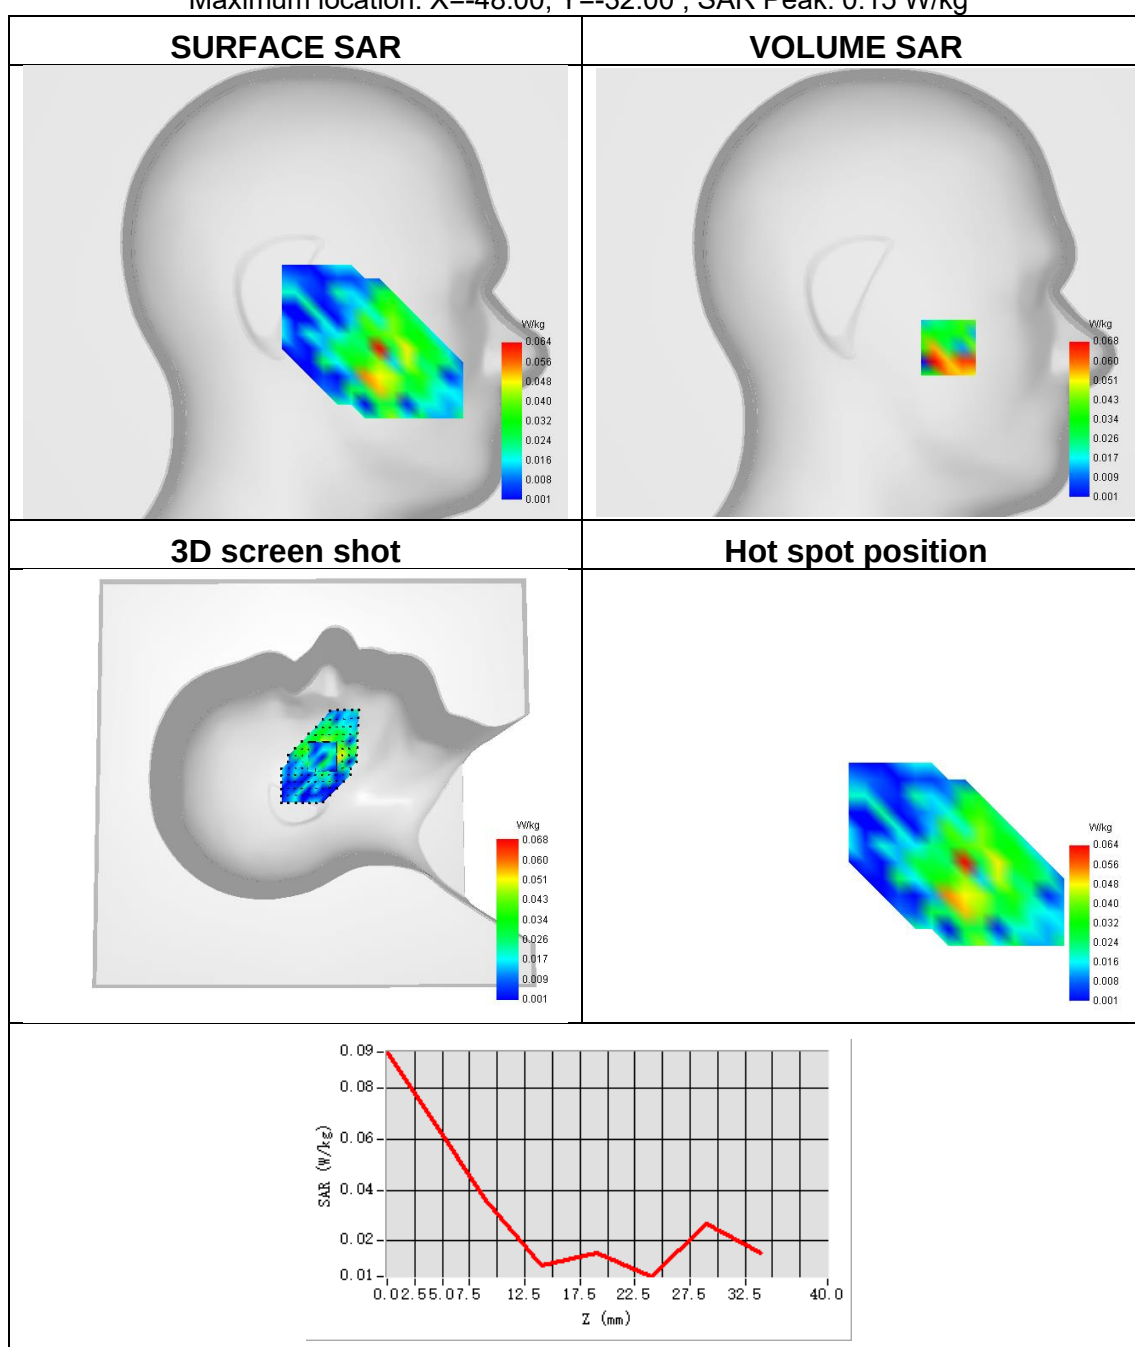




Plot 20:

Test Date	2022-12-23
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	707.5
SAR 10g (W/Kg)	0.195
SAR 1g (W/Kg)	0.307


Maximum location: X=7.00, Y=-8.00 ; SAR Peak: 0.51 W/kg

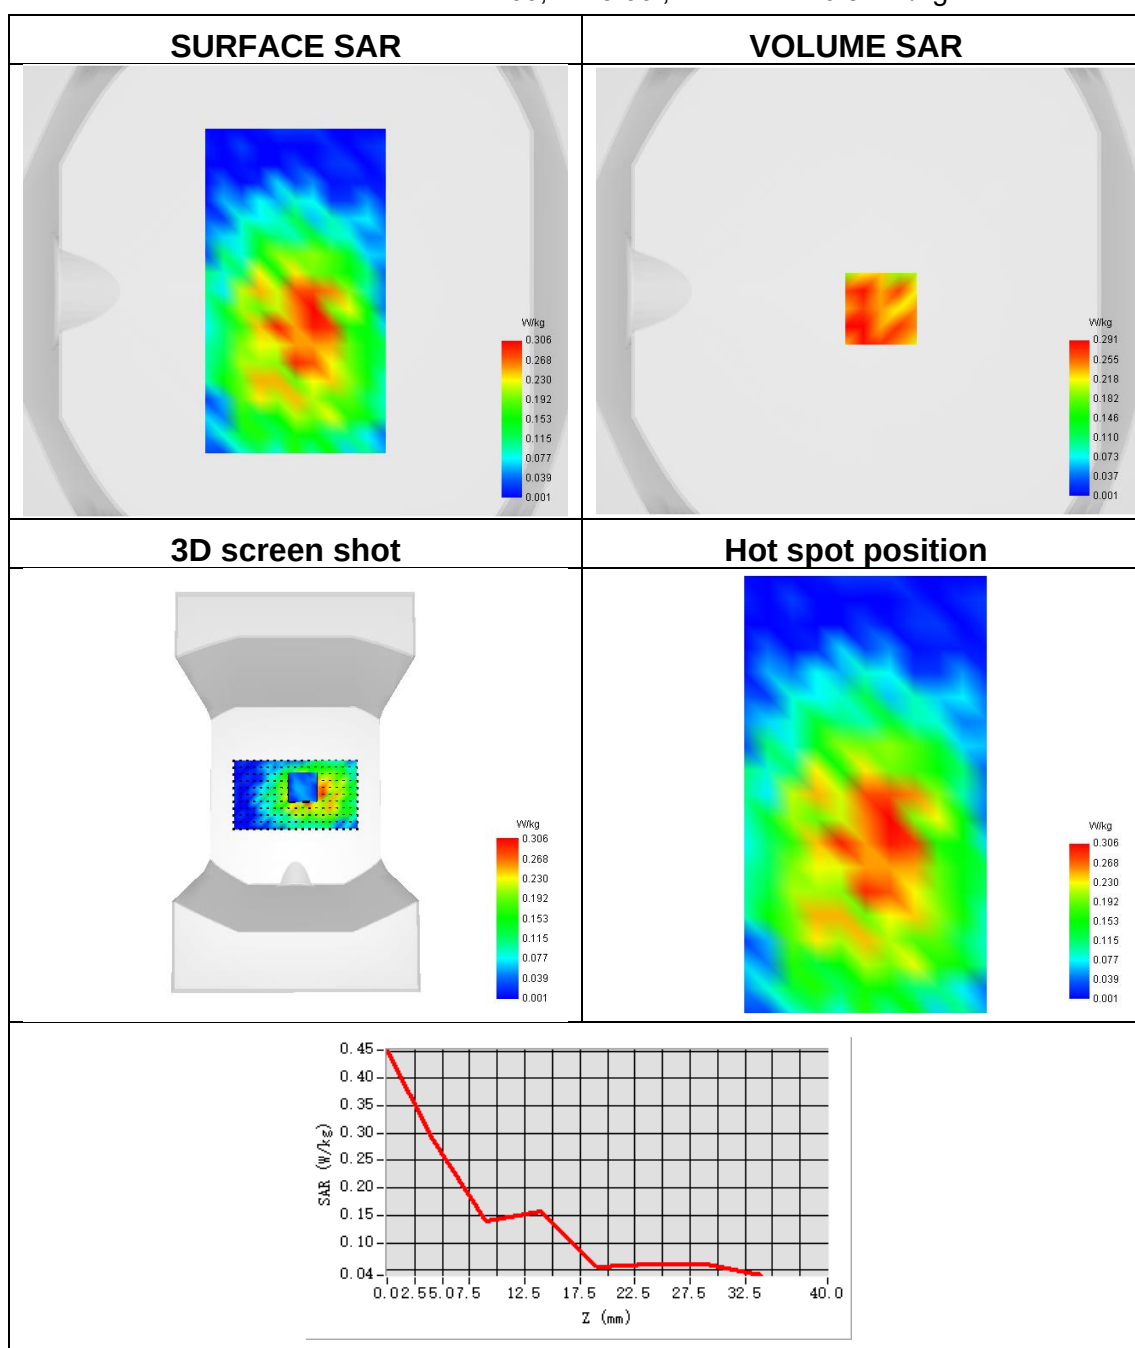

Plot 21:

Test Date	2022-12-23
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.050
SAR 1g (W/Kg)	0.083

Maximum location: X=-57.00, Y=-40.00 ; SAR Peak: 0.18 W/kg

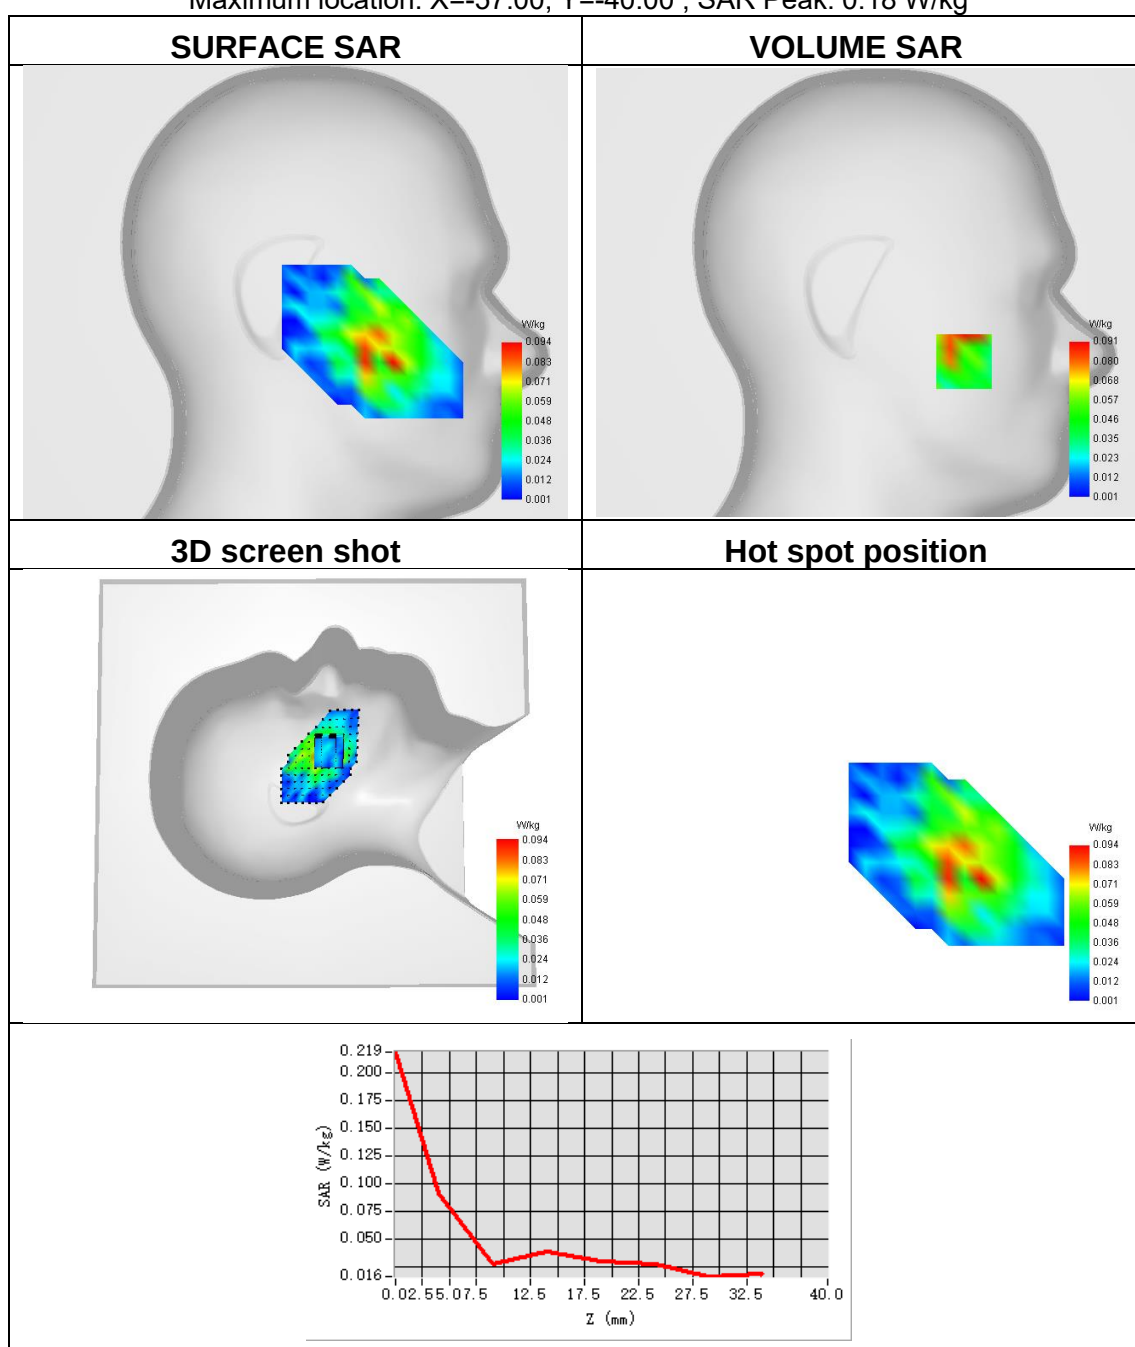




Plot 22:

Test Date	2022-12-23
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.234
SAR 1g (W/Kg)	0.354

Maximum location: X=8.00, Y=-17.00 ; SAR Peak: 0.52 W/kg

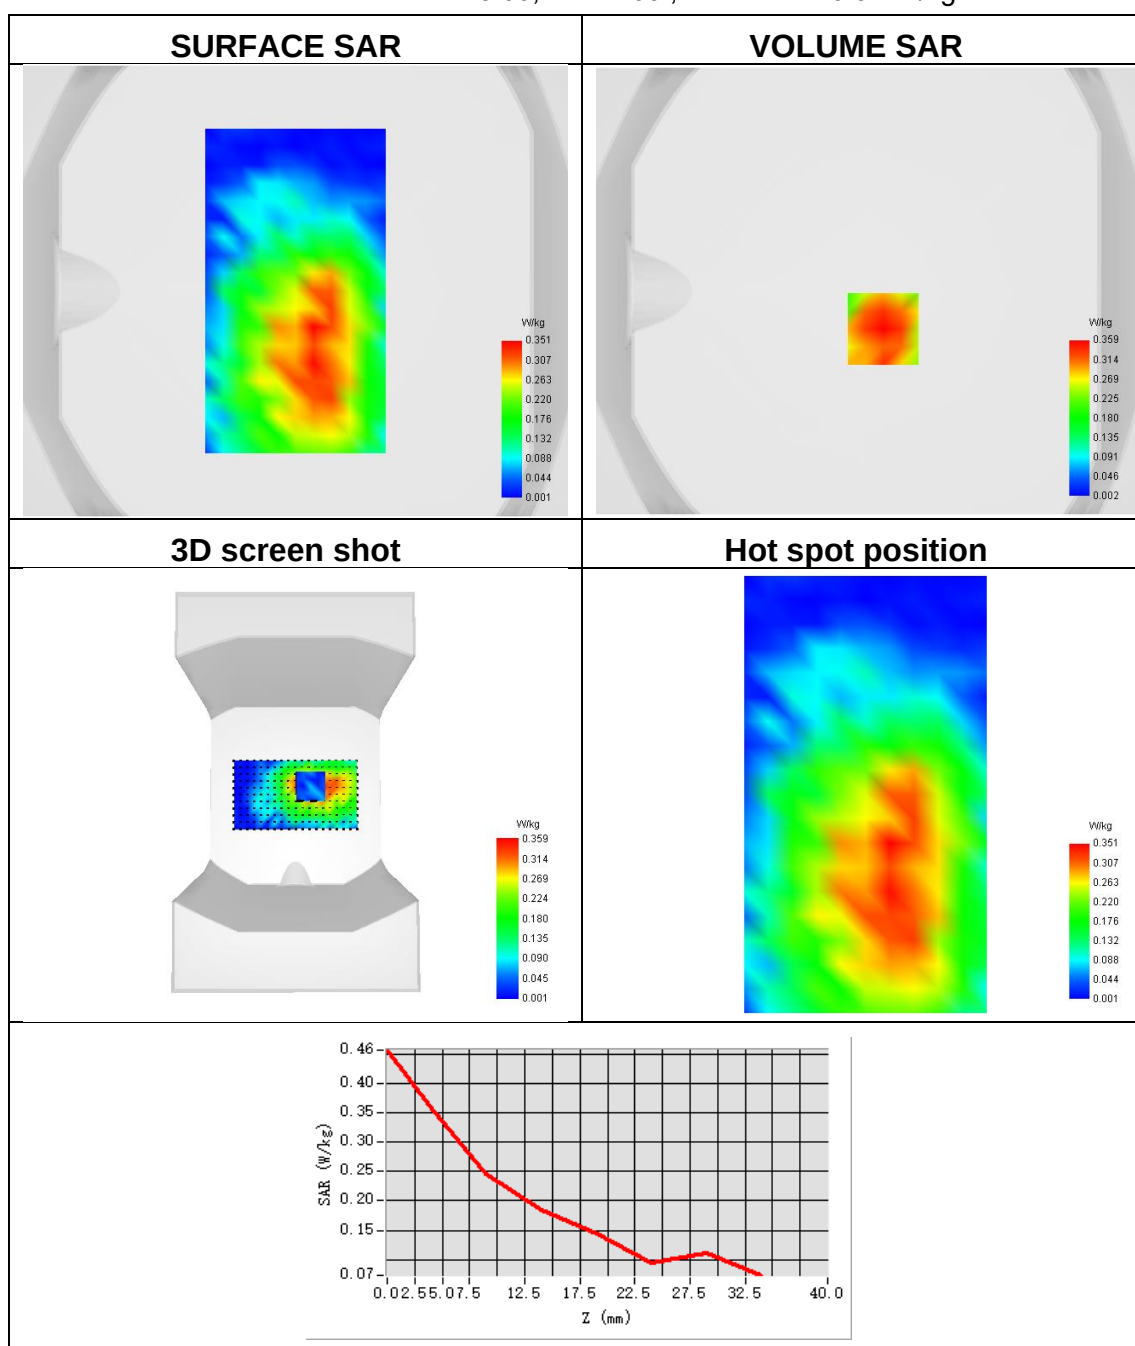




Plot 23:

Test Date	2022-12-23
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.075
SAR 1g (W/Kg)	0.116

Maximum location: X=-42.00, Y=-39.00 ; SAR Peak: 0.23 W/kg

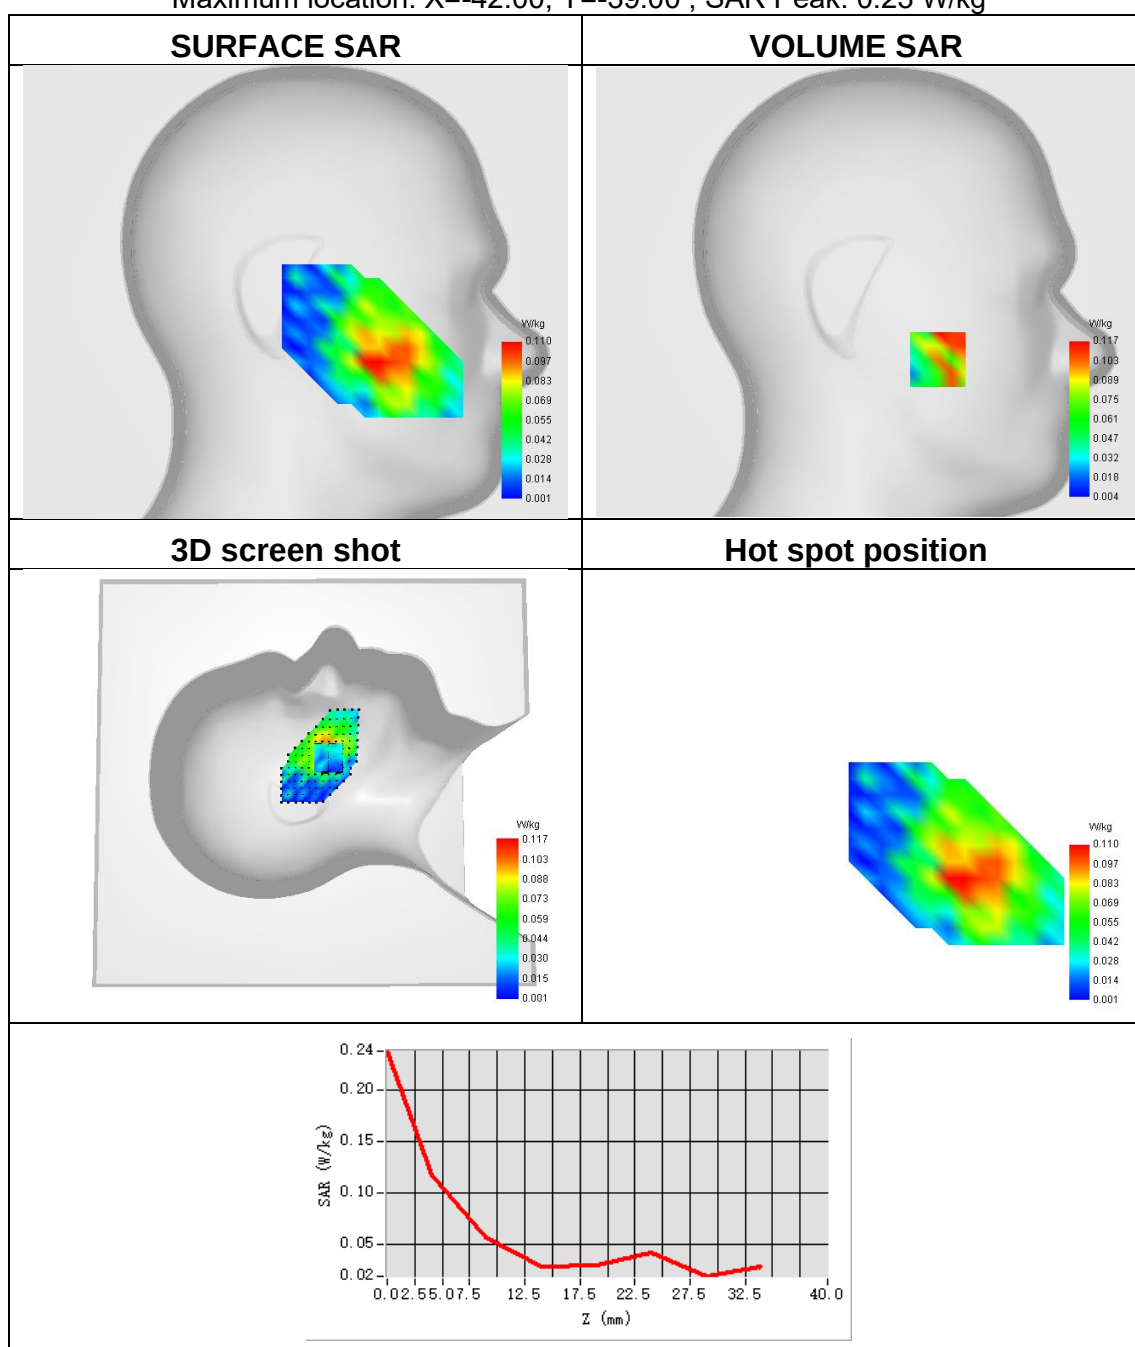




Plot 24:

Test Date	2022-12-23
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.219
SAR 1g (W/Kg)	0.341

Maximum location: X=-2.00, Y=-18.00 ; SAR Peak: 0.57 W/kg

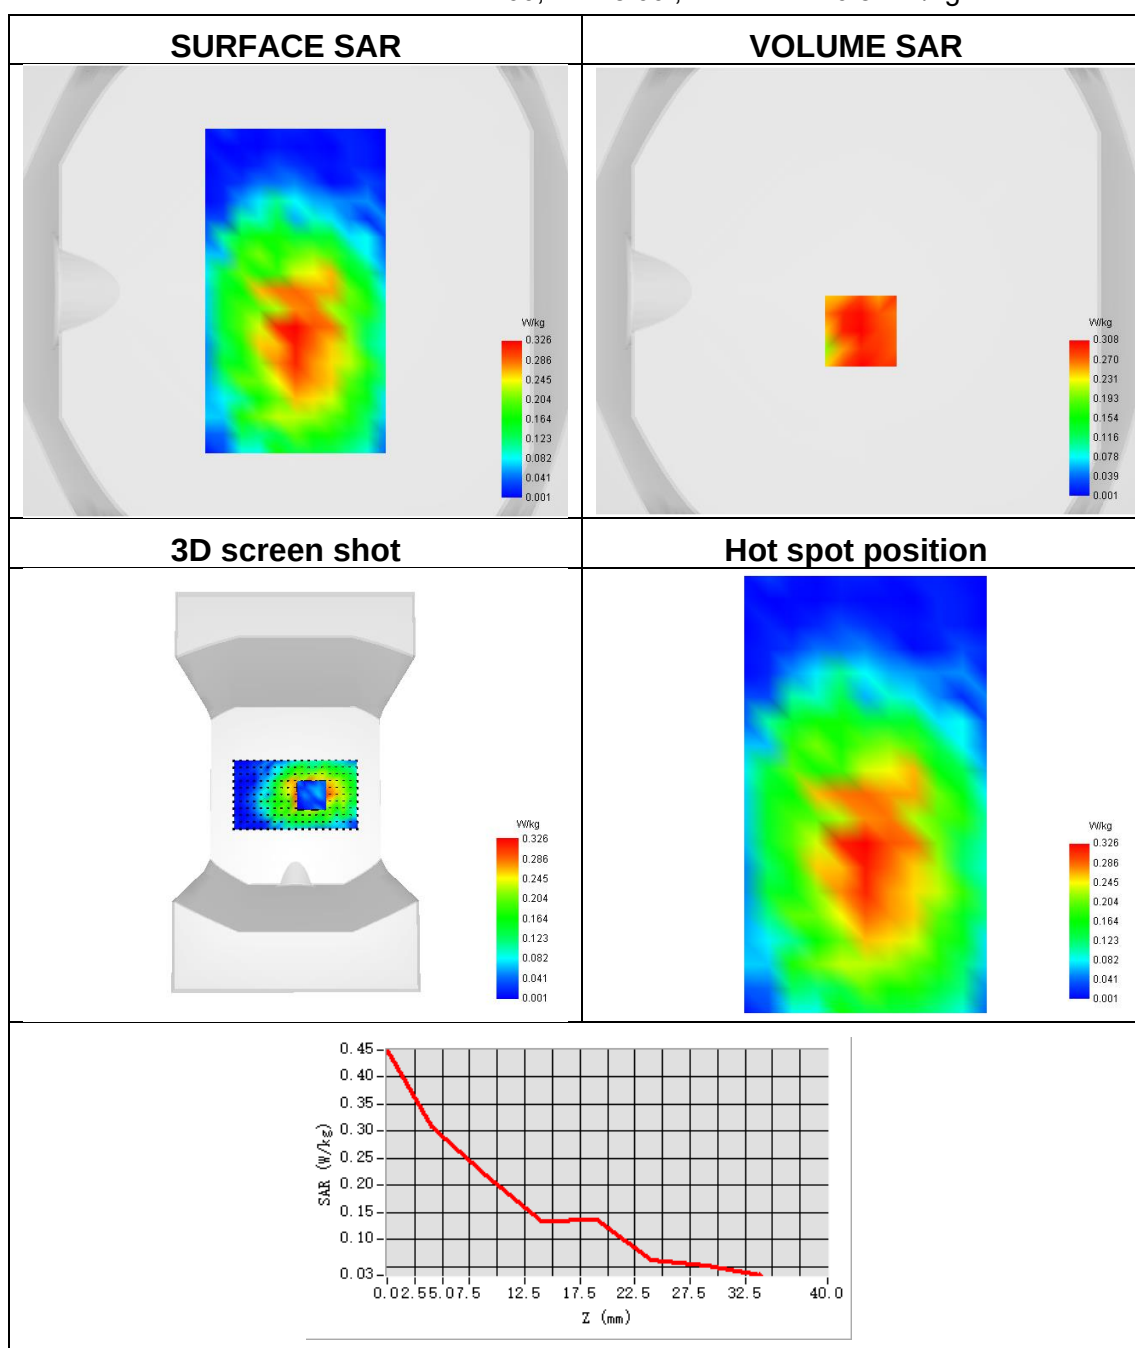




Plot 25:

Test Date	2023-02-04
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11g ISM
Signal	IEEE 802.11g
Frequency	2437
SAR 10g (W/Kg)	0.063
SAR 1g (W/Kg)	0.146

Maximum location: X=-24.00, Y=-7.00 ; SAR Peak: 0.37 W/kg

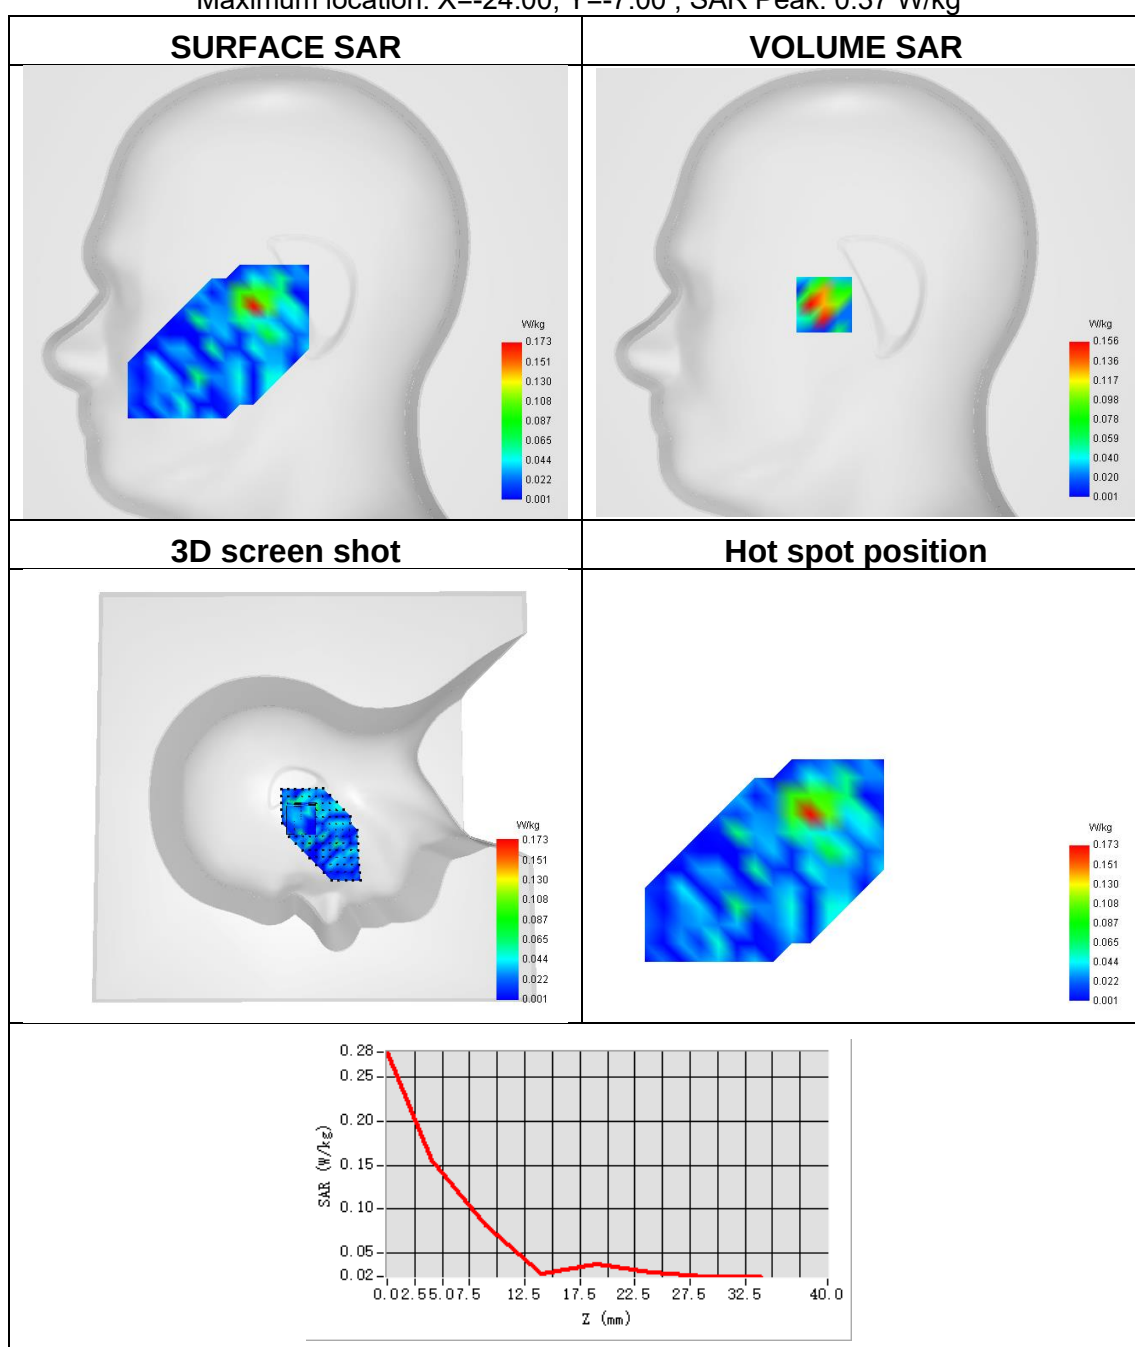




Plot 26:

Test Date	2023-02-04
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11g ISM
Signal	IEEE 802.11g
Frequency	2437
SAR 10g (W/Kg)	0.043
SAR 1g (W/Kg)	0.082

Maximum location: X=0.00, Y=40.00 ; SAR Peak: 0.21 W/kg

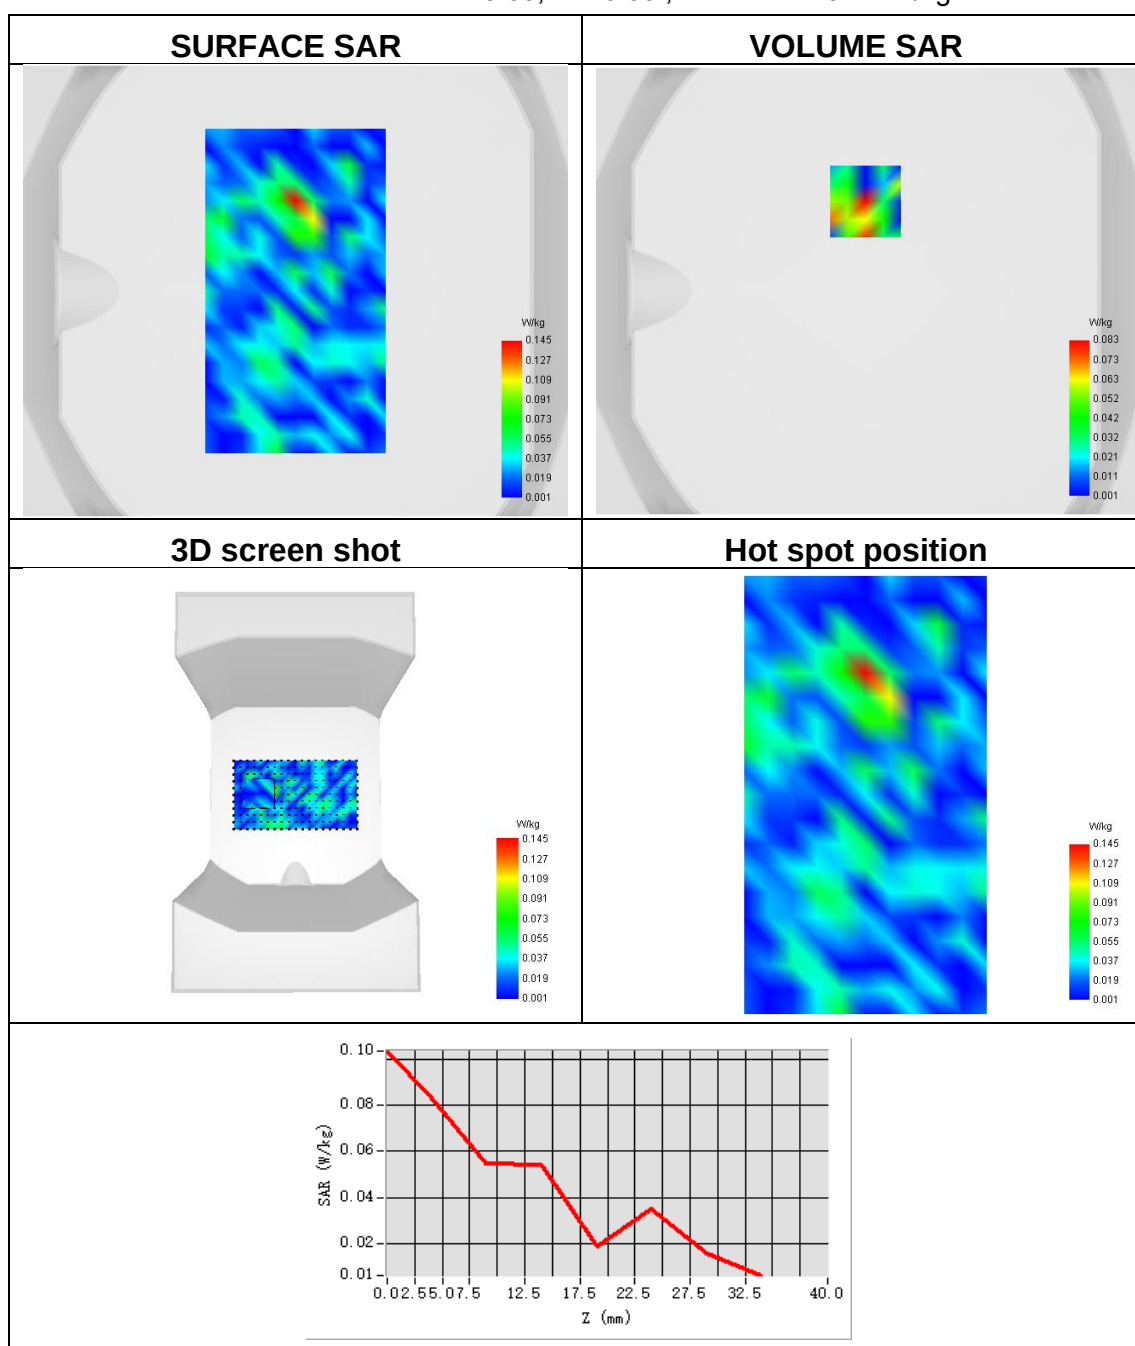




Plot 27:

Test Date	2023-02-04
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	Bluetooth
Signal	8DPSK(3Mbps)
Frequency	2402
SAR 10g (W/Kg)	0.019
SAR 1g (W/Kg)	0.033

Maximum location: X=-65.00, Y=-57.00 ; SAR Peak: 0.11 W/kg

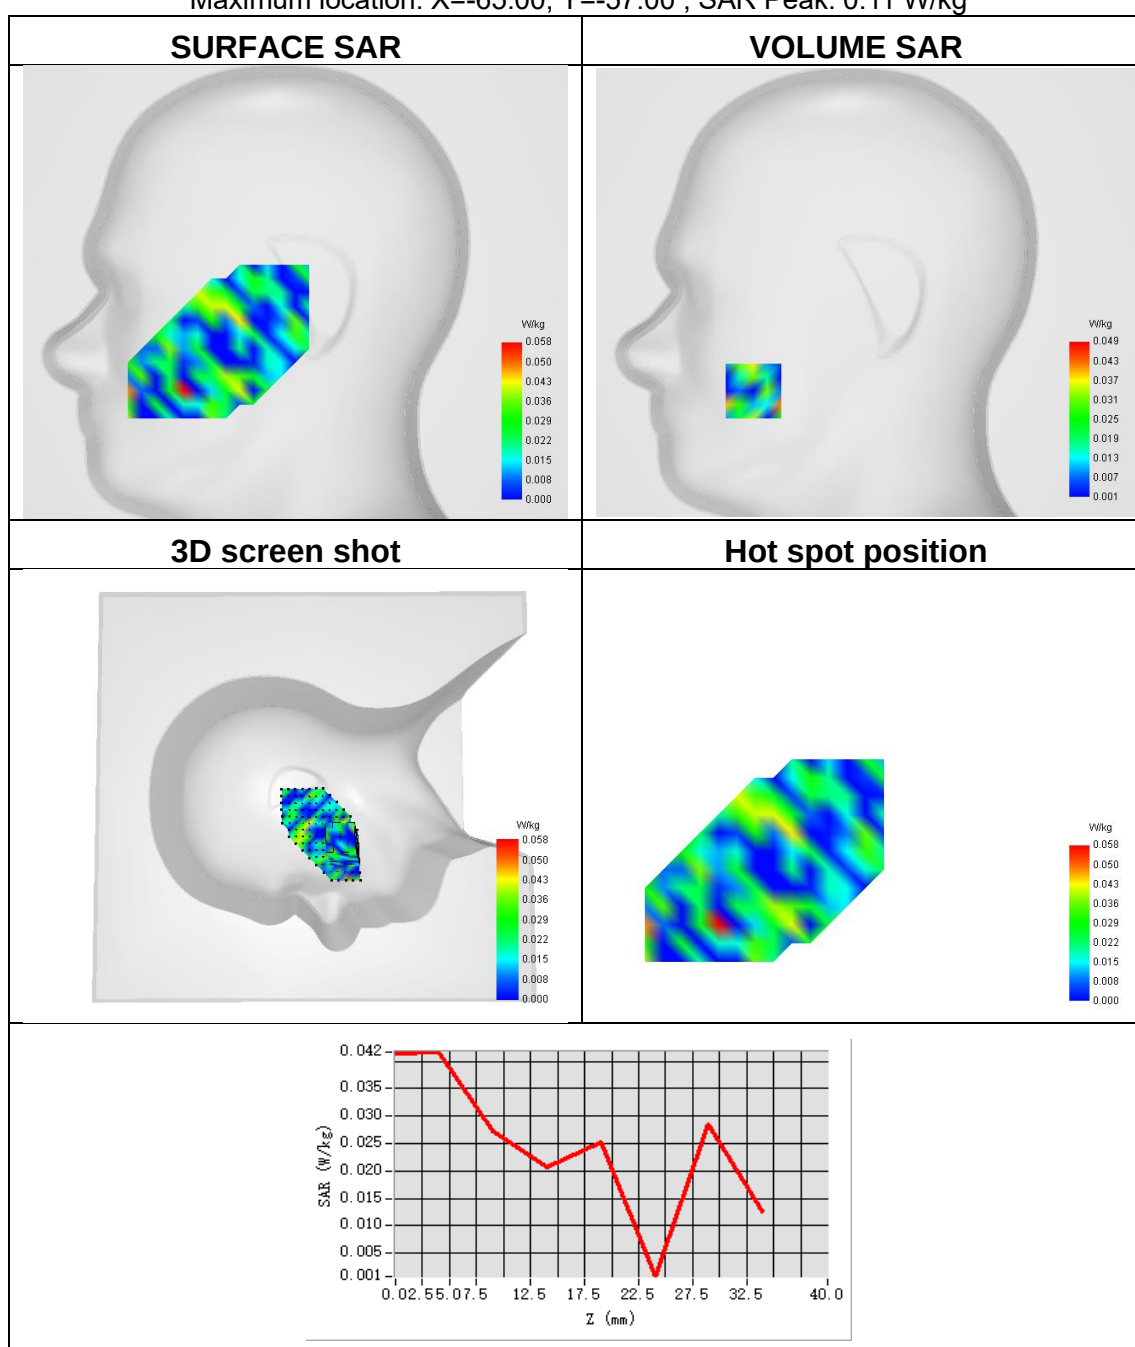




Plot 28:

Test Date	2023-02-04
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Bluetooth
Signal	8DPSK(3Mbps)
Frequency	2402
SAR 10g (W/Kg)	0.024
SAR 1g (W/Kg)	0.043

Maximum location: X=23.00, Y=17.00 ; SAR Peak: 0.16 W/kg

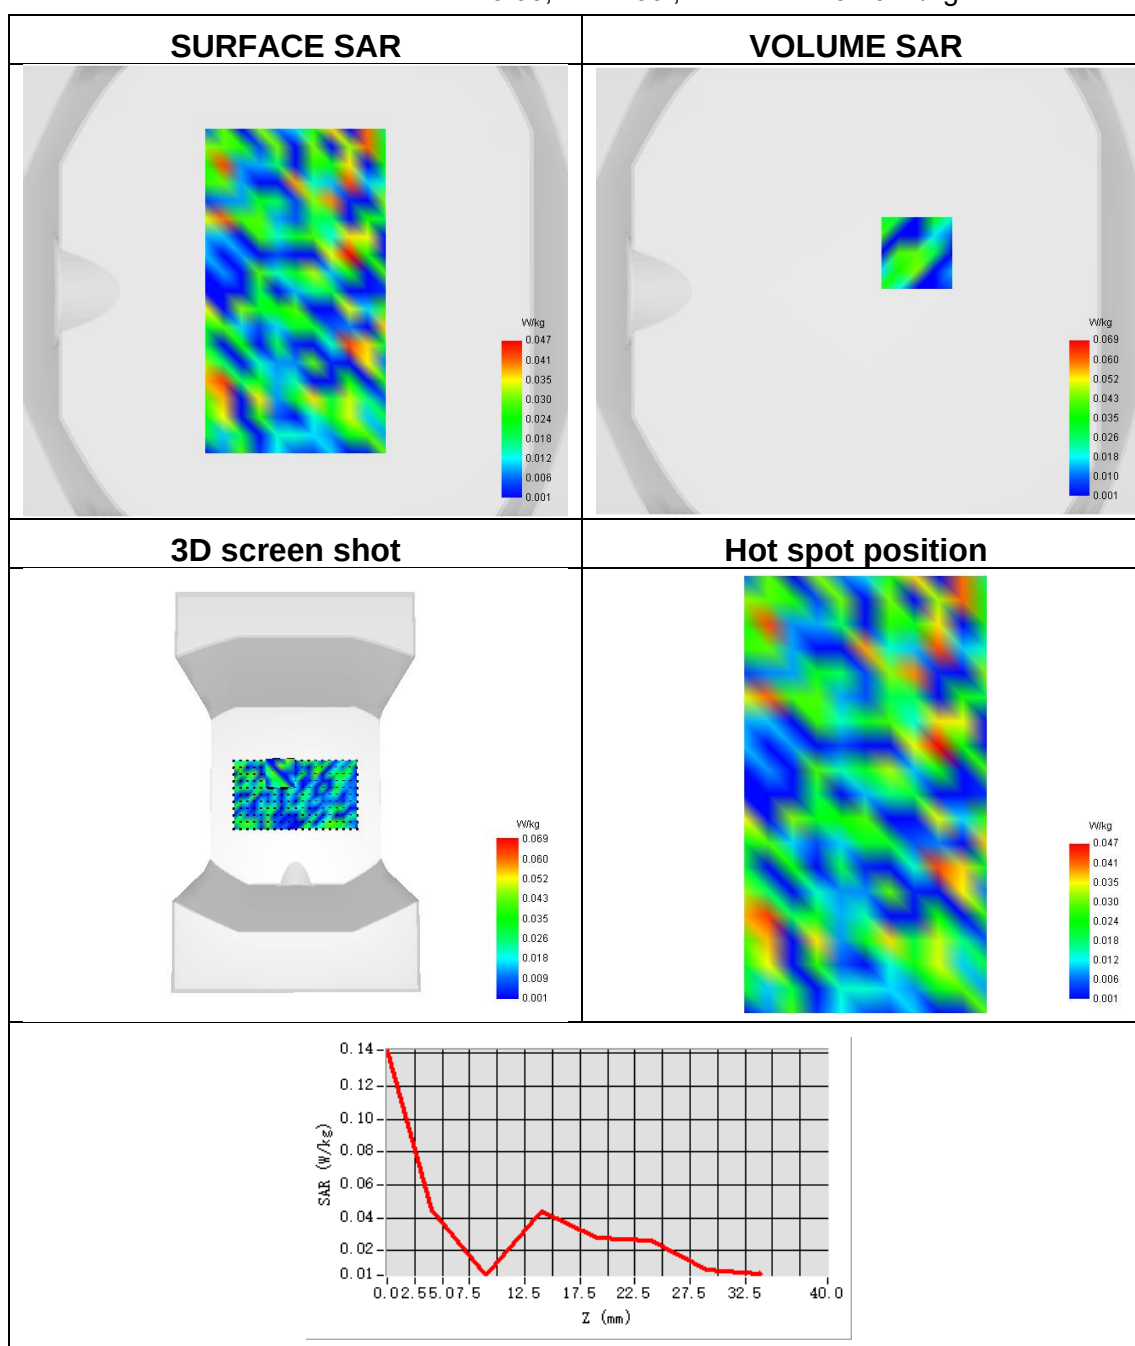



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

*****END OF THE REPORT*****