



Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 25°C
M/N: A180	Humidity: 62%RH
Test Voltage: Battery	Test Data: 2023-04-08
Test Mode: WCDMA Band 5 Upper	
Note:	

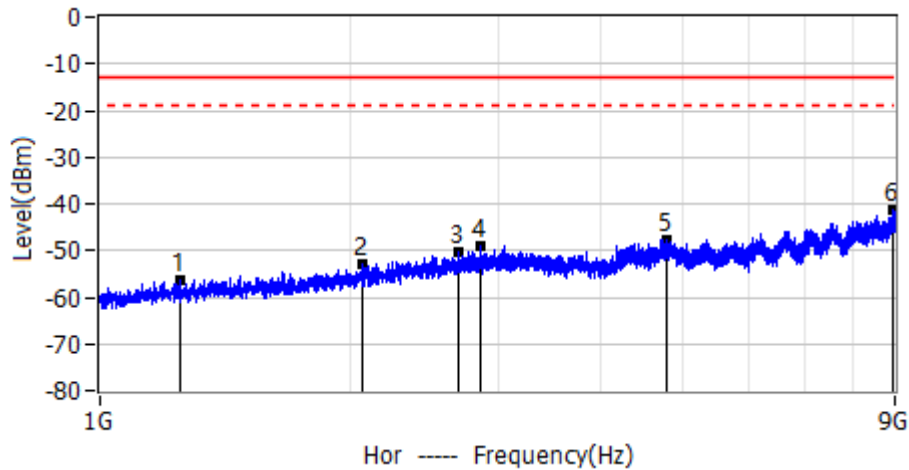

No.	Frequency	Level dBm	Limit dBm	Margin dB	Detector	Polar
1*	1.250GHz	-56.18	-13.00	-43.18	PK	Hor
2*	2.064GHz	-52.98	-13.00	-39.98	PK	Hor
3*	2.690GHz	-50.39	-13.00	-37.39	PK	Hor
4*	2.857GHz	-49.23	-13.00	-36.23	PK	Hor
5*	4.796GHz	-47.80	-13.00	-34.80	PK	Hor
6*	8.950GHz	-41.14	-13.00	-28.14	PK	Hor

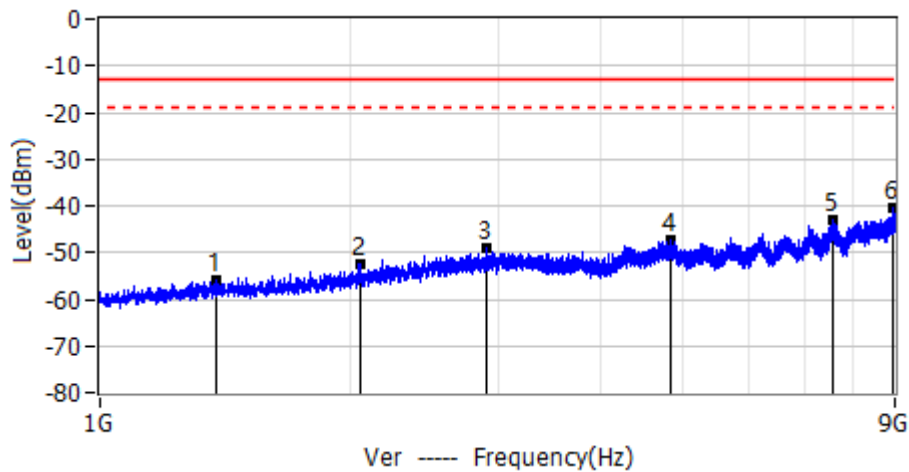

No.	Frequency	Level dBm	Limit dBm	Margin dB	Detector	Polar
1*	1.378GHz	-55.83	-13.00	-42.83	PK	Ver
2*	2.057GHz	-52.45	-13.00	-39.45	PK	Ver
3*	2.905GHz	-49.12	-13.00	-36.12	PK	Ver
4*	4.838GHz	-47.47	-13.00	-34.47	PK	Ver
5*	7.599GHz	-42.97	-13.00	-29.97	PK	Ver
6*	8.930GHz	-40.25	-13.00	-27.25	PK	Ver

APPENDIX II- PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※