





Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 25°C
M/N: A180	Humidity: 62%RH
Test Voltage: Battery	Test Data: 2023-04-08
Test Mode: 802.11n20 2437	
Note:	

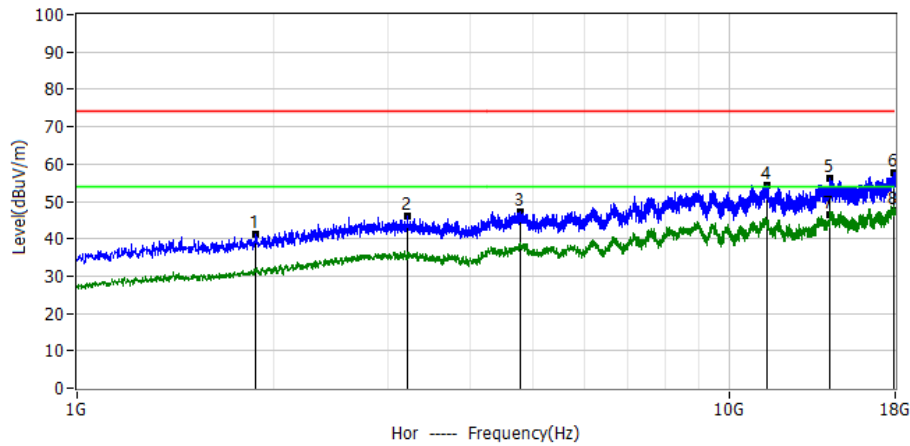


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.878GHz	58.63	-17.47	41.16	74.00	-32.84	PK	Hor
2*	3.212GHz	54.51	-8.41	46.10	74.00	-27.90	PK	Hor
3*	4.791GHz	53.29	-5.98	47.31	74.00	-26.69	PK	Hor
4*	11.436GHz	52.37	1.89	54.26	74.00	-19.74	PK	Hor
5*	14.292GHz	50.28	5.90	56.18	74.00	-17.82	PK	Hor
6*	17.955GHz	49.22	8.49	57.71	74.00	-16.29	PK	Hor
7*	14.292GHz	40.70	5.90	46.60	54.00	-7.40	AV	Hor
8*	17.955GHz	39.21	8.49	47.70	54.00	-6.30	AV	Hor

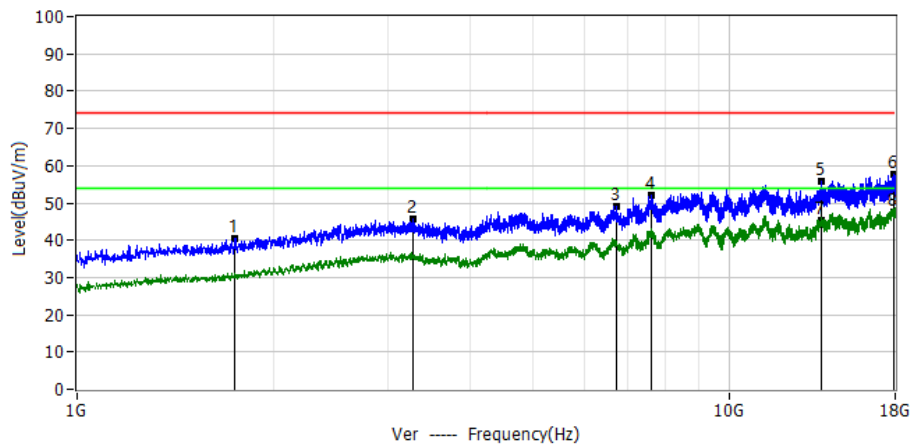


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.744GHz	59.42	-18.80	40.62	74.00	-33.38	PK	Ver
2*	3.282GHz	54.10	-8.43	45.67	74.00	-28.33	PK	Ver
3*	6.716GHz	55.40	-6.19	49.21	74.00	-24.79	PK	Ver
4*	7.590GHz	56.15	-4.24	51.91	74.00	-22.09	PK	Ver
5*	13.871GHz	50.40	5.43	55.83	74.00	-18.17	PK	Ver
6*	17.917GHz	49.08	8.46	57.54	74.00	-16.46	PK	Ver
7*	13.871GHz	39.97	5.43	45.40	54.00	-8.60	AV	Ver
8*	17.917GHz	39.24	8.46	47.70	54.00	-6.30	AV	Ver



Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 25°C
M/N: A180	Humidity: 62%RH
Test Voltage: Battery	Test Data: 2023-04-08
Test Mode: 802.11n20 2462	
Note:	

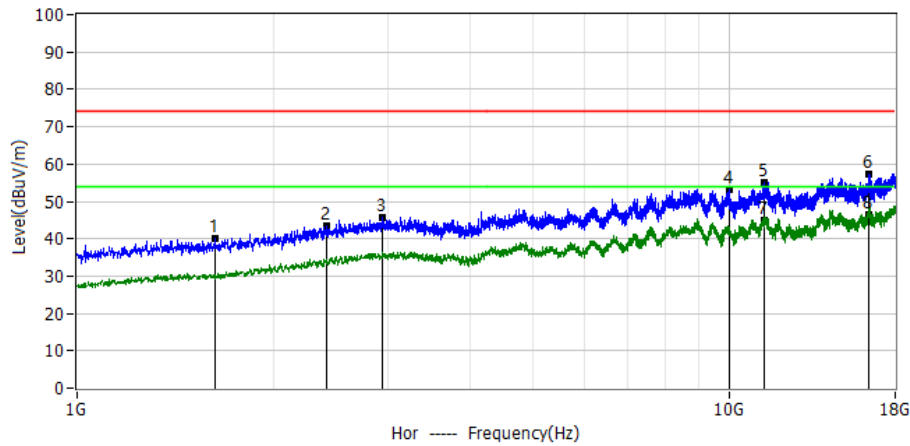

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.629GHz	59.80	-19.90	39.90	74.00	-34.10	PK	Hor
2*	2.409GHz	55.28	-11.94	43.34	74.00	-30.66	PK	Hor
3*	2.934GHz	54.54	-8.69	45.85	74.00	-28.15	PK	Hor
4*	10.019GHz	54.21	-1.13	53.08	74.00	-20.92	PK	Hor
5*	11.334GHz	53.14	1.83	54.97	74.00	-19.03	PK	Hor
6*	16.357GHz	50.40	6.82	57.22	74.00	-16.78	PK	Hor
7*	11.334GHz	43.27	1.83	45.10	54.00	-8.90	AV	Hor
8*	16.357GHz	39.78	6.82	46.60	54.00	-7.40	AV	Hor

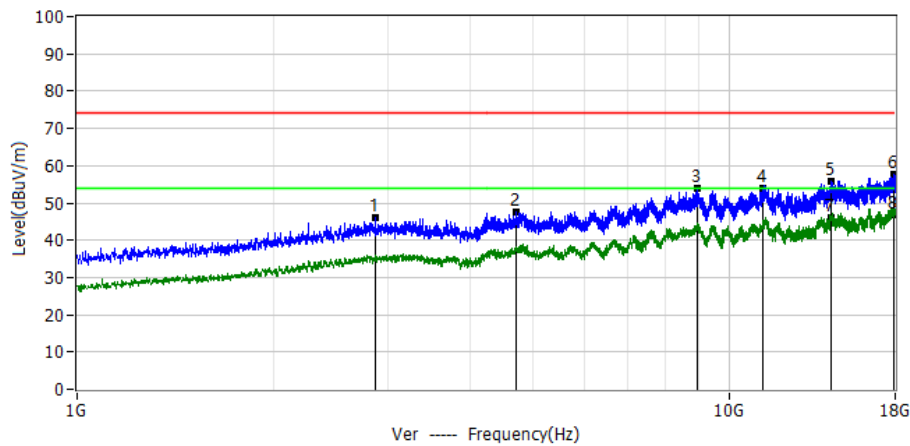


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.868GHz	55.12	-9.04	46.08	74.00	-27.92	PK	Ver
2*	4.708GHz	53.37	-5.92	47.45	74.00	-26.55	PK	Ver
3*	8.952GHz	55.10	-1.31	53.79	74.00	-20.21	PK	Ver
4*	11.270GHz	52.14	1.79	53.93	74.00	-20.07	PK	Ver
5*	14.320GHz	49.93	5.90	55.83	74.00	-18.17	PK	Ver
6*	17.875GHz	49.22	8.43	57.65	74.00	-16.35	PK	Ver
7*	14.320GHz	40.20	5.90	46.10	54.00	-7.90	AV	Ver
8*	17.875GHz	38.57	8.43	47.00	54.00	-7.00	AV	Ver




3.2.7 TEST RESULTS(Band edge Requirements)

Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 26.2°C
M/N: A180	Humidity: 56%RH
Test Voltage: Battery	Test Data: 2023-04-11
Test Mode: 802.11n20 2412	
Note:	

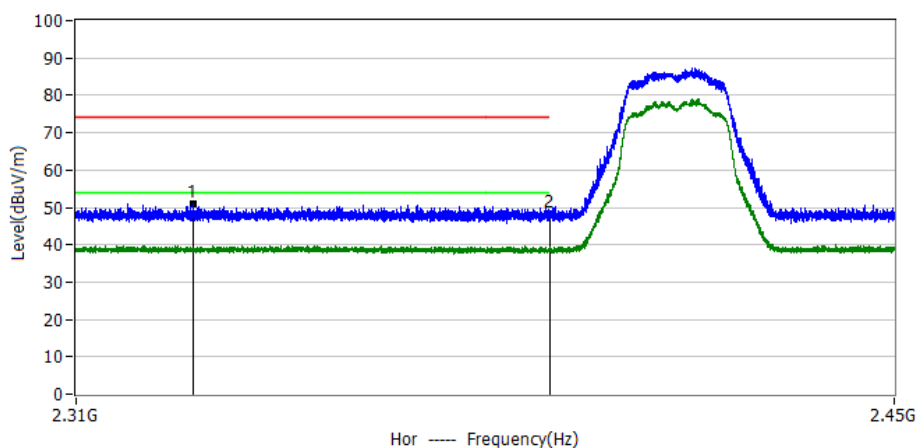


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3295GHz	16.99	34.10	51.09	74.00	-22.91	PK	Hor
2*	2.3900GHz	14.25	33.95	48.20	74.00	-25.80	PK	Hor

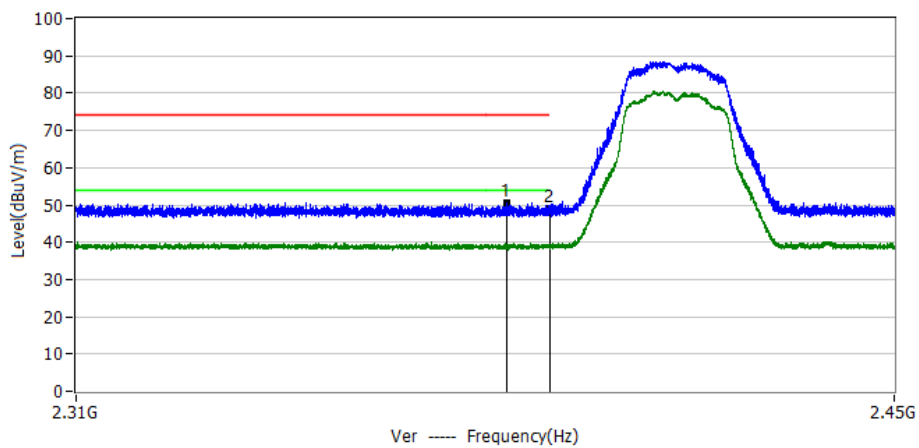


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3826GHz	16.58	33.97	50.55	74.00	-23.45	PK	Ver
2*	2.3900GHz	15.15	33.95	49.10	74.00	-24.90	PK	Ver



Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 26.2°C
M/N: A180	Humidity: 56%RH
Test Voltage: Battery	Test Data: 2023-04-11
Test Mode: 802.11n20 2462	
Note:	

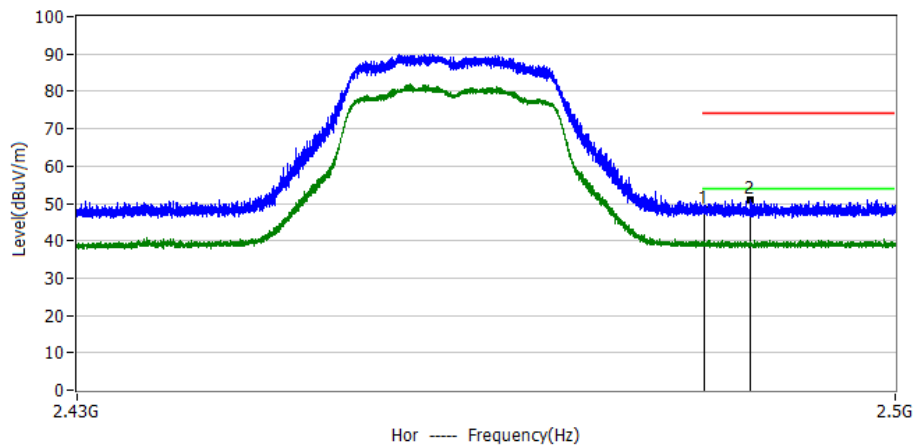

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	14.17	34.13	48.30	74.00	-25.70	PK	Hor
2*	2.4874GHz	16.93	34.14	51.07	74.00	-22.93	PK	Hor

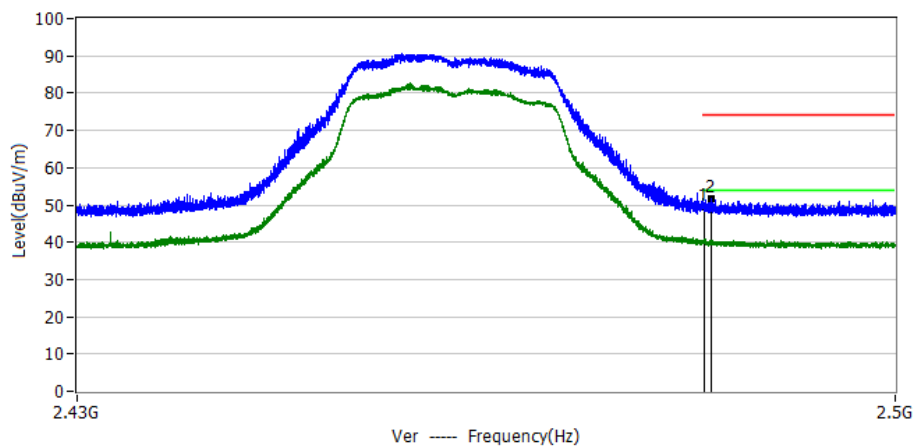

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	15.47	34.13	49.60	74.00	-24.40	PK	Ver
2*	2.4841GHz	17.45	34.13	51.58	74.00	-22.42	PK	Ver



4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2432 MHz Upper Band Edge: 2442 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.6 TEST RESULTS

For the measurement records, refer to the appendix I.



5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

FCC Part15.247 , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100\text{ kHz} \geq \text{RBW} \geq 3\text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.6 TEST RESULTS

For the measurement records, refer to the appendix I.



6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.6 TEST RESULTS

For the measurement records, refer to the appendix I.



7. PEAK OUTPUT POWER TEST

7.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq$ [3 $\times$ RBW].
- Set span $\geq$ [3 $\times$ RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW $\geq$ [3 $\times$ RBW].
- Set the span $\geq$ [1.5 $\times$ DTS bandwidth].
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.


PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

7.6 TEST RESULTS

For the measurement records, refer to the appendix I.



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA


The EUT antenna is PIFA Antenna. It comply with the standard requirement.





APPENDIX I:TEST RESULTS


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	90.4	0.44	1.42
NVNT	b	2437	Ant1	90.39	0.44	1.42
NVNT	b	2462	Ant1	90.36	0.44	1.42
NVNT	g	2412	Ant1	61.14	2.14	8.89
NVNT	g	2437	Ant1	61.14	2.14	8.89
NVNT	g	2462	Ant1	61.11	2.14	8.91
NVNT	n20	2412	Ant1	61.14	2.14	8.89
NVNT	n20	2437	Ant1	61.14	2.14	8.89
NVNT	n20	2462	Ant1	61.04	2.14	8.93
NVNT	n40	2422	Ant1	54.1	2.67	13.66
NVNT	n40	2437	Ant1	54.22	2.66	13.66
NVNT	n40	2452	Ant1	54.22	2.66	13.66

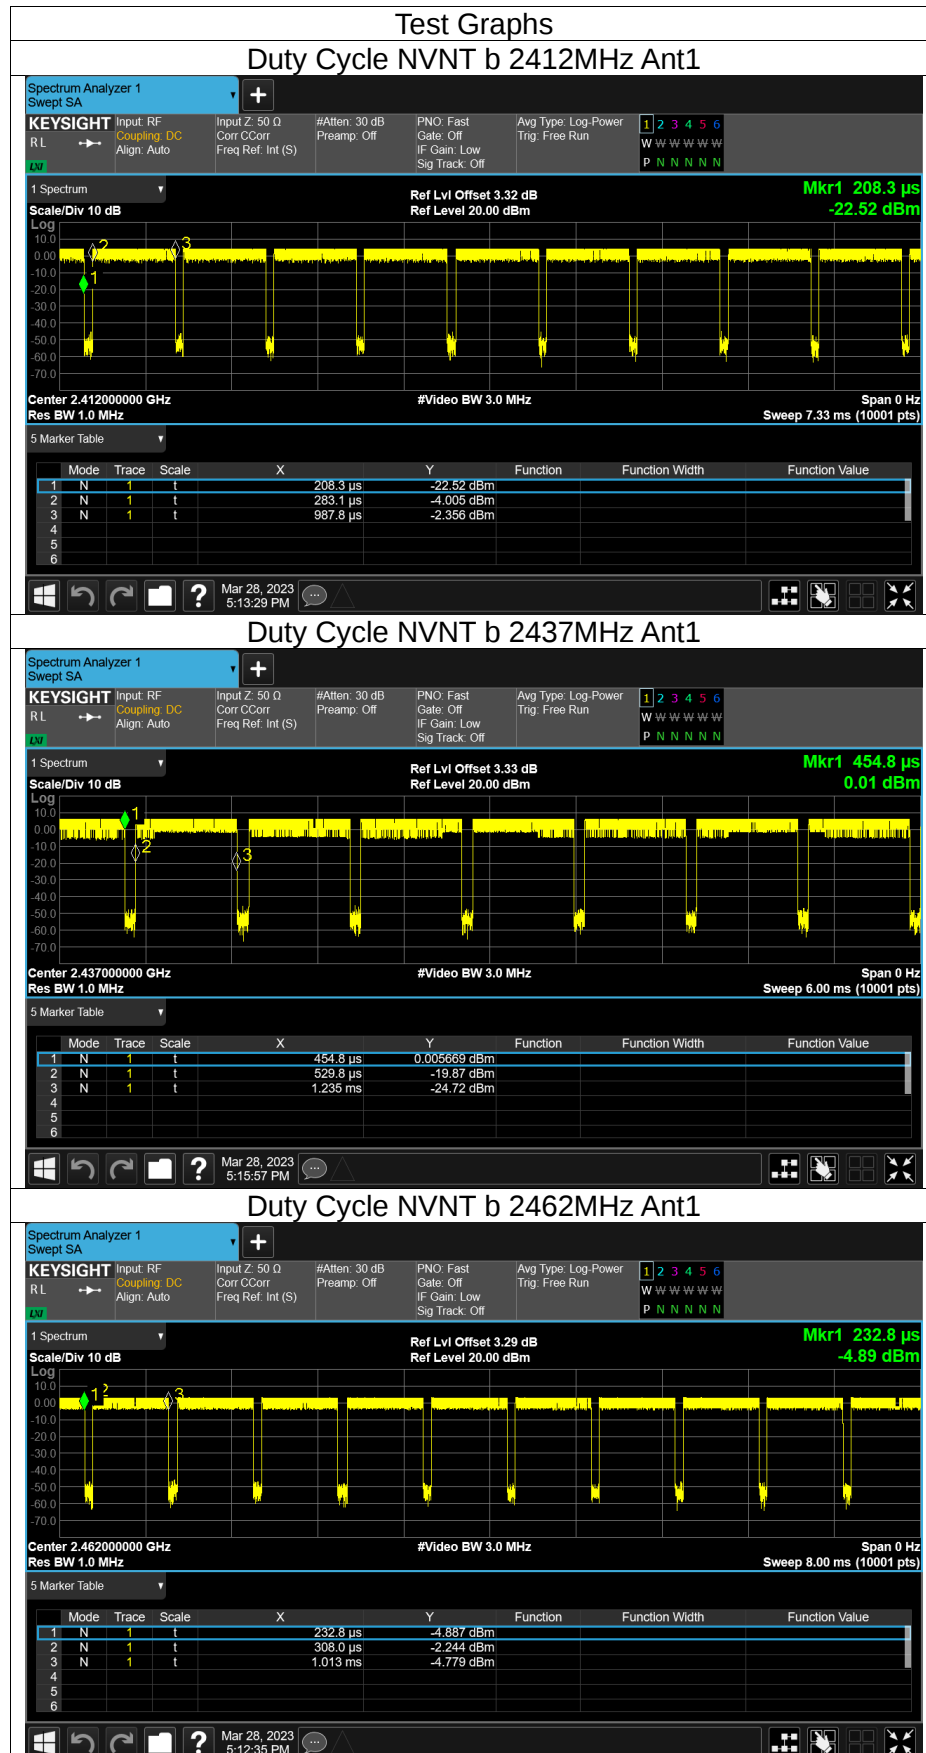

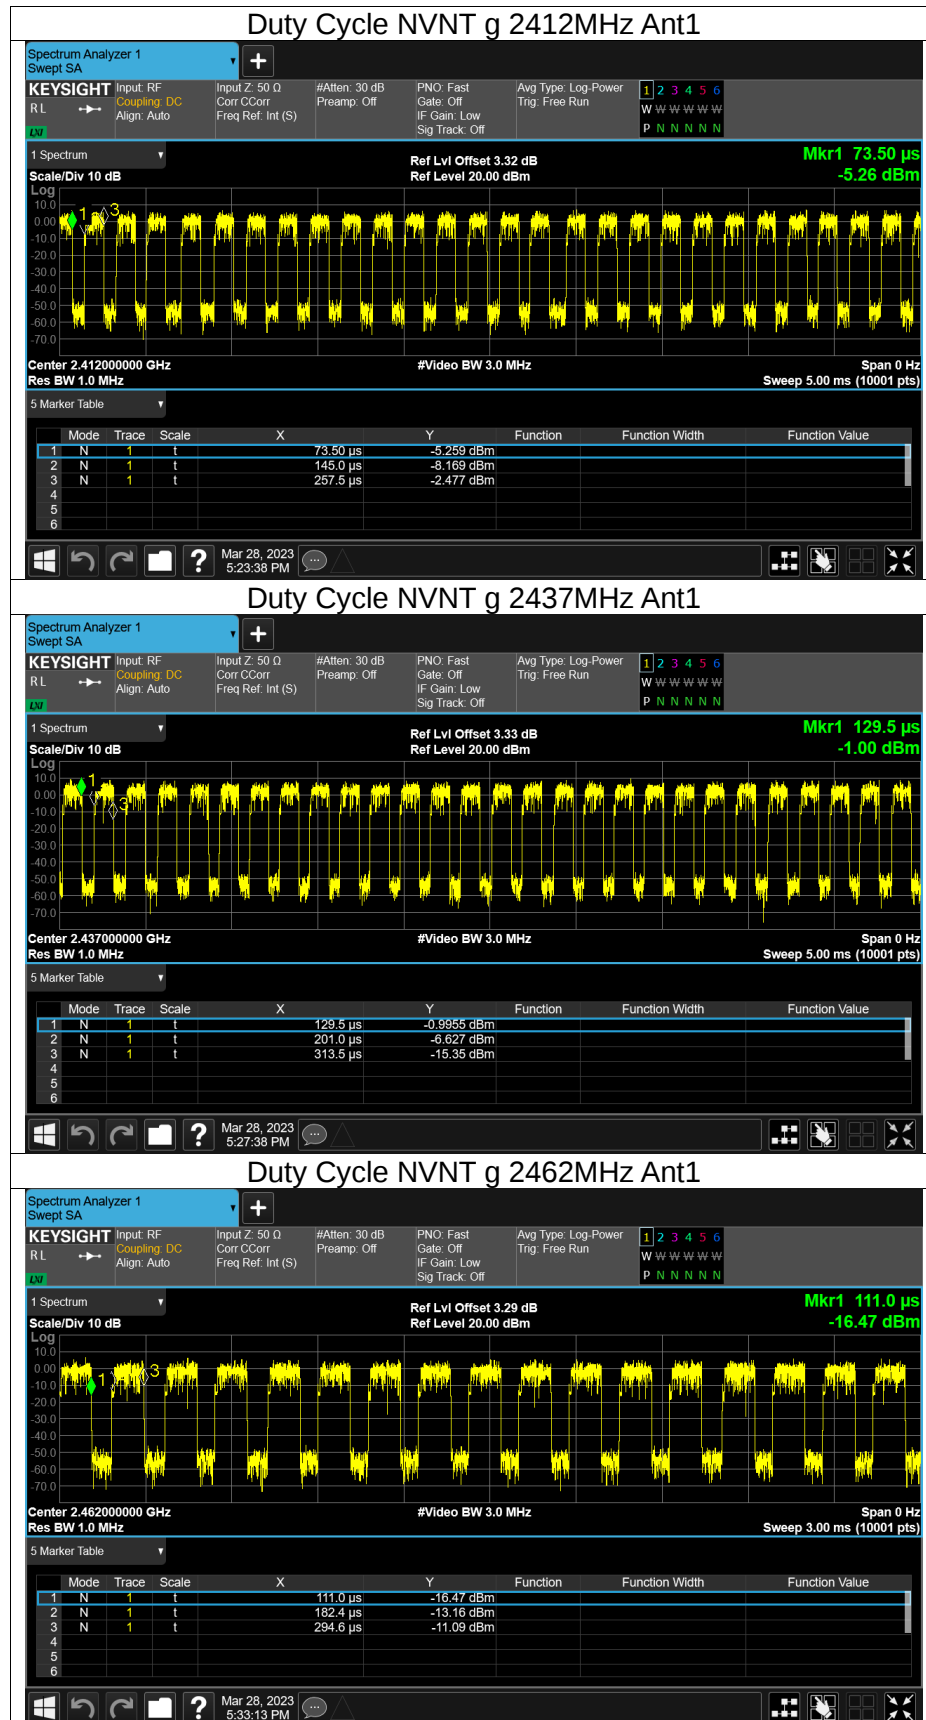

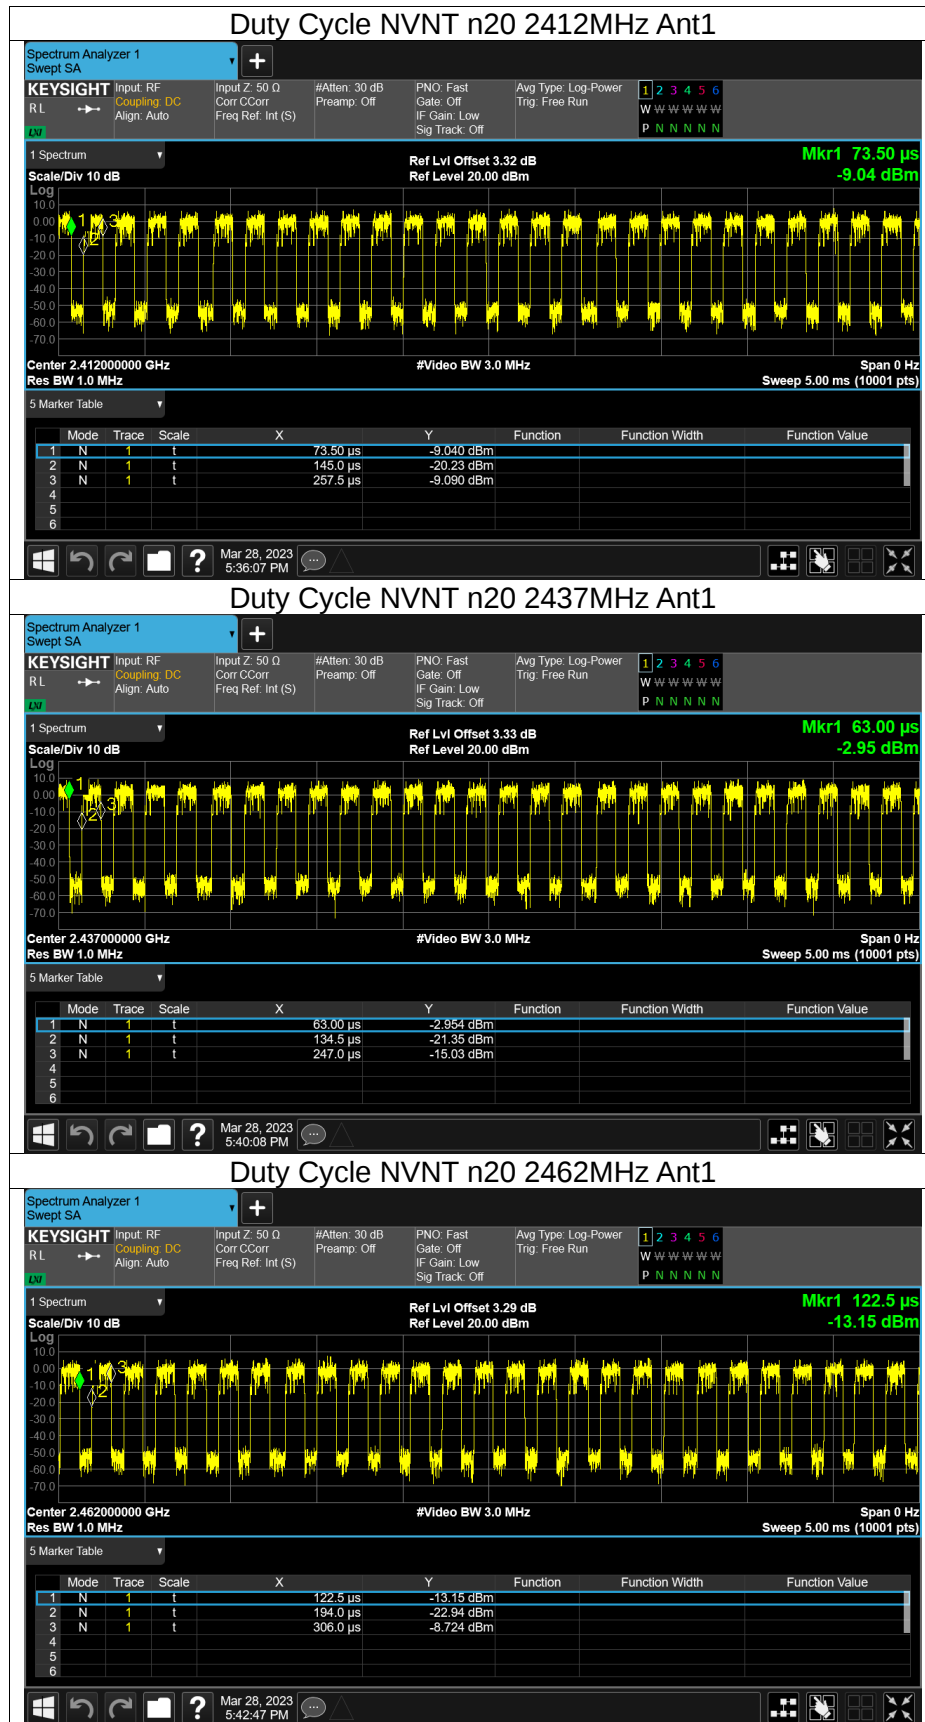

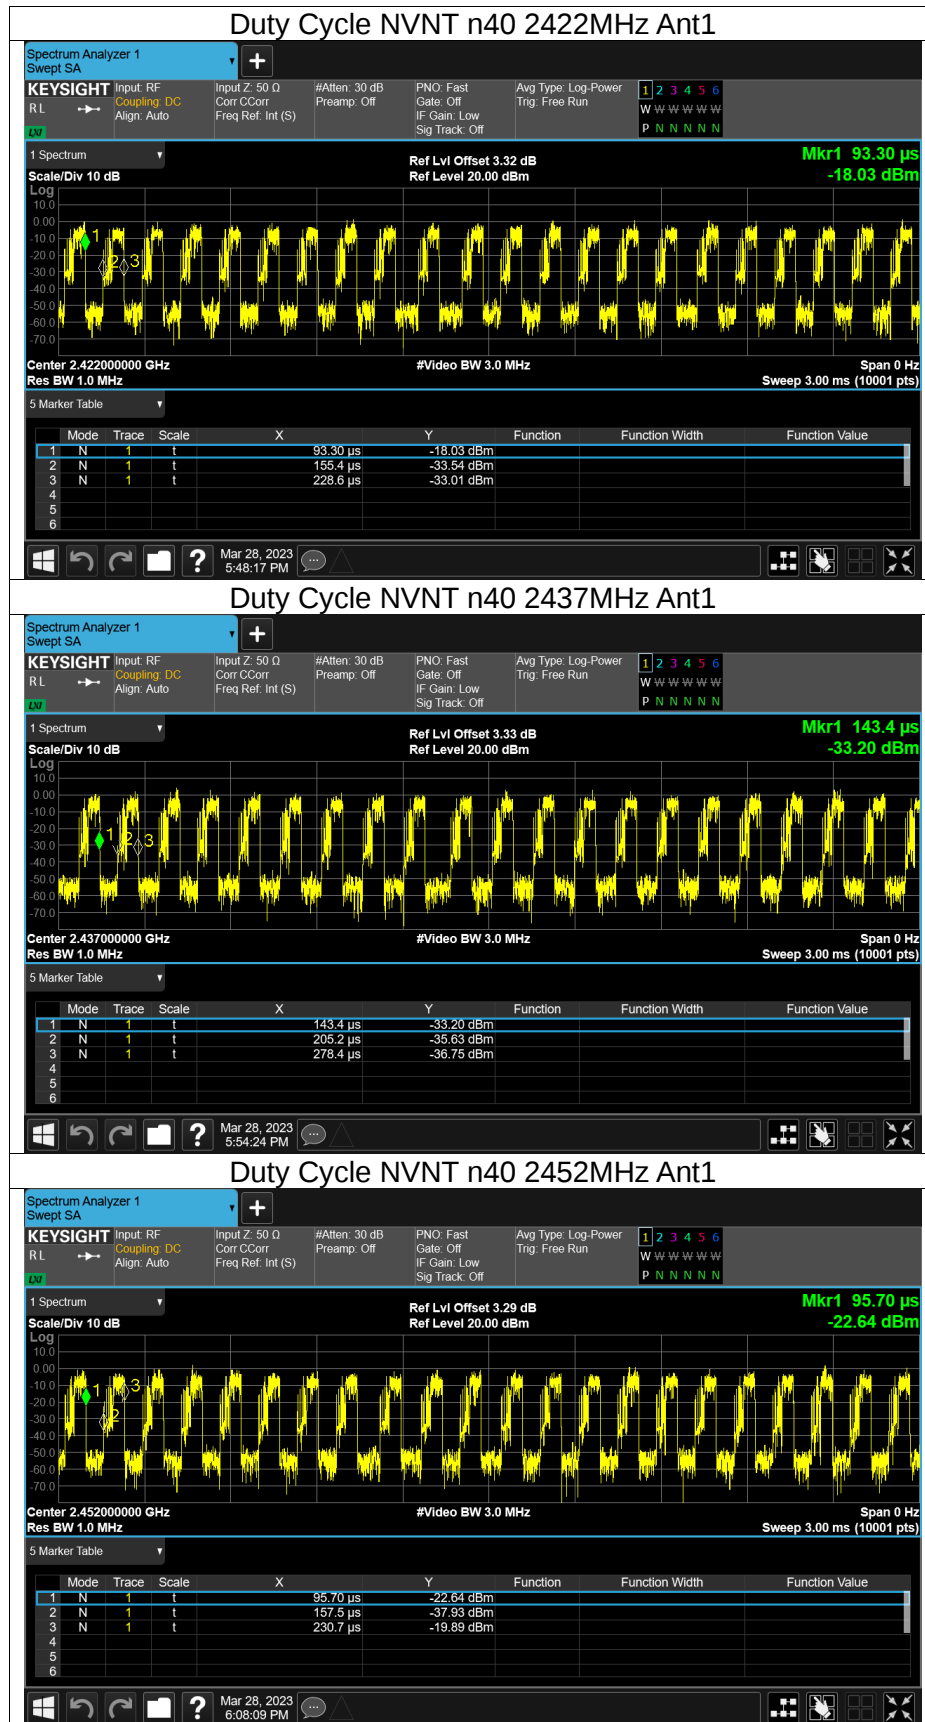






Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	11.87	30	Pass
NVNT	b	2437	Ant1	13.94	30	Pass
NVNT	b	2462	Ant1	10.3	30	Pass
NVNT	g	2412	Ant1	16.71	30	Pass
NVNT	g	2437	Ant1	18.66	30	Pass
NVNT	g	2462	Ant1	15.63	30	Pass
NVNT	n20	2412	Ant1	16.76	30	Pass
NVNT	n20	2437	Ant1	18.66	30	Pass
NVNT	n20	2462	Ant1	15.85	30	Pass
NVNT	n40	2422	Ant1	16.31	30	Pass
NVNT	n40	2437	Ant1	17.97	30	Pass
NVNT	n40	2452	Ant1	15.52	30	Pass



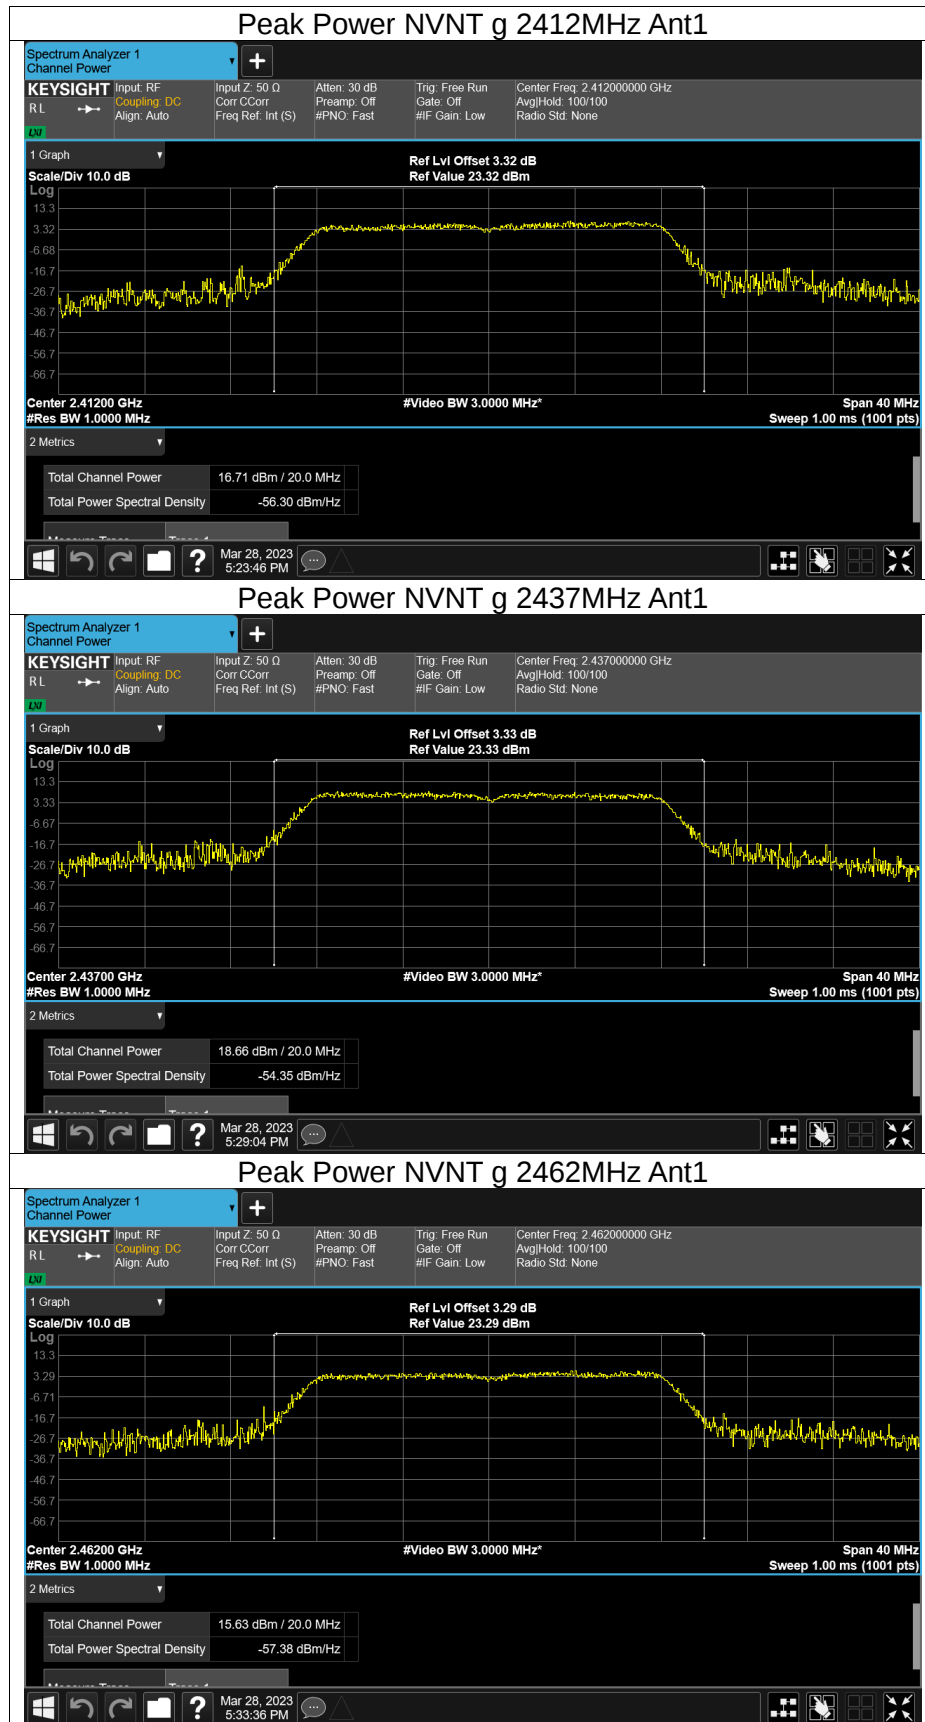

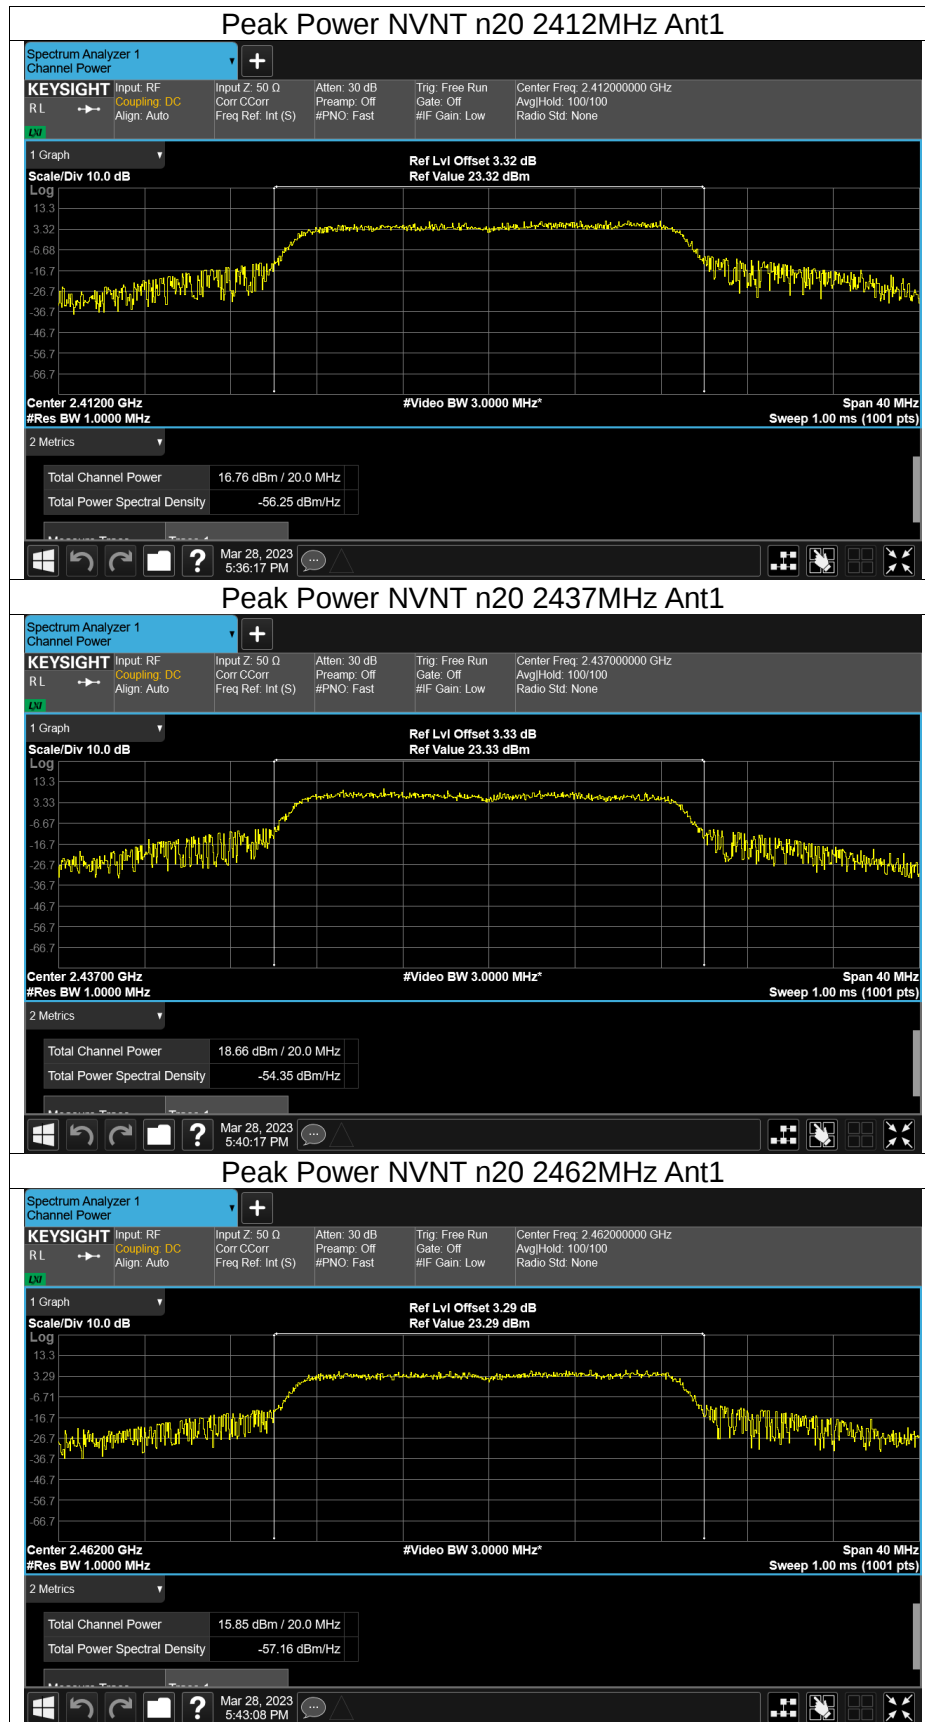

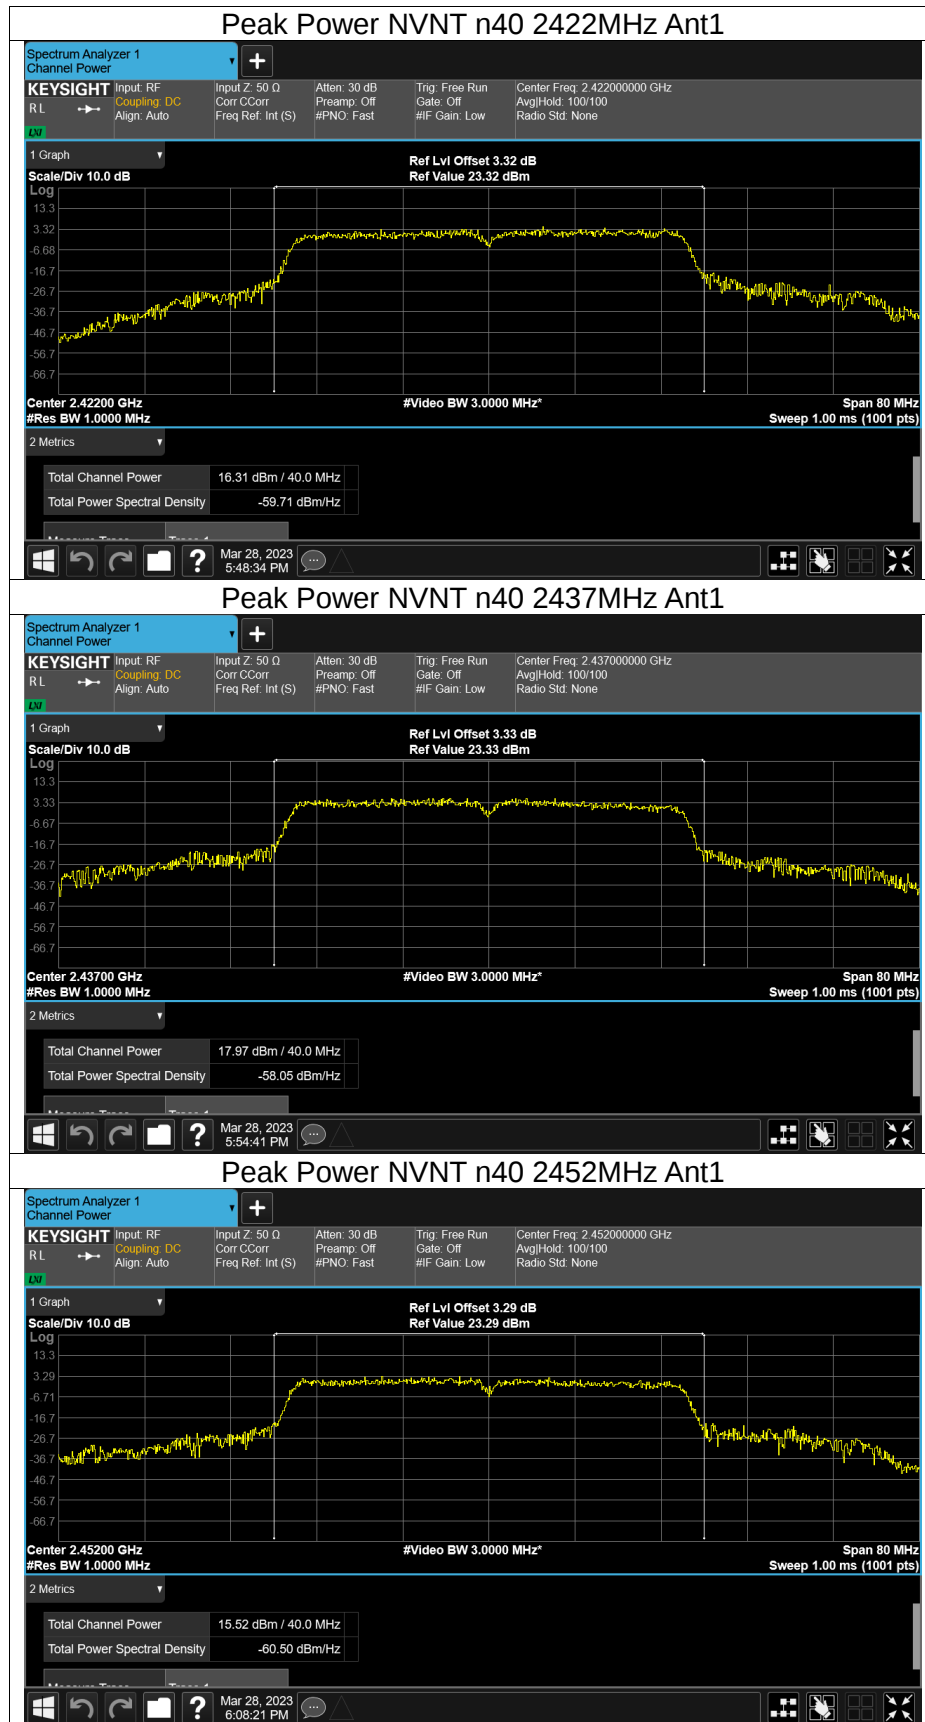



-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	9.489	0.5	Pass
NVNT	b	2437	Ant1	9.406	0.5	Pass
NVNT	b	2462	Ant1	9.569	0.5	Pass
NVNT	g	2412	Ant1	15.915	0.5	Pass
NVNT	g	2437	Ant1	16.304	0.5	Pass
NVNT	g	2462	Ant1	16.083	0.5	Pass
NVNT	n20	2412	Ant1	16.433	0.5	Pass
NVNT	n20	2437	Ant1	16.754	0.5	Pass
NVNT	n20	2462	Ant1	16.691	0.5	Pass
NVNT	n40	2422	Ant1	35.22	0.5	Pass
NVNT	n40	2437	Ant1	35.245	0.5	Pass
NVNT	n40	2452	Ant1	35.141	0.5	Pass

