




Project: LGT23A058	Test Engineer: Dylan.shi
EUT: TABLET	Temperature: 24.6°C
M/N: T108	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2023-02-17
Test Mode: DH5 2480	
Note:	




No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.125GHz	54.81	-6.54	48.27	74.00	-25.73	PK	Ver
2*	8.074GHz	56.40	-3.79	52.61	74.00	-21.39	PK	Ver
3*	11.502GHz	52.61	1.93	54.54	74.00	-19.46	PK	Ver
4*	5.125GHz	42.64	-6.54	36.10	54.00	-17.90	AV	Ver
5*	8.074GHz	45.59	-3.79	41.80	54.00	-12.20	AV	Ver
6*	11.502GHz	40.27	1.93	42.20	54.00	-11.80	AV	Ver

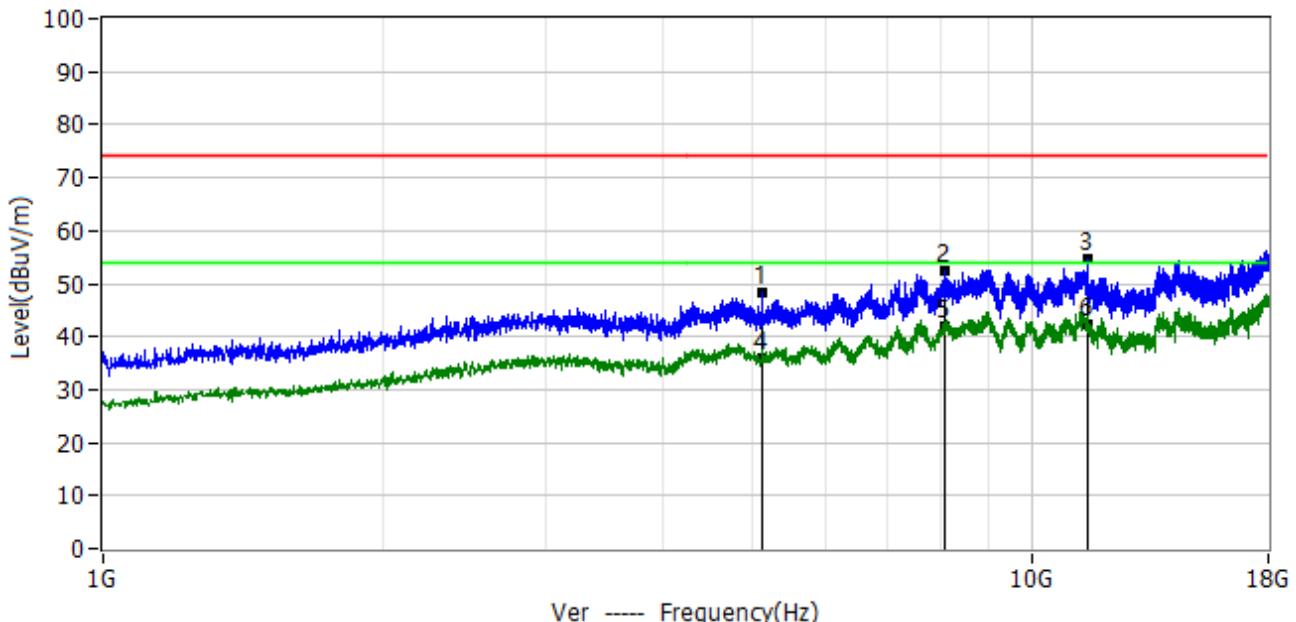

3.2.8 TEST RESULTS(BAND EDGE REQUIREMENTS)


Project: LGT23A058	Test Engineer: Dylan.shi
EUT: TABLET	Temperature: 22°C
M/N: T108	Humidity: 43%RH
Test Voltage: Battery	Test Data: 2023-02-16
Test Mode: 3-DH5 2402	
Note:	

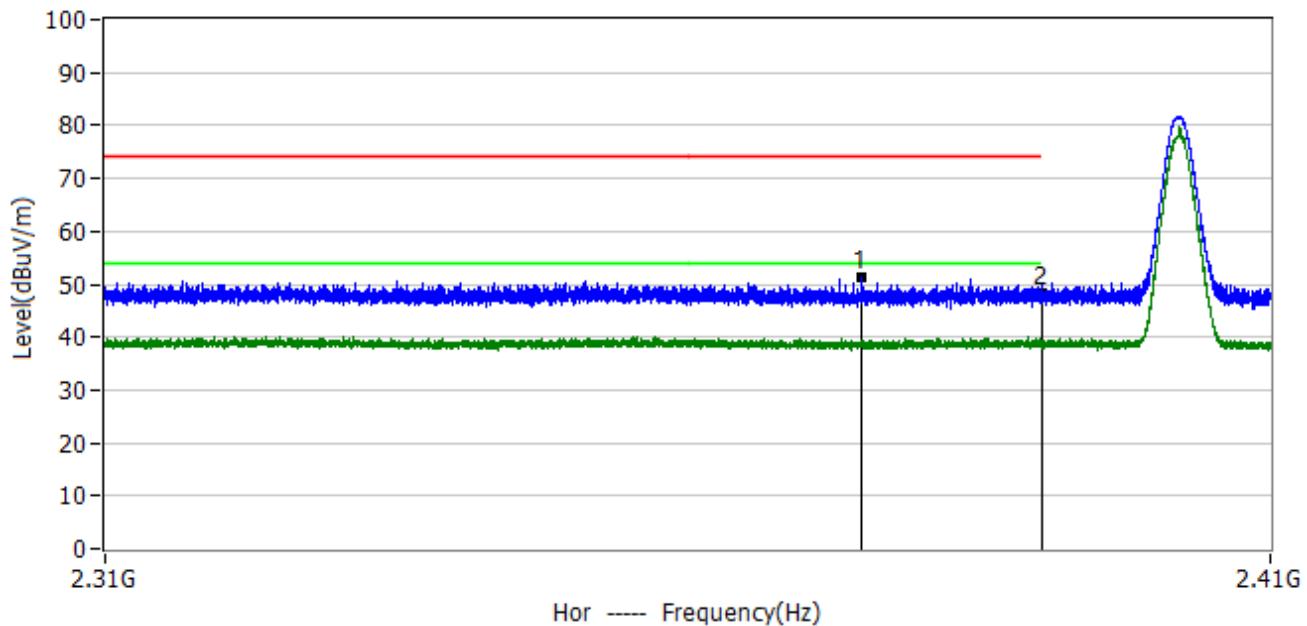

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3745GHz	17.25	33.99	51.24	74.00	-22.76	PK	Hor
2*	2.3900GHz	14.55	33.95	48.50	74.00	-25.50	PK	Hor




Project: LGT23A058	Test Engineer: Dylan.shi
EUT: TABLET	Temperature: 22°C
M/N: T108	Humidity: 43%RH
Test Voltage: Battery	Test Data: 2023-02-16
Test Mode: 3-DH5 2402	
Note:	

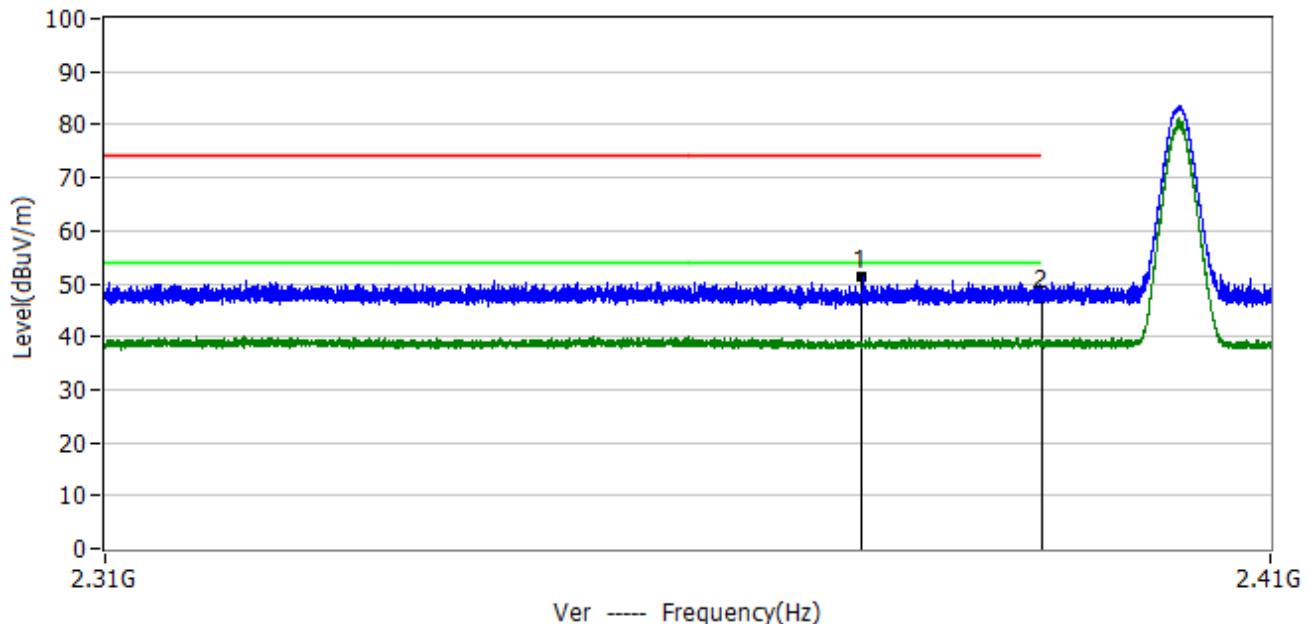

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3745GHz	17.14	33.99	51.13	74.00	-22.87	PK	Ver
2*	2.3900GHz	13.55	33.95	47.50	74.00	-26.50	PK	Ver




Project: LGT23A058	Test Engineer: Dylan.shi
EUT: TABLET	Temperature: 22°C
M/N: T108	Humidity: 43%RH
Test Voltage: Battery	Test Data: 2023-02-16
Test Mode: 3-DH5 2480	
Note:	

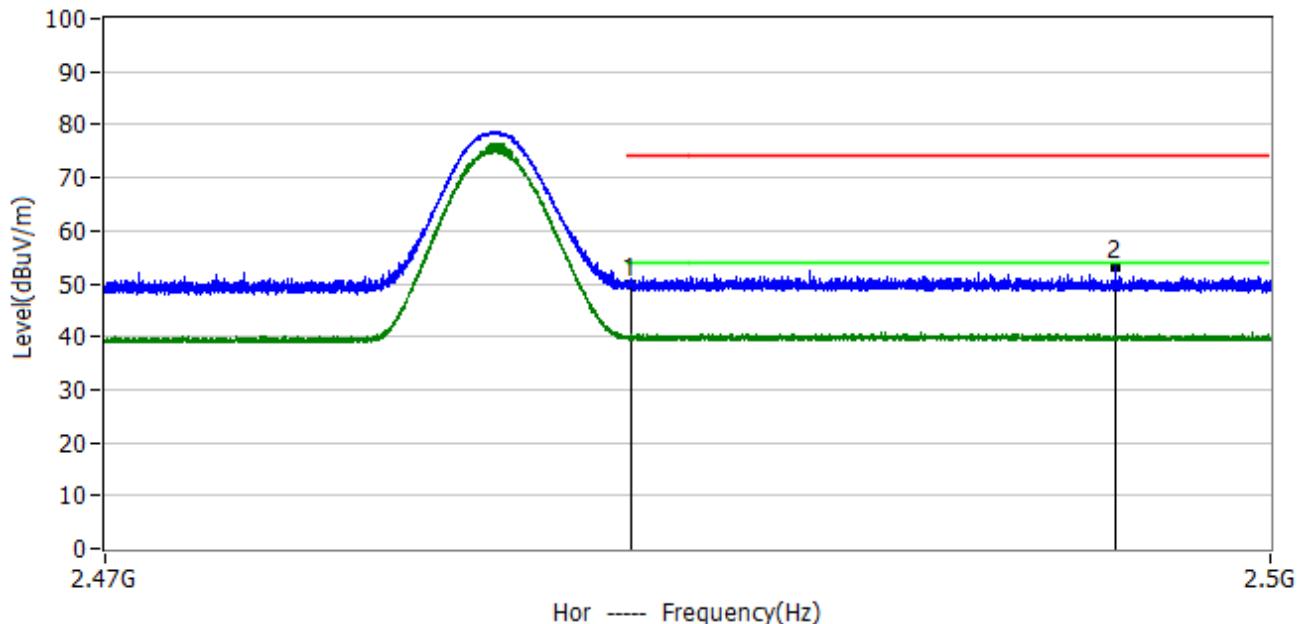

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	15.67	34.13	49.80	74.00	-24.20	PK	Hor
2*	2.4960GHz	19.04	34.16	53.20	74.00	-20.80	PK	Hor



Project: LGT23A058	Test Engineer: Dylan.shi
EUT: TABLET	Temperature: 22°C
M/N: T108	Humidity: 43%RH
Test Voltage: Battery	Test Data: 2023-02-16
Test Mode: 3-DH5 2480	
Note:	

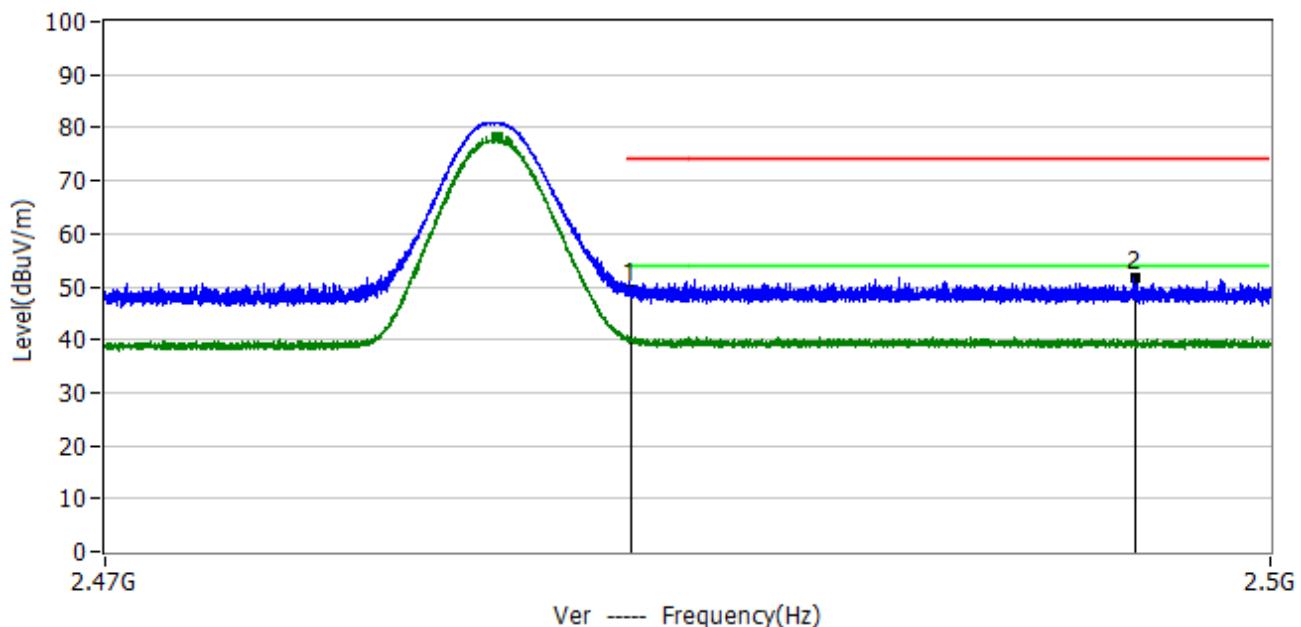

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	15.47	34.13	49.60	74.00	-24.40	PK	Ver
2*	2.4965GHz	17.64	34.16	51.80	74.00	-22.20	PK	Ver



4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Hopping Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300– 2403 MHz Upper Band Edge: 2479 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Tune the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, the span is set to be greater than RBW.

4.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.5 TEST RESULTS

For the measurement records, refer to the appendix I.



5. NUMBER OF HOPPING CHANNEL

5.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating FrequencyRange
RB	300KHz
VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 300KHz, VBW=300KHz, Sweep time = Auto.

5.3 TEST SETUP



5.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.5 TEST RESULTS

For the measurement records, refer to the appendix I.



6. AVERAGE TIME OF OCCUPANCY

6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer.
- b. Set RBW =1MHz/VBW =3MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- e. f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $3.37 \times 31.6 = 106.6$.
- j. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $5.06 \times 31.6 = 160$.
- k. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $10.12 \times 31.6 = 320$.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.5 TEST RESULTS

For the measurement records, refer to the appendix I.



7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 LIMIT

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 20 dB Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.5 TEST RESULTS

For the measurement records, refer to the appendix I.



8. BANDWIDTH TEST

8.1 LIMIT

FCC Part15 15.247, Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)	Bandwidth	N/A	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

8.5 TEST RESULTS

For the measurement records, refer to the appendix I.



9. OUTPUT POWER TEST

9.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)&(b)(1)	Output Power	1 W or 0.125W if channel separation > 2/3 bandwidth provided the systems operate with an output power no greater than 125 mW(20.97dBm)	2400-2483.5	PASS

9.2 TEST PROCEDURE

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

a) Use the following spectrum analyzer settings:

1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.

2) RBW > 20 dB bandwidth of the emission being measured.

3) VBW \geq RBW.

4) Sweep: Auto.

5) Detector function: Peak.

6) Trace: Max hold.

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power, after any corrections for external attenuators and cables.


e) A plot of the test results and setup description shall be included in the test report.

NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DSS bandwidth and shall use a fast-responding diode detector.

9.3 TEST SETUP

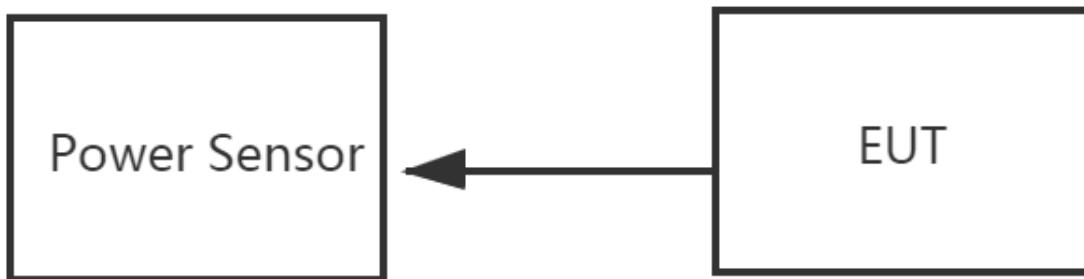

9.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.



9.5 TEST RESULTS

For the measurement records refer to the appendix I.



10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is PIFA antenna. It comply with the standard requirement.



APPENDIX I - TEST RESULTS

Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.406	129.108	318	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.661	280.709	169	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.91	296.82	102	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.398	126.166	317	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.65	270.6	164	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.898	301.392	104	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.397	125.849	317	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.646	265.006	161	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.897	344.743	119	31600	400	Pass



Test Graphs

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst






Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated




Dwell NVNT 1-DH3 2441MHz Ant1 One Burst



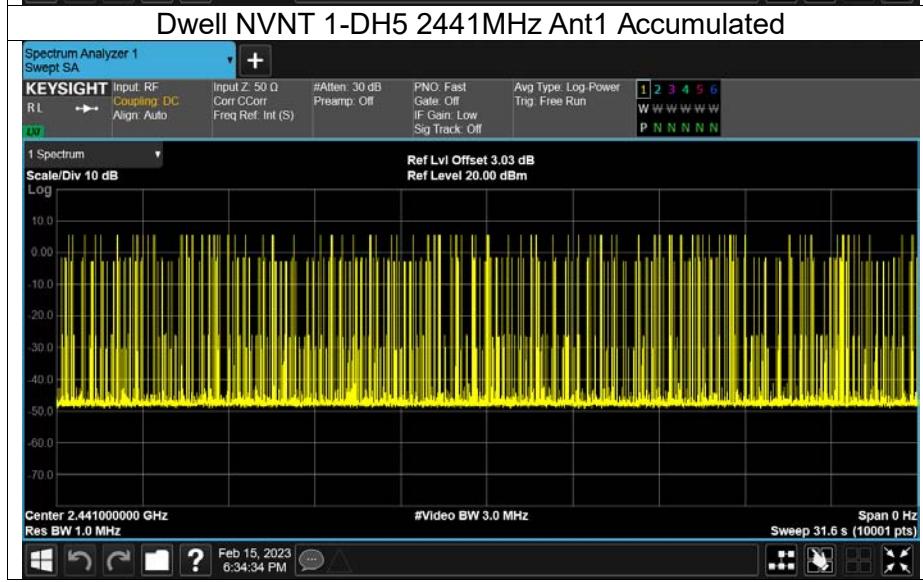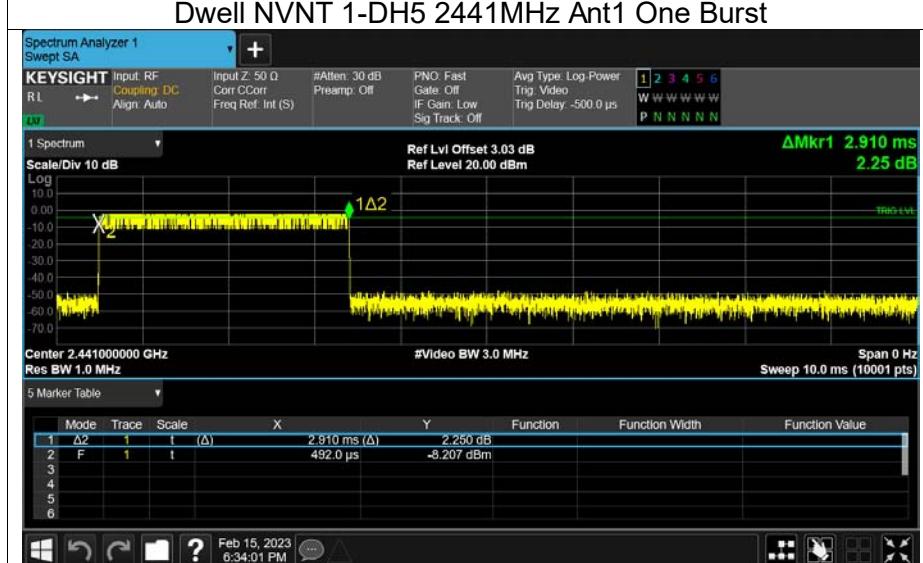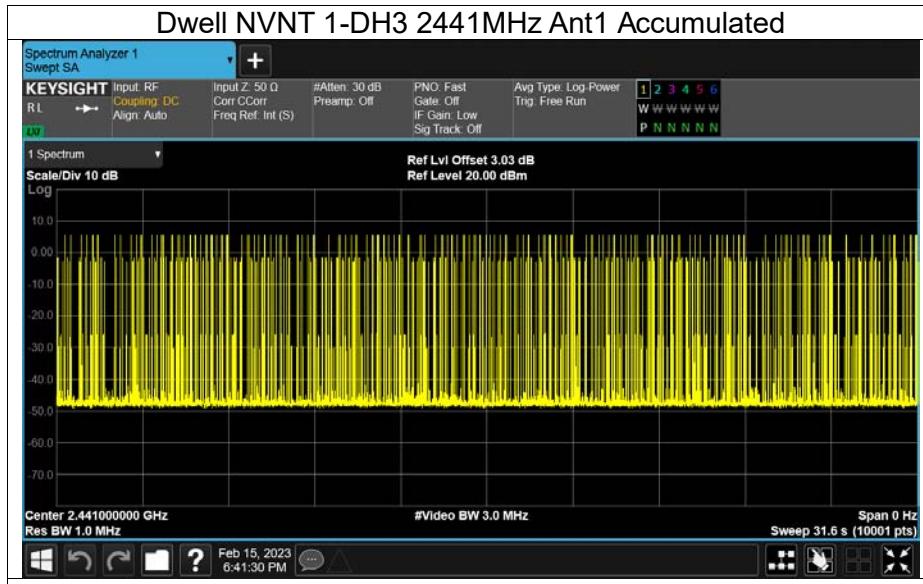



Dwell NVNT 2-DH1 2441MHz Ant1 One Burst



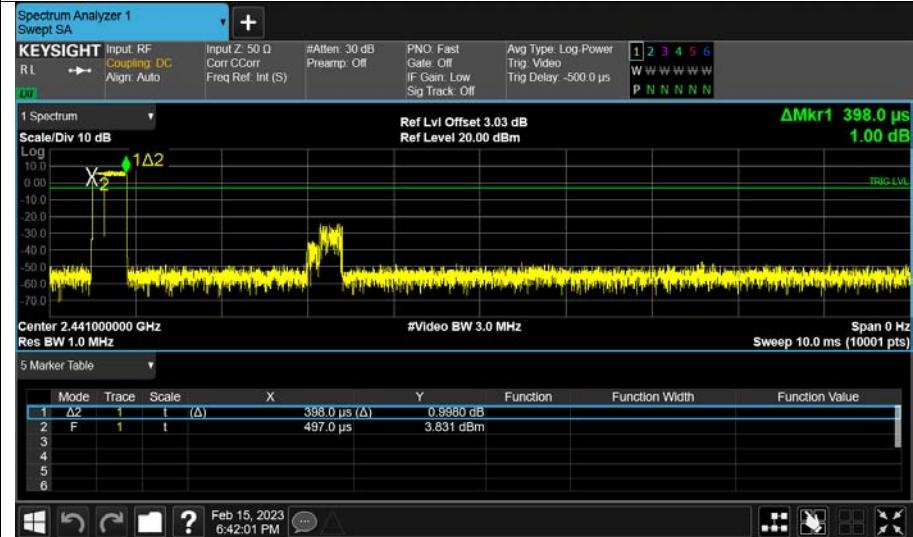


Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated



Dwell NVNT 2-DH3 2441MHz Ant1 One Burst



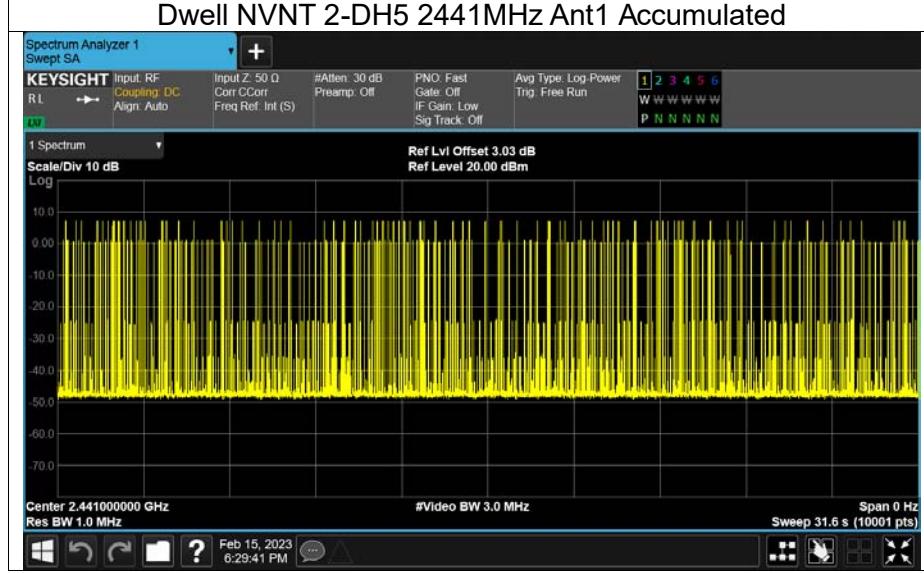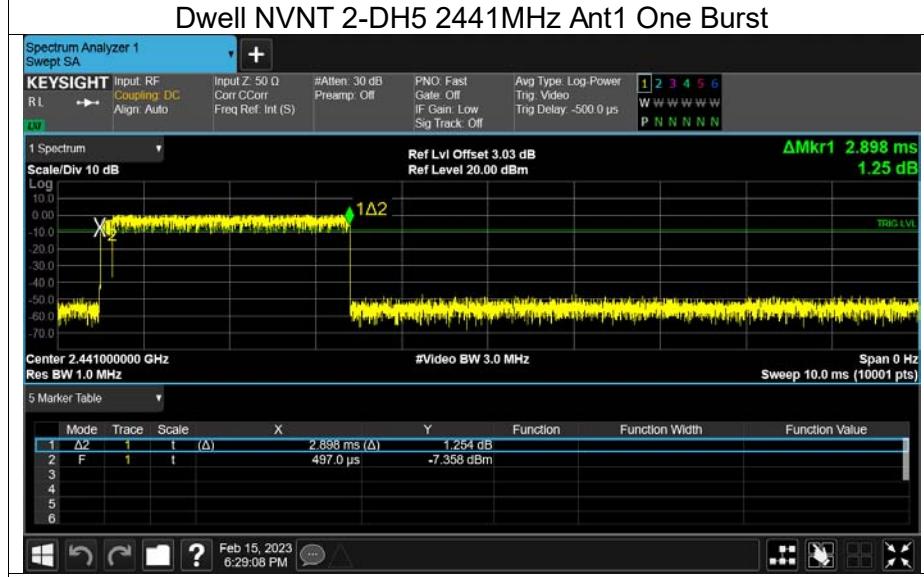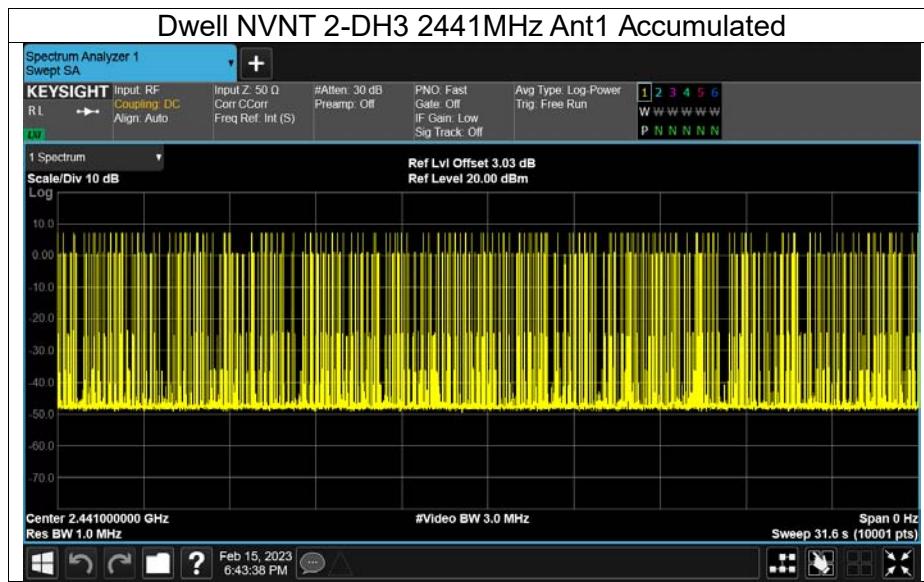




Dwell NVNT 3-DH1 2441MHz Ant1 One Burst




Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

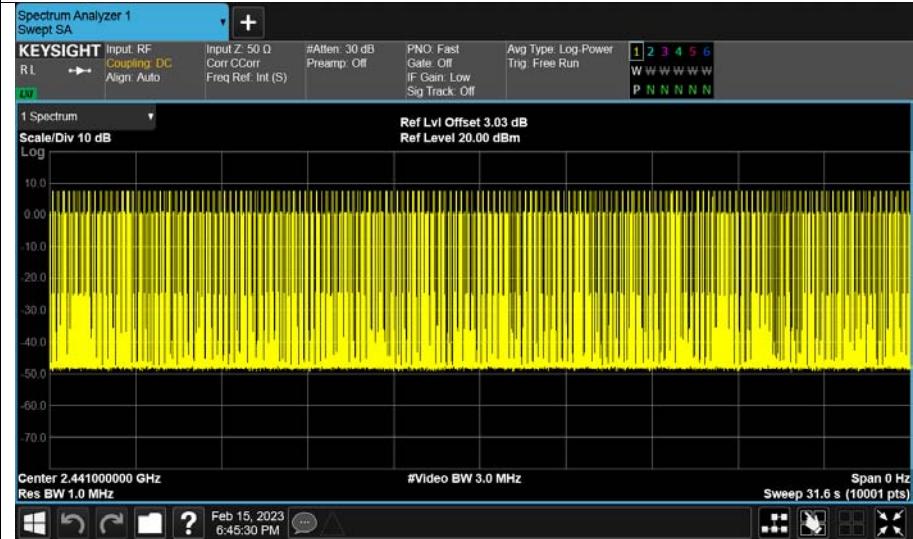

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst



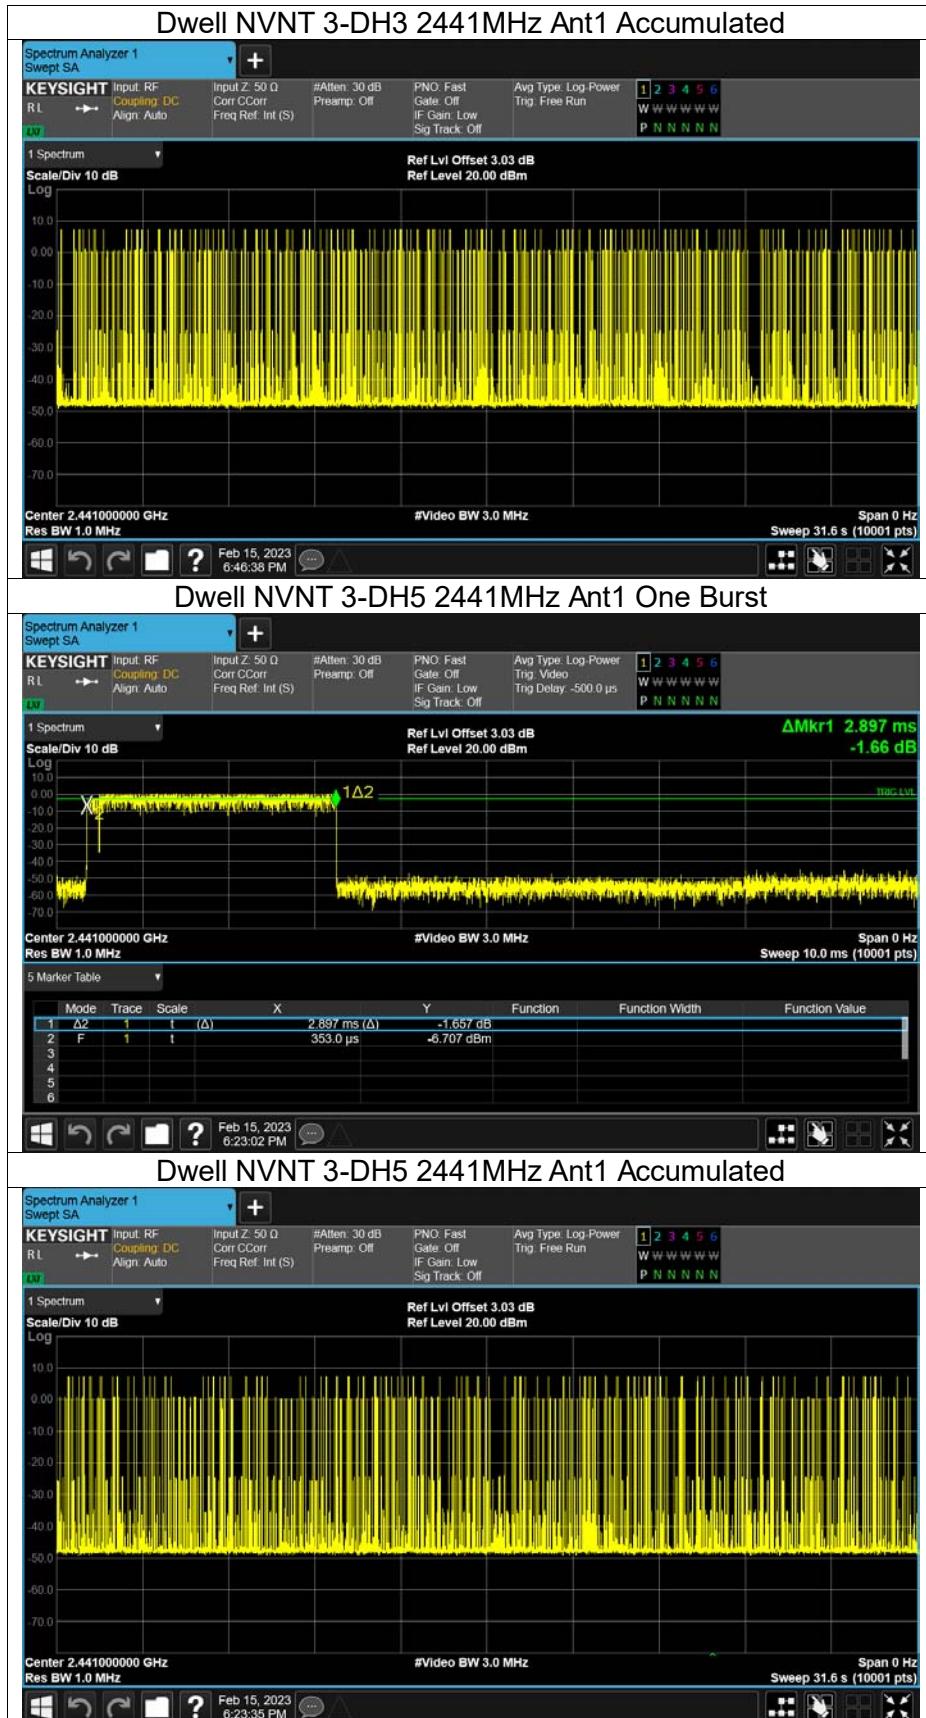



Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	77.6	1.1	0.34
NVNT	1-DH5	2441	Ant1	77.64	1.1	0.34
NVNT	1-DH5	2480	Ant1	77.64	1.1	0.34
NVNT	2-DH5	2402	Ant1	77.31	1.12	0.34
NVNT	2-DH5	2441	Ant1	77.3	1.12	0.35
NVNT	2-DH5	2480	Ant1	77.3	1.12	0.35
NVNT	3-DH5	2402	Ant1	77.31	1.12	0.34
NVNT	3-DH5	2441	Ant1	77.31	1.12	0.34
NVNT	3-DH5	2480	Ant1	77.25	1.12	0.35



Test Graphs

Duty Cycle NVNT 1-DH5 2402MHz Ant1



Duty Cycle NVNT 1-DH5 2441MHz Ant1



Duty Cycle NVNT 1-DH5 2480MHz Ant1





Duty Cycle NVNT 2-DH5 2402MHz Ant1



Duty Cycle NVNT 2-DH5 2441MHz Ant1



Duty Cycle NVNT 2-DH5 2480MHz Ant1







Duty Cycle NVNT 3-DH5 2402MHz Ant1



Duty Cycle NVNT 3-DH5 2441MHz Ant1

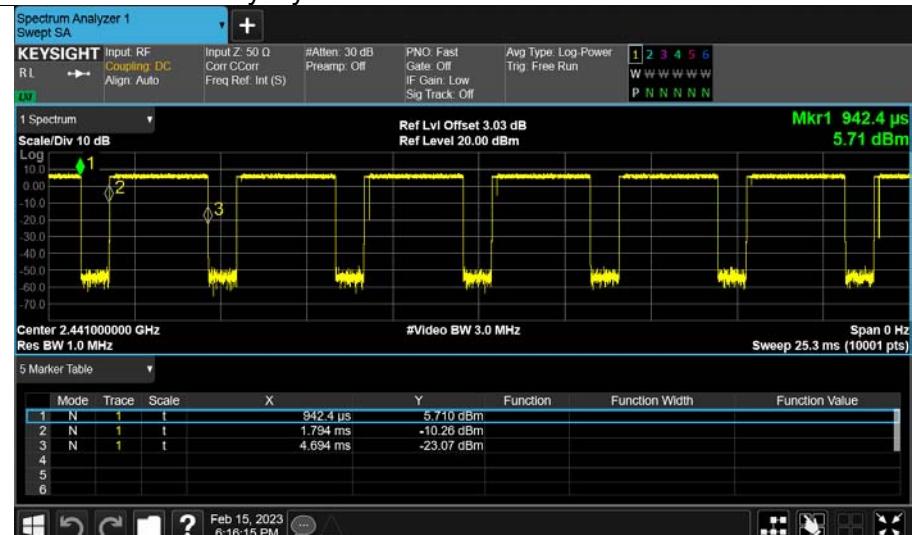

Duty Cycle NVNT 3-DH5 2480MHz Ant1

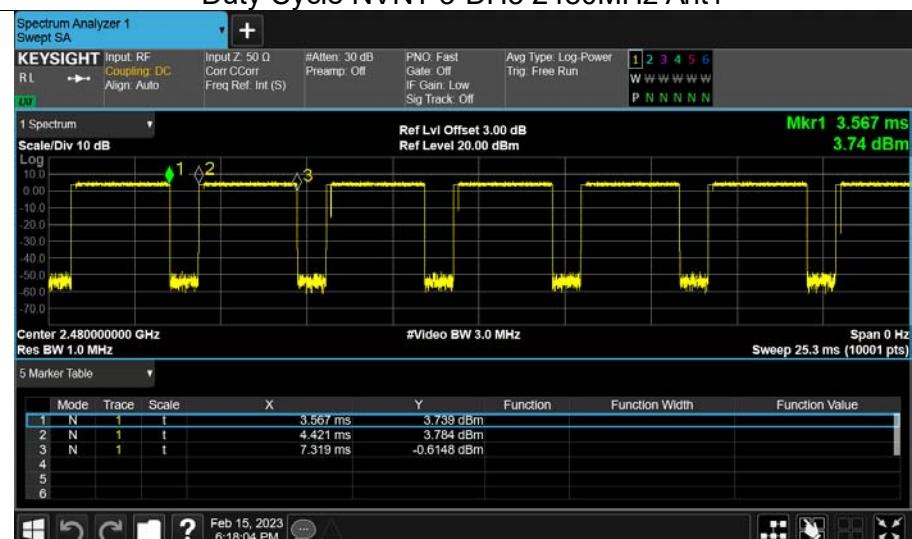



Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	3.64	21	Pass
NVNT	1-DH5	2441	Ant1	5.97	21	Pass
NVNT	1-DH5	2480	Ant1	3.99	21	Pass
NVNT	2-DH5	2402	Ant1	5.35	21	Pass
NVNT	2-DH5	2441	Ant1	7.65	21	Pass
NVNT	2-DH5	2480	Ant1	5.72	21	Pass
NVNT	3-DH5	2402	Ant1	5.71	21	Pass
NVNT	3-DH5	2441	Ant1	7.92	21	Pass
NVNT	3-DH5	2480	Ant1	5.9	21	Pass



-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.972	Pass
NVNT	1-DH5	2441	Ant1	0.939	Pass
NVNT	1-DH5	2480	Ant1	1.011	Pass
NVNT	2-DH5	2402	Ant1	1.31	Pass
NVNT	2-DH5	2441	Ant1	1.287	Pass
NVNT	2-DH5	2480	Ant1	1.329	Pass
NVNT	3-DH5	2402	Ant1	1.29	Pass
NVNT	3-DH5	2441	Ant1	1.274	Pass
NVNT	3-DH5	2480	Ant1	1.289	Pass



Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1



