

Test Report

Test report no.: 24080432-41494-0
Date of issue: 2025-02-17

Test result: The test item - **passed** - and complies with below listed standards.

Applicant

AVL DiTEST GmbH

Manufacturer

AVL DiTEST GmbH

Test Item

322001

RF-Spectrum Testing according to:

FCC 47 CFR Part 15

Radio Frequency Devices – Subpart C

§ 15.247 Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz

RSS-247, Issue 3 (2023-08)

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen, Issue 5 (2018-04)

General Requirements for Compliance of Radio Apparatus

Tested by
(name, function, signature)

Karsten Geraldy
Lab Manager RF


signature

Approved by
(name, function, signature)

Andreas Bender
Deputy Managing Director


signature

Applicant and Test item details

Applicant	AVL DiTEST GmbH Alte Poststrasse 156 8020, Graz, Austria
Manufacturer	AVL DiTEST GmbH Alte Poststrasse 156 8020, Graz, Austria
Test item description	Vehicle Communication Interface VCI ONE (weLINK)
Model/Type reference	322001
Standard specific information	
FCC ID	2A9TU-322001
IC	29975-322001
HMN	N/A
PMN	VCI
HVIN	322001
FVIN	N/A
Technology	WiFi 2.4 GHz 802.11 b/g/n/ax
Frequency	2.4 GHz ISM band (2400 – 2483.5 MHz)
Antenna	Flexible Polymer Series Antenna (FXP830.24.0100B / FXP840.07.0055B)
Power supply	6.0 to 36.0 V DC
Temperature range	-30 °C to +60 °C

Disclaimer and Notes

The content of this report relates to the mentioned test sample(s) only.

IBL-Lab GmbH does not take samples. The samples used for testing are provided by the applicant.
Without a written permit of IBL-Lab GmbH, this test report shall not be reproduced, except in full.

The last valid version is available at [TAMSys®](#).

Signatures are done electronically, if signer does not match stated signer, it is signed per order.
Information supplied by the applicant can affect the validity of results. The data is marked accordingly.

Copyright ©: All rights reserved by IBL-Lab GmbH

Within this test report, a point / comma is used as a decimal separator.

If otherwise, a detailed note is added adjected to its use.

Decision rule:

Decision rule based on simple acceptance without guard bands, binary statement, based on mutually agreed uncertainty tolerances with expansion factor k=2 according to ILAC-G8:09/2019

1 TABLE OF CONTENTS

1	TABLE OF CONTENTS	3
2	GENERAL INFORMATION	4
2.1	Administrative details	4
2.2	Possible test case verdicts	5
2.3	Observations	5
2.4	Opinions and interpretations	5
2.5	Revision history	5
2.6	Further documents	5
3	ENVIRONMENTAL & TEST CONDITIONS	6
3.1	Environmental conditions	6
3.2	Normal and extreme test conditions	6
4	TEST STANDARDS AND REFERENCES	6
5	EQUIPMENT UNDER TEST (EUT)	7
5.1	Product Description	7
5.2	Test Item Description	7
5.3	Technical Data of Equipment	7
5.4	Additional Information	7
5.5	Test modes	8
6	SUMMARY OF TEST RESULTS	9
7	TEST RESULTS	10
7.1	DTS Bandwidth (6 dB)	10
7.2	Occupied Bandwidth (99% OBW)	15
7.3	RF Output Power (Conducted Peak Power)	20
7.4	Antenna Gain, Peak E.I.R.P.	22
7.5	Peak Power Spectral Density (PSD)	23
7.6	Band Edge Compliance (BEC), conducted	31
7.7	Band Edge Compliance (BEC), radiated	41
7.8	Conducted Spurious Emissions (CSE)	51
7.9	Radiated Spurious Emissions (RSE)	57
8	TEST SETUP DESCRIPTION	92
8.1	Semi Anechoic Chamber with Ground Plane	92
8.2	Fully Anechoic Chamber	94
8.3	Radiated measurements > 18 GHz	96
8.4	Conducted measurements WLAN test system R&S TS 8997	97
9	MEASUREMENT PROCEDURES	98
9.1	Radiated spurious emissions from 9 kHz to 30 MHz	98
9.2	Radiated spurious emissions from 30 MHz to 1 GHz	99
9.3	Radiated spurious emissions from 1 GHz to 18 GHz	100
9.4	Radiated spurious emissions above 18 GHz	101
10	MEASUREMENT UNCERTAINTIES	102
Annex A	EUT Photographs, external	103
Annex B	EUT Photographs, internal	107
Annex C	Test Setup Photographs	116

2 GENERAL INFORMATION

2.1 Administrative details

Testing laboratory	IBL-Lab GmbH Heinrich-Hertz-Allee 7 66386 St. Ingbert / Germany Fon: +49 6894 38938-0 Fax: +49 6894 38938-99 URL: https://ib-lenhardt.com/ E-Mail: info@ib-lenhardt.com
Accreditation / Designation	<p>The testing laboratory is accredited by Deutsche Akkreditierungsstelle GmbH (DAkkS) in compliance with DIN EN ISO/IEC 17025:2018.</p> <p>Scope of testing and registration number:</p> <ul style="list-style-type: none">Attachment to the accreditation certificate D-PL-21375-01-00<ul style="list-style-type: none">ElectronicsElectromagnetic CompatibilityRadioElectromagnetic Compatibility and Telecommunication (FCC requirements)Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian StandardsAutomotive EMC <p>Website DAkkS: https://www.dakks.de/</p> <p>The Deutsche Akkreditierungsstelle GmbH (DAkkS) is also a signatory to the ILAC Mutual Recognition Arrangement.</p> <ul style="list-style-type: none">Designations<ul style="list-style-type: none">FCC Testing Laboratory Designation Number DE0024ISED ISED Company Number 27156 Testing Laboratory CAB Identifier DE0020Kraftfahrt-Bundesamt KBA-P 00120-23
Testing location	IBL-Lab GmbH Heinrich-Hertz-Allee 7 66386 St. Ingbert / Germany
Date of receipt of test samples	2024-09-09
Start – End of tests	2024-09-19 – 2025-01-30

2.2 Possible test case verdicts

Test sample meets the requirements	P (PASS) – the measured value is below the acceptance limit, AL = TL
Test sample does not meet the requirements	F (FAIL) – the measured value is above the acceptance limit, AL = TL
Test case does not apply to the test sample	N/A (Not applicable)
Test case not performed	N/P (Not performed)

2.3 Observations

No additional observations other than the reported observations within this test report have been made.

2.4 Opinions and interpretations

No appropriate opinions or interpretations according ISO/IEC 17025:2017 clause 7.8.7 are within this test report.

2.5 Revision history

-0 Initial Version

2.6 Further documents

List of further applicable documents belonging to the present test report:

– no additional documents –

3 ENVIRONMENTAL & TEST CONDITIONS

3.1 Environmental conditions

Temperature	20°C ± 5°C
Relative humidity	25-75 % r.H.
Barometric Pressure	860-1060 mbar
Power supply	230 V AC ± 5% / 50 Hz

3.2 Normal and extreme test conditions

	minimum	nominal	maximum
Temperature	-/- °C	20 °C	-/- °C
Relative humidity	-/-	45 % r.h.	-/-
Power supply	-/- V DC	12 V DC	-/- V DC

4 TEST STANDARDS AND REFERENCES

Test standard (accredited)	Description
FCC 47 CFR Part 15	Radio Frequency Devices – Subpart C § 15.247 Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz
RSS-247, Issue 3 (2023-08)	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS-Gen, Issue 5 (2018-04)	General Requirements for Compliance of Radio Apparatus

Reference	Description
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
558074 D01 15.247 Meas Guide v05r02	Guidance for compliance measurements on digital transmission systems, frequency hopping spread spectrum systems and hybrid system devices operating under section 15.247 of the FCC rules

5 EQUIPMENT UNDER TEST (EUT)

5.1 Product Description

Vehicle Communication Interface VCI ONE (weLINK)

*: as declared by applicant

5.2 Test Item Description

Model name*	322001
Serial number*	radiated test sample: 00122 / conducted test sample: 00114
Hardware status*	V4.2
Software status*	V2.4.3

*: as declared by applicant

5.3 Technical Data of Equipment

Technology*	WiFi 2.4 GHz 802.11 b/g/n/ax		
Operational frequency band*	2.4 GHz ISM band (2400 – 2483.5 MHz)		
Operational carrier frequency*	2412 MHz – 2462 MHz		
Modulation type*	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11 ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)		
Data rate*	802.11b: 1 Mbps – 11 Mbps 802.11g: 6 Mbps – 54 Mbps 802.11n: up to 300 Mbps 802.11 ax: up to 573 Mbps		
Number of channels*	11		
Channel bandwidth*	20 MHz		
Channel spacing*	5 MHz		
Receiver category*	1		
Antenna*	Flexible Polymer Series Antenna (FXP830.24.0100B / FXP840.07.0055B)		
Antenna gain*	Frequency (MHz)	FXP830.24.0100B Peak Gain (dBi)	FXP840.07.0055B Peak Gain [dBi]
	2400	1.95	3.35
	2450	3.00	3.15
	2500	3.32	2.60
Power supply*	6.0 to 36.0 V DC		
Temperature range*	-30 °C to +60 °C		

*: as declared by applicant

5.4 Additional Information

Model differences	– none –
Ancillaries tested with	– none –
Additional equipment used for testing	Notebook with test tool (terminal programm with set of commands to configure necessary test modes)

5.5 Test modes

Mode 1	b-mode, 1 Mbps, ant. 1
Mode 2	g-mode, 6 Mbps, ant. 3
Mode 3	n-mode, MCS0, ant. 3
Mode 4	ax-mode, HE1, ant. 3
Antenna configuration	EUT with 2 antennas: antenna 1, antenna 2 antenna 3 = ant1 + ant 2 active)

Test tool / commands as provided by manufacturer allowed separate transmission using antenna 1 or antenna 2 and simultaneous transmission using antenna 3 = antenna 1 and antenna 2 are active.


Above listed test modes resp. below listed power settings are based on module test report listed under FCC ID RYK-WNFB266AXIBT.

Channels with **22 MHz (b-mode) / 20 MHz (g-, n-, ax-mode)** channel bandwidth:

2400 to 2483.5 DTS band channel number & center frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f _c / MHz	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472

2400 to 2483.5 DTS band channel number & power setting				
Channel	802.11b / 1 Mbps	802.11g / 6 Mbps	802.11n / MCS0	802.11ax (HE1)
1	18 dBm	11 dBm	8 dBm	8 dBm
6	18 dBm	17 dBm	17 dBm	17 dBm
11	18 dBm	8 dBm	8 dBm	8 dBm

WiFi 2.4 GHz channel plan (informative):

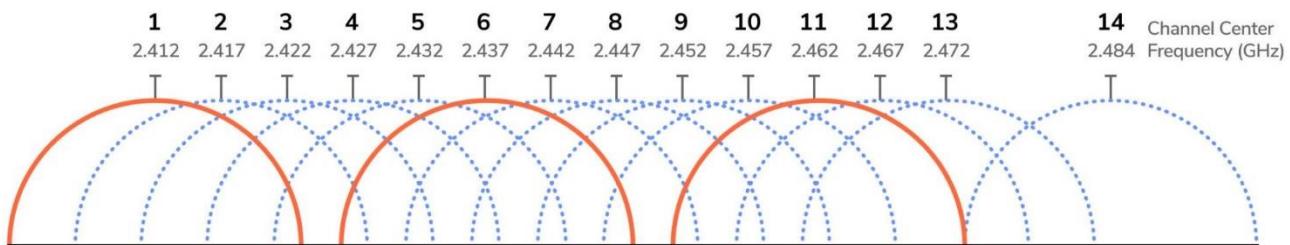

© <https://onmac.net/wp-content/uploads/2021/12/2.4GHz-WiFi-channels-2048x523.jpg>

6 SUMMARY OF TEST RESULTS

Test specification	
FCC 47 CFR Part 15 RSS-247, Issue 3 (2023-08) / RSS-Gen, Issue 5 (2018-04)	

Clause	Requirement / Test Case	Result - Remark	Result	Verdict
§15.247(a)(2) RSS-247, 5.2 (a)	DTS bandwidth (6 dB)	KDB 558074, clause: 8.2	19.0 MHz	- PASS -
RSS Gen, 6.7	Occupied bandwidth (99%)	-/-	19.2 MHz	- PASS -
§15.247(b)(3) RSS-247, 5.4 (d)	RF output power (conducted peak power)	KDB 558074, clause: 8.3.1	26.8 dBm	- PASS -
§15.247(b)(4) RSS-247, 5.4 (d)	Antenna gain / Peak EIRP	-/-	3.4 dBi / 30.2 dBm	- PASS -
§15.247(e) RSS-247, 5.2 (b)	Peak power spectral density (PSD)	KDB 558074, clause: 8.4	6.9 dBm/MHz	- PASS -
§15.247(d) RSS-247, 5.5	Band edge compliance (BEC), conducted	KDB 558074, clause: 8.5	< limit	- PASS -
§15.247(d) RSS-247, 5.5	Band edge compliance (BEC), radiated	KDB 558074, clause: 8.7	< limit	- PASS -
§15.247(d) RSS-247, 5.5	Conducted spurious emissions (CSE)	KDB 558074 DTS clause: 8.5	< limit	- PASS -
15.247(d) / §15.209 RSS-247, 5.5 / RSS-Gen, 8.9	Radiated spurious emissions (RSE)	-/-	< limit	- PASS -
§15.207 RSS-Gen, 8.8	AC conducted emissions	EUT is battery powered via vehicle battery		- N/A -

Comments and observations

Following pages show requirements and references of FCC Part 15.247, ANSI C63.10 and KDB 558074 only. Same tests are also applicable and valid for RSS-247, with clauses given in table above.

7 TEST RESULTS

7.1 DTS Bandwidth (6 dB)

Applicability

This requirement applies to all types of DTS equipment.

Description

The DTS Bandwidth is defined as the 6 dB bandwidth.

Limit

§15.247

(a)(2) The minimum 6 dB bandwidth shall be at least 500 kHz.

RSS-247, 5.2 (a)

The minimum 6 dB bandwidth shall be 500 kHz.

Test procedure

ANSI C63.10, 11.8

The steps are as follows:

- a) Set RBW = 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The automatic bandwidth measurement capability of an instrument may be employed using the 6 dB bandwidth mode.

Test setup: 8.4 with conducted sample (see 5.2)


Test Results

EUT Mode	DTS Bandwidth (6 dB)			Limit [MHz]
	low channel [MHz]	mid channel [MHz]	high channel [MHz]	
Mode 1	8.150	7.600	8.100	≥ 0.500
Mode 2	16.40	16.40	16.40	≥ 0.500
Mode 3	17.65	17.65	17.70	≥ 0.500
Mode 4	18.85	18.75	19.00	≥ 0.500


Comment: ---

Verdict	- PASS -	see next plots
---------	----------	----------------


Plot 1: Mode 1, DTS Bandwidth, low channel

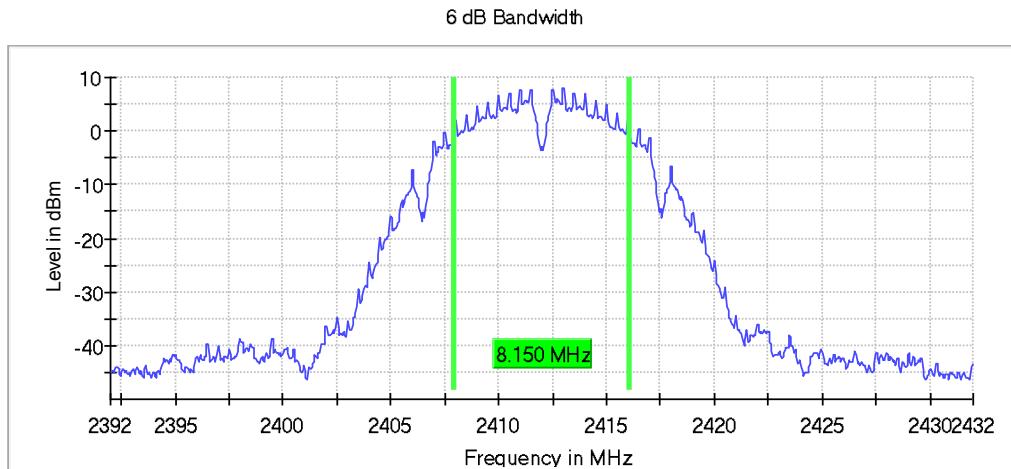


Plot 2: Mode 1, DTS Bandwidth, mid channel

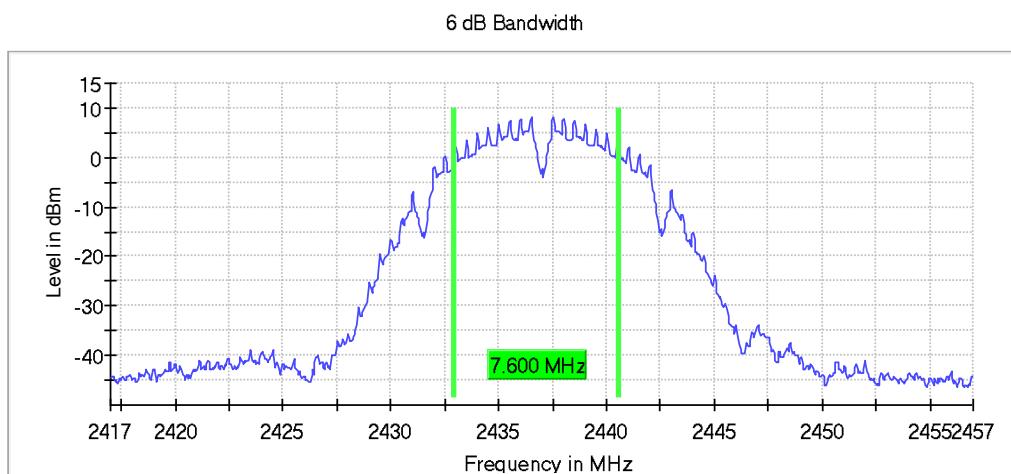


Plot 3: Mode 1, DTS Bandwidth, high channel

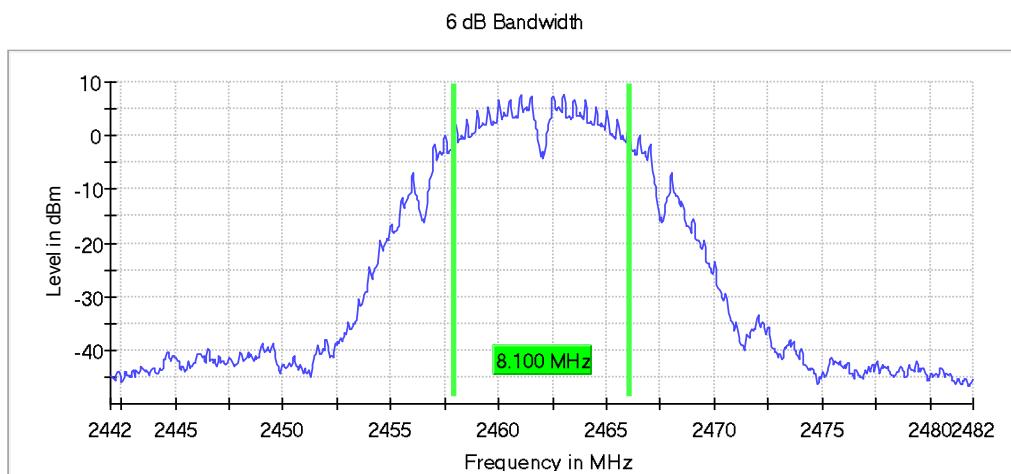


Plot 4: Mode 2, DTS Bandwidth, low channel

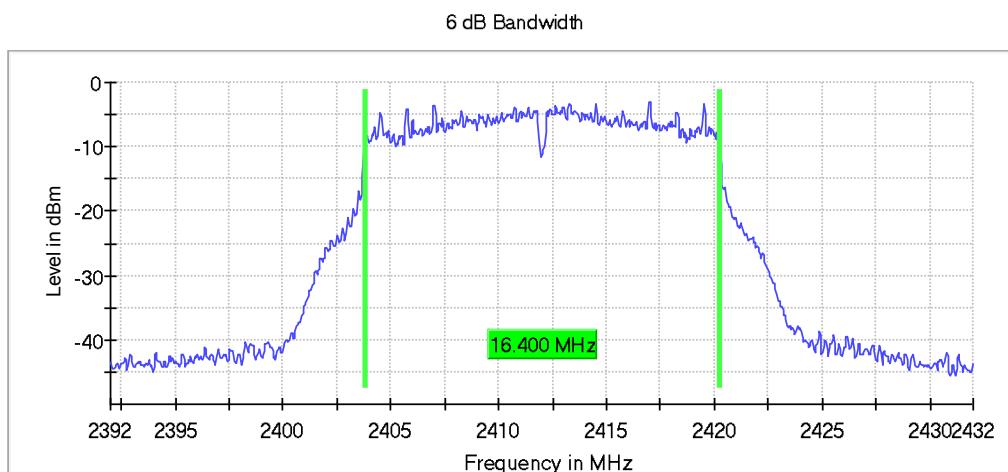


Plot 5: Mode 2, DTS Bandwidth, mid channel

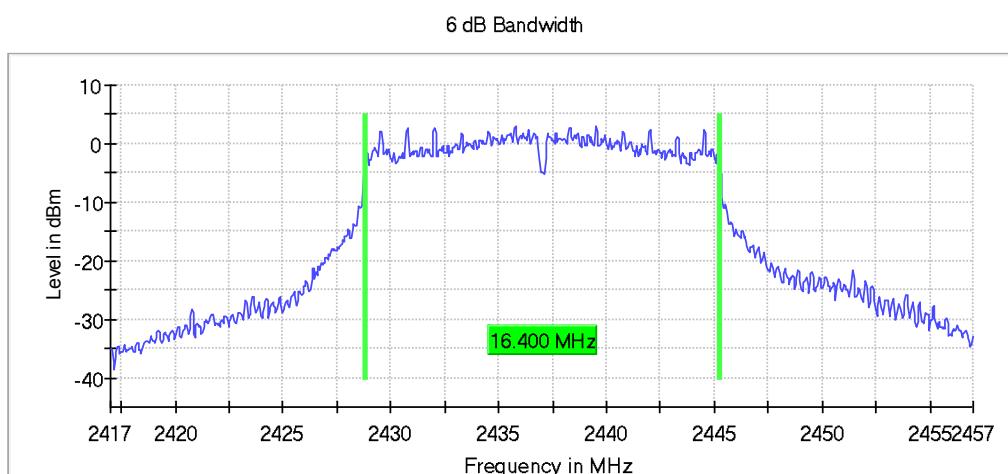


Plot 6: Mode 2, DTS Bandwidth, high channel

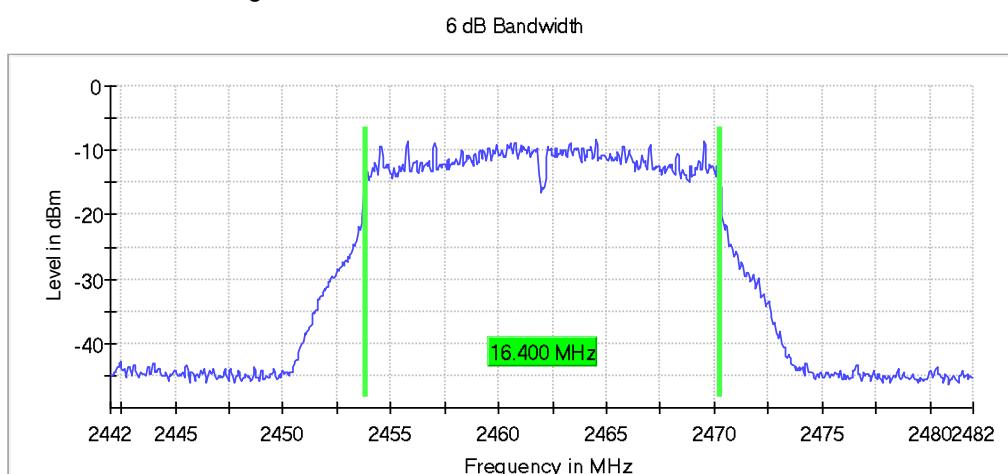


Plot 7: Mode 3, DTS Bandwidth, low channel

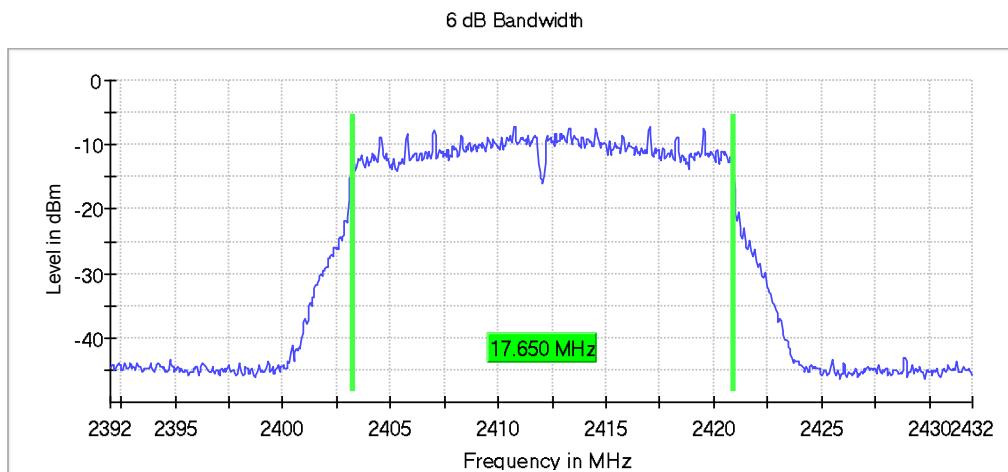


Plot 8: Mode 3, DTS Bandwidth, mid channel

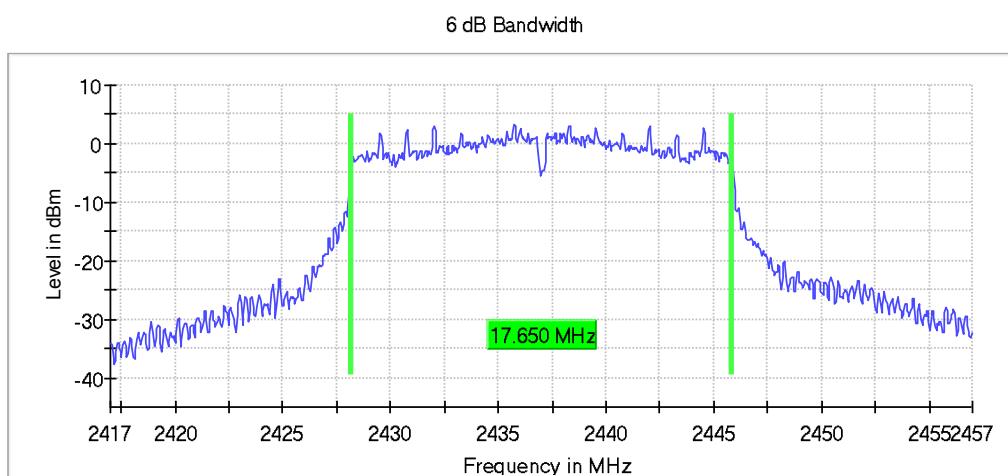


Plot 9: Mode 3, DTS Bandwidth, high channel

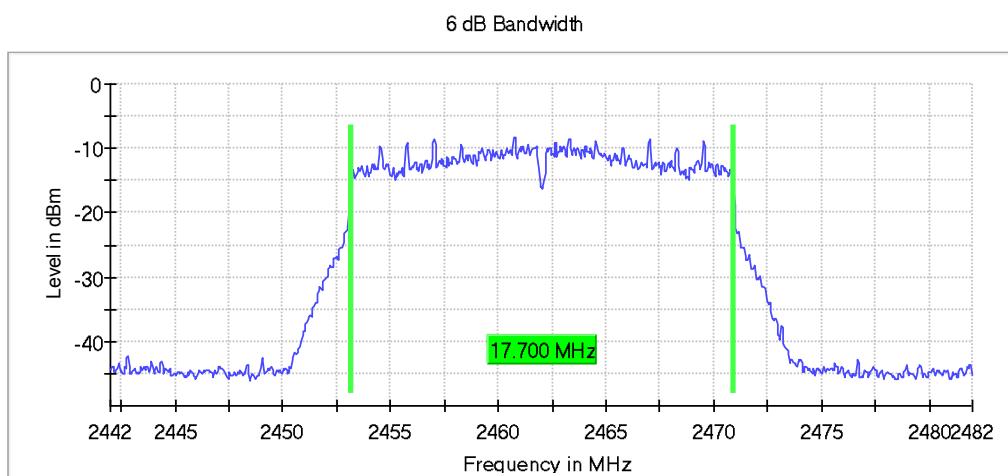


Plot 10: Mode 4, DTS Bandwidth, low channel

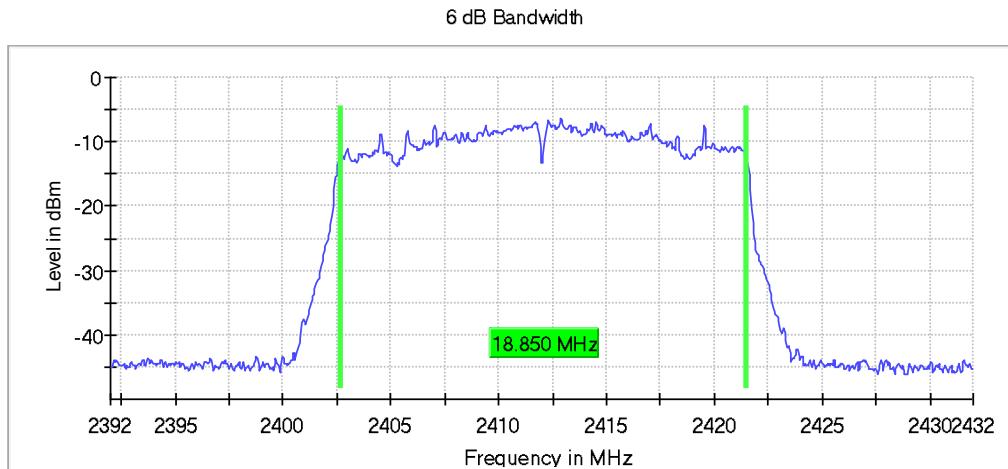

Plot 11: Mode 4, DTS Bandwidth, mid channel

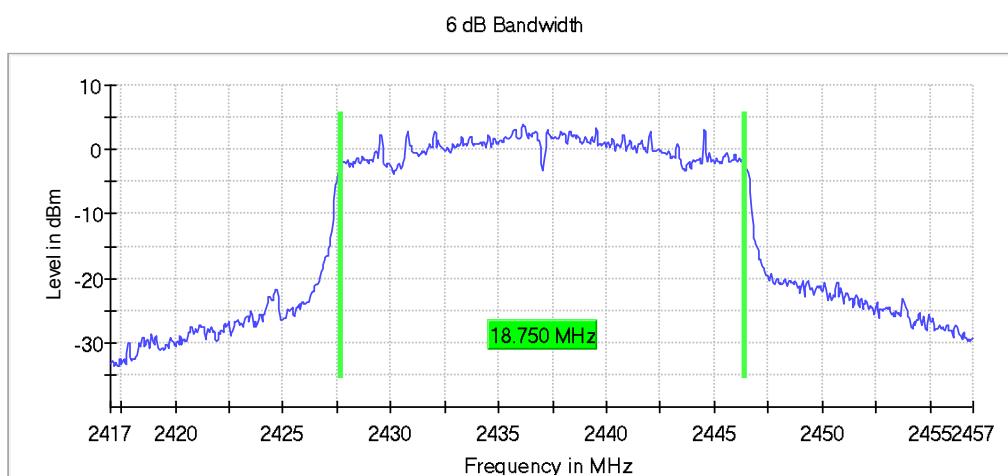

Plot 12: Mode 4, DTS Bandwidth, high channel

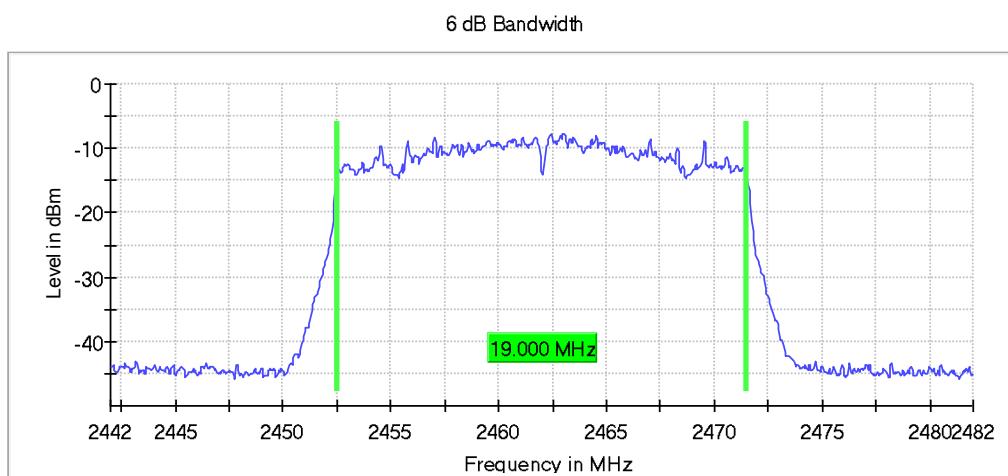

7.2 Occupied Bandwidth (99% OBW)

Applicability

This requirement applies to all types of DTS equipment.

Description

The Occupied Channel Bandwidth is the bandwidth that contains 99 % of the power of the signal (RSS-Gen).

Limit

No limit defined.

Test procedure

ANSI C63.10, 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Test setup: 8.4 with conducted sample (see 5.2)


Test Results

EUT Mode	Occupied Bandwidth (99%)		
	low channel [MHz]	mid channel [MHz]	high channel [MHz]
Mode 1	11.20	11.30	11.50
Mode 2	16.70	16.90	16.80
Mode 3	17.80	17.90	17.80
Mode 4	18.90	19.20	19.00


Comment:	---
----------	-----

Verdict	- PASS -	see next plots
---------	----------	----------------


Plot 13: Mode 1, 99% Occupied Bandwidth, low channel

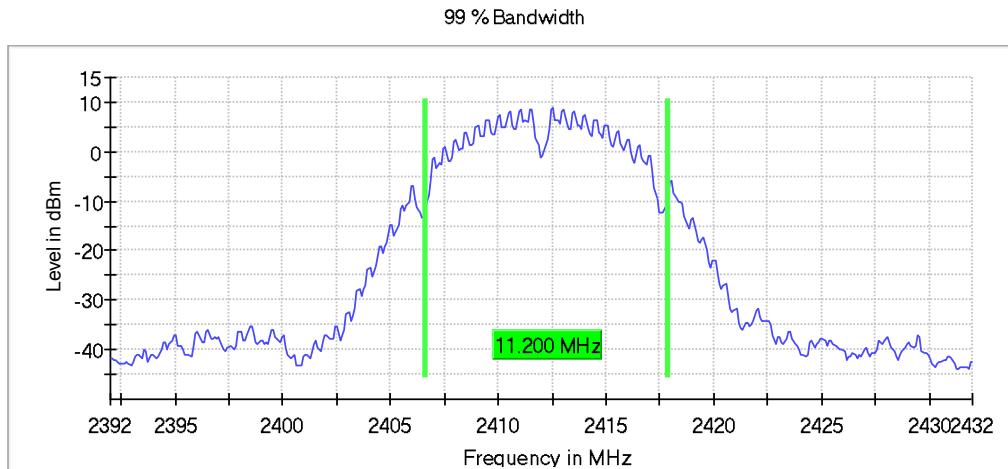


Plot 14: Mode 1, 99% Occupied Bandwidth, mid channel

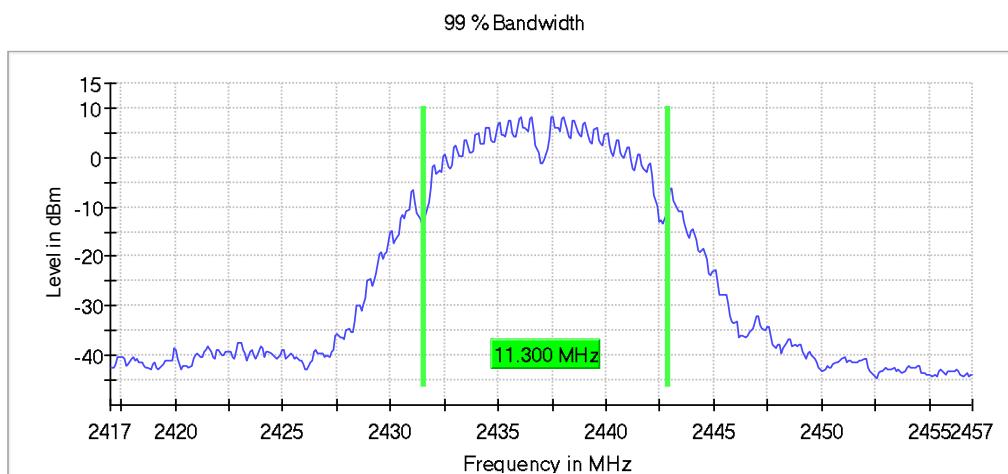


Plot 15: Mode 1, 99% Occupied Bandwidth, high channel

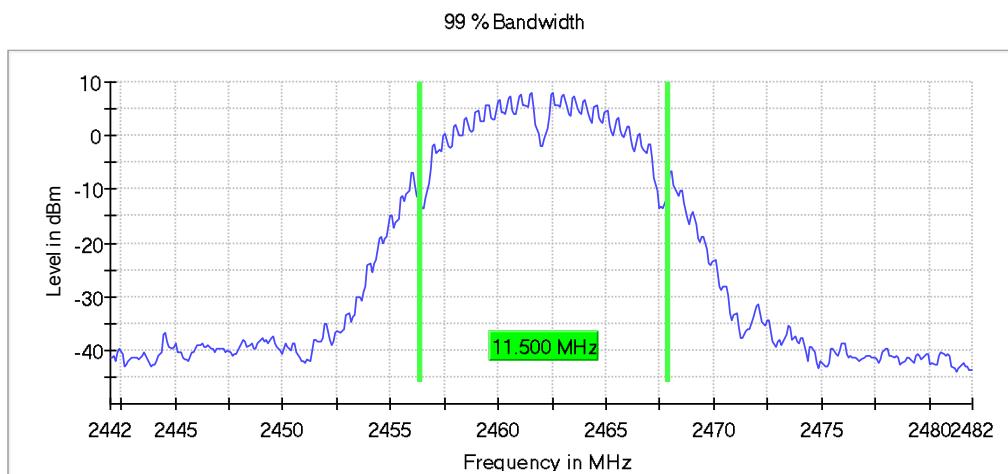


Plot 16: Mode 2, 99% Occupied Bandwidth, low channel

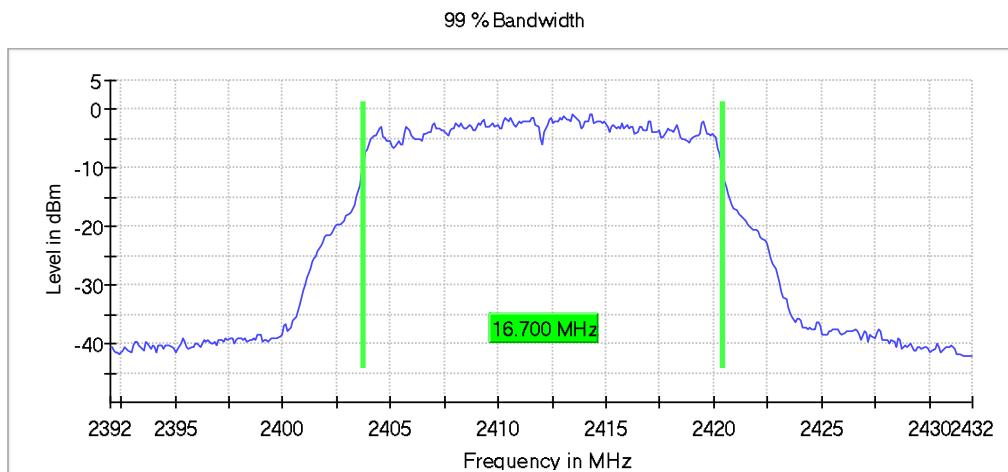


Plot 17: Mode 2, 99% Occupied Bandwidth, mid channel

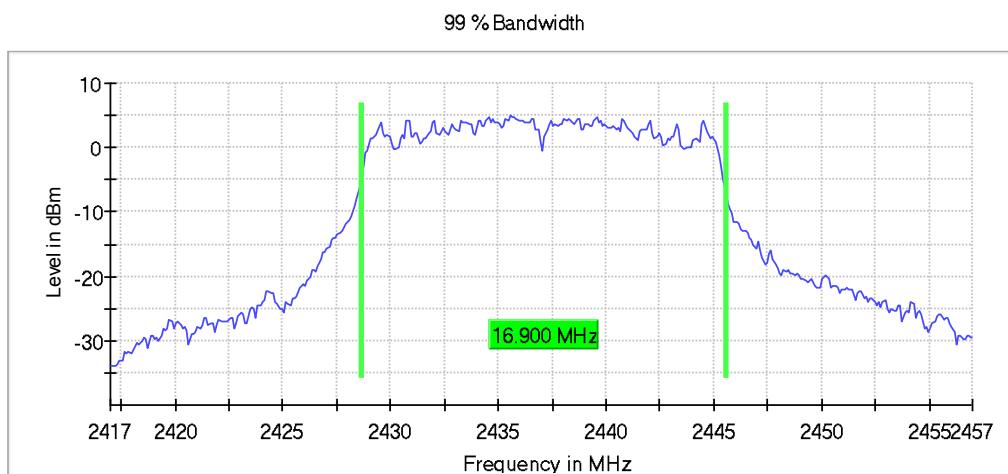


Plot 18: Mode 2, 99% Occupied Bandwidth, high channel

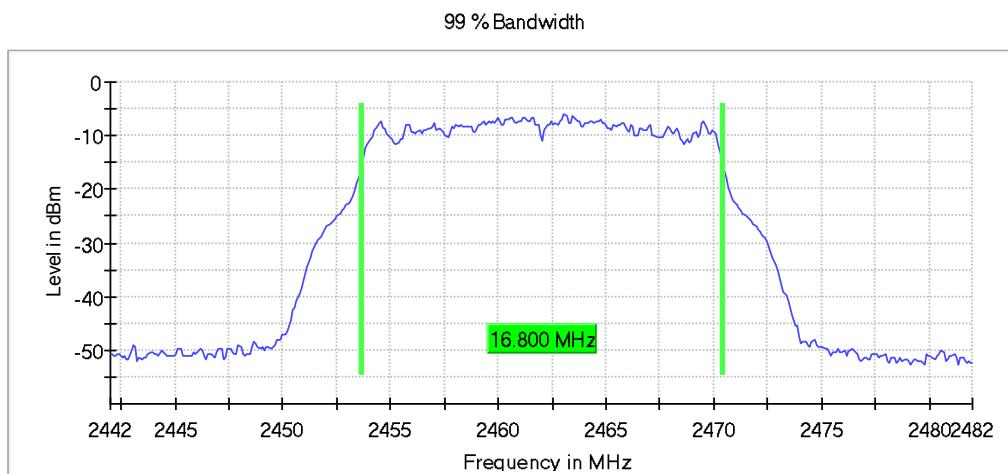


Plot 19: Mode 3, 99% Occupied Bandwidth, low channel

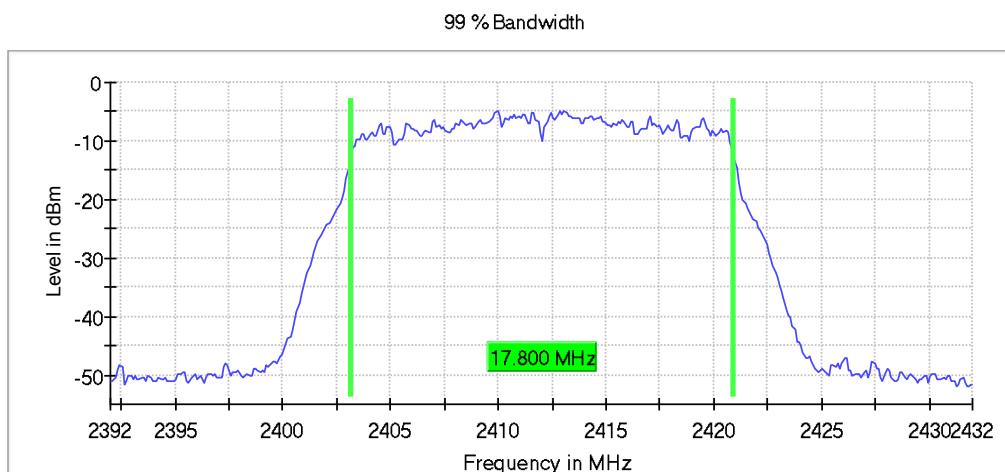


Plot 20: Mode 3, 99% Occupied Bandwidth, mid channel

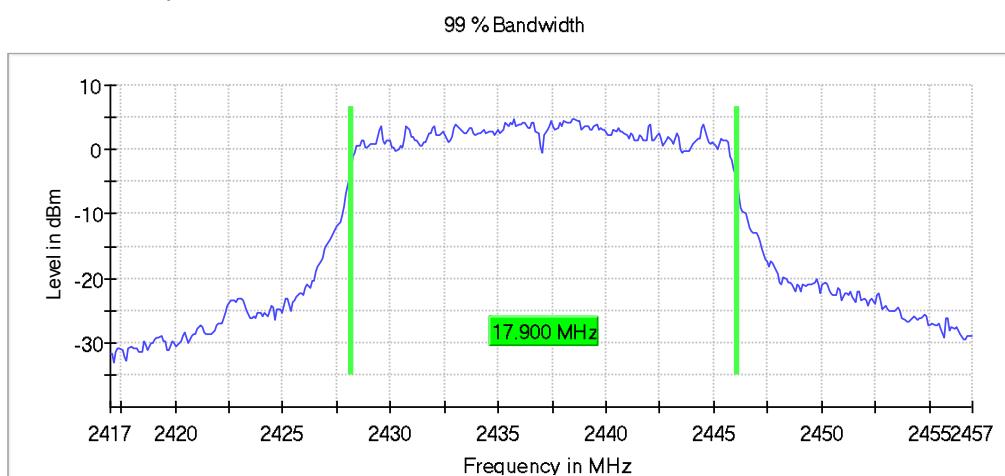


Plot 21: Mode 3, 99% Occupied Bandwidth, high channel

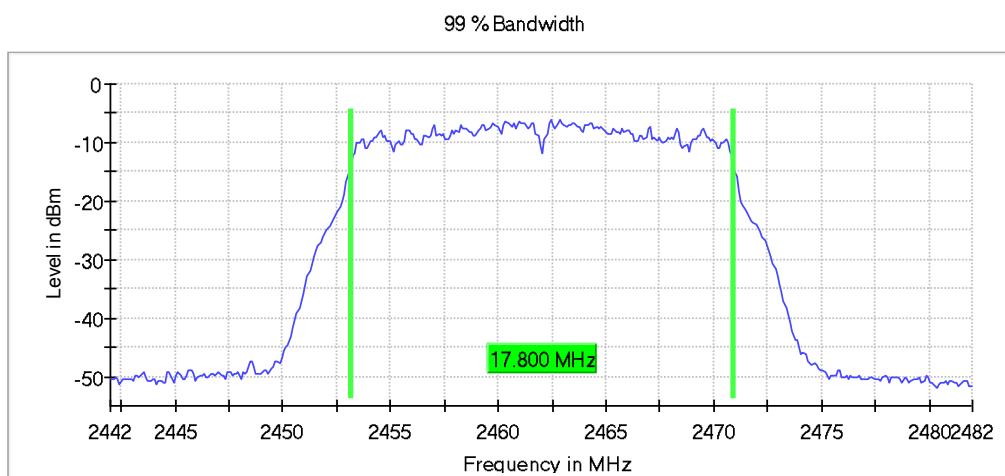


Plot 22: Mode 4, 99% Occupied Bandwidth, low channel

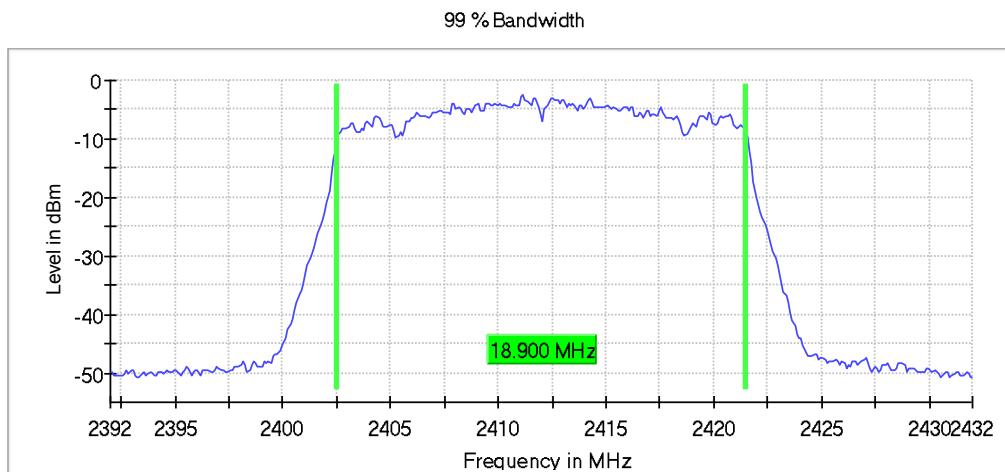

Plot 23: Mode 4, 99% Occupied Bandwidth, mid channel

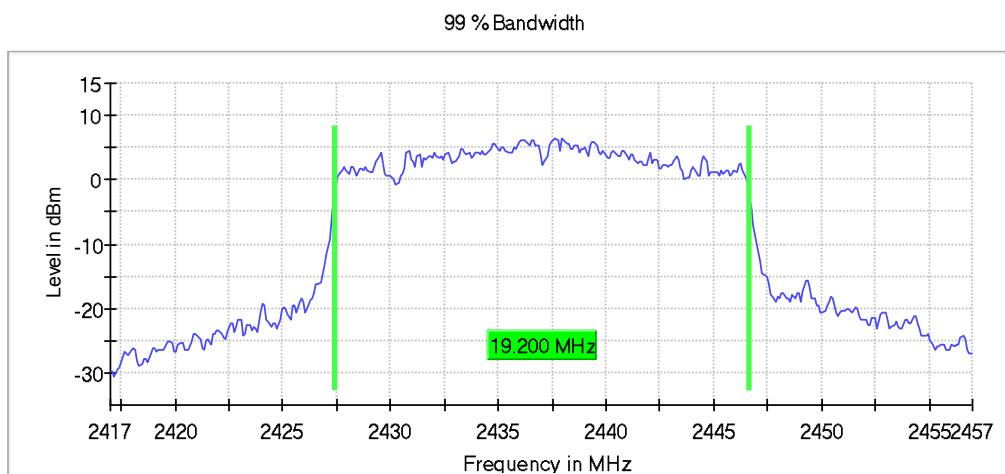

Plot 24: Mode 4, 99% Occupied Bandwidth, high channel

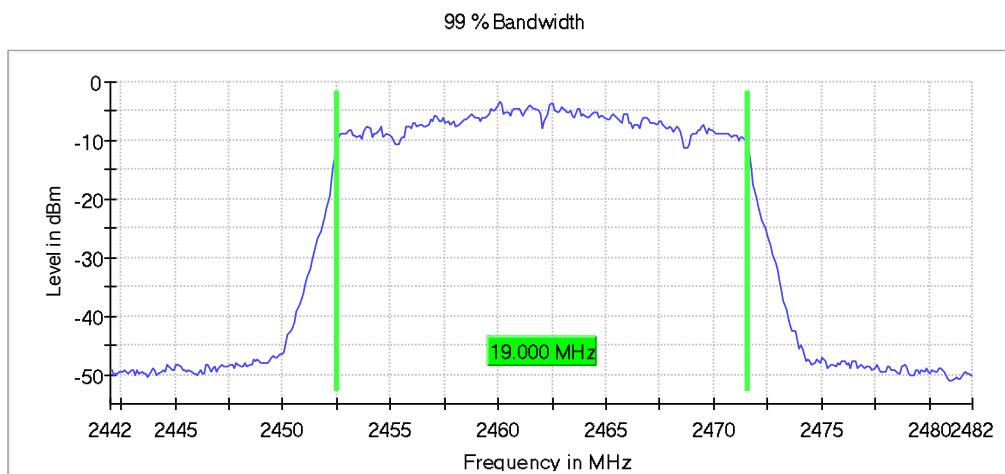

7.3 RF Output Power (Conducted Peak Power)

Applicability

This requirement applies to all types of DTS equipment.

Description

The RF Output Power is defined as the conducted peak output power.

Limit

§15.247

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

RSS-247, 5.4 (d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W.

Test procedure

KDB 558074 D01.

ANSI C63.10, 11.9.2.3.2

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Gate triggering can be implemented in such a way that the sweep of the instrument is only active during the burst period of the device. Any Gate triggering shall be performed on the full power portion of the pulses and care must be taken to ensure that static portions of the pulse are not included in the measurement (ensuring that the trace is averaged over the entire symbol range). All Gate triggered measurements shall be accompanied by a Gate setup plot in the test report.

Test setup: 8.4 with conducted sample (see 5.2)

Test Results				
EUT Mode	RF Output Power			Limit Max [dBm]
	low channel [dBm]	mid channel [dBm]	high channel [dBm]	
Mode 1	19.2	19.0	18.8	30
Mode 2	24.2	26.6	20.0	30
Mode 3	18.5	26.0	17.6	30
Mode 4	20.8	26.8	20.0	30

Comment:	Mode 1: Antenna 1 only Mode 2, 3, 4: Antenna 3 (= Antenna 1 + Antenna 2)
----------	---

Verdict	- PASS -	---
---------	----------	-----

7.4 Antenna Gain, Peak E.I.R.P.

Applicability

This requirement applies to all types of DTS equipment.

Description

The antenna gain is defined as the difference between radiated peak power (Peak EIRP) substracted by the conducted peak power of the module, given in dBi.

Limit

§15.247

(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

RSS-247, 5.4 (d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W.

Test setup: 8.2 with radiated sample (see 5.2), 8.4 with conducted sample (see 5.2)

Test Results

Antenna type	low channel [dBi]	mid channel [dBi]	high channel [dBi]	Limit [dBi]
FXP830.24.0100B	1.95	3.00	3.32	6
FXP840.07.0055B	3.35	3.15	2.60	6
Antenna type	Peak EIRP [dBm]			Limit [dBm]
Flexible Polymer Series Antenna (FXP830.24.0100B / FXP840.07.0055B)	30.2			36

Note: - for antenna details see section 5.3

- peak EIRP is calcualated based on MAX(conducted peak power) and MAX(antenna gain) as worst case

Comment: Antenna gain as declared by applicant.

Verdict	- PASS -	---
---------	----------	-----

7.5 Peak Power Spectral Density (PSD)

Applicability

This requirement applies to all types of DTS equipment.

Description

The Power Spectral Density (PSD) is defined as the conducted peak power spectral density in a 3 kHz bandwidth during any time of continuous transmission.

Limits

§15.247

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

RSS-247, 5.2 (b)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test procedure

ANSI C63.10, 11.10.2, method PKPSD (peak PSD)

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

ANSI C63.10, 11.10.3, method AVGPSD-1

Method AVGPSD-1 uses trace averaging with EUT transmitting at full power throughout each sweep.

The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ($D \geq 98\%$), or else sweep triggering/signal gating must be implemented to help ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to > 1.5 times the OBW.
- c) SetRBWto: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- d) SetVBW $\geq [3 \times \text{RBW}]$.
- e) Detector = power averaging (rms) or sample detector (when rms not available).
- f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (rms) mode over a minimum of 100 traces.

- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

Test setup: 8.4 with conducted sample (see 5.2)

Test Results

EUT Mode	Peak Power Spectral Density [dBm / 3 kHz]			Limit [dBm / 3 kHz]
	low channel	mid channel	high channel	
Mode 1	1.1	0.9	0.8	8
Mode 2	0.1	6.5	-4.9	8
Mode 3	-4.3	6.3	-4.8	8
Mode 4	-4.3	6.9	-4.6	8


Comment: ---

Verdict	- PASS -	see next plots
----------------	-----------------	----------------

Plot 25: Mode 1, Peak PSD, low channel

Result


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2411.510000	1.061	8.0	PASS

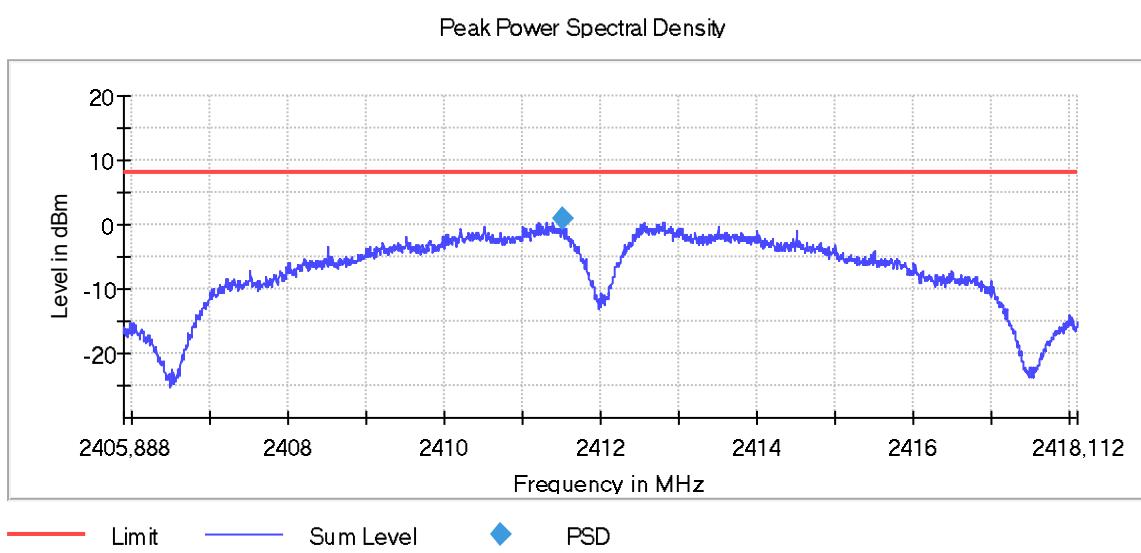

Plot 26: Mode 1, Peak PSD, mid channel

Result


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2437.517500	0.913	8.0	PASS

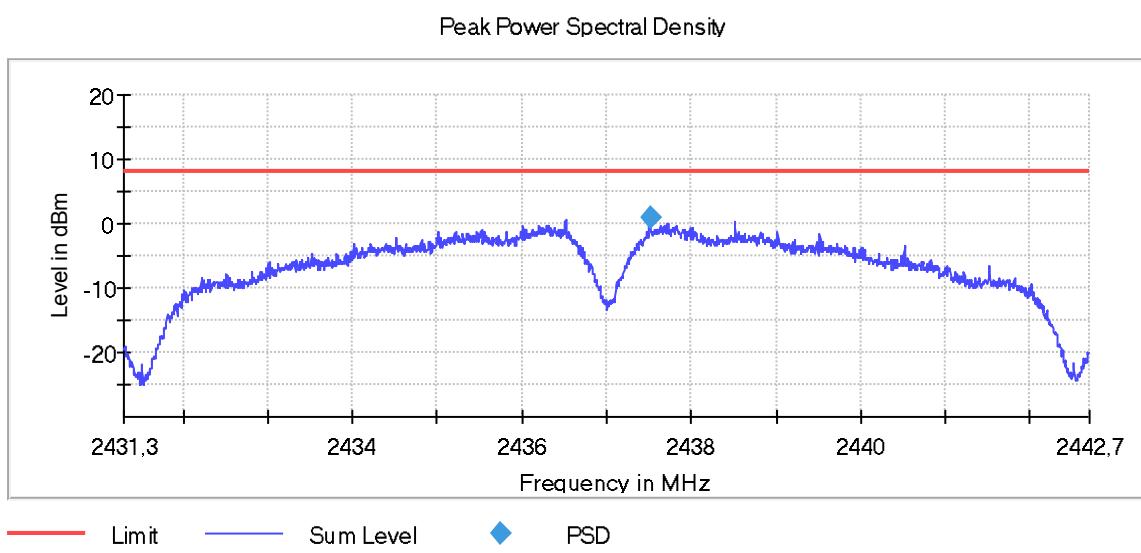

Plot 27: Mode 1, Peak PSD, high channel

Result


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2462.000000	2462.517500	0.775	8.0	PASS

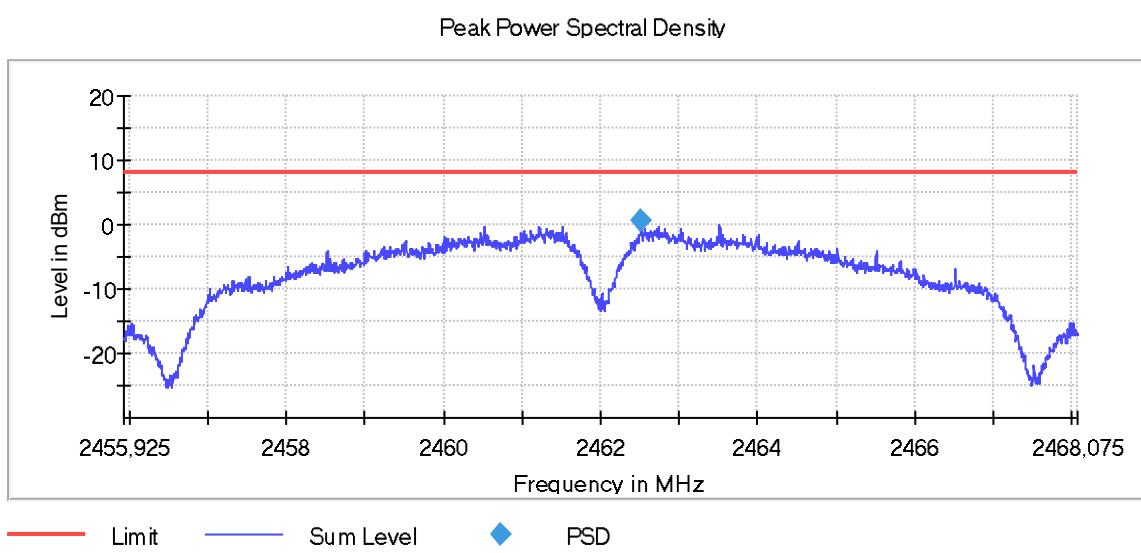

Plot 28: Mode 2, Peak PSD, low channel

Result


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2417.025000	0.085	8.0	PASS

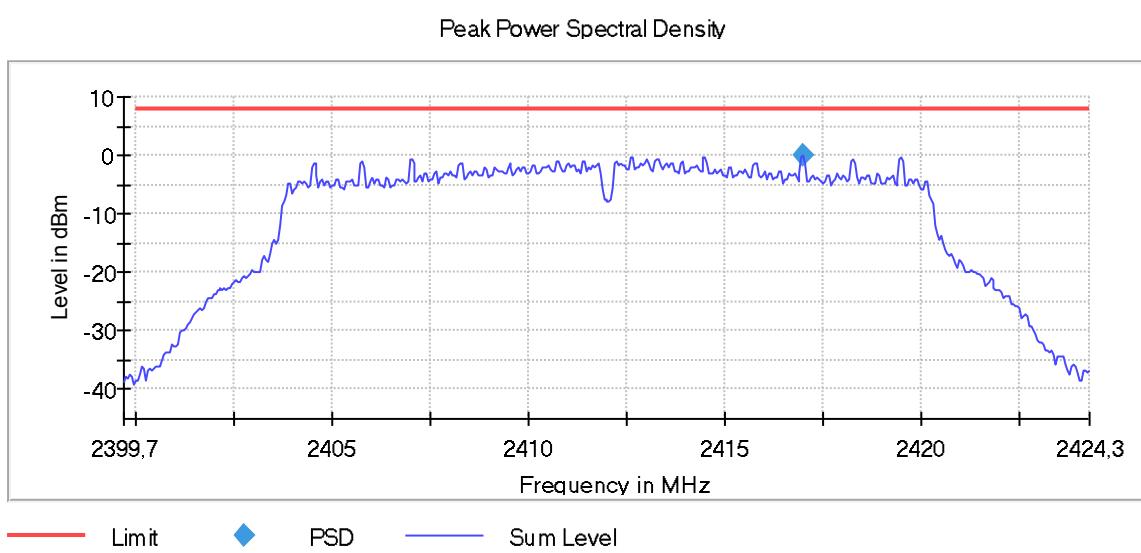

Plot 29: Mode 2, Peak PSD, mid channel

Result


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2439.525000	6.497	8.0	PASS

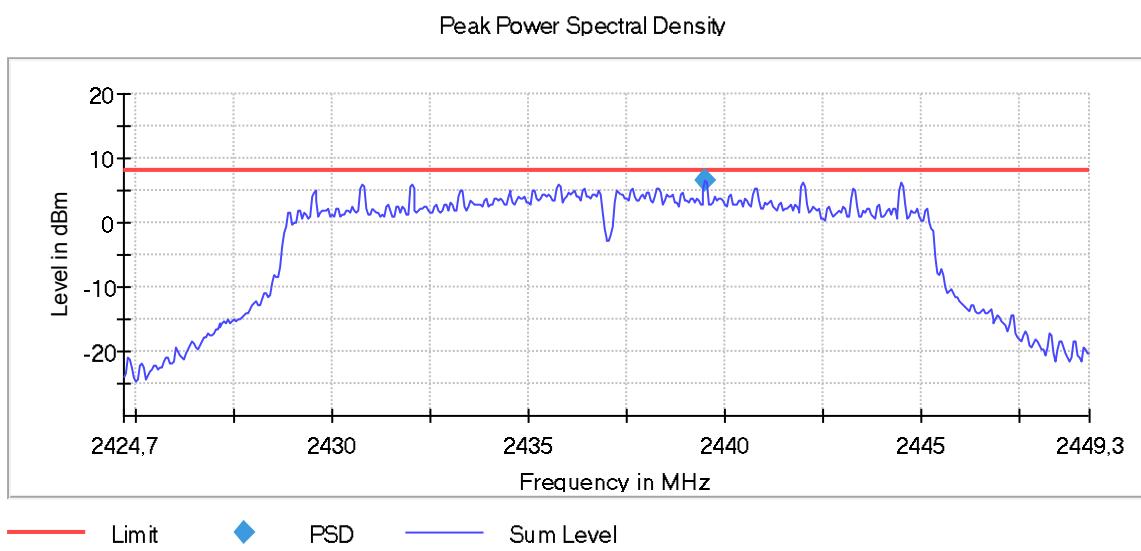

Plot 30: Mode 2, Peak PSD, high channel

Result


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2462.000000	2469.525000	-4.929	8.0	PASS

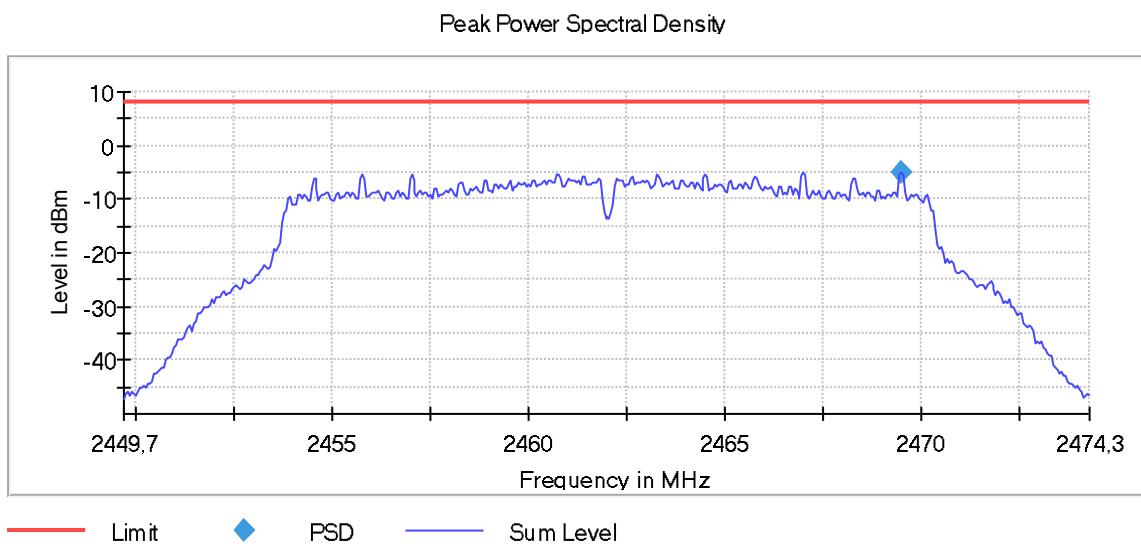

Plot 31: Mode 3, Peak PSD, low channel

Result


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2417.020259	-4.266	8.0	PASS

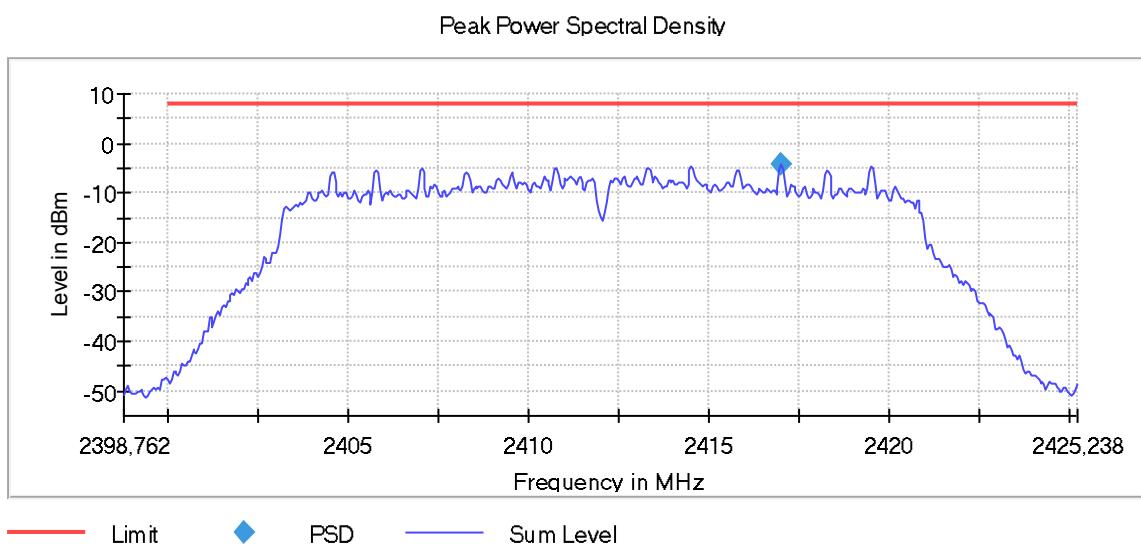

Plot 32: Mode 3, Peak PSD, mid channel

Result


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2442.020259	6.256	8.0	PASS

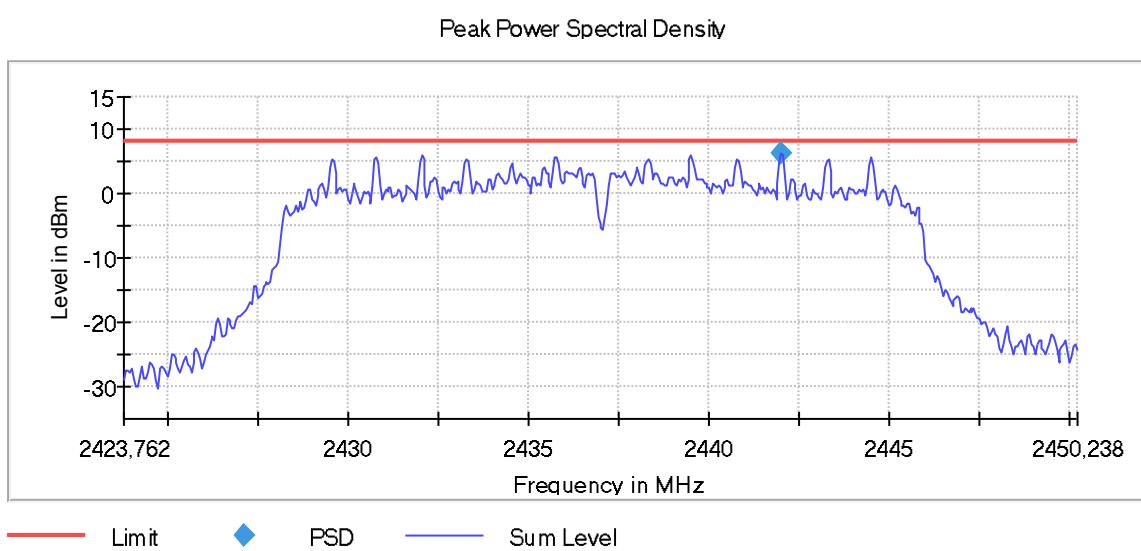

Plot 33: Mode 3, Peak PSD, high channel

Result


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2462.000000	2467.000000	-4.799	8.0	PASS

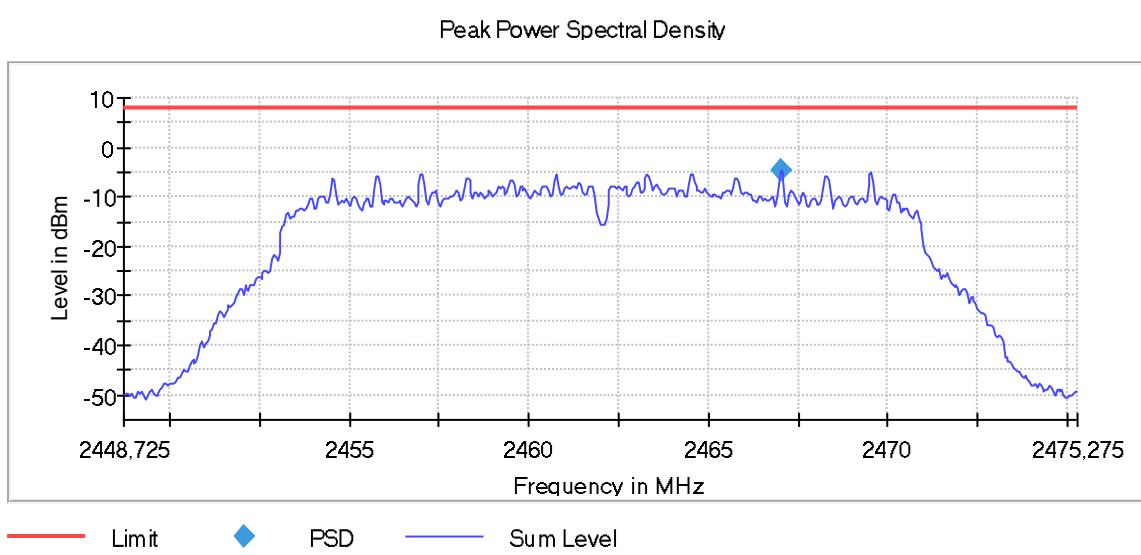

Plot 34: Mode 4, Peak PSD, low channel

Result


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2417.020561	-4.347	8.0	PASS

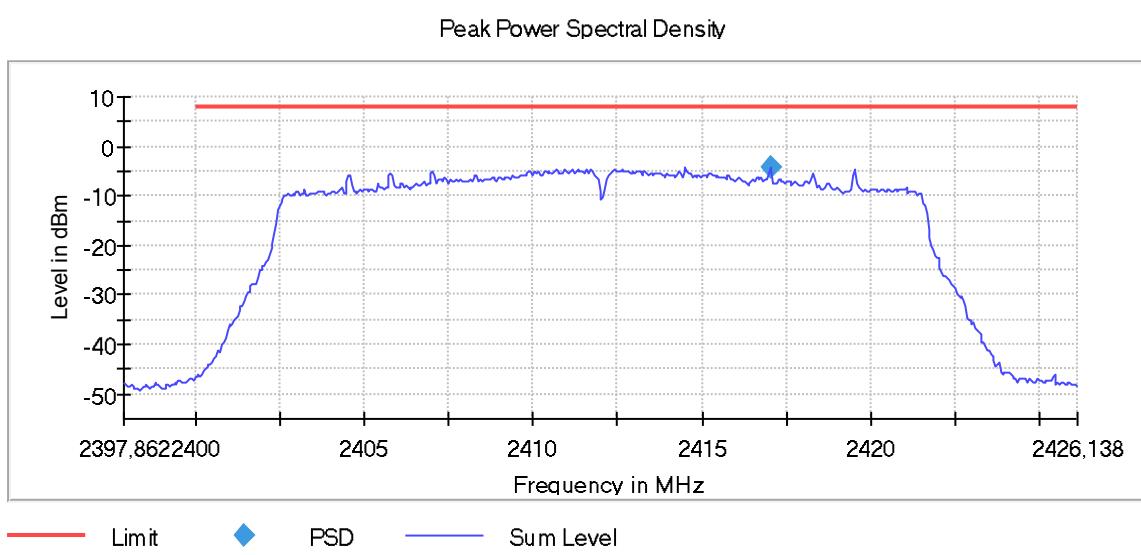

Plot 35: Mode 4, Peak PSD, mid channel

Result


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2442.029471	6.881	8.0	PASS

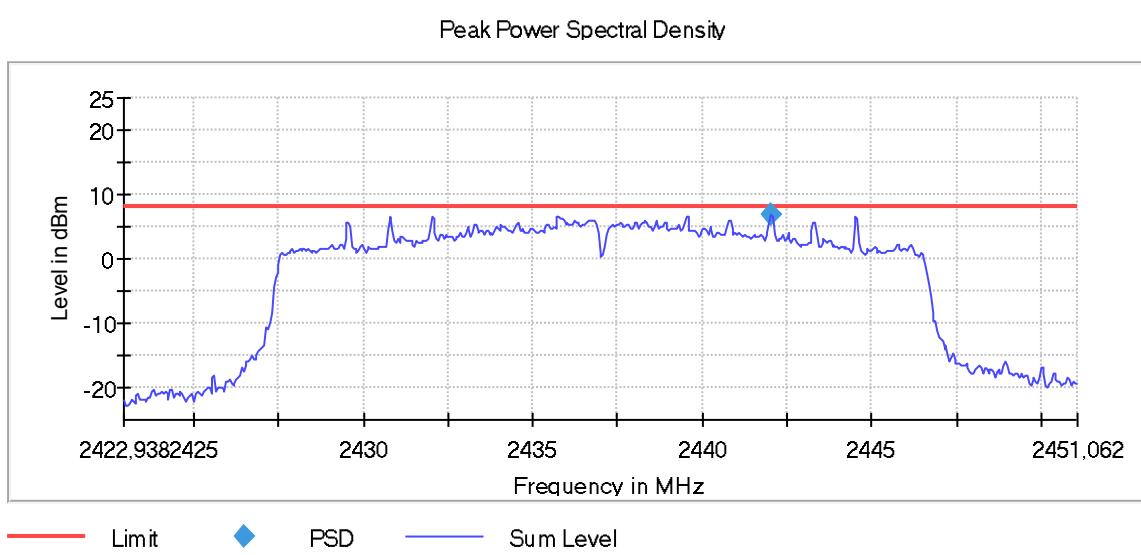

Plot 36: Mode 4, Peak PSD, high channel

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2462.000000	2467.025000	-4.561	8.0	PASS

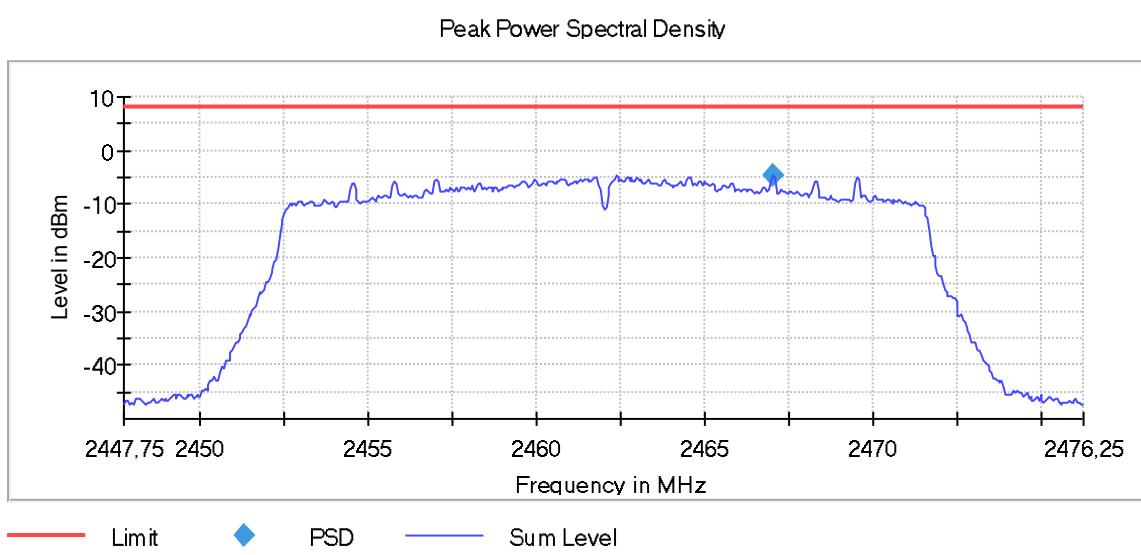

7.6 Band Edge Compliance (BEC), conducted

Applicability

This requirement applies to all types of DTS equipment.

Description

Emissions within a restricted band and within 2 MHz of an authorized band edge may be measured using either the marker-delta method (ANSI C63.10, 6.10.6) or the integration method (ANSI C63.20, 11.13.3), provided that the DTS bandwidth (or EBW) edge falls within 2 MHz of the band edge. Otherwise, all unwanted emissions measurements shall be performed using the standard methods.

Limits

§15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test procedure

ANSI C63.10, 11.11

Reference level measurement:

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq [3 \times RBW]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Emission level measurement:

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times RBW]$.
- d) Detector = peak.

e) Sweep time = auto couple.

f) Trace mode = max hold.

g) Allow trace to fully stabilize.

h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements as specified (≥ 20 dBc).

The marker-delta method, as described in ANSI C63.10, 6.10.6 can be used to perform measurements of the radiated unwanted emissions level at the band-edges provided that the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.

Test setup: 8.4 with conducted sample (see 5.2)

Test results

BEC	low channel [dBc]	high channel [dBc]	Limit [dBc]
Mode 1	> 35	> 35	≥ 20
Mode 2	> 35	> 35	≥ 20
Mode 3	> 35	> 35	≥ 20
Mode 4	> 35	> 35	≥ 20

Comment:

Verdict

- PASS -

see next plots

Plot 37: Mode 1, BEC, low channel

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2411.025000	10.9

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2395.025000	-35.6	26.4	-9.1	PASS
2394.975000	-35.9	26.7	-9.1	PASS
2396.025000	-36.0	26.9	-9.1	PASS
2398.525000	-36.4	27.3	-9.1	PASS
2395.975000	-36.5	27.4	-9.1	PASS
2399.325000	-36.5	27.4	-9.1	PASS
2399.375000	-36.6	27.4	-9.1	PASS
2397.025000	-36.6	27.5	-9.1	PASS
2398.575000	-36.7	27.6	-9.1	PASS
2396.525000	-36.8	27.6	-9.1	PASS
2396.475000	-36.8	27.7	-9.1	PASS
2396.975000	-36.9	27.7	-9.1	PASS
2398.475000	-37.0	27.8	-9.1	PASS
2396.075000	-37.0	27.8	-9.1	PASS
2399.975000	-37.1	28.0	-9.1	PASS

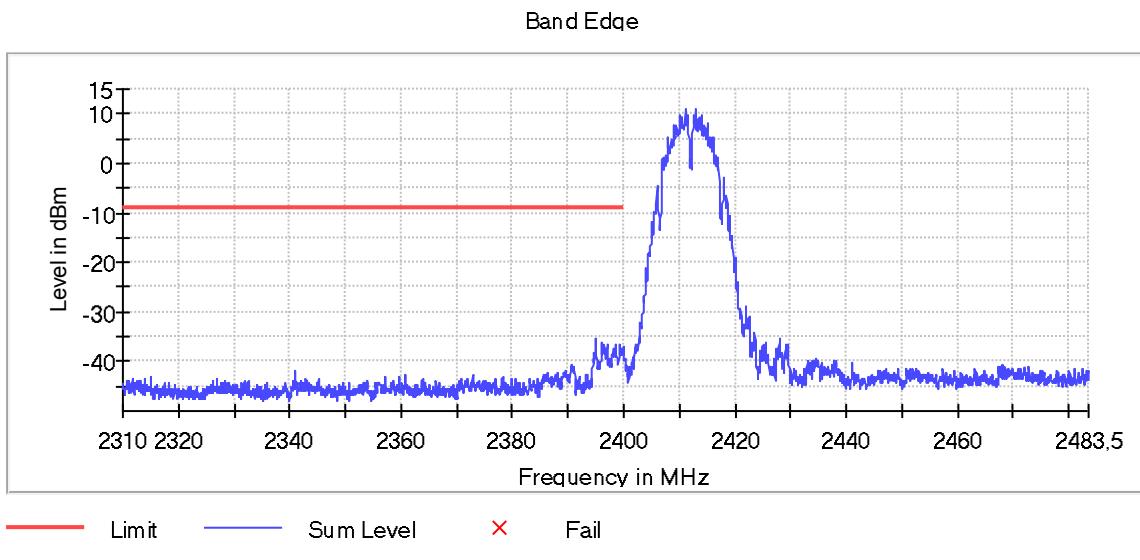

Plot 38: Mode 1, BEC, high channel

Result

DUT Frequency (MHz)	Result
2462.000000	PASS


Inband Peak

Frequency (MHz)	Level (dBm)
2461.025000	11.3

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.525000	-39.6	30.9	-8.7	PASS
2484.725000	-40.7	31.9	-8.7	PASS
2485.825000	-40.8	32.0	-8.7	PASS
2484.525000	-41.0	32.3	-8.7	PASS
2484.575000	-41.0	32.3	-8.7	PASS
2487.275000	-41.1	32.3	-8.7	PASS
2483.675000	-41.1	32.4	-8.7	PASS
2485.775000	-41.1	32.4	-8.7	PASS
2487.325000	-41.1	32.4	-8.7	PASS
2484.775000	-41.2	32.5	-8.7	PASS
2483.625000	-41.2	32.5	-8.7	PASS
2497.375000	-41.3	32.6	-8.7	PASS
2485.475000	-41.4	32.7	-8.7	PASS
2484.675000	-41.4	32.7	-8.7	PASS
2487.225000	-41.4	32.7	-8.7	PASS

Band Edge

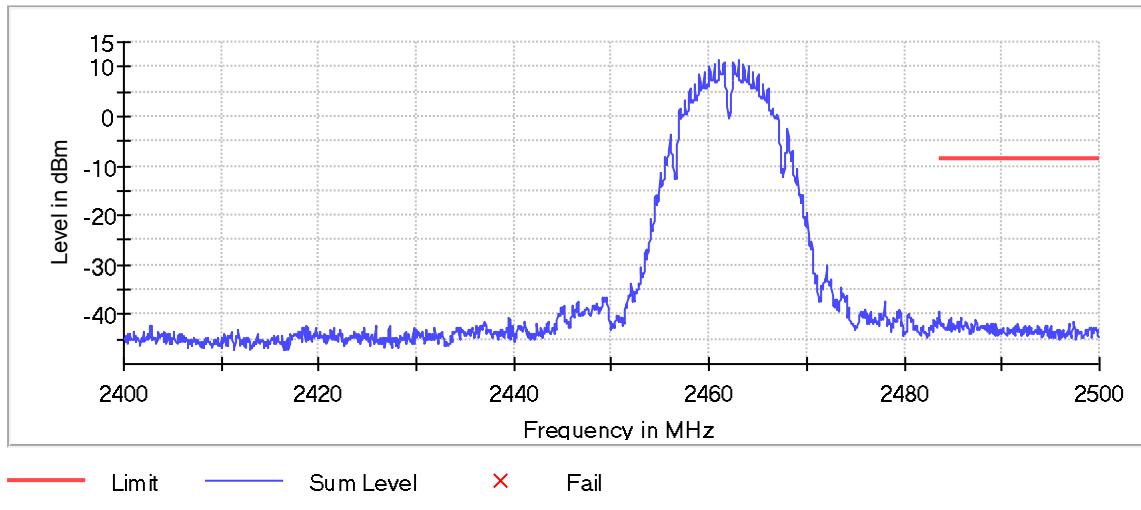

Plot 39: Mode 2, BEC, low channel

Result

DUT Frequency (MHz)	Result
2412.000000	PASS


Inband Peak

Frequency (MHz)	Level (dBm)
2419.525000	3.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.775000	-34.9	18.0	-16.9	PASS
2399.725000	-35.6	18.7	-16.9	PASS
2399.825000	-35.6	18.7	-16.9	PASS
2399.225000	-36.0	19.1	-16.9	PASS
2398.925000	-36.0	19.1	-16.9	PASS
2399.275000	-36.0	19.1	-16.9	PASS
2398.875000	-36.1	19.1	-16.9	PASS
2398.575000	-36.1	19.2	-16.9	PASS
2398.225000	-36.3	19.4	-16.9	PASS
2399.875000	-36.4	19.4	-16.9	PASS
2398.625000	-36.4	19.5	-16.9	PASS
2398.275000	-36.5	19.6	-16.9	PASS
2399.925000	-36.5	19.6	-16.9	PASS
2399.575000	-36.5	19.6	-16.9	PASS
2399.975000	-36.6	19.6	-16.9	PASS

Band Edge

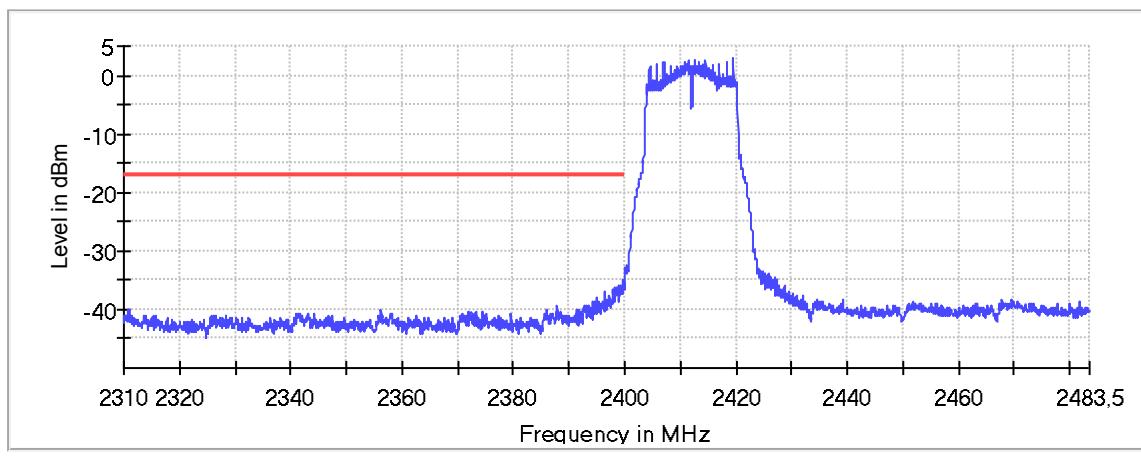

Plot 40: Mode 2, BEC, high channel

Result

DUT Frequency (MHz)	Result
2462.000000	PASS


Inband Peak

Frequency (MHz)	Level (dBm)
2469.525000	-1.6

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.525000	-48.1	26.5	-21.6	PASS
2484.225000	-48.1	26.5	-21.6	PASS
2484.175000	-48.1	26.5	-21.6	PASS
2483.575000	-48.2	26.5	-21.6	PASS
2487.025000	-48.7	27.1	-21.6	PASS
2485.325000	-48.8	27.2	-21.6	PASS
2483.975000	-48.8	27.2	-21.6	PASS
2487.075000	-48.9	27.3	-21.6	PASS
2484.025000	-49.0	27.4	-21.6	PASS
2486.425000	-49.0	27.4	-21.6	PASS
2484.875000	-49.1	27.4	-21.6	PASS
2484.775000	-49.1	27.5	-21.6	PASS
2484.275000	-49.1	27.5	-21.6	PASS
2484.575000	-49.1	27.5	-21.6	PASS
2485.025000	-49.1	27.5	-21.6	PASS

Band Edge

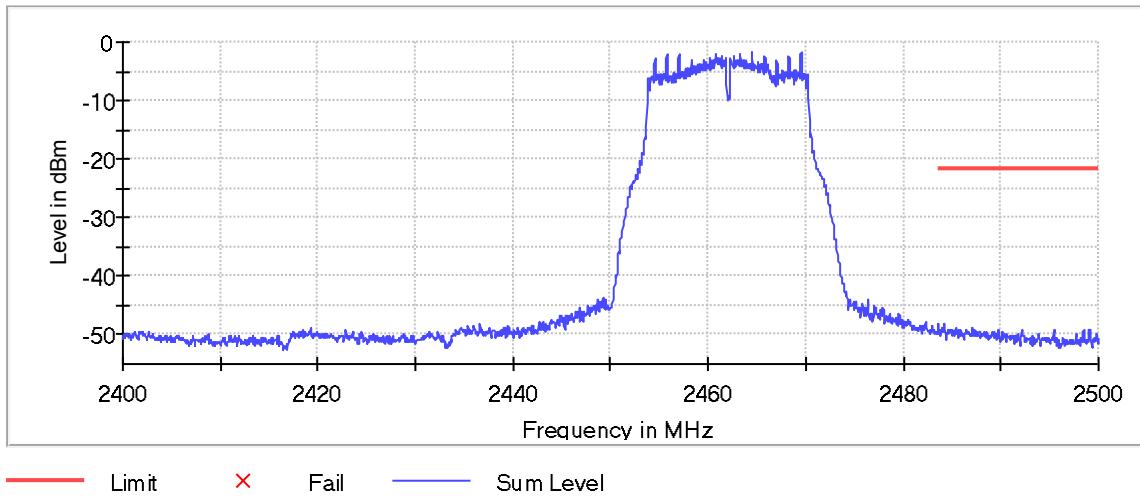

Plot 41: Mode 3, BEC, low channel

Result

DUT Frequency (MHz)	Result
2412.000000	PASS


Inband Peak

Frequency (MHz)	Level (dBm)
2419.525000	-1.4

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-46.8	25.4	-21.4	PASS
2399.925000	-48.3	26.9	-21.4	PASS
2399.675000	-48.5	27.1	-21.4	PASS
2399.725000	-48.5	27.1	-21.4	PASS
2399.875000	-48.7	27.3	-21.4	PASS
2399.825000	-48.8	27.4	-21.4	PASS
2399.225000	-49.0	27.6	-21.4	PASS
2399.175000	-49.2	27.8	-21.4	PASS
2399.775000	-49.3	27.9	-21.4	PASS
2399.275000	-49.3	27.9	-21.4	PASS
2399.625000	-49.4	28.0	-21.4	PASS
2399.475000	-49.5	28.1	-21.4	PASS
2399.525000	-49.5	28.1	-21.4	PASS
2396.325000	-49.5	28.1	-21.4	PASS
2399.575000	-49.6	28.2	-21.4	PASS

Band Edge

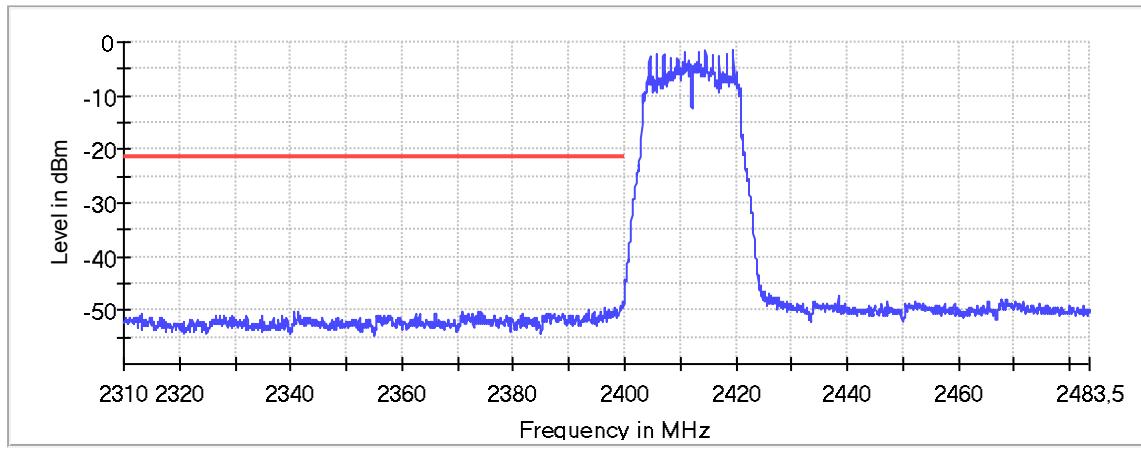

Plot 42: Mode 3, BEC, high channel

Result

DUT Frequency (MHz)	Result
2462.000000	PASS


Inband Peak

Frequency (MHz)	Level (dBm)
2469.525000	-1.6

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2486.725000	-48.5	26.9	-21.6	PASS
2485.325000	-48.6	27.0	-21.6	PASS
2484.975000	-48.6	27.0	-21.6	PASS
2484.925000	-48.8	27.1	-21.6	PASS
2486.925000	-48.8	27.2	-21.6	PASS
2483.975000	-48.8	27.2	-21.6	PASS
2485.375000	-48.8	27.2	-21.6	PASS
2485.875000	-48.9	27.2	-21.6	PASS
2486.975000	-48.9	27.3	-21.6	PASS
2483.575000	-49.0	27.3	-21.6	PASS
2498.075000	-49.0	27.4	-21.6	PASS
2486.775000	-49.0	27.4	-21.6	PASS
2485.025000	-49.1	27.5	-21.6	PASS
2485.275000	-49.1	27.5	-21.6	PASS
2485.825000	-49.2	27.5	-21.6	PASS

Band Edge

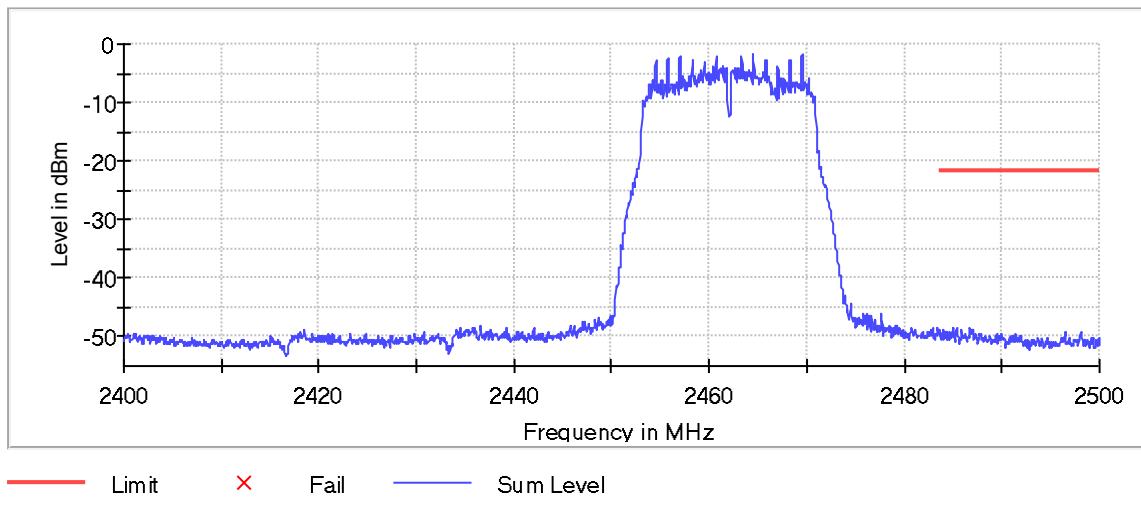

Plot 43: Mode 4, BEC, low channel

Result

DUT Frequency (MHz)	Result
2412.000000	PASS


Inband Peak

Frequency (MHz)	Level (dBm)
2419.525000	-1.5

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.425000	-45.8	24.2	-21.5	PASS
2399.475000	-46.0	24.5	-21.5	PASS
2399.975000	-46.2	24.6	-21.5	PASS
2399.775000	-46.3	24.7	-21.5	PASS
2399.175000	-46.4	24.9	-21.5	PASS
2399.925000	-46.4	24.9	-21.5	PASS
2399.825000	-46.6	25.0	-21.5	PASS
2399.225000	-46.6	25.0	-21.5	PASS
2399.725000	-46.8	25.3	-21.5	PASS
2399.375000	-46.9	25.4	-21.5	PASS
2399.675000	-47.0	25.5	-21.5	PASS
2399.275000	-47.2	25.7	-21.5	PASS
2399.875000	-47.2	25.7	-21.5	PASS
2399.625000	-47.3	25.7	-21.5	PASS
2399.575000	-47.4	25.9	-21.5	PASS

Band Edge

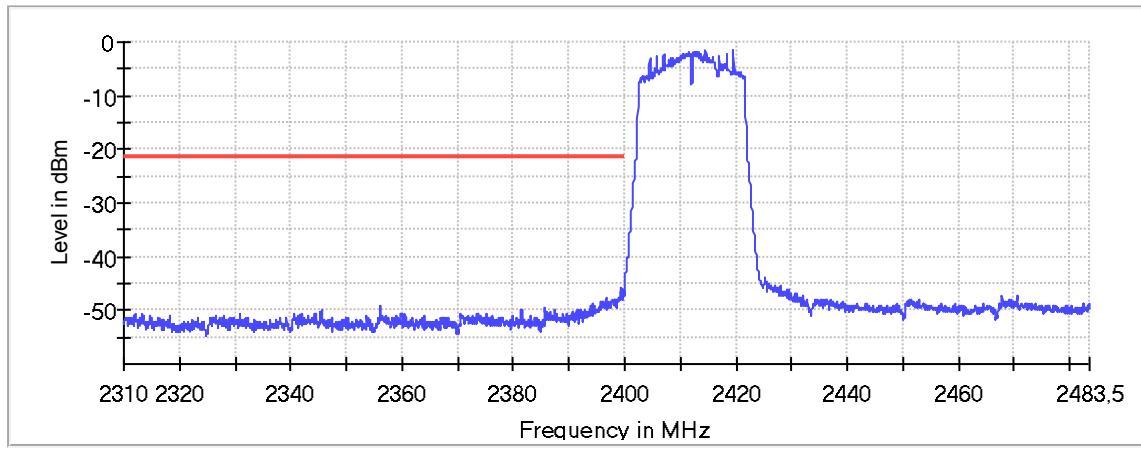

— Limit ✗ Fail — Sum Level

Plot 44: Mode 4, BEC, high channel

Result

DUT Frequency (MHz)	Result
2462.000000	PASS


Inband Peak

Frequency (MHz)	Level (dBm)
2469.525000	-1.6

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2485.725000	-48.4	26.8	-21.6	PASS
2484.025000	-48.5	27.0	-21.6	PASS
2484.275000	-48.6	27.0	-21.6	PASS
2485.375000	-48.6	27.0	-21.6	PASS
2484.375000	-48.6	27.0	-21.6	PASS
2484.425000	-48.6	27.1	-21.6	PASS
2483.975000	-48.6	27.1	-21.6	PASS
2485.675000	-48.6	27.1	-21.6	PASS
2484.325000	-48.7	27.1	-21.6	PASS
2485.325000	-48.7	27.1	-21.6	PASS
2484.725000	-48.7	27.1	-21.6	PASS
2485.525000	-48.7	27.1	-21.6	PASS
2483.575000	-48.7	27.2	-21.6	PASS
2484.625000	-48.8	27.2	-21.6	PASS
2484.675000	-48.8	27.2	-21.6	PASS

Band Edge

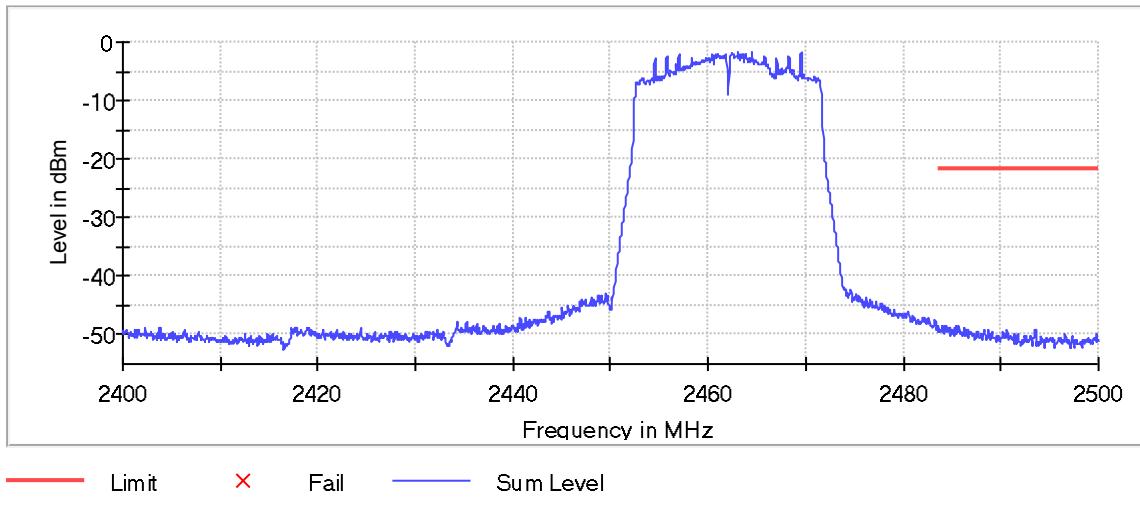

7.7 Band Edge Compliance (BEC), radiated

Applicability

This requirement applies to all types of DTS equipment.

Description

Emissions within a restricted band and within 2 MHz of an authorized band edge may be measured using either the marker-delta method (ANSI C63.10, 6.10.6) or the integration method (ANSI C63.20, 11.13.3), provided that the DTS bandwidth (or EBW) edge falls within 2 MHz of the band edge. Otherwise, all unwanted emissions measurements shall be performed using the standard methods.

Limits

§15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required

Test procedure

The marker-delta method as described in ANSI C63.10, 6.10.6 or the integration method as described in ANSI C63.10, 11.13.3 can be used to perform measurements of the unwanted emissions level at the band edges.

Test setup: 8.2 with radiated test sample (see 5.2)

Test results

BEC	low channel AVG / Peak [d μ V/m @ 3m]	high channel AVG / Peak [d μ V/m @ 3m]	Limit AVG / Peak [d μ V/m @ 3m]
Mode 1	≤ 41 / ≤ 53	≤ 40 / ≤ 56	54.0 AVG / 74.0 PK
Mode 2	≤ 37 / ≤ 57	≤ 37 / ≤ 55	54.0 AVG / 74.0 PK
Mode 3	≤ 36 / ≤ 54	≤ 37 / ≤ 54	54.0 AVG / 74.0 PK
Mode 4	≤ 36 / ≤ 54	≤ 37 / ≤ 54	54.0 AVG / 74.0 PK

Comment:	---	
----------	-----	--

Verdict	- PASS -	see next plots*
---------	----------	-----------------

* description of traces for radiated Bend Edge Compliance (BEC) measurements:




Pos-Peak (Max Hold) trace



Average (Max Hold) trace


Plot 45: Mode 1, BEC, low channel

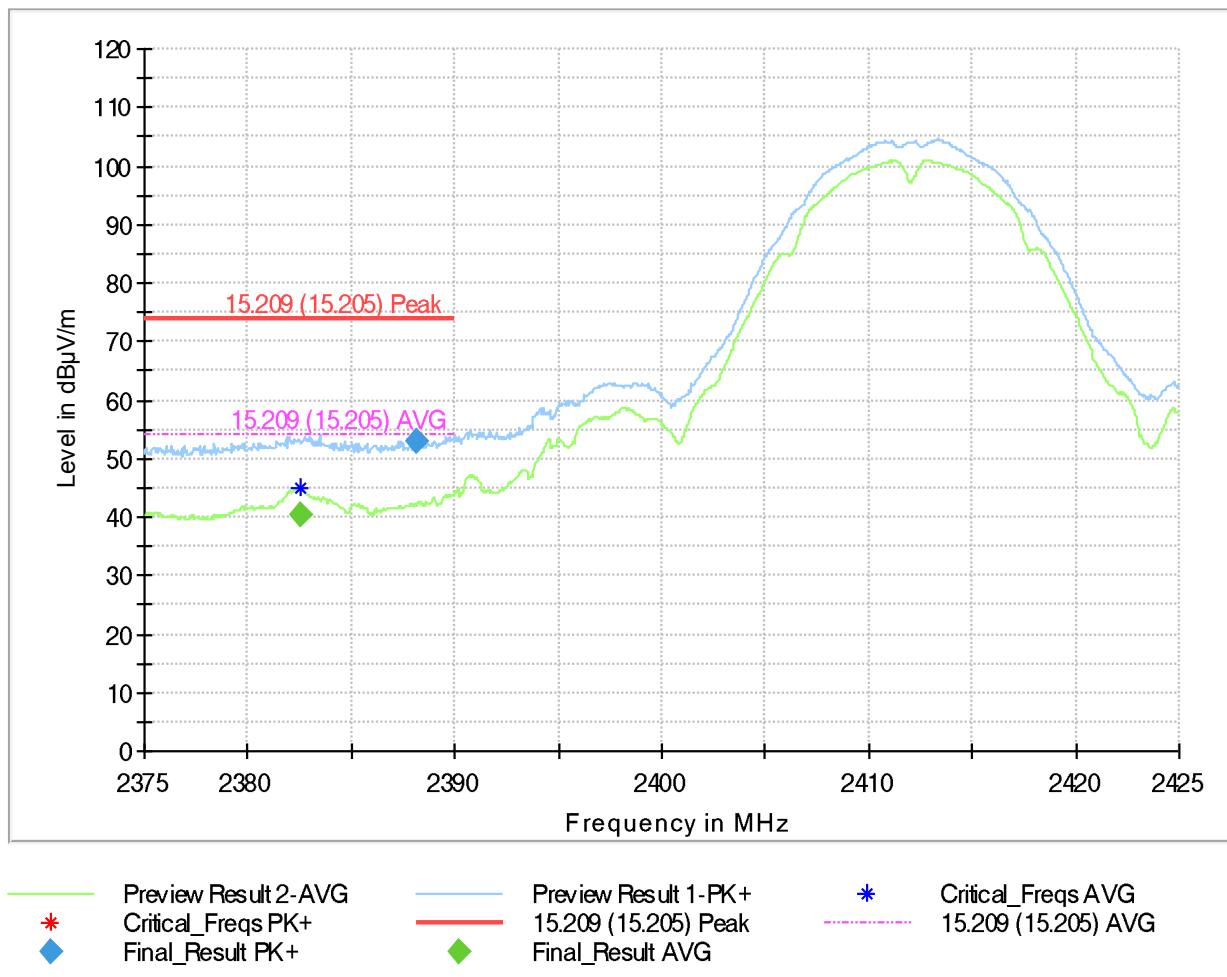

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2382.500000	---	40.41	54.00	13.59	10000.0	1000.000	150.0	V
2388.100000	52.79	---	74.00	21.21	10000.0	1000.000	150.0	V


Plot 46: Mode 1, BEC, high channel

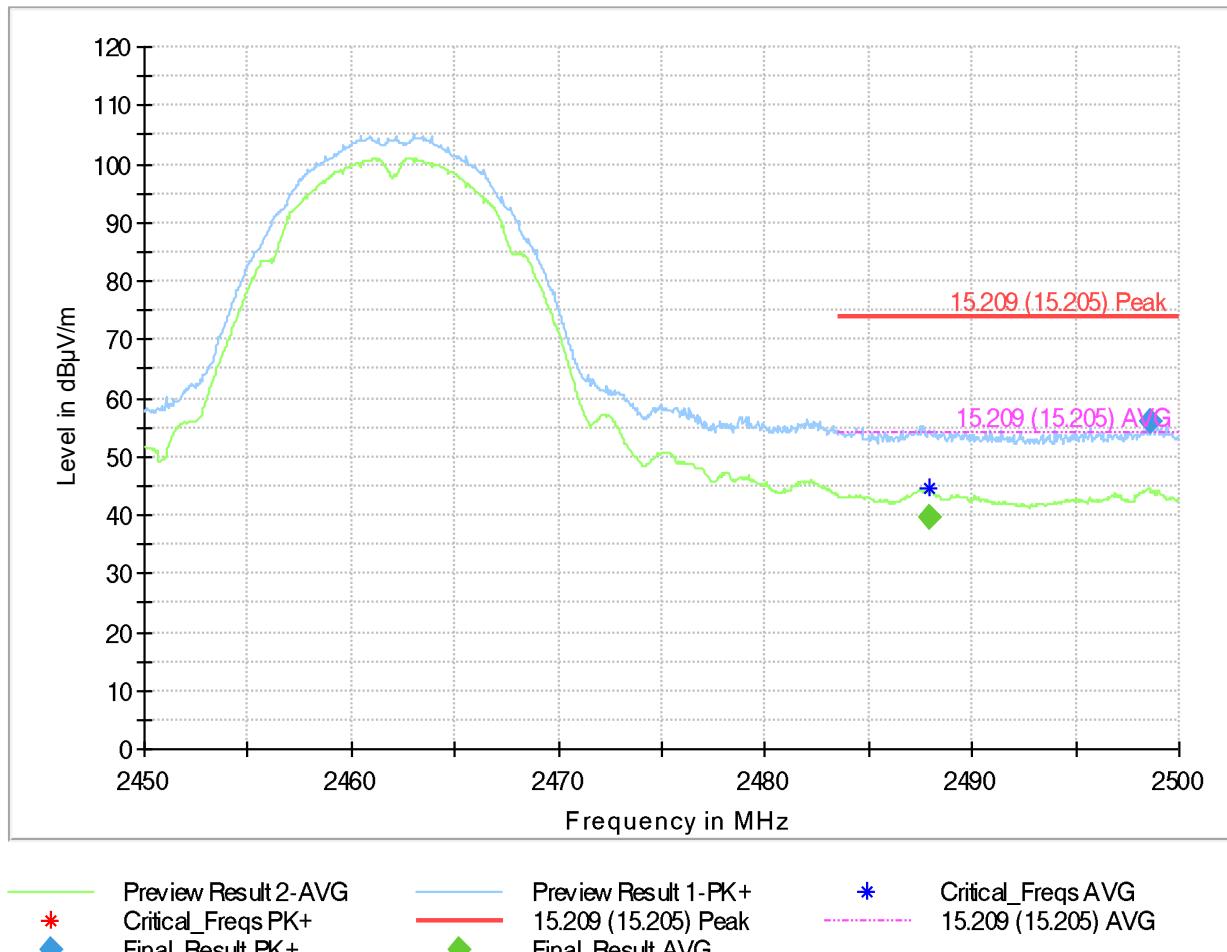

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2487.900000	---	39.57	54.00	14.43	10000.0	1000.000	150.0	V
2498.600000	55.97	---	74.00	18.03	10000.0	1000.000	150.0	V


Plot 47: Mode 2, BEC, low channel

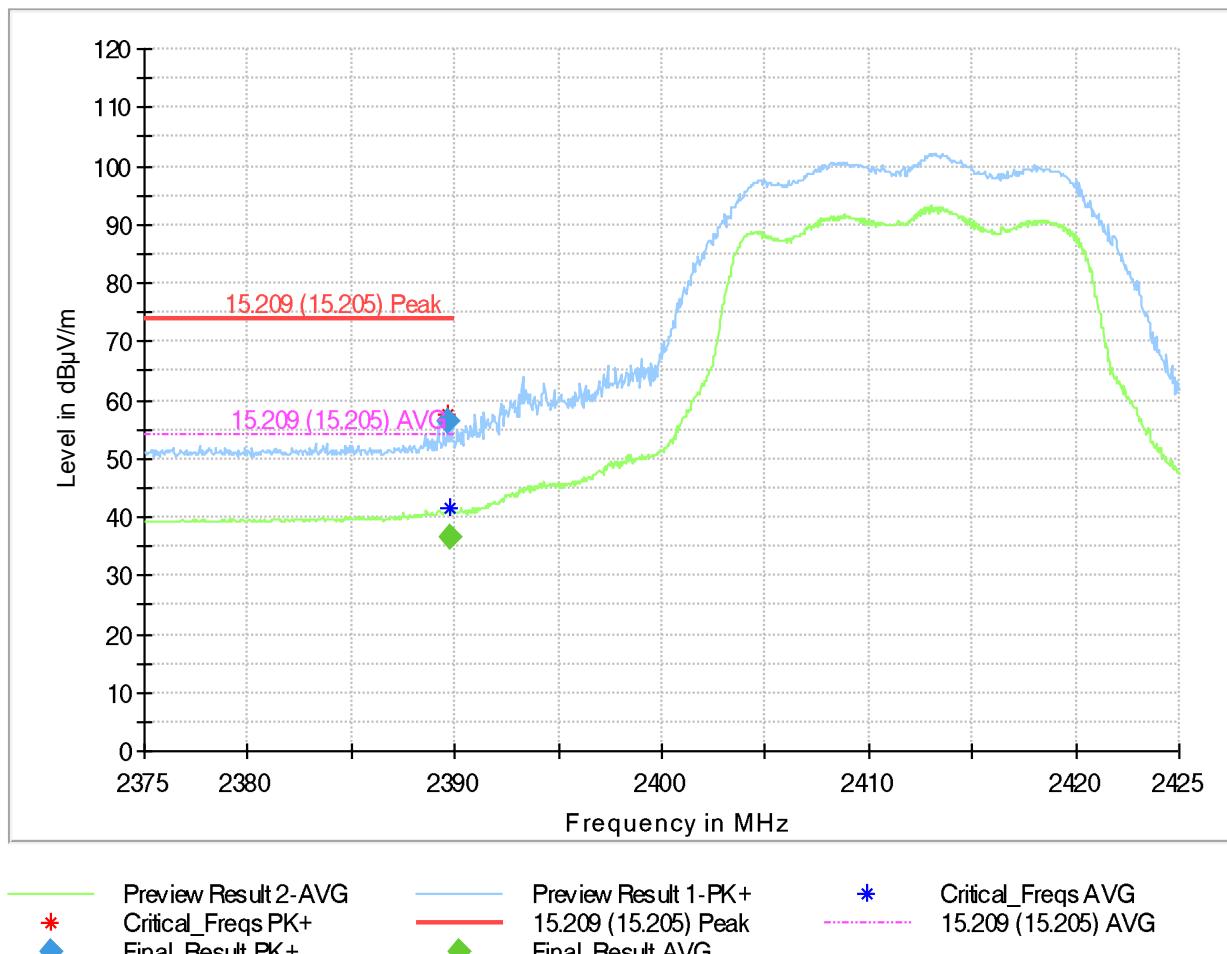

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2389.700000	56.29	---	74.00	17.71	10000.0	1000.000	150.0	V
2389.750000	---	36.58	54.00	17.42	10000.0	1000.000	150.0	V


Plot 48: Mode 2, BEC, high channel

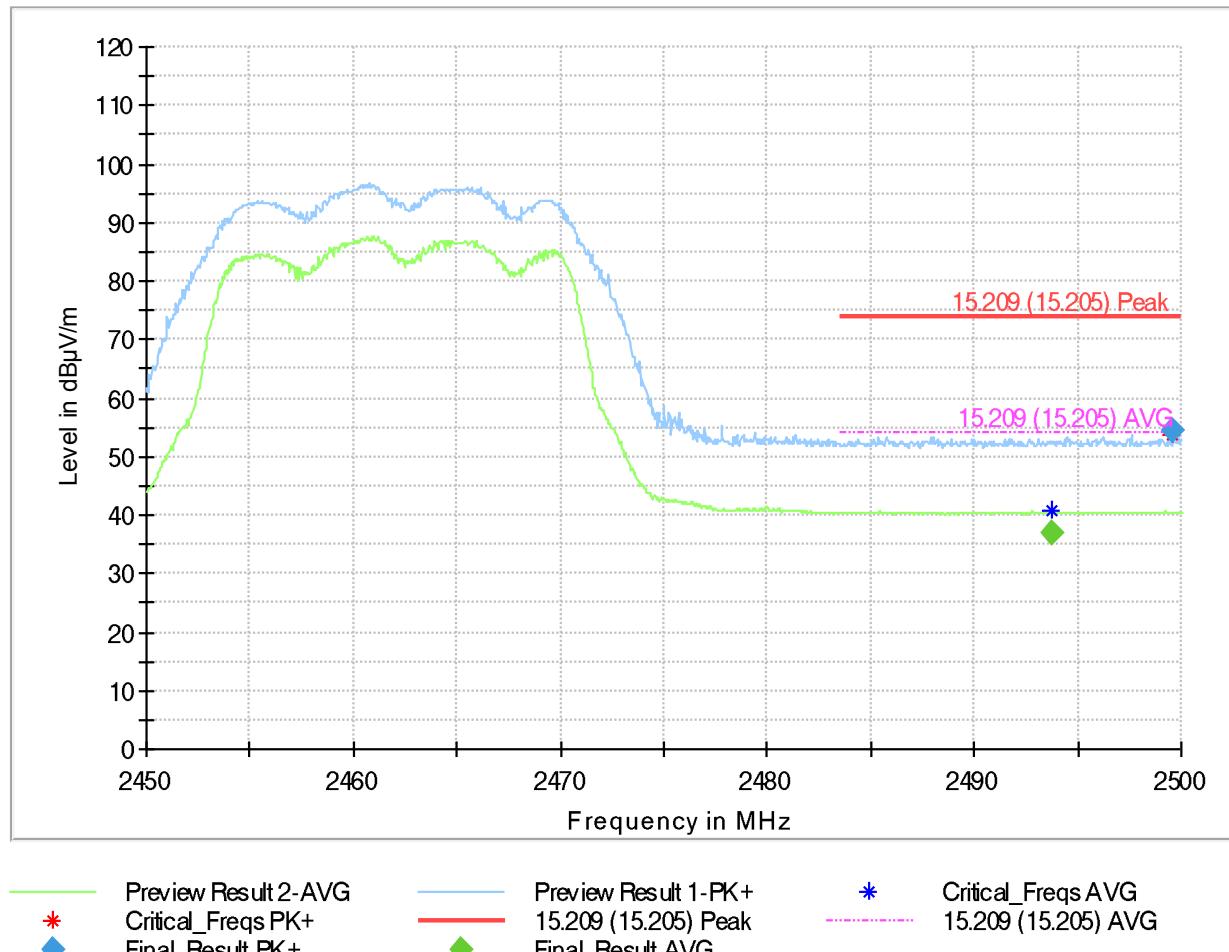

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2493.750000	---	36.99	54.00	17.01	10000.0	1000.000	150.0	V
2499.600000	54.47	---	74.00	19.53	10000.0	1000.000	150.0	V


Plot 49: Mode 3, BEC, low channel

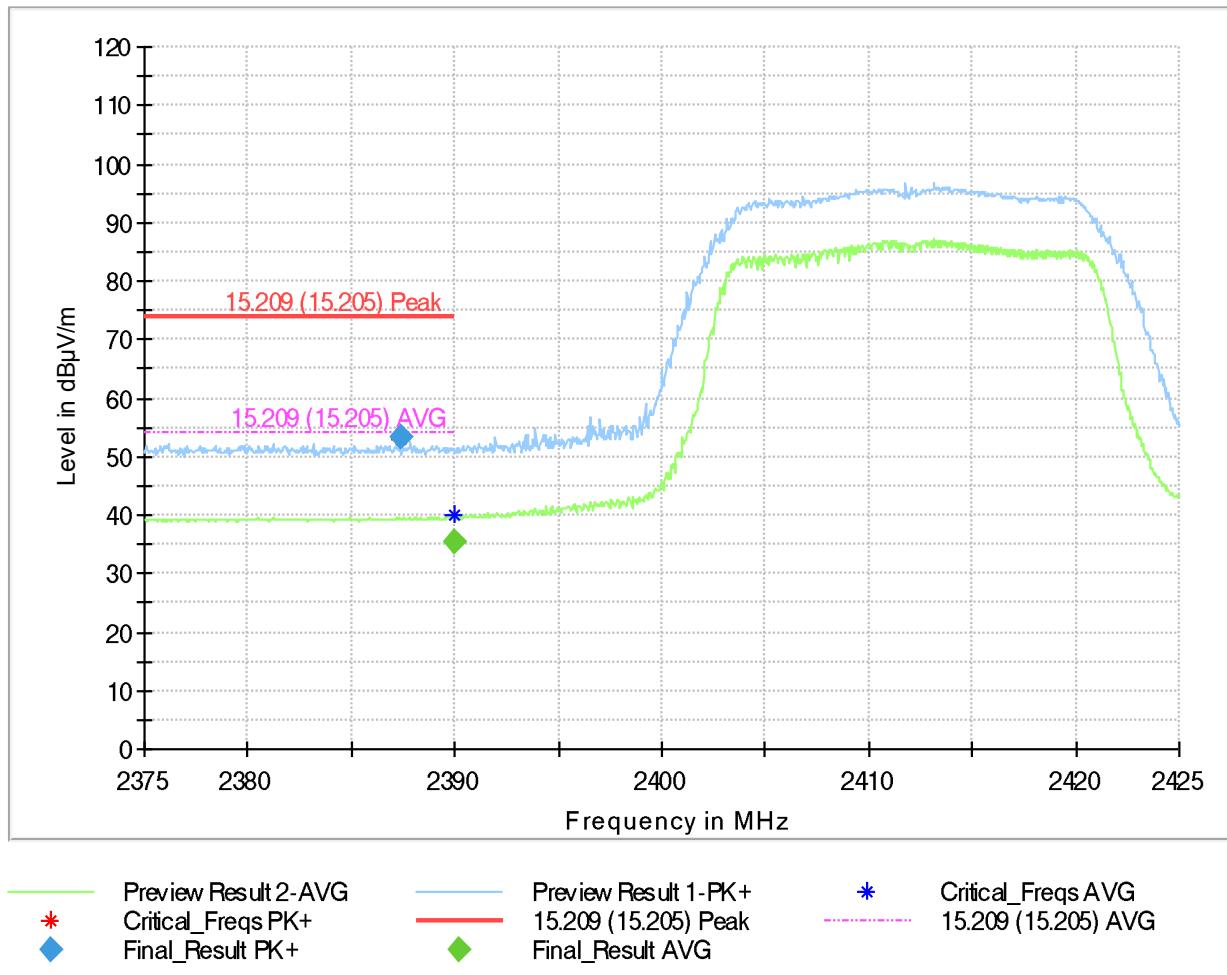

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2387.350000	53.49	---	74.00	20.51	10000.0	1000.000	150.0	V
2389.950000	---	35.40	54.00	18.60	10000.0	1000.000	150.0	V


Plot 50: Mode 3, BEC, high channel

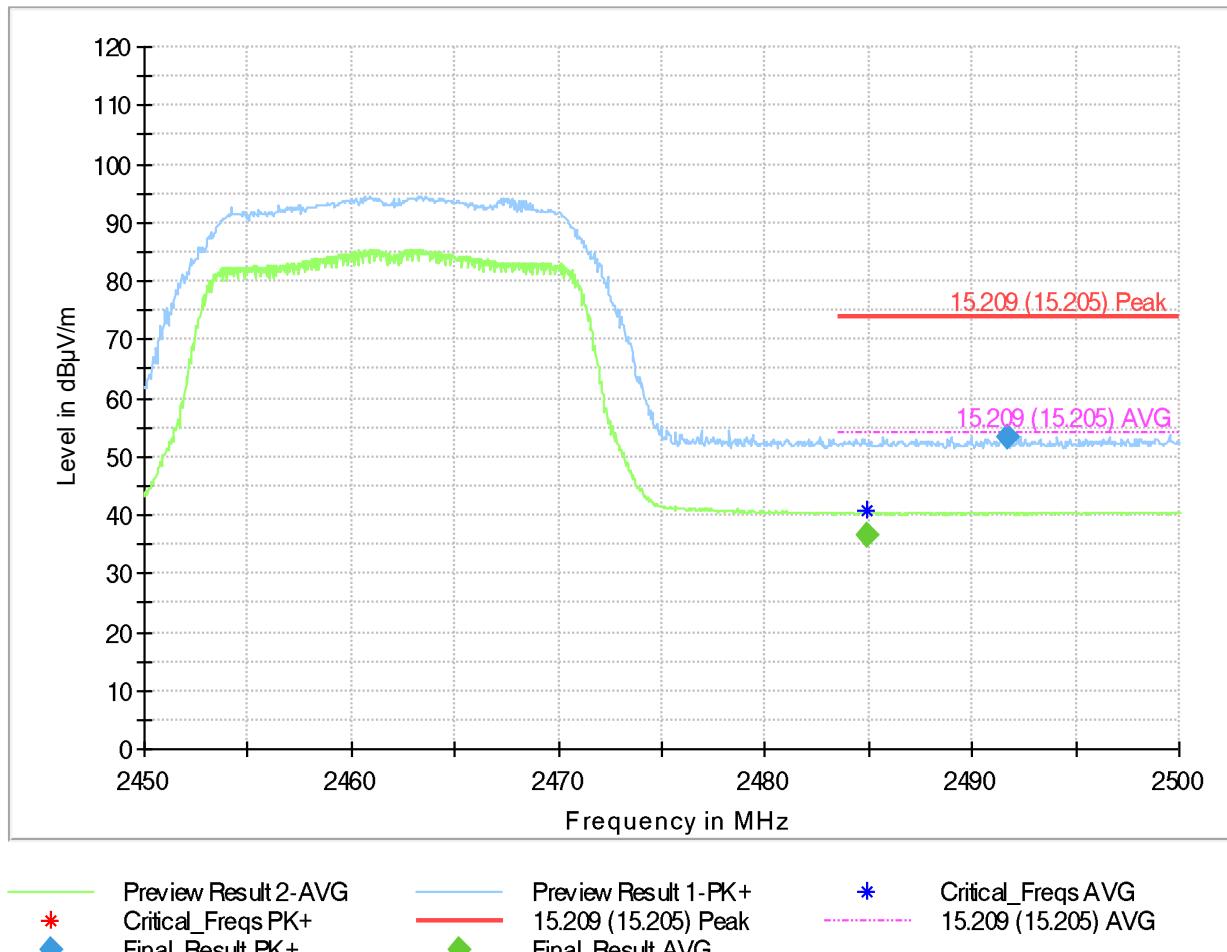

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2484.950000	---	36.73	54.00	17.27	10000.0	1000.000	150.0	V
2491.650000	53.44	---	74.00	20.56	10000.0	1000.000	150.0	H


Plot 51: Mode 4, BEC, low channel

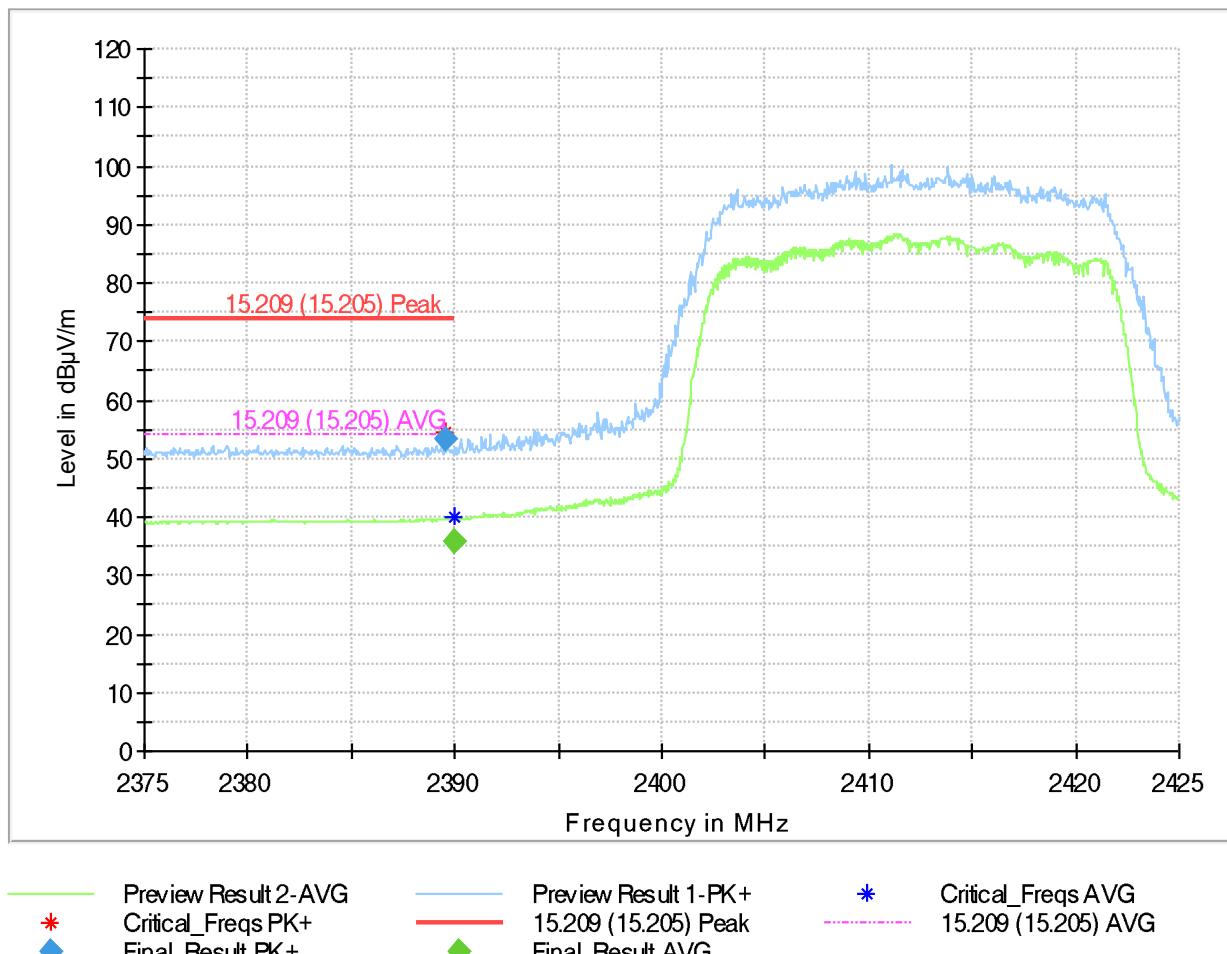

Final Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2389.500000	53.50	---	74.00	20.50	10000.0	1000.000	150.0	V
2389.950000	---	35.83	54.00	18.17	10000.0	1000.000	150.0	V

Plot 52: Mode 4, BEC, high channel

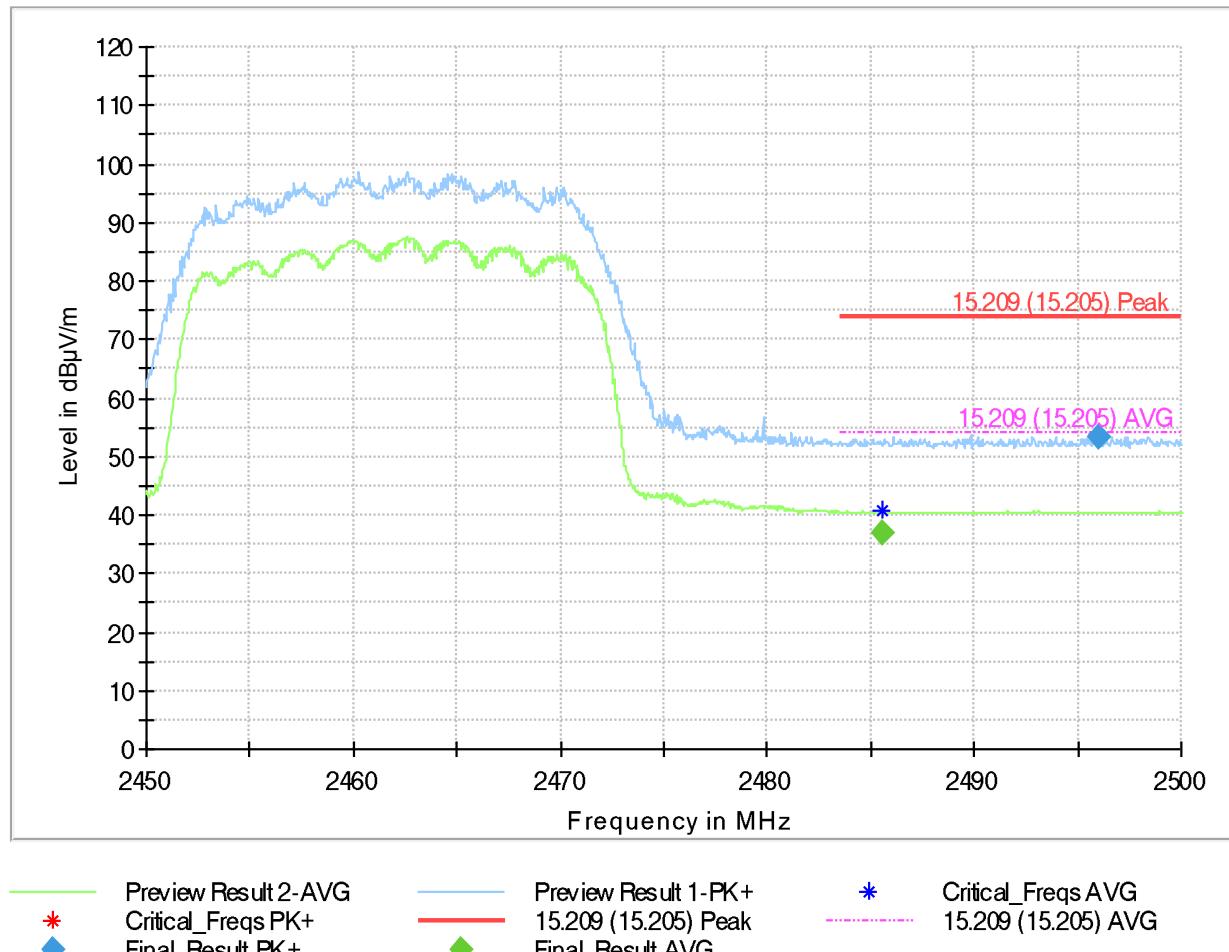

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2485.600000	---	37.07	54.00	16.93	10000.0	1000.000	150.0	V
2496.050000	53.46	---	74.00	20.54	10000.0	1000.000	150.0	V

7.8 Conducted Spurious Emissions (CSE)

Applicability

This requirement applies to all types of DTS equipment.

Description

Spurious emission / unwanted emissions are emission on a frequency or frequencies which are outside the authorized band and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products.

Limits

§15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits specified in §15.209(a) is not required.

RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test procedure

ANSI C63.10, 11.11

Reference level measurement:

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Emission level measurement:

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.

h) Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements as specified (≥ 20 dBc).

The marker-delta method, as described in ANSI C63.10, 6.10.6 can be used to perform measurements of the radiated unwanted emissions level at the band-edges provided that the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.

Test setup: 8.4 with conducted sample (see 5.2)

Test results (antenna 0)


EUT Mode / Channel	Frequency [MHz]	Peak/RMS Detector	Level [dBm]	Limit [dBm]	Verdict
Mode 1 / low channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -
Mode 1 / mid channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -
Mode 1 / high channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -
Mode 2 / low channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -
Mode 2 / mid channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -
Mode 2 / high channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -
Mode 3 / low channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -
Mode 3 / mid channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -
Mode 3 / high channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -
Mode 4 / low channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -
Mode 4 / mid channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -
Mode 4 / high channel	see next plots	Pos-Peak / Max-Hold	see next plots*	see next plots	- passed -

* all detected peaks are more than 6 dB below the limit


Comment:	---
-----------------	-----

Verdict	- PASS -	see next plots
----------------	-----------------	----------------


Plot 53: Mode 1, CSE, low channel, 30 MHz – 26 GHz

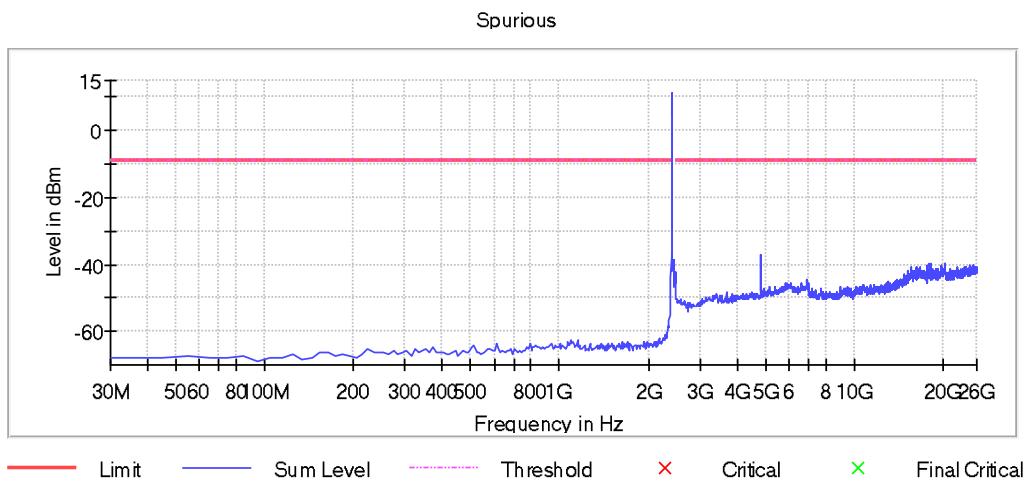


Plot 54: Mode 1, CSE, mid channel, 30 MHz – 26 GHz

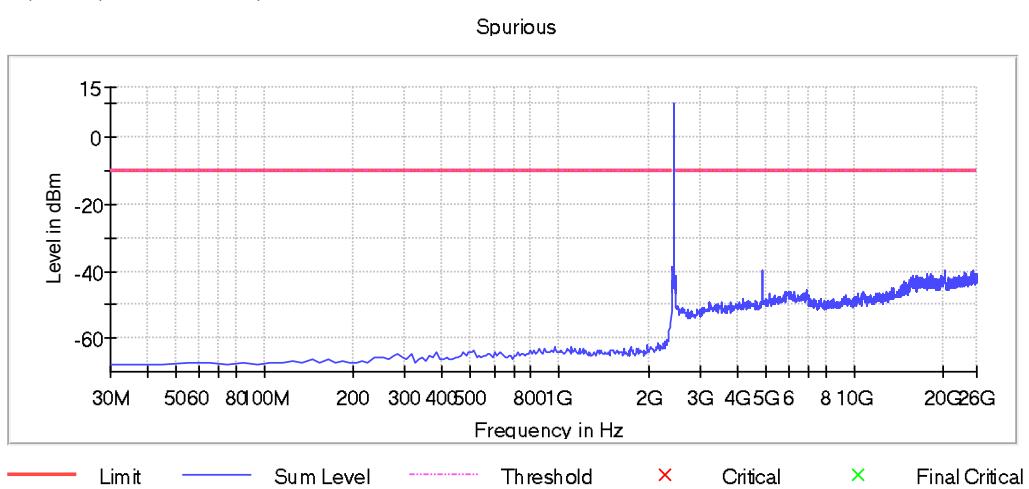


Plot 55: Mode 1, CSE, low channel, 30 MHz – 26 GHz

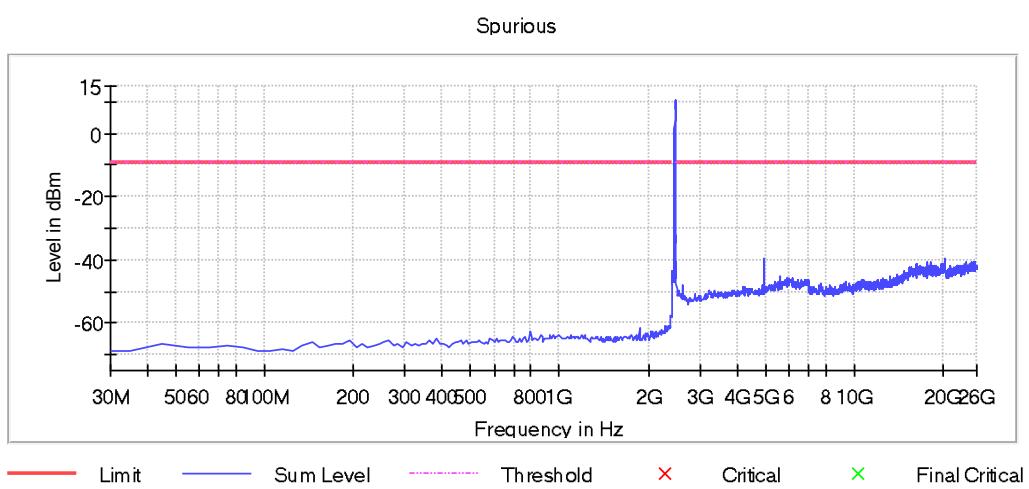


Plot 56: Mode 2, CSE, low channel, 30 MHz – 26 GHz

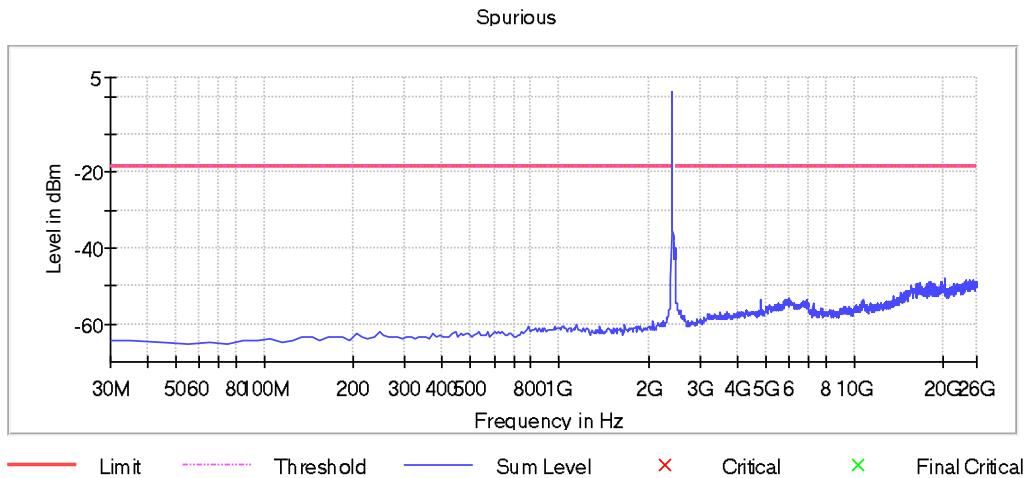


Plot 57: Mode 2, CSE, mid channel, 30 MHz – 26 GHz

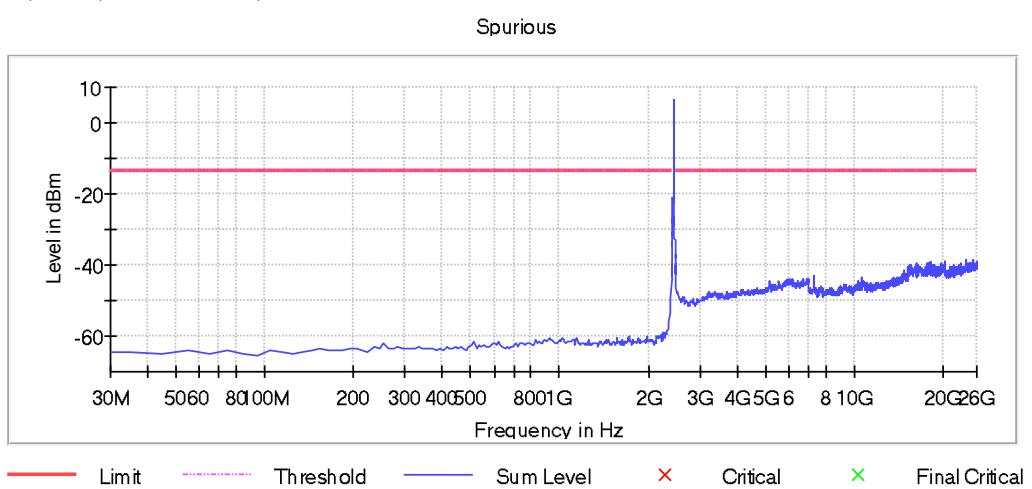


Plot 58: Mode 2, CSE, high channel, 30 MHz – 26 GHz

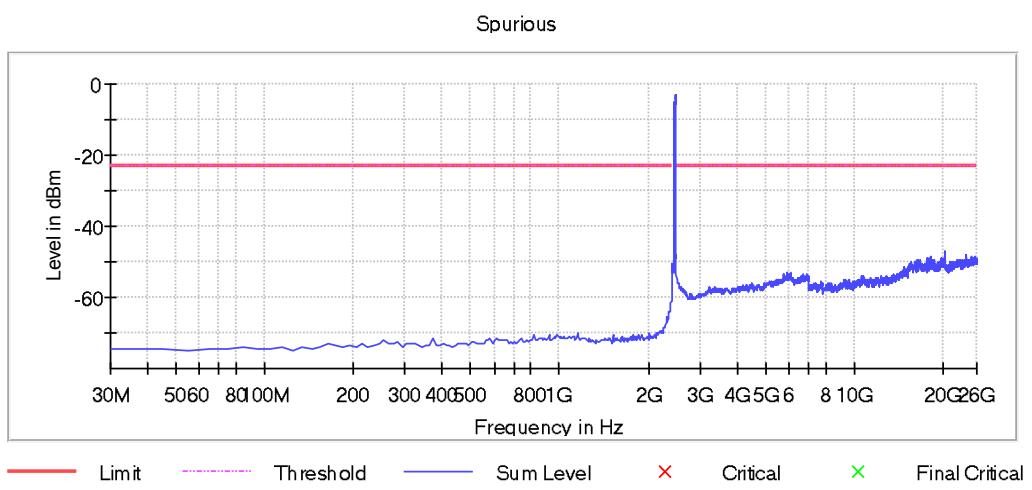


Plot 59: Mode 3, CSE, low channel, 30 MHz – 26 GHz

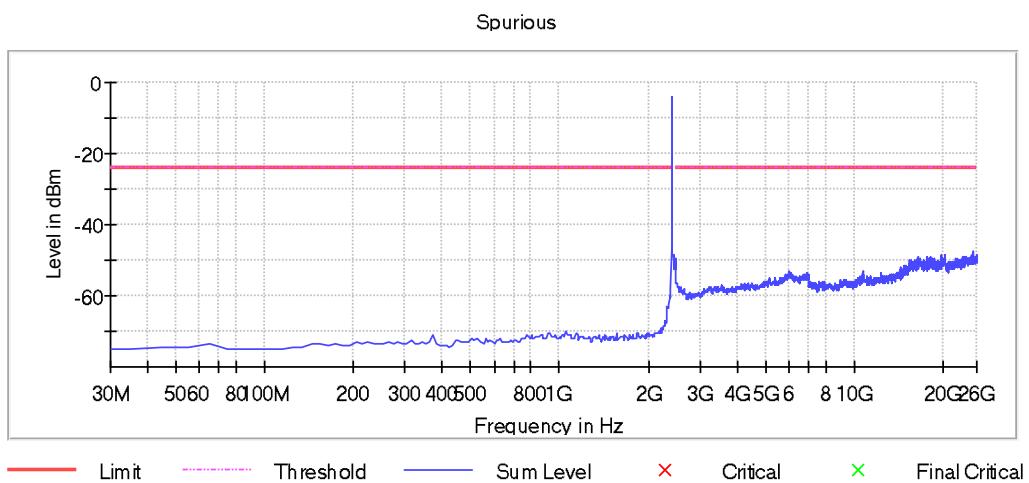


Plot 60: Mode 3, CSE, mid channel, 30 MHz – 26 GHz

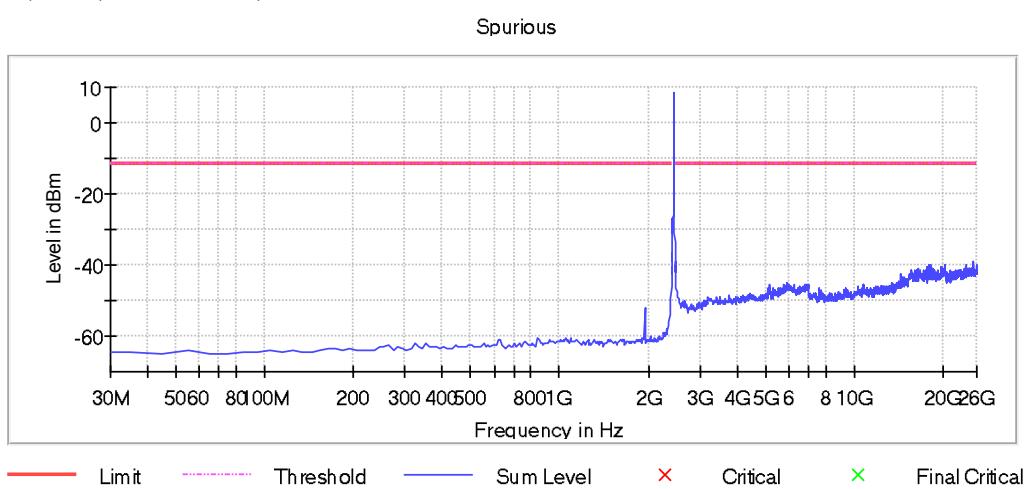


Plot 61: Mode 3, CSE, high channel, 30 MHz – 26 GHz

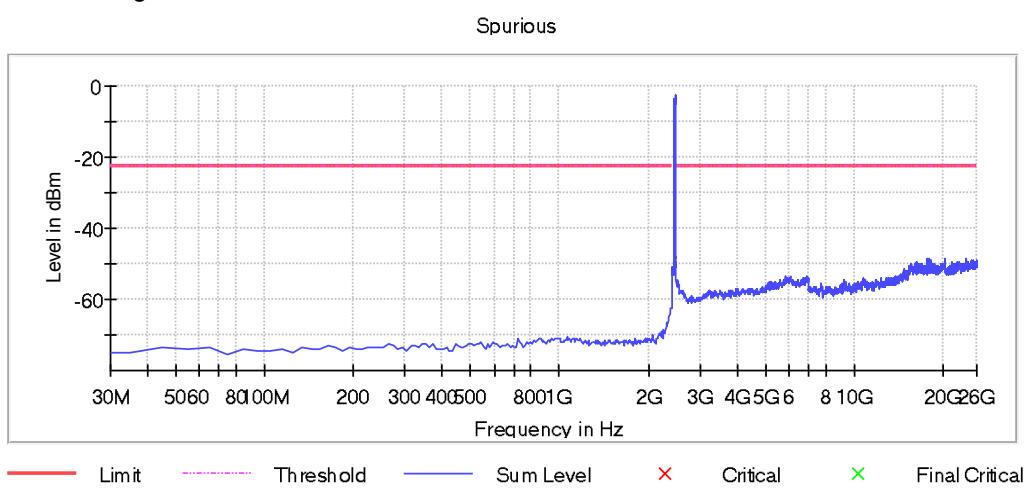


Plot 62: Mode 4, CSE, low channel, 30 MHz – 26 GHz

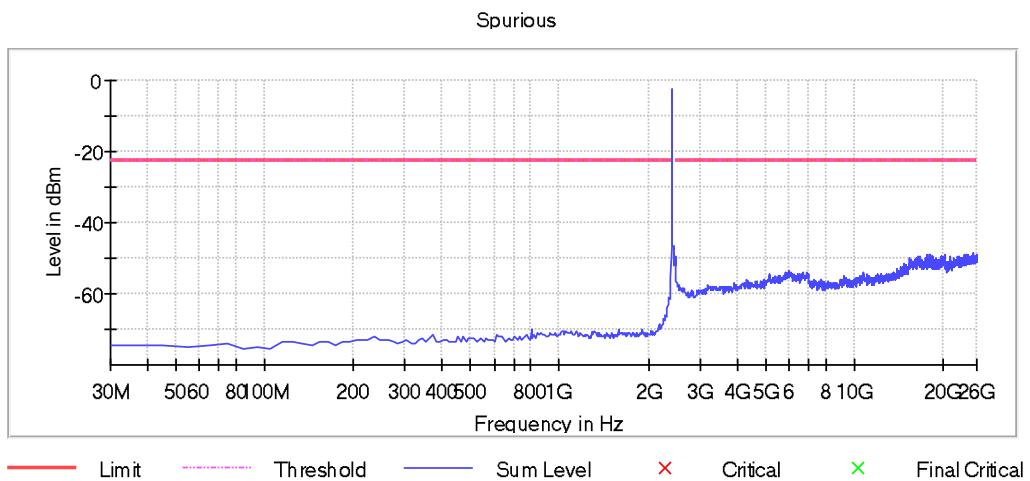

Plot 63: Mode 4, CSE, mid channel, 30 MHz – 26 GHz

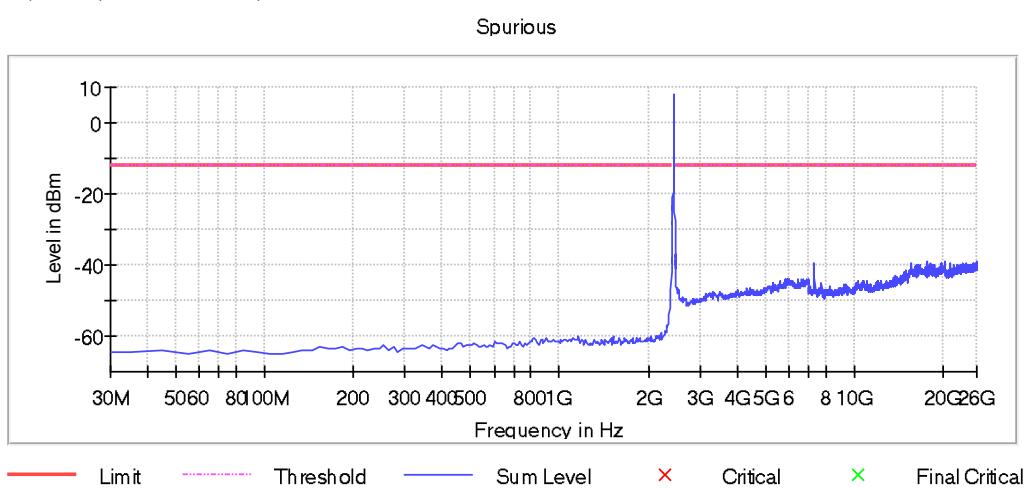

Plot 64: Mode 4, CSE, high channel, 30 MHz – 26 GHz

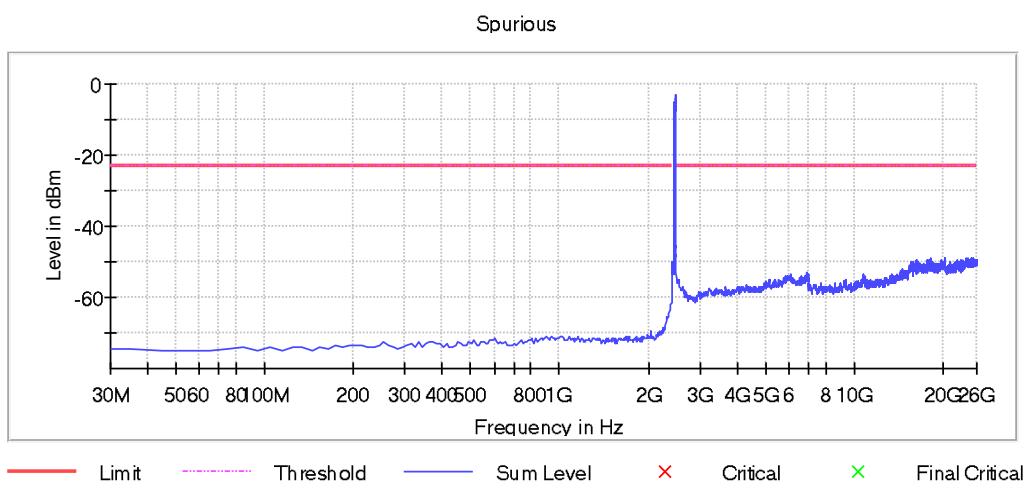

7.9 Radiated Spurious Emissions (RSE)

Applicability

This requirement applies to all types of DTS equipment.

Description

Spurious emission / unwanted emissions are emission on a frequency or frequencies which are outside the authorized band and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products. Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation.

Limits

15.247(d) / §15.209

RSS-247, 5.5 / RSS-Gen, 8.9

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency [MHz]	Field Strength [μ V/m] / [dB μ V/m]	Measurement distance [m]
0.009 – 0.490	2400/F[kHz]	300
0.490 – 1.705	24000/F[kHz]	30
1.705 – 30.0	30.0 / 29.5	30
30 – 88	100 / 40.0	3
88 – 216	150 / 43.5	3
216 – 960	200 / 46.0	3
960 – 40 000	500 / 54.0	3

Note

Radiated Spurious Emissions (RSE) are performed for low / mid / high channel.

Test setup: 8.1, 8.2, 8.3 with radiated test sample (see 5.2)

Test results (antenna 0 + 1)					
EUT Mode / Channel	Frequency [MHz]	Detector	Level [dB μ V/m @LD]	Limit [dB μ V/m @LD]	Verdict
Mode 1 / low channel	see plots	MaxPeak	see plots	see plots	- passed -
Mode 1 / high channel	see plots	MaxPeak	see plots	see plots	- passed -
Mode 2 / low channel	see plots	MaxPeak	see plots	see plots	- passed -
Mode 2 / high channel	see plots	MaxPeak	see plots	see plots	- passed -
Mode 4 / low channel	see plots	MaxPeak	see plots	see plots	- passed -
Mode 4 / high channel	see plots	MaxPeak	see plots	see plots	- passed -

Note:


LD = Limit Distance of 300m / 30m / 3m depending on frequency range, see limit table

Comment:	---	
Verdict	- PASS -	see next plots**

** description of line and marker for all radiated spurious emission (RSE) measurements:

-  Pos-Peak (Max Hold) trace during pre-scan
-  Max Peak value
-  final Quasi Peak / AVG value

Plot 65: Mode 1, RSE, 9 kHz – 30 MHz, low channel, loop antenna

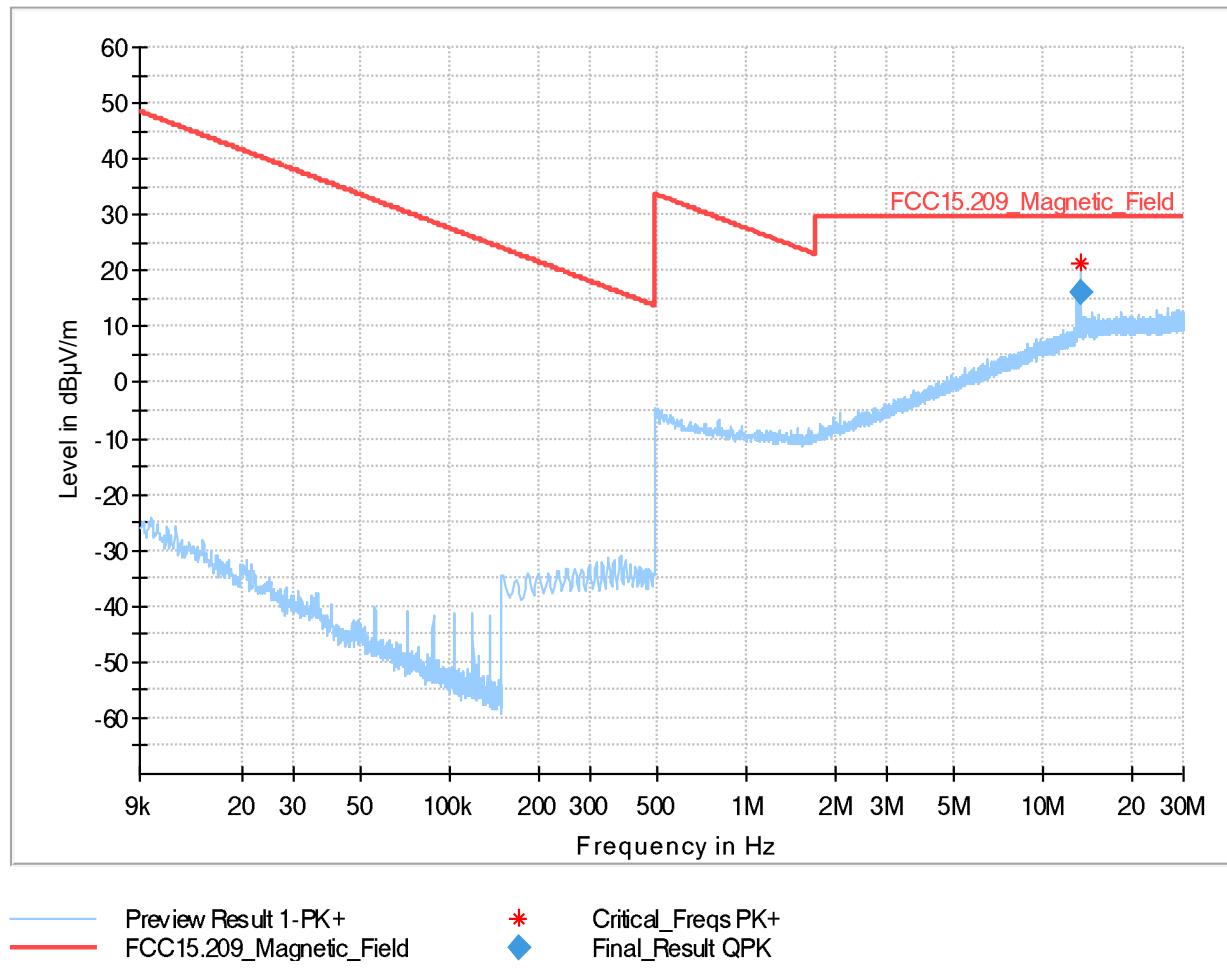

Final_Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
13.560000	16.10	29.54	13.44	100.0	9.000	V	142.0	-0.9

Note:

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y - 51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to the 15.209(a) limit.

(Certification & Engineering Bureau, Q&A on Certification Procedures and Requirements, TCB Workshop April 2020, Nicolas DesMarais, 2020-04-09 - ISED Q&A - DesMarais.pdf)

Plot 66: Mode 1, RSE, 9 kHz – 30 MHz, mid channel, loop antenna

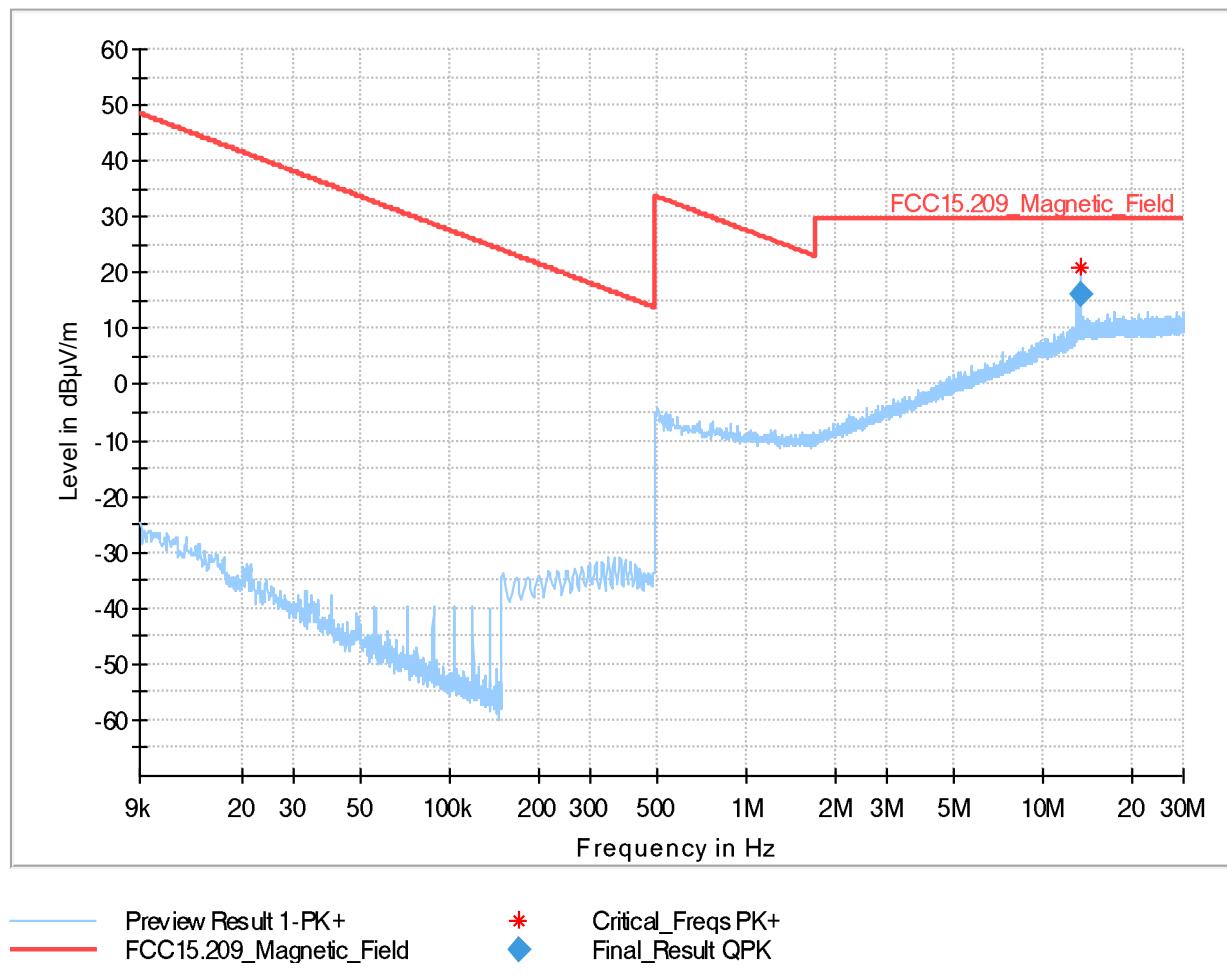

Final_Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
13.560000	16.00	29.54	13.54	100.0	9.000	V	82.0	-0.9

Note:

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y - 51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to the 15.209(a) limit.

(Certification & Engineering Bureau, Q&A on Certification Procedures and Requirements, TCB Workshop April 2020, Nicolas DesMarais, 2020-04-09 - ISED Q&A - DesMarais.pdf)

Plot 67: Mode 1, RSE, 9 kHz – 30 MHz, high channel, loop antenna

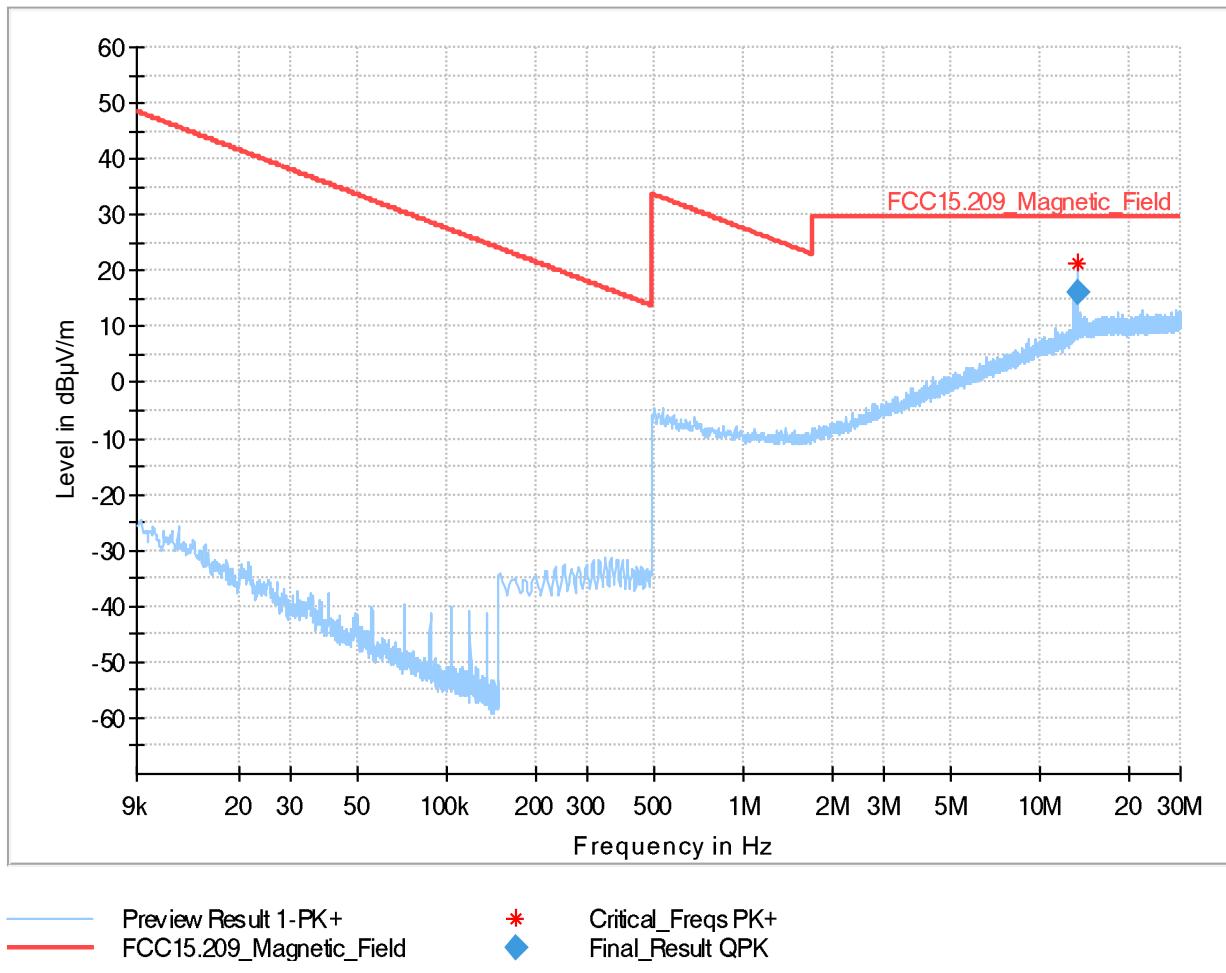

Final_Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
13.560000	16.29	29.54	13.25	100.0	9.000	V	97.0	-0.9

Note:

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y - 51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to the 15.209(a) limit.

(Certification & Engineering Bureau, Q&A on Certification Procedures and Requirements, TCB Workshop April 2020, Nicolas DesMarais, 2020-04-09 - ISED Q&A - DesMarais.pdf)


Plot 68: Mode 1, RSE, 30 MHz – 1 GHz, low channel, horizontal / vertical polarisation

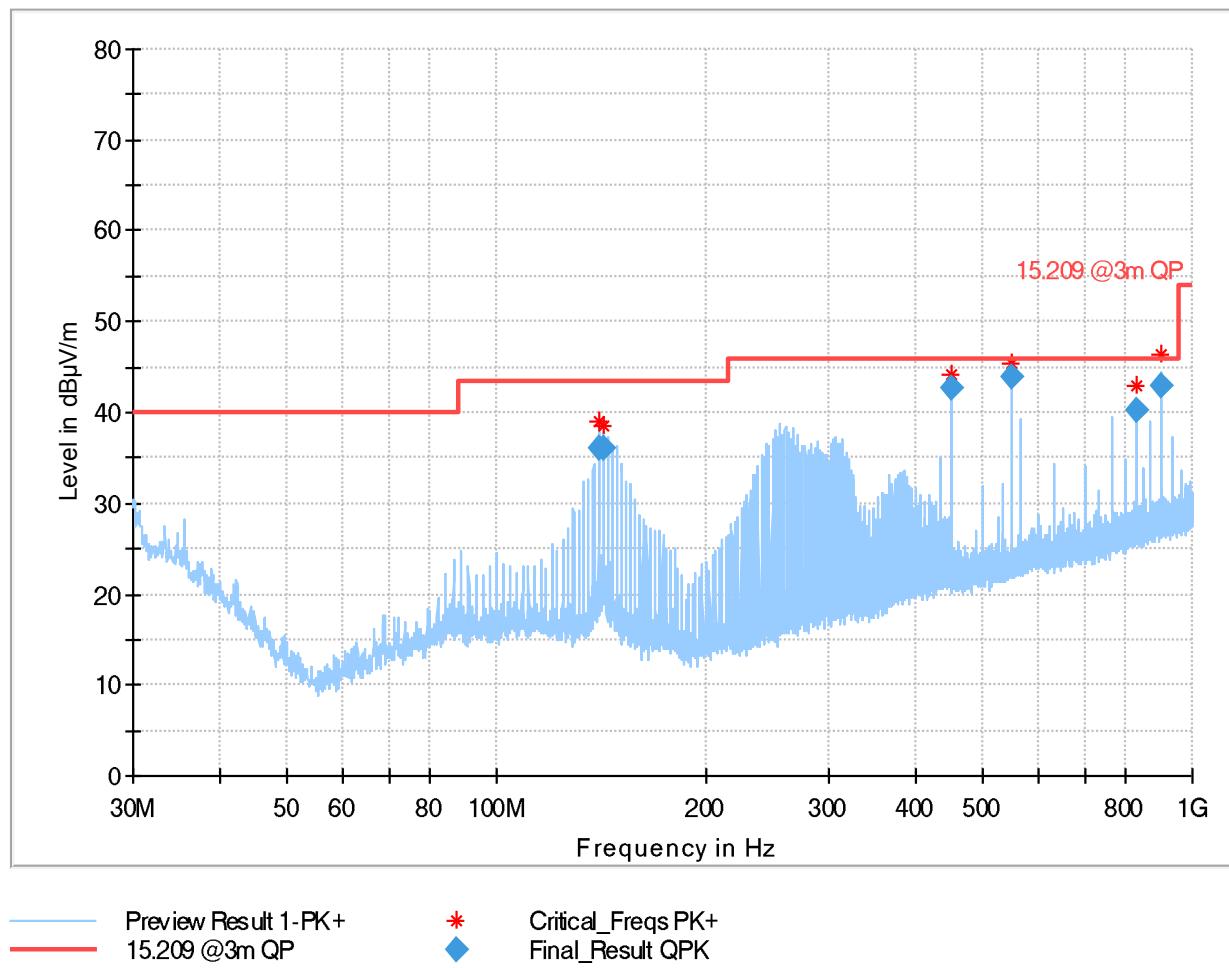

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
140.028000	36.11	43.50	7.39	100.0	120.000	253.0	H	225.0
142.259000	36.14	43.50	7.36	100.0	120.000	264.0	H	263.0
450.010000	42.70	46.00	3.30	100.0	120.000	100.0	V	153.0
549.987000	43.88	46.00	2.12	100.0	120.000	100.0	V	220.0
833.324000	40.17	46.00	5.83	100.0	120.000	100.0	H	84.0
900.011500	43.02	46.00	2.98	100.0	120.000	104.0	H	130.0


Plot 69: Mode 1, RSE, 30 MHz – 1 GHz, mid channel, horizontal / vertical polarisation

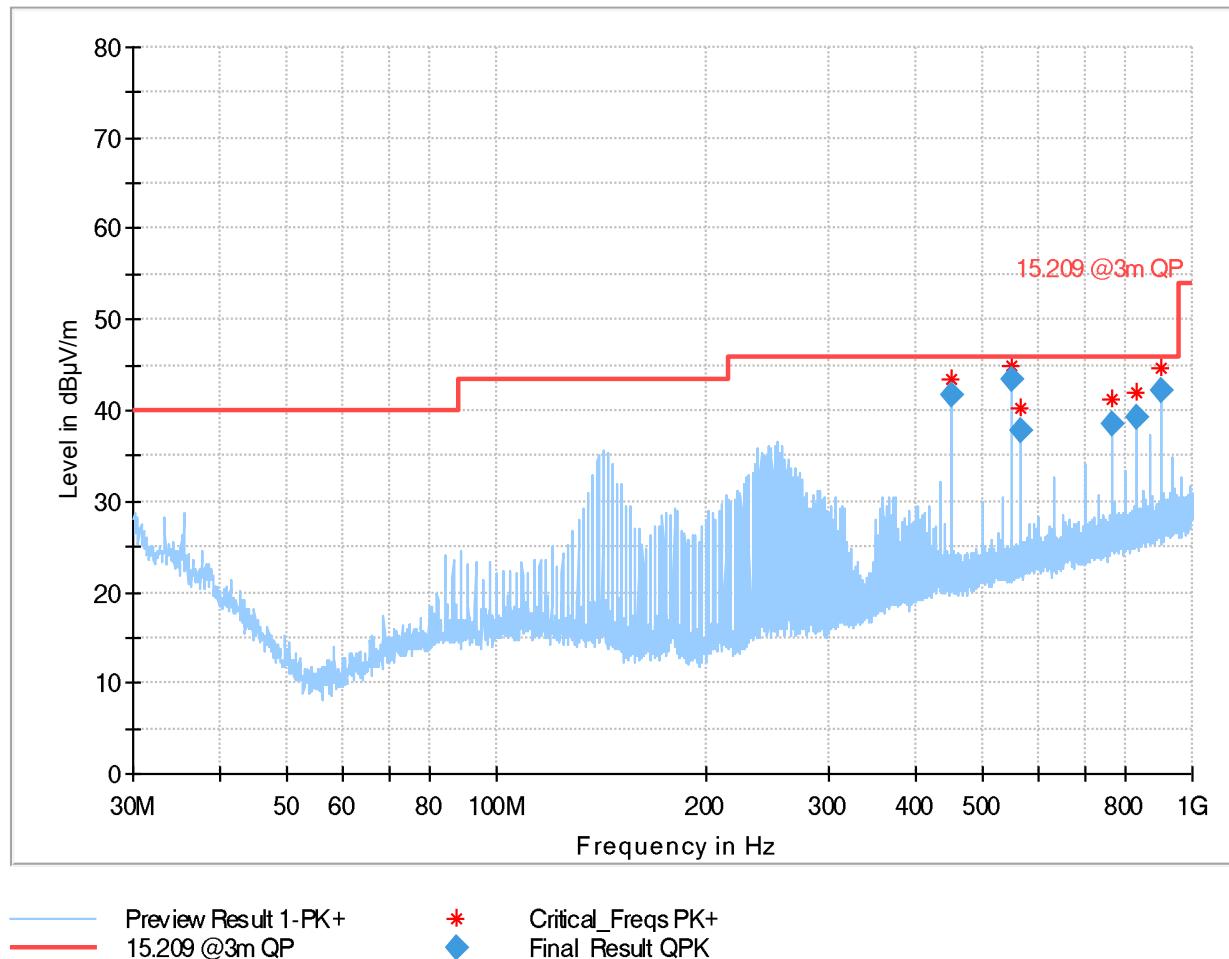

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
450.010000	41.74	46.00	4.26	100.0	120.000	103.0	V	152.0
549.987000	43.46	46.00	2.54	100.0	120.000	100.0	V	222.0
566.652500	37.74	46.00	8.26	100.0	120.000	100.0	V	100.0
766.655000	38.49	46.00	7.51	100.0	120.000	100.0	H	125.0
833.324000	39.33	46.00	6.67	100.0	120.000	103.0	H	119.0
900.011500	42.26	46.00	3.74	100.0	120.000	100.0	H	124.0


Plot 70: Mode 1, RSE, 30 MHz – 1 GHz, high channel, horizontal / vertical polarisation

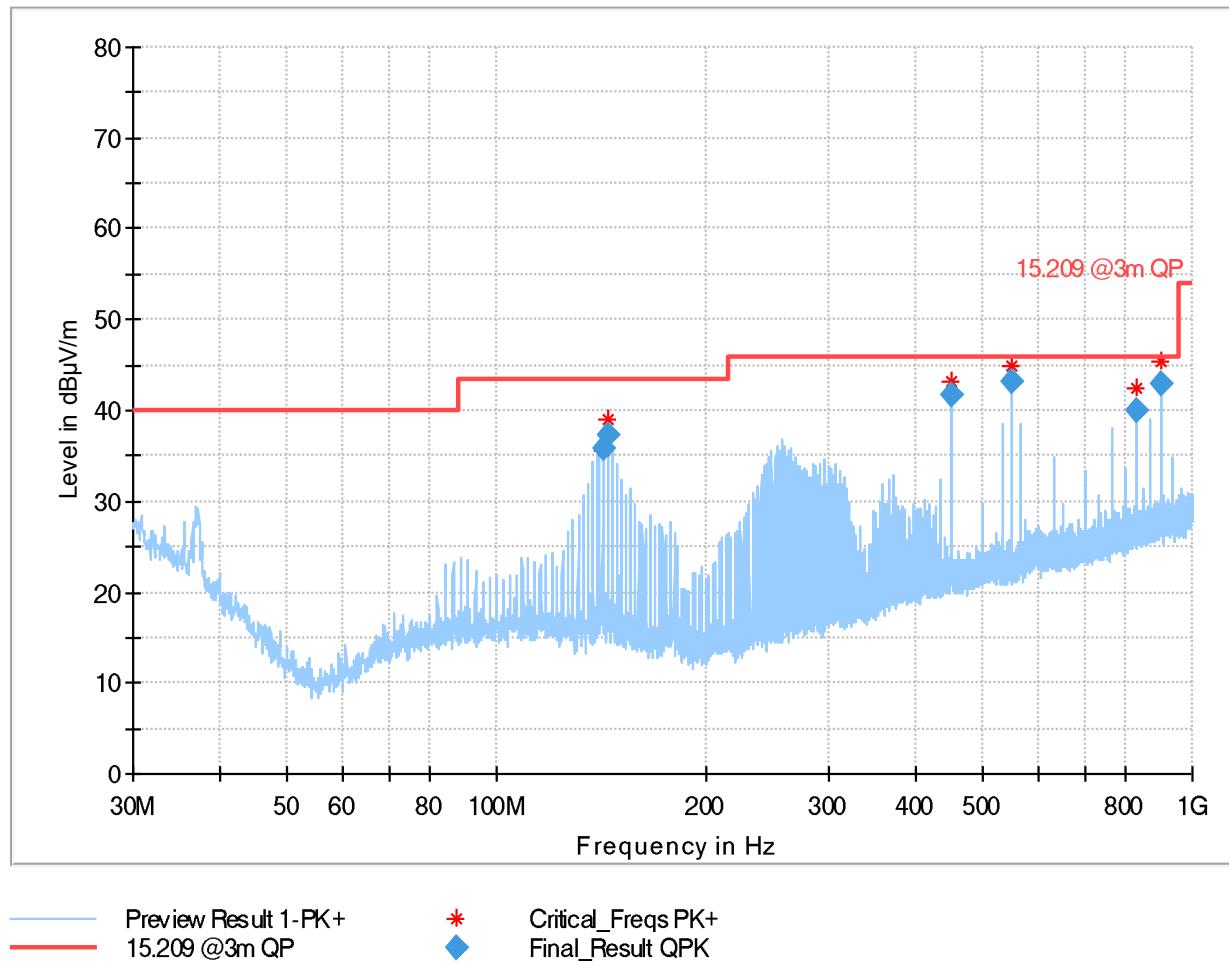

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
142.083500	35.73	43.50	7.77	100.0	120.000	250.0	H	114.0
144.314500	37.40	43.50	6.10	100.0	120.000	250.0	H	66.0
450.010000	41.74	46.00	4.26	100.0	120.000	100.0	V	153.0
549.987000	43.17	46.00	2.83	100.0	120.000	100.0	V	221.0
833.324000	39.93	46.00	6.07	100.0	120.000	100.0	H	130.0
899.981500	42.87	46.00	3.13	100.0	120.000	100.0	H	128.0


Plot 71: Mode 1, RSE, 1 GHz – 18 GHz, low channel, horizontal / vertical polarisation

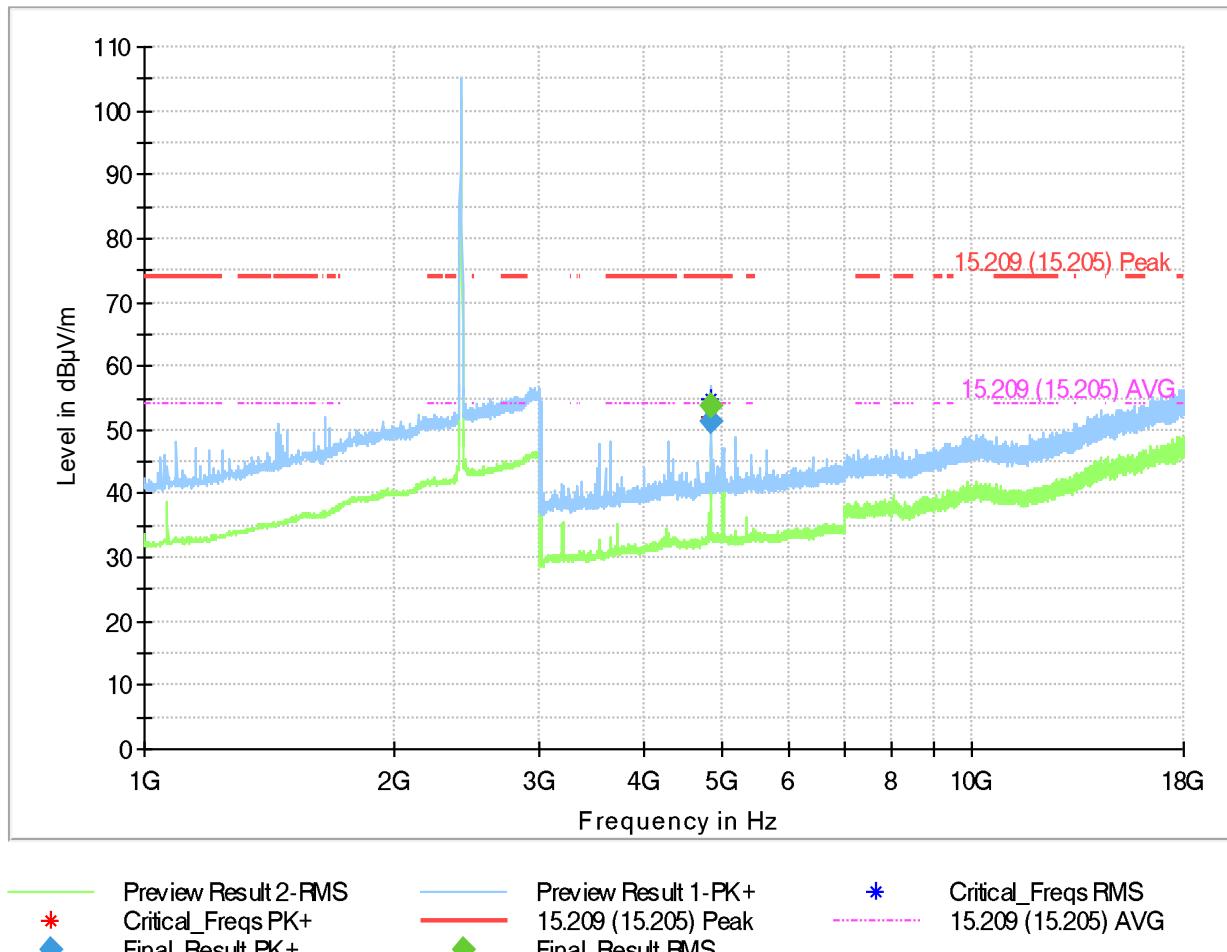

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	RMS (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
4824.022500	---	53.79	54.00	0.21	1000.0	1000.000	150.0	V
4824.060000	51.31	---	74.00	22.69	1000.0	1000.000	150.0	H


Plot 72: Mode 1, RSE, 1 GHz – 18 GHz, mid channel, horizontal / vertical polarisation

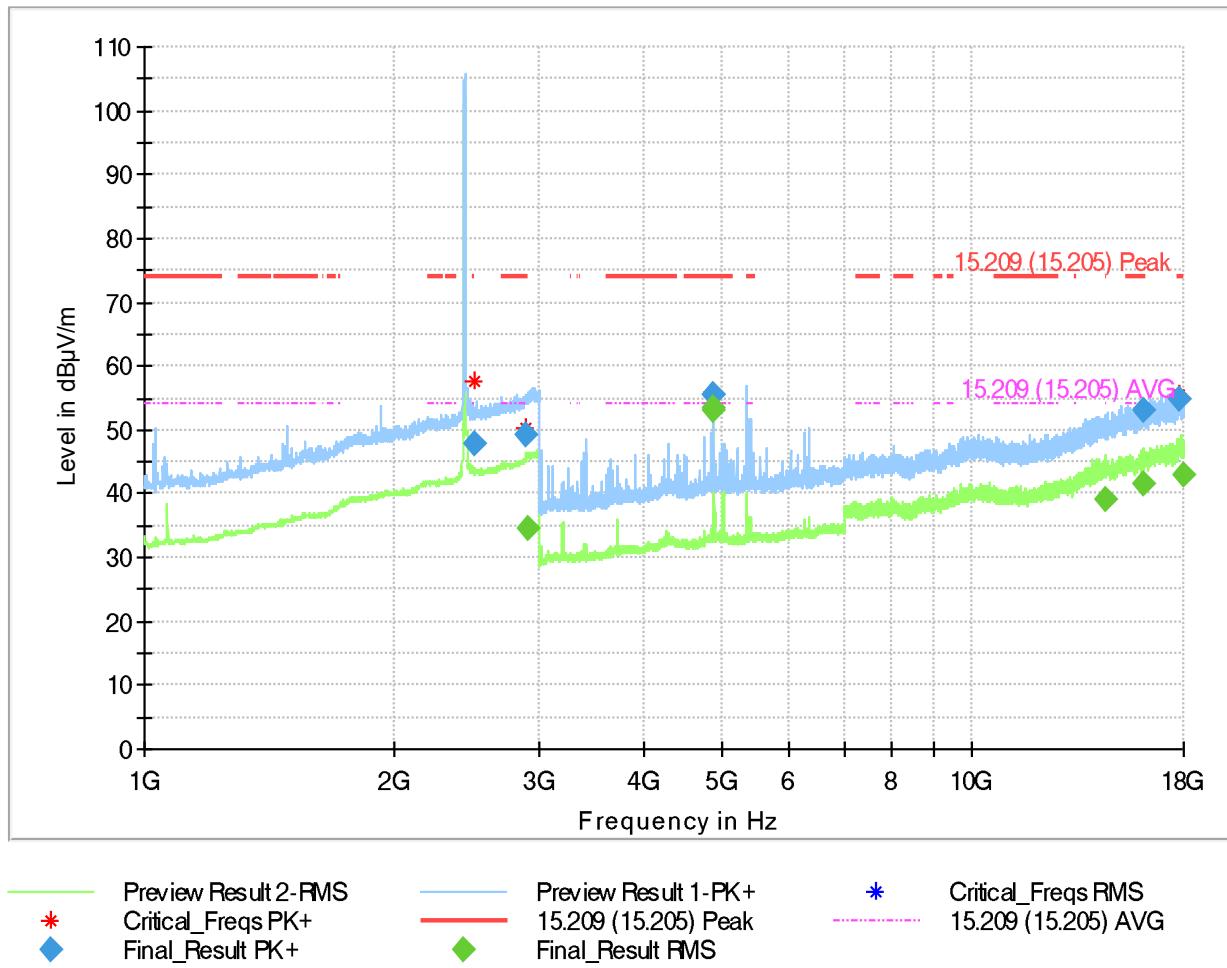

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	RMS (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2496.930000	47.67	---	74.00	26.33	1000.0	1000.000	150.0	V
2887.530000	49.24	---	74.00	24.76	1000.0	1000.000	150.0	V
2899.540000	---	34.42	54.00	19.58	1000.0	1000.000	150.0	V
4873.912500	55.55	---	74.00	18.45	1000.0	1000.000	150.0	V
4873.972500	---	53.06	54.00	0.94	1000.0	1000.000	150.0	V
4873.990000	55.52	---	74.00	18.48	1000.0	1000.000	150.0	V
4874.085000	---	53.29	54.00	0.71	1000.0	1000.000	150.0	V
14489.411667	---	39.09	54.00	14.91	1000.0	1000.000	150.0	H
16131.559166	---	41.62	54.00	12.38	1000.0	1000.000	150.0	H
16138.809167	53.13	---	74.00	20.87	1000.0	1000.000	150.0	H
17822.342500	54.88	---	74.00	19.12	1000.0	1000.000	150.0	H
17945.176667	---	42.86	54.00	11.14	1000.0	1000.000	150.0	H


Plot 73: Mode 1, RSE, 1 GHz – 18 GHz, high channel, horizontal / vertical polarisation

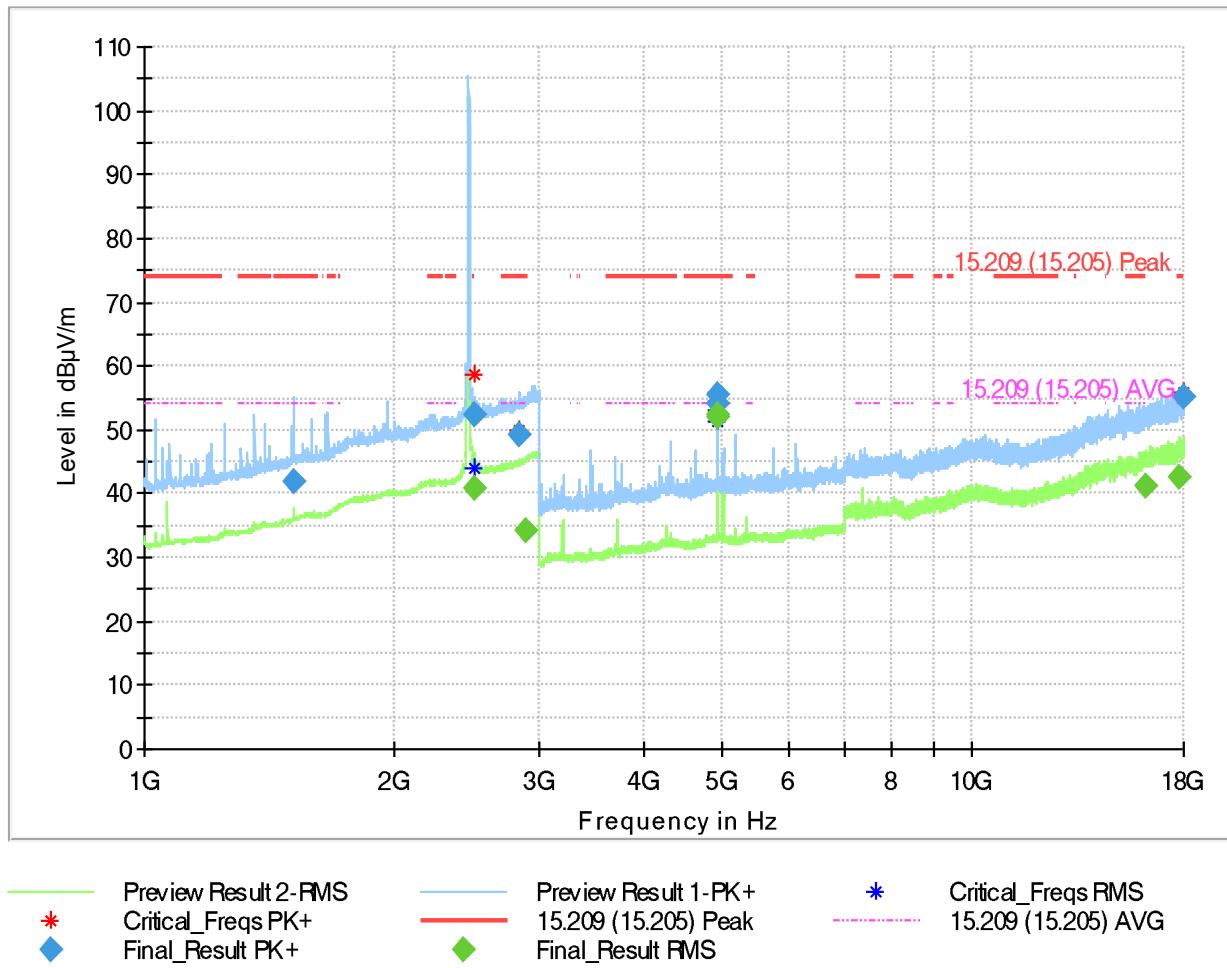


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	RMS (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
1511.420000	41.75	---	74.00	32.25	1000.0	1000.000	150.0	V
2498.750000	---	40.82	54.00	13.18	1000.0	1000.000	150.0	V
2499.105000	52.32	---	74.00	21.68	1000.0	1000.000	150.0	V
2843.585000	49.17	---	74.00	24.83	1000.0	1000.000	150.0	H
2895.505000	---	34.38	54.00	19.62	1000.0	1000.000	150.0	V
4923.897500	54.24	---	74.00	19.76	1000.0	1000.000	150.0	V
4923.975000	---	52.54	54.00	1.46	1000.0	1000.000	150.0	V
4923.980000	---	52.00	54.00	2.00	1000.0	1000.000	150.0	V
4924.065000	55.48	---	74.00	18.52	1000.0	1000.000	150.0	V
16161.947500	---	41.36	54.00	12.64	1000.0	1000.000	150.0	V
17746.125833	---	42.57	54.00	11.43	1000.0	1000.000	150.0	H
17983.143334	55.23	---	74.00	18.77	1000.0	1000.000	150.0	V


Plot 74: Mode 1, RSE, 18 GHz – 26.5 GHz, low channel, horizontal / vertical polarisation

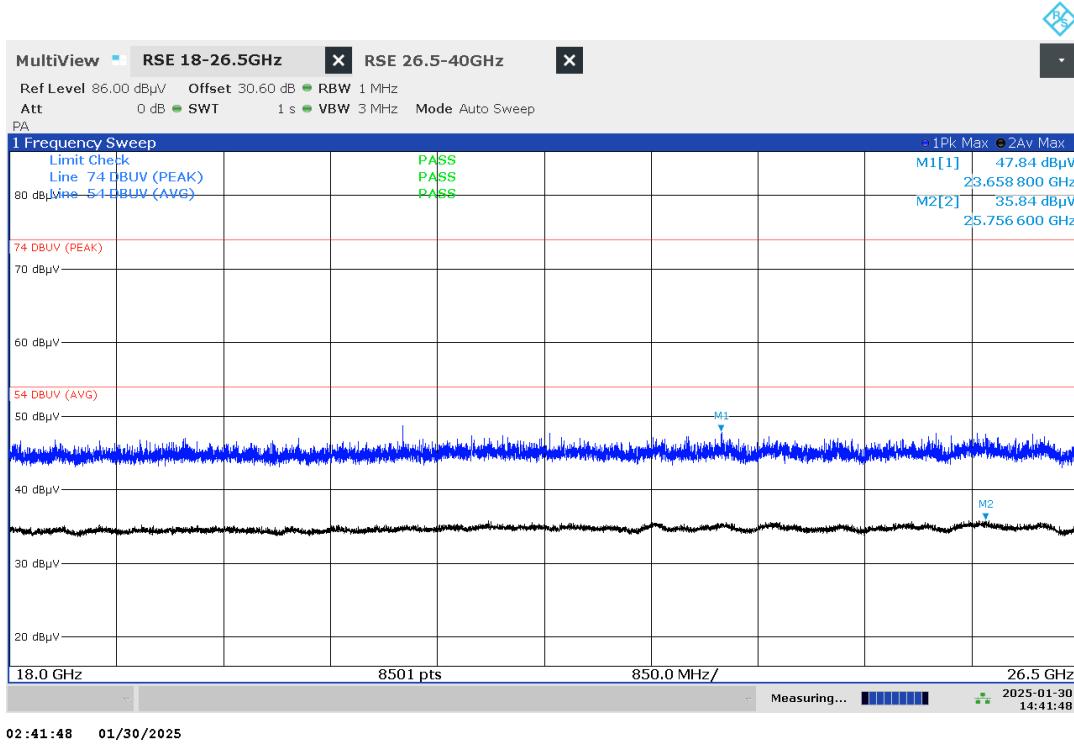


Plot 75: Mode 1, RSE, 18 GHz – 26.5 GHz, mid channel, horizontal / vertical polarisation

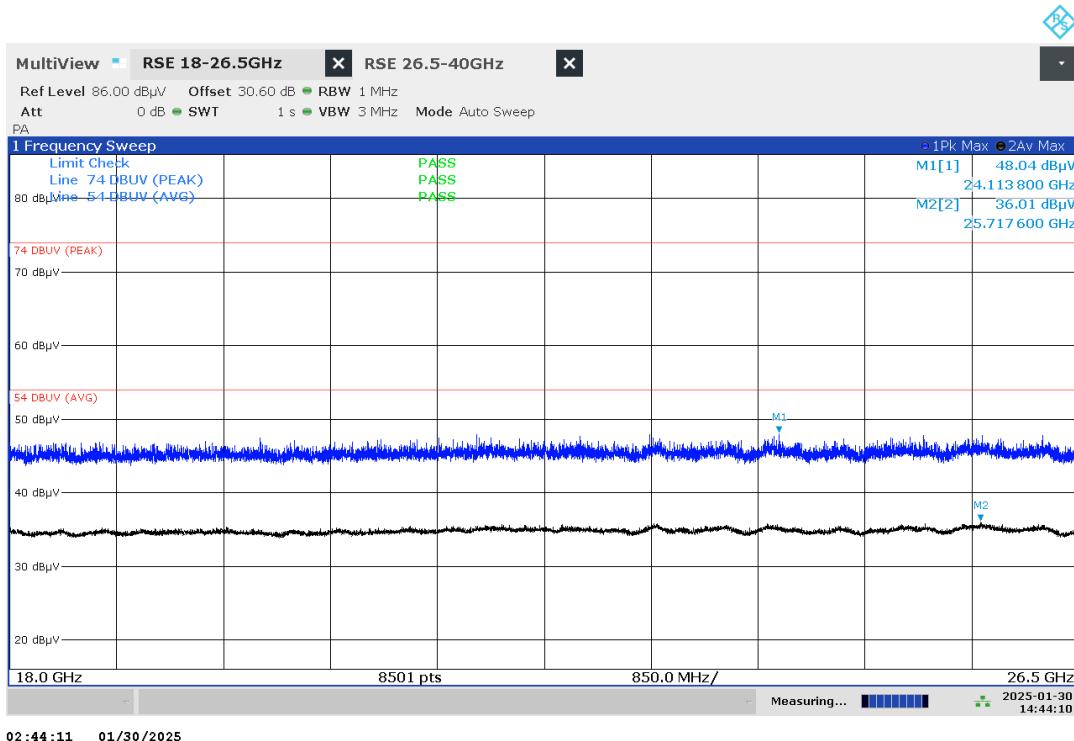

Plot 76: Mode 1, RSE, 18 GHz – 26.5 GHz, high channel, horizontal / vertical polarisation

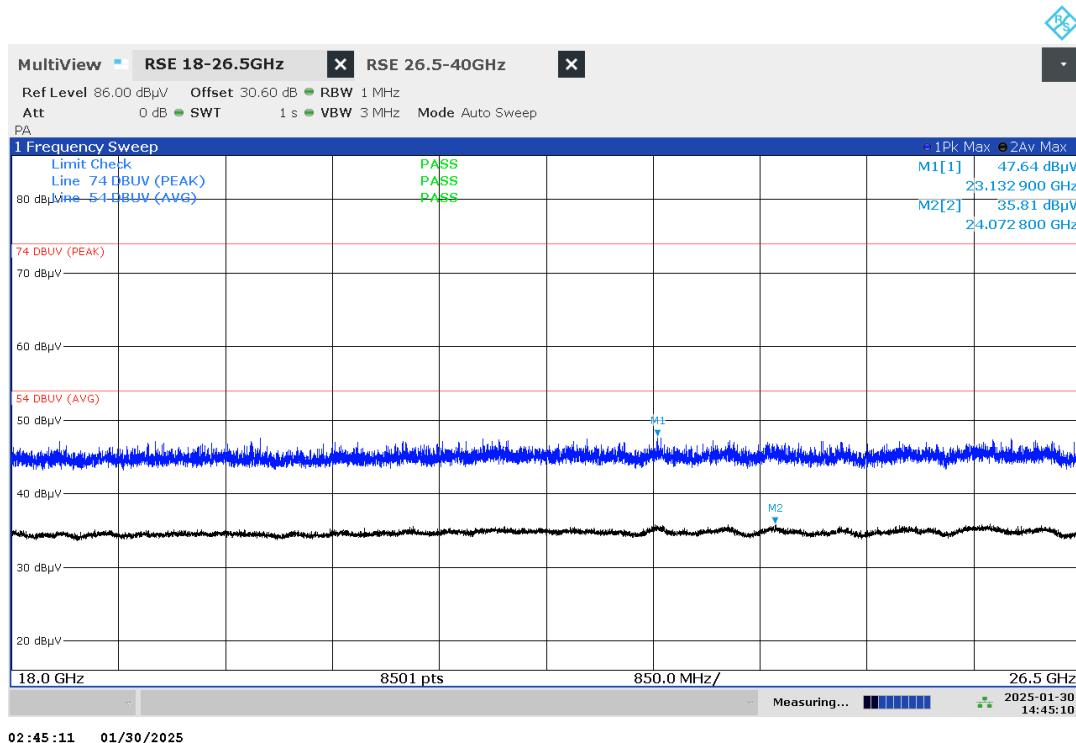

Plot 77: Mode 2, RSE, 9 kHz – 30 MHz, low channel, loop antenna

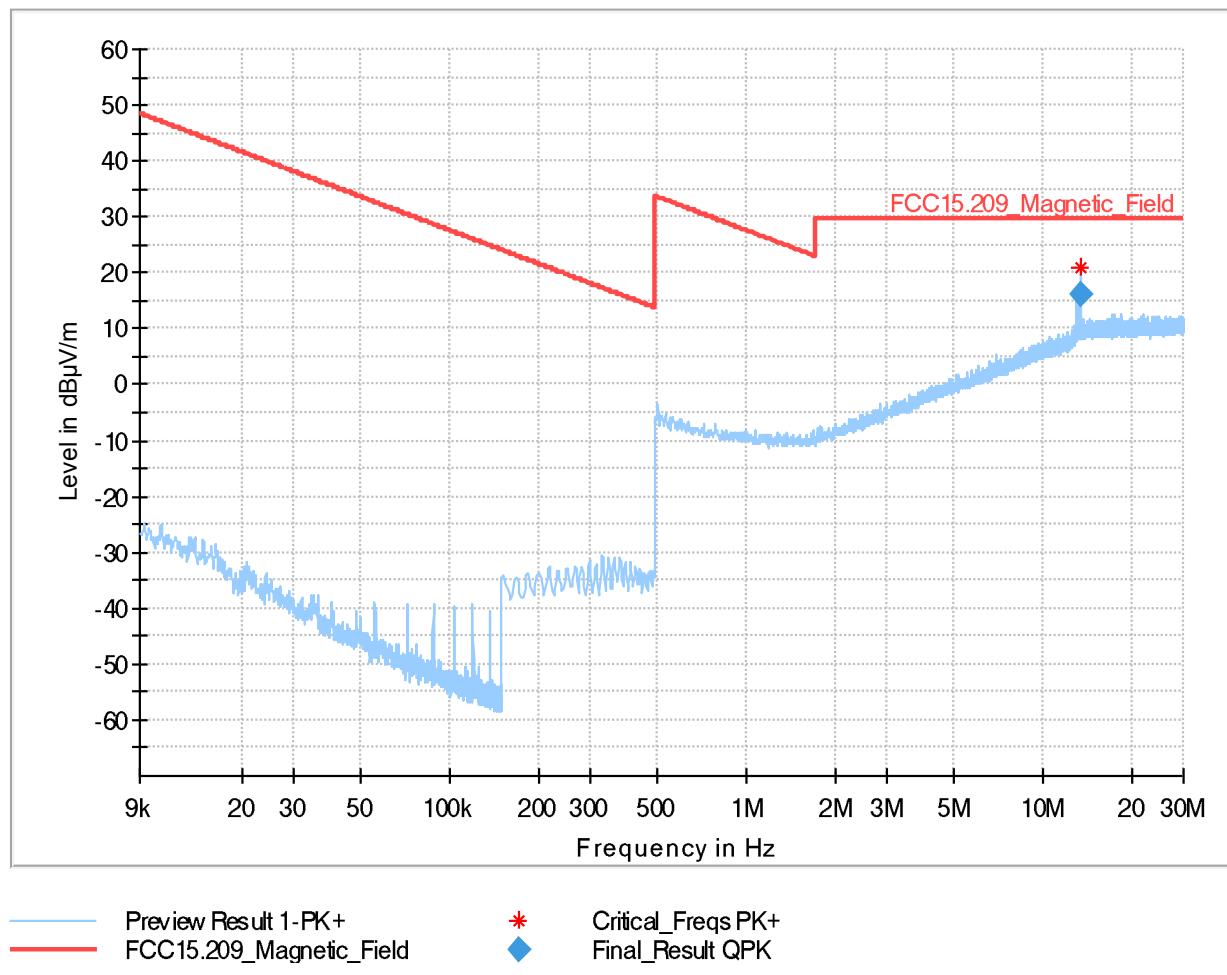

Final_Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
13.560000	16.26	29.54	13.28	100.0	9.000	V	-7.0	-0.9

Note:

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y - 51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to the 15.209(a) limit.

(Certification & Engineering Bureau, Q&A on Certification Procedures and Requirements, TCB Workshop April 2020, Nicolas DesMarais, 2020-04-09 - ISED Q&A - DesMarais.pdf)

Plot 78: Mode 2, RSE, 9 kHz – 30 MHz, mid channel, loop antenna

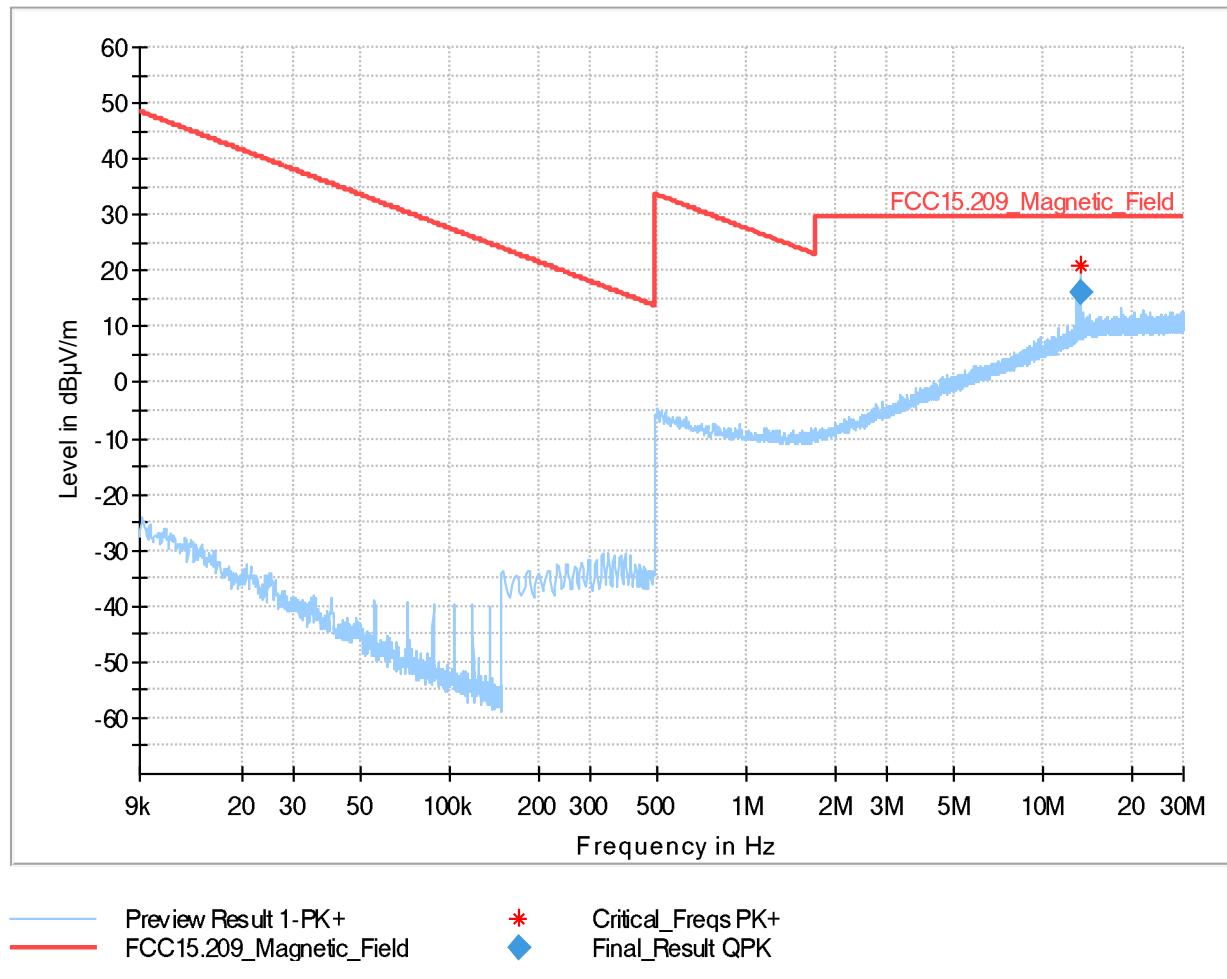

Final_Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
13.560000	15.97	29.54	13.57	100.0	9.000	V	53.0	-0.9

Note:

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y - 51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to the 15.209(a) limit.

(Certification & Engineering Bureau, Q&A on Certification Procedures and Requirements, TCB Workshop April 2020, Nicolas DesMarais, 2020-04-09 - ISED Q&A - DesMarais.pdf)

Plot 79: Mode 2, RSE, 9 kHz – 30 MHz, high channel, loop antenna

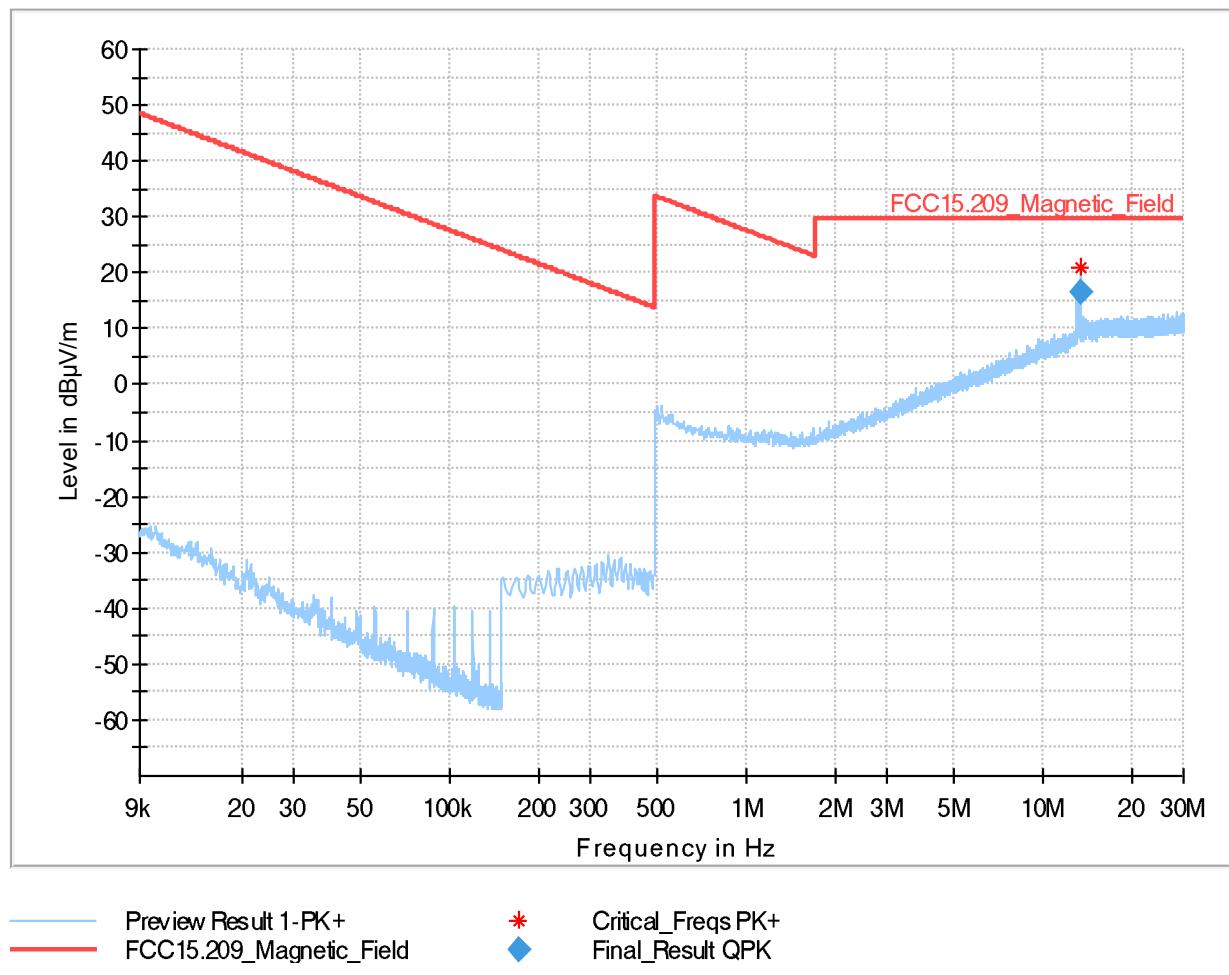

Final_Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
13.560000	16.45	29.54	13.09	100.0	9.000	V	142.0	-0.9

Note:

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y - 51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to the 15.209(a) limit.

(Certification & Engineering Bureau, Q&A on Certification Procedures and Requirements, TCB Workshop April 2020, Nicolas DesMarais, 2020-04-09 - ISED Q&A - DesMarais.pdf)


Plot 80: Mode 2, RSE, 30 MHz – 1 GHz, low channel, horizontal / vertical polarisation

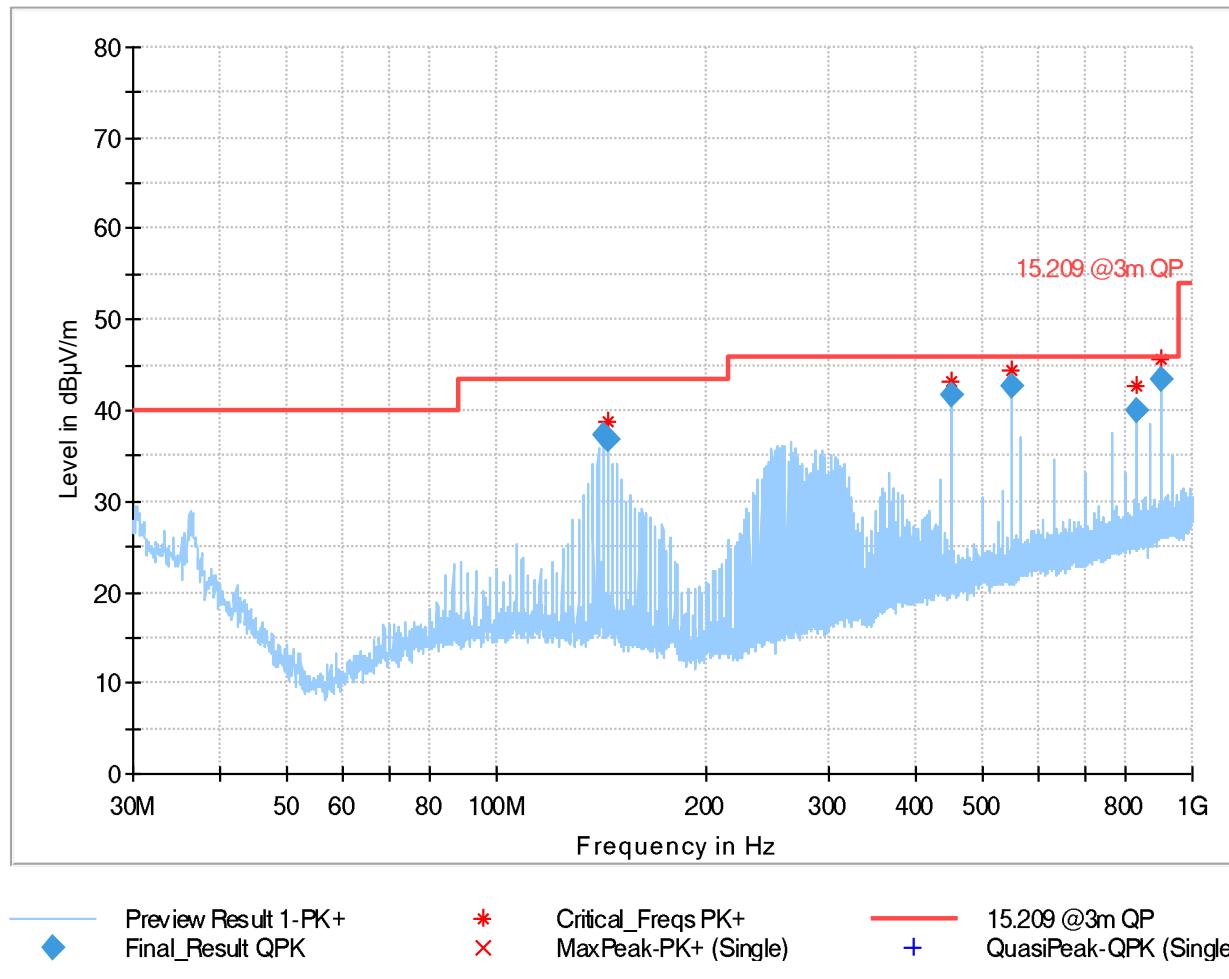

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
142.113500	37.19	43.50	6.31	100.0	120.000	144.0	H	237.0
144.344500	36.71	43.50	6.79	100.0	120.000	150.0	H	231.0
450.010000	41.73	46.00	4.27	100.0	120.000	100.0	V	145.0
550.017000	42.78	46.00	3.22	100.0	120.000	104.0	V	221.0
833.324000	39.89	46.00	6.11	100.0	120.000	103.0	H	127.0
899.993000	43.40	46.00	2.60	100.0	120.000	100.0	H	127.0


Plot 81: Mode 2, RSE, 30 MHz – 1 GHz, mid channel, horizontal / vertical polarisation

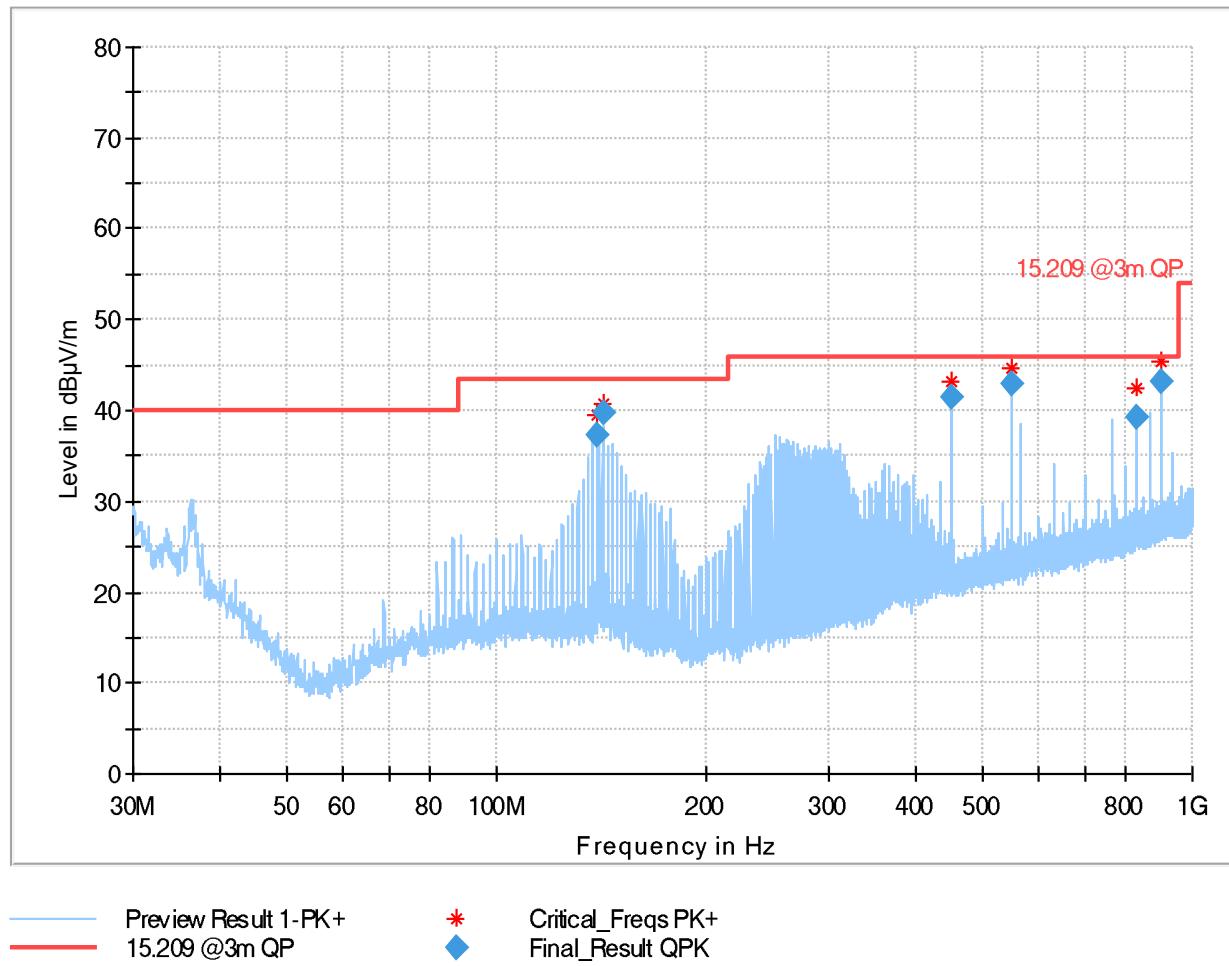

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
139.785500	37.39	43.50	6.11	100.0	120.000	250.0	H	63.0
141.986500	39.75	43.50	3.75	100.0	120.000	250.0	H	246.0
450.010000	41.53	46.00	4.47	100.0	120.000	100.0	V	149.0
549.987000	42.94	46.00	3.06	100.0	120.000	100.0	V	221.0
833.324000	39.21	46.00	6.79	100.0	120.000	103.0	H	85.0
899.993000	43.10	46.00	2.90	100.0	120.000	100.0	H	130.0


Plot 82: Mode 2, RSE, 30 MHz – 1 GHz, high channel, horizontal / vertical polarisation

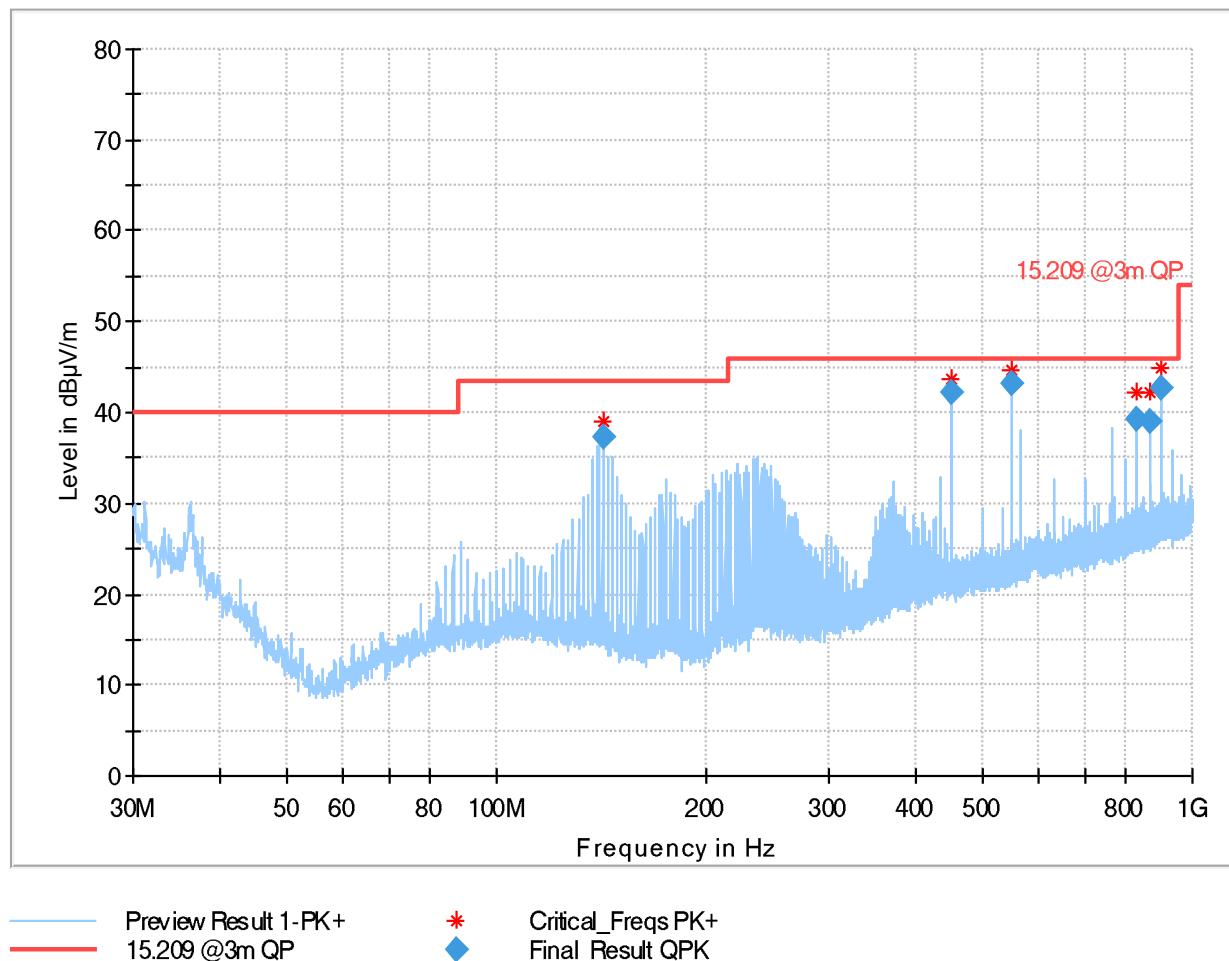

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
142.035000	37.18	43.50	6.32	100.0	120.000	250.0	H	77.0
450.010000	42.19	46.00	3.81	100.0	120.000	100.0	V	147.0
549.987000	43.10	46.00	2.90	100.0	120.000	100.0	V	221.0
833.324000	39.34	46.00	6.66	100.0	120.000	100.0	H	92.0
866.673500	39.14	46.00	6.86	100.0	120.000	100.0	H	128.0
900.011500	42.67	46.00	3.33	100.0	120.000	100.0	H	128.0

Plot 83: Mode 2, RSE, 1 GHz – 18 GHz, low channel, horizontal / vertical polarisation

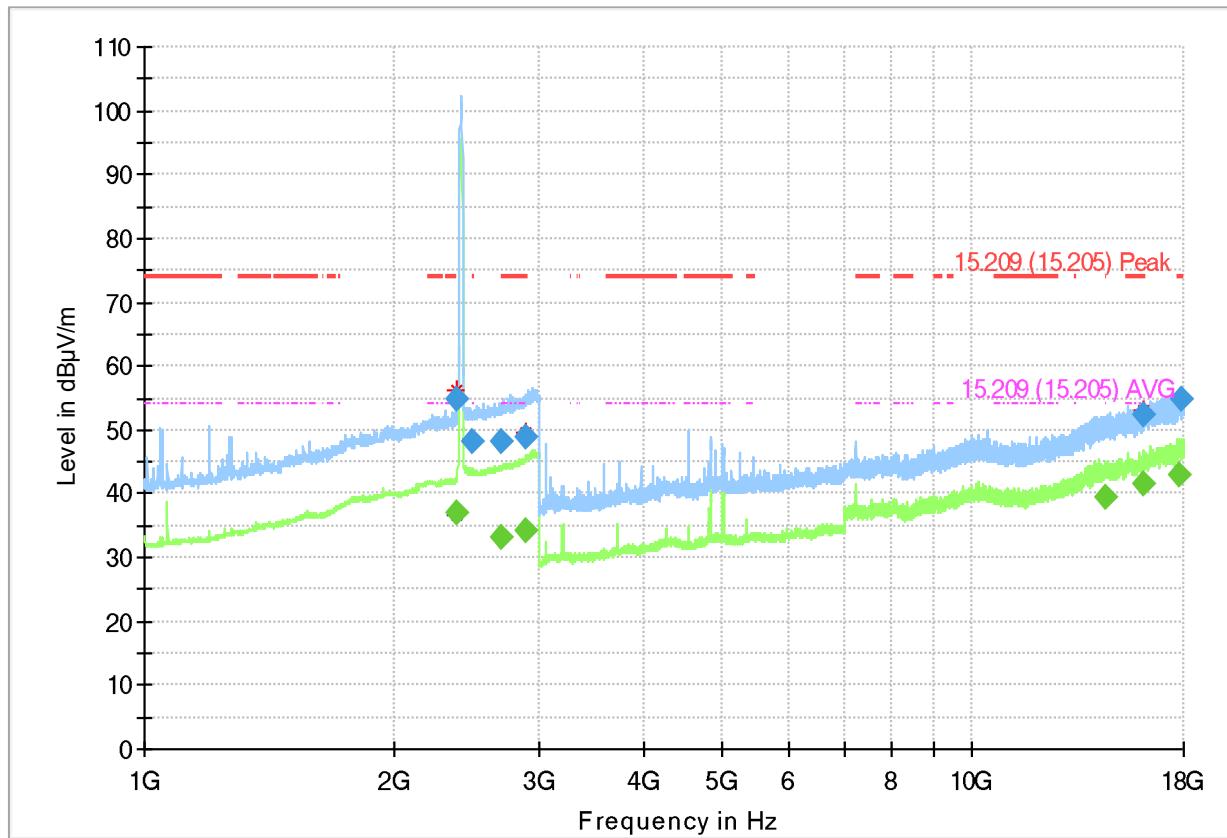


 Preview Result 2-RMS  Critical_Freqs PK+  Final_Result PK+	 Preview Result 1-PK+  15.209 (15.205) Peak  Final_Result RMS	 Critical_Freqs RMS  15.209 (15.205) AVG
--	--	---

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	RMS (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2389.265000	54.71	---	74.00	19.29	1000.0	1000.000	150.0	V
2389.875000	---	37.10	54.00	16.90	1000.0	1000.000	150.0	V
2496.255000	48.12	---	74.00	25.88	1000.0	1000.000	150.0	V
2694.550000	48.16	---	74.00	25.84	1000.0	1000.000	150.0	H
2699.125000	---	33.23	54.00	20.77	1000.0	1000.000	150.0	H
2896.085000	49.06	---	74.00	24.94	1000.0	1000.000	150.0	H
2896.910000	---	34.32	54.00	19.68	1000.0	1000.000	150.0	V
14479.265833	---	39.43	54.00	14.57	1000.0	1000.000	150.0	V
16113.062500	52.42	---	74.00	21.58	1000.0	1000.000	150.0	V
16125.965000	---	41.52	54.00	12.48	1000.0	1000.000	150.0	V
17738.280000	---	43.07	54.00	10.93	1000.0	1000.000	150.0	V
17854.995000	54.81	---	74.00	19.19	1000.0	1000.000	150.0	V

Plot 84: Mode 2, RSE, 1 GHz – 18 GHz, mid channel, horizontal / vertical polarisation

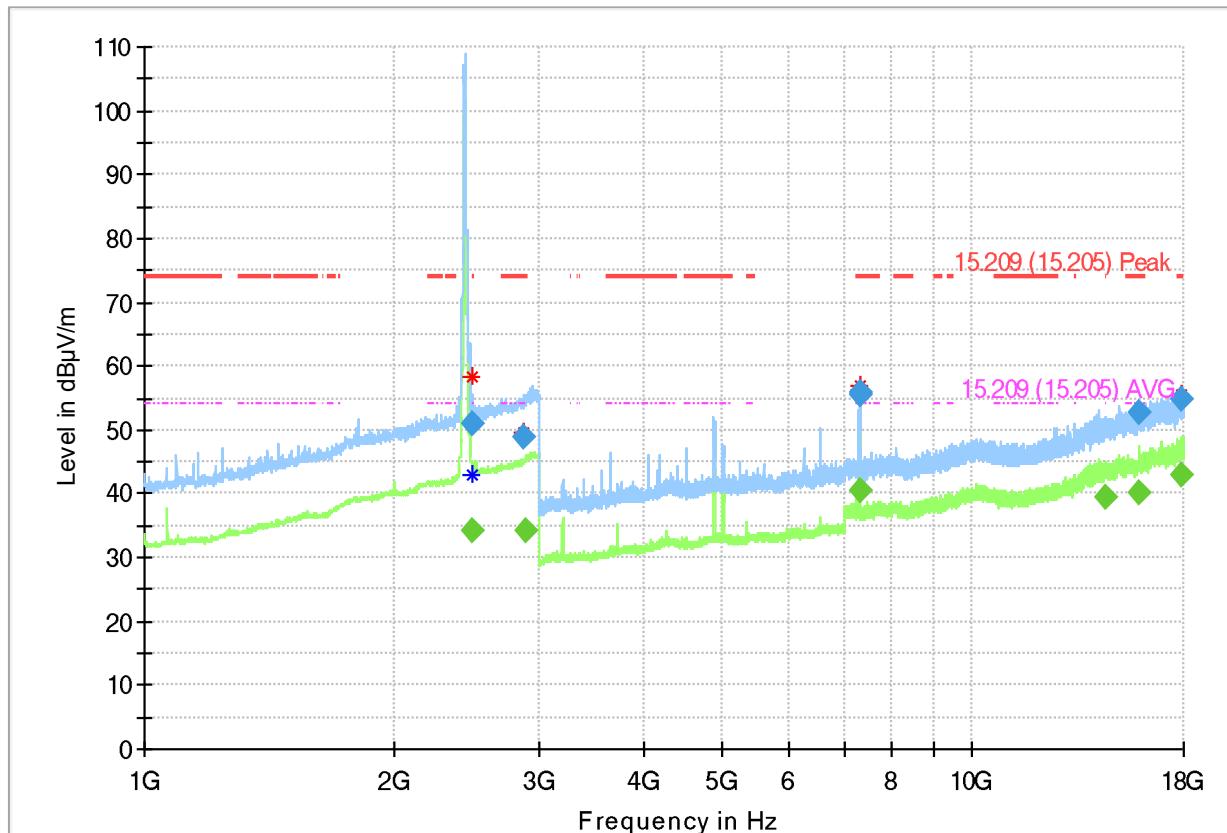


— Preview Result 2-RMS * Critical_Freqs PK+ ◆ Final_Result PK+	— Preview Result 1-PK+ — 15.209 (15.205) Peak ◆ Final_Result RMS	* Critical_Freqs RMS — 15.209 (15.205) AVG
--	--	---

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	RMS (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2483.720000	---	34.09	54.00	19.91	1000.0	1000.000	150.0	V
2486.720000	51.05	---	74.00	22.95	1000.0	1000.000	150.0	V
2876.100000	48.80	---	74.00	25.20	1000.0	1000.000	150.0	V
2895.550000	---	34.35	54.00	19.65	1000.0	1000.000	150.0	H
7308.660833	56.02	---	74.00	17.98	1000.0	1000.000	150.0	V
7312.041667	---	40.67	54.00	13.33	1000.0	1000.000	150.0	V
7312.648333	55.64	---	74.00	18.36	1000.0	1000.000	150.0	V
14487.725833	---	39.30	54.00	14.70	1000.0	1000.000	150.0	V
15925.233334	---	40.23	54.00	13.77	1000.0	1000.000	150.0	V
15946.152500	52.58	---	74.00	21.42	1000.0	1000.000	150.0	H
17861.390000	54.85	---	74.00	19.15	1000.0	1000.000	150.0	V
17915.497500	---	42.96	54.00	11.04	1000.0	1000.000	150.0	H


Plot 85: Mode 2, RSE, 1 GHz – 18 GHz, high channel, horizontal / vertical polarisation

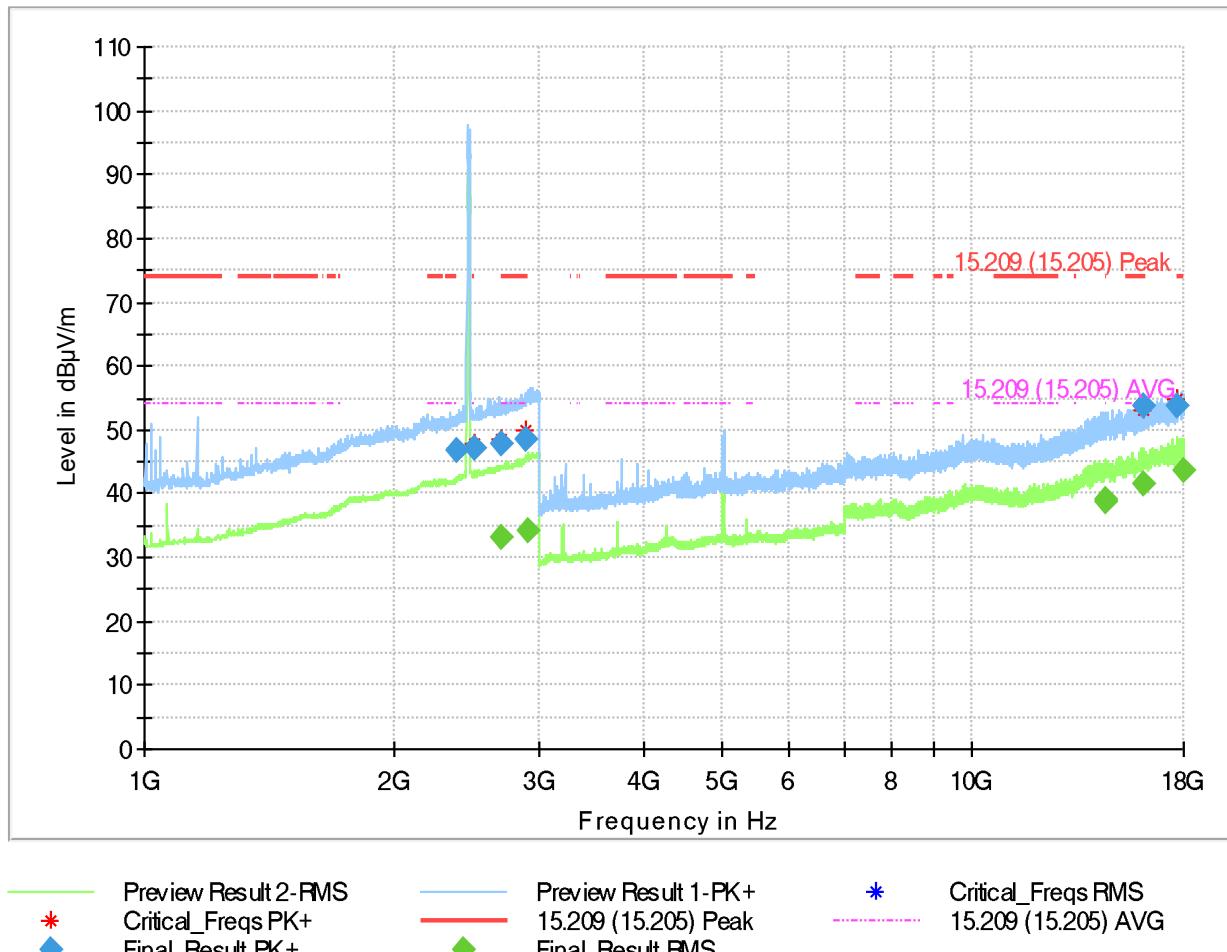


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	RMS (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2378.370000	46.75	---	74.00	27.25	1000.0	1000.000	150.0	H
2496.500000	47.13	---	74.00	26.87	1000.0	1000.000	150.0	V
2691.540000	---	33.10	54.00	20.90	1000.0	1000.000	150.0	V
2693.955000	47.96	---	74.00	26.04	1000.0	1000.000	150.0	H
2882.255000	48.66	---	74.00	25.34	1000.0	1000.000	150.0	V
2897.180000	---	34.28	54.00	19.72	1000.0	1000.000	150.0	H
14473.155833	---	39.06	54.00	14.94	1000.0	1000.000	150.0	V
14492.672500	---	38.88	54.00	15.12	1000.0	1000.000	150.0	H
16089.925000	53.95	---	74.00	20.05	1000.0	1000.000	150.0	H
16129.779167	---	41.58	54.00	12.42	1000.0	1000.000	150.0	V
17709.190833	53.77	---	74.00	20.23	1000.0	1000.000	150.0	V
17975.644166	---	43.54	54.00	10.46	1000.0	1000.000	150.0	H


Plot 86: Mode 2, RSE, 18 GHz – 26.5 GHz, low channel, horizontal / vertical polarisation

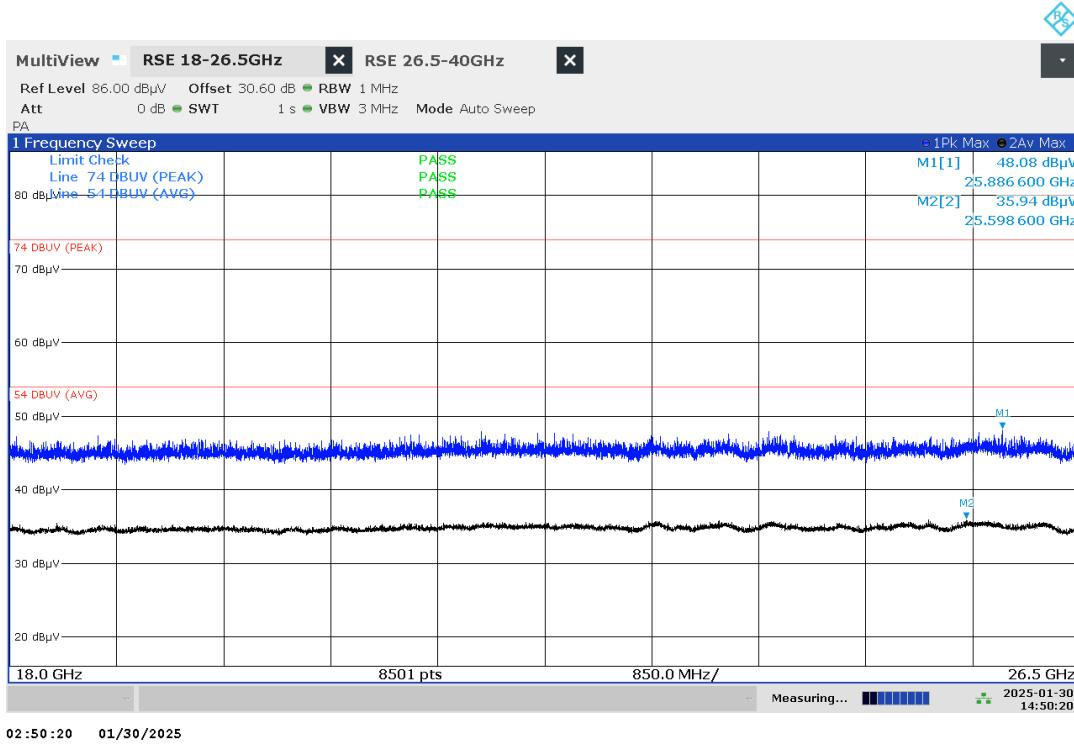


Plot 87: Mode 2, RSE, 18 GHz – 26.5 GHz, mid channel, horizontal / vertical polarisation

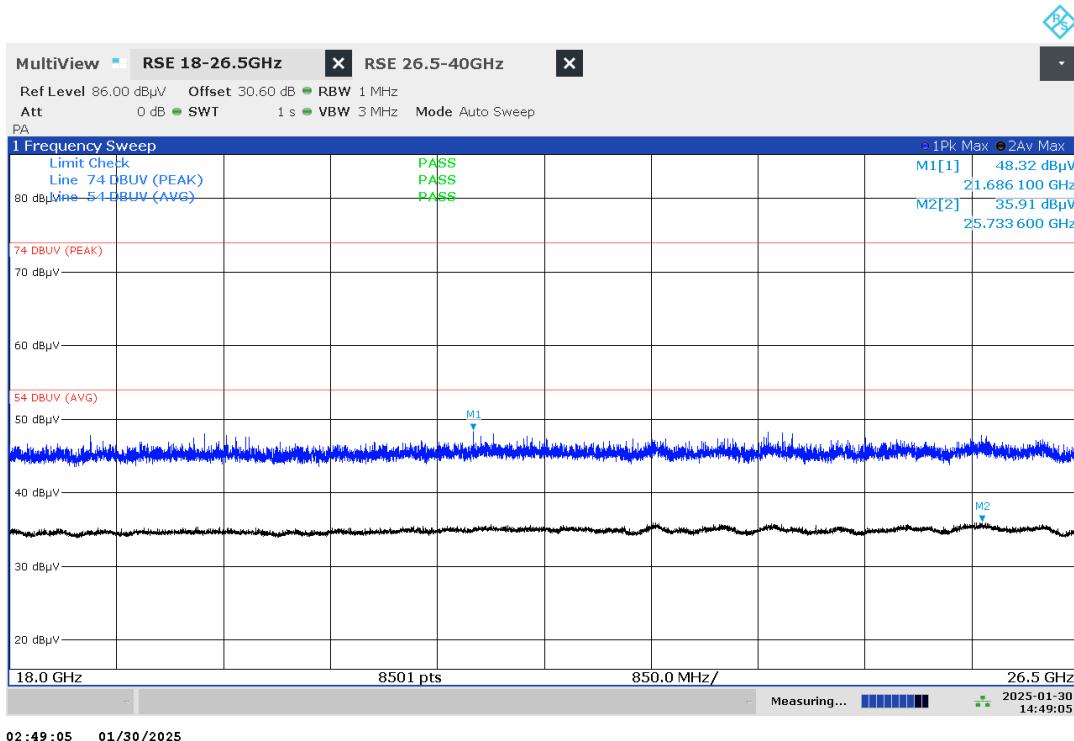

Plot 88: Mode 2, RSE, 18 GHz – 26.5 GHz, high channel, horizontal / vertical polarisation

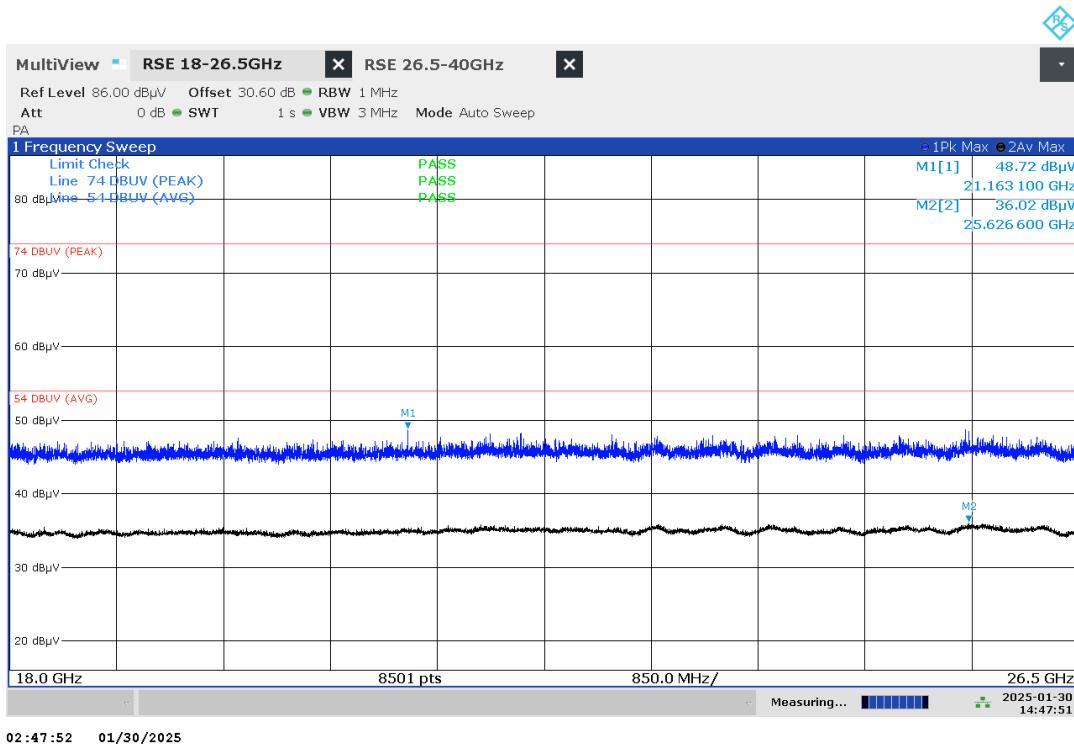

Plot 89: Mode 4, RSE, 9 kHz – 30 MHz, low channel, loop antenna

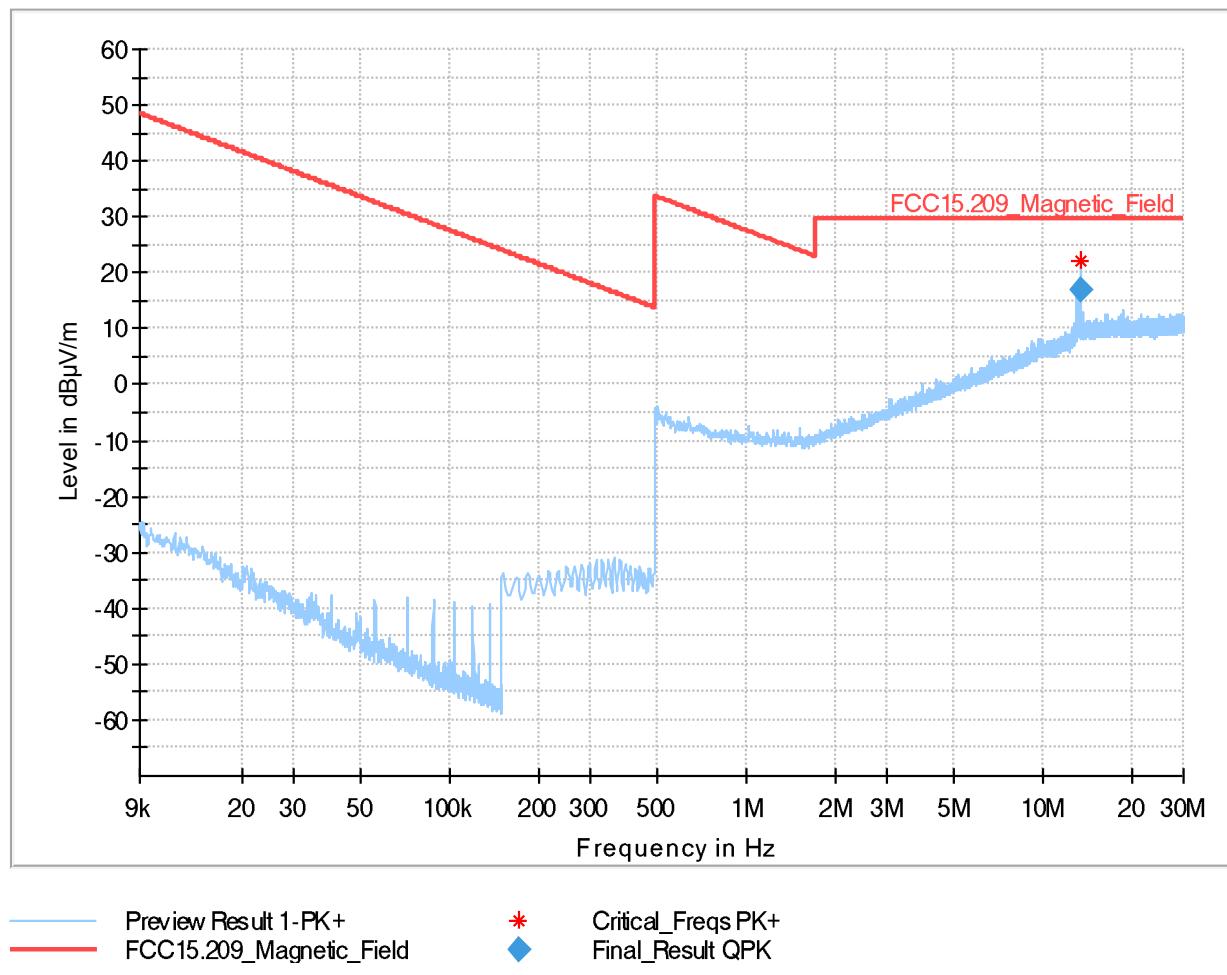

Final_Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
13.560000	16.79	29.54	12.75	100.0	9.000	V	300.0	-0.9

Note:

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y - 51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to the 15.209(a) limit.

(Certification & Engineering Bureau, Q&A on Certification Procedures and Requirements, TCB Workshop April 2020, Nicolas DesMarais, 2020-04-09 - ISED Q&A - DesMarais.pdf)

Plot 90: Mode 4, RSE, 9 kHz – 30 MHz, mid channel, loop antenna

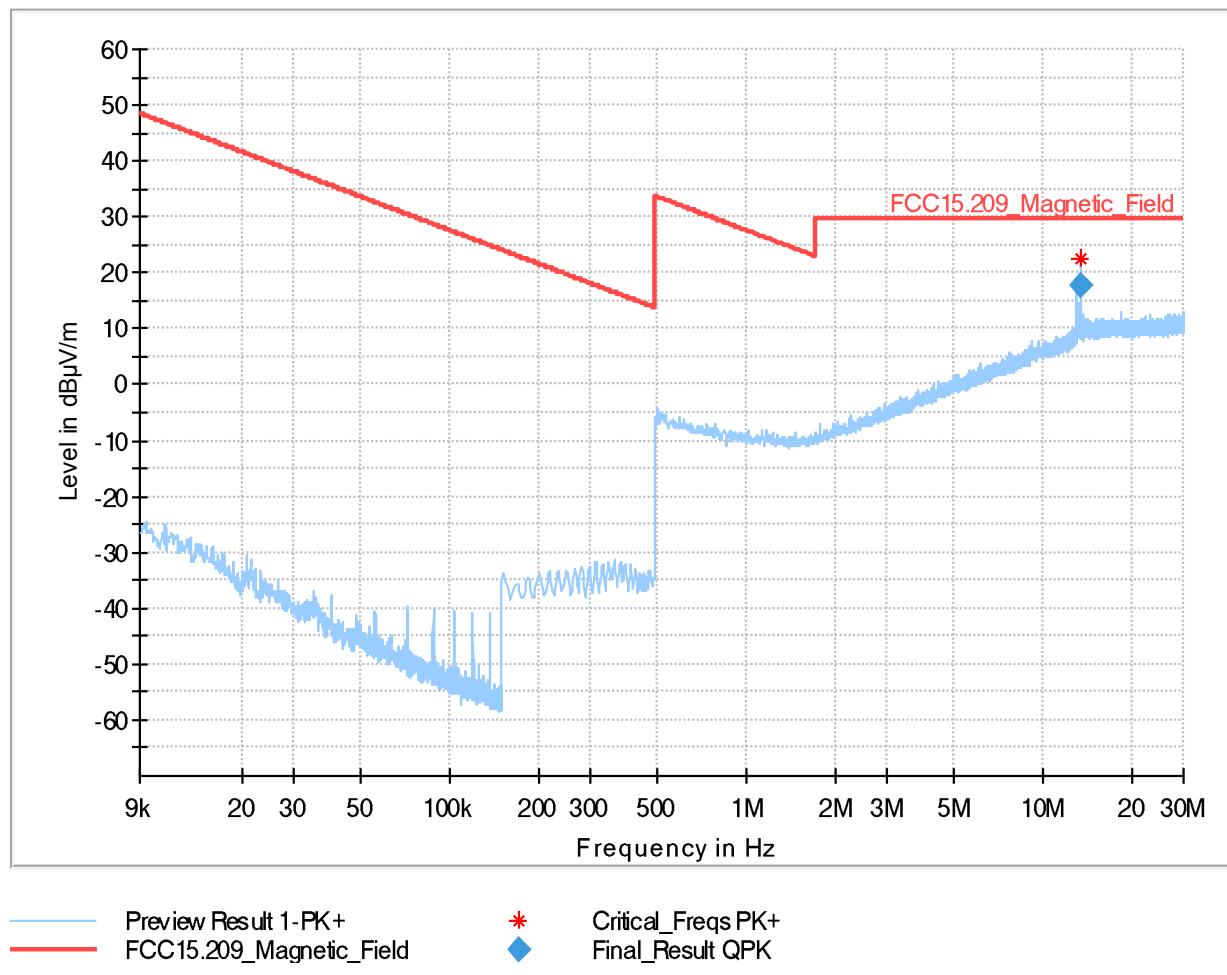

Final_Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
13.560000	17.57	29.54	11.97	100.0	9.000	V	69.0	-0.9

Note:

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y - 51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to the 15.209(a) limit.

(Certification & Engineering Bureau, Q&A on Certification Procedures and Requirements, TCB Workshop April 2020, Nicolas DesMarais, 2020-04-09 - ISED Q&A - DesMarais.pdf)

Plot 91: Mode 4, RSE, 9 kHz – 30 MHz, high channel, loop antenna

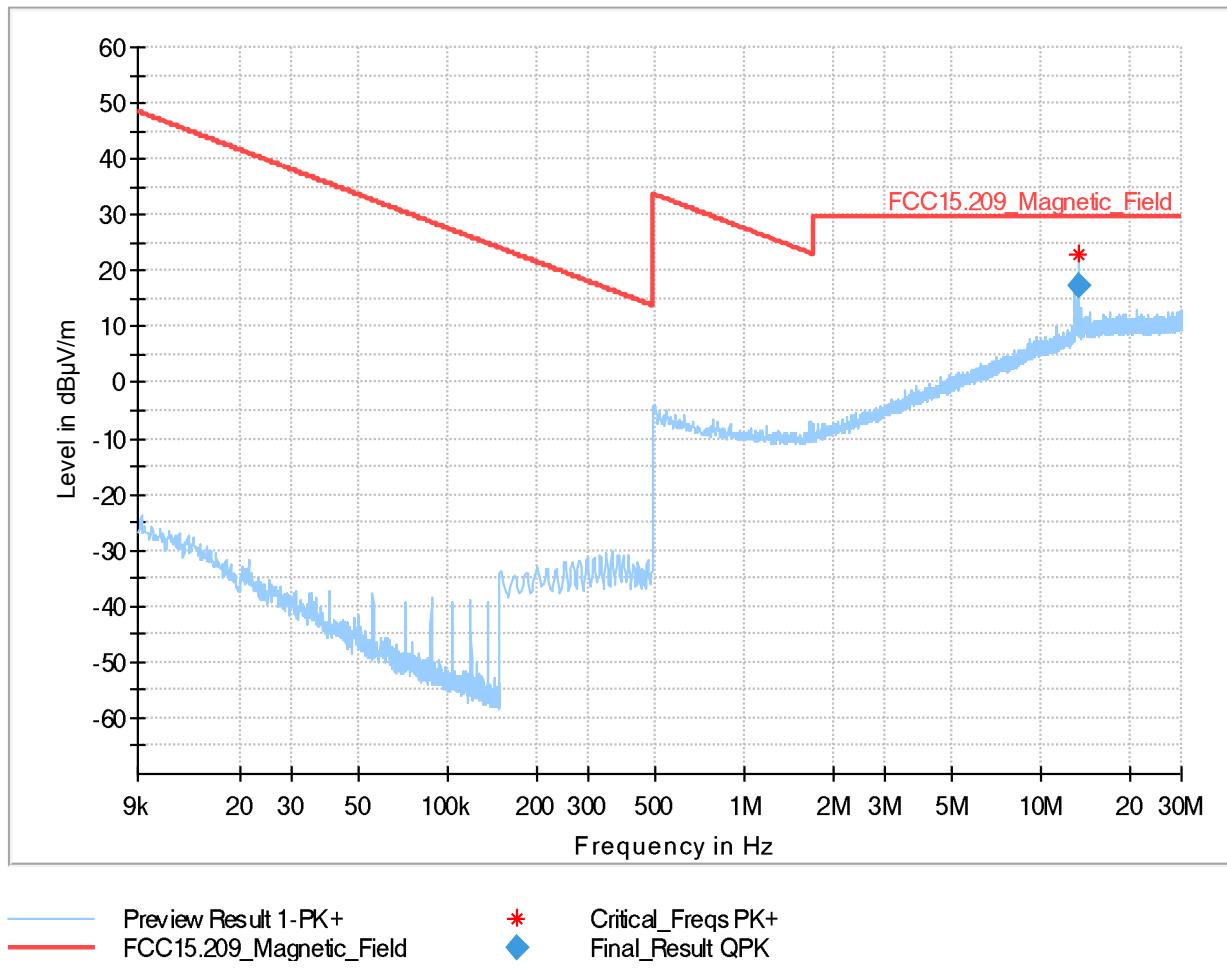

Final_Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	17.47	29.54	12.07	100.0	9.000	V	193.0	-0.9

Note:

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y - 51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to the 15.209(a) limit.

(Certification & Engineering Bureau, Q&A on Certification Procedures and Requirements, TCB Workshop April 2020, Nicolas DesMarais, 2020-04-09 - ISED Q&A - DesMarais.pdf)


Plot 92: Mode 4, RSE, 30 MHz – 1 GHz, low channel, horizontal / vertical polarisation

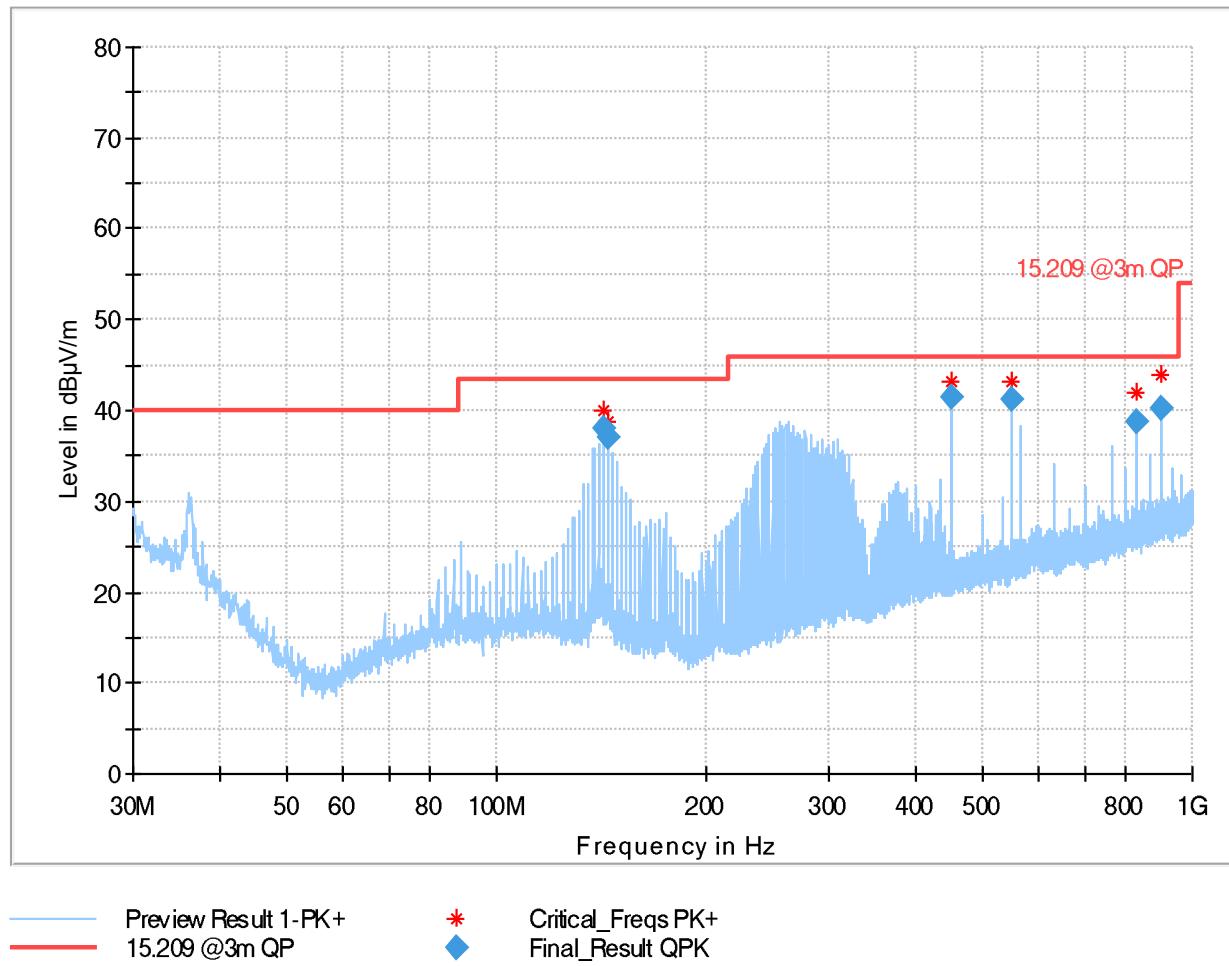

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
142.259000	38.06	43.50	5.44	100.0	120.000	250.0	H	76.0
144.460000	36.98	43.50	6.52	100.0	120.000	250.0	H	227.0
450.010000	41.59	46.00	4.41	100.0	120.000	100.0	V	146.0
549.987000	41.28	46.00	4.72	100.0	120.000	103.0	V	98.0
833.324000	38.66	46.00	7.34	100.0	120.000	100.0	H	125.0
900.011500	40.26	46.00	5.74	100.0	120.000	103.0	H	121.0


Plot 93: Mode 4, RSE, 30 MHz – 1 GHz, mid channel, horizontal / vertical polarisation

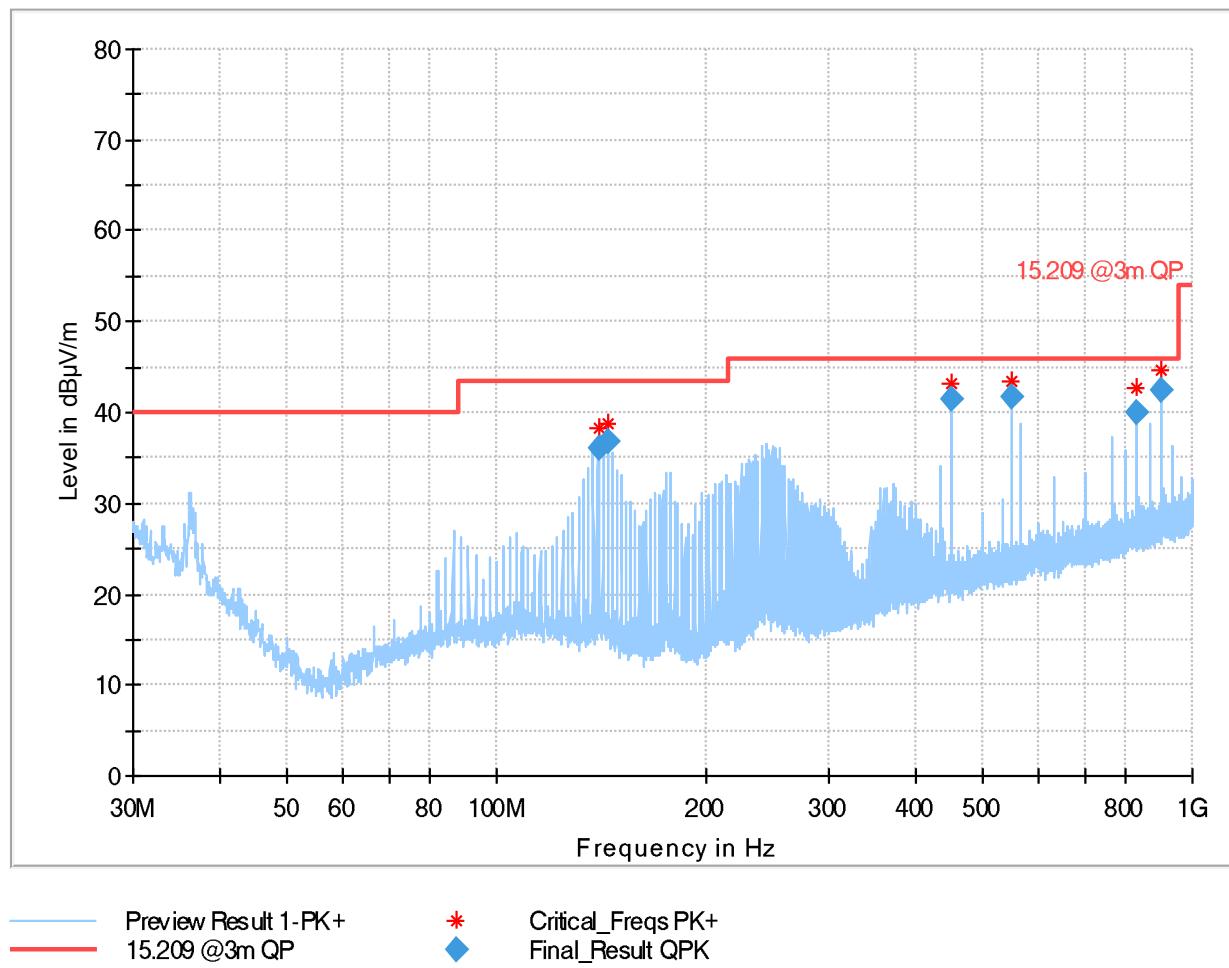

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
139.871000	36.17	43.50	7.33	100.0	120.000	253.0	H	94.0
144.314500	36.87	43.50	6.63	100.0	120.000	250.0	H	68.0
450.010000	41.36	46.00	4.64	100.0	120.000	100.0	V	150.0
549.987000	41.83	46.00	4.17	100.0	120.000	100.0	V	220.0
833.324000	40.04	46.00	5.96	100.0	120.000	100.0	H	128.0
899.981500	42.36	46.00	3.64	100.0	120.000	100.0	H	124.0


Plot 94: Mode 4, RSE, 30 MHz – 1 GHz, high channel, horizontal / vertical polarisation

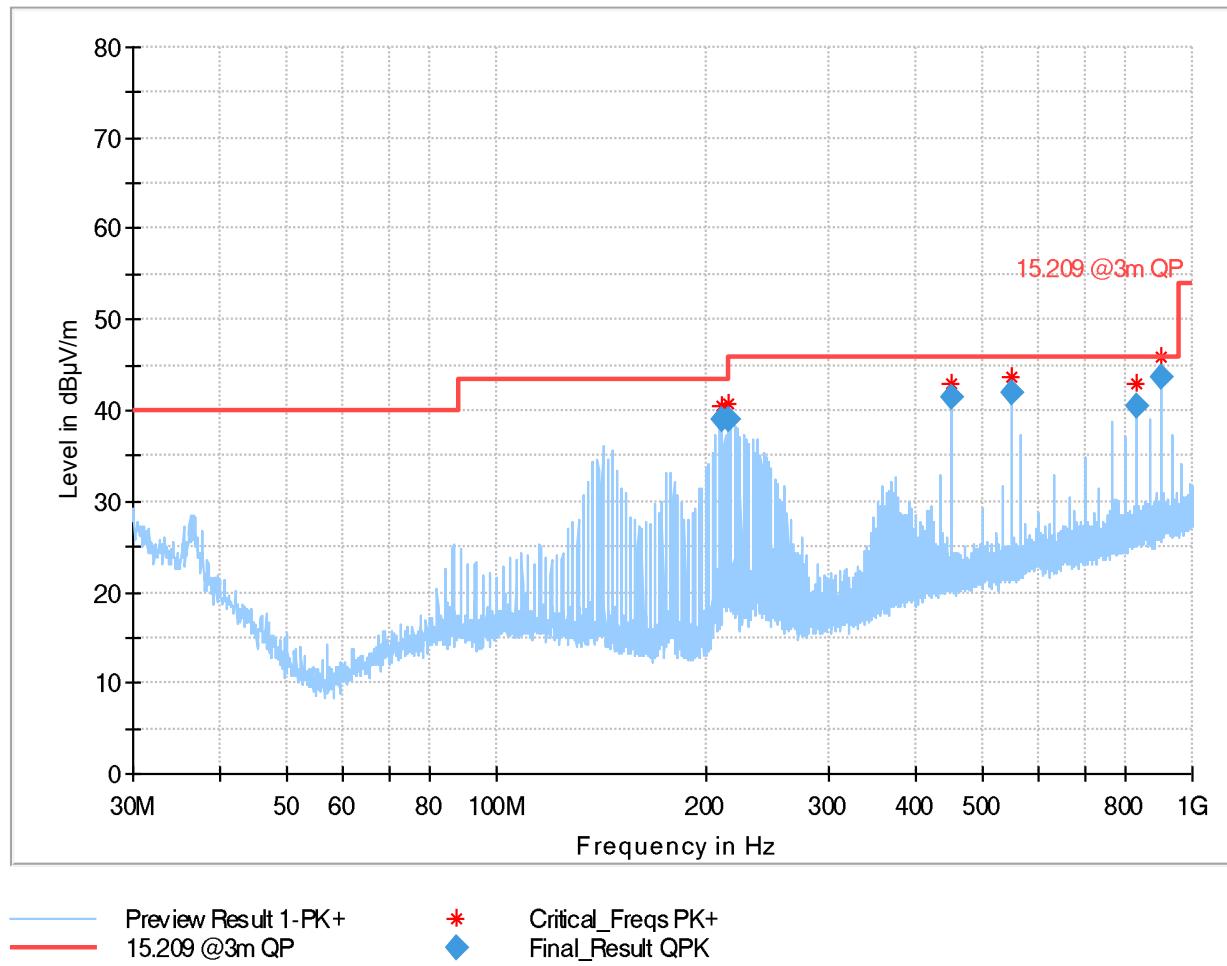

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
210.838000	39.12	43.50	4.38	100.0	120.000	100.0	V	67.0
215.281500	39.11	43.50	4.39	100.0	120.000	104.0	V	71.0
450.010000	41.35	46.00	4.65	100.0	120.000	100.0	V	151.0
549.987000	42.00	46.00	4.00	100.0	120.000	100.0	V	217.0
833.324000	40.40	46.00	5.60	100.0	120.000	100.0	H	126.0
899.993000	43.69	46.00	2.31	100.0	120.000	100.0	H	129.0


Plot 95: Mode 4, RSE, 1 GHz – 18 GHz, low channel, horizontal / vertical polarisation

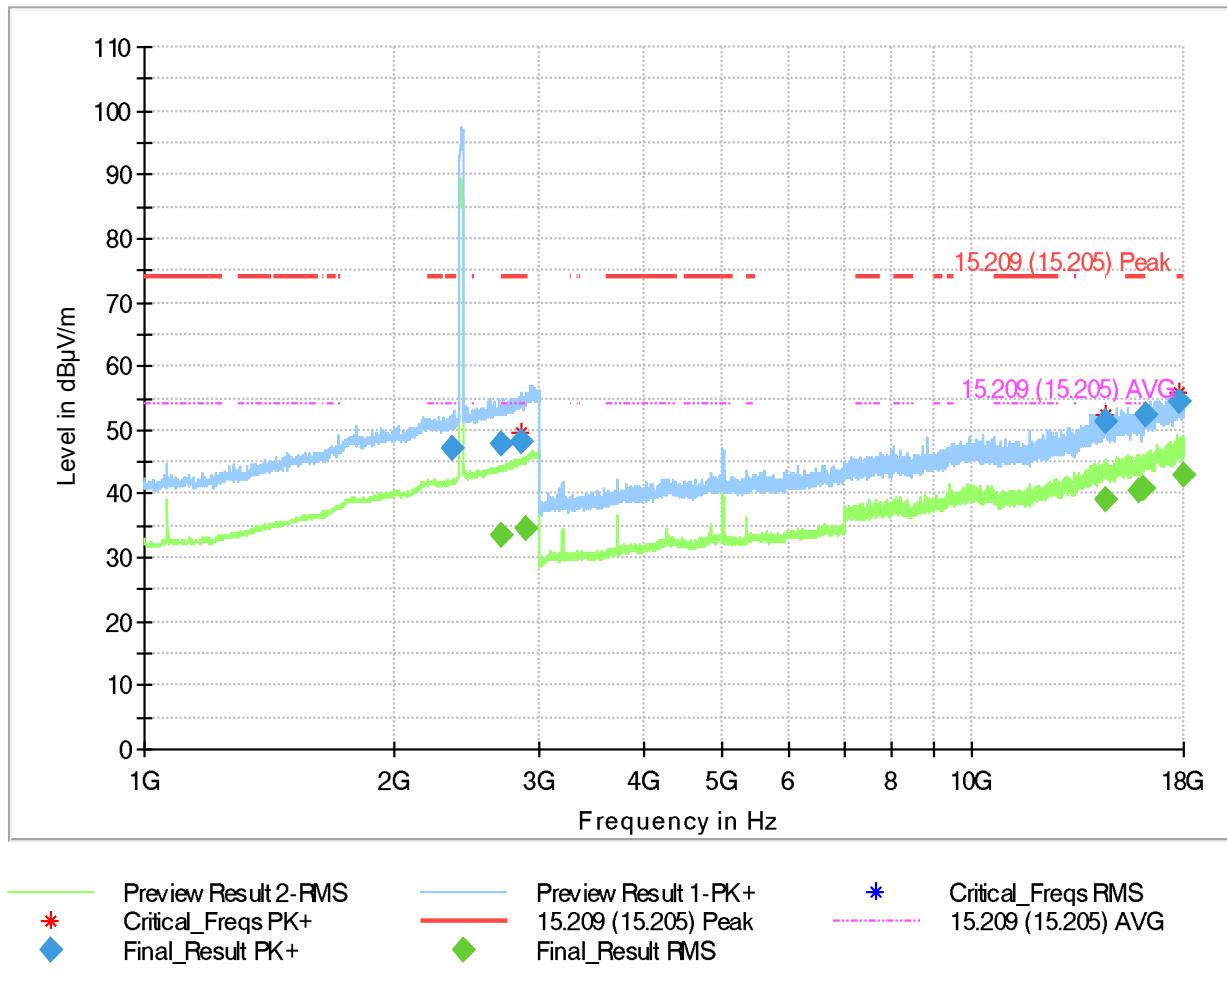

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	RMS (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2358.975000	47.16	---	74.00	26.84	1000.0	1000.000	150.0	H
2695.320000	47.83	---	74.00	26.17	1000.0	1000.000	150.0	H
2696.230000	---	33.35	54.00	20.65	1000.0	1000.000	150.0	V
2854.385000	48.26	---	74.00	25.74	1000.0	1000.000	150.0	V
2896.245000	---	34.54	54.00	19.46	1000.0	1000.000	150.0	V
14475.210000	---	39.28	54.00	14.72	1000.0	1000.000	150.0	V
14482.534167	51.31	---	74.00	22.69	1000.0	1000.000	150.0	V
15881.365833	---	40.34	54.00	13.66	1000.0	1000.000	150.0	H
16130.360000	---	40.69	54.00	13.31	1000.0	1000.000	150.0	V
16179.854166	52.55	---	74.00	21.45	1000.0	1000.000	150.0	V
17823.557500	54.53	---	74.00	19.47	1000.0	1000.000	150.0	H
17982.726666	---	42.92	54.00	11.08	1000.0	1000.000	150.0	V


Plot 96: Mode 4, RSE, 1 GHz – 18 GHz, mid channel, horizontal / vertical polarisation

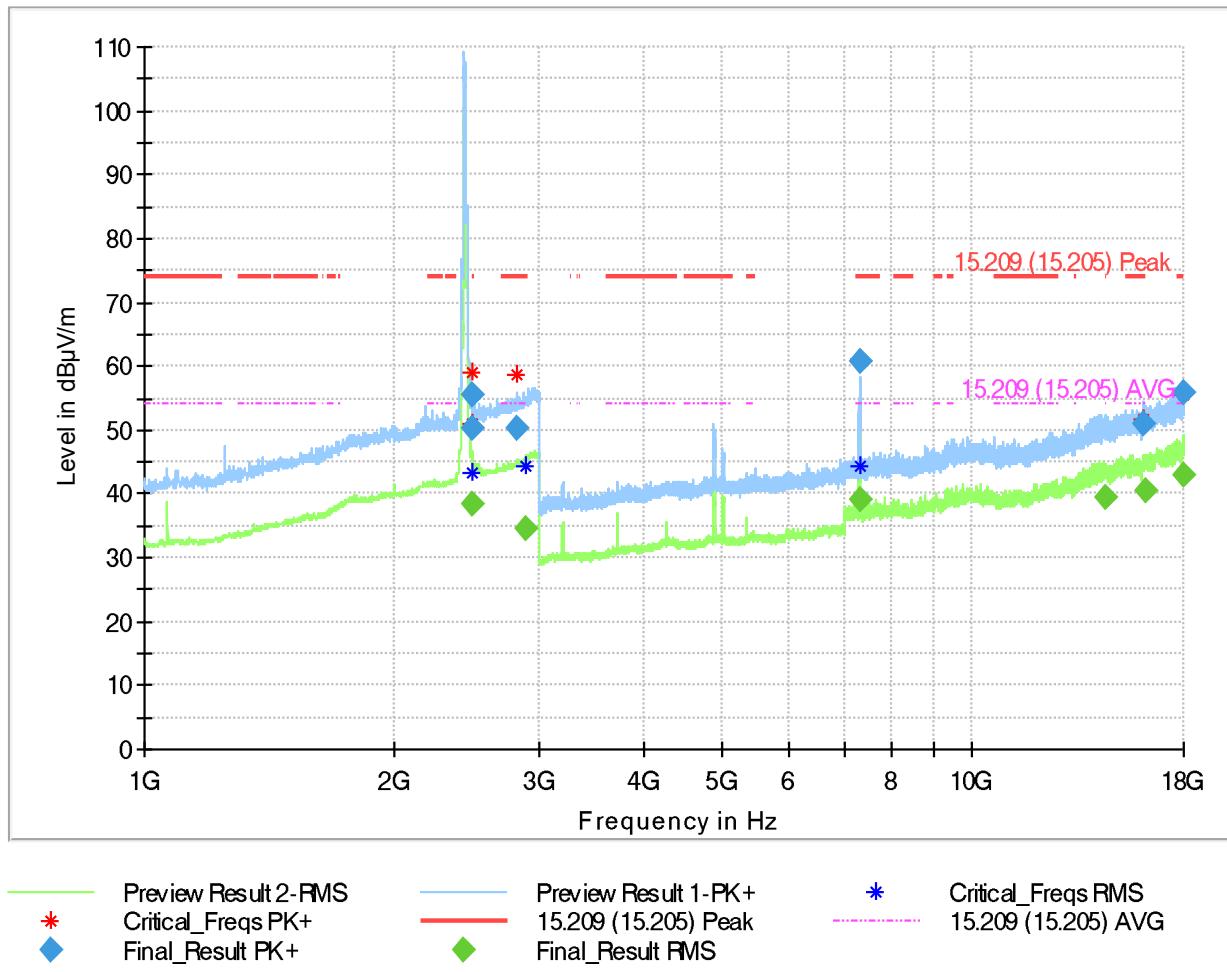

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	RMS (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2483.850000	---	38.41	54.00	15.59	1000.0	1000.000	150.0	V
2484.525000	55.36	---	74.00	18.64	1000.0	1000.000	150.0	V
2495.270000	50.36	---	74.00	23.64	1000.0	1000.000	150.0	H
2811.350000	50.44	---	74.00	23.56	1000.0	1000.000	150.0	V
2891.955000	---	34.49	54.00	19.51	1000.0	1000.000	150.0	V
7310.571667	---	39.11	54.00	14.89	1000.0	1000.000	150.0	V
7312.387500	60.66	---	74.00	13.34	1000.0	1000.000	150.0	V
14482.138333	---	39.49	54.00	14.51	1000.0	1000.000	150.0	V
16067.370834	51.15	---	74.00	22.85	1000.0	1000.000	150.0	V
16160.740833	---	40.56	54.00	13.44	1000.0	1000.000	150.0	V
17979.300833	55.94	---	74.00	18.06	1000.0	1000.000	150.0	H
17981.338333	---	42.94	54.00	11.06	1000.0	1000.000	150.0	H

Plot 97: Mode 4, RSE, 1 GHz – 18 GHz, high channel, horizontal / vertical polarisation

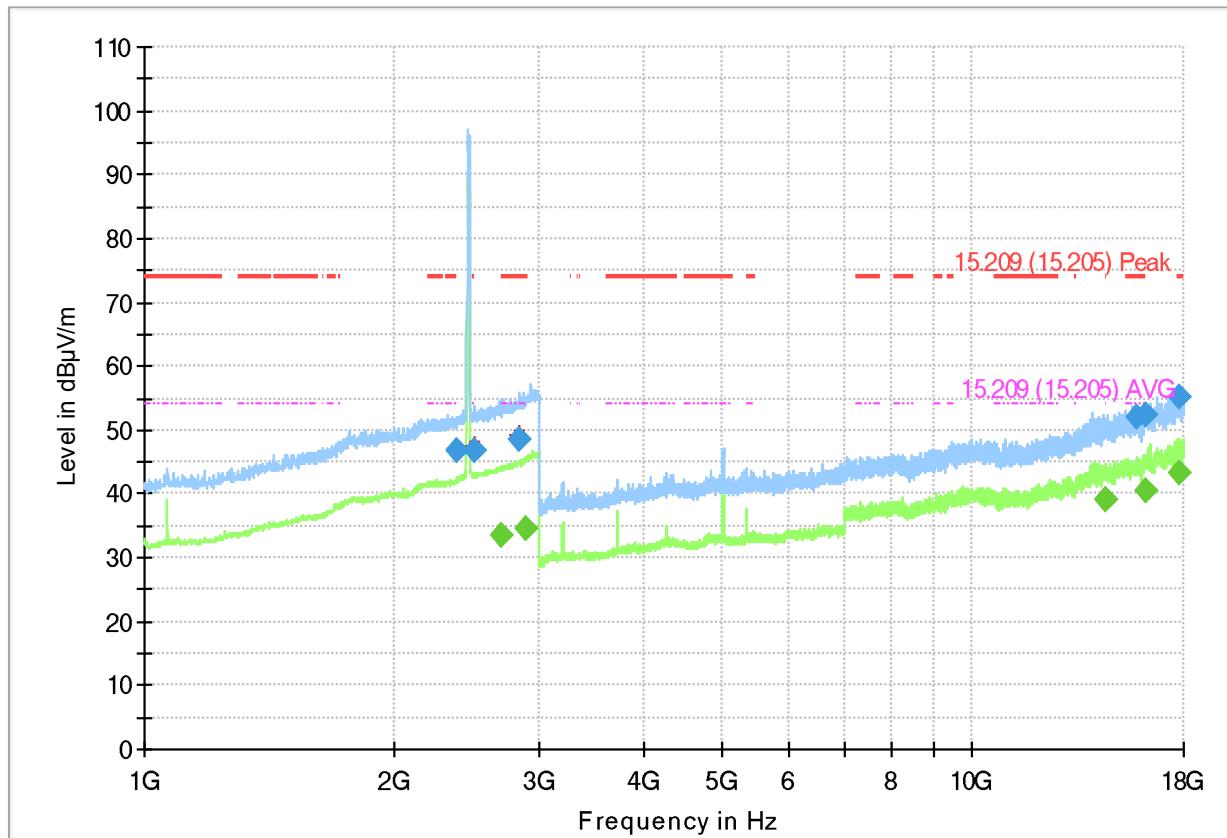


 Preview Result 2-RMS  Critical_Freqs PK+  Final_Result PK+	 Preview Result 1-PK+  15.209 (15.205) Peak  Final_Result RMS	 Critical_Freqs RMS  15.209 (15.205) AVG
--	--	---


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	RMS (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2389.780000	46.69	---	74.00	27.31	1000.0	1000.000	150.0	V
2497.035000	46.79	---	74.00	27.21	1000.0	1000.000	150.0	V
2693.250000	---	33.38	54.00	20.62	1000.0	1000.000	150.0	H
2840.010000	48.43	---	74.00	25.57	1000.0	1000.000	150.0	V
2895.880000	---	34.60	54.00	19.40	1000.0	1000.000	150.0	H
14473.661667	---	39.18	54.00	14.82	1000.0	1000.000	150.0	V
14493.646666	---	39.01	54.00	14.99	1000.0	1000.000	150.0	V
15817.034166	51.92	---	74.00	22.08	1000.0	1000.000	150.0	V
16196.528333	---	40.66	54.00	13.34	1000.0	1000.000	150.0	H
16198.521666	52.40	---	74.00	21.60	1000.0	1000.000	150.0	V
17733.904167	55.07	---	74.00	18.93	1000.0	1000.000	150.0	H
17760.576666	---	43.25	54.00	10.75	1000.0	1000.000	150.0	H


Plot 98: Mode 4, RSE, 18 GHz – 26.5 GHz, low channel, horizontal / vertical polarisation

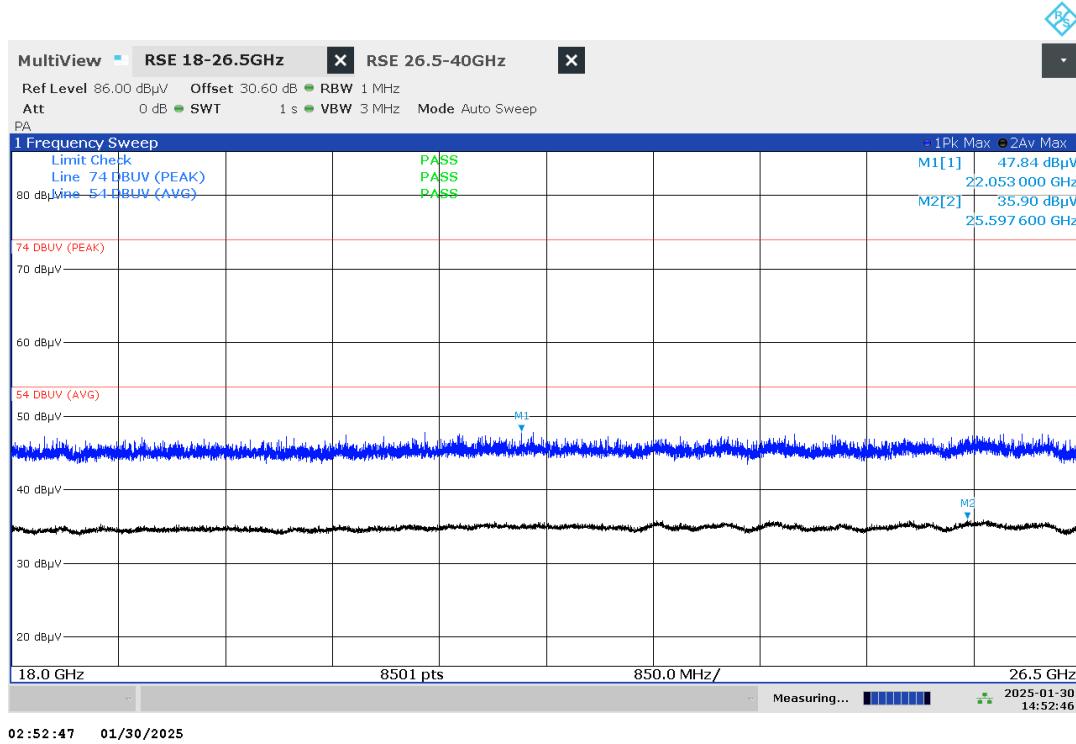

Plot 99: Mode 4, RSE, 18 GHz – 26.5 GHz, mid channel, horizontal / vertical polarisation

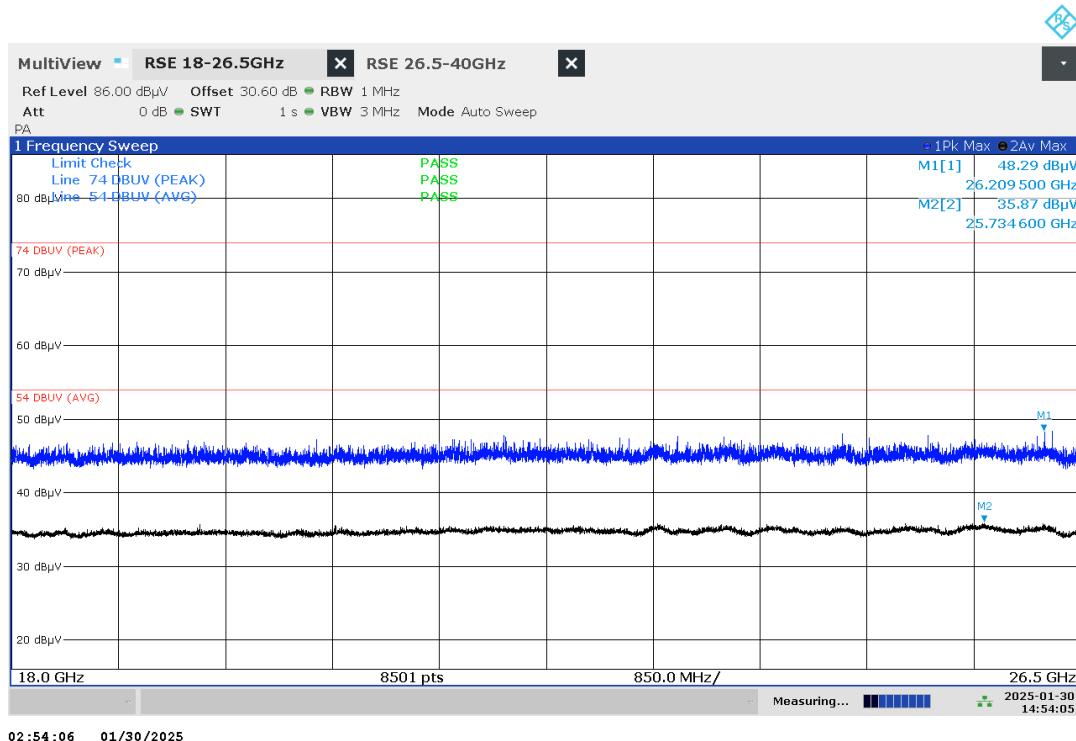


Plot 100: Mode 4, RSE, 18 GHz – 26.5 GHz, high channel, horizontal / vertical polarisation

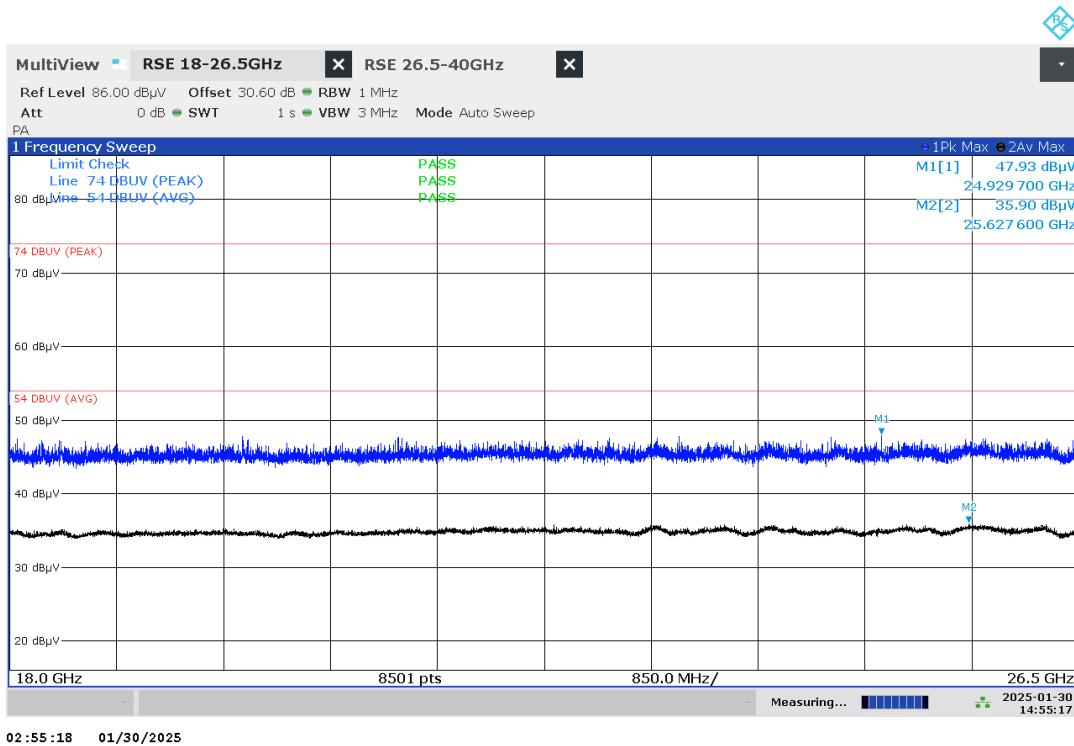

8 TEST SETUP DESCRIPTION

8.1 Semi Anechoic Chamber with Ground Plane

Radiated measurements are performed in vertical and horizontal plane in the frequency range 30 MHz to 1 GHz in a Semi Anechoic Chamber with a metallic ground plane. The EUT is positioned on a non-conductive test table with a height of 0.80 m above the metallic ground plane that covers the whole chamber. The receiving antennas conform to specification ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices. These antennas can be moved over the height range between 1.0 m and 4.5 m in order to search for maximum field strength emitted from the EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by a spectrum analyzer where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

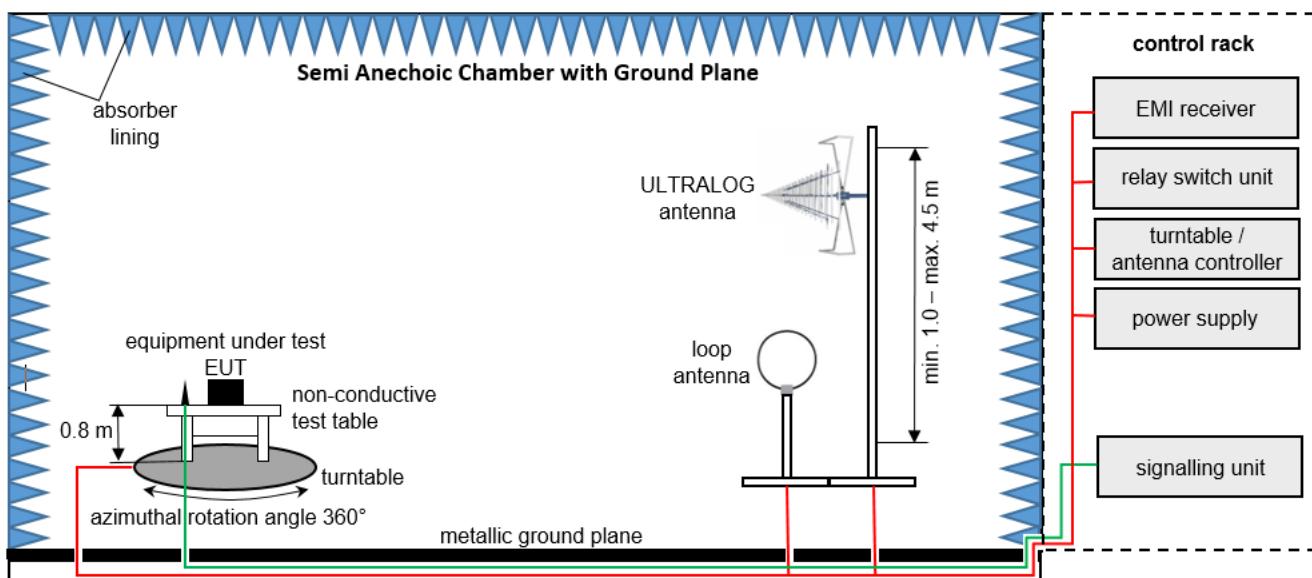

Measurement distance: loop antenna 3 m, ULTRALOG antenna 3 m

EMC32 software version: 11.10.00

FS = UR + CL + AF

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Last / Next Calibration
1	Power Supply	Rohde & Schwarz	IN 600	101554	LAB000824	NR	–
2	Antenna	Rohde & Schwarz	HL562E	102173	LAB000673	C	2022-10-17 → 36M → 2025-10-17
3	Power Supply	Chroma	61602		LAB000507	NR	–
4	EMI Test Receiver	Rohde & Schwarz	ESW26	101517	LAB000363	C	2025-01-10 → 12M → 2026-01-10
5	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PSI 9080-40 T	2000230001	LAB000313	NR	–
6	Test table	innco systems GmbH	PT1208-080-RH	-	LAB000306	NR	–
7	Antenna Mast	Berlebach	Tripod HFH2-Z8 & -Z9	101762	LAB000292	NR	–
8	Positioner	maturo GmbH	TD 1.5-10KG		LAB000258	NR	–
9	Compressed Air	Implotex	1-850-30	-	LAB000256	NR	–
10	Semi/Fully Anechoic Chamber	Albatross Projects GmbH	Babylon 5 (SAC 5)	20168.PRB	LAB000235	CM	2022-01-31 → 36M → 2025-01-31
11	Measurement Software	Rohde & Schwarz	EMC32 V11.20		LAB000226	NR	–
12	Turntable	maturo GmbH	TT2.0-2t	TT2.0-2t/921	LAB000225	NR	–
13	Antenna Mast	maturo GmbH	CAM4.0-P	CAM4.0-P/316	LAB000224	NR	–
14	Antenna Mast	maturo GmbH	BAM4.5-P	BAM4.5-P/272	LAB000223	NR	–
15	Controller	maturo GmbH	FCU 3.0	10082	LAB000222	NR	–
16	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PS 2042-10 B	2878350292	LAB000191	NR	–
17	Pre-Amplifier	Schwarzbeck Mess-Elektronik OHG	BBV 9718 C	84	LAB000169	CM	2022-05-31 → 36M → 2025-05-31
18	Antenna	Rohde & Schwarz	HF907	102899	LAB000151	C	2023-05-15 → 36M → 2026-05-15
19	Antenna	Rohde & Schwarz	HL562E	102005	LAB000150	C	2022-12-22 → 36M → 2025-12-22
20	Open Switch and Control Platform	Rohde & Schwarz	OSP220 Base Unit 2HU	101748	LAB000149	NR	–
21	Antenna	Rohde & Schwarz	HFH2-Z2E	100954	LAB000108	C	2023-05-05 → 36M → 2026-05-05

8.2 Fully Anechoic Chamber

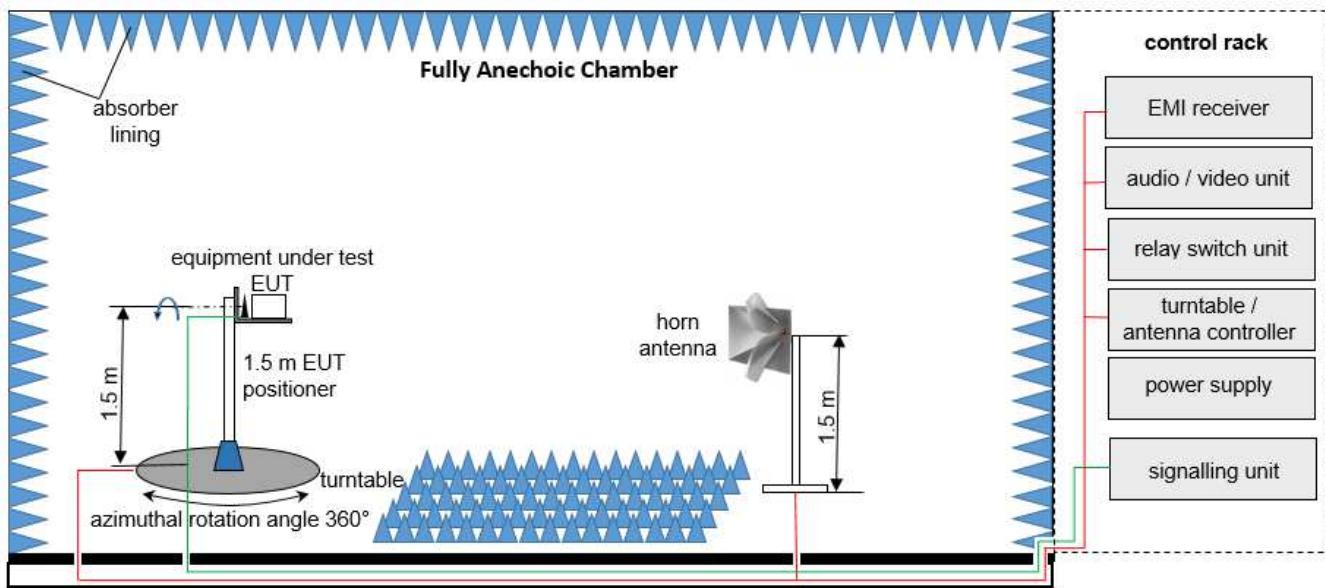

Measurement distance: horn antenna 3 meter

EMC32 software version: 11.10.00

FS = UR + CL + AF

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

Example calculation:

FS [dB μ V/m] = 12.35 [dB μ V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB μ V/m] (35.69 μ V/m)

OP = AV + D - G + CA

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)


Example calculation:

OP [dBm] = -65.0 [dBm] + 50 [dB] - 20 [dBi] + 5 [dB] = -30 [dBm] (1 μ W)

List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Last / Next Calibration
1	Power Supply	Rohde & Schwarz	IN 600	101554	LAB000824	NR	–
2	Antenna	Rohde & Schwarz	HL562E	102173	LAB000673	C	2022-10-17 → 36M → 2025-10-17
3	Power Supply	Chroma	61602		LAB000507	NR	–
4	EMI Test Receiver	Rohde & Schwarz	ESW26	101517	LAB000363	C	2025-01-10 → 12M → 2026-01-10
5	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PSI 9080-40 T	2000230001	LAB000313	NR	–
6	Test table	innco systems GmbH	PT1208-080-RH	-	LAB000306	NR	–
7	Antenna Mast	Berlebach	Tripod HFH2-Z8 & -Z9	101762	LAB000292	NR	–
8	Positioner	maturo GmbH	TD 1.5-10KG		LAB000258	NR	–
9	Compressed Air	Implotex	1-850-30	-	LAB000256	NR	–
10	Semi/Fully Anechoic Chamber	Albatross Projects GmbH	Babylon 5 (SAC 5)	20168.PRB	LAB000235	CM	2022-01-31 → 36M → 2025-01-31
11	Measurement Software	Rohde & Schwarz	EMC32 V11.20		LAB000226	NR	–
12	Turntable	maturo GmbH	TT2.0-2t	TT2.0-2t/921	LAB000225	NR	–
13	Antenna Mast	maturo GmbH	CAM4.0-P	CAM4.0-P/316	LAB000224	NR	–
14	Antenna Mast	maturo GmbH	BAM4.5-P	BAM4.5-P/272	LAB000223	NR	–
15	Controller	maturo GmbH	FCU 3.0	10082	LAB000222	NR	–
16	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PS 2042-10 B	2878350292	LAB000191	NR	–
17	Pre-Amplifier	Schwarzbeck Mess-Elektronik OHG	BBV 9718 C	84	LAB000169	CM	2022-05-31 → 36M → 2025-05-31
18	Antenna	Rohde & Schwarz	HF907	102899	LAB000151	C	2023-05-15 → 36M → 2026-05-15
19	Antenna	Rohde & Schwarz	HL562E	102005	LAB000150	C	2022-12-22 → 36M → 2025-12-22
20	Open Switch and Control Platform	Rohde & Schwarz	OSP220 Base Unit 2HU	101748	LAB000149	NR	–
21	Antenna	Rohde & Schwarz	HFH2-Z2E	100954	LAB000108	C	2023-05-05 → 36M → 2026-05-05

8.3 Radiated measurements > 18 GHz

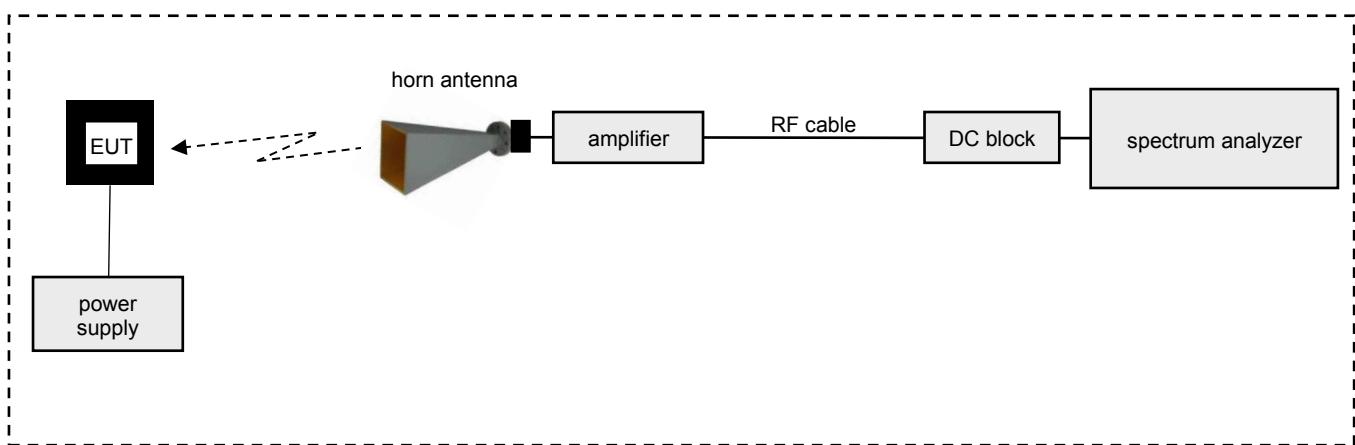


List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Last / Next Calibration
1	Absorber	Telemeter Electronic	EPP 12	-	LAB000327	NR	-
2	Test table	inncosystems GmbH	PT0707-RH light	-	LAB000303	NR	-
3	Spectrum Analyser	Rohde & Schwarz	FSW43	101391	LAB000289	C	2024-06-04 → 12M → 2025-06-04
4	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PS 2042-10 B	2878350263	LAB000190	NR	-
5	WG-Coax-Adapter	Flann Microwave Ltd	22093-TF30 UG599/U	273263	LAB000183	CM	2024-07-16 → 12M → 2025-07-16
6	WG-Coax-Adapter	Flann Microwave Ltd	20093-TF30 UBR220	273374	LAB000181	CM	2024-07-16 → 12M → 2025-07-16
7	Coaxial Cable	Huber & Suhner	SF101/1.5m	503987/1	LAB000165	CM	2024-07-17 → 12M → 2025-07-17
8	Antenna	Flann Microwave Ltd	22240-20 (26.5-40.0 GHz)	270448	LAB000130	CM	2024-07-16 → 12M → 2025-07-16
9	Antenna	Flann Microwave Ltd	20240-20 (18.0-26.5 GHz)	266403	LAB000128	CM	2024-07-16 → 12M → 2025-07-16
10	Antenna Mast	Schwarzbeck Mess-Elektronik OHG	AM 9104	99	LAB000109	NR	-
11	Multimeter	Keysight	U1242B	MY59110034	LAB000009	C	2024-08-06 → 12M → 2025-08-06

8.4 Conducted measurements WLAN test system R&S TS 8997

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The losses for all signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

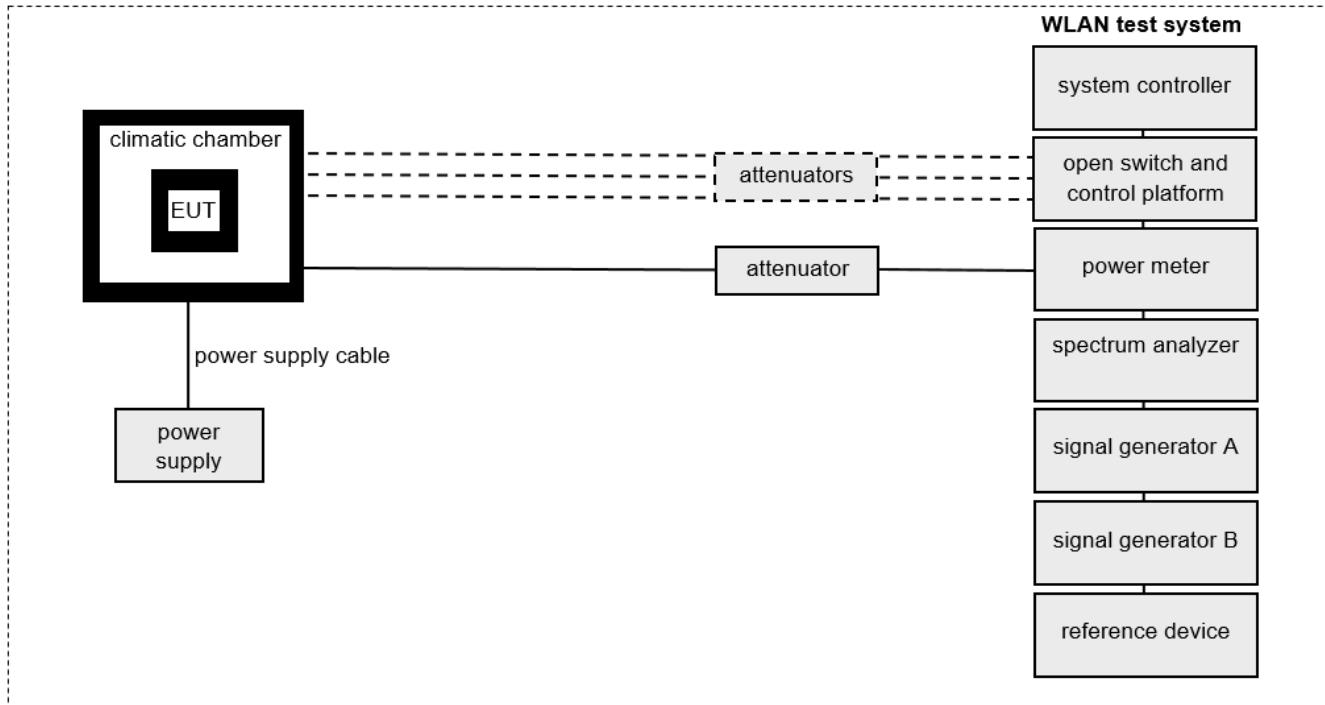

EMC32/WMS32 software version: 12.00.00

List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Last / Next Calibration
1	Attenuator	Hewlett Packard	11713A	3439A01548	LAB000962	NR	–
2	RF Shield Box	Rohde & Schwarz	CMW-Z10	101612	LAB000693	NR	–
3	Open Switch and Control Platform	Rohde & Schwarz	OSP-B157W8Plus	100830	LAB000358	C	2024-03-26 → 12M → 2025-03-26
4	TS8997	Rohde & Schwarz	TS8997-Rack	100829	LAB000322	NR	–
5	Open Switch and Control Platform	Rohde & Schwarz	OSP-B157WX	101247	LAB000280	NR	–
6	Spectrum Analyser	Rohde & Schwarz	FSV40	101403	LAB000278	C	2024-04-10 → 12M → 2025-04-10
7	Vector Signal Generator	Rohde & Schwarz	SMBV100A-06	258240	LAB000277	C	2024-12-10 → 36M → 2027-12-10
8	Signal Generator	Rohde & Schwarz	SMB100A-20	178175	LAB000276	C	2024-04-03 → 12M → 2025-04-03
9	Radio Communication Tester	Rohde & Schwarz	CMW270	101479	LAB000275	NR	–
10	Controller	Hewlett Packard	ATS-Z230	101379	LAB000274	NR	–
11	Attenuator	Hewlett Packard	84906K	3049A00482	LAB000250	NR	–
12	Attenuator	Hewlett Packard	84904K	3047A00772	LAB000249	NR	–
13	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PS 2042-10 B	2878350263	LAB000190	NR	–
14	Climatic Chamber	CTS GmbH	T-65/50	204002	LAB000110	CM	2024-06-07 → 12M → 2025-06-07
15	Multimeter	Keysight	U1242B	MY59110034	LAB000009	C	2024-08-06 → 12M → 2025-08-06

9 MEASUREMENT PROCEDURES

9.1 Radiated spurious emissions from 9 kHz to 30 MHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
- In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 360° continuously.
- For each turntable position the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated with special 3D adapter set to find maximum level of emissions.
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 40 dB/decade of distance in the region closer than λ in m divided by 2π (i.e., $\lambda/2\pi$), and at 20 dB/decade of distance beyond that, using the measurement of a single point at the radial angle that produces the maximum emission.

This correction is already included in the limit line of corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

9.2 Radiated spurious emissions from 30 MHz to 1 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 360° continuously.
- Antenna polarisation is changed (H-V / V-H) and antenna height is changed from 1 meter to 4 meters.
- For each turntable position / antenna polarisation / antenna height the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software based on evaluated data during the pre-scan by rotating the turntable and changing antenna height and polarisation.
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C6.4).
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position, antenna polarisation and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

9.3 Radiated spurious emissions from 1 GHz to 18 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 360° continuously.
- Antenna polarisation is changed (H-V / V-H) and antenna height is changed from 1 meter to 4 meters.
- For each turntable position / antenna polarisation / antenna height the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software based on evaluated data during the pre-scan by rotating the turntable and changing antenna height and polarisation.
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C6.4).
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position, antenna polarisation and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

9.4 Radiated spurious emissions above 18 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- EUT is powered on and set into operation.
- Test distance depends on EUT size and test antenna size (farfield conditions shall be met).

Pre-scan

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and for different polarizations of the antenna.

Final measurement

- Significant emissions found during the pre-scan will be maximized, i.e. position and antenna orientation causing the highest emissions with Peak and RMS detector
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C63.4 / C63.10).
- Final plot showing measurement data, levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit is recorded.

Note

- In case of measurements with external harmonic mixers (e.g. above 50 GHz) special care is taken to avoid possible overloading of the external mixer's input.
- As external harmonic mixers may generate false images, care is taken to ensure that any emission measured by the spectrum analyzer is indeed radiated from the EUT and not internally generated by the external harmonic mixer. Signal identification feature of spectrum analyzer is used to eliminate/reduce images of the external harmonic mixer.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

10 MEASUREMENT UNCERTAINTIES

Radio frequency	$\leq \pm 1 \times 10^{-7}$
RF power, conducted	$\leq \pm 0.75$ dB
Power spectral density	$\leq \pm 3$ dB
Maximum frequency deviation	$\leq \pm 5$ %
Deviation limitation Duty Cycle, Tx-sequence, Tx-gap	$\leq \pm 5$ %
Occupied channel bandwidth	$\leq \pm 5$ %
Conducted spurious emission of transmitter	$\leq \pm 4$ dB
Conducted emission of receivers	$\leq \pm 4$ dB
Radiated emission of transmitter	$\leq \pm 6$ dB
Radiated emission of receiver	$\leq \pm 6$ dB
Temperature	$\leq \pm 2.5$ °C
Humidity	$\leq \pm 10$ %

The indicated expanded measurement uncertainty corresponds to the standard measurement uncertainty for the measurement results multiplied by the coverage factor $k = 2$. It was determined in accordance with EA-4/02 M:2013. The true value is located in the corresponding interval with a probability of 95 %.