



RF TEST REPORT

Product Name: MYHIXEL Device III

Model Name: MHX-PA-0015

FCC ID: 2A9Z3-MHX-PA-0015

Issued For : New Wellness Concept SL

Avad. republic Argentina 25, 8th floor. 41010 Sevilla, SPAIN

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT25G084RF01

Sample Received Date: Jul. 10, 2025

Date of Test: Jul. 10, 2025 ~ Aug. 19, 2025

Date of Issue: Aug. 20, 2025

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: New Wellness Concept SL

Address: Avad. republic Argentina 25, 8th floor. 41010 Sevilla, SPAIN

Manufacturer: New Wellness Concept SL

Address: Avad. republic Argentina 25, 8th floor. 41010 Sevilla, SPAIN

Product Name: MYHIXEL Device III

Trademark: N/A

Model Name: MHX-PA-0015

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.247, Subpart C ANSI C63.10-2020	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 TEST SOFTWARE AND POWER LEVEL	9
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.5 EQUIPMENTS LIST	11
3. EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 TEST PROCEDURE	14
3.3 TEST SETUP	14
3.4 EUT OPERATING CONDITIONS	14
3.5 TEST RESULTS	15
4. RADIATED EMISSION MEASUREMENT	17
4.1 RADIATED EMISSION LIMITS	17
4.2 TEST PROCEDURE	19
4.3 TEST SETUP	19
4.4 EUT OPERATING CONDITIONS	20
4.5 FIELD STRENGTH CALCULATION	20
5. CONDUCTED SPURIOUS & BAND EDGE EMISSION	28
5.1 LIMIT	28
5.2 TEST PROCEDURE	28
5.3 TEST SETUP	28
5.4 EUT OPERATION CONDITIONS	28
5.5 TEST RESULTS	28
6. POWER SPECTRAL DENSITY TEST	29
6.1 LIMIT	29
6.2 TEST PROCEDURE	29
6.3 TEST SETUP	29
6.4 EUT OPERATION CONDITIONS	29
6.5 TEST RESULTS	29



7. BANDWIDTH TEST	30
7.1 LIMIT	30
7.2 TEST PROCEDURE	30
7.3 TEST SETUP	30
7.4 EUT OPERATION CONDITIONS	30
7.5 TEST RESULTS	30
8. PEAK OUTPUT POWER TEST	31
8.1 LIMIT	31
8.2 TEST PROCEDURE	31
8.3 TEST SETUP	31
8.4 EUT OPERATION CONDITIONS	31
8.5 TEST RESULTS	31
9. ANTENNA REQUIREMENT	32
9.1 STANDARD REQUIREMENT	32
9.2 EUT ANTENNA	32
APPENDIX I - TEST RESULTS	33
DUTY CYCLE	33
MAXIMUM PEAK CONDUCTED OUTPUT POWER	36
-6DB BANDWIDTH	37
OCCUPIED CHANNEL BANDWIDTH	40
MAXIMUM POWER SPECTRAL DENSITY LEVEL	43
BAND EDGE & CONDUCTED RF SPURIOUS EMISSION	46
APPENDIX II - MEASUREMENT PHOTOS	53



Revision History

Rev.	Issue Date	Revisions
00	Aug. 20, 2025	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 Part 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	$\pm 0.46\%$
2	RF Output Power, Conducted	$\pm 0.71\text{dB}$
3	Power Spectral Density, Conducted	$\pm 1.57\text{dB}$
4	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
5	Conducted emission	$\pm 2.80\text{dB}$
6	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
7	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.61\text{dB}$
8	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$
9	Temperature	$\pm 0.5^\circ\text{C}$
10	Humidity	$\pm 2\%$
11	Duty Cycle	$\pm 2.3\%$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	MYHIXEL Device III	
Trademark:	N/A	
Test Model Name:	MHX-PA-0015	
Series Model:	N/A	
Model Difference:	N/A	
Product Description:	Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK
	Radio Technology:	BLE
	Bluetooth Configuration:	BLE (1M PHY, 2M PHY)
	Number Of Channel:	40
	Antenna Designation:	PCB
	Antenna Gain (dBi)	0.5
Channel List:	Please refer to the Note 3.	
Rating:	Input: TYPE-C 5V 2A	
Battery:	Capacity: 2000mAh Rated Voltage: 3.7V	
Hardware Version:	N/A	
Software Version:	N/A	
Connecting I/O Port(s):	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.

3.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2402MHz)	1 MHz/GFSK
Mode 2	TX CH19(2440MHz)	1 MHz/GFSK
Mode 3	TX CH39(2480MHz)	1 MHz/GFSK

Worst Mode	Description	Data/Modulation
Mode 4	TX CH00(2402MHz)	2 MHz/GFSK
Mode 5	TX CH19(2440MHz)	2 MHz/GFSK
Mode 6	TX CH39(2480MHz)	2 MHz/GFSK

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have been tested for all available U.S. voltage and frequency (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.
- (3) The battery is fully-charged during the radiated and RF conducted test.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 7: Keeping BLE TX

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: BLE	
CMOSTEK_V2.3.8b	Mode Or Modulation type	Power setting
	1M	7
	2M	7



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
USB Cable	N/A	N/A	N/A	1.5m
USB-A to USB-C Cable	N/A	N/A	N/A	1m

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	HKF-16	N/A	N/A
Adapter	Tenpao	S005CAU0500200	N/A	Input: 100-240V ~ 50/60Hz 0.3A Output: 5V, 2A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in «Length» column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
LISN	COM-POWER	LI-115	02032	2025.03.05	2026.03.04
LISN	SCHWARZBECK	NNLK 8122	00160	2025.03.05	2026.03.04
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2025.03.05	2026.03.04
Coaxial cables (9kHz-30MHz)	Juncoax	JMR600-N MNM-2M	N.A	2025.03.06	2026.03.05
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
Active loop Antenna	ETS	6502	00049544	2025.03.11	2028.03.10
Spectrum Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Trilog Broadband Antenna (30M-1G)	SCHWARZBECK	VULB 9168	2705	2024.05.17	2027.05.16
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2025.03.10	2028.03.09
Horn Antenna(18-40G)	SCHWARZBECK	BBHA 9170	685	2023.10.23	2026.10.22
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2025.03.06	2026.03.05
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2025.03.06	2026.03.05
Pre-amplifier(18-40G)	SCHWARZBECK	BBV 9721	9721-019	2024.10.21	2025.10.20
Coaxial cables (9kHz-1GHz)	Juncoax	JMR600-N MNM-8M	N.A	2025.03.06	2026.03.05
Coaxial cables (1GHz-18GHz)	TaiHe	UCD460B-NMSM-1M9	N.A	2025.03.06	2026.03.05
Coaxial cables (18GHz-40GHz)	Junkosha Inc.	MWX241-0 5000KMSK MS	N.A	2025.03.08	2026.03.07
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.08.05 2025.08.03	2025.08.04 2025.08.02
Antenna Tower	SAEMC	BK-4AT-BS-D	SK2021093008	N.A	N.A
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Signal Analyzer	Keysight	N9020A	MY50530994	2025.03.05	2026.03.04
Signal Analyzer	R&S	FSV40-N	102245	2025.02.17	2026.02.16
Power Sensor	R&S	NRP8S	149.0006K02 -104963-Ae	2025.03.06	2026.03.05
RF Automatic Test system	MW	MW100 -RFCB	MW220324L G-33	2025.03.06	2026.03.05
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2025.03.05	2026.03.04



Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.08.05 2025.08.03	2025.08.04 2025.08.02
Attenuator	eastsheep	90db	N.A	2025.03.06	2026.03.05
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Digital multimeter	MASTECH	MS8261	MBGBC8305 3	2025.03.05	2026.03.04
DC source	Jiuyuan	QJ6010E	N.A	2025.03.09	2026.03.08
Testing Software			MTS8310_V2.0.0.0_MW		



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

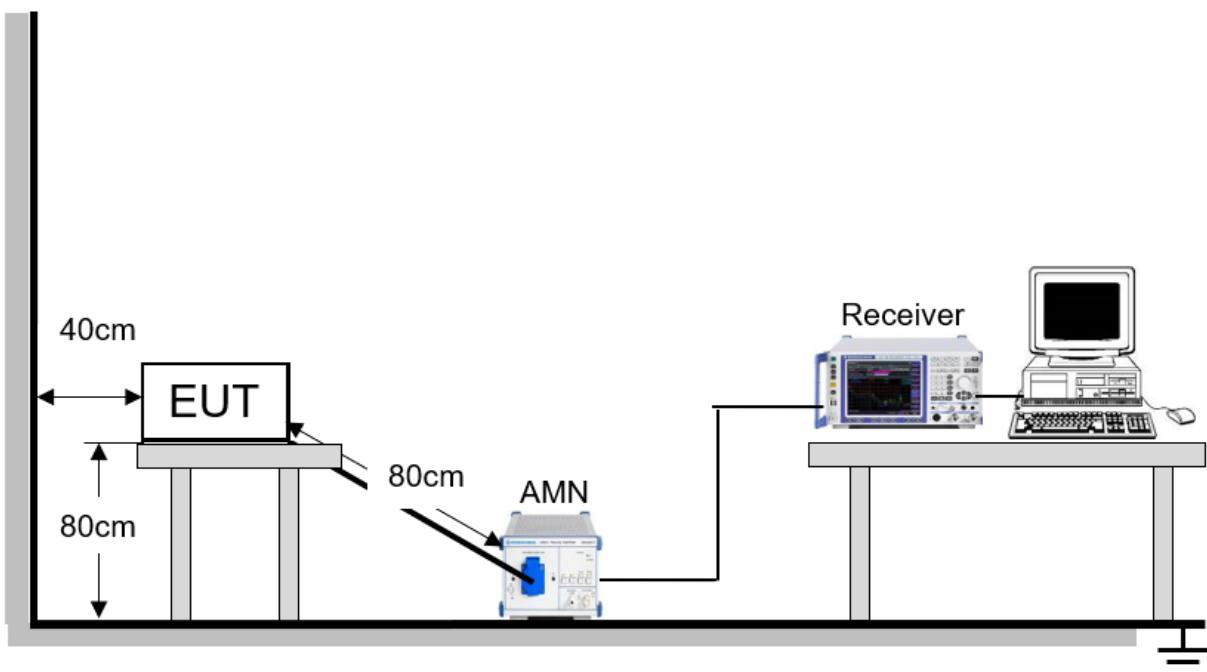


3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.5 TEST RESULTS


Project: LGT25G084	Test Engineer: LiuH
EUT: MYHIXEL Device III	Temperature: 24.8°C
M/N: MHX-PA-0015	Humidity: 45%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-07-10
Test Mode: TX DH5 2402	
Note:	

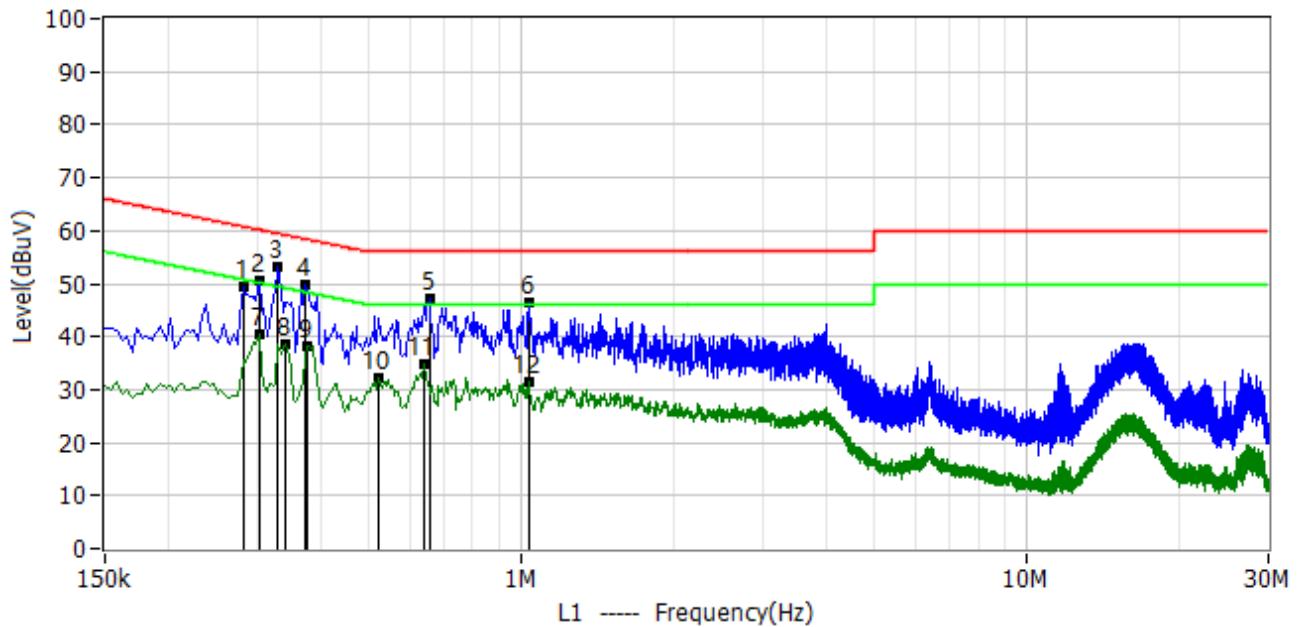

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.282	38.57	10.77	49.34	60.76	-11.41	QP	L1
2*	0.302	39.78	10.77	50.55	60.19	-9.64	QP	L1
3*	0.330	42.25	10.86	53.11	59.45	-6.34	QP	L1
4*	0.374	38.95	10.89	49.84	58.41	-8.57	QP	L1
5*	0.658	36.36	10.88	47.24	56.00	-8.76	QP	L1
6*	1.038	35.63	10.86	46.49	56.00	-9.51	QP	L1
7*	0.302	29.73	10.77	40.50	50.19	-9.68	AV	L1
8*	0.342	27.87	10.89	38.76	49.15	-10.39	AV	L1
9*	0.378	27.37	10.88	38.25	48.32	-10.07	AV	L1
10*	0.522	21.28	10.93	32.21	46.00	-13.79	AV	L1
11*	0.642	23.86	10.90	34.76	46.00	-11.24	AV	L1
12*	1.034	20.63	10.86	31.49	46.00	-14.51	AV	L1



Project: LGT25G084	Test Engineer: LiuH
EUT: MYHIXEL Device III	Temperature: 24.8°C
M/N: MHX-PA-0015	Humidity: 45%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-07-10
Test Mode: TX DH5 2402	
Note:	

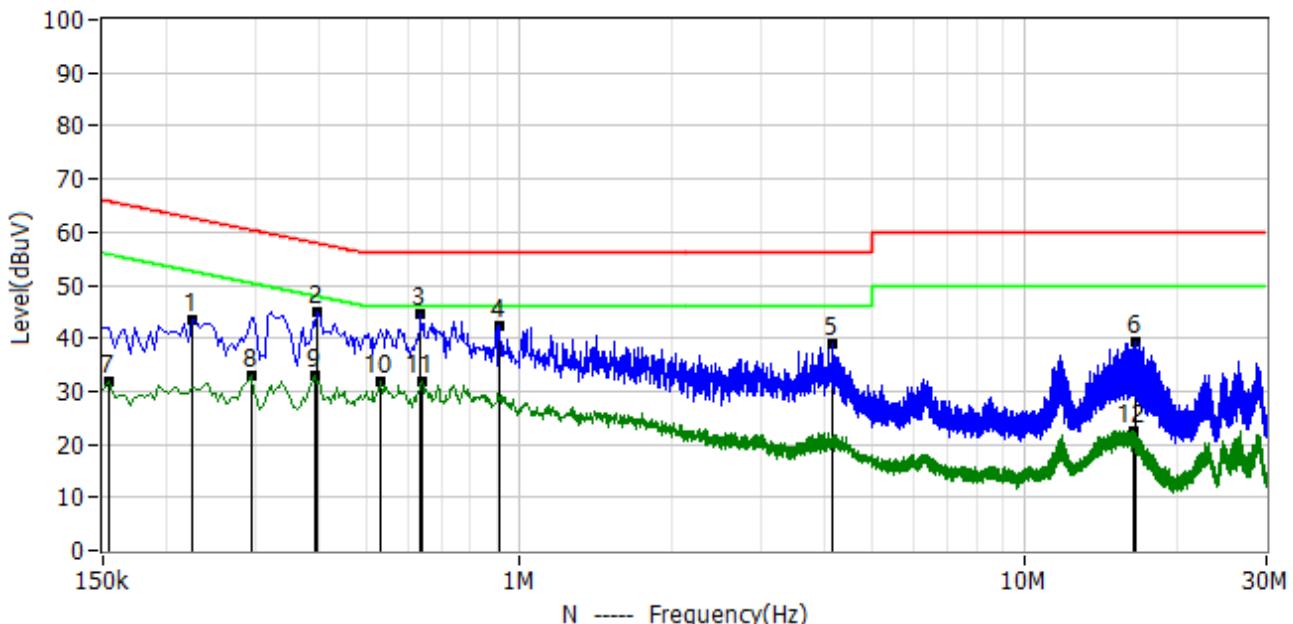

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.226	32.81	10.69	43.50	62.60	-19.10	QP	N
2*	0.398	34.21	10.82	45.03	57.90	-12.87	QP	N
3*	0.638	33.53	10.86	44.39	56.00	-11.61	QP	N
4*	0.910	31.44	10.84	42.28	56.00	-13.72	QP	N
5*	4.150	27.79	11.28	39.07	56.00	-16.93	QP	N
6*	16.474	27.61	11.69	39.30	60.00	-20.70	QP	N
7*	0.154	21.12	10.70	31.82	55.78	-23.96	AV	N
8*	0.294	22.32	10.76	33.08	50.41	-17.33	AV	N
9*	0.394	22.30	10.82	33.12	47.98	-14.86	AV	N
10*	0.530	20.82	10.85	31.67	46.00	-14.33	AV	N
11*	0.642	21.05	10.86	31.91	46.00	-14.09	AV	N
12*	16.318	10.82	11.69	22.51	50.00	-27.49	AV	N



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In case the emission fall within the Restricted band specified on Part15.205 (a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz (Peak/QP/AV)
Stop Frequency	150KHz/30MHz (Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz (Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz (Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AGV)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AGV)

Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



4.2 TEST PROCEDURE


- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

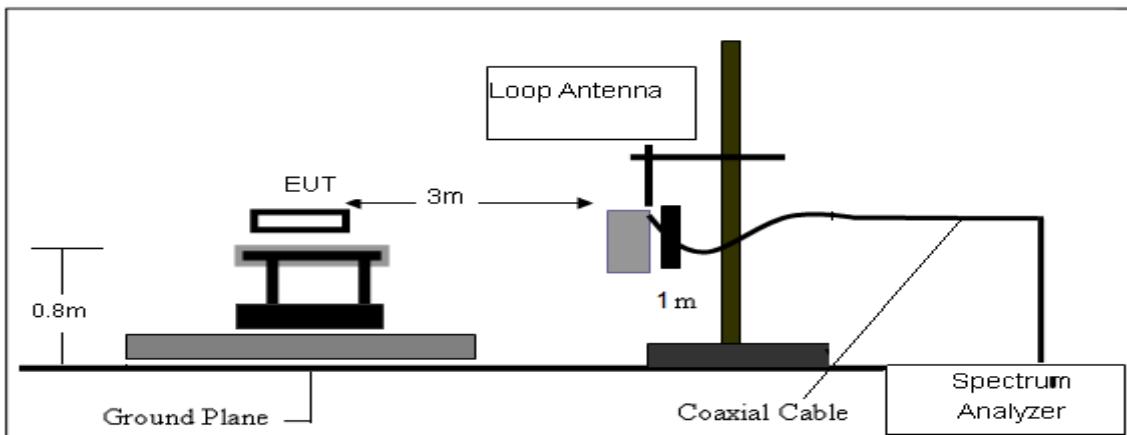

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

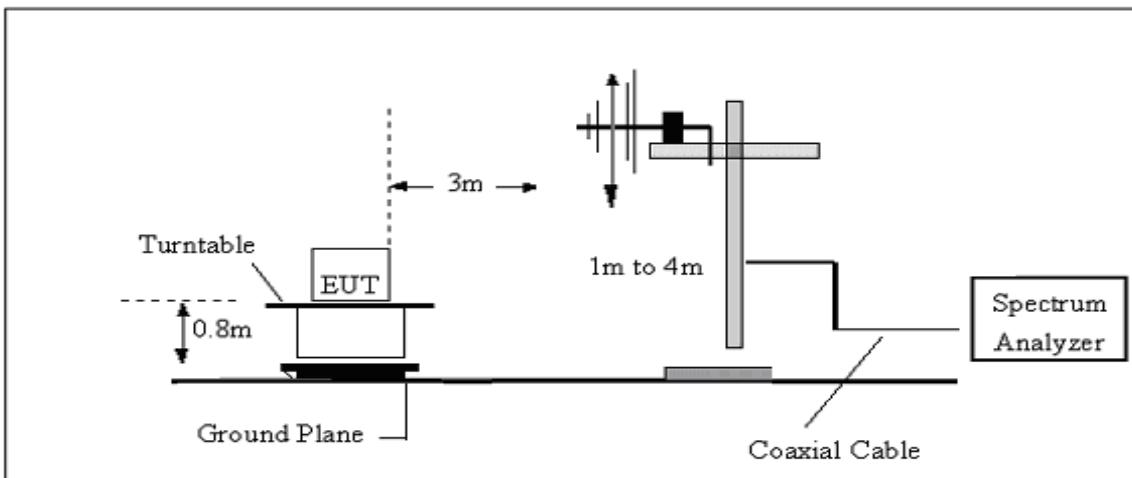

(C) Radiated Emission Test-Up Frequency Above 1GHz

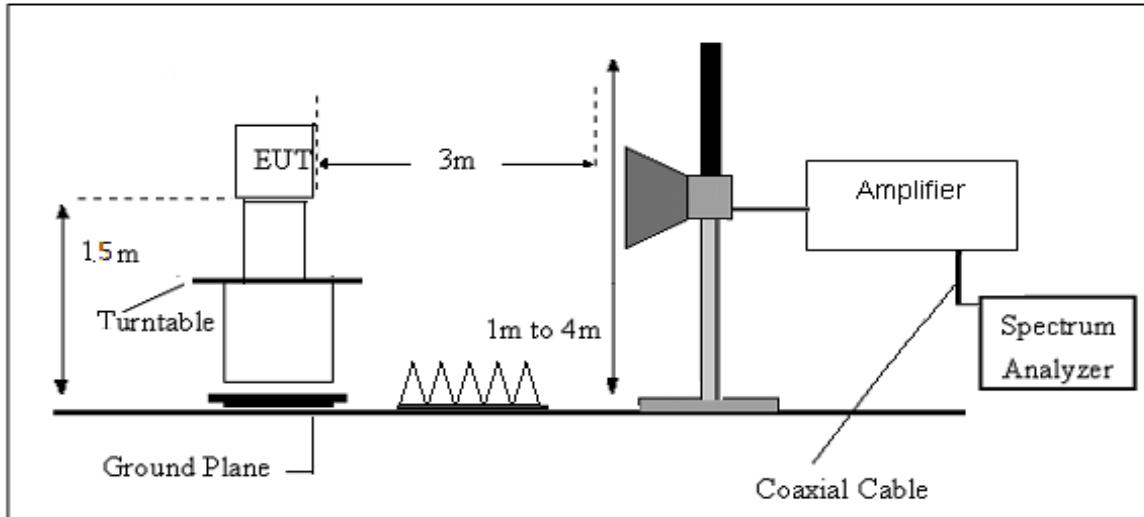

4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.

4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

Factor=AF+CL-AG



4.6 TEST RESULTS

Results of Radiated Emissions (9 KHz~30MHz)

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Remark
1*	-	-	-	-	-	-	-	See Note

Note:


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor.




Results of Radiated Emissions (30MHz~1000MHz)

Project: LGT25G084	Test Engineer: LiuH
EUT: MYHIXEL Device III	Temperature: 23.5°C
M/N: MHX-PA-0015	Humidity: 50%RH
Test Voltage: Battery	Test Data: 2025-07-11
Test Mode: TX BLE 2402	
Note:	

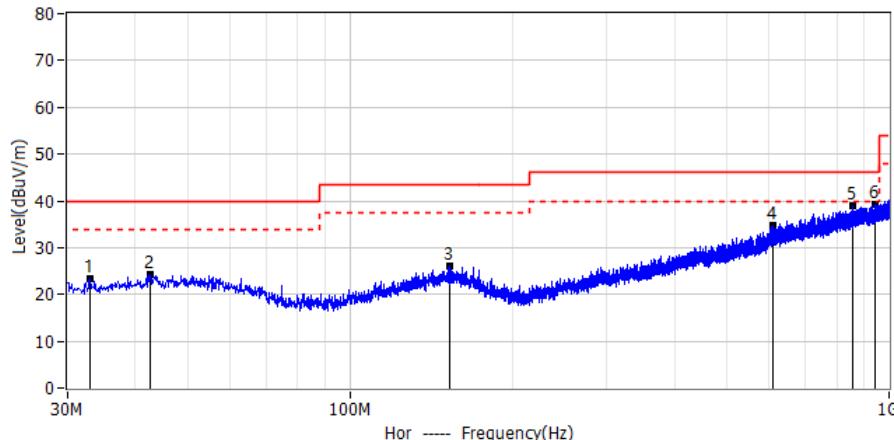

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	33.031	3.54	19.74	23.28	40.00	-16.72	QP	Hor
2*	42.731	3.27	20.99	24.26	40.00	-15.74	QP	Hor
3*	153.675	3.93	22.05	25.98	43.50	-17.52	QP	Hor
4*	608.120	5.27	29.61	34.88	46.00	-11.12	QP	Hor
5*	853.894	5.17	33.71	38.88	46.00	-7.12	QP	Hor
6*	939.375	4.80	34.55	39.35	46.00	-6.65	QP	Hor

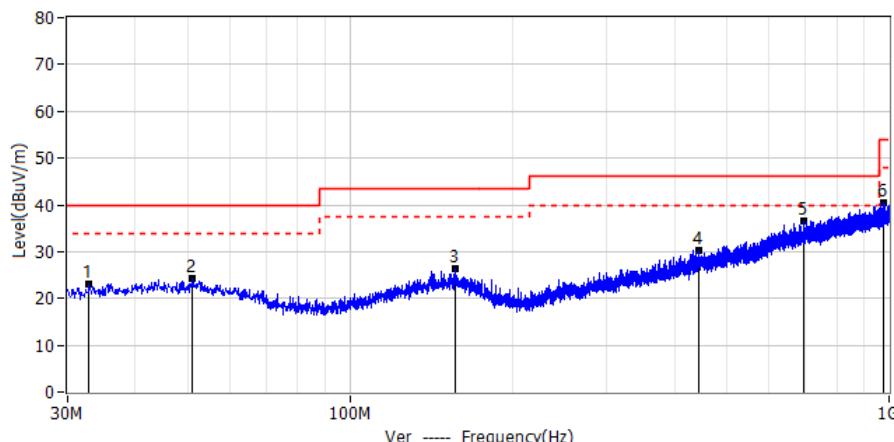


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	32.910	3.41	19.71	23.12	40.00	-16.88	QP	Ver
2*	51.098	3.27	20.93	24.20	40.00	-15.80	QP	Ver
3*	156.949	3.92	22.33	26.25	43.50	-17.25	QP	Ver
4*	442.856	3.75	26.60	30.35	46.00	-15.65	QP	Ver
5*	693.238	5.53	30.95	36.48	46.00	-9.52	QP	Ver
6*	978.054	5.48	35.06	40.54	54.00	-13.46	QP	Ver




Results of Radiated Emissions (Above 1000MHz)

Pre-test all modes, find the worst case in BLE 2M mode and record in this report.

Project: LGT25G084	Test Engineer: LiuH
EUT: MYHIXEL Device III	Temperature: 22.8°C
M/N: MHX-PA-0015	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2025-08-18
Test Mode: BLE 2M 2402	
Note: Worst Case	

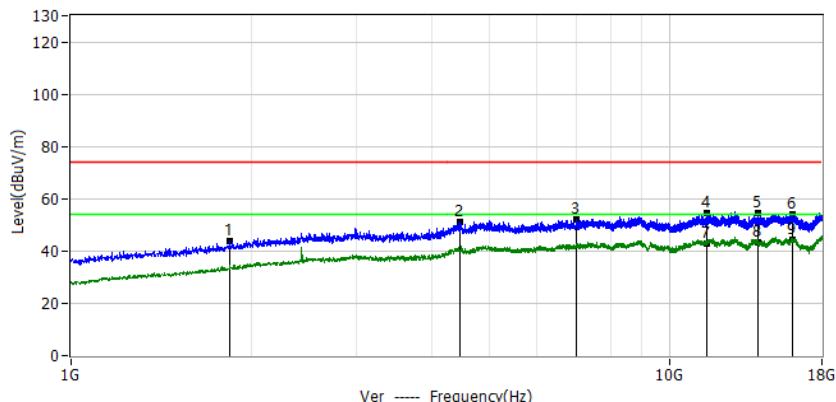


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1841.5000	60.30	-16.70	43.60	74.00	-30.40	PK	Ver
2*	4465.9000	56.78	-5.74	51.04	74.00	-22.96	PK	Ver
3*	6996.7000	59.31	-7.10	52.21	74.00	-21.79	PK	Ver
4*	11576.1000	59.60	-5.00	54.60	74.00	-19.40	PK	Ver
5*	14079.4000	58.61	-4.29	54.32	74.00	-19.68	PK	Ver
6*	16085.4000	57.93	-3.87	54.06	74.00	-19.94	PK	Ver
7*	11576.1000	47.80	-5.00	42.80	54.00	-11.20	AV	Ver
8*	14079.4000	47.39	-4.29	43.10	54.00	-10.90	AV	Ver
9*	16085.4000	48.27	-3.87	44.40	54.00	-9.60	AV	Ver

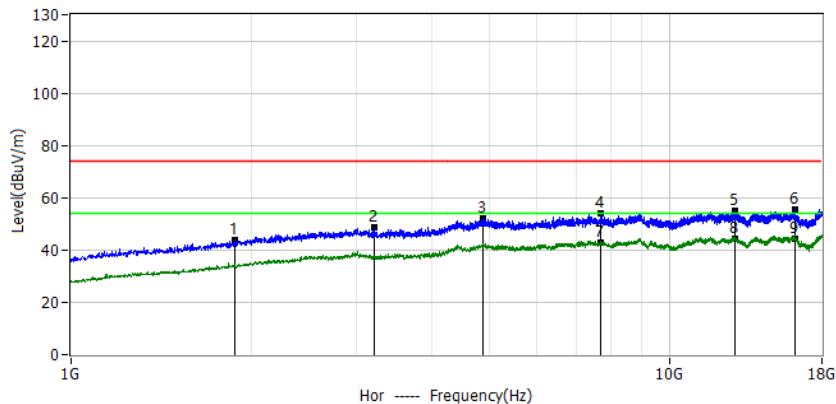


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1875.5000	60.18	-16.28	43.90	74.00	-30.10	PK	Hor
2*	3218.5000	56.78	-8.20	48.58	74.00	-25.42	PK	Hor
3*	4873.9000	57.81	-5.91	51.90	74.00	-22.10	PK	Hor
4*	7683.1000	61.49	-7.35	54.14	74.00	-19.86	PK	Hor
5*	12876.6000	59.76	-4.89	54.87	74.00	-19.13	PK	Hor
6*	16223.5000	59.74	-4.45	55.29	74.00	-18.71	PK	Hor
7*	7683.1000	50.25	-7.35	42.90	54.00	-11.10	AV	Hor
8*	12876.6000	49.29	-4.89	44.40	54.00	-9.60	AV	Hor
9*	16223.5000	48.75	-4.45	44.30	54.00	-9.70	AV	Hor



Project: LGT25G084	Test Engineer: LiuH
EUT: MYHIXEL Device III	Temperature: 22.8°C
M/N: MHX-PA-0015	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2025-08-18
Test Mode: BLE 2M 2440	
Note: Worst Case	

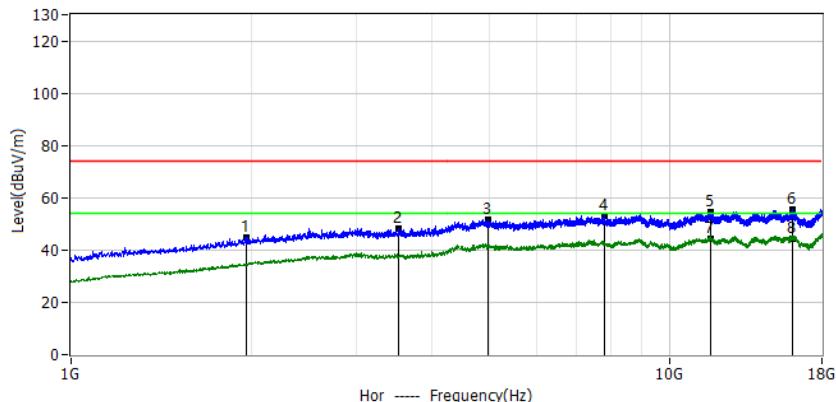


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1958.4000	59.98	-15.28	44.70	74.00	-29.30	PK	Hor
2*	3533.0000	56.23	-8.26	47.97	74.00	-26.03	PK	Hor
3*	4967.4000	57.65	-5.98	51.67	74.00	-22.33	PK	Hor
4*	7789.4000	60.56	-7.56	53.00	74.00	-21.00	PK	Hor
5*	11737.6000	59.55	-4.97	54.58	74.00	-19.42	PK	Hor
6*	16057.7000	59.31	-3.75	55.56	74.00	-18.44	PK	Hor
7*	11737.6000	49.37	-4.97	44.40	54.00	-9.60	AV	Hor
8*	16057.7000	47.95	-3.75	44.20	54.00	-9.80	AV	Hor

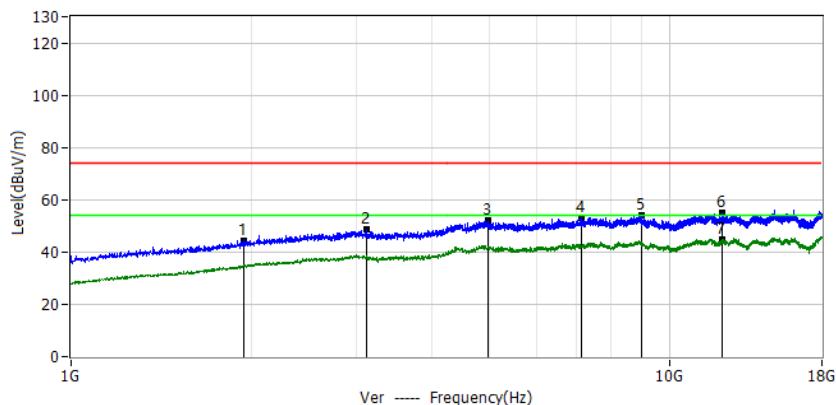


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1941.4000	60.03	-15.48	44.55	74.00	-29.45	PK	Ver
2*	3120.7000	57.03	-8.16	48.87	74.00	-25.13	PK	Ver
3*	4984.4000	57.89	-6.00	51.89	74.00	-22.11	PK	Ver
4*	7134.9000	60.25	-7.07	53.18	74.00	-20.82	PK	Ver
5*	9002.7000	60.88	-7.00	53.88	74.00	-20.12	PK	Ver
6*	12271.0000	59.76	-4.92	54.84	74.00	-19.16	PK	Ver
7*	12271.0000	49.52	-4.92	44.60	54.00	-9.40	AV	Ver



Project: LGT25G084	Test Engineer: LiuH
EUT: MYHIXEL Device III	Temperature: 22.8°C
M/N: MHX-PA-0015	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2025-08-18
Test Mode: BLE 2M 2480	
Note: Worst Case	

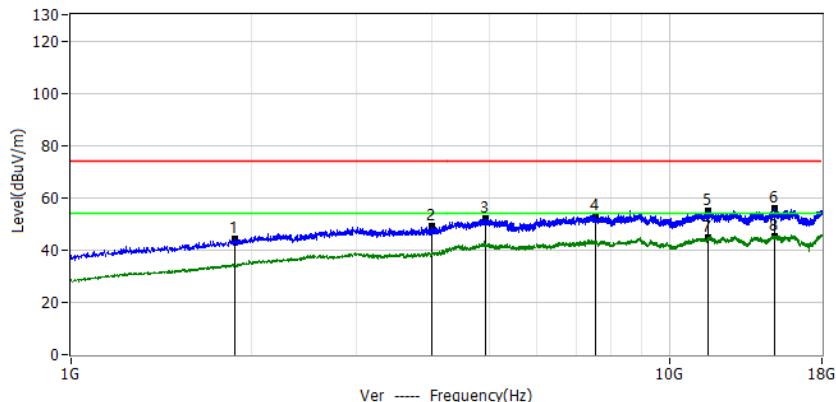

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1877.6000	60.55	-16.26	44.29	74.00	-29.71	PK	Ver
2*	4015.4000	56.89	-7.63	49.26	74.00	-24.74	PK	Ver
3*	4918.5000	58.11	-5.94	52.17	74.00	-21.83	PK	Ver
4*	7521.6000	60.33	-7.03	53.30	74.00	-20.70	PK	Ver
5*	11633.5000	60.05	-4.99	55.06	74.00	-18.94	PK	Ver
6*	15014.4000	59.64	-3.79	55.85	74.00	-18.15	PK	Ver
7*	11633.5000	49.59	-4.99	44.60	54.00	-9.40	AV	Ver
8*	15014.4000	48.89	-3.79	45.10	54.00	-8.90	AV	Ver

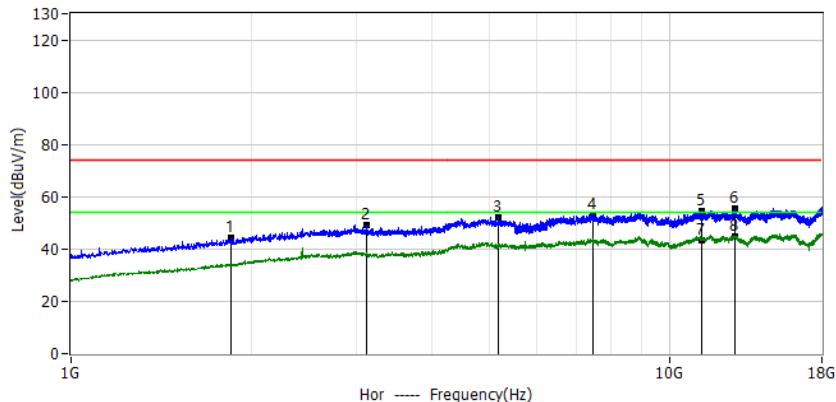

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1850.0000	61.04	-16.59	44.45	74.00	-29.55	PK	Hor
2*	3120.7000	57.56	-8.16	49.40	74.00	-24.60	PK	Hor
3*	5190.5000	58.77	-6.73	52.04	74.00	-21.96	PK	Hor
4*	7468.5000	60.22	-7.00	53.22	74.00	-20.78	PK	Hor
5*	11344.5000	59.76	-5.04	54.72	74.00	-19.28	PK	Hor
6*	12855.4000	60.49	-4.89	55.60	74.00	-18.40	PK	Hor
7*	11344.5000	48.34	-5.04	43.30	54.00	-10.70	AV	Hor
8*	12855.4000	49.59	-4.89	44.70	54.00	-9.30	AV	Hor

Remark:


In frequency ranges 18~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.




4.7 TEST RESULTS (Band edge Requirements)

Pre-test all modes, find the worst case in BLE 2M mode and record in this report.

Project: LGT25G084	Test Engineer: LiuH
EUT: MYHIXEL Device III	Temperature: 22.8°C
M/N: MHX-PA-0015	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2025-08-18
Test Mode: BLE 2M 2402	
Note: Worst Case	

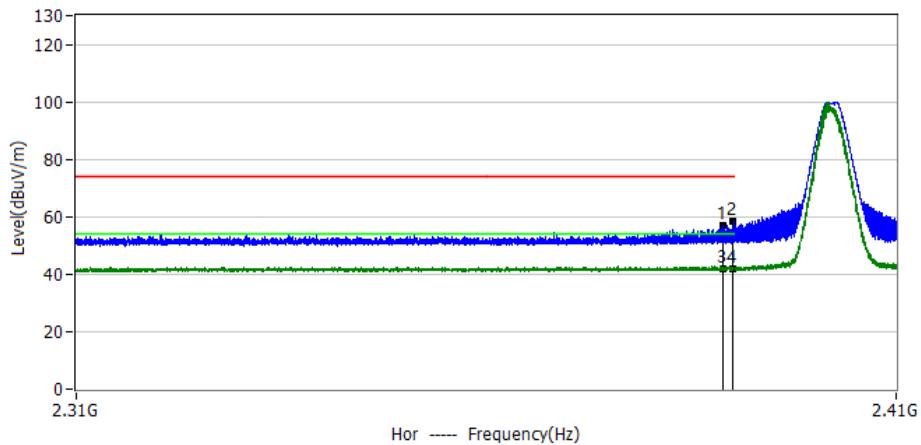


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2388.5000	20.57	36.45	57.02	74.00	-16.98	PK	Hor
2*	2390.0000	21.80	36.46	58.26	74.00	-15.74	PK	Hor
3*	2388.5000	5.25	36.45	41.70	54.00	-12.30	AV	Hor
4*	2390.0000	5.64	36.46	42.10	54.00	-11.90	AV	Hor

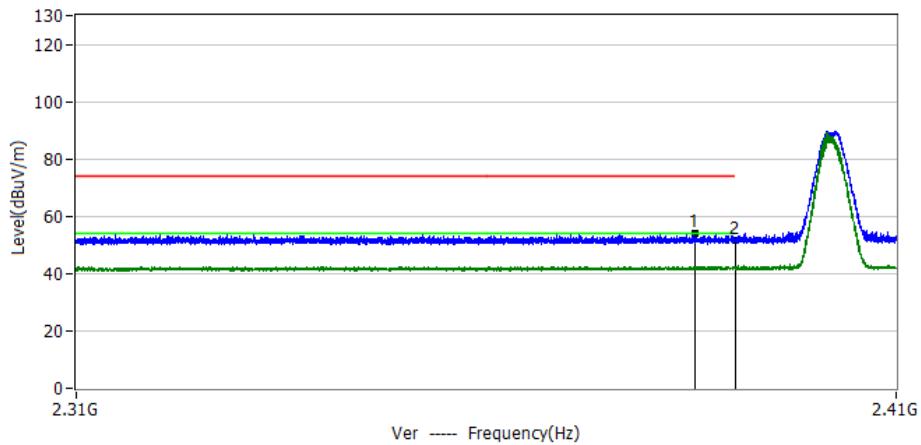


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2385.0000	17.49	36.43	53.92	74.00	-20.08	PK	Ver
2*	2390.0000	15.24	36.46	51.70	74.00	-22.30	PK	Ver



Project: LGT25G084	Test Engineer: LiuH
EUT: MYHIXEL Device III	Temperature: 22.8°C
M/N: MHX-PA-0015	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2025-08-18
Test Mode: BLE 2M 2480	
Note: Worst Case	

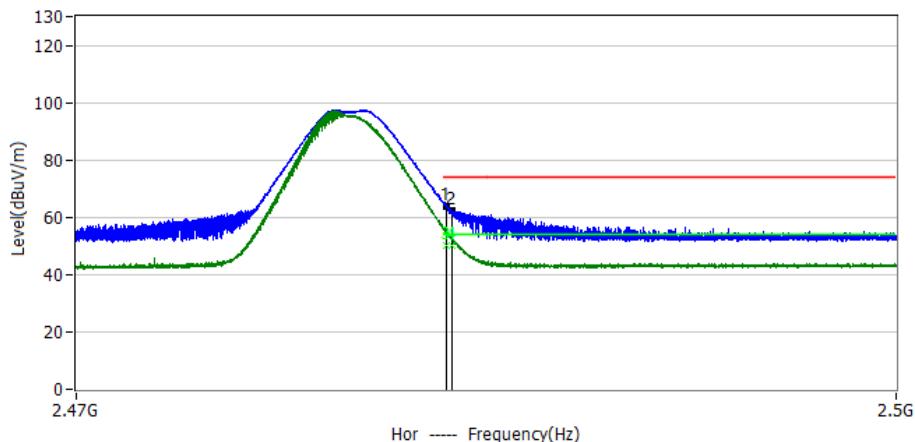

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	26.60	37.20	63.80	74.00	-10.20	PK	Hor
2*	2483.7000	25.15	37.20	62.35	74.00	-11.65	PK	Hor
3	2483.5000	12.79	37.20	49.99	54.00	-4.01	AV	Hor
4	2483.7000	12.72	37.20	49.92	54.00	-4.08	AV	Hor

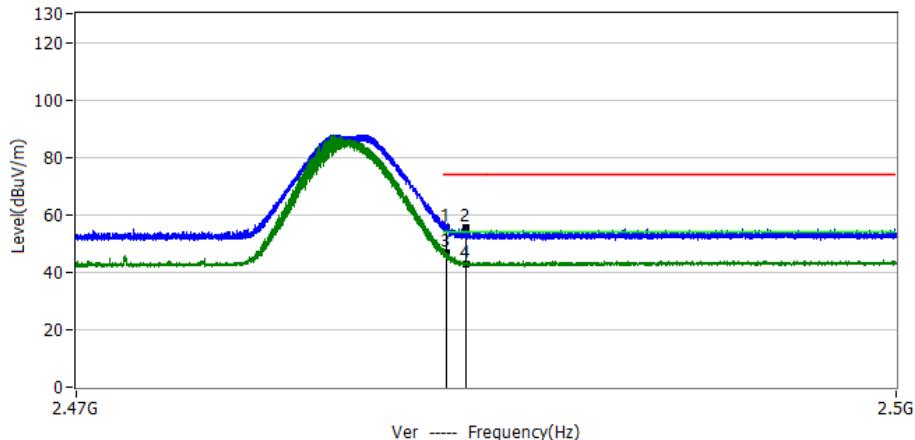

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	18.50	37.20	55.70	74.00	-18.30	PK	Ver
2*	2484.2000	18.20	37.21	55.41	74.00	-18.59	PK	Ver
3*	2483.5000	9.50	37.20	46.70	54.00	-7.30	AV	Ver
4*	2484.2000	5.60	37.20	42.80	54.00	-11.20	AV	Ver

Remark: Average measurement was not performed if peak level lower than average limit. No any other emissions level which are attenuated less than 20dB below the limit. The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.



5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

5.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

5.5 TEST RESULTS

For the measurement records, refer to the appendix I.

Note: Not recorded emission from 9 KHz to 30 MHz as emission level at least 20dBc lower than emission limit.



6. POWER SPECTRAL DENSITY TEST

6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8 \text{ dBm}$ (RBW $\geq 3 \text{ kHz}$)	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

6.5 TEST RESULTS

For the measurement records, refer to the appendix I.



7. BANDWIDTH TEST

7.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, $VBW \geq 3RBW$, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

7.5 TEST RESULTS

For the measurement records, refer to the appendix I.



8. PEAK OUTPUT POWER TEST

8.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW \geq DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW \geq [3 \times RBW].
- c) Set span \geq [3 \times RBW].
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the


DTS bandwidth:

- a) Set the RBW = 1 MHz.
- b) Set the VBW \geq [3 \times RBW].
- c) Set the span \geq [1.5 \times DTS bandwidth].
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

PKPM1 Peak power sensor method:

The maximum peak conducted output power may be measured using a broadband peak RF power sensor. The power sensor shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

8.3 TEST SETUP

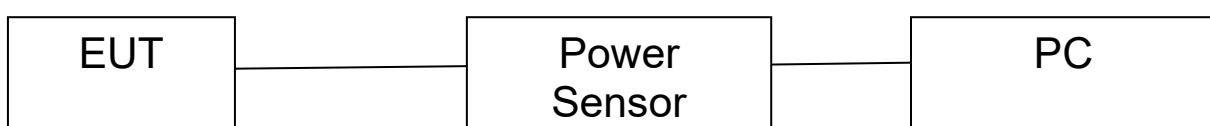

8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

8.5 TEST RESULTS

For the measurement records, refer to the appendix I.



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.




APPENDIX I - TEST RESULTS

Duty Cycle


Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.390	0.625	62.40	2.05	4.99
		2440	0.389	0.625	62.24	2.06	0.02
		2480	0.388	0.625	62.08	2.07	0.02
2M	SISO	2402	0.244	0.625	39.04	4.08	0.00
		2440	0.244	0.625	39.04	4.08	0.05
		2480	0.244	0.625	39.04	4.08	0.00




1M_LCH_2402MHz_NTNV

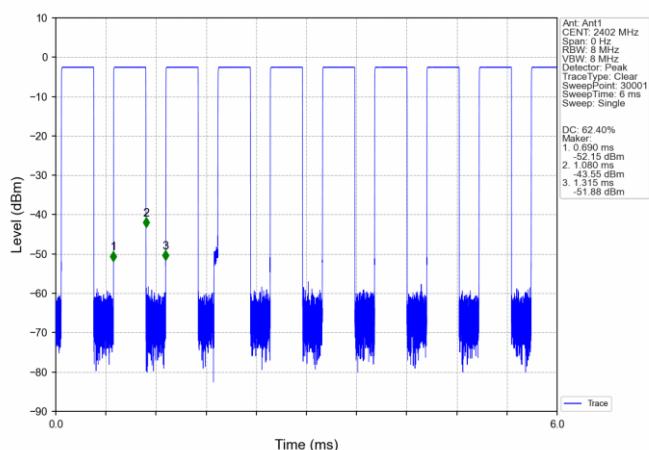

1M_MCH_2440MHz_NTNV

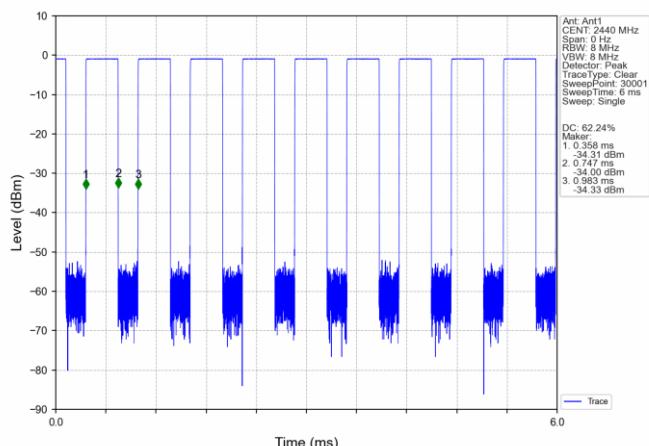


1M_HCH_2480MHz_NTNV

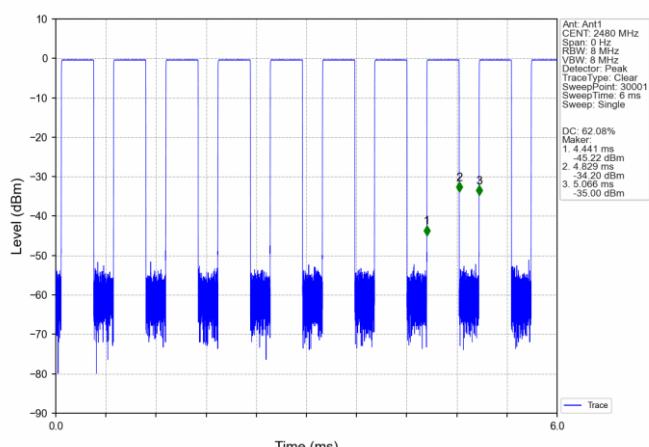





2M_LCH_2402MHz_NTNV

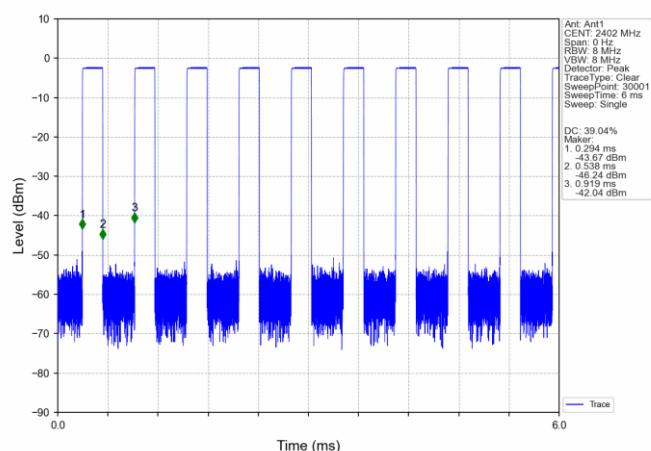

2M_MCH_2440MHz_NTNV

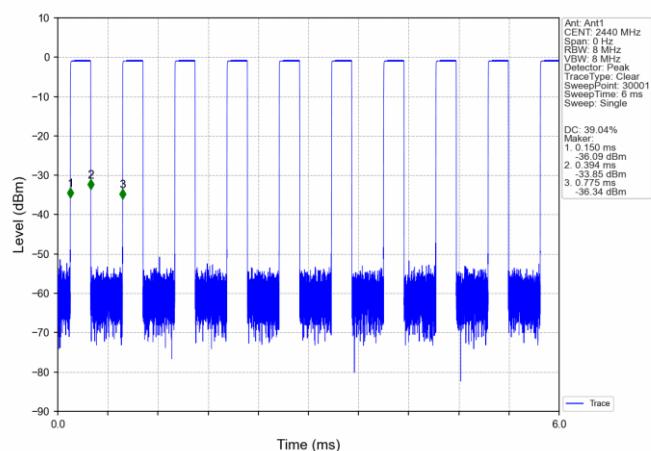

2M_HCH_2480MHz_NTNV

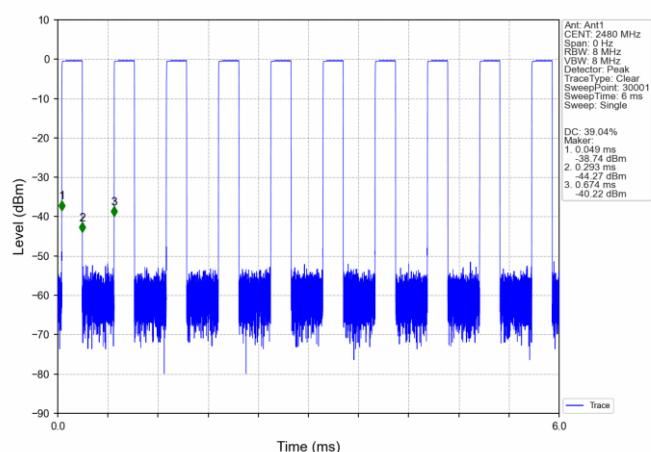



Maximum Peak Conducted Output Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-2.55	<=30	Pass
		2440	-0.90	<=30	Pass
		2480	-0.39	<=30	Pass
2M	SISO	2402	-2.40	<=30	Pass
		2440	-0.86	<=30	Pass
		2480	-0.39	<=30	Pass




-6dB Bandwidth


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.779	>=0.5	Pass
		2440	1	0.781	>=0.5	Pass
		2480	1	0.766	>=0.5	Pass
2M	SISO	2402	1	1.249	>=0.5	Pass
		2440	1	1.246	>=0.5	Pass
		2480	1	1.245	>=0.5	Pass




1M_LCH_2402MHz_NTNV

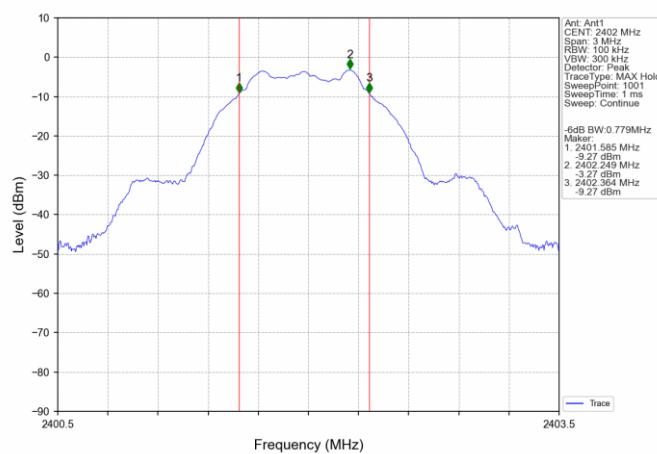

1M_MCH_2440MHz_NTNV

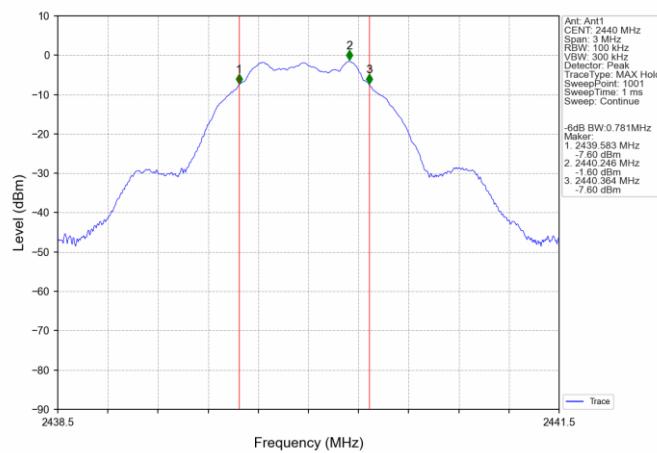


1M_HCH_2480MHz_NTNV

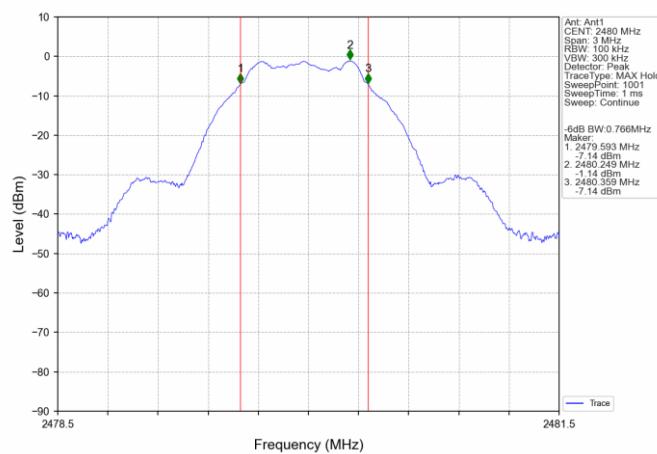





2M_LCH_2402MHz_NTNV

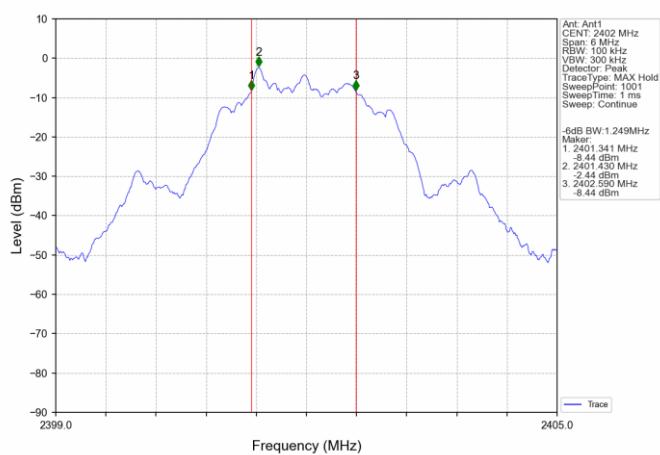

2M_MCH_2440MHz_NTNV

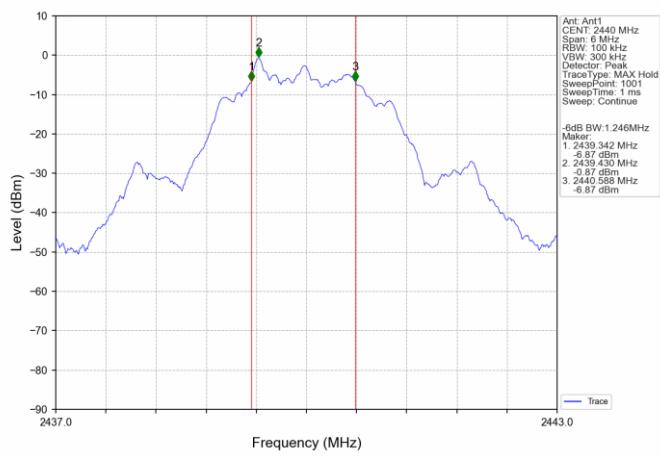

2M_HCH_2480MHz_NTNV

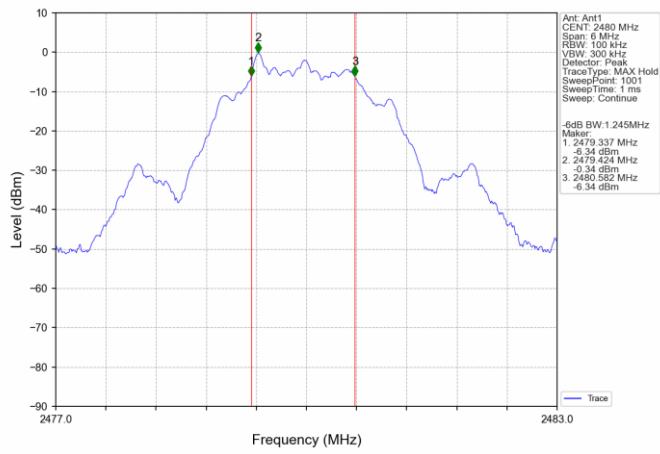




Occupied Channel Bandwidth


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.091	/	Pass
		2440	1	1.090	/	Pass
		2480	1	1.049	/	Pass
2M	SISO	2402	1	2.224	/	Pass
		2440	1	2.222	/	Pass
		2480	1	2.144	/	Pass




1M_LCH_2402MHz_NTNV

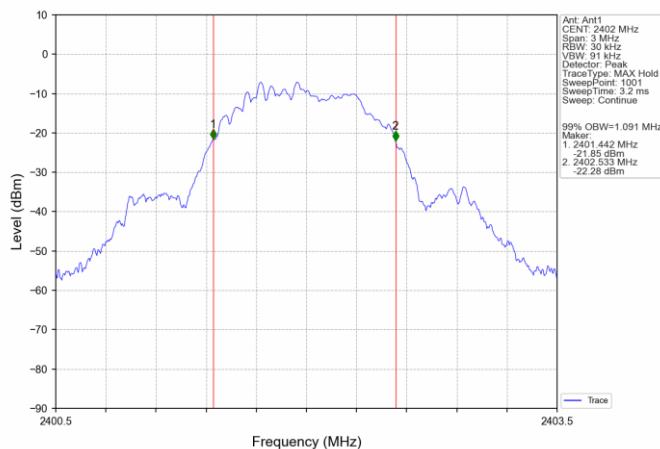

1M_MCH_2440MHz_NTNV

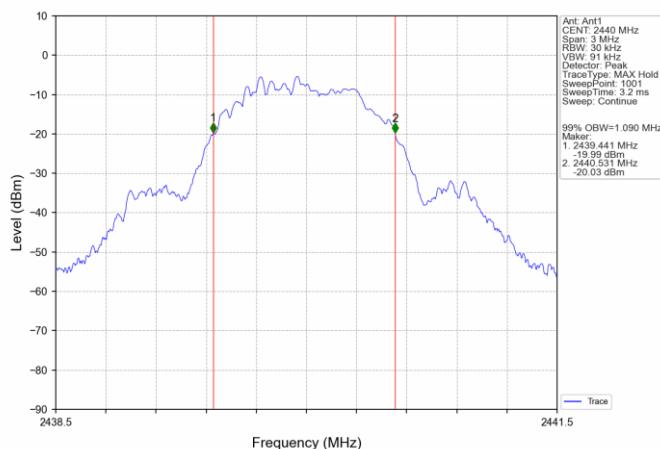


1M_HCH_2480MHz_NTNV

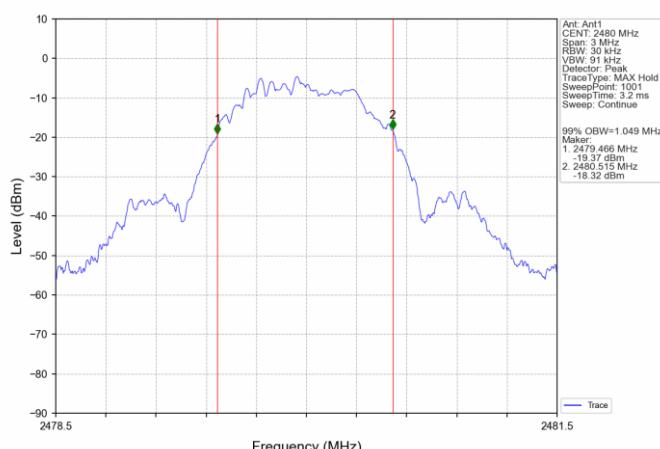





2M_LCH_2402MHz_NTNV

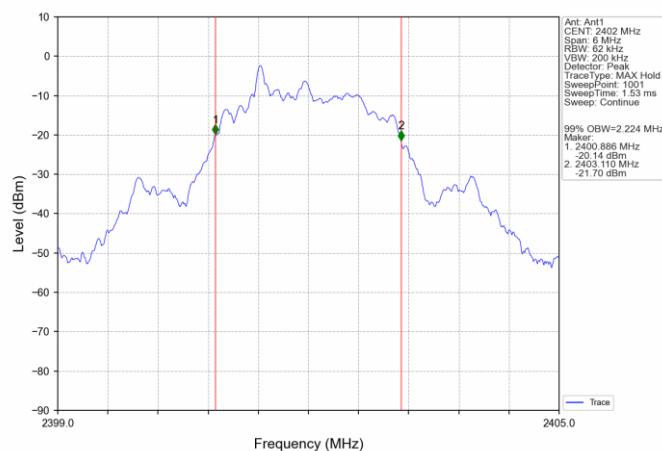

2M_MCH_2440MHz_NTNV

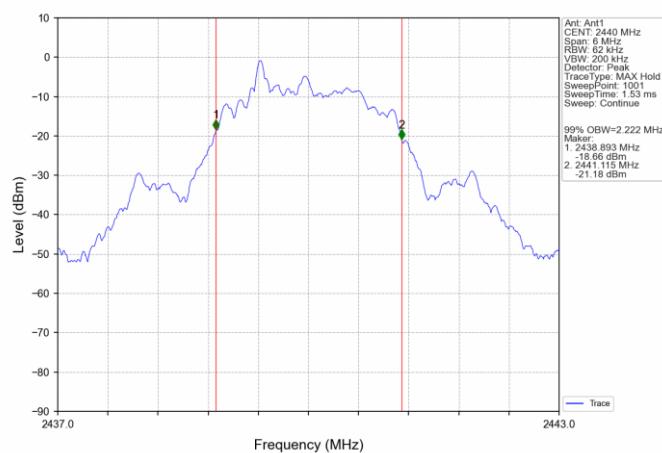

2M_HCH_2480MHz_NTNV

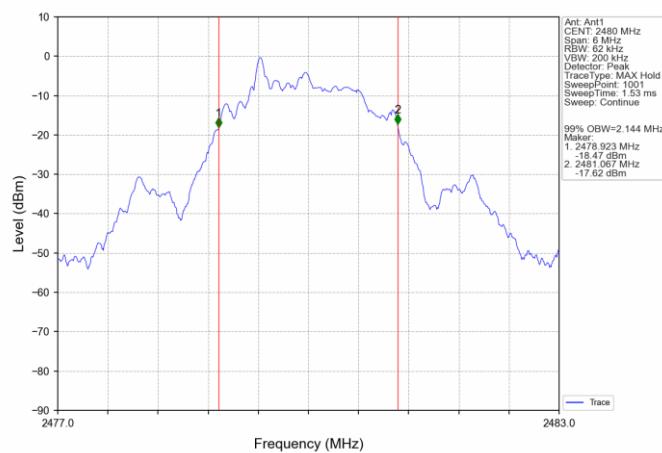




Maximum Power Spectral Density Level


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-17.72	<=8	Pass
		2440	-15.89	<=8	Pass
		2480	-14.93	<=8	Pass
2M	SISO	2402	-15.80	<=8	Pass
		2440	-14.23	<=8	Pass
		2480	-13.66	<=8	Pass




1M_LCH_2402MHz_NTNV

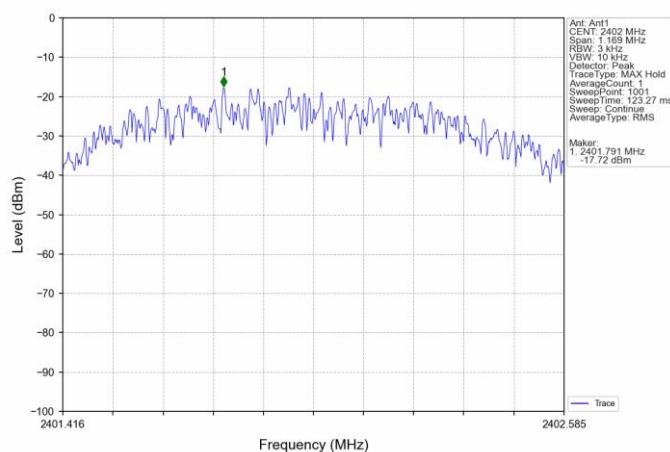

1M_MCH_2440MHz_NTNV

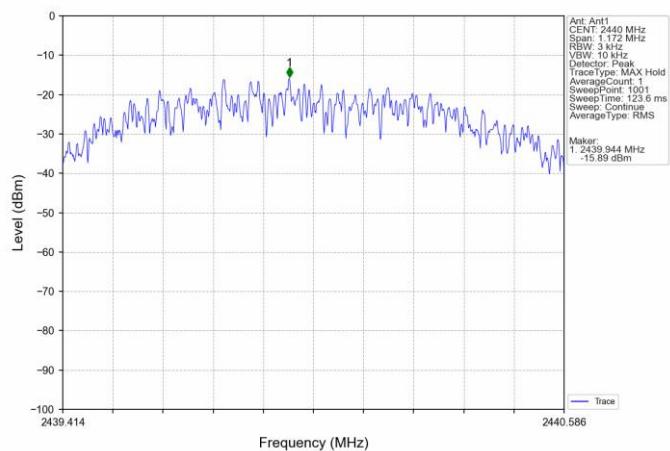


1M_HCH_2480MHz_NTNV

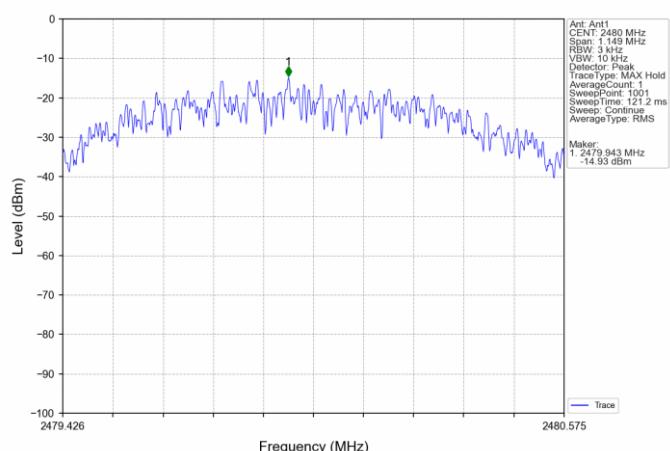





2M_LCH_2402MHz_NTNV

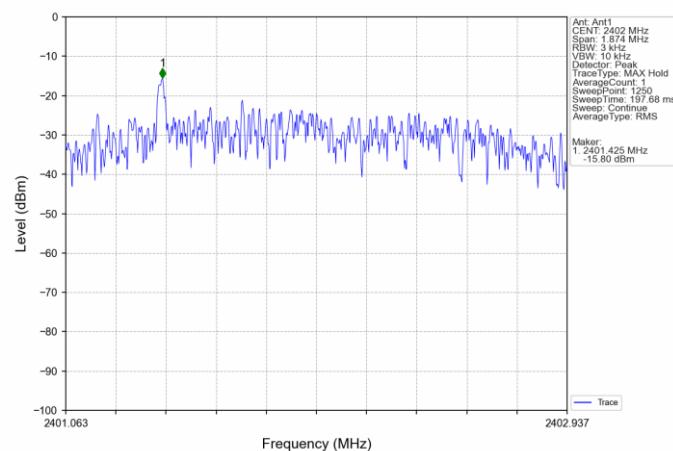

2M_MCH_2440MHz_NTNV

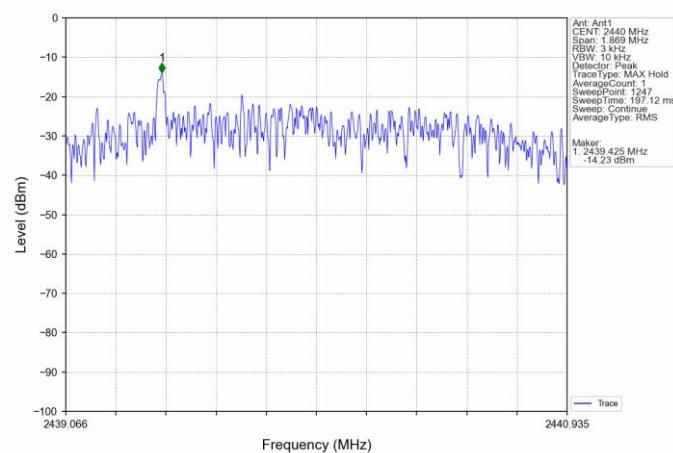

2M_HCH_2480MHz_NTNV

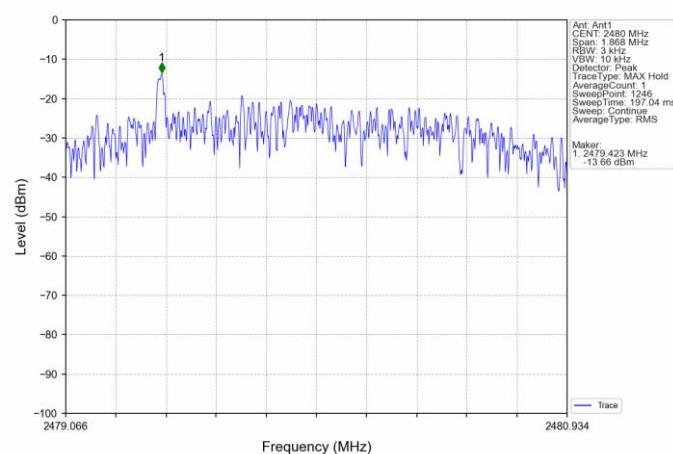



Band Edge & Conducted RF Spurious Emission

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-3.24
		2440	1	-1.63
		2480	1	-1.15
2M	SISO	2402	1	-2.44
		2440	1	-0.87
		2480	1	-0.34


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-3.24	-23.24	Pass
		2440	1	-1.63	-21.63	Pass
		2480	1	-1.15	-21.15	Pass
2M	SISO	2402	1	-2.44	-22.44	Pass
		2440	1	-0.87	-20.87	Pass
		2480	1	-0.34	-20.34	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.




1M_LCH_2402MHz_Ant1_NTNV

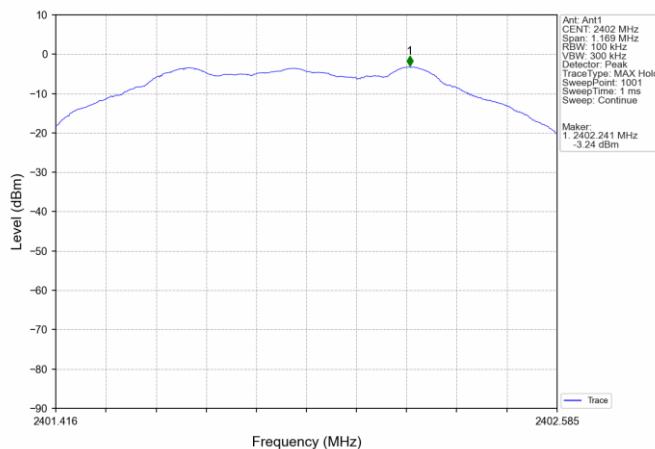

1M_MCH_2440MHz_Ant1_NTNV

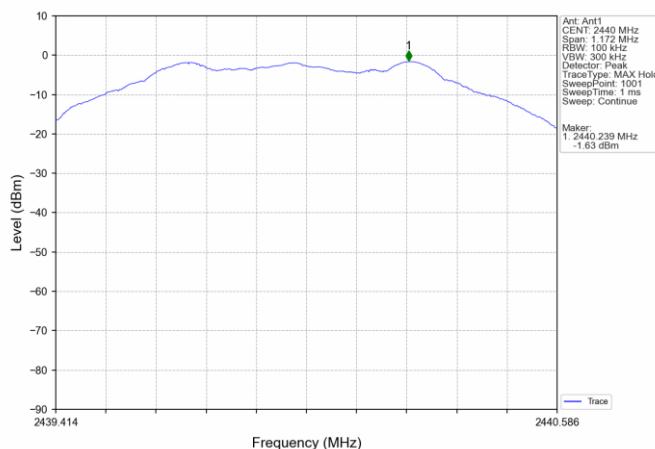


1M_HCH_2480MHz_Ant1_NTNV

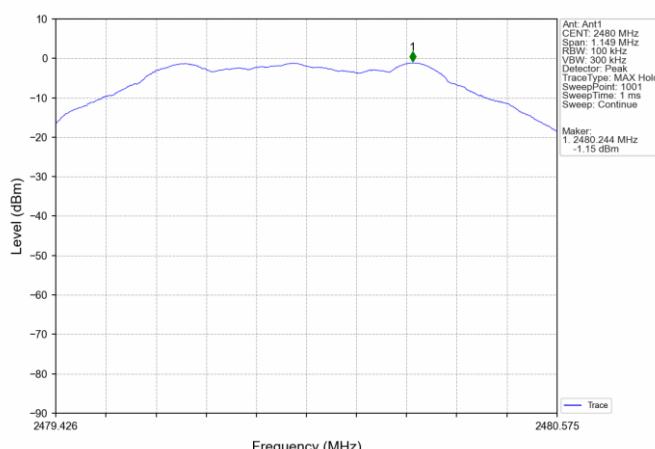





2M_LCH_2402MHz_Ant1_NTNV

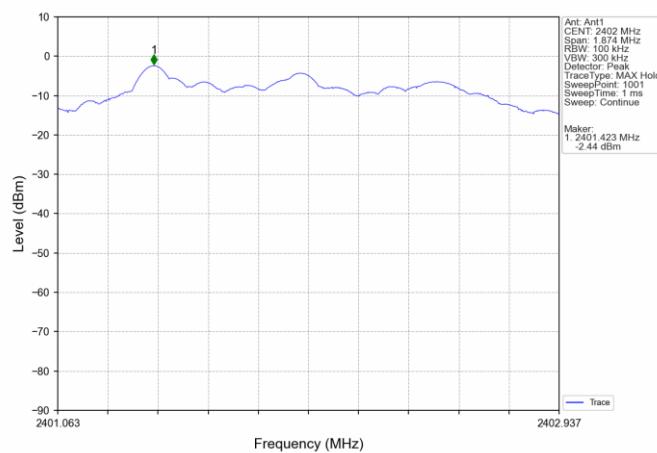

2M_MCH_2440MHz_Ant1_NTNV

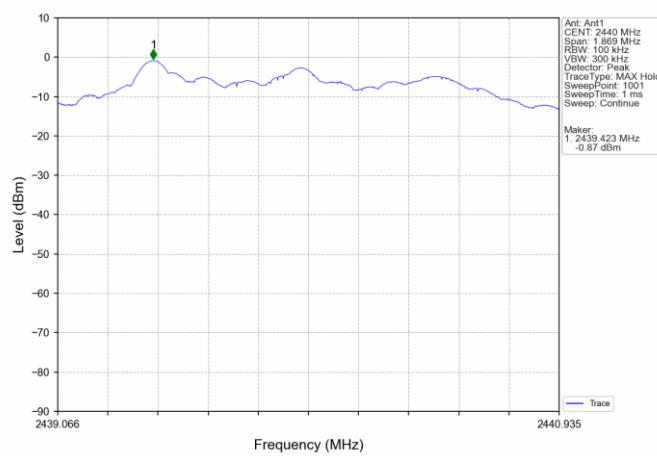


2M_HCH_2480MHz_Ant1_NTNV

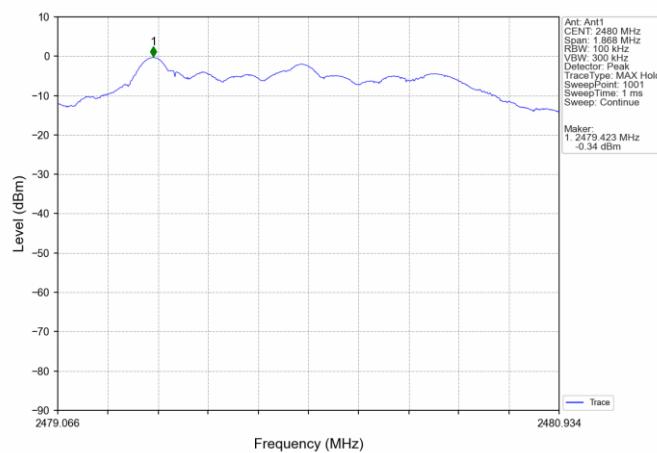




5.2.2 CSE


1M_LCH_2402MHz_Ant1_NTNV

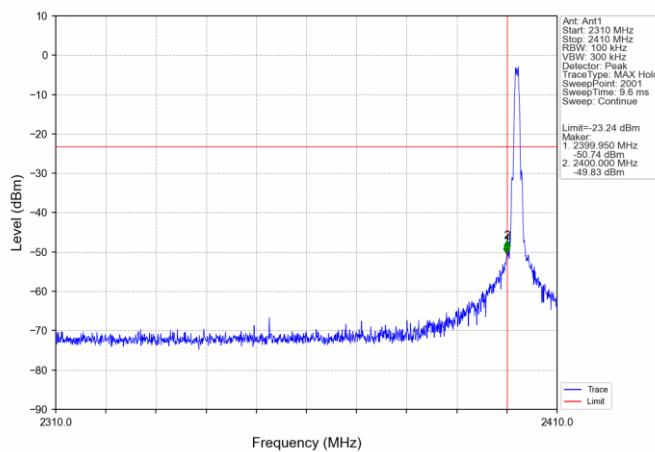

1M_LCH_2402MHz_Ant1_NTNV

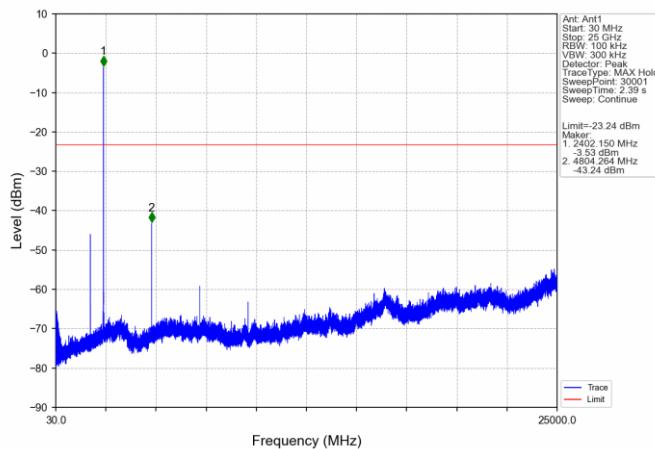


1M_MCH_2440MHz_Ant1_NTNV

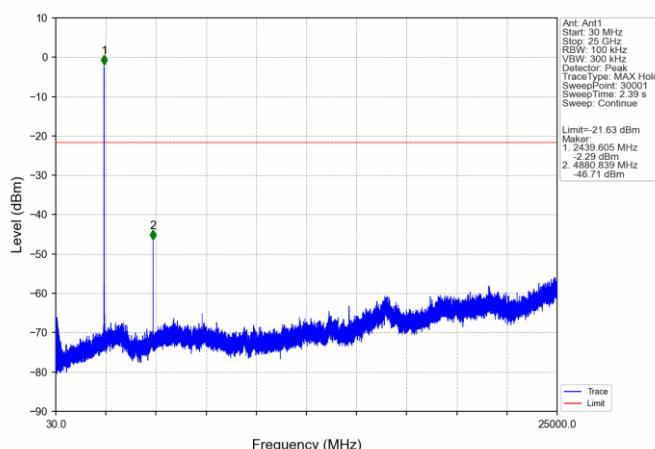




1M_HCH_2480MHz_Ant1_NTNV

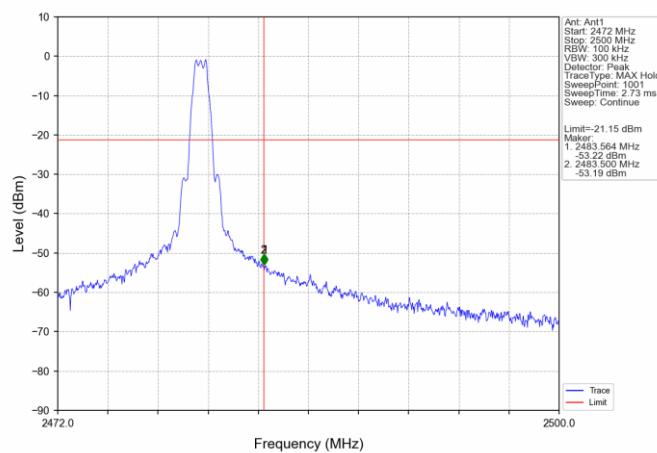


1M_HCH_2480MHz_Ant1_NTNV

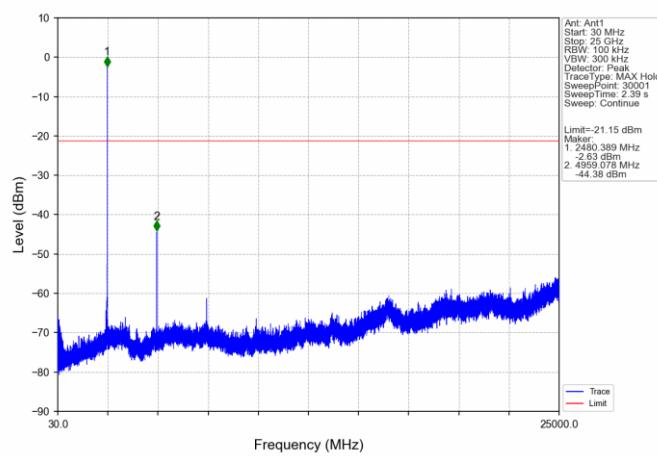





2M_LCH_2402MHz_Ant1_NTNV

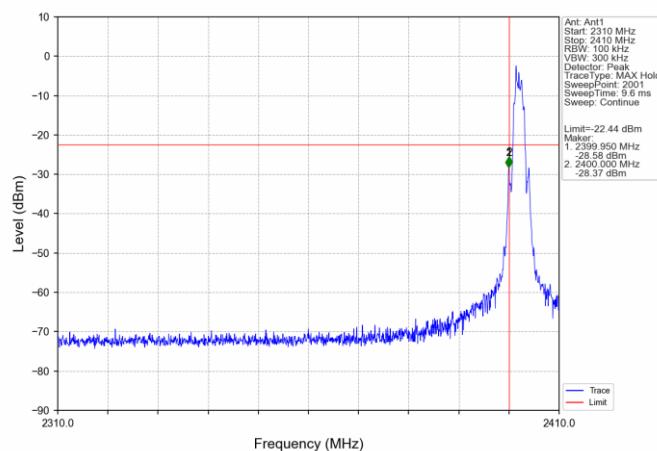

2M_LCH_2402MHz_Ant1_NTNV

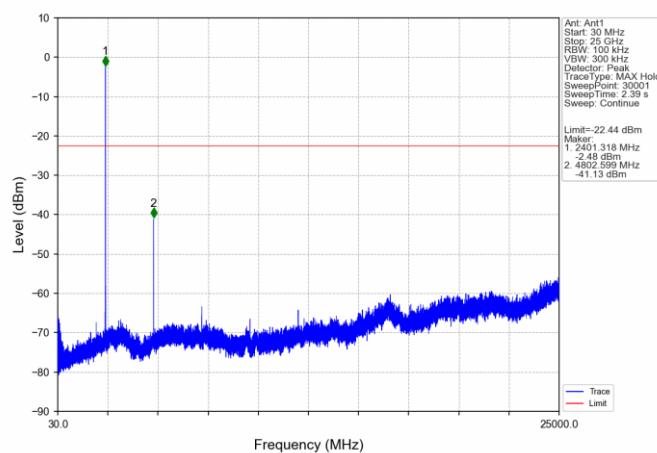


2M_MCH_2440MHz_Ant1_NTNV

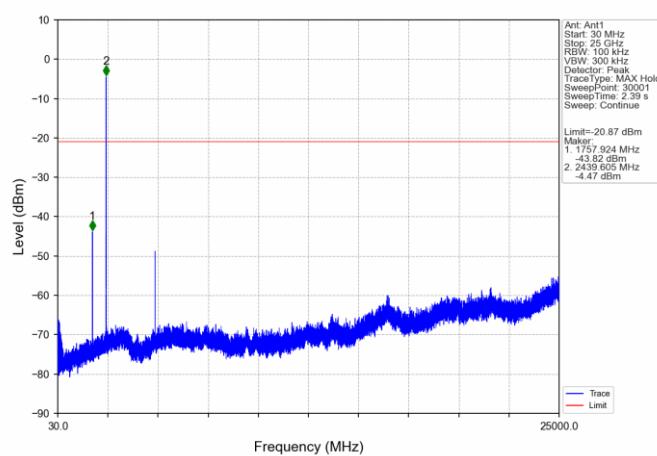




2M_HCH_2480MHz_Ant1_NTNV

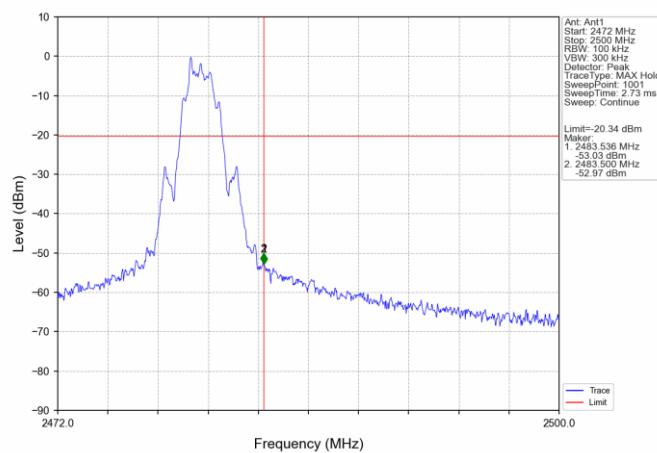

2M_HCH_2480MHz_Ant1_NTNV

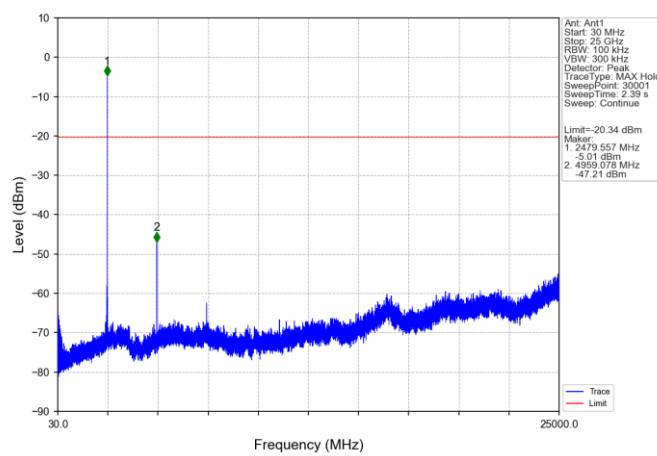



APPENDIX II - MEASUREMENT PHOTOS

Note: Please see the attached RF_Test Setup photos for FCC ID.

※※※※END OF THE REPORT※※※※