

ATC

TEST REPORT

Applicant Name : The Message On Hold Network of Canada Inc
Address : 1-525 Milner Avenue, Toronto, ON M1B 2K4 Canada
Report Number : RA221223-63561E-EM
FCC ID: 2A9Z8-USBA

Test Standard (s)

FCC PART 15B

Sample Description

Product Type: AR99 USB Headset
Model No.: AR99-USBA-MSD, AR99-USBA-MSS, AR99-USBA-UCS,
AR99-USBA-UCD, HBSS-USBA-UCS, HBSS-USBA-UCD,
HBSS-USBA-MSS, HBSS-USBA-MSD
Trade Mark: N/A
Date Received: 2022-12-23
Date of Test: 2022-12-27 to 2023-02-09
Report Date: 2023-02-13

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Lipa.Wu
EMC Engineer

Approved By:

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk ★.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk **. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF RADIATED TEST SETUP.....	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.107 – CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	11
FACTOR & OVER LIMIT CALCULATION.....	11
TEST DATA	11
FCC §15.109 - RADIATED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
FACTOR & OVER LIMIT CALCULATION.....	17
TEST DATA	17

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA221223-63561E-EM	Original Report	2023-02-13

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	AR99 USB Headset
Tested Model	AR99-USBA-MSD, AR99-USBA-MSS
Multiple Model	AR99-USBA-UCS, AR99-USBA-UCD, HBSS-USBA-UCS, HBSS-USBA-UCD, HBSS-USBA-MSS, HBSS-USBA-MSD
Model difference	Please refer to DOS letter.
Highest Operation Frequency	94MHz (It is provided by the applicant.)
Voltage Range	DC 5V
Sample number	RA221223-63561E-EM-S1 for AR99-USBA-MSD RA221223-63561E-EM-S2 for AR99-USBA-MSS (Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This report is in accordance with Part 2-Subpart J, and Part 15-Subparts A and B of the Federal Communication Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15, Class B device.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Uncertainty
AC Power Lines Conducted Emissions	2.72dB
Emissions, Radiated	9kHz - 30MHz
	30MHz - 1GHz
	1GHz - 18GHz
Temperature	1 °C
Humidity	6%
Supply voltages	0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Test mode 1: Voice Communication

Note: The device has two configurations: one speaker or two speakers, please refer to the EUT photo and Declaration letter for more detail. Both the two configurations samples were test and results record in report.

EUT Exercise Software

No exercise software.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

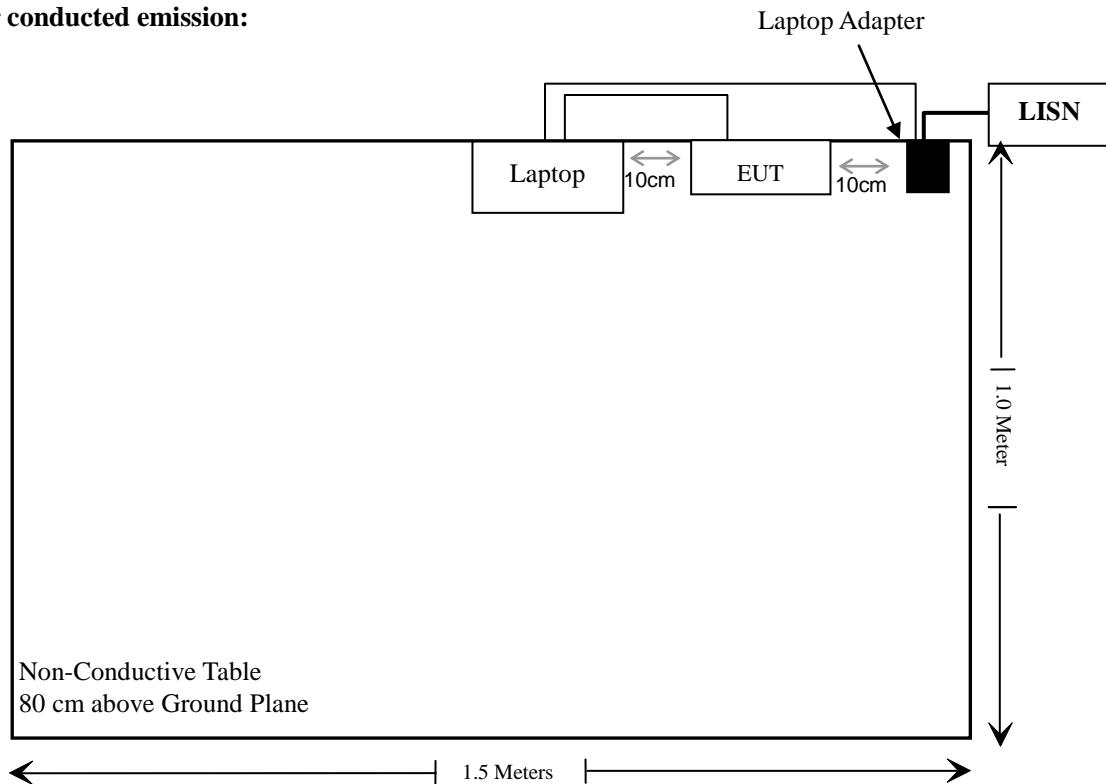
Manufacturer	Description	Model	Serial Number
DELL Inc	Laptop	Latitude E7450	Unknown
Unknown	Laptop Adapter	LA90PM111	Unknown

External I/O Cable

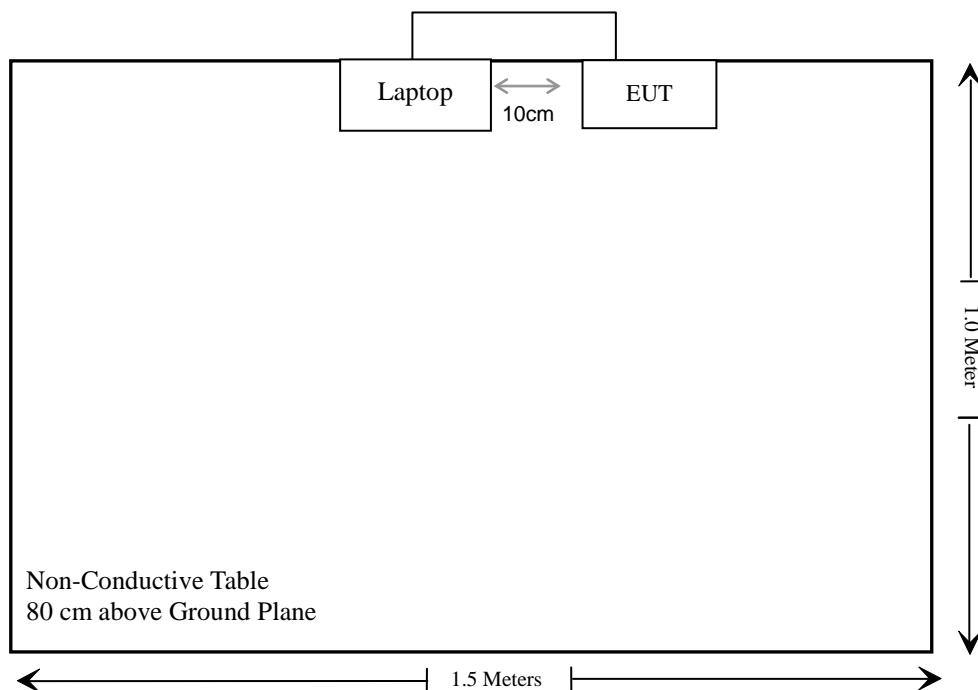
Cable Description	Length (m)	From Port	To Port
Un-shielding Un-Detachable USB Cable	1.65	Laptop	EUT
Un-shielding Un-Detachable AC Cable	1.2	Laptop Adapter	LISN
Un-shielding Un-Detachable DC Cable	1.45	Laptop Adapter	Laptop

Block Diagram of Radiated Test Setup

For conducted emission:



For Radiated emission:



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emission					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Radiated Emission Test Software: e3 19821b(V9)					

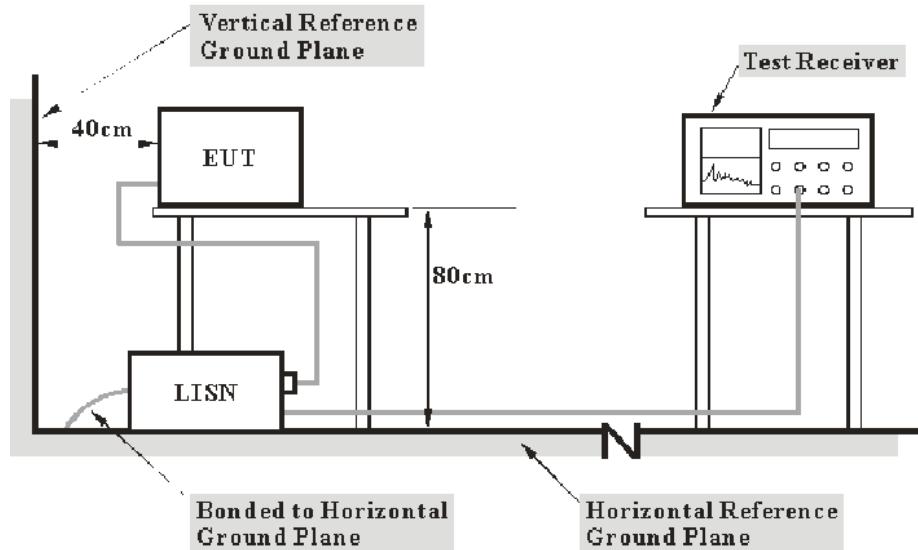
* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 – CONDUCTED EMISSIONS

Applicable Standard

According to FCC§15.107

EUT Setup



- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

Factor = LISN VDF + Cable Loss

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

Over Limit = Level – Limit

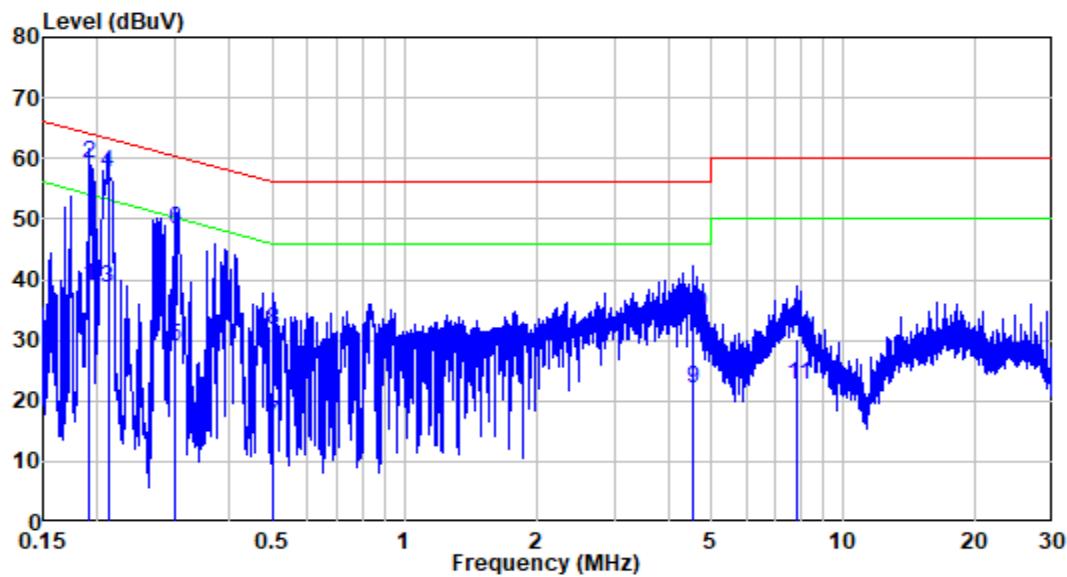
Level = Read Level + Factor

Test Data

Environmental Conditions

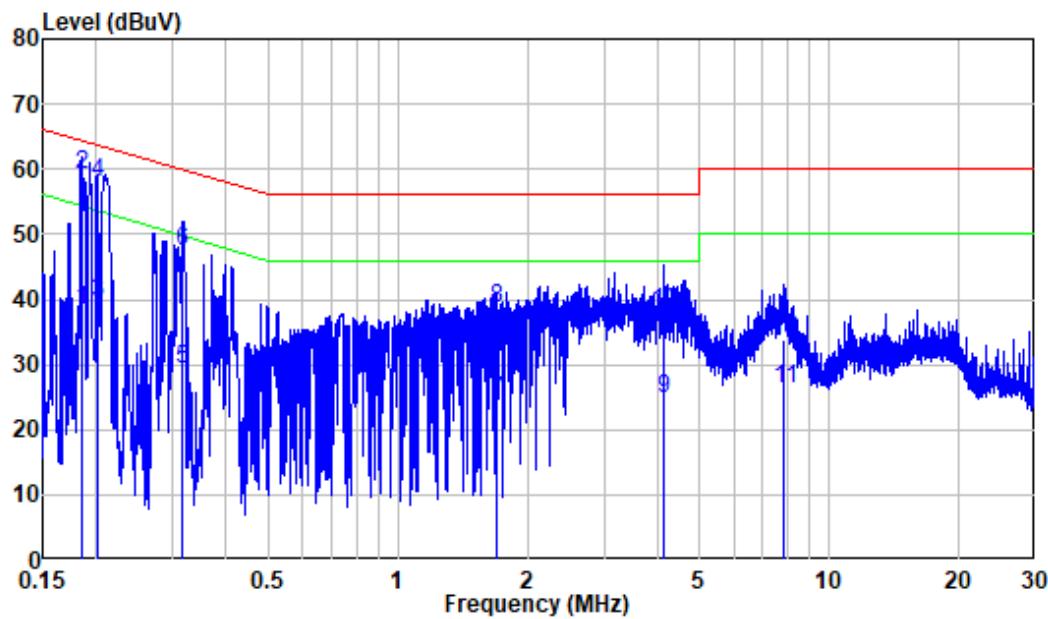
Temperature:	23 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Lipa Wu on 2023-02-09

Test Model: AR99-USBA-MSD**AC 120V/60Hz, Line:**

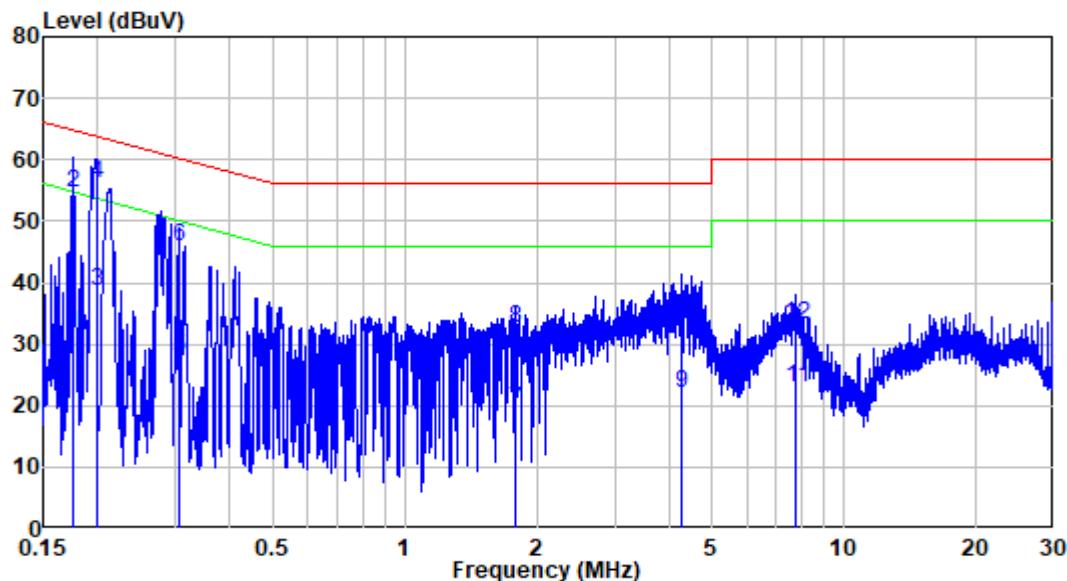
Site : Shielding Room
Condition: Line
Job No. : RA221223-63561E-EM
Test Mode: Test Mode 1
Model : AR99-USBA-MSD

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.191	9.90	28.95	38.85	53.99	-15.14	Average
2	0.191	9.90	49.22	59.12	63.99	-4.87	QP
3	0.211	9.89	28.61	38.50	53.17	-14.67	Average
4	0.211	9.89	47.92	57.81	63.17	-5.36	QP
5	0.300	9.86	19.04	28.90	50.25	-21.35	Average
6	0.300	9.86	38.30	48.16	60.25	-12.09	QP
7	0.503	9.80	6.50	16.30	46.00	-29.70	Average
8	0.503	9.80	21.87	31.67	56.00	-24.33	QP
9	4.543	9.95	12.02	21.97	46.00	-24.03	Average
10	4.543	9.95	24.43	34.38	56.00	-21.62	QP
11	7.857	9.98	12.59	22.57	50.00	-27.43	Average
12	7.857	9.98	20.17	30.15	60.00	-29.85	QP

AC 120V/60Hz, Neutral:

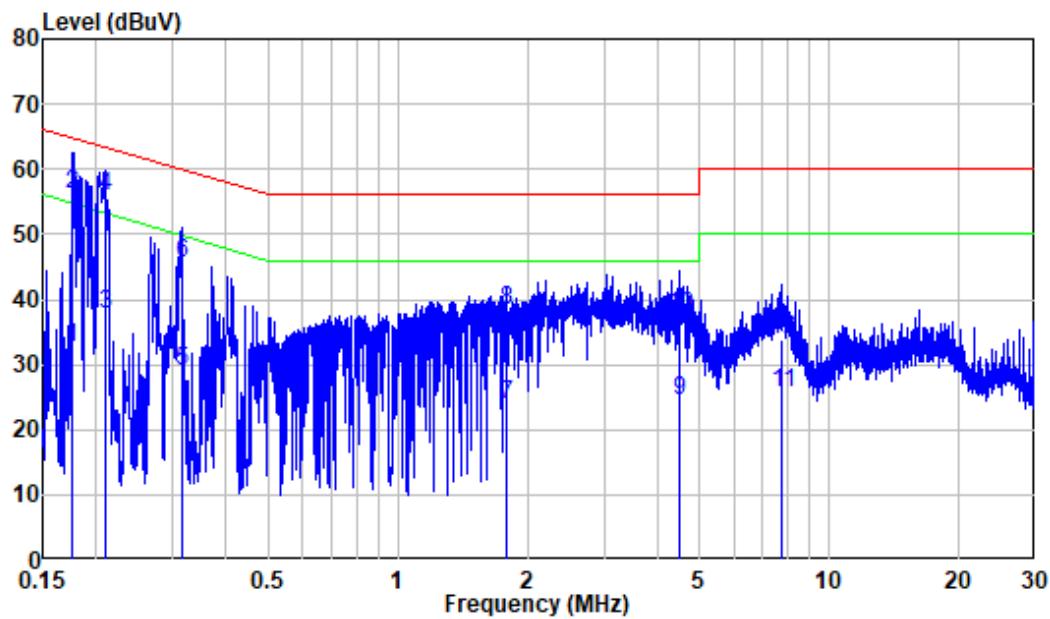
Site : Shielding Room
Condition: Neutral
Job No. : RA221223-63561E-EM
Test Mode: Test Mode 1
Model : AR99-USBA-MSD

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB	dBuV	dBuV	Line	
1	0.185	9.80	28.47	38.27	54.28	-16.01	Average
2	0.185	9.80	49.49	59.29	64.28	-4.99	QP
3	0.200	9.80	29.67	39.47	53.59	-14.12	Average
4	0.200	9.80	48.24	58.04	63.59	-5.55	QP
5	0.317	9.85	19.54	29.39	49.77	-20.38	Average
6	0.317	9.85	37.45	47.30	59.77	-12.47	QP
7	1.688	9.82	14.68	24.50	46.00	-21.50	Average
8	1.688	9.82	28.81	38.63	56.00	-17.37	QP
9	4.133	9.85	14.86	24.71	46.00	-21.29	Average
10	4.133	9.85	28.24	38.09	56.00	-17.91	QP
11	7.852	10.05	16.10	26.15	50.00	-23.85	Average
12	7.852	10.05	23.73	33.78	60.00	-26.22	QP

Test Model: AR99-USBA-MSS**AC 120V/60Hz, Line:**

Site : Shielding Room
Condition: Line
Job No. : RA221223-63561E-EM
Test Mode: Test Mode 1
Model : AR99-USBA-MSS

Freq	Factor	Read		Limit	Over	Remark	
		MHz	dB	Level	Level	Line	Limit
1	0.175	9.90	21.88	31.78	54.70	-22.92	Average
2	0.175	9.90	44.71	54.61	64.70	-10.09	QP
3	0.200	9.90	28.67	38.57	53.62	-15.05	Average
4	0.200	9.90	46.36	56.26	63.62	-7.36	QP
5	0.306	9.85	17.91	27.76	50.08	-22.32	Average
6	0.306	9.85	36.03	45.88	60.08	-14.20	QP
7	1.780	9.90	9.56	19.46	46.00	-26.54	Average
8	1.780	9.90	22.73	32.63	56.00	-23.37	QP
9	4.278	9.94	12.00	21.94	46.00	-24.06	Average
10	4.278	9.94	24.61	34.55	56.00	-21.45	QP
11	7.784	9.98	12.81	22.79	50.00	-27.21	Average
12	7.784	9.98	23.25	33.23	60.00	-26.77	QP

AC 120V/60Hz, Neutral:

Site : Shielding Room
Condition: Neutral
Job No. : RA221223-63561E-EM
Test Mode: Test Mode 1
Model : AR99-USBA-MSS

Freq	Factor	Read		Limit Line	Over Limit	Remark
		MHz	dB	dBuV	dBuV	
1	0.176	9.80	22.85	32.65	54.65	-22.00 Average
2	0.176	9.80	46.24	56.04	64.65	-8.61 QP
3	0.209	9.80	28.08	37.88	53.24	-15.36 Average
4	0.209	9.80	45.94	55.74	63.24	-7.50 QP
5	0.315	9.85	19.27	29.12	49.84	-20.72 Average
6	0.315	9.85	35.84	45.69	59.84	-14.15 QP
7	1.788	9.82	14.01	23.83	46.00	-22.17 Average
8	1.788	9.82	28.52	38.34	56.00	-17.66 QP
9	4.507	9.88	14.51	24.39	46.00	-21.61 Average
10	4.507	9.88	27.46	37.34	56.00	-18.66 QP
11	7.784	10.05	15.50	25.55	50.00	-24.45 Average
12	7.784	10.05	23.69	33.74	60.00	-26.26 QP

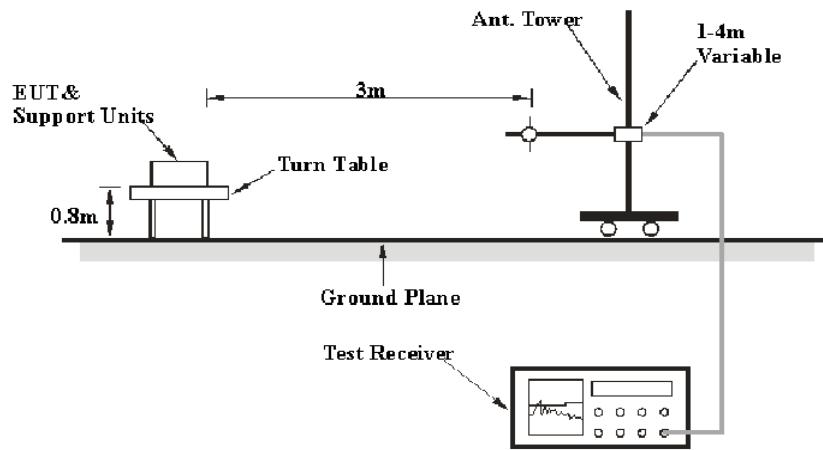
FCC §15.109 - RADIATED EMISSIONS

Applicable Standard

FCC §15.109

EUT Setup

Below 1GHz:



The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 1GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Factor & Over Limit Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Reading} + \text{Factor}$$

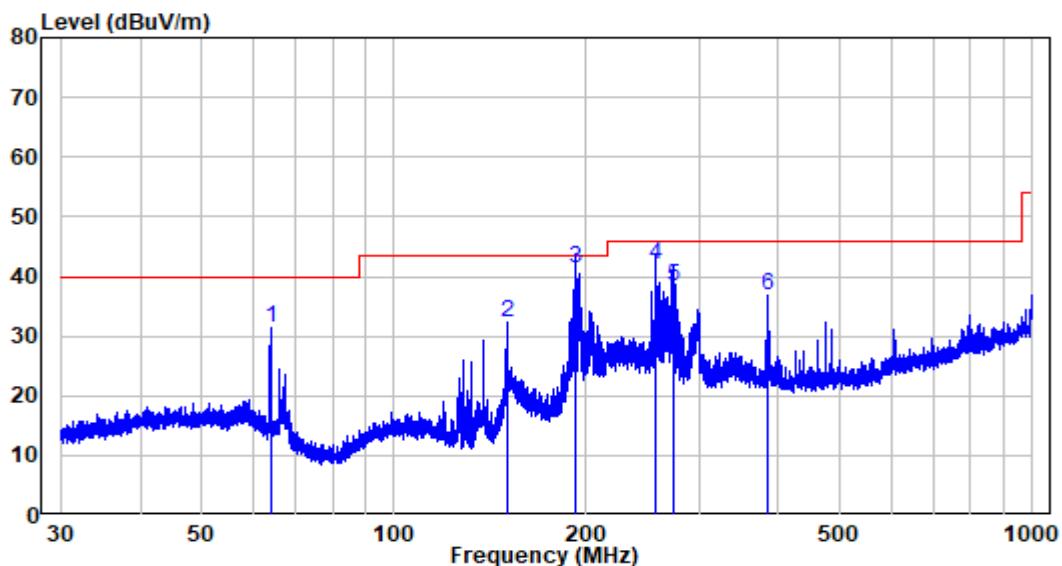
Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55-56 %
ATM Pressure:	101.0 kPa

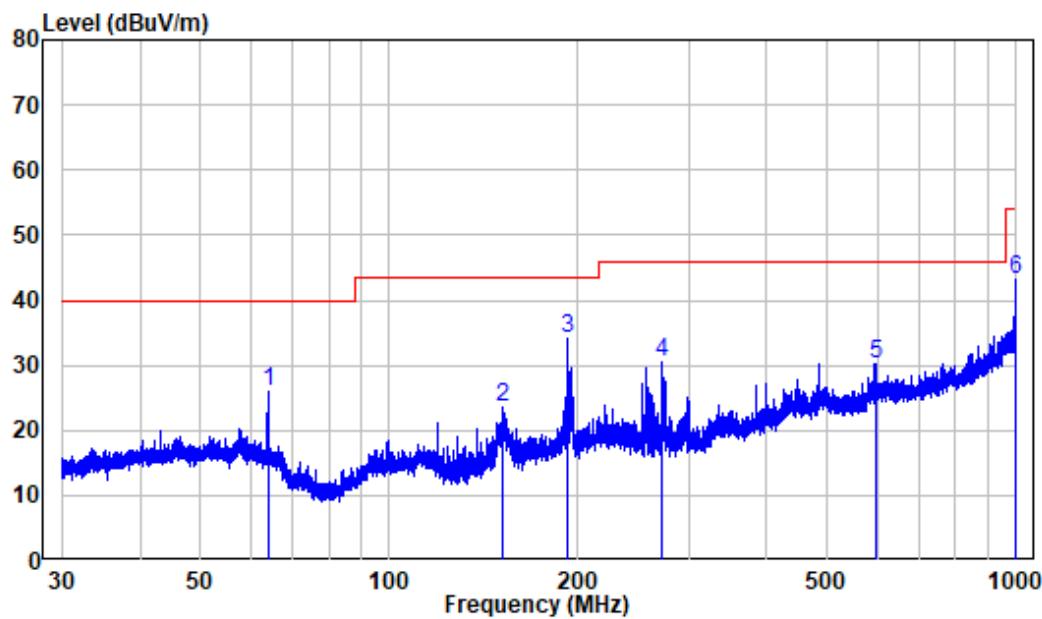
The testing was performed by Jason Liu from 2022-12-27 to 2022-12-28.

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case of orientation was photo and recorded.

30MHz-1GHz:**Test Model: AR99-USBA-MSD****Horizontal:**

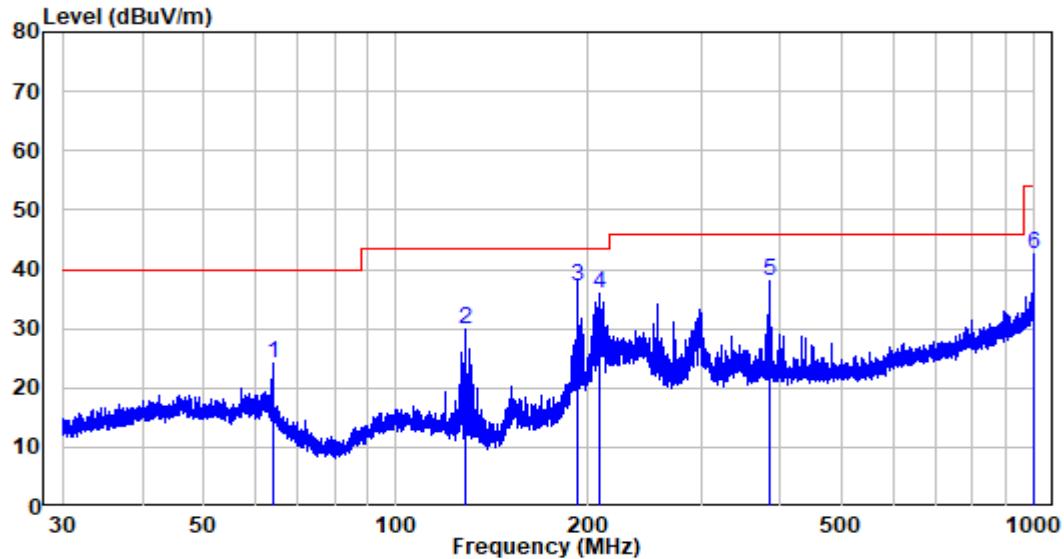
Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA221223-63561E-EM
Test Mode: Test Mode 1
Model : AR99-USBA-MSD

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	63.983	-12.14	43.41	31.27	40.00	-8.73	Peak
2	150.011	-15.27	47.53	32.26	43.50	-11.24	Peak
3	191.997	-11.25	52.50	41.25	43.50	-2.25	QP
4	257.197	-10.60	52.50	41.90	46.00	-4.10	QP
5	274.675	-9.93	48.20	38.27	46.00	-7.73	QP
6	384.100	-7.08	43.85	36.77	46.00	-9.23	Peak

Vertical

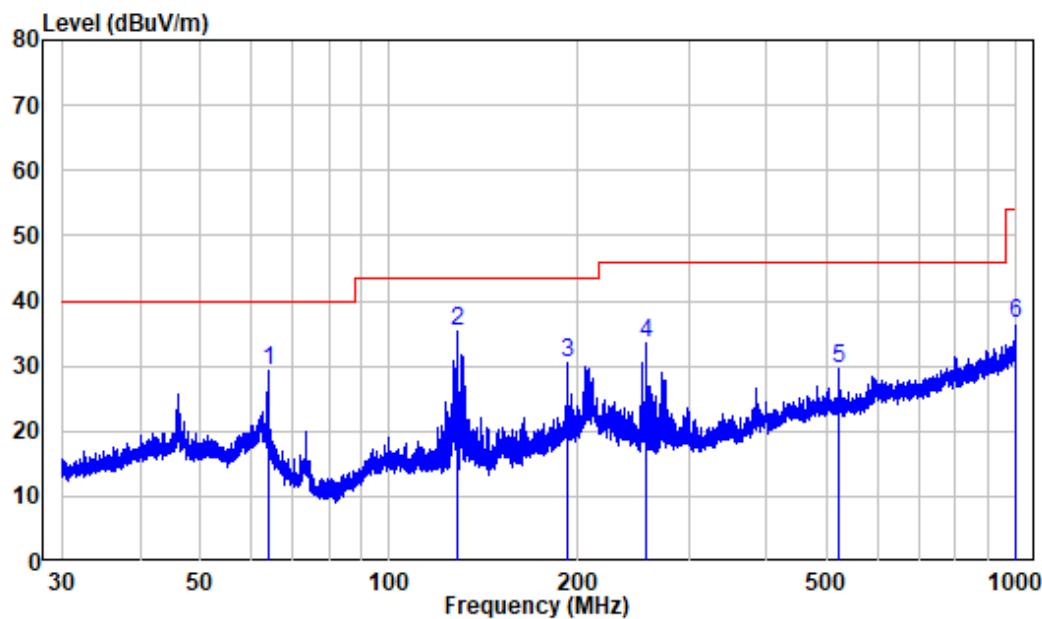
Site : chamber
Condition: 3m VERTICAL
Job No. : RA221223-63561E-EM
Test Mode: Test Mode 1
Model : AR99-USBA-MSD

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	64.011	-12.15	37.98	25.83	40.00	-14.17	Peak
2	151.996	-15.16	38.62	23.46	43.50	-20.04	Peak
3	191.997	-11.25	45.30	34.05	43.50	-9.45	Peak
4	272.278	-10.08	40.50	30.42	46.00	-15.58	Peak
5	595.916	-2.64	32.81	30.17	46.00	-15.83	Peak
6	997.374	2.97	40.17	43.14	54.00	-10.86	Peak

Test Model: AR99-USBA-MSS**Horizontal:**

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA221223-63561E-EM
Test Mode: Test Mode 1
Model : AR99-USBA-MSS

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	64.011	-12.15	36.19	24.04	40.00	-15.96	Peak
2	128.001	-14.70	44.69	29.99	43.50	-13.51	Peak
3	191.997	-11.25	48.40	37.15	43.50	-6.35	QP
4	207.668	-11.84	47.89	36.05	43.50	-7.45	Peak
5	384.100	-7.08	45.14	38.06	46.00	-7.94	Peak
6	997.374	2.97	39.69	42.66	54.00	-11.34	Peak

Vertical

Site : chamber
Condition: 3m VERTICAL
Job No. : RA221223-63561E-EM
Test Mode: Test Mode 1
Model : AR99-USBA-MSS

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	64.011	-12.15	41.29	29.14	40.00	-10.86	Peak
2	128.001	-14.70	50.10	35.40	43.50	-8.10	Peak
3	191.997	-11.25	41.59	30.34	43.50	-13.16	Peak
4	256.072	-10.61	44.15	33.54	46.00	-12.46	Peak
5	522.031	-4.32	33.82	29.50	46.00	-16.50	Peak
6	1000.000	3.02	33.41	36.43	54.00	-17.57	Peak

Note:

The other spurious emission which is in the noise floor level was not recorded.

For below 1GHz, If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform QP/Average measurement.

*****END OF REPORT*****