



FCC Test Report

Report No: FCS202409352W01

Issued for

Applicant:	BOSSCOMM TECH CORP
Address:	402, 4TH FLOOR, 401, BUILDING 27, XURI COMMUNITY, FUKANG COMMUNITY, LONGHUA STREET, LONGHUA DISTRICT, SHENZHEN, GUANGDONG, CHINA
Product Name:	Auto diagnostic scanner
Brand Name:	BOSSCOMM
Model Name:	i Touch 880
Series Model:	i Touch 810, i Touch 820, i Touch 830, i Touch 840, i Touch 850, i Touch 860, i Touch 870, i Touch 890, i Touch 899
FCC ID:	2A9ZS-ITOUCH880
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.FCS-lab.com	

TEST RESULT CERTIFICATION

Applicant's Name: BOSSCOMM TECH CORP
Address.....: 402, 4TH FLOOR, 401, BUILDING 27, XURI COMMUNITY,
FUKANG COMMUNITY, LONGHUA STREET, LONGHUA
DISTRICT, SHENZHEN, GUANGDONG, CHINA
Manufacture's Name: BOSSCOMM TECH CORP
Address.....: 402, 4TH FLOOR, 401, BUILDING 27, XURI COMMUNITY,
FUKANG COMMUNITY, LONGHUA STREET, LONGHUA
DISTRICT, SHENZHEN, GUANGDONG, CHINA

Product Description

Product Name: Auto diagnostic scanner
Brand Name.....: BOSSCOMM
Model Name.....: i Touch 880
Series Model: i Touch 810, i Touch 820, i Touch 830, i Touch 840,
i Touch 850, i Touch 860, i Touch 870, i Touch 890,
Test Standards: FCC Rules and Regulations Part 15 Subpart C, Section 247
Test Procedure: ANSI C63.10:2013

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document.

Date of Test.....:

Date (s) of performance of tests.: Sep.18, 2024 ~ Sep. 25, 2024

Date of Issue: Sep. 26, 2024

Test Result: Pass

Tested by

:

Scott Shen

(Scott Shen)

Reviewed by

:

Duke Qian

(Duke Qian)

Approved by

:

Jack Wang

(Jack Wang)



Table of Contents

1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	10
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.5 EQUIPMENTS LIST	12
3. EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 TEST PROCEDURE	14
3.3 TEST SETUP	14
3.4 EUT OPERATING CONDITIONS	14
3.5 TEST RESULTS	15
4. RADIATED EMISSION MEASUREMENT	17
4.1 RADIATED EMISSION LIMITS	17
4.2 TEST PROCEDURE	19
4.3 TEST SETUP	20
4.4 EUT OPERATING CONDITIONS	20
4.5 FIELD STRENGTH CALCULATION	21
4.6 TEST RESULTS	22
5. CONDUCTED SPURIOUS & BAND EDGE EMISSION	27
5.1 LIMIT	27
5.2 TEST PROCEDURE	27
5.3 TEST SETUP	27
5.4 EUT OPERATION CONDITIONS	27
5.5 TEST RESULTS	28
6. POWER SPECTRAL DENSITY TEST	29
6.1 LIMIT	29

Table of Contents

6.2 TEST PROCEDURE	29
6.3 TEST SETUP	29
6.4 EUT OPERATION CONDITIONS	29
6.5 TEST RESULTS	29
7. BANDWIDTH TEST	30
7.1 LIMIT	30
7.2 TEST PROCEDURE	30
7.3 TEST SETUP	30
7.4 EUT OPERATION CONDITIONS	30
7.5 TEST RESULTS	30
8. PEAK OUTPUT POWER TEST	31
8.1 LIMIT	31
8.2 TEST PROCEDURE	31
8.3 TEST SETUP	31
8.4 EUT OPERATION CONDITIONS	31
8.5 TEST RESULTS	32
9. ANTENNA REQUIREMENT	33
9.1 STANDARD REQUIREMENT	33
9.2 EUT ANTENNA	33
APPENDIX I:TEST RESULTS	34
CONDUCTED OUTPUT POWER	34
99% BANDWIDTH	35
6DB BANDWIDTH	37
CONDUCTED OUT OF BAND EMISSION	39
DUTY CYCLE	44
POWER SPECTRAL DENSITY	50

**Revision History**

Rev.	Issue Date	Contents
00	Sep. 26, 2024	Initial Issue

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2013.

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory		
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan		
Telephone:	+86-769-27280901		
Fax:	+86-769-27280901		
FCC Test Firm Registration Number: 514908			
Designation number: CN0127			
A2LA accreditation number: 5545.01			
ISED Number: 25801			
CAB ID : CN0097			
Organization FLUX COMPLIANCE SERVICE LABORATORY Baohao Technology Building 1 No. 15 Gongye West Road Hi-Tech Industrial Park Songshan Lake Dongguan, Guangdong. 523808 PRC. ISED#: 25801 Contact: Andy Yue andv-vue@fcs-lab.com	CAB identifier CN0097	Scope / Recognition Date (yyyy-mm-dd) RSS-102(RFExp) (2020-01-09) RSS-GEN (2020-01-09) RSS-210 (2020-01-09) RSS-247 (2020-01-09)	Expiration (yyyy-mm-dd) RECOGNIZED UNTIL: 2023-12-31 A2LA ISO/IEC 17025: 2017 Expires: 2023-12-31

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{ dB}$
3	Conducted Emission (9KHz-150KHz)	$\pm 4.13\text{ dB}$
4	All emissions radiated (9KHz -30MHz)	$\pm 3.1\text{ dB}$
5	Conducted Emission (150KHz-30MHz)	$\pm 4.74\text{ dB}$
6	All emissions,radiated(<1G) 30MHz-1000MHz	$\pm 5.2\text{ dB}$
7	All emissions,radiated 1GHz -18GHz	$\pm 4.66\text{ dB}$
8	All emissions,radiated 18GHz -40GHz	$\pm 4.31\text{ dB}$
9	PSD	$\pm 0.72\text{dB}$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Auto diagnostic scanner	
Trade Mark	BOSSCOMM	
Model Name	i Touch 880	
Series Model	i Touch 810, i Touch 820, i Touch 830, i Touch 840, i Touch 850, i Touch 860, i Touch 870, i Touch 890, i Touch 899	
Model Difference	Only different of model name.	
Product Description	The EUT is an Auto diagnostic scanner	
	Operation Frequency:	802.11b/g/n 20: 2412~2462 MHz
	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM
	Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps
	Number of Channel:	802.11b/g/n20: 11CH
	Antenna Designation:	Please refer to the Note 3.
	Antenna Gain (dBi)	1.62 dBi
Channel List	Please refer to the Note 2.	
Power Supply	Input: DC 12V from adapter	
Battery	N/A	
Hardware version number	V1.0	
Software version number	V1.0	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.

2.

802.11b/g/n(20MHz)	
Channel	Frequency
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	BOSSCOMM	i Touch 880	FPC	N/A	1.62	WIFI ANT

Note: The antenna information refere the manufacturer provide report, applicable only to the tested sample identified in the report.

2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions
Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

(2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.

(3) The battery is fully-charged during the radited and RF conducted test.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode10: Keeping WIFI TX

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	Power Class	Software For Testing
2.4G WiFi	802.11b	L/M/H	0	ADB
	802.11g	L/M/H	0	
	802.11n20	L/M/H	0	

2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
N/A	N/A	N/A	N/A	N/A

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Adapter	Donghai	FCA-1200-100	N/A	N/A
N/A	N/A	N/A	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.

2.5 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2024.08.28	2025.08.27
Signal Analyzer	R&S	FSV40-N	FCS-E012	2024.08.28	2025.08.27
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2024.08.28	2025.08.27
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2024.08.28	2025.08.27
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2024.08.28	2025.08.27
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2024.08.28	2025.08.27
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2024.08.28	2025.08.27
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2024.08.28	2025.08.27
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2024.08.28	2025.08.27
Temperature & Humidity	HTC-1	victor	FCS-E005	2024.08.28	2025.08.27
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2024.08.28	2025.08.27
LISN	R&S	ENV216	FCS-E007	2024.08.28	2025.08.27
LISN	ETS	3810/2NM	FCS-E009	2024.08.28	2025.08.27
Temperature & Humidity	HTC-1	victor	FCS-E008	2024.08.28	2025.08.27
Testing Software	EZ-EMC(Ver.EMC-CON 3A1.1)				

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2024.08.28	2025.08.27
Spectrum Analyzer	Agilent	E4447A	MY50180039	2024.08.28	2025.08.27
Spectrum Analyzer	R&S	FSV-40	101499	2024.08.28	2025.08.27
Power Sensor	Agilent	UX2021XA	FCS-E021	2024.08.28	2025.08.27
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

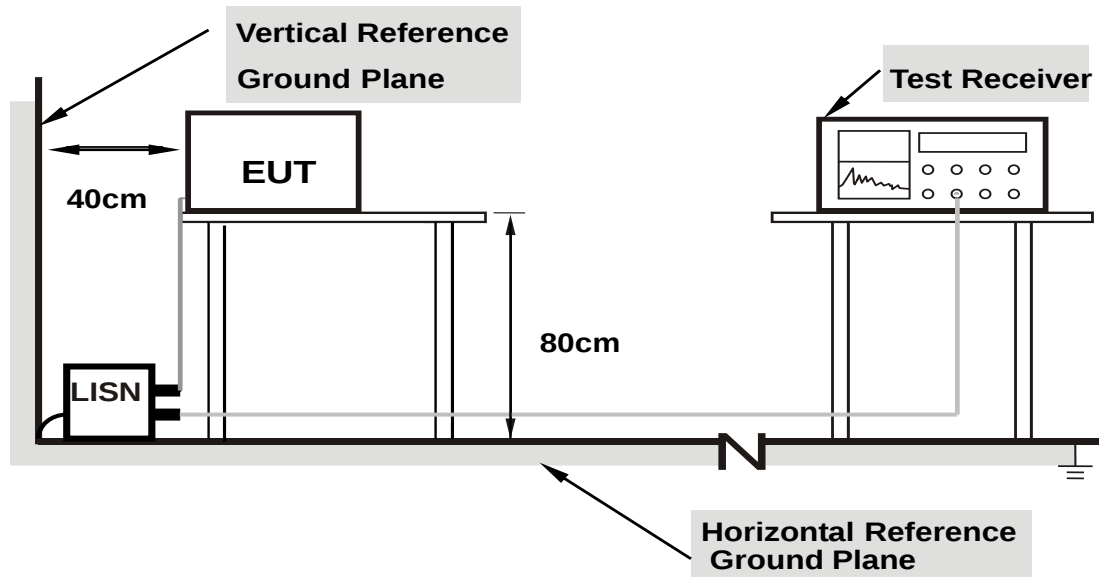


- Note: 1. Support units were connected to second LISN.**
- 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.5 TEST RESULTS

Temperature:	25C	Relative Humidity:	56%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 10		

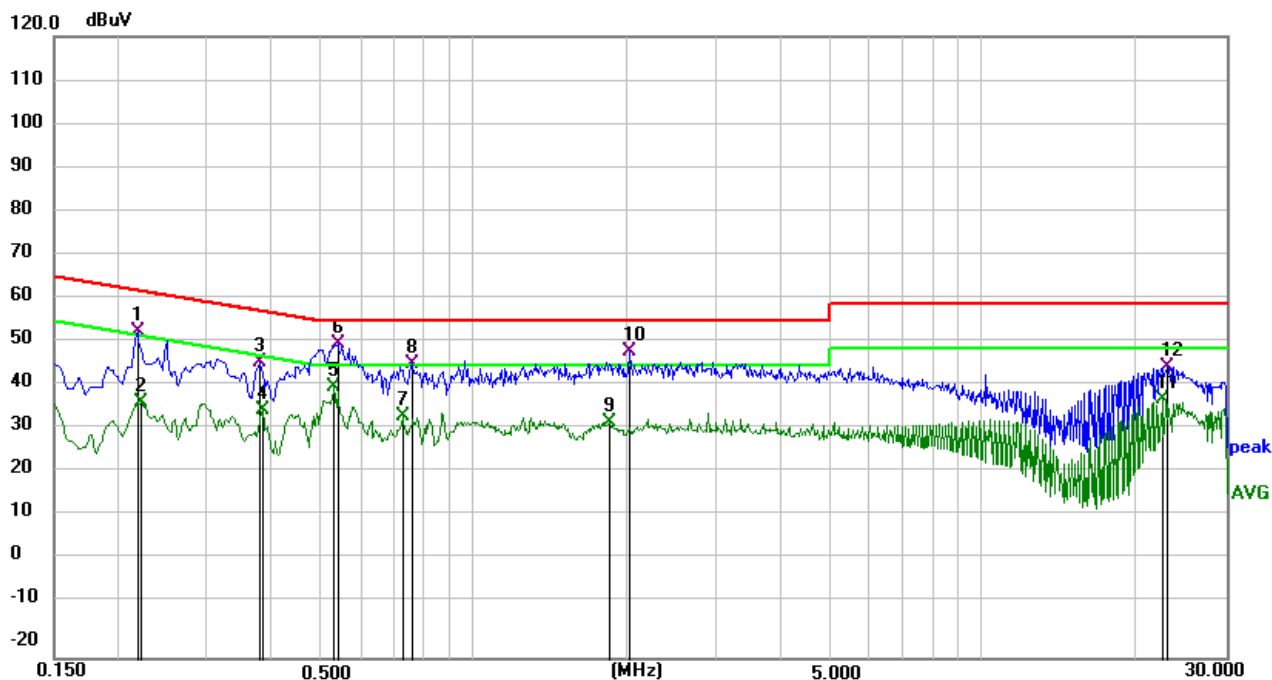


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2175	42.85	10.69	53.54	62.91	-9.37	QP
2	0.2220	26.97	10.69	37.66	52.74	-15.08	AVG
3	0.3795	35.93	10.69	46.62	58.29	-11.67	QP
4	0.3840	25.21	10.69	35.90	48.19	-12.29	AVG
5 *	0.5325	30.34	10.69	41.03	46.00	-4.97	AVG
6	0.5415	40.30	10.68	50.98	56.00	-5.02	QP
7	0.7260	24.05	10.66	34.71	46.00	-11.29	AVG
8	0.7620	35.68	10.66	46.34	56.00	-9.66	QP
9	1.8510	22.53	10.75	33.28	46.00	-12.72	AVG
10	2.0264	38.23	10.77	49.00	56.00	-7.00	QP
11	22.5510	26.57	11.67	38.24	50.00	-11.76	AVG
12	23.0190	33.86	11.68	45.54	60.00	-14.46	QP

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

Temperature:	25C	Relative Humidity:	56%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 10		

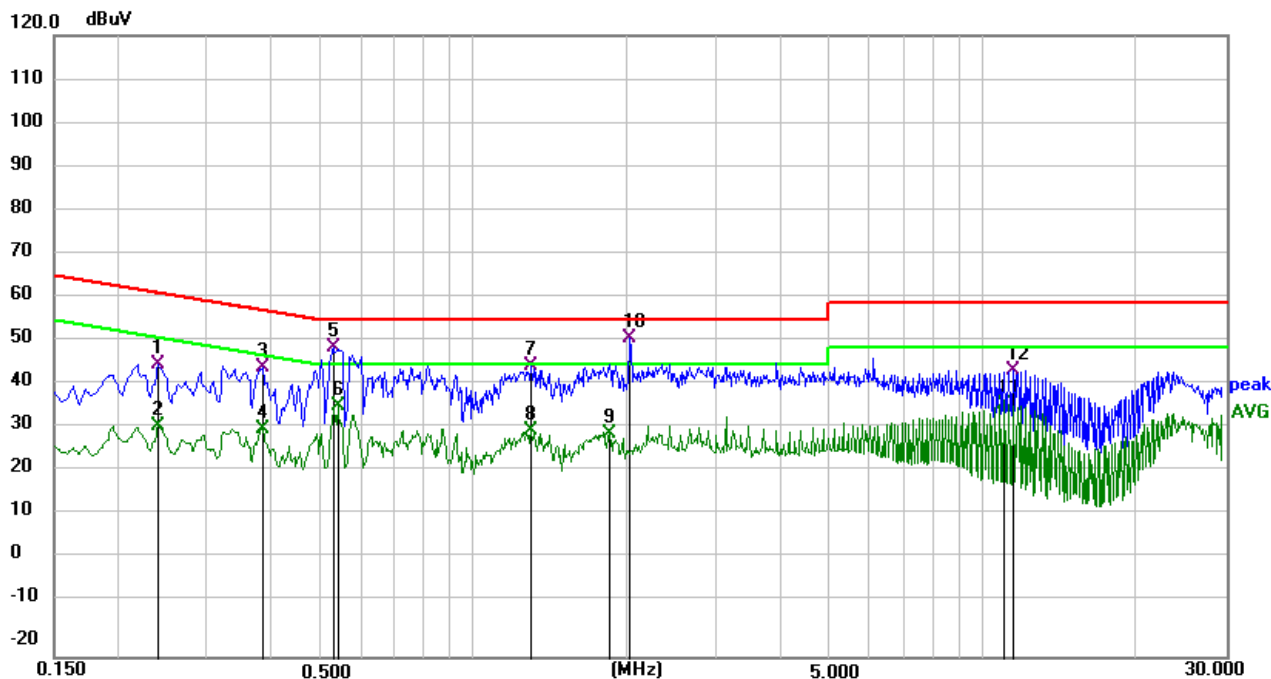

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2400	35.24	10.70	45.94	62.10	-16.16	QP
2	0.2400	21.61	10.70	32.31	52.10	-19.79	AVG
3	0.3840	34.50	10.69	45.19	58.19	-13.00	QP
4	0.3840	20.92	10.69	31.61	48.19	-16.58	AVG
5	0.5280	39.24	10.69	49.93	56.00	-6.07	QP
6	0.5415	25.87	10.68	36.55	46.00	-9.45	AVG
7	1.3020	35.07	10.69	45.76	56.00	-10.24	QP
8	1.3020	20.50	10.69	31.19	46.00	-14.81	AVG
9	1.8555	19.53	10.76	30.29	46.00	-15.71	AVG
10 *	2.0264	41.23	10.78	52.01	56.00	-3.99	QP
11	10.9905	25.82	11.18	37.00	50.00	-13.00	AVG
12	11.4540	33.52	11.22	44.74	60.00	-15.26	QP

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In case the emission fall within the Restricted band specified on Part15.205 (a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

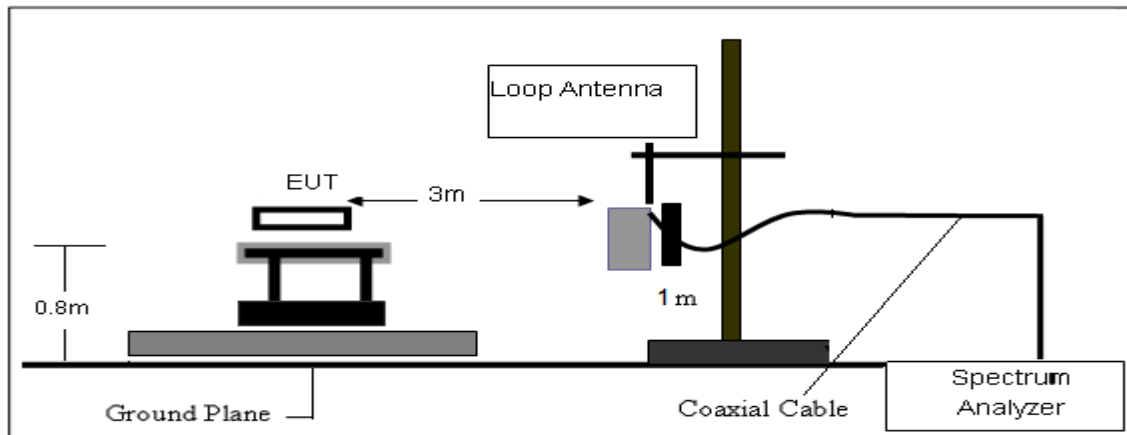

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

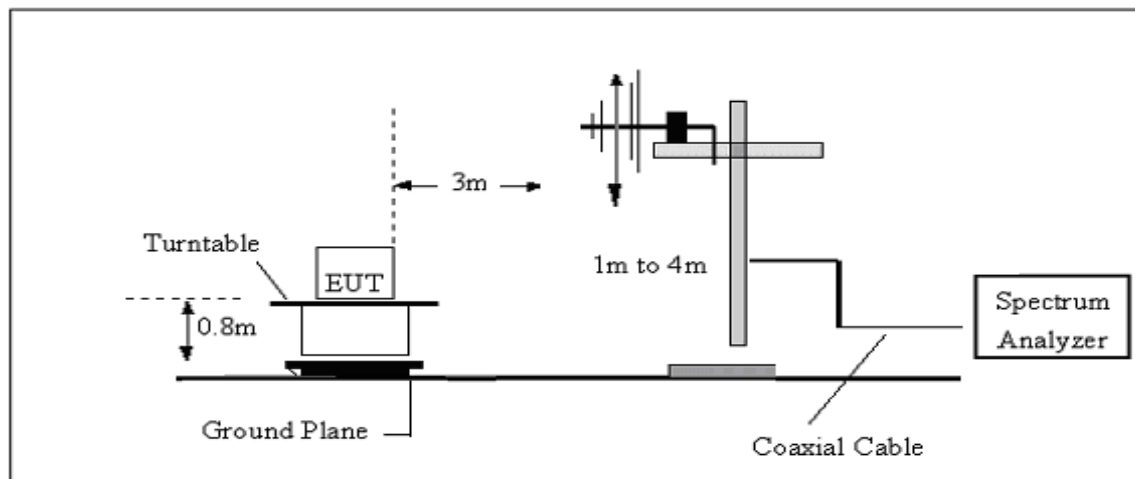

(C) Radiated Emission Test-Up Frequency Above 1GHz

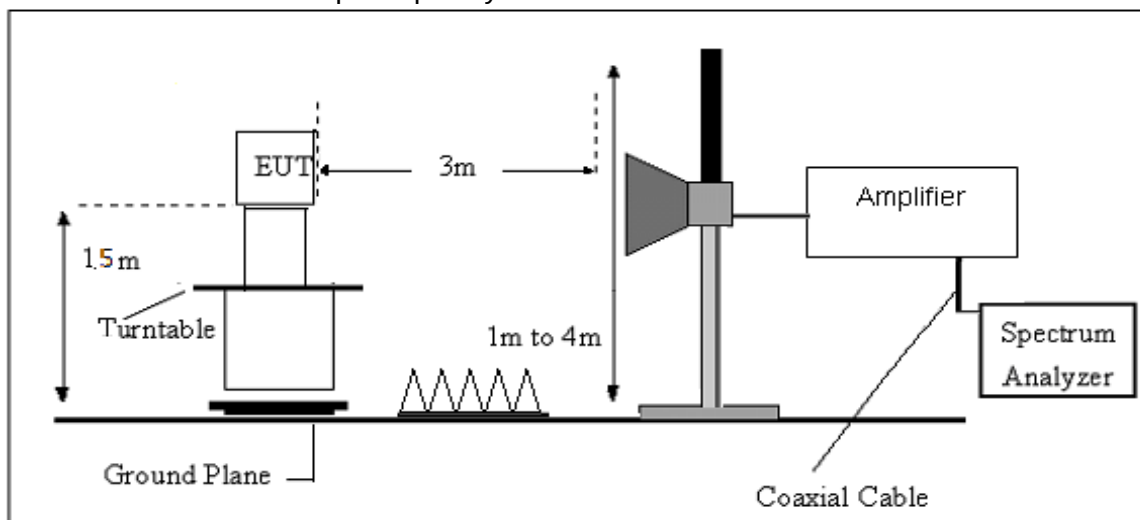

4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.

4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor


For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$


4.6 TEST RESULTS

Temperature:	25C	Relative Humidity:	56%
Test Voltage:	AC 120V/60Hz	Phase:	H
Test Mode:	Mode 1/2/3/4/5/6/7/8/9 (Mode 1 is the worst case, only show mode 1)		

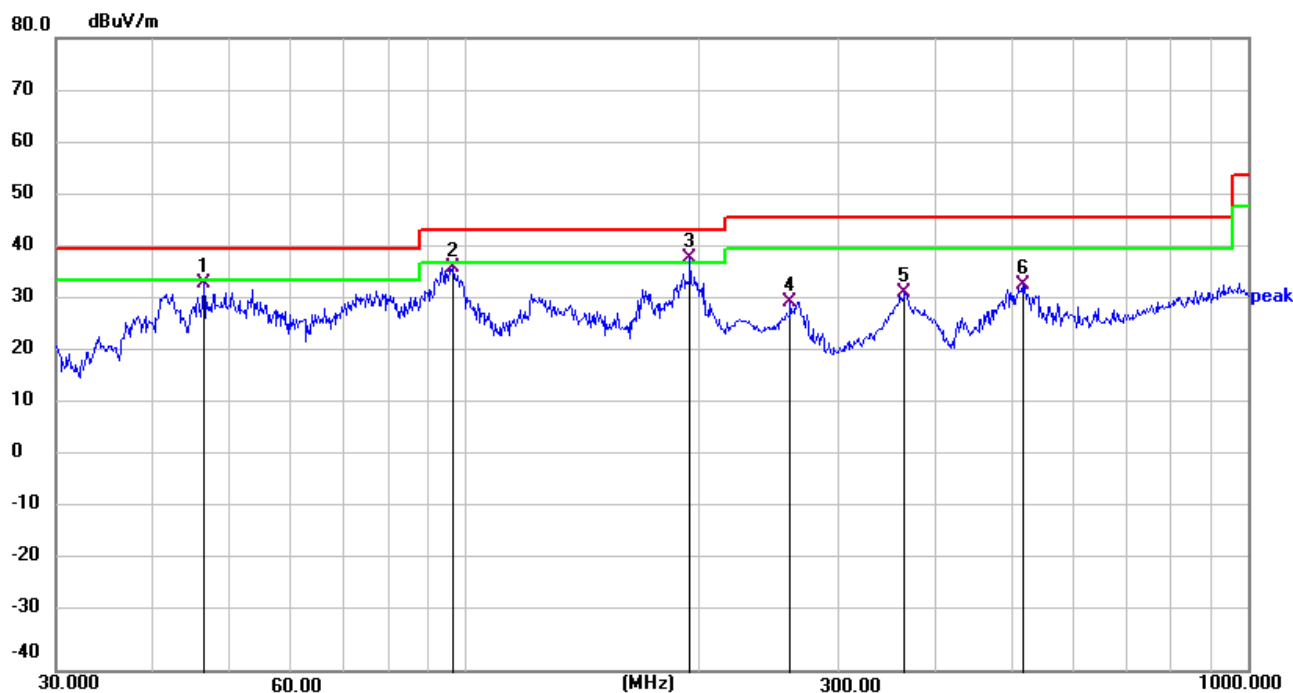

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	46.4866	50.09	-16.68	33.41	40.00	-6.59	QP
2	96.6392	57.06	-20.54	36.52	43.50	-6.98	QP
3 *	193.9766	57.90	-19.70	38.20	43.50	-5.30	QP
4	260.8752	48.17	-18.17	30.00	46.00	-16.00	QP
5	364.8987	47.15	-15.37	31.78	46.00	-14.22	QP
6	515.4373	45.49	-12.19	33.30	46.00	-12.70	QP

Temperature:	25C	Relative Humidity:	56%
Test Voltage:	AC 120V/60Hz	Phase:	H
Test Mode:	Mode 1/2/3/4/5/6/7/8/9 (Mode 1 is the worst case, only show mode 1)		

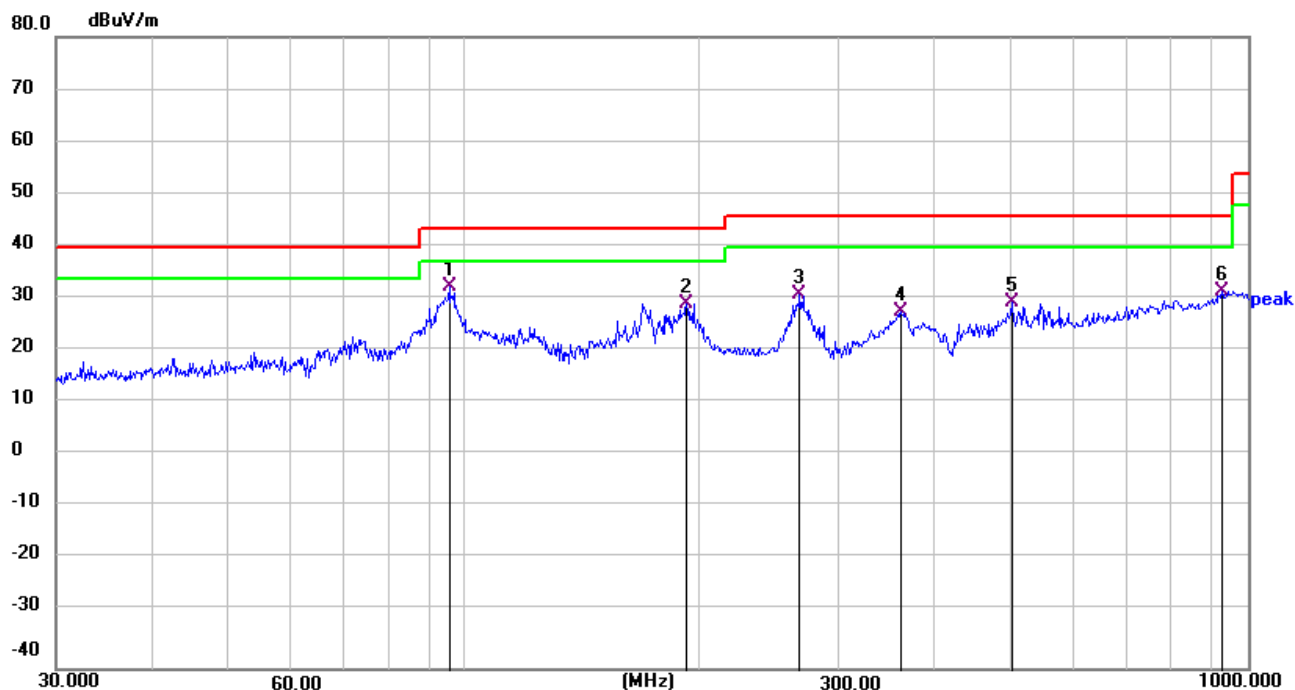

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1 *	95.5943	53.32	-20.61	32.71	43.50	-10.79	QP
2	192.2836	48.90	-19.59	29.31	43.50	-14.19	QP
3	268.2969	48.91	-17.90	31.01	46.00	-14.99	QP
4	360.5740	43.38	-15.48	27.90	46.00	-18.10	QP
5	500.4764	42.09	-12.51	29.58	46.00	-16.42	QP
6	926.4057	35.97	-4.14	31.83	46.00	-14.17	QP

(1GHz-25GHz) Spurious emission Requirements

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (802.11b/2412 MHz)										
3264.61	61.52	44.70	6.70	28.20	-9.80	51.72	74.00	-22.28	PK	Vertical
3264.61	51.56	44.70	6.70	28.20	-9.80	41.76	54.00	-12.24	AV	Vertical
3264.70	61.78	44.70	6.70	28.20	-9.80	51.98	74.00	-22.02	PK	Horizontal
3264.70	50.43	44.70	6.70	28.20	-9.80	40.63	54.00	-13.37	AV	Horizontal
4824.38	58.71	44.20	9.04	31.60	-3.56	55.15	74.00	-18.85	PK	Vertical
4824.38	50.37	44.20	9.04	31.60	-3.56	46.81	54.00	-7.19	AV	Vertical
4824.60	59.06	44.20	9.04	31.60	-3.56	55.50	74.00	-18.50	PK	Horizontal
4824.60	49.49	44.20	9.04	31.60	-3.56	45.93	54.00	-8.07	AV	Horizontal
5359.87	48.05	44.20	9.86	32.00	-2.34	45.71	74.00	-28.29	PK	Vertical
5359.87	39.20	44.20	9.86	32.00	-2.34	36.86	54.00	-17.14	AV	Vertical
5359.70	47.82	44.20	9.86	32.00	-2.34	45.48	74.00	-28.52	PK	Horizontal
5359.70	39.19	44.20	9.86	32.00	-2.34	36.85	54.00	-17.15	AV	Horizontal
7235.95	53.78	43.50	11.40	35.50	3.40	57.18	74.00	-16.82	PK	Vertical
7235.95	44.89	43.50	11.40	35.50	3.40	48.29	54.00	-5.71	AV	Vertical
7235.82	54.13	43.50	11.40	35.50	3.40	57.53	74.00	-16.47	PK	Horizontal
7235.82	44.16	43.50	11.40	35.50	3.40	47.56	54.00	-6.44	AV	Horizontal
Middle Channel ((802.11b/2437 MHz)										
3264.67	61.85	44.70	6.70	28.20	-9.80	52.05	74.00	-21.95	PK	Vertical
3264.67	50.83	44.70	6.70	28.20	-9.80	41.03	54.00	-12.97	AV	Vertical
3264.64	61.95	44.70	6.70	28.20	-9.80	52.15	74.00	-21.85	PK	Horizontal
3264.64	50.56	44.70	6.70	28.20	-9.80	40.76	54.00	-13.24	AV	Horizontal
4874.38	59.52	44.20	9.04	31.60	-3.56	55.96	74.00	-18.04	PK	Vertical
4874.38	49.34	44.20	9.04	31.60	-3.56	45.78	54.00	-8.22	AV	Vertical
4874.54	59.39	44.20	9.04	31.60	-3.56	55.83	74.00	-18.17	PK	Horizontal
4874.54	50.11	44.20	9.04	31.60	-3.56	46.55	54.00	-7.45	AV	Horizontal
5359.62	48.56	44.20	9.86	32.00	-2.34	46.22	74.00	-27.78	PK	Vertical
5359.62	39.31	44.20	9.86	32.00	-2.34	36.97	54.00	-17.03	AV	Vertical
5359.77	47.40	44.20	9.86	32.00	-2.34	45.06	74.00	-28.94	PK	Horizontal
5359.77	38.31	44.20	9.86	32.00	-2.34	35.97	54.00	-18.03	AV	Horizontal
7310.78	54.07	43.50	11.40	35.50	3.40	57.47	74.00	-16.53	PK	Vertical
7310.78	44.34	43.50	11.40	35.50	3.40	47.74	54.00	-6.26	AV	Vertical
7310.94	54.06	43.50	11.40	35.50	3.40	57.46	74.00	-16.54	PK	Horizontal
7310.94	44.61	43.50	11.40	35.50	3.40	48.01	54.00	-5.99	AV	Horizontal

High Channel ((802.11b/2462 MHz)										
3264.86	61.26	44.70	6.70	28.20	-9.80	51.46	74.00	-22.54	PK	Vertical
3264.86	51.79	44.70	6.70	28.20	-9.80	41.99	54.00	-12.01	AV	Vertical
3264.57	61.34	44.70	6.70	28.20	-9.80	51.54	74.00	-22.46	PK	Horizontal
3264.57	50.19	44.70	6.70	28.20	-9.80	40.39	54.00	-13.61	AV	Horizontal
4924.46	58.69	44.20	9.04	31.60	-3.56	55.13	74.00	-18.87	PK	Vertical
4924.46	49.43	44.20	9.04	31.60	-3.56	45.87	54.00	-8.13	AV	Vertical
4924.32	59.29	44.20	9.04	31.60	-3.56	55.73	74.00	-18.27	PK	Horizontal
4924.32	50.53	44.20	9.04	31.60	-3.56	46.97	54.00	-7.03	AV	Horizontal
5359.79	48.78	44.20	9.86	32.00	-2.34	46.44	74.00	-27.56	PK	Vertical
5359.79	39.08	44.20	9.86	32.00	-2.34	36.74	54.00	-17.26	AV	Vertical
5359.85	48.53	44.20	9.86	32.00	-2.34	46.19	74.00	-27.81	PK	Horizontal
5359.85	38.36	44.20	9.86	32.00	-2.34	36.02	54.00	-17.98	AV	Horizontal
7385.82	54.43	43.50	11.40	35.50	3.40	57.83	74.00	-16.17	PK	Vertical
7385.82	44.41	43.50	11.40	35.50	3.40	47.81	54.00	-6.19	AV	Vertical
7385.68	54.90	43.50	11.40	35.50	3.40	58.30	74.00	-15.70	PK	Horizontal
7385.68	44.73	43.50	11.40	35.50	3.40	48.13	54.00	-5.87	AV	Horizontal

Note:

1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.

3) Only show the worst case.

Restricted Bands Requirements

802.11 b 2412MHz

H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2310	41.1	-5.82	35.28	74	-38.72	peak	100	360
2	2390	39.05	-5.72	33.33	74	-40.67	peak	100	360
3	2400	39.53	-5.61	33.92	74	-40.08	peak	100	360

V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2310	42.4	-5.82	36.58	74	-37.42	peak	100	360
2	2390	39.58	-5.94	33.64	74	-40.36	peak	100	360
3	2400	40.36	-5.65	34.71	74	-39.29	peak	100	360

802.11 b 2462MHz

H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2483.5	36.41	-5.29	31.12	74	-42.88	peak	100	360
2	2500	38.32	-4.73	33.59	74	-40.41	peak	100	360

V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2483.5	37.59	-5.29	32.3	74	-41.7	peak	100	360
2	2500	36.87	-4.99	31.88	74	-42.12	peak	100	360

Note:

1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

2) Only show the worst case.

3) The peak value is less than AV limit, so AV measure is not need.

5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

5.3 TEST SETUP



The EUT which is powered by the DC 5V, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

5.5 TEST RESULTS

For the measurement records, refer to the appendix I.

6. POWER SPECTRAL DENSITY TEST

6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8 \text{ dBm}$ ($\text{RBW} \geq 3 \text{ KHz}$)	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

6.5 TEST RESULTS

For the measurement records · refer to the appendix I.

7. BANDWIDTH TEST

7.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq$ 6 dB.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

7.5 TEST RESULTS

For the measurement records · refer to the appendix I.

8. PEAK OUTPUT POWER TEST

8.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq$ [3 $\times$ RBW].
- Set span $\geq$ [3 $\times$ RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the


DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW $\geq$ [3 $\times$ RBW].
- Set the span $\geq$ [1.5 $\times$ DTS bandwidth].
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

8.5 TEST RESULTS

For the measurement records , refer to the appendix I.

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is FPC Antenna. It comply with the standard requirement.

APPENDIX I:TEST RESULTS

Conducted Output Power

Test Result

Conducted Output Power


Mode	Channel	Ant. 0 (dBm)	Limit (dBm)	Result
IEEE 802.11b	1	7.20	≤30	PASS
	6	7.07	≤30	PASS
	11	7.28	≤30	PASS
IEEE 802.11g	1	6.73	≤30	PASS
	6	7.18	≤30	PASS
	11	5.72	≤30	PASS
IEEE 802.11n_20	1	5.49	≤30	PASS
	6	7.60	≤30	PASS
	11	7.42	≤30	PASS


99% Bandwidth

Test Result


Mode	Channel	Ant.	Center Frequency (MHz)	99% BW (MHz)
IEEE 802.11b	1	0	2412	10.866
	6		2437	10.670
	11		2462	11.241
IEEE 802.11g	1		2412	17.085
	6		2437	16.935
	11		2462	17.107
IEEE 802.11n_20	1		2412	17.980
	6		2437	17.800
	11		2462	17.980

Test Graphs

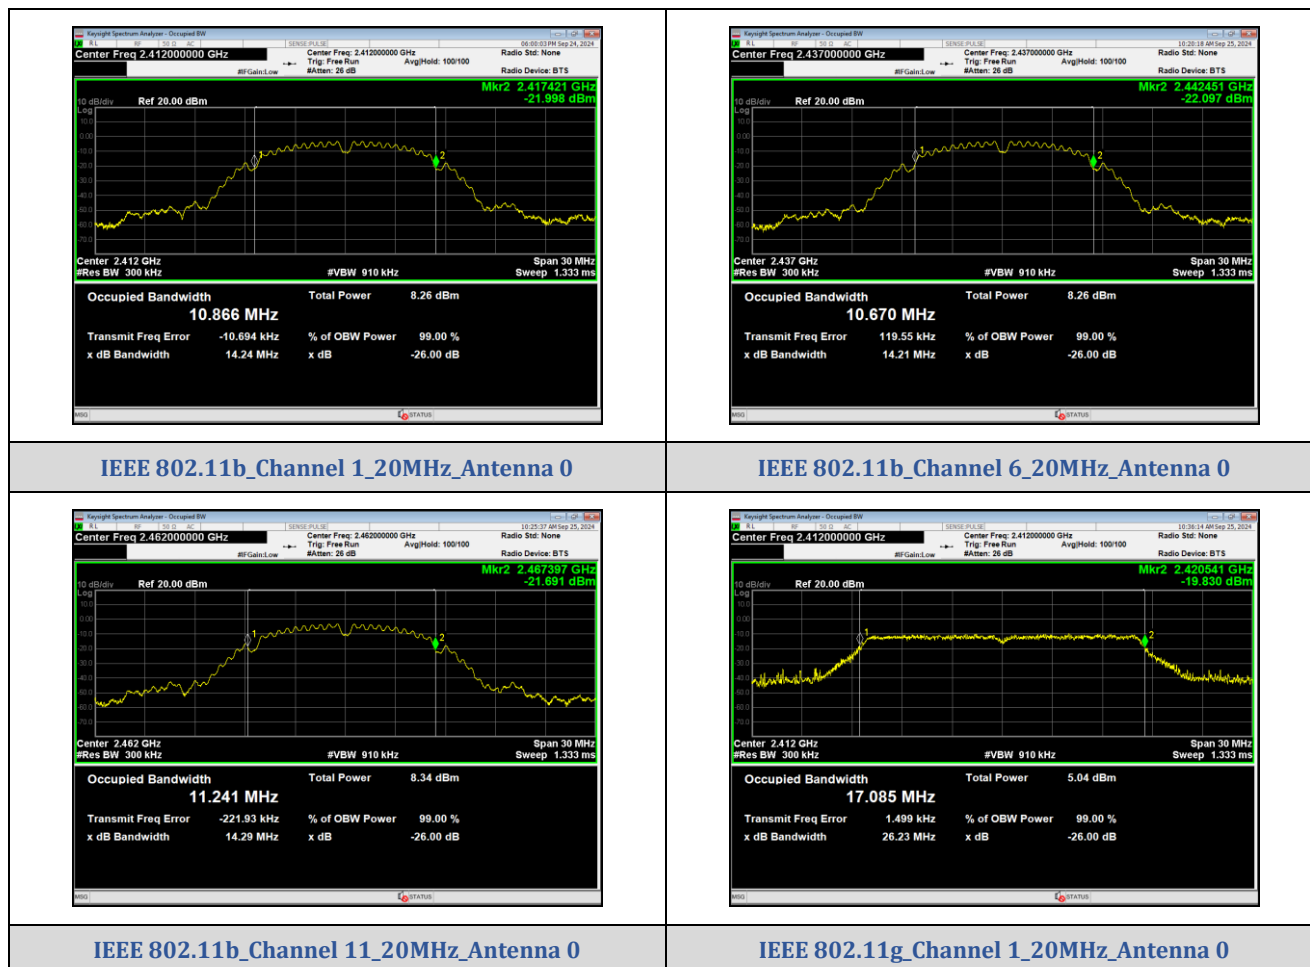


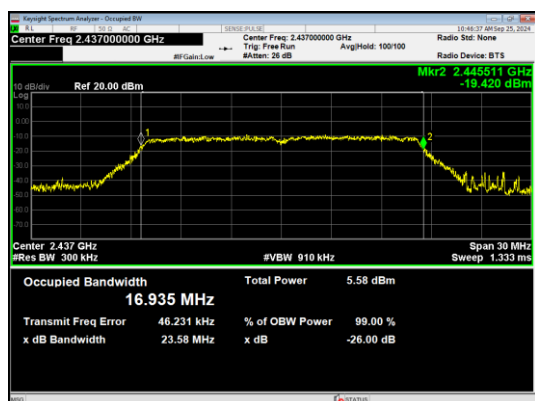


IEEE 802.11g_Channel 6_20MHz_Antenna 0

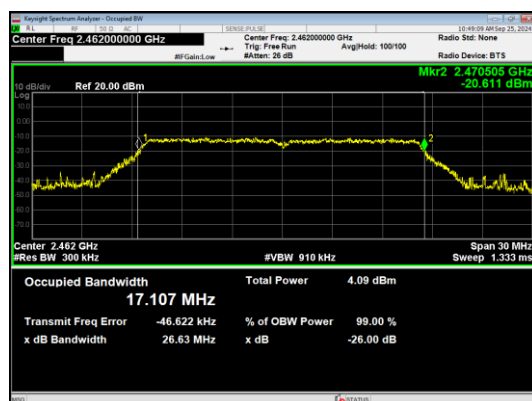


IEEE 802.11g_Channel 11_20MHz_Antenna 0

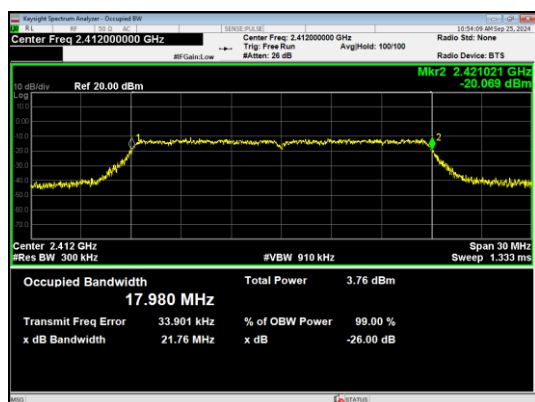

IEEE 802.11n_Channel 1_20MHz_Antenna 0

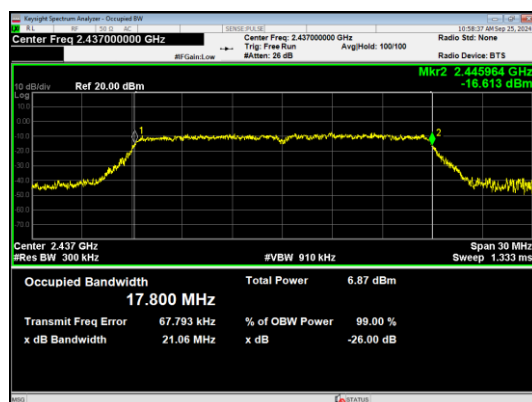

IEEE 802.11n_Channel 6_20MHz_Antenna 0

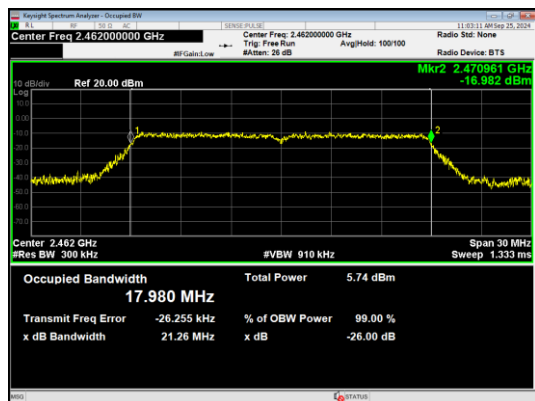


IEEE 802.11n_Channel 11_20MHz_Antenna 0

6dB Bandwidth


Test Result

Mode	Channel	Ant.	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b	1	0	2412	8.110	≥0.5	PASS
	6		2437	8.097		PASS
	11		2462	8.578		PASS
IEEE 802.11g	1		2412	16.38		PASS
	6		2437	16.31		PASS
	11		2462	16.37		PASS
IEEE 802.11n_20	1		2412	17.59		PASS
	6		2437	17.30		PASS
	11		2462	17.59		PASS


Test Graphs

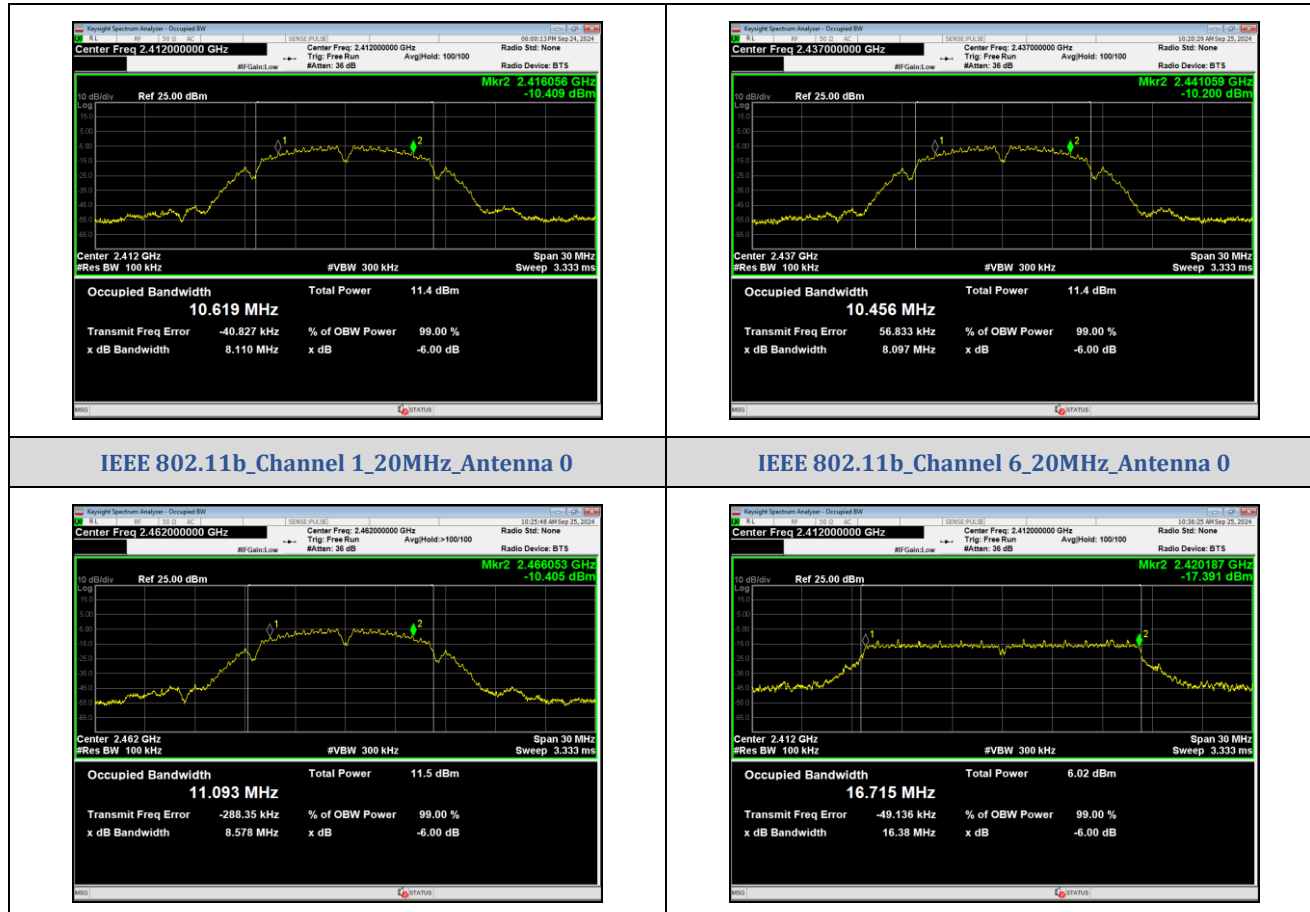


IEEE 802.11b_Channel 11_20MHz_Antenna 0

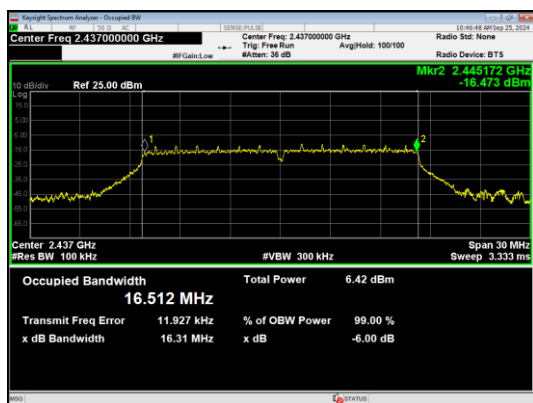


IEEE 802.11g_Channel 1_20MHz_Antenna 0

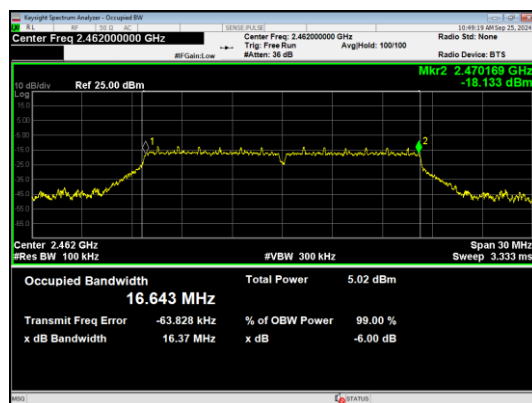


IEEE 802.11g_Channel 6_20MHz_Antenna 0

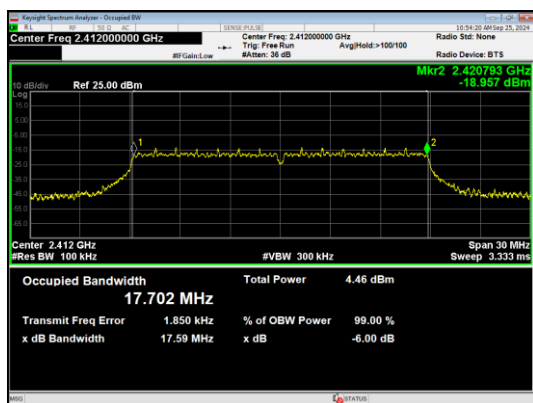

IEEE 802.11g_Channel 11_20MHz_Antenna 0

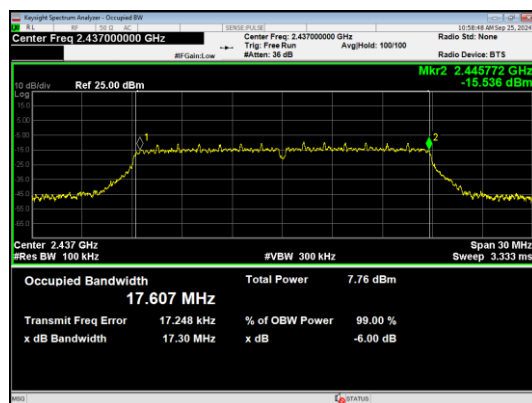

IEEE 802.11n_Channel 1_20MHz_Antenna 0

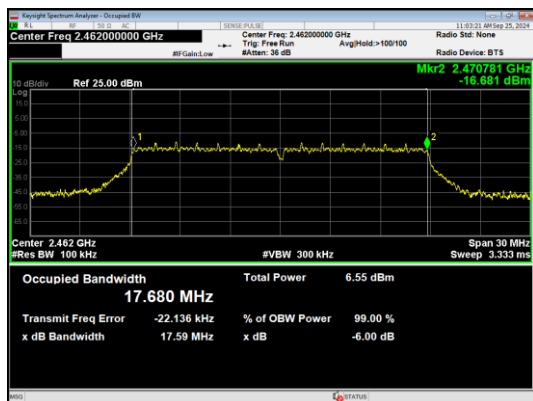

IEEE 802.11n_Channel 6_20MHz_Antenna 0



IEEE 802.11n_Channel 11_20MHz_Antenna 0


Conducted Out Of Band Emission

Test Result

Mode	Channel	Ant.	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
IEEE 802.11b	1	0	2398.92	-49.746	-24.52	-25.226	PASS
			2400.00	-50.892	-24.52	-26.372	PASS
			4835.00	-53.087	-24.52	-28.567	PASS
			7225.30	-51.753	-24.52	-27.233	PASS
			9664.90	-54.421	-24.52	-29.901	PASS
			24947.6	-40.201	-24.52	-15.681	PASS
	6		4885.54	-54.096	-24.49	-29.606	PASS
			7295.83	-50.327	-24.49	-25.837	PASS
			9735.46	-54.328	-24.49	-29.838	PASS
			24697.2	-40.562	-24.49	-16.072	PASS
	11		2483.50	-54.697	-24.47	-30.227	PASS
			4904.27	-53.479	-24.47	-29.009	PASS
			7383.85	-51.182	-24.47	-26.712	PASS
			9845.95	-54.117	-24.47	-29.647	PASS
			24914.5	-40.589	-24.47	-16.119	PASS
IEEE 802.11g	1		2398.92	-39.791	-31.73	-8.061	PASS
			2400.00	-41.775	-31.73	-10.045	PASS
			4828.10	-53.343	-31.73	-21.613	PASS
			7244.00	-52.124	-31.73	-20.394	PASS
			9656.80	-55.138	-31.73	-23.408	PASS
			24961.3	-40.452	-31.73	-8.722	PASS
	6		4893.03	-53.617	-30.73	-22.887	PASS
			7292.08	-52.008	-30.73	-21.278	PASS
			9751.69	-54.265	-30.73	-23.535	PASS
			24730.3	-39.524	-30.73	-8.794	PASS
	11		2483.50	-51.156	-32.22	-18.936	PASS
			4918.00	-52.510	-32.22	-20.290	PASS
			7386.35	-51.180	-32.22	-18.960	PASS
			9854.07	-54.051	-32.22	-21.831	PASS
			24871.4	-40.962	-32.22	-8.742	PASS


IEEE 802.11n_20	1		2400.00	-42.725	-33.13	-9.595	PASS
			4838.72	-53.840	-33.13	-20.710	PASS
			7231.53	-51.692	-33.13	-18.562	PASS
			9664.92	-54.587	-33.13	-21.457	PASS
			24448.1	-39.471	-33.13	-6.341	PASS
	6		4871.80	-53.549	-29.49	-24.059	PASS
			7297.70	-51.689	-29.49	-22.199	PASS
			9747.32	-54.504	-29.49	-25.014	PASS
			24418.8	-40.148	-29.49	-10.658	PASS
			2483.50	-51.640	-30.86	-20.780	PASS
	11		4922.37	-53.950	-30.86	-23.090	PASS
			7370.12	-51.383	-30.86	-20.523	PASS
			9857.81	-53.616	-30.86	-22.756	PASS
			24888.3	-39.974	-30.86	-9.114	PASS

Test Graphs

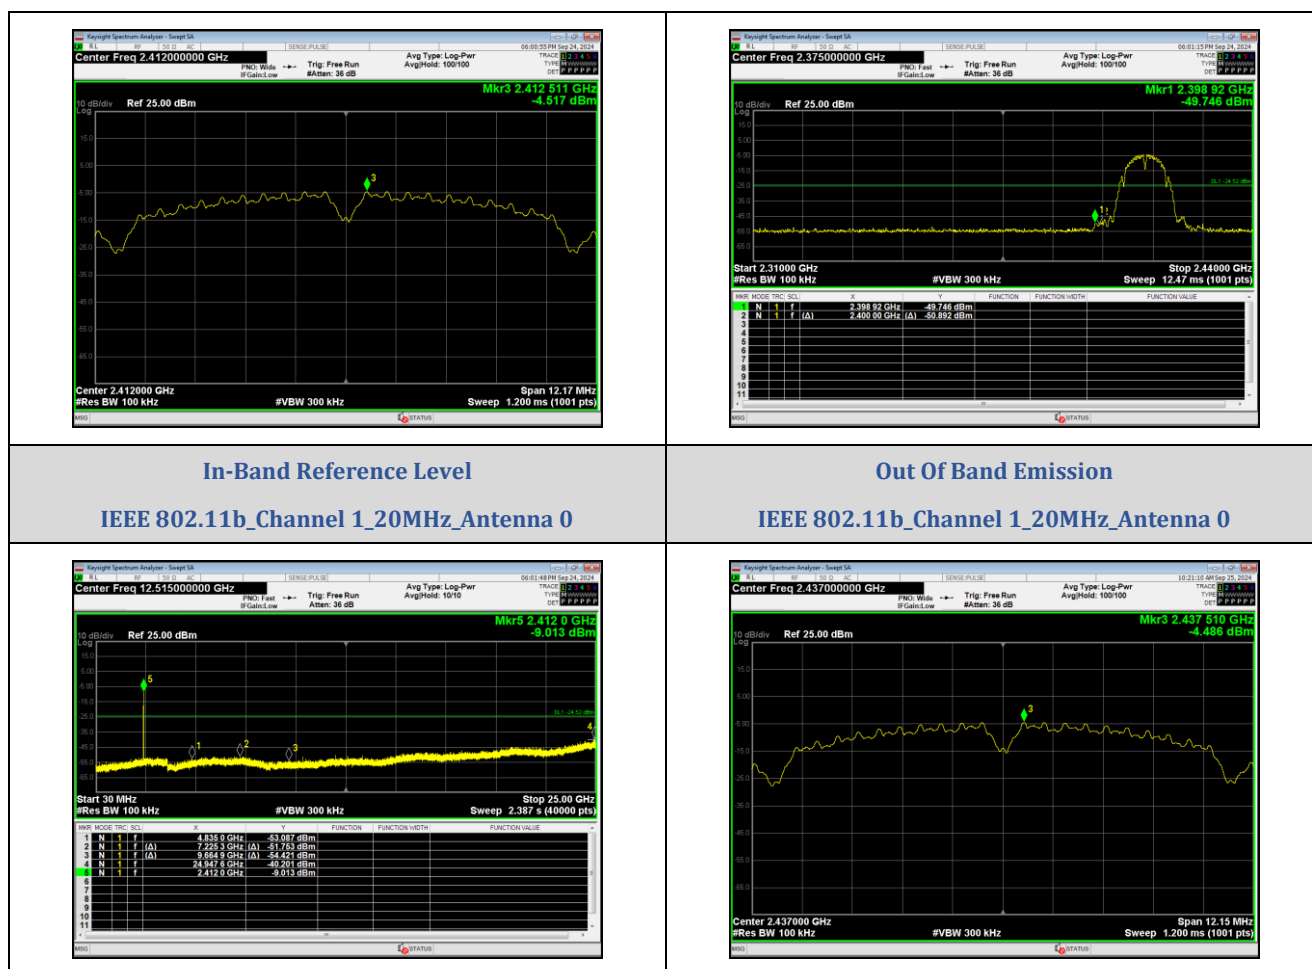


30.0 MHz - 25000.0 MHz

IEEE 802.11b_Channel 1_20MHz_Antenna 0

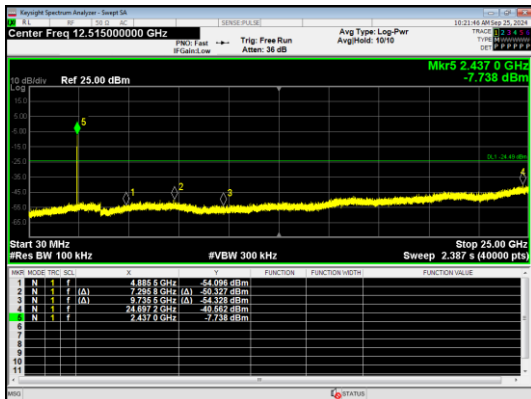


In-Band Reference Level

IEEE 802.11b_Channel 6_20MHz_Antenna 0

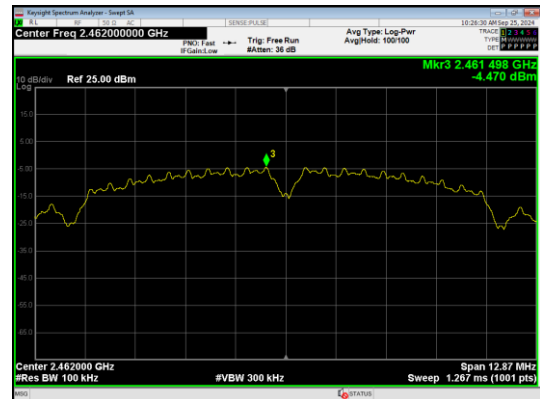


30.0 MHz - 25000.0 MHz

IEEE 802.11b_Channel 6_20MHz_Antenna 0

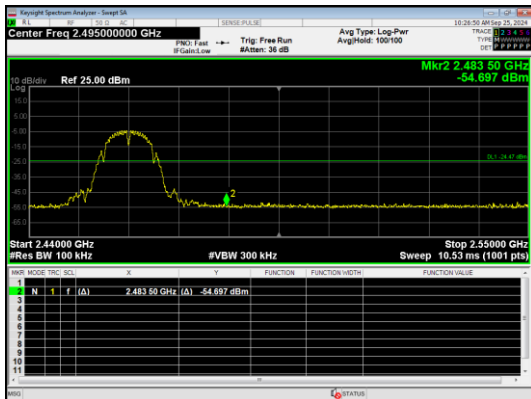


In-Band Reference Level

IEEE 802.11b_Channel 11_20MHz_Antenna 0

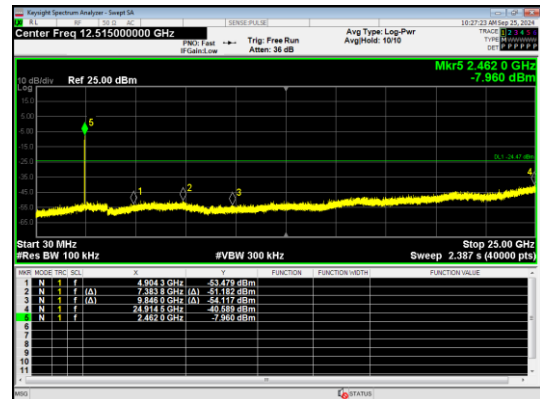

Out Of Band Emission

IEEE 802.11b_Channel 11_20MHz_Antenna 0

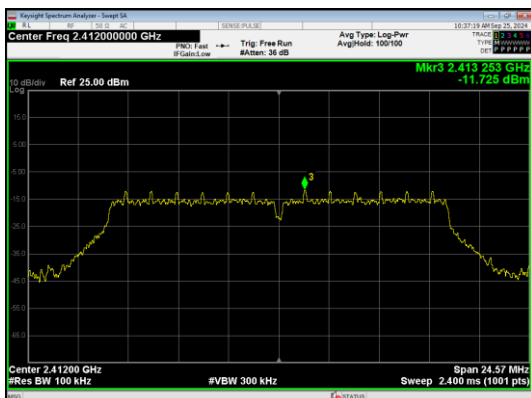

30.0 MHz - 25000.0 MHz

IEEE 802.11b_Channel 11_20MHz_Antenna 0




In-Band Reference Level

IEEE 802.11g_Channel 1_20MHz_Antenna 0


Out Of Band Emission

IEEE 802.11g_Channel 1_20MHz_Antenna 0

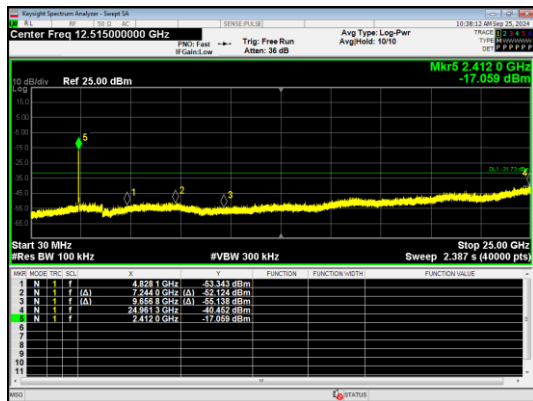


30.0 MHz - 25000.0 MHz

IEEE 802.11g_Channel 1_20MHz_Antenna 0

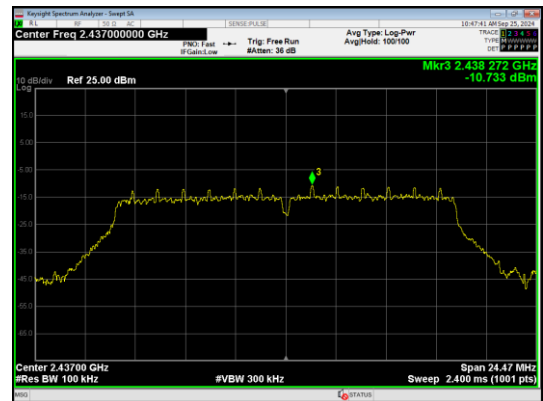


In-Band Reference Level

IEEE 802.11g_Channel 6_20MHz_Antenna 0

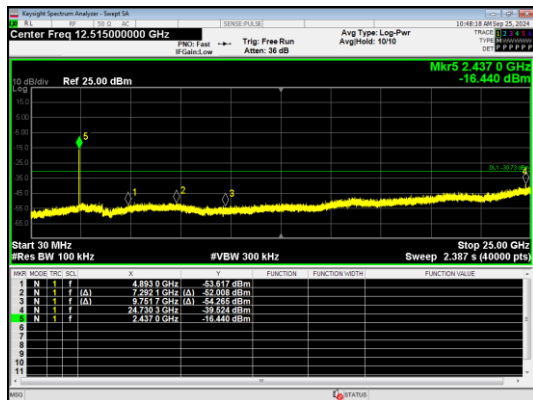


30.0 MHz - 25000.0 MHz

IEEE 802.11g_Channel 6_20MHz_Antenna 0

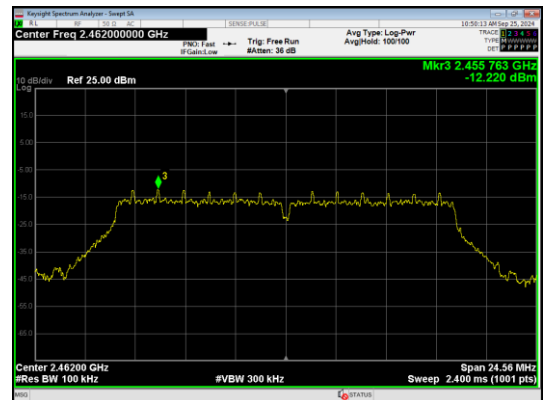


In-Band Reference Level

IEEE 802.11g_Channel 11_20MHz_Antenna 0

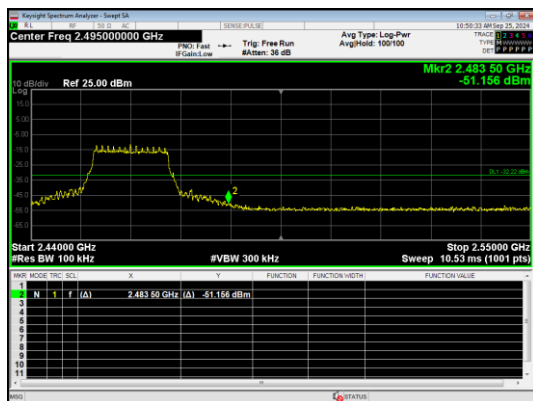


Out Of Band Emission

IEEE 802.11g_Channel 11_20MHz_Antenna 0

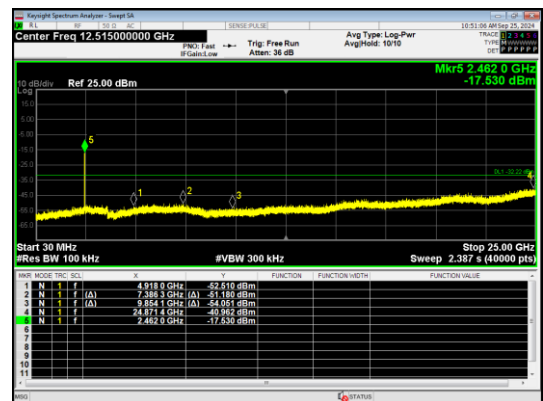


30.0 MHz - 25000.0 MHz

IEEE 802.11g_Channel 11_20MHz_Antenna 0

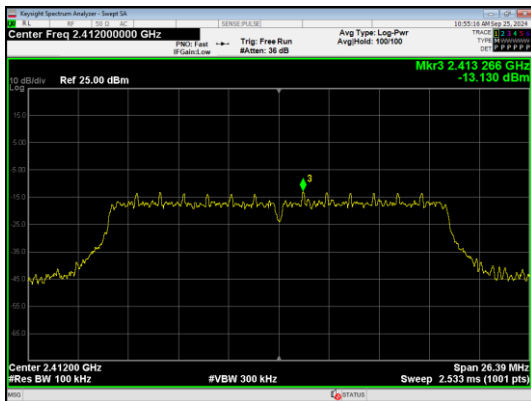


In-Band Reference Level

IEEE 802.11n_Channel 1_20MHz_Antenna 0

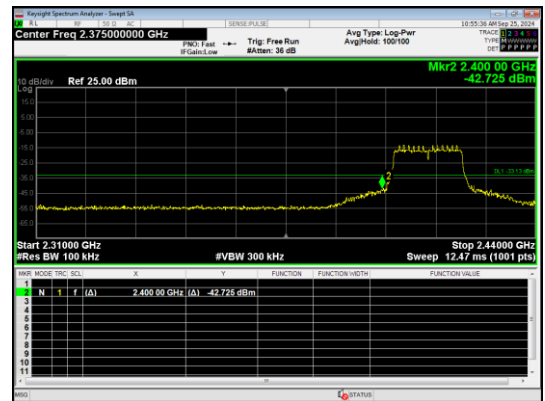


Out Of Band Emission

IEEE 802.11n_Channel 1_20MHz_Antenna 0

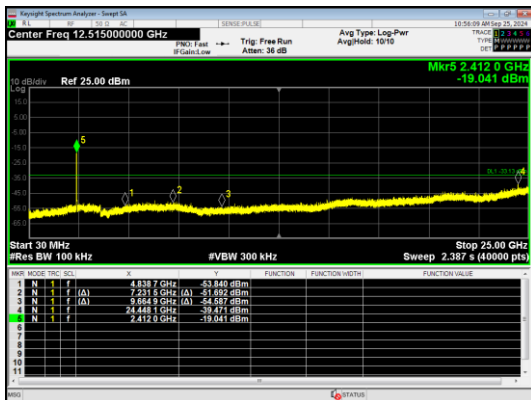


30.0 MHz - 25000.0 MHz

IEEE 802.11n_Channel 1_20MHz_Antenna 0

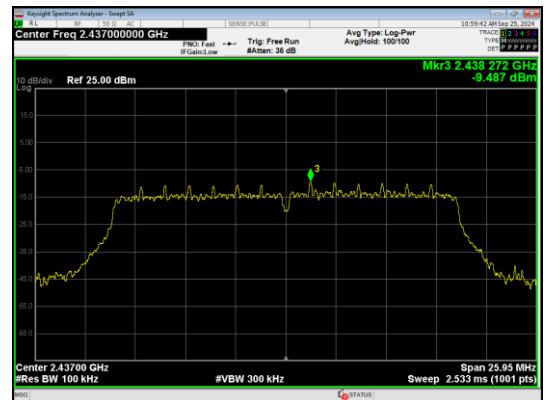


In-Band Reference Level

IEEE 802.11n_Channel 6_20MHz_Antenna 0

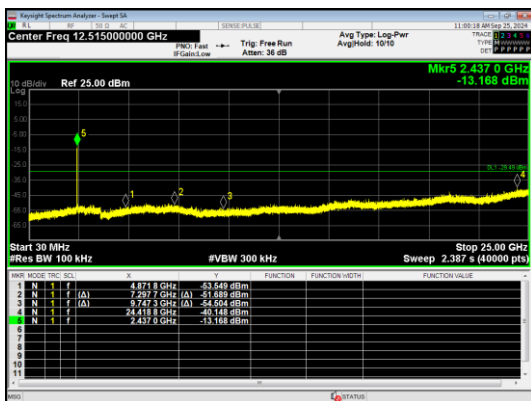


30.0 MHz - 25000.0 MHz

IEEE 802.11n_Channel 6_20MHz_Antenna 0

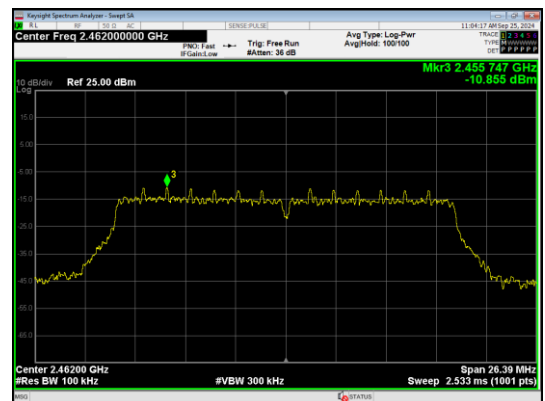

In-Band Reference Level

IEEE 802.11n_Channel 11_20MHz_Antenna 0

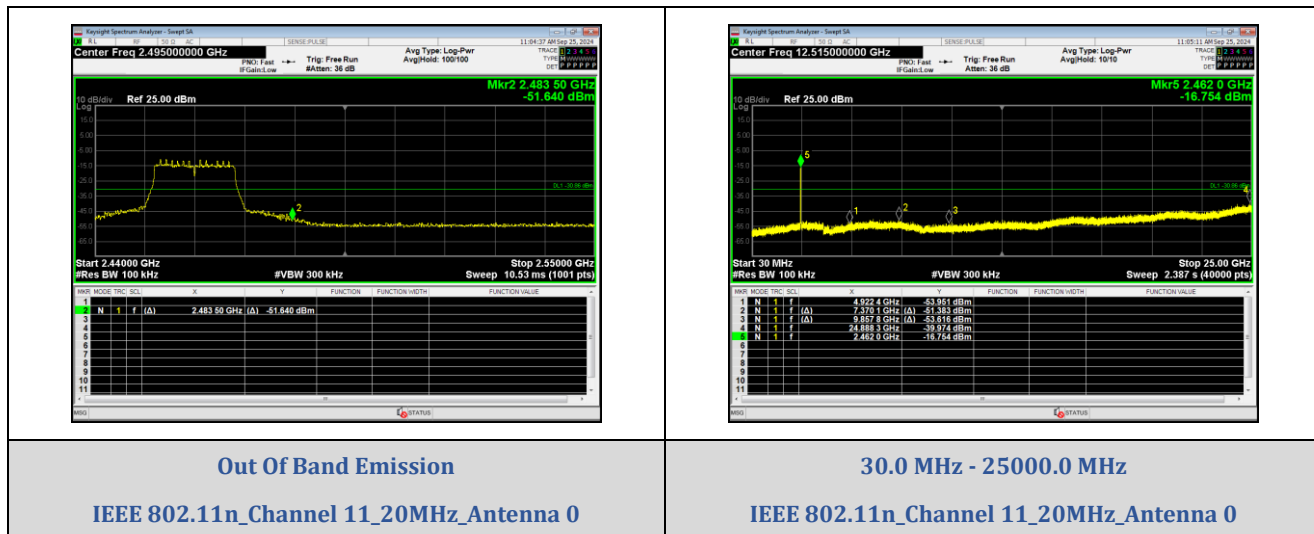


Duty Cycle


Test Result

Mode	Data rates	Channel	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
IEEE 802.11b	1	1	0	8.384	8.422	99.55	0.9955	0.0196
		6		8.385	8.422	99.56	0.9956	0.0192
		11		8.384	8.422	99.55	0.9955	0.0196
IEEE 802.11g		1		1.396	1.427	97.83	0.9783	0.0953
6		1.396		1.428	97.76	0.9776	0.0984	
11		1.396		1.427	97.83	0.9783	0.0953	
IEEE 802.11n_20	MCS 0	1		1.302	1.335	97.58	0.9758	0.1064
		6		1.304	1.353	96.38	0.9638	0.1601
		11		1.304	1.353	96.38	0.9638	0.1601


Test Graphs

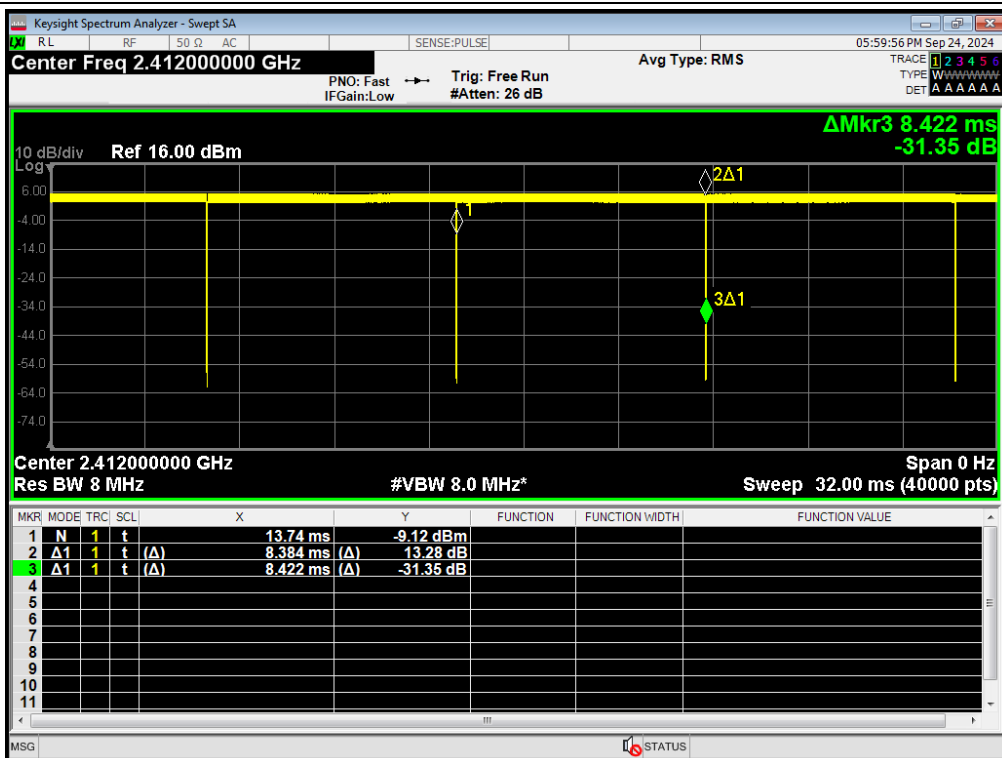


IEEE 802.11b_20MHz_Channel 1

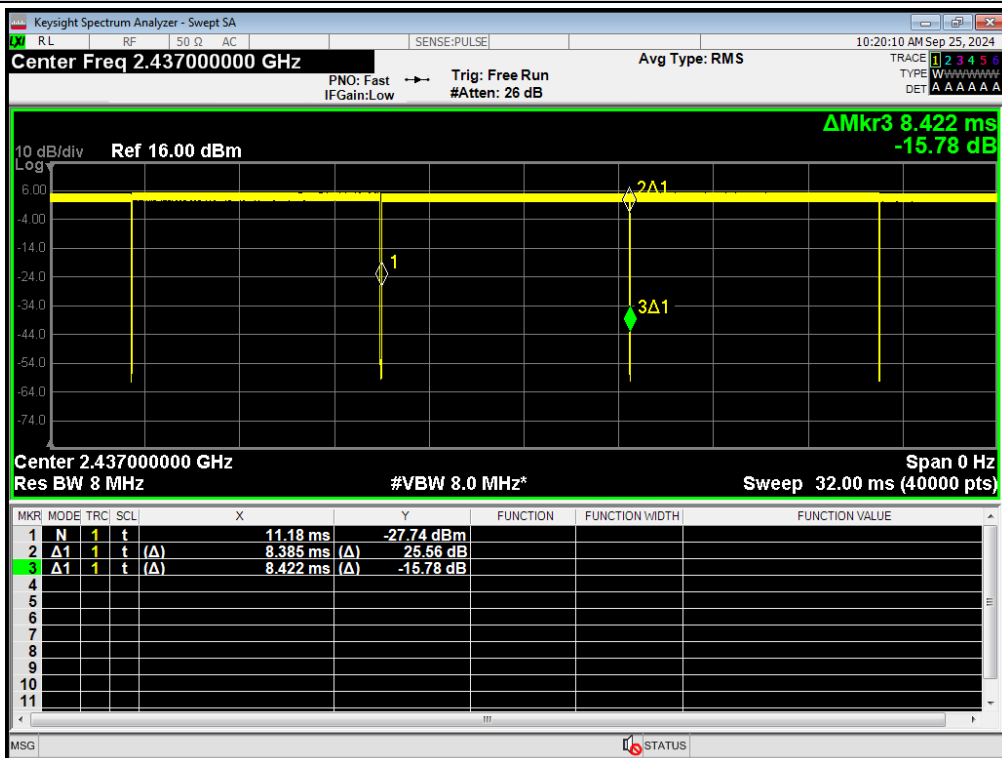


IEEE 802.11b_20MHz_Channel 6

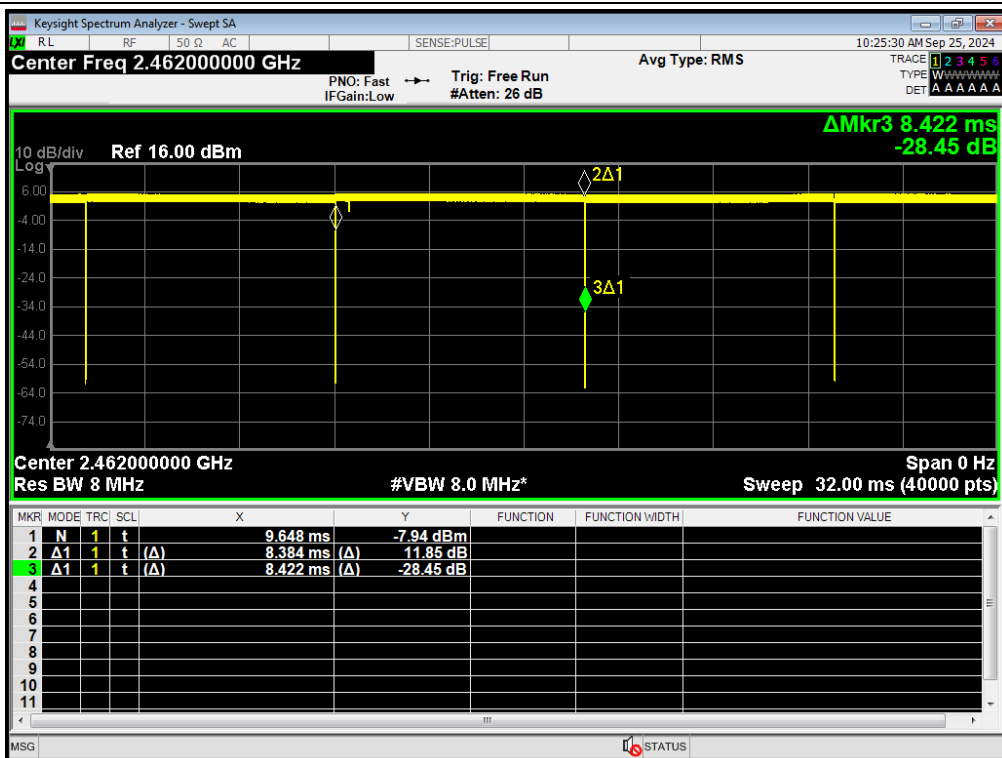


IEEE 802.11b_20MHz_Channel 11

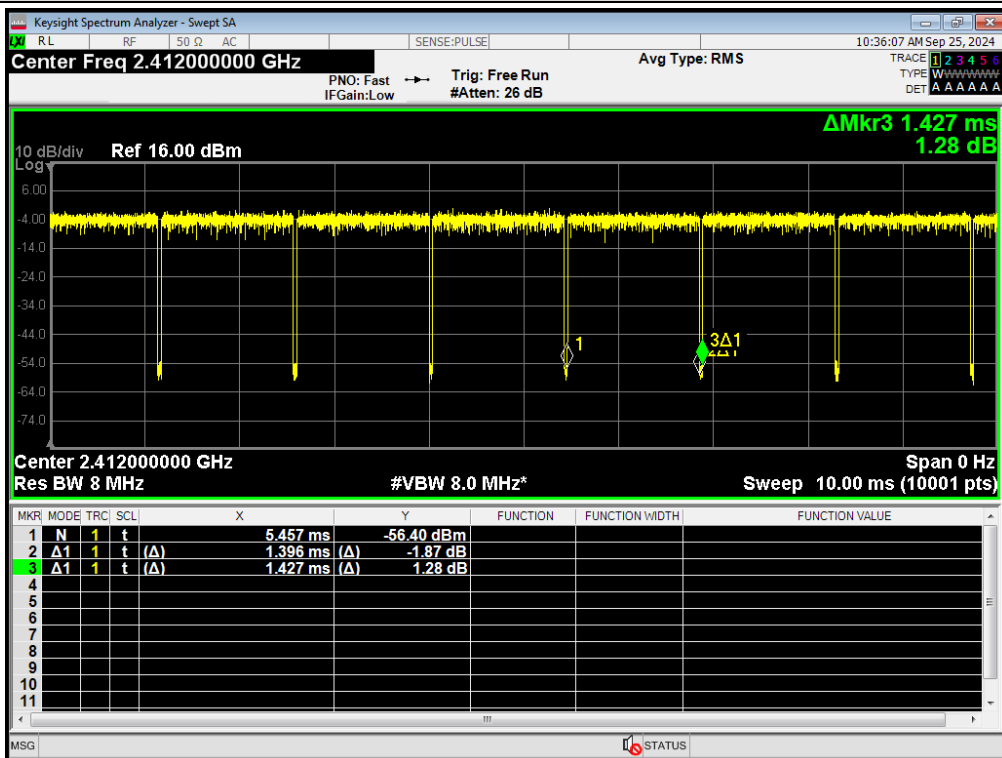


IEEE 802.11g_20MHz_Channel 1

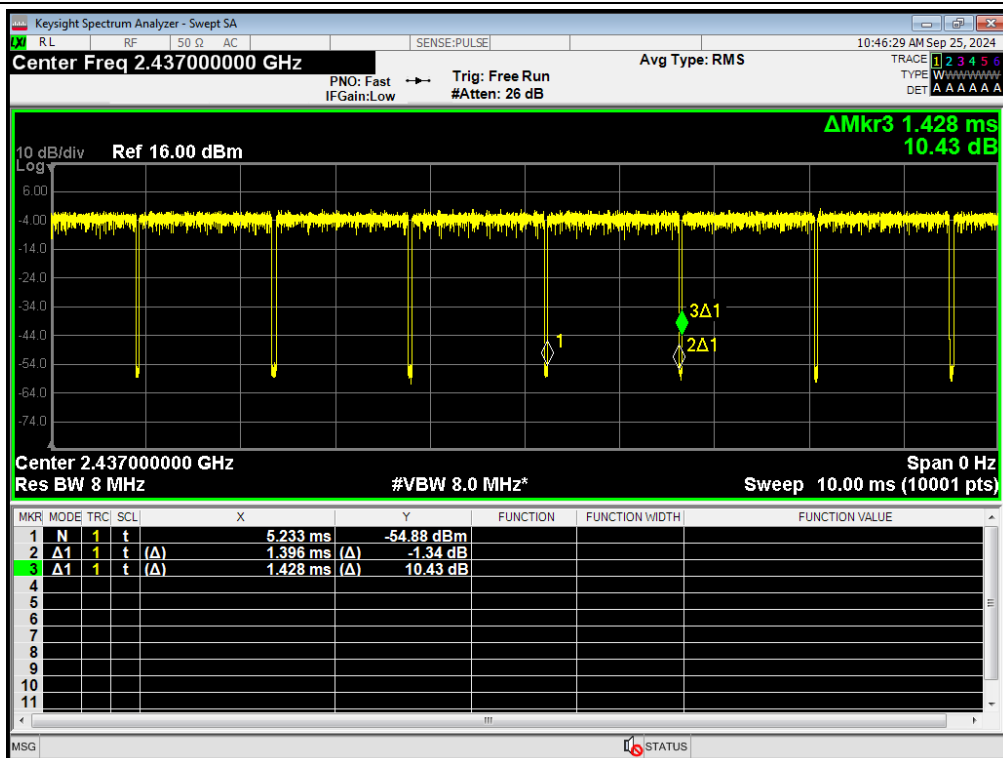


IEEE 802.11g_20MHz_Channel 6

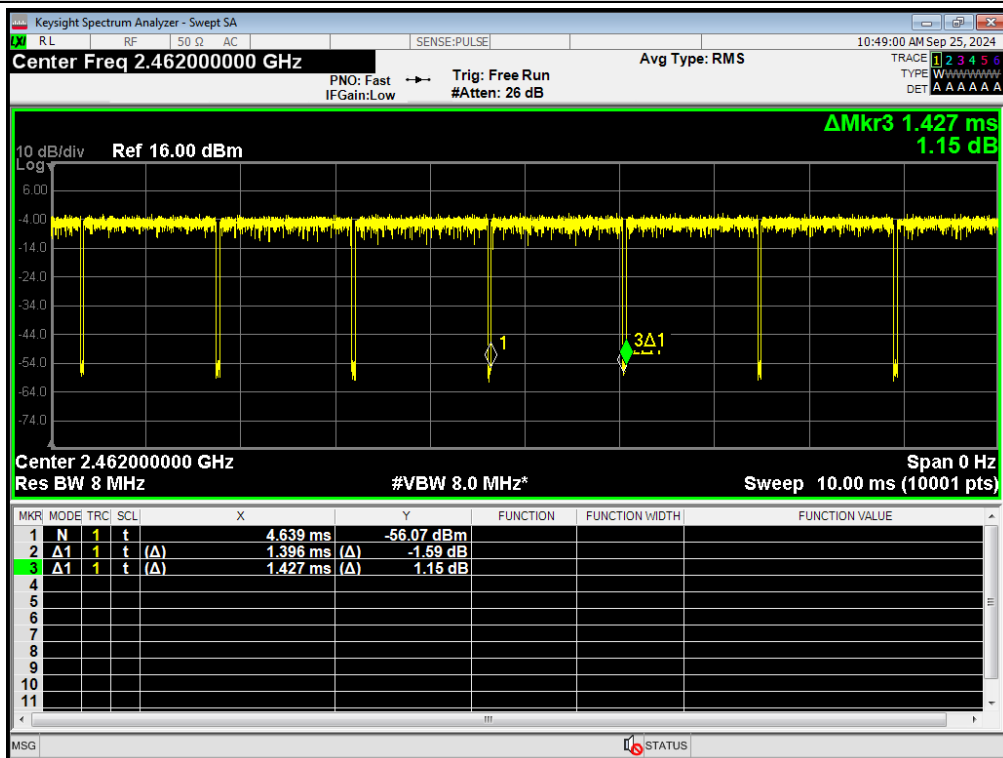


IEEE 802.11g_20MHz_Channel 11

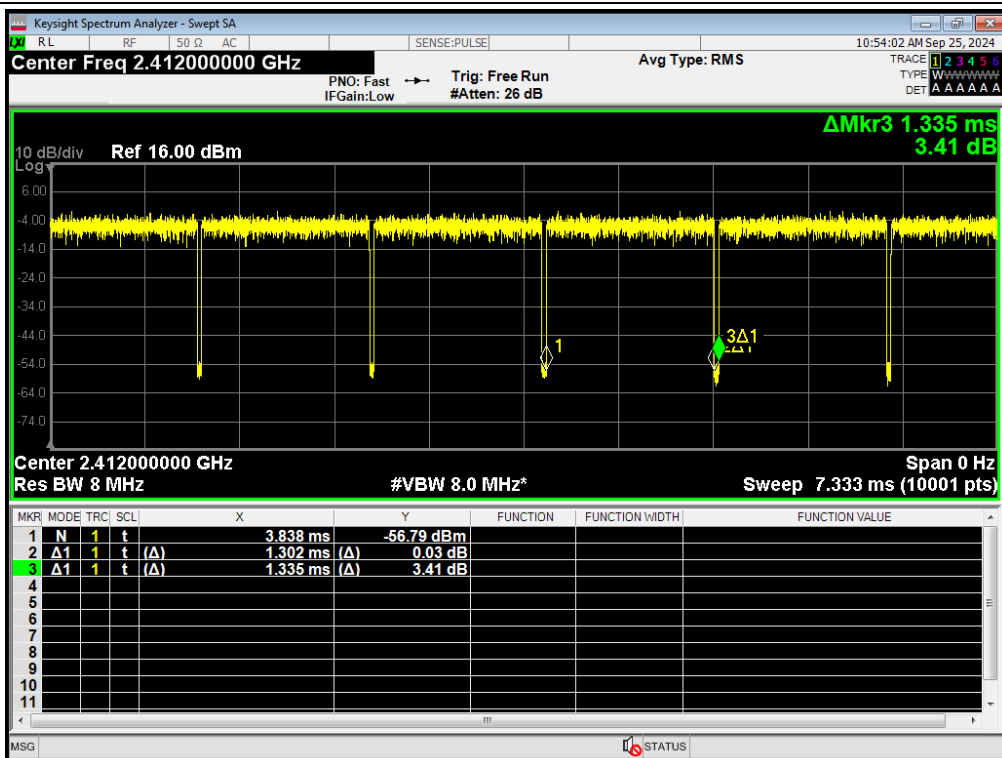

IEEE 802.11n_20MHz_Channel 1

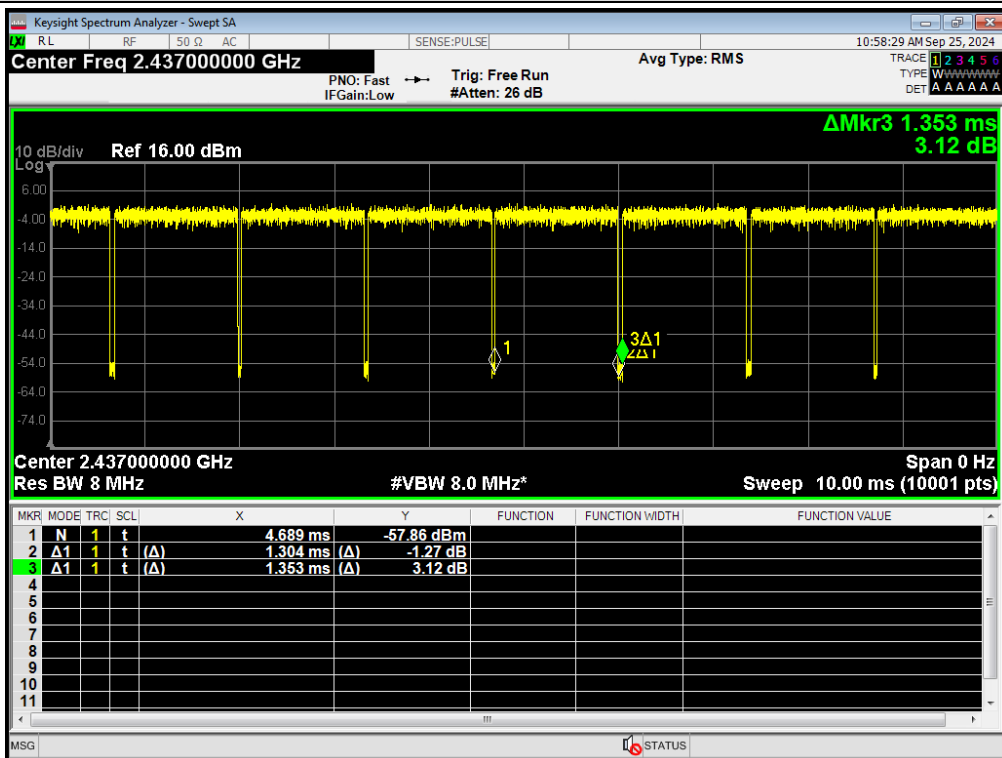

IEEE 802.11n_20MHz_Channel 6

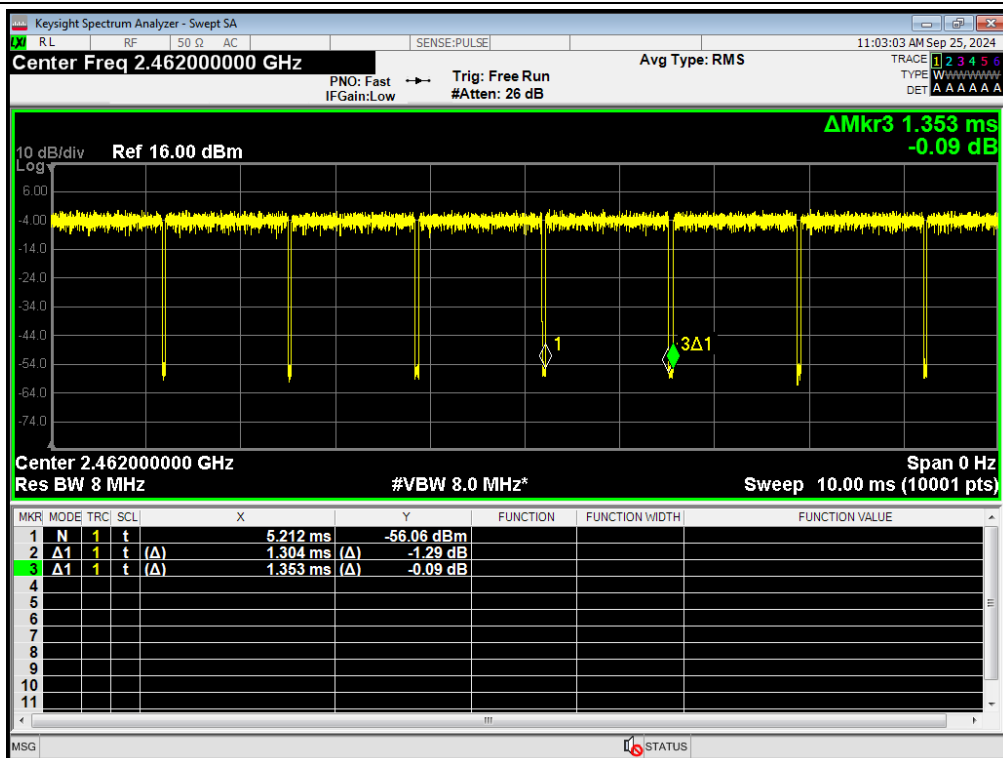


IEEE 802.11n_20MHz_Channel 11

Power Spectral Density


Test Result

Mode	Channel	PSD (dBm/3kHz) Ant. 0	Limit (dBm/3kHz)	Result
IEEE 802.11b	1	-12.935	≤8	PASS
	6	-9.791		PASS
	11	-19.642		PASS
IEEE 802.11g	1	-27.156		PASS
	6	-27.060		PASS
	11	-27.542		PASS
IEEE 802.11n_20	1	-28.236		PASS
	6	-25.965		PASS
	11	-25.903		PASS


Test Graphs

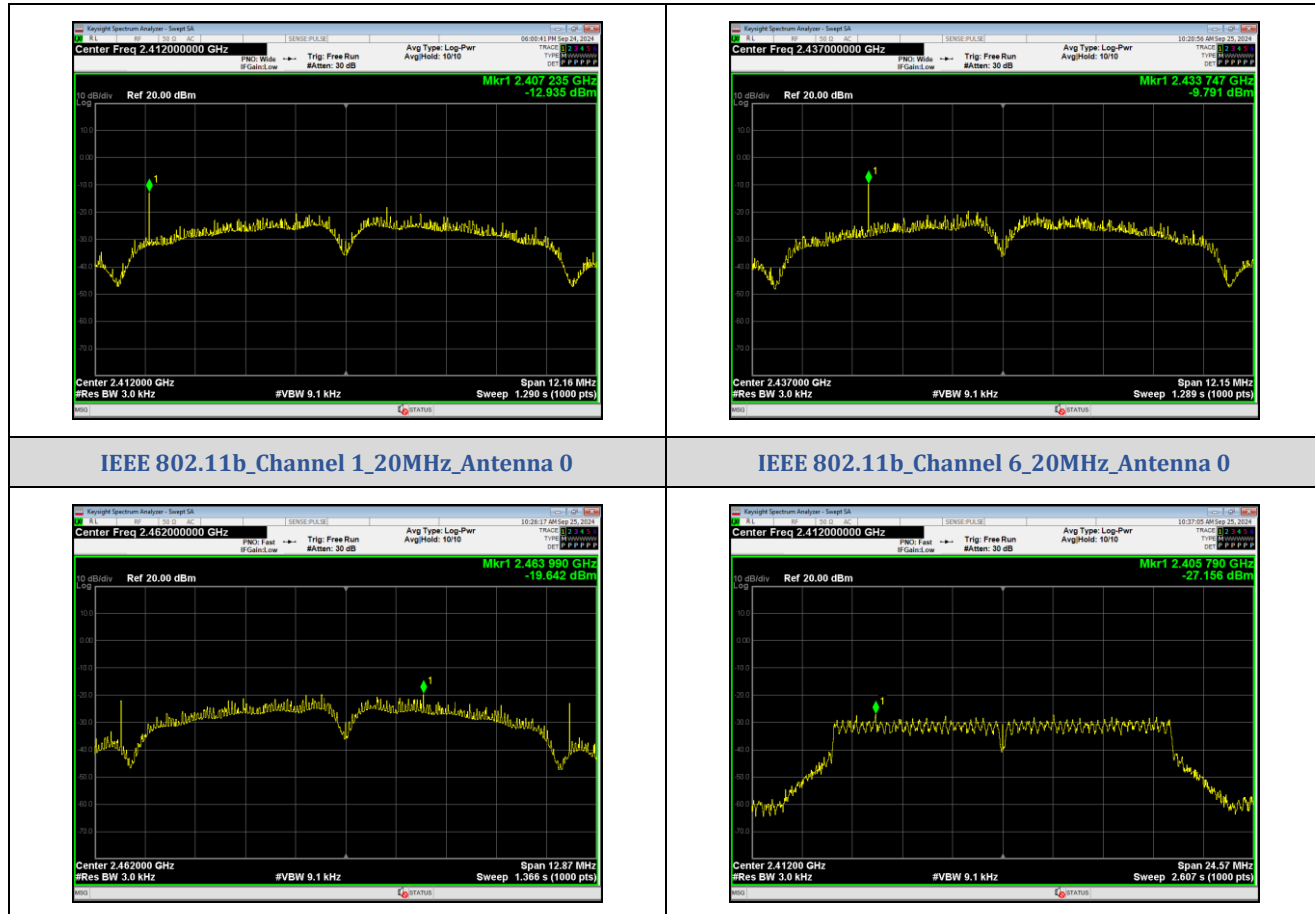


IEEE 802.11b_Channel 11_20MHz_Antenna 0

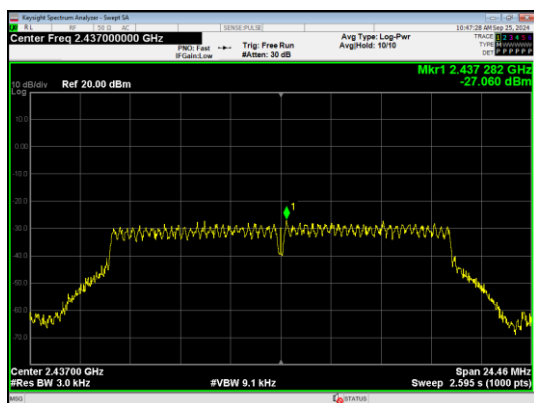


IEEE 802.11g_Channel 1_20MHz_Antenna 0

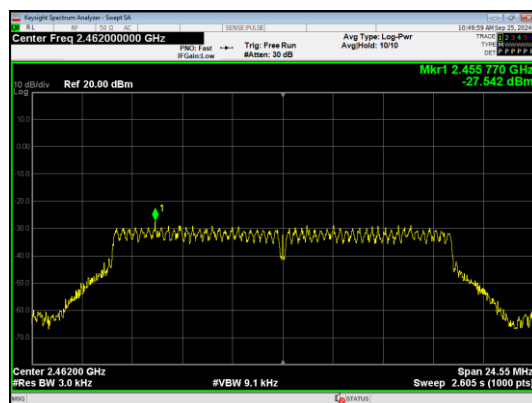


IEEE 802.11g_Channel 6_20MHz_Antenna 0

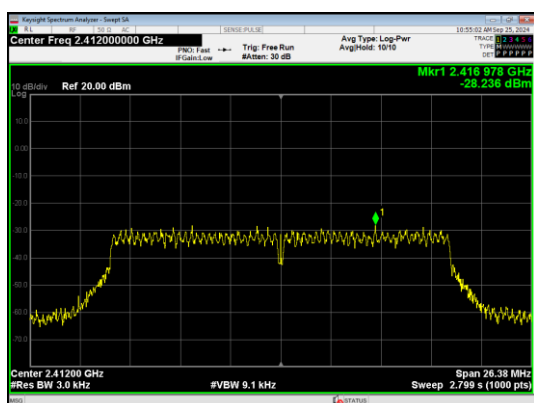

IEEE 802.11g_Channel 11_20MHz_Antenna 0

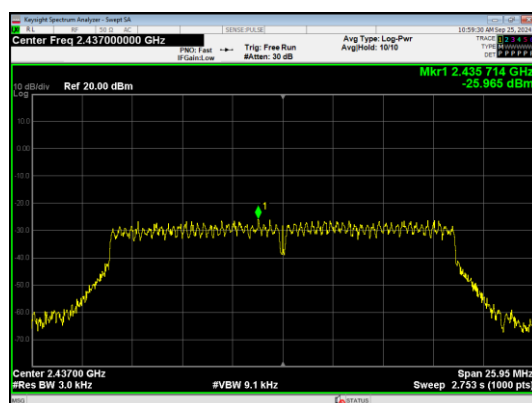

IEEE 802.11n_Channel 1_20MHz_Antenna 0

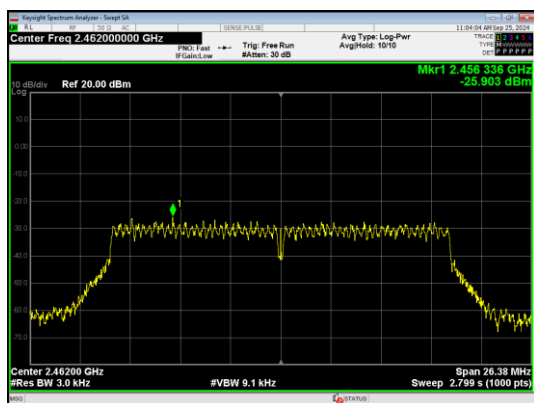

IEEE 802.11n_Channel 6_20MHz_Antenna 0

IEEE 802.11n_Channel 11_20MHz_Antenna 0

END OF THE REPORT