

# TEST REPORT

Report Reference No. ...... CTL1705052031-SAR

Compiled by: ( position+printed name+signature)

Tested by:

( position+printed name+signature) Approved by:

Allen Wang (File administrators)

> Nice Nona (Test Engineer)

> > Ivan Xie (Manager)

Allen Wang
Nice Nong

( position+printed name+signature)

Product Name ...... GPS watch

Model/Type reference ...... GATOR 1

List Model(s)...... GATOR 2, GATOR 3, GATOR 4, GATOR 5, GATOR 6, GATOR 7, GATOR 8, GATOR 9

Trade Mark..... Gator

FCC ID...... 2AA2S-GATORX

Applicant's name ...... Gator Group Co.,Ltd

8 Floor, Huichao Technology Building, No 12 Jinhai Road, Baoan Address of applicant.....:

District, Shenzhen, China

Authorized Lab.....: Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,

Nanshan District, Shenzhen, China 518055

Test specification.....:

ANSI C95.1-1999

Standard ...... 47CFR §2.1093

KDB 447498

TRF Originator ...... Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Date of Receipt...... May 19, 2017

Date of Test Date..... May 20, 2017–May 21, 2017

**Data of Issue**..... May 24, 2017

Result..... Pass

#### Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# **TEST REPORT**

Test Report No. :	CTL1705052031-SAR	May 24, 2017
rest Report No	C1L1/05052051-5AR	Date of issue

Equipment under Test : GPS watch

Model /Type : GATOR 1

Listed Models : GATOR 2, GATOR 3, GATOR 4, GATOR 5, GATOR

6, GATOR 7, GATOR 8, GATOR 9

Applicant : Gator Group Co.,Ltd

Address : 8 Floor, Huichao Technology Building, No 12 Jinhai

Road, Baoan District, Shenzhen, China

Manufacturer : Gator Group Co.,Ltd

Address 8 Floor, Huichao Technology Building, No 12 Jinhai

Road, Baoan District, Shenzhen, China

Test result	Pass *

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Testing Techno

# \*\* Modified History \*\*

Revisions	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2017-05-24	CTL1705052031-SAR	Tracy Qi



1.1 TEST STANDARDS.				Table of Co	ontents		Page
1.2 SUMMANY SAR RISURES. 5 1.3 TEST FACILITY	1	SUMMARY					5
1.2 SUMMONY SAR RESULTS		1.1 TEST STAND	ARDS				5
1.3.1   Address of the test loboratory   7   1.3.2   Test Lab Facility   77   1.4   STREAMT OF THE MEASUREMENT UNCERTAINTY   7.7   7.1   7.5   SYSTEM CHECK UNCERTAINTY   7.7							
1.3.2 Test Lab Facility		1.3 TEST FACILITY					7
1.4 STATEMENT OF THE MEASUREMENT UNCERTAINTY		1.3.1 Address (	of the test laboratory				7
1.5 SYSTEM CHECK UNCERTAINTY. 88 2 GENERAL INFORMATION. 10 2.1 ENVIRONMENTAL CONDITIONS. 10 2.2 GENERAL DESCRIPTION OF EUT. 10 2.3 DESCRIPTION OF TEST MODES. 10 2.4 EQUIPMENTS USED DURING THE TEST 1 11 2.5 SAR MEASUREMENT SYSTEM 12 2.5.1 SAR Measurement Set-up 12 2.5.2 DASY4 E-field Probe System 13 2.5.3 Phontoms. 14 2.5.4 Device Holder 14 2.5.5 Sanning Procedure 15 2.5.6 Data Storage and Evaluation 18 3 POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM 20 3.1 GENERAL CONSIDERATIONS 20 3.2 BODY-WORN DEVICE 21 4 MEASUREMENT PROCEDURES 22 4.1 CONDUCTED POWER MEASUREMENT 22 4.2 SAR MEASUREMENT 22 4.2 SAR MEASUREMENT 22 5.5 TISSUE SIMULATING LIQUID 23 5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID 23 5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID 23 5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID 23 5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID 23 5.2 TISSUE CALIBRATION RESULTS 26 7.1 CONDUCTED POWER RESULTS 26 7.1 CONDUCTED POWER REMOVES SIMULATING LIQUID 23 5.2 TISSUE CALIBRATION GENUTS 26 7.1 CONDUCTED POWER REMOVES SIMULATING LIQUID 23 5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID 23 5.2 TISSUE CALIBRATION GENUTS 26 7.1 CONDUCTED POWER RESULTS 26 7.2 SAR TEST RESULTS SUMMARY 28 7.2.1 General Remark 28 7.2.2 SIMULATING LIQUID 39 8.1 THE COMPOSITION SAND RESULTS 36 8.2 CALIBRATION CERTIFICATE 43 8.1 PROBE CALIBRATION CERTIFICATE 43 8.1 PROBE CALIBRATION CERTIFICATE 54 8.3 DISDOVY DIPOLE CALIBRATION CERTIFICATE 54 8.3 DISDOVY DIPOLE CALIBRATION CERTIFICATE 54 8.4 DAE4 CALIBRATION CERTIFICATE 55 8.4 DAE4 CALIBRATION CERTIFICATE 57 9 TEST SETUP PHOTOS. 75		1.3.2 Test Lab I	Facility				7
2 GENERAL INFORMATION. 10 2.1 ENVIRONMENTAL CONDITIONS. 10 2.2 GENERAL DESCRIPTION OF EUT. 10 2.3 DESCRIPTION OF TEST MODES. 10 2.4 EQUIPMENTS USED DURING THE TEST 11 2.5 SAR MEASUREMENTS SYSTEM 12 2.5.1 SAR MEASUREMENTS SYSTEM 12 2.5.2 DASY4 E-field Probe System 13 2.5.3 Phontoms. 11 2.5.5 SAR Measurement Set-up 12 2.5.5 Phontoms. 11 2.5.5 San in Probe System 13 2.5.3 Phontoms. 14 2.5.5 Scanning Procedure 14 2.5.5 Scanning Procedure 14 2.5.5 Scanning Procedure 15 2.5.6 Data Storage and Evaluation 18 3 POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM 18 3.1 GENERAL CONSIDERATIONS 12 3.2 BODY-WORN DEVICE 12 4.1 CONDUCTED POWER MEASUREMENT 12 4.2 SAR MEASUREMENT PROCEDURES. 22 4.1 CONDUCTED POWER MEASUREMENT 12 4.2 SAR MEASUREMENT 12 4.2 SAR MEASUREMENT 12 4.2 TISSUE SIMULATING LIQUID 23 5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID 23 5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID 23 5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID 23 5.1 TISSUE SIMULATING LIQUID 23 5.2 TISSUE CALIBRATION RESULTS 26 7.1 CONDUCTED POWER RESULTS 26 7.2 SAR TEST RESULTS SUMMARY 28 7.2.1 General Remark 29 7.2.3 SIMUltaneous SAR Evaluation 30 7.3 SYSTEM CHECK RESULTS 35 8 CALIBRATION CERTIFICATE 43 8.1 PROBE CALIBRATION CERTIFICATE 43 8.2 DB35V2 DIPOLE CALIBRATION CERTIFICATE 54 8.3 D190V2 DIPOLE CLIBRATION CERTIFICATE 54 8.3 D190V2 DIPOLE CLIBRATION CERTIFICATE 54 8.4 DA64 CALIBRATION CERTIFICATE 55 8 TEST SETUP PHOTOS. 75		1.4 STATEMENT OF	F THE MEASUREMENT UN	CERTAINTY			7
2.1       ENVIRONMENTAL CONDITIONS.       10         2.2       GENERAL DESCRIPTION OF EUT       10         2.3       DESCRIPTION OF TEST MODES.       10         2.4       EQUIPMENTS USED DURING THE TEST       11         2.5       SAR MEASUREMENTS SYSTEM       12         2.5.1       SAR MEASUREMENTS SYSTEM       12         2.5.2       DASY4 E-field Probe System       13         2.5.3       Phantons       14         2.5.4       Device Holder.       14         2.5.5       Scanning Procedure.       15         2.5.6       Data Storage and Evaluation.       18         3       POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM       20         3.1       GENERAL CONSIDERATIONS       20         3.2       BODY-WORN DEVICE       21         4       MEASUREMENT PROCEDURES.       22         4.1       CONDUCTED POWER MEASUREMENT       22         4.2.1       GSM Test Configuration       22         5.2       TISSUE SIMULATING LIQUID       23         5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2       TISSUE CALIBRATION RESULTS       26         7.2       TONDICTED POWER RESULTS		1.5 SYSTEM CHECK	k Uncertainty				8
2.2       General Description of EUT       10         2.3       Description of Test Modes       10         2.4       Equipment's User During the Test       11         2.5       SAR Measurement Set-up       12         2.5.1       SAR Measurement Set-up       12         2.5.2       DASY4 E-field Probe System       13         2.5.3       Phantoms       14         2.5.4       Device Holder       14         2.5.5       Scanning Procedure       15         2.5.6       Data Storage and Evaluation       18         3       POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM       20         3.1       GENERAL CONSIDERATIONS       20         3.2       BODY-WORN DEVICE       21         4       MEASUREMENT PROCEDURES       22         4.1       CONDUCTED POWER MEASUREMENT       22         4.2       SAR MEASUREMENT       22         4.2.1       GSM Test Configuration       22         5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2       TISSUE CALIBRATION RESULT       23         7.1       CONDUCTED POWER RESULTS <td>2</td> <td>GENERAL INFORI</td> <td>MATION</td> <td></td> <td></td> <td></td> <td>10</td>	2	GENERAL INFORI	MATION				10
2.3 DESCRIPTION OF TEST MODES		2.1 ENVIRONMEN	TAL CONDITIONS				10
2.4       EQUIPMENTS USED DURING THE TEST       11         2.5       SAR MEASUREMENTS SYSTEM       12         2.5.1       SAR MEASUREMENTS SYSTEM       12         2.5.2       DASY4 E-field Probe System       13         2.5.3       Phantoms       14         2.5.4       Device Holder       14         2.5.5       Scanning Procedure       15         2.5.6       Data Storage and Evaluation       18         3       POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM       20         3.1       GENERAL CONSIDERATIONS       20         3.2       BOOY-WORN DEVICE       21         4       MEASUREMENT PROCEDURES       22         4.1       CONDUCTED POWER MEASUREMENT       22         4.2.1       GSM Test Configuration       22         5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2       TISSUE SIMULATING LIQUID       23         5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2       TISSUE CALIBRATION RESULT       23         7.1       CONDUCTED POWER RESULTS       26         7.2.1       SAR TEST RESULTS SUMMARY       28         7.2.2       SAR TEST RESULTS		2.2 GENERAL DES	CRIPTION OF EUT				10
2.5       SAR Measurement Set-up       12         2.5.1       SAR Measurement Set-up       12         2.5.2       DASYA E-field Probe System       13         2.5.3       Phontoms       14         2.5.4       Device Holder       14         2.5.5       Scanning Procedure       15         2.5.6       Data Storage and Evaluation       18         3       POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM       20         3.1       GENERAL CONSIDERATIONS       20         3.2       BODY-WORN DEVICE       21         4       MEASUREMENT PROCEDURES       22         4.1       CONDUCTED POWER MEASUREMENT       22         4.2       SAR MEASUREMENT       22         4.2.1       GSM Test Configuration       22         5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2       TISSUE CALIBRATION RESULT       23         6       SYSTEM CHECK       24         7       TEST CONDITIONS AND RESULTS       26         7.1       CONDUCTED POWER RESULTS       26         7.2.1       GENERAL RESULTS       28		2.3 DESCRIPTION (	OF TEST MODES				10
2.5.1   SAR Measurement Set-up		2.4 EQUIPMENTS	USED DURING THE TEST.				11
2.5.2 DASY4 E-field Probe System       13         2.5.3 Phantoms       14         2.5.4 Device Holder       14         2.5.5 Scanning Procedure       15         2.5.6 Data Storage and Evaluation       18         3 POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM       20         3.1 GENERAL CONSIDERATIONS       20         3.2 BODY-WORN DEVICE       21         4 MEASUREMENT PROCEDURES       21         4.1 CONDUCTED POWER MEASUREMENT       22         4.2.1 GSM Test Configuration       22         4.2.1 GSM Test Configuration       22         5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2 TISSUE SIMULATING LIQUID       23         5.2 TISSUE CALIBRATION RESULT       23         6 SYSTEM CHECK       24         7 TEST CONDITIONS AND RESULTS       26         7.1 CONDUCTED POWER RESULTS       26         7.2 SAR TEST RESULTS SUMMARY       28         7.2.2 Standalone SAR       29         7.2.3 Simultaneous SAR Evaluation       30         7.3 System CHeck Results       31         7.4 SAR TEST GRENUTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       54		2.5 SAR MEASUR	EMENTS SYSTEM				12
2.5.3       Phantoms       14         2.5.4       Device Holder       14         2.5.5       Scanning Procedure       15         2.5.6       Data Storage and Evaluation       18         3       POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM       20         3.1       GENERAL CONSIDERATIONS       20         3.2       BODY-WORN DEVICE       21         4       MEASUREMENT PROCEDURES       22         4.1       CONDUCTED POWER MEASUREMENT       22         4.2       SAR MEASUREMENT       22         4.2.1       GSM Test Configuration       22         5       TISSUE SIMULATING LIQUID       23         5.2       TISSUE CALIBRATION RESULT       23         5.2       TISSUE CALIBRATION RESULTS       26         7.1       CONDUCTED POWER RESULTS       26         7.2       SAR TEST RESULTS SUMMARY       28         7.2.2       Standalone SAR       28         7.2.3       Simultaneous SAR Evaluation       30         7.3       SYSTEM CHECK RESULTS       35         8       CALIBRATION CERTIFICATE       43         8.1       PROBE CALIBRATION CERTIFICATE       43         8.2		2.5.1 SAR Mea	surement Set-up				12
2.5.4 Device Holder       14         2.5.5 Scanning Procedure       15         2.5.6 Data Storage and Evaluation       18         3 POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM       20         3.1 GENERAL CONSIDERATIONS       20         3.2 BODY-WORN DEVICE       21         4 MEASUREMENT PROCEDURES       22         4.1 CONDUCTED POWER MEASUREMENT       22         4.2 SAR MEASUREMENT       22         4.2.1 GSM Test Configuration       22         5 TISSUE SIMULATING LIQUID       23         5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2 TISSUE CALIBRATION RESULT       23         6 SYSTEM CHECK       24         7 TEST CONDITIONS AND RESULTS       26         7.1 CONDUCTED POWER RESULTS       26         7.2 SAR TEST RESULTS SUMMARY       26         7.2.1 General Remark       28         7.2.2 Standalone SAR       28         7.2.3 Simultaneous SAR Evaluation       30         7.3 SYSTEM CHECK RESULTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       43         8.2 D835V2 Dipole Calibration Certificate       54         8.3 D1900V2 Dipole Calibration Certificate       5		2.5.2 DASY4 E-	field Probe System				13
2.5.5       Scanning Procedure       .15         2.5.6       Data Storage and Evaluation       .18         3       POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM       .20         3.1       GENERAL CONSIDERATIONS       .20         3.2       BODY-WORN DEVICE       .21         4       MEASUREMENT PROCEDURES       .22         4.1       CONDUCTED POWER MEASUREMENT       .22         4.2       SAR MEASUREMENT       .22         4.2.1       GSM Test Configuration       .22         5       TISSUE SIMULATING LIQUID       .23         5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       .23         5.2       TISSUE CALIBRATION RESULT       .23         6       SYSTEM CHECK       .24         7       TEST CONDITIONS AND RESULTS       .26         7.1       CONDUCTED POWER RESULTS       .26         7.2       SAR TEST RESULTS SUMMARY       .28         7.2.1       General Remark       .28         7.2.2       Standalone SAR       .29         7.2.3       Simultaneous SAR Evaluation       .30         7.3       SYSTEM CHECK RESULTS       .31         7.4       SAR TEST GRAPH RESULTS       .35		2.5.3 Phantom	S				14
2.5.6 Data Storage and Evaluation		2.5.4 Device Ho	older				14
2.5.6 Data Storage and Evaluation		2.5.5 Scanning	Procedure				15
3.1 GENERAL CONSIDERATIONS       20         3.2 BODY-WORN DEVICE       21         4 MEASUREMENT PROCEDURES.       22         4.1 CONDUCTED POWER MEASUREMENT       22         4.2 SAR MEASUREMENT       22         4.2.1 GSM Test Configuration       22         5 TISSUE SIMULATING LIQUID       23         5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2 TISSUE CALIBRATION RESULT       23         6 SYSTEM CHECK       24         7 TEST CONDITIONS AND RESULTS       26         7.1 CONDUCTED POWER RESULTS       26         7.2 SAR TEST RESULTS SUMMARY       28         7.2.1 General Remark       28         7.2.2 Standalone SAR       29         7.2.3 Simultaneous SAR Evaluation       30         7.3 SYSTEM CHECK RESULTS       31         7.4 SAR TEST GRAPH RESULTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       43         8.2 D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4 DAE4 CALIBRATION CERTIFICATE       54         8.4 DAE4 CALIBRATION CERTIFICATE       71         9 TEST SETUP PHOTOS       75		2.5.6 Data Stor	rage and Evaluation				18
3.1 GENERAL CONSIDERATIONS       20         3.2 BODY-WORN DEVICE       21         4 MEASUREMENT PROCEDURES.       22         4.1 CONDUCTED POWER MEASUREMENT       22         4.2 SAR MEASUREMENT       22         4.2.1 GSM Test Configuration       22         5 TISSUE SIMULATING LIQUID       23         5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2 TISSUE CALIBRATION RESULT       23         6 SYSTEM CHECK       24         7 TEST CONDITIONS AND RESULTS       26         7.1 CONDUCTED POWER RESULTS       26         7.2 SAR TEST RESULTS SUMMARY       28         7.2.1 General Remark       28         7.2.2 Standalone SAR       29         7.2.3 Simultaneous SAR Evaluation       30         7.3 SYSTEM CHECK RESULTS       31         7.4 SAR TEST GRAPH RESULTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       43         8.2 D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4 DAE4 CALIBRATION CERTIFICATE       71         9 TEST SETUP PHOTOS       75	3	POSITION OF THE	E WIRELESS DEVICE I	N RELATION TO TH	IE PHANTOM	<sub>1</sub> 1	20
3.2       BODY-WORN DEVICE       21         4       MEASUREMENT PROCEDURES       22         4.1       CONDUCTED POWER MEASUREMENT       22         4.2       SAR MEASUREMENT       22         4.2.1       GSM Test Configuration       22         5       TISSUE SIMULATING LIQUID       23         5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2       TISSUE CALIBRATION RESULT       23         6       SYSTEM CHECK       24         7       TEST CONDITIONS AND RESULTS       26         7.1       CONDUCTED POWER RESULTS       26         7.2       SAR TEST RESULTS SUMMARY       28         7.2.1       General Remark       28         7.2.2       Standalone SAR       29         7.2.3       Simultaneous SAR Evaluation       30         7.3       SYSTEM CHECK RESULTS       31         7.4       SAR TEST GRAPH RESULTS       35         8       CALIBRATION CERTIFICATE       43         8.1       PROBE CALIBRATION CERTIFICATE       43         8.2       D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4       DAE4 CALIBRATION CERTIFICATE       71         9							
4       MEASUREMENT PROCEDURES       22         4.1       CONDUCTED POWER MEASUREMENT       22         4.2       SAR MEASUREMENT       22         4.2.1       GSM Test Configuration       22         5       TISSUE SIMULATING LIQUID       23         5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2       TISSUE CALIBRATION RESULT       23         6       SYSTEM CHECK       24         7       TEST CONDITIONS AND RESULTS       26         7.1       CONDUCTED POWER RESULTS       26         7.2       SAR TEST RESULTS SUMMARY       28         7.2.1       General Remark       28         7.2.2       Standalone SAR       29         7.2.3       Simultaneous SAR Evaluation       30         7.3       SYSTEM CHECK RESULTS       31         7.4       SAR TEST GRAPH RESULTS       35         8       CALIBRATION CERTIFICATE       43         8.1       PROBE CALIBRATION CERTIFICATE       43         8.2       D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3       D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4       DAE4 CALIBRATION CERTIFICATE       54							
4.1       CONDUCTED POWER MEASUREMENT       22         4.2       SAR MEASUREMENT       22         4.2.1       GSM Test Configuration       22         5       TISSUE SIMULATING LIQUID       23         5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2       TISSUE CALIBRATION RESULT       23         6       SYSTEM CHECK       24         7       TEST CONDITIONS AND RESULTS       26         7.1       CONDUCTED POWER RESULTS       26         7.2       SAR TEST RESULTS SUMMARY       28         7.2.1       General Remark       28         7.2.2       Standalone SAR       29         7.2.3       Simultaneous SAR Evaluation       30         7.3       SYSTEM CHECK RESULTS       31         7.4       SAR TEST GRAPH RESULTS       35         8       CALIBRATION CERTIFICATE       43         8.1       PROBE CALIBRATION CERTIFICATE       43         8.2       D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4       DAE4 CALIBRATION CERTIFICATE       54         8.4       DAE4 CALIBRATION CERTIFICATE       71         9       TEST SETUP PHOTOS       75							
4.2 SAR MEASUREMENT       22         4.2.1 GSM Test Configuration       22         5 TISSUE SIMULATING LIQUID       23         5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2 TISSUE CALIBRATION RESULT       23         6 SYSTEM CHECK       24         7 TEST CONDITIONS AND RESULTS       26         7.1 CONDUCTED POWER RESULTS       26         7.2 SAR TEST RESULTS SUMMARY       28         7.2.1 General Remark       28         7.2.2 Standalone SAR       29         7.2.3 Simultaneous SAR Evaluation       30         7.3 SYSTEM CHECK RESULTS       31         7.4 SAR TEST GRAPH RESULTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       43         8.2 D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3 D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4 DAE4 CALIBRATION CERTIFICATE       62         8.4 DAE4 CALIBRATION CERTIFICATE       71         9 TEST SETUP PHOTOS       75	4						
4.2 SAR MEASUREMENT       22         4.2.1 GSM Test Configuration       22         5 TISSUE SIMULATING LIQUID       23         5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2 TISSUE CALIBRATION RESULT       23         6 SYSTEM CHECK       24         7 TEST CONDITIONS AND RESULTS       26         7.1 CONDUCTED POWER RESULTS       26         7.2 SAR TEST RESULTS SUMMARY       28         7.2.1 General Remark       28         7.2.2 Standalone SAR       29         7.2.3 Simultaneous SAR Evaluation       30         7.3 SYSTEM CHECK RESULTS       31         7.4 SAR TEST GRAPH RESULTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       43         8.2 D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3 D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4 DAE4 CALIBRATION CERTIFICATE       62         8.4 DAE4 CALIBRATION CERTIFICATE       71         9 TEST SETUP PHOTOS       75		4.1 CONDUCTED B	OWER MEASUREMENT				22
4.2.1 GSM Test Configuration       22         5 TISSUE SIMULATING LIQUID       23         5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2 TISSUE CALIBRATION RESULT       23         6 SYSTEM CHECK       24         7 TEST CONDITIONS AND RESULTS       26         7.1 CONDUCTED POWER RESULTS       26         7.2 SAR TEST RESULTS SUMMARY       28         7.2.1 General Remark       28         7.2.2 Standalone SAR       29         7.2.3 Simultaneous SAR Evaluation       30         7.3 SYSTEM CHECK RESULTS       31         7.4 SAR TEST GRAPH RESULTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       43         8.2 D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3 D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4 DAE4 CALIBRATION CERTIFICATE       62         8.4 DAE4 CALIBRATION CERTIFICATE       71         9 TEST SETUP PHOTOS       75		4.1 CONDOCTEDT	EMENT			//	22
5 TISSUE SIMULATING LIQUID       23         5.1 THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2 TISSUE CALIBRATION RESULT       23         6 SYSTEM CHECK       24         7 TEST CONDITIONS AND RESULTS       26         7.1 CONDUCTED POWER RESULTS       26         7.2 SAR TEST RESULTS SUMMARY       28         7.2.1 General Remark       28         7.2.2 Standalone SAR       29         7.2.3 Simultaneous SAR Evaluation       30         7.3 SYSTEM CHECK RESULTS       31         7.4 SAR TEST GRAPH RESULTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       43         8.2 D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3 D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4 DAE4 CALIBRATION CERTIFICATE       71         9 TEST SETUP PHOTOS       75							
5.1       THE COMPOSITION OF THE TISSUE SIMULATING LIQUID       23         5.2       TISSUE CALIBRATION RESULT       23         6       SYSTEM CHECK       24         7       TEST CONDITIONS AND RESULTS       26         7.1       CONDUCTED POWER RESULTS       26         7.2       SAR TEST RESULTS SUMMARY       28         7.2.1       General Remark       28         7.2.2       Standalone SAR       29         7.2.3       Simultaneous SAR Evaluation       30         7.3       SYSTEM CHECK RESULTS       31         7.4       SAR TEST GRAPH RESULTS       35         8       CALIBRATION CERTIFICATE       43         8.1       PROBE CALIBRATION CERTIFICATE       43         8.2       D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3       D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4       DAE4 CALIBRATION CERTIFICATE       71         9       TEST SETUP PHOTOS       75		4.2.1 05177 1650	conjugaration				
5.2       TISSUE CALIBRATION RESULT       23         6       SYSTEM CHECK       24         7       TEST CONDITIONS AND RESULTS       26         7.1       CONDUCTED POWER RESULTS       26         7.2       SAR TEST RESULTS SUMMARY       28         7.2.1       General Remark       28         7.2.2       Standalone SAR       29         7.2.3       Simultaneous SAR Evaluation       30         7.3       SYSTEM CHECK RESULTS       31         7.4       SAR TEST GRAPH RESULTS       35         8       CALIBRATION CERTIFICATE       43         8.1       PROBE CALIBRATION CERTIFICATE       43         8.2       D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3       D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3       D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4       DAE4 CALIBRATION CERTIFICATE       71         9       TEST SETUP PHOTOS       75	5						
6       SYSTEM CHECK       24         7       TEST CONDITIONS AND RESULTS       26         7.1       CONDUCTED POWER RESULTS       26         7.2       SAR TEST RESULTS SUMMARY       28         7.2.1       General Remark       28         7.2.2       Standalone SAR       29         7.2.3       Simultaneous SAR Evaluation       30         7.3       SYSTEM CHECK RESULTS       31         7.4       SAR TEST GRAPH RESULTS       35         8       CALIBRATION CERTIFICATE       43         8.1       PROBE CALIBRATION CERTIFICATE       43         8.2       D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3       D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4       DAE4 CALIBRATION CERTIFICATE       71         9       TEST SETUP PHOTOS       75							
7 TEST CONDITIONS AND RESULTS       26         7.1 CONDUCTED POWER RESULTS       26         7.2 SAR TEST RESULTS SUMMARY       28         7.2.1 General Remark       28         7.2.2 Standalone SAR       29         7.2.3 Simultaneous SAR Evaluation       30         7.3 SYSTEM CHECK RESULTS       31         7.4 SAR TEST GRAPH RESULTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       43         8.2 D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3 D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4 DAE4 CALIBRATION CERTIFICATE       62         8.4 DAE4 CALIBRATION CERTIFICATE       71         9 TEST SETUP PHOTOS       75		5.2 TISSUE CALIBR	RATION RESULT				23
7 TEST CONDITIONS AND RESULTS       26         7.1 CONDUCTED POWER RESULTS       26         7.2 SAR TEST RESULTS SUMMARY       28         7.2.1 General Remark       28         7.2.2 Standalone SAR       29         7.2.3 Simultaneous SAR Evaluation       30         7.3 SYSTEM CHECK RESULTS       31         7.4 SAR TEST GRAPH RESULTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       43         8.2 D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3 D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4 DAE4 CALIBRATION CERTIFICATE       62         8.4 DAE4 CALIBRATION CERTIFICATE       71         9 TEST SETUP PHOTOS       75	6	SYSTEM CHECK	0			0	24
7.1       CONDUCTED POWER RESULTS       26         7.2       SAR TEST RESULTS SUMMARY       28         7.2.1       General Remark.       28         7.2.2       Standalone SAR       29         7.2.3       Simultaneous SAR Evaluation       30         7.3       SYSTEM CHECK RESULTS.       31         7.4       SAR TEST GRAPH RESULTS       35         8       CALIBRATION CERTIFICATE       43         8.1       PROBE CALIBRATION CERTIFICATE       43         8.2       D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3       D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4       DAE4 CALIBRATION CERTIFICATE       62         8.4       DAE4 CALIBRATION CERTIFICATE       71         9       TEST SETUP PHOTOS       75		3131 EWI CITECK				~O`//	
7.2       SAR TEST RESULTS SUMMARY       28         7.2.1       General Remark       28         7.2.2       Standalone SAR       29         7.2.3       Simultaneous SAR Evaluation       30         7.3       SYSTEM CHECK RESULTS       31         7.4       SAR TEST GRAPH RESULTS       35         8       CALIBRATION CERTIFICATE       43         8.1       PROBE CALIBRATION CERTIFICATE       43         8.2       D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3       D1900V2 DIPOLE CALIBRATION CERTIFICATE       62         8.4       DAE4 CALIBRATION CERTIFICATE       71         9       TEST SETUP PHOTOS       75	7	TEST CONDITION	S AND RESULTS				26
7.2.1 General Remark		7.1 CONDUCTED P	OWER RESULTS				26
7.2.2 Standalone SAR       29         7.2.3 Simultaneous SAR Evaluation       30         7.3 SYSTEM CHECK RESULTS       31         7.4 SAR TEST GRAPH RESULTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       43         8.2 D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3 D1900V2 DIPOLE CALIBRATION CERTIFICATE       54         8.4 DAE4 CALIBRATION CERTIFICATE       71         9 TEST SETUP PHOTOS       75							
7.2.3 Simultaneous SAR Evaluation       30         7.3 SYSTEM CHECK RESULTS       31         7.4 SAR TEST GRAPH RESULTS       35         8 CALIBRATION CERTIFICATE       43         8.1 PROBE CALIBRATION CERTIFICATE       43         8.2 D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3 D1900V2 DIPOLE CALIBRATION CERTIFICATE       62         8.4 DAE4 CALIBRATION CERTIFICATE       71         9 TEST SETUP PHOTOS       75		7.2.1 General F	Remark				28
7.3       SYSTEM CHECK RESULTS							
7.4       SAR TEST GRAPH RESULTS       35         8       CALIBRATION CERTIFICATE       43         8.1       PROBE CALIBRATION CERTIFICATE       43         8.2       D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3       D1900V2 DIPOLE CALIBRATION CERTIFICATE       62         8.4       DAE4 CALIBRATION CERTIFICATE       71         9       TEST SETUP PHOTOS       75		7.2.3 Simultan	eous SAR Evaluation.				30
8       CALIBRATION CERTIFICATE       43         8.1       PROBE CALIBRATION CERTIFICATE       43         8.2       D835V2 Dipole Calibration Certificate       54         8.3       D1900V2 Dipole Calibration Certificate       62         8.4       DAE4 Calibration Certificate       71         9       TEST SETUP PHOTOS       75		7.3 SYSTEM CHECK	k Results				31
8.1       PROBE CALIBRATION CERTIFICATE       43         8.2       D835V2 DIPOLE CALIBRATION CERTIFICATE       54         8.3       D1900V2 DIPOLE CALIBRATION CERTIFICATE       62         8.4       DAE4 CALIBRATION CERTIFICATE       71         9       TEST SETUP PHOTOS       75		7.4 SAR TEST GRA	APH RESULTS				35
8.2       D835V2 Dipole Calibration Certificate       54         8.3       D1900V2 Dipole Calibration Certificate       62         8.4       DAE4 Calibration Certificate       71         9       TEST SETUP PHOTOS       75	8	CALIBRATION CEI	RTIFICATE	•••••	•••••	•••••	43
8.3       D1900V2 DIPOLE CALIBRATION CERTIFICATE       62         8.4       DAE4 CALIBRATION CERTIFICATE       71         9       TEST SETUP PHOTOS       75		8.1 PROBE CALIBR	RATION CERTIFICATE				43
8.3       D1900V2 DIPOLE CALIBRATION CERTIFICATE       62         8.4       DAE4 CALIBRATION CERTIFICATE       71         9       TEST SETUP PHOTOS       75							
9 TEST SETUP PHOTOS75		8.3 D1900V2 DI	POLE CALIBRATION CERTI	FICATE			62
		8.4 DAE4 CALIBR	ATION CERTIFICATE				71
	9	TEST SETUP PHO	TOS				75

V1.0 Page 5 of 77 Report No.: CTL1705052031-SAR

# 1 SUMMARY

#### 1.1 TEST STANDARDS

<u>IEEE Std C95.1, 1999:</u> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

<u>IEEE Std 1528™-2003:</u> IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC Part 2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices

KDB 447498 D01 Mobile Portable RF Exposure v6: Mobile and Portable Device RF Exposure

Procedures and Equipment Authorization Policies

KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz

<u>KDB865664 D02 SAR Reporting v01r02:</u> RF Exposure Compliance Reporting and Documentation Considerations

KDB648474 D04 Handset SAR V01r03: SAR Evaluation Considerations for Wireless Handsets.

# 1.2 Summary SAR Results

**Mouth-worn Configuration** 

			Limit SAR	<sub>g</sub> 1.6 W/kg
Mode	Test Position	Channel /Frequency(MHz)	Measured SAR <sub>1g</sub> (W/kg)	Reported SAR <sub>1g</sub> (W/kg)
GSM 850	Mouth-worn (10mm distance)	190/836.6	0.210	0.224
GSM 1900	Mouth-worn (10mm distance)	661/1880.0	0.205	0.213
WCDMA Band II	Mouth-worn (10mm distance)	9400/1880	0.189	0.200
WCDMA BandV	Mouth-worn (10mm distance)	4183/836.6	0.167	0.174

Wrist-worn Configuration

			Limit SAR <sub>10</sub>	<sub>g</sub> 4.0 W/kg
Mode	Test Position	Channel /Frequency(MHz)	Measured SAR <sub>10g</sub> (W/kg)	Reported SAR <sub>10g</sub> (W/kg)
GSM 850	Wrist-worn (0mm distance)	190/836.6	1.430	1.530
GSM 1900	Wrist-worn (0mm distance)	661/1880.0	1.380	1.435
WCDMA Band II	Wrist-worn (0mm distance)	9400/1880	1.310	1.389
WCDMA BandV	Wrist-worn (0mm distance)	4183/836.6	0.990	1.030

The SAR values found for the Smartwatch are below the maximum recommended levels of 1.6W/Kg as averaged over any 1g tissue for Mouth-worn and 4.0W/Kg averaged over any 10g tissue for Wirst-worn as according to the KDB 447498 D01.

For body worn operation, this devices has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 0mm between this devices and the body of the user. User of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain inform power output.



# 1.3 Test Facility

# 1.3.1 Address of the test laboratory

#### SHENZHEN YIDAJIETONG INFORMATION TECHNOLOGY CO., LTD

No.12 Building Shangsha, Innovation & Technology Park, Futian District, Shenzhen, P.R.China

## 1.3.2 Test Lab Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: 7547

SHENZHEN YIDA JIETONG INFORMATION TECHNOLOGY CO., LTD has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar 17, 2015. Valid time is until Mar 17, 2018.

# 1.4 Statement of the measurement uncertainty

No.	Error Description	Туре	Uncertai nty Value	Probably Distributi on	Div.	(Ci) 1g	(Ci ) 10 g	Std. Unc. (1g)	Std. Unc. (10g)	Degre e of freedo m
		11 1	Measu	rement Syst	em	part				
1	Probe calibration	В	6.55%	N	1	1 7	1	6.55%	6.55%	8
2	Axial isotropy	В	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	8
3	Hemispherical isotropy	В	9.60%	R	$\sqrt{3}$	0.7	0.7	3.88%	3.88%	8
4	Boundary Effects	В	1.00%	R	$\sqrt{3}$	1	1 (	0.58%	0.58%	8
5	Probe Linearity	В	4.70%	R	$\sqrt{3}$	1	1	2.71%	2.71%	8
6	Detection limit	В	1.00%	R	$\sqrt{3}$	/1	4	0.58%	0.58%	8
7	Readout Electronics	A	0.30%	N	1	1	57	0.30%	0.30%	8
8	Response Time	В	0.00%	R	$\sqrt{3}$	0	1	0.00%	0.00%	∞
9	Integration Time	В	0.00%	R T	$\sqrt{3}$	1	1	0.00%	0.00%	∞
10	RF ambient conditions-noise	В	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	∞
11	RF ambient conditions-reflec tion	В	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	8
12	Probe positioned mech. restrictions	В	0.80%	R	$\sqrt{3}$	1	1	0.46%	0.46%	8
13	Probe positioning with respect to phantom shell	В	6.70%	R	$\sqrt{3}$	1	1	3.87%	3.87%	8
14	Max.SAR evaluation	В	2.00%	R	$\sqrt{3}$	1	1	1.15%	1.15%	80
			Test S	ample Relat	ed					
15	Test sample positioning	Α	1.86%	N	1	1	1	1.86%	1.86%	8
16	Device holder uncertainty	Α	1.70%	N	1	1	1	1.70%	1.70%	8
17	Drift of output	В	5.00%	R	$\sqrt{3}$	1	1	2.89%	2.89%	8

							1		1	
	power									
			Phante	om and Set-	up					
18	Phantom uncertainty	В	4.00%	R	$\sqrt{3}$	1	1	2.31%	2.31%	8
19	Liquid conductivity (target)	В	5.00%	R	$\sqrt{3}$	0.64	0.4 3	1.85%	1.24%	8
20	Liquid conductivity (meas.)	Α	2.50%	N	1	0.64	0.4 3	1.60%	1.08%	8
21	Liquid permittivity (target)	В	5.00%	R	√3	0.60	0.4 9	1.73%	1.41%	8
22	Liquid permittivity (meas.)	A	2.50%	N	1	0.60	0.4 9	1.50%	1.23%	8
Combined standard uncertainty	$u_{c} = \sqrt{\sum_{i=1}^{22} c_{i}^{2} u_{i}^{2}}$	2	/	/	/	/	/	10.87%	10.63 %	8
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$		检	R A	K= 2		1	21.73%	21.27 %	8

# 1.5 System Check Uncertainty

No.	Error Description	Туре	Uncertai nty Value	Probably Distributi on	Div.	(Ci) 1g	(Ci ) 10 g	Std. Unc. (1g)	Std. Unc. (10g)	Degre e of freedo m
		18	Measu	rement Syst	em	11		*		
1	Probe calibration	В	6.55%	N	1	1	10	6.55%	6.55%	∞
2	Axial isotropy	В	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	∞
3	Hemispherical isotropy	В	9.60%	R	$\sqrt{3}$	0.7	0.7	3.88%	3.88%	8
4	Boundary Effects	В	1.00%	R	$\sqrt{3}$	(P)	1	0.58%	0.58%	8
5	Probe Linearity	В	4.70%	nd T	$\sqrt{3}$	1	1	2.71%	2.71%	8
6	Detection limit	В	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	∞
7	Readout Electronics	Α	0.30%	N	1	1	1	0.30%	0.30%	8
8	Response Time	В	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	8
9	Integration Time	В	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	8
10	RF ambient conditions-noise	В	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	8
11	RF ambient conditions-reflec tion	В	1.00%	R	$\sqrt{3}$	1	1	0.58%	0.58%	8
12	Probe positioned mech. restrictions	В	0.80%	R	√3	1	1	0.46%	0.46%	8
13	Probe positioning with respect to phantom shell	В	6.70%	R	√3	1	1	3.87%	3.87%	8

14	Max.SAR evaluation	В	2.00%	R	$\sqrt{3}$	1	1	1.15%	1.15%	8
			Dip	ole Related			•		•	
15	Dev. of experimental dipole	В	5.50%	R	$\sqrt{3}$	1	1	3.18%	3.18%	8
16	Dipole Axis to Liquid Dist.	В	2.00%	R	$\sqrt{3}$	1	1	1.15%	1.15%	8
17	Input power & SAR drift	В	3.40%	R	$\sqrt{3}$	1	1	1.96%	1.96%	8
			Phant	om and Setu	ıр					
18	Phantom uncertainty	В	4.00%	R	$\sqrt{3}$	1	1	2.31%	2.31%	8
19	SAR correction	В	1.90%	R	$\sqrt{3}$	1	0.8 4	1.10%	0.92%	
20	Liquid conductivity (meas.)	А	2.50%	N	1	0.7 8	0.7 1	1.95%	1.78%	8
21	Liquid permittivity (meas.)	Α	2.50%	N	1	0.2 6	0.2 6	0.65%	0.65%	8
22	Temp. unc Conductivity	В	1.70%	R A	$\sqrt{3}$	0.7 8	0.7 1	0.77%	0.70%	8
23	Temp. unc Permittivity	В	0.30%	R	$\sqrt{3}$	0.2	0.2 6	0.04%	0.05%	8
Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{23} c_i^2}$	$u_i^2$			1	1		10.65%	10.60 %	8
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$	12		R	K=2	1	1	21.31%	21.20 %	80
	hen	CTI	7 11/21	ng T	ech .	not	55			

V1.0 Page 10 of 77 Report No.: CTL1705052031-SAR

# 2 GENERAL INFORMATION

#### 2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature	15°C - 35°C
Relative Humidity	25% - 55 %
Air Pressure	101 kPa

# 2.2 General Description of EUT

Product Name:	GPS watch
Model/Type reference:	GATOR 1
Power supply:	DC 3.7V from battery
2G	
Operation Band:	GSM850, PCS1900
Supported Type:	GSM/GPRS/EGPRS
Power Class:	GSM850:Power Class 4 PCS1900:Power Class 1
Modulation Type:	GMSK for GSM/GPRS, 8PSK for EGPRS
GSM Release Version	R99
GPRS Multislot Class	12 7
EGPRS Multislot Class	12
WCDMA	
Operation Band:	FDD Band II & Band V
Power Class:	Power Class 3
Modulation Type:	QPSK for WCDMA/HSUPA/HSDPA
WCDMA Release Version:	R99
HSDPA Release Version:	Release 7, CAT14
HSUPA Release Version:	Release 6, CAT6
DC-HSUPA Release Version:	Not Supported

Note: For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

# 2.3 Description of Test Modes

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power the EUT has been tested under typical operating condition and The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

# 2.4 Equipments Used during the Test

			Serial	Calibr	ration
Test Equipment	Manufacturer	Type/Model	Number	Last Calibration	Calibration Interval
Data Acquisition Electronics DAEx	SPEAG	DAE4	1315	2016/07/26	1
E-field Probe	SPEAG	EX3DV4	3836	2016/07/07	1
System Validation Dipole D835V2	SPEAG	D835V2	4d069	2016/07/20	3
System Validation Dipole 1900V2	SPEAG	D1900V2	5d194	2015/01/07	3
Network analyzer	Agilent	8753E	US37390562	2017/03/10	1
Wideband Communication Tester	R&S	CMW500	116581	2016/06/18	1
Dielectric Probe Kit	Agilent	85070E	US44020288	/	1
Dual Directional Coupler	Agilent	778D	50127	2016/06/18	1
Dual Directional Coupler	Agilent	772D	50348	2016/06/18	1
Attenuator	/ PE	PE7005-10	E048	2016/06/18	1
Attenuator	PE	PE7005-3	E049	2016/06/18	1
Attenuator	Woken	WK0602-X X	E050	2016/06/18	1
Power meter	Agilent	E4417A	GB41292254	2016/06/18	1
Power Meter	Agilent	E7356A	GB54762536	2016/06/18	1
Power sensor	Agilent	8481H	MY41095360	2016/06/18	1
Power Sensor	Agilent	E9327A	Us40441788	2016/06/18	1
Signal generator	IFR	2032	203002/100	2016/06/18	1
Amplifier	AR	75A250	302205	2016/06/18	1

#### Note:

Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three year extended calibration interval. Each measured dipole is expected to evalute with following criteria at least on annual interval.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated values;
- c) The most recent return-loss results, measured at least annually, deviates by no more than 20% from the previous measurement;
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 50  $\Omega$  from the provious measurement.

## 2.5 SAR Measurements System

# 2.5.1 SAR Measurement Set-up

The DASY4 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.

The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY4 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

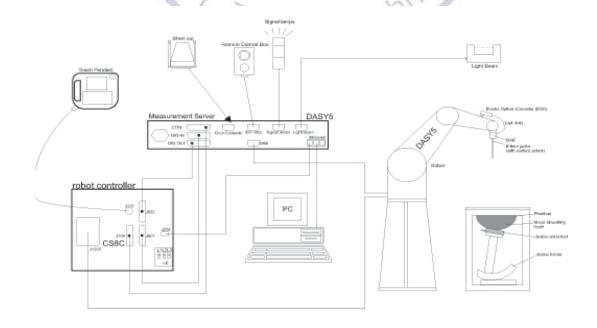

## 2.5.2 DASY4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

#### **Probe Specification**

Construction Symmetrical design with triangular core

Interleaved sensors

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration ISO/IEC 17025 calibration service available.

Frequency 10 MHz to 4 GHz;

Linearity: ± 0.2 dB (30 MHz to 4 GHz)

Directivity  $\pm 0.2 \text{ dB}$  in HSL (rotation around probe axis)

± 0.3 dB in tissue material (rotation normal to probe

axis)

Dynamic Range 5  $\mu$ W/g to > 100 mW/g;

Linearity: ± 0.2 dB

Dimensions Overall length: 337 mm (Tip: 20 mm)

Tip diameter: 3.9 mm (Body: 12 mm)

Distance from probe tip to dipole centers: 2.0 mm

Application General dosimetry up to 4 GHz

Dosimetry in strong gradient fields Compliance tests of Mobile Phones


Compatibility DASY3, DASY4, DASY52 SAR and higher,

EASY4/MRI

#### Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

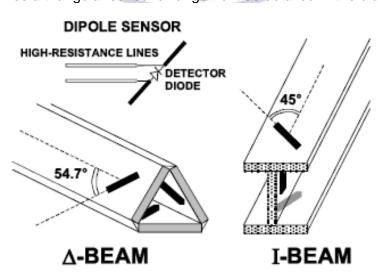



#### 2.5.3 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm). System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM Twin Phantom

#### 2.5.4 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

V1.0 Page 15 of 77 Report No.: CTL1705052031-SAR

# 2.5.5 Scanning Procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm$  5 %.

The "surface check" measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm$  0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm$  30°.) According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

#### **Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

#### Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
Maximum area scan spatial resolution: $\Delta x_{Area},\Delta y_{Area}$	When the x or y dimension of measurement plane orientation the measurement resolution in x or y dimension of the test of measurement point on the test.	on, is smaller than the above, must be ≤ the corresponding levice with at least one

#### **Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

		M. Aller III also and the second					
Maximum zoom scan s	patial reso	lution: Δx <sub>Zoom</sub> , Δy <sub>Zoom</sub>	$\leq$ 2 GHz: $\leq$ 8 mm 2 – 3 GHz: $\leq$ 5 mm <sup>*</sup>	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*			
	uniform	grid: Δz <sub>Zoom</sub> (n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm			
Maximum zoom scan spatial resolution, normal to phantom surface	graded	Δz <sub>Zoom</sub> (1): between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm			
	grid $\Delta z_{Zoom}(n>1)$ :  between subsequent  points		$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$				
Minimum zoom scan volume	X V 7		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm			

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

#### **Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software,

When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

V1.0 Page 17 of 77 Report No.: CTL1705052031-SAR

SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

#### **Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

#### **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface

Testing Technolog

(f) Calculation of the averaged SAR within masses of 1g and 10g

V1.0 Page 18 of 77 Report No.: CTL1705052031-SAR

# 2.5.6 Data Storage and Evaluation

#### **Data Storage**

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### **Data Evaluation**

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity - Conversion factor - Diode compression point Device parameters: - Frequency - Crest factor - Conductivity - Conductivity - Density - Crest factor - Conductivity - Conductivity - Density - Crest factor - Conductivity - Density - Crest factor - Conductivity -

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With Vi = compensated signal of channel i (i = x, y, z)Ui = input signal of channel i (i = x, y, z)cf = crest factor of exciting field (DASY parameter)dcpi = diode compression point (DASY parameter)

From the compensated input signals the priMayy field data for each channel can be evaluated:

$$E-\mathrm{fieldprobes}: \qquad E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$
 
$$H-\mathrm{fieldprobes}: \qquad H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$
 With 
$$\begin{array}{ccc} \mathrm{Vi} & = \mathrm{compensated\ signal\ of\ channel\ i} & (\mathrm{i} = \mathrm{x},\,\mathrm{y},\,\mathrm{z}) \\ \mathrm{Normi} & = \mathrm{sensor\ sensitivity\ of\ channel\ i} & (\mathrm{i} = \mathrm{x},\,\mathrm{y},\,\mathrm{z}) \\ \mathrm{[mV/(V/m)2]\ for\ E-field\ Probes} \\ \mathrm{ConvF} & = \mathrm{sensitivity\ enhancement\ in\ solution} \\ \mathrm{aij} & = \mathrm{sensor\ sensitivity\ factors\ for\ H-field\ probes} \end{array}$$

Report No.: CTL1705052031-SAR

= carrier frequency [GHz] f

Εi = electric field strength of channel i in V/m = magnetic field strength of channel i in A/m Hi

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The priMayy field data are used to calculate the derived field units.  $SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$ 

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

= local specific absorption rate in mW/g with SAR

= total field strength in V/m Etot

= conductivity in [mho/m] or [Siemens/m] σ

= equivalent tissue density in g/cm3 ρ


Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.



# 3 Position of the wireless device in relation to the phantom

#### 3.1 General considerations

This standard specifies two handset test positions against the head phantom – the "cheek" position and the "tilt" position.

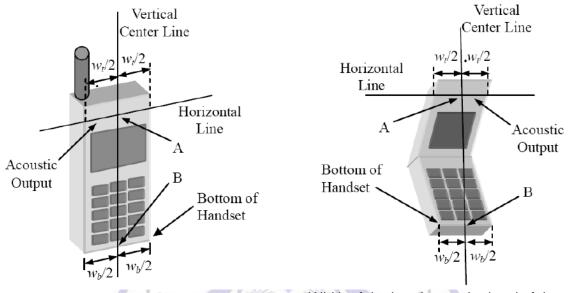


 $\begin{array}{l} W_t \\ W_b \\ A \\ \text{level of the acoustic output } B \\ \text{handset} \end{array}$ 


Width of the handset at the level of the acoustic Width of the bottom of the handset Midpoint of the width w<sub>t</sub> of the handset at the

Midpoint of the width w<sub>b</sub> of the bottom of the

Picture 1-a Typical "fixed" case handset Picture 1-b Typical "clam-shell" case handset

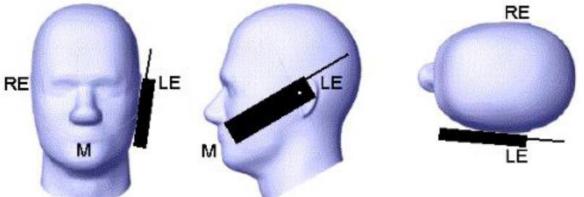


Picture 2 Cheek position of the wireless device on the left side of SAM

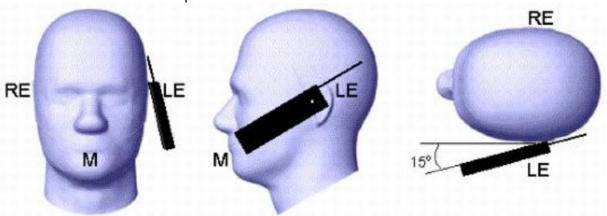

Picture 3 Tilt position of the wireless device on the left side of SAM

# 3.2 Body-worn device

A typical example of a body-worn device is aMoblie Phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

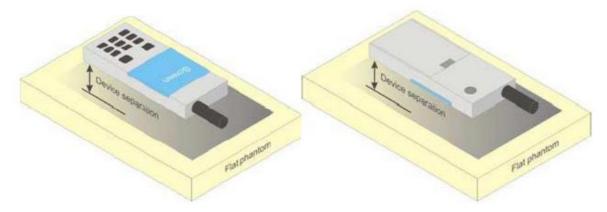

Picture 4 Test positions for body-worn devices



V1.0 Page 22 of 77 Report No.: CTL1705052031-SAR

#### 4 Measurement Procedures

The measurement procedures are as follows:

## 4.1 Conducted power measurement

- a) For WWAN power measurement, use base station simulator connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- b) Read the WWAN RF power level from the base station simulator.
- c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously Transmission, at maximum RF power in each supported wireless interface and frequency band.
- d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

#### 4.2 SAR measurement

# 4.2.1 **GSM Test Configuration**

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. The power level is set to "5" for GSM 850, set to "0" for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction calculation method are shown in chapter8.1 NOTES 1).

V1.0 Page 23 of 77 Report No.: CTL1705052031-SAR

## 5 TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 5.2

# 5.1 The composition of the tissue simulating liquid

Ingredient	835MHz		1900N	ЛHz	2450MHz	
(% Weight)	Head	Body	Head	Body	Head	Body
Water	41.45	52.5	55.242	69.91	62.7	73.2
Salt	1.45	1.40	0.306	0.13	0.50	0.10
Sugar	56	45.0	0.00	0.00	0.00	0.00
Preventol	0.10	0.10	0.00	0.00	0.00	0.00
HEC	1.00	1.00	0.00	0.00	0.00	0.00
DGBE	0.00	0.00	44.452	29.96	36.8	26.7

# 5.2 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using Agilent Dielectric Probe Kit and Agilent Network Analyzer 8753E.

Frequer	ncy (MHz)	Dielectric Para	ameters (±5%)	Tissue Temp [° C]	Test Date	
835	Head	ead 39.425-43.575 0.885-0.945 41.25 0.92		22	May 20, 2017	
835	Body	εr 52.44-57.96 54.86	δ[s/m] 0.9215-1.0185 0.93	22	May 20, 2017	


Frequency (MHz)		Dielectric Para	meters (±5%)	Tissue Temp [°C]	Test Date
1900	Head	εr 38-42 39.41	δ[s/m] 1.33-1.47 1.39	22	May 21, 2017
1900	Body	<b>Er</b> 50.635-55.965 51.65	δ[s/m] 1.444-1.596 1.52	22	May 21, 2017

# 6 System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system (±10 %).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

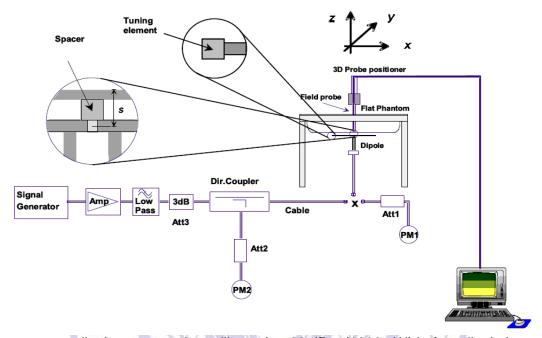

The output power on dipole port must be calibrated to 30 dBm (1000mW) before dipole is connected.



Photo of Dipole Setup

System Check in Head Tissue Simulating Liquid

Mea								
	Frequency (MHz)		value /kg)	Measured value Deviation	Measurement Date			
Verification results	(IVIIIZ)	1 g	10 g	1 g	10 g	1 g	10 g	
		Average	Average	Average	Average	Average	Average	
	835	9.44	6.18	9.35	6.14	-0.95%	-0.65%	Jul. 03, 2016
	1900	40.60	21.30	39.55	20.34	-2.59%	-4.51%	Jul. 04, 2016

Note: 1. The graph results see Chapter 9.

2. Target Values used derive from the calibration certificate

System Check in Body Tissue Simulating Liquid

Mea	Measurement is made at temperature 22.0 $^{\circ}\!$									
	Frequency (MHz)		value /kg)	Measure (W/		Devi	Deviation Measurement [	Measurement Date		
Verification results	(1011 12)	1 g	10 g	1 g	10 g	1 g	10 g			
	005	Average	Average	Average	Average	Average	Average	L.I. 00, 0040		
	835	9.69	6.36	9.66	6.32	-0.31%	-0.63%	Jul. 03, 2016		
	1900	40.10	21.3	39.71	20.42	-0.97%	-4.13%	Jul. 04, 2016		

Note: 1. The graph results see Chapter 9.

2. Target Values used derive from the calibration certificate



V1.0 Page 26 of 77 Report No.: CTL1705052031-SAR

# 7 TEST CONDITIONS AND RESULTS

#### 7.1 Conducted Power Results

Max Conducted power measurement results and power drift from tune-up tolerance provide by manufacturer:

Conducted power measurement results (GSM850/1900)

Mode	Txslot		Average (dBm)		Tune-up Limit	Calculati on	•	-Averaged (dBm)	Power	Tune-up Limit
		128	190	251	(dBm)	(dB)	128	190	251	(dBm)
GS	SM	32.66	32.71	32.54	33	/	/	/	/	/
	1 Txslot	32.57	32.69	32.56	33	-9.03	23.54	23.66	23.53	23.97
GPRS 850	2 Txslot	29.68	29.79	29.54	30	-6.02	23.66	23.77	23.52	23.98
(GMSK)	3 Txslot	27.36	27.41	27.32	28	-4.26	23.10	23.15	23.06	23.74
	4 Txslot	26.21	26.24	26.14	27	-3.01	23.20	23.23	23.13	23.99
	1 Txslot	27.52	27.65	27.41	28	-9.03	18.49	18.62	18.38	18.97
EGPRS 850	2 Txslot	25.74	25.85	25.71	26	-6.02	19.72	19.83	19.69	19.98
(8PSK)	3 Txslot	23.25	23.44	23.38	24	-4.26	18.99	19.18	19.12	19.74
	4 Txslot	22.19	22.21	22.16	23	-3.01	19.18	19.20	19.15	19.99
Mode Tyslot		D					-		Power Tune-up Limit	
Mode	Txslot	Burst	Average I (dBm)	Power	Tune-up Limit	Calculati on	Frame	-Averaged (dBm)	Power	•
Mode	Txslot	512	_	Power 810			512		Power 810	•
Mode GS			(dBm)		Limit	on		(dBm)		Limit
		512	(dBm) 661	810	Limit (dBm)	on (dB)	512	(dBm)	810	Limit (dBm)
GS GPRS	SM	<b>512</b> 29.82	(dBm) 661 29.85	<b>810</b> 29.80	Limit (dBm)	on (dB)	512	(dBm) 661	<b>810</b>	Limit (dBm)
GS	5M 1 Txslot	<b>512</b> 29.82 29.66	(dBm) 661 29.85 29.73	<b>810</b> 29.80 29.71	Limit (dBm) 30 30	on (dB) / -9.03	<b>512</b> / 20.63	(dBm) 661 / 20.70	810 / 20.68	Limit (dBm) / 20.97
GPRS 1900	1 Txslot 2 Txslot	512 29.82 29.66 27.84	(dBm) 661 29.85 29.73 27.91	810 29.80 29.71 27.79	Limit (dBm) 30 30 28	on (dB) / -9.03 -6.02	512 / 20.63 21.82	(dBm) 661 / 20.70 21.89	810 / 20.68 21.77	Limit (dBm) / 20.97 21.98
GPRS 1900	1 Txslot 2 Txslot 3 Txslot	512 29.82 29.66 27.84 25.30	(dBm) 661 29.85 29.73 27.91 25.42	810 29.80 29.71 27.79 25.39	Limit (dBm) 30 30 28 26	on (dB) / -9.03 -6.02 -4.26	512 / 20.63 21.82 21.04	(dBm) 661 / 20.70 21.89 21.16	810 / 20.68 21.77 21.13	Limit (dBm) / 20.97 21.98 21.74
GPRS 1900 (GMSK)	1 Txslot 2 Txslot 3 Txslot 4 Txslot	512 29.82 29.66 27.84 25.30 24.19	(dBm) 661 29.85 29.73 27.91 25.42 24.25	810 29.80 29.71 27.79 25.39 24.54	Limit (dBm) 30 30 28 26 25	on (dB)  -9.03  -6.02  -4.26  -3.01	512 / 20.63 21.82 21.04 21.18	(dBm) 661 / 20.70 21.89 21.16 21.24	810 / 20.68 21.77 21.13 21.53	Limit (dBm) / 20.97 21.98 21.74 21.99
GPRS 1900 (GMSK)	1 Txslot 2 Txslot 3 Txslot 4 Txslot 1 Txslot	512 29.82 29.66 27.84 25.30 24.19 25.63	(dBm) 661 29.85 29.73 27.91 25.42 24.25 25.78	810 29.80 29.71 27.79 25.39 24.54 25.65	Limit (dBm) 30 30 28 26 25 26	on (dB)  -9.03  -6.02  -4.26  -3.01  -9.03	512 / 20.63 21.82 21.04 21.18 16.60	(dBm) 661 / 20.70 21.89 21.16 21.24 16.75	810 / 20.68 21.77 21.13 21.53 16.62	Limit (dBm) / 20.97 21.98 21.74 21.99 16.97

#### NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

2) According to the conducted power as above, the GPRS/EGPRS measurements are performed with 2Txslots for GPRS/EGPRS 850 and 2Txslots for GPRS1900 and 4Txslots for EGPRS 1900.

# Conducted power measurement results (WCDMA Band II/V)

	Band	FDD	Band II result (d	IBm)	
Item	Danu		Test Channel		Tune-up Limit (dBm)
	ARFCN	9262	9400	9538	(ubiii)
AMR	12.2kbps AMR	22.68	22.73	22.70	23
RMC	12.2kbps RMC	22.70	22.75	22.73	23
	Sub - Test 1	22.25	22.48	22.39	23
HSDPA	Sub - Test 2	21.35	21.39	21.36	22
ПЭДРА	Sub - Test 3	21.27	21.30	21.29	22
	Sub - Test 4	20.46	20.51	20.44	21
	Sub - Test 1	22.32	22.38	22.31	23
	Sub - Test 2	21.52	21.53	21.47	22
HSUPA	Sub - Test 3	21.41	21.42	21.31	22
	Sub - Test 4	20.48	20.57	20.38	21
	Sub - Test 5	20.26	20.30	20.28	21

-up Limit dBm) 23 23
23
23
20
23
22
22
21
23
22
22
21
21

V1.0 Page 28 of 77 Report No.: CTL1705052031-SAR

# 7.2 SAR Test Results Summary

#### 7.2.1 General Remark

1. The DUT is tested using CMU 200 communications testers as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power.

- 2. Test positions as described in the tables above are in accordance with the specified test standard.
- 3. Tests in body position were performed in that configuration, which generates the highest time based averaged output power (see conducted power results).
- 4. Tests in head position with GSM were performed in voice mode with 1 timeslot.
- 5. According to IEEE 1528 the SAR test shall be performed at middle channel. Testing of top and bottom channel is optional.
- 6. According to KDB 447498 D01 testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
  - $\bullet \le 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- 7. IEEE 1528-2003 requires the middle channel to be tested first. This generally applies to wireless devices that are designed to operate in technologies with tight tolerances for maximum output power variations across channels in the band. When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.
- 8. Per KDB648474 D04 require when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is < 1.2 W/kg.
- 9. Per KDB648474 D04 require when the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, using the same wireless mode test configuration for voice and data, such as UMTS, LTE and Wi-Fi, and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface)
- 10. Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:
  - Maximum Scaling SAR =tested SAR (Max.)  $\times$  [maximum turn-up power (mw)/ maximum measurement output power(mw)]

# 7.2.2 Standalone SAR

	Maxi		Maximum	Conducted	Drift ± 0.21dB		Limit SAR <sub>1g</sub> 1.6 W/kg			
Test Position	Channel/ Frequency(MHz)	Test Mode	Duty Cycle	Allowed Power (dBm)	Power (dBm)	Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Scaling Factor	Reported SAR <sub>1g</sub> (W/kg)	Graph Results
				Mouth Wor	n (distance 1	0mm)				
Mouth-Worn	190/836.6	Voice	1:1	33.00	32.71	0.04	0.210	1.07	0.224	Figure.1
Mouth-Worn	661/1880.0	Voice	1:1	30.00	29.85	-0.05	0.205	1.04	0.213	Figure.3
Mouth-Worn	9400/1880	Voice	1:1	23.00	22.75	-0.10	0.189	1.06	0.200	Figure.5
Mouth-Worn	4183/836.6	Voice	1:1	23.00	22.84	0.05	0.167	1.04	0.174	Figure.7

Test Position	Channel/ Frequency(MHz)	Test Mode	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit SAR <sub>10g</sub> 4.0 W/kg			
						Drift (dB)	Measured SAR <sub>10g</sub> (W/kg)	Scaling Factor	Reported SAR <sub>10g</sub> (W/kg)	Graph Results
Wrist-worn (0mm distance)										
Wrist-Worn	190/836.6	Voice	1:1	33.00	32.71	-0.05	1.430	1.07	1.530	Figure.2
Wrist-Worn	661/1880.0	Voice	1:1	30.00	29.85	-0.12	1.380	1.04	1.435	Figure.4
Wrist-Worn	9400/1880	Voice	1:1	23.00	22.75	0.04	1.310	1.06	1.389	Figure.6
Wrist-Worn	4183/836.6	Voice	1:1	23.00	22.84	-0.06	0.990	1.04	1.030	Figure.8
		en	77.	Test	ing T	echn	01057			

# 7.2.3 Simultaneous SAR Evaluation

For the DUT, only with GSM/WCDMA modular, share only one antenna, not need consider simultaneous transmission.



# 7.3 System Check Results

#### System Performance Check at 835 MHz Head

Date: 05/20/2017

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d069

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f =835MHz;  $\sigma$  = 0.92 mho/m;  $\epsilon$ r = 41.25;  $\rho$  = 1000 kg/m3

Phantom section: Flat Section

#### **DASY4** Configuration:

Probe: ES3DV4 – SN3836;ConvF(9.42, 9.42, 9.42); Calibrated: 07/26/2016

•Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (61x61x1): Measurement grid: dx=15.00 mm, dy=15.00 mm


Maximum value of SAR (interpolated) = 10.1 W/Kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.898 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 12.41 W/Kg

## SAR(1 g) = 9.44 W/Kg; SAR(10 g) = 6.18 W/Kg Maximum value of SAR (measured) = 11.1 W/Kg

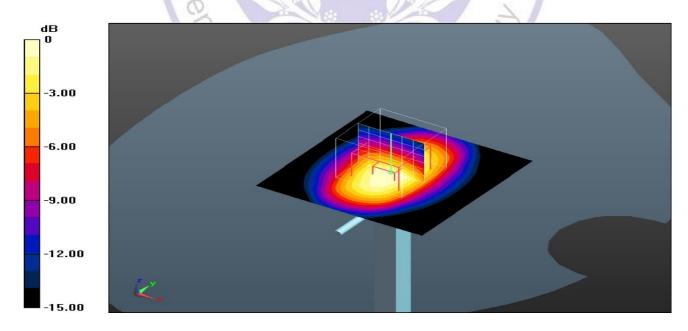

0 dB = 11.1 W/Kg

#### System Performance Check at 835 MHz Body

Date: 05/20/2017

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d069

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f =835MHz;  $\sigma$  = 0.93 mho/m;  $\epsilon$ r = 54.86;  $\rho$  = 1000 kg/m3

Phantom section: Flat Section

#### DASY4 Configuration:

Probe: ES3DV4 – SN3836;ConvF(9.25, 9.25, 9.25); Calibrated: 07/26/2016

•Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (61x61x1): Measurement grid: dx=15.00 mm, dy=15.00 mm


Maximum value of SAR (interpolated) = 11.9 W/Kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.455 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 13.25 W/Kg

# **SAR(1 g) = 9.69W/Kg; SAR(10 g) = 6.36W/Kg**Maximum value of SAR (measured) = 14.47 W/Kg

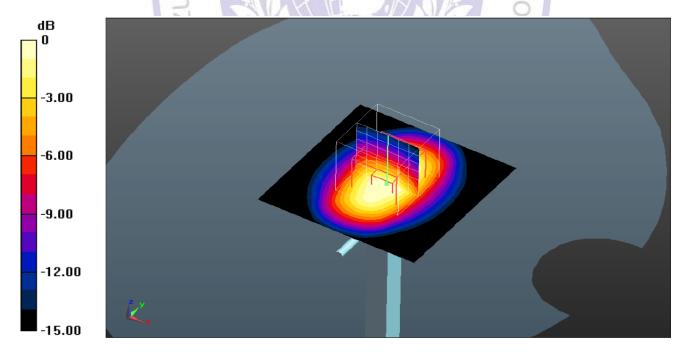

0 dB = 14.47 W/Kg

#### System Performance Check at 1900 MHz Head

Date: 05/21/2017

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: CW; Frequency: 1900MHz; Duty Cycle: 1:1

Medium parameters used: f =1900MHz;  $\sigma$  = 1.39 mho/m;  $\epsilon$ r = 39.41;  $\rho$  = 1000 kg/m3

Phantom section: Flat Section

#### DASY4 Configuration:

• Probe: ES3DV4 - SN3836;ConvF(7.60, 7.60, 7.60); Calibrated: 07/26/2016

•Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

•Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (61x61x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm Maximum value of SAR (interpolated) = 45.20W/Kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 178.44 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 50.21 W/Kg

# SAR(1 g) = 40.60 W/Kg; SAR(10 g) = 21.30 W/Kg

Maximum value of SAR (measured) = 51.45 W/Kg

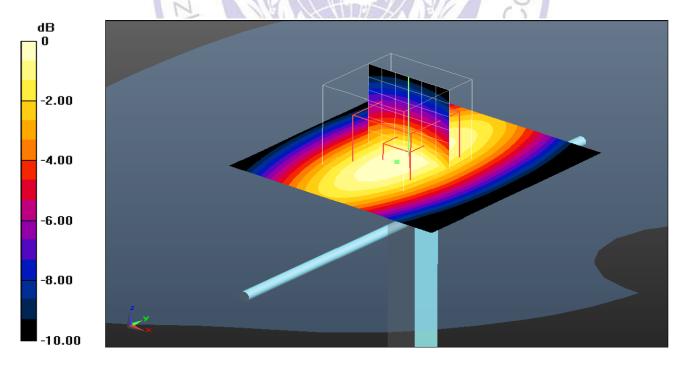

0 dB = 51.45 W/Kg

#### System Performance Check at 1900 MHz Body

Date: 05/21/2017

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: CW; Frequency: 1900MHz; Duty Cycle: 1:1

Medium parameters used: f =1900MHz;  $\sigma$  = 1.52 mho/m;  $\epsilon$ r = 51.65;  $\rho$  = 1000 kg/m3

Phantom section: Flat Section

#### DASY4 Configuration:

• Probe: ES3DV4 - SN3836;ConvF(7.33, 7.33, 7.33); Calibrated: 07/26/2016

•Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

•Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (61x61x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 48.23 W/Kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 175.341 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 50.76 W/Kg

## SAR(1 g) = 40.10 W/Kg; SAR(10 g) = 21.30 W/Kg

Maximum value of SAR (measured) = 53.25 W/Kg

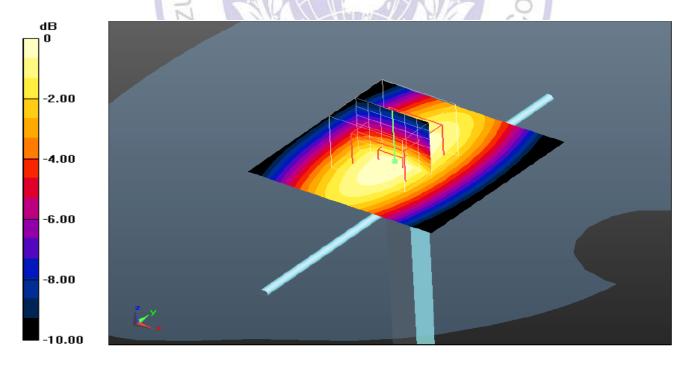

0 dB = 53.25 W/Kg

System Performance Check 1900MHz Body 1000mW

# 7.4 SAR Test Graph Results

SAR plots for **the highest measured SAR** in each exposure configuration, wireless mode and frequency band combination according to FCC KDB 865664 D02

#### **GSM850 Mouth-worn Middle Channel**

Date: 2017-05-20

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f =836.6 MHz;  $\sigma$  = 0.929 mho/m;  $\epsilon$ r = 41.29;  $\rho$  = 1000 kg/m3;

Phantom section: Flat Section

#### **DASY4** Configuration:

Probe: ES3DV4 – SN3836;ConvF(9.42, 9.42, 9.42); Calibrated: 07/26/2016

Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.305 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.524 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.426 W/kg

#### SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.354 W/kg

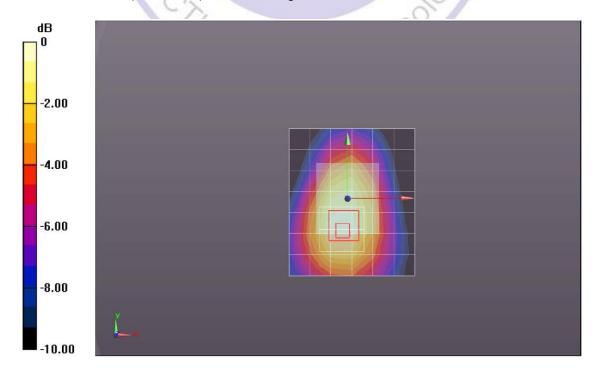


Figure 1: Mouth-Worn (GSM850 Middle Channel)

#### **GSM850 Body Wrist Worn Middle Channel**

Date: 2017-05-20

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f =836.6 MHz;  $\sigma$  = 0.987 mho/m;  $\epsilon$ r = 54.89;  $\rho$  = 1000 kg/m3;

Phantom section: Flat Section

#### DASY4 Configuration:

Probe: ES3DV4 – SN3836;ConvF(9.25, 9.25, 9.25); Calibrated: 07/26/2016

•Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (7x8x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 3.54 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 60.047 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 6.42 W/kg

SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 3.87W/kg

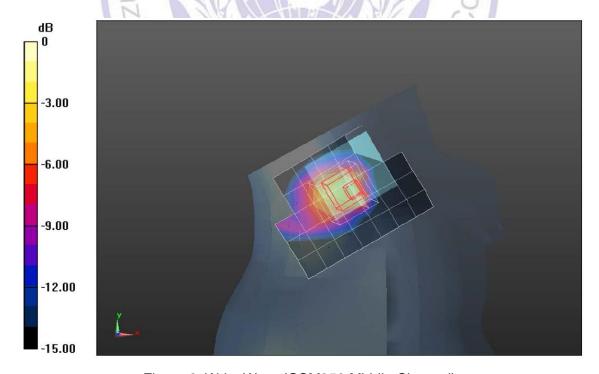


Figure 2: Wrist-Worn (GSM850 Middle Channel)

#### **PCS1900 Mouth-worn Middle Channel**

Date: 2017-05-21

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 1880 MHz;  $\sigma = 1.35 \text{mho/m}$ ;  $\epsilon r = 39.28$ ;  $\rho = 1000 \text{ kg/m3}$ ;

Phantom section: Flat Section

#### **DASY4** Configuration:

Probe: ES3DV4 – SN3836;ConvF(7.60, 7.60, 7.60); Calibrated: 07/26/2016

•Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (9x9x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.322 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.15 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.378 W/kg

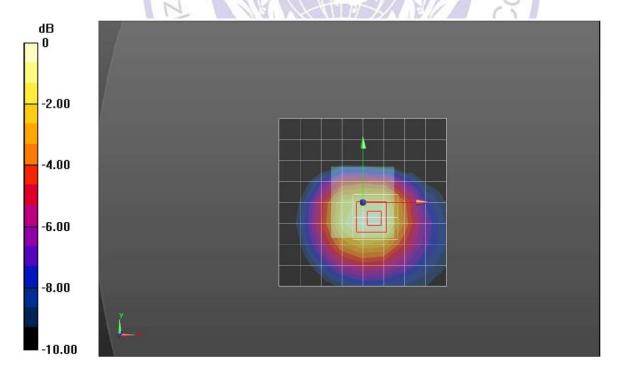


Figure 3: Mouth-Worn (PCS1900 Middle Channel)

#### **PCS1900 Body Wrist Worn Middle Channel**

Date: 2017-05-21

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 1880 MHz;  $\sigma = 1.49 \text{mho/m}$ ;  $\epsilon r = 51.34$ ;  $\rho = 1000 \text{ kg/m3}$ ;

Phantom section: Flat Section

#### **DASY4** Configuration:

Probe: ES3DV4 – SN3836;ConvF(7.33, 7.33, 7.33); Calibrated: 07/26/2016

•Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 3.22 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 43.54 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 4.78 W/kg

# SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 3.15 W/kg

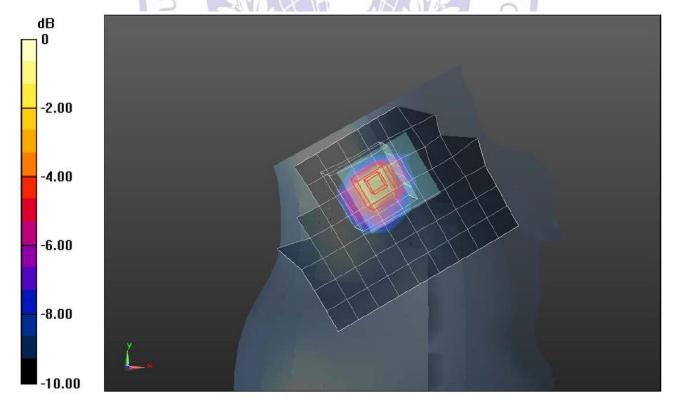


Figure 4: Wrist-Worn (PCS1900 Middle Channel)

#### WCDMA BAND II Mouth-worn Middle Channel

Date: 2017-05-21

Communication System: W2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 1880 MHz;  $\sigma = 1.35 \text{mho/m}$ ;  $\epsilon r = 39.28$ ;  $\rho = 1000 \text{ kg/m3}$ ;

Phantom section: Flat Section

#### **DASY4** Configuration:

Probe: ES3DV4 – SN3836;ConvF(7.60, 7.60, 7.60); Calibrated: 07/26/2016

•Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (9x9x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.215 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.23 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.425 W/kg

# SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

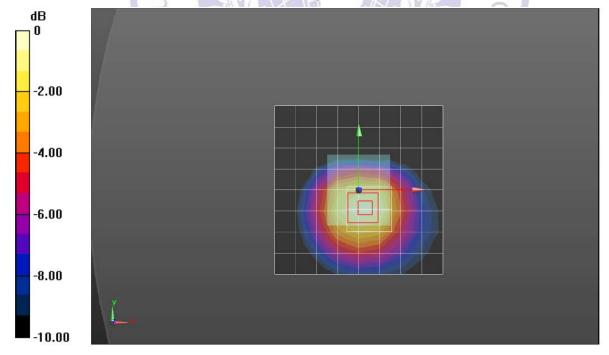


Figure 5: Mouth-Worn (WCDMA BAND II Middle Channel)

#### **WCDMA BAND II Body Wrist Worn Middle Channel**

Date: 2017-05-21

Communication System: W2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 1880 MHz;  $\sigma = 1.49 \text{mho/m}$ ;  $\epsilon r = 51.34$ ;  $\rho = 1000 \text{ kg/m3}$ ;

Phantom section: Flat Section

#### **DASY4** Configuration:

Probe: ES3DV4 – SN3836;ConvF(7.33, 7.33, 7.33); Calibrated: 07/26/2016

•Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 3.21 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 59.96 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 5.14 W/kg

## SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.31 W/kg

Maximum value of SAR (measured) = 3.42 W/kg

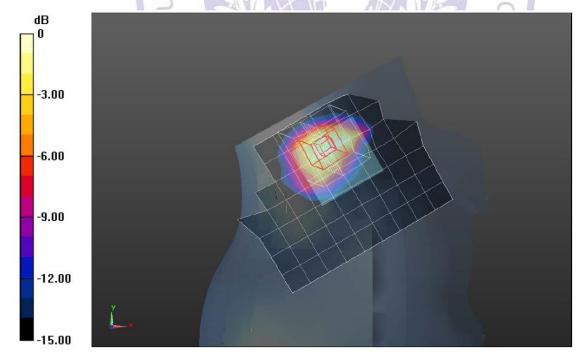


Figure 6: Wrist-Worn (WCDMA BAND II Middle Channel)

#### WCDMA Band V Mouth-worn Middle Channel

Date: 2017-05-20

Communication System: W5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f =836.6 MHz;  $\sigma$  = 0.929 mho/m;  $\epsilon$ r = 41.29;  $\rho$  = 1000 kg/m3;

Phantom section: Flat Section

#### **DASY4** Configuration:

• Probe: ES3DV4 - SN3836;ConvF(9.42, 9.42, 9.42); Calibrated: 07/26/2016

•Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

•Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.195 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.765 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.235 W/kg

# SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.201 W/kg

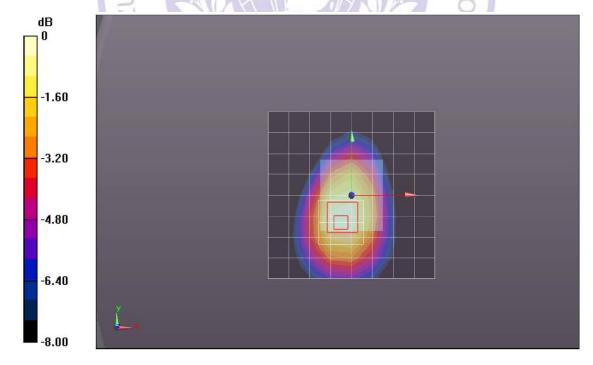


Figure 7: Mouth-Worn (WCDMA Band V Middle Channel)

#### **WCDMA Band V Body Wrist Worn Middle Channel**

Date: 2017-05-20

Communication System: W5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f =836.6 MHz;  $\sigma$  = 0.987 mho/m;  $\epsilon$ r = 54.89;  $\rho$  = 1000 kg/m3;

Phantom section: Flat Section

#### DASY4 Configuration:

Probe: ES3DV4 – SN3836;ConvF(9.25, 9.25, 9.25); Calibrated: 07/26/2016

•Sensor-Surface: 4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 7/26/2016

Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (7x8x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.24W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.149 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.87 W/kg

SAR(1 g) = 1.98 W/kg; SAR(10 g) = 0.99 W/kg

Maximum value of SAR (measured) = 2.41 W/kg

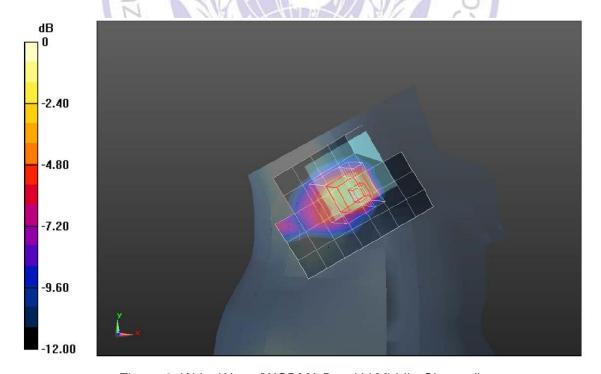


Figure 8: Wrist-Worn (WCDMA Band V Middle Channel)