



Shenzhen CTL Electromagnetic Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-89486194-805

FCC PART 22 AND PART 24 TEST REPORT

FCC Part 22 Subpart H / Part 24 Subpart E

Report Reference No. **CTL1308161300-WU**

Compiled by

(position+printed name+signature) ... File administrators Jacky Chen

Jacky Chen

Name of the organization performing
the tests Test Engineer Tracy Qi

Tracy Qi

(position+printed name+signature) ...

Approved by
(position+printed name+signature) ... Manager Tracy Qi

Tracy Qi

Date of issue Sept. 23, 2013

Representative Laboratory Name : **Shenzhen CTL Electromagnetic Technology Co., Ltd.**

Address Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test Firm **Bontek Compliance Testing Laboratory Ltd**

Address 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East
Road, Nanshan, Shenzhen, China

Applicant's name **GATOR GROUP CO., LTD**

Address 5 Floor, TGK NO. 11 Building, Yangtian Road, the 72nd Zone of
Bao'an, Shenzhen, China

Test specification:

Standard **FCC CFR Title 47 Part 2, Part 22H and Part 24E**

EIA/TIA 603-C: 2004

Master TRF Dated 2011-01

Shenzhen CTL Electromagnetic Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Electromagnetic Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Electromagnetic Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description **GPS Tracker**

FCC ID **2AA2S-M508**

Trade Mark **GATOR**

Model/Type reference M508, M518, M528, M538, M548, M558, M568, M578, M588, M598

GSM

Transmit GSM 850: 824~849MHz, PCS 1900: 1850~1910MHz

Receive GSM 850: 869~894MHz, PCS 1900: 1930~1990MHz

Release Version R99

Type of modulation GMSK for GSM/GPRS

GPRS Type Class B

GPRS Class Class 12

GPS

work frequency: 1575.42MHz
Type of modulation: BPSK
Antenna Gain: 0.5 dBi for GSM850
2.0 dBi for PCS1900
Antenna type: non-detachable
Result.....: **Positive**



TEST REPORT

| | | |
|-------------------|------------------|---------------------------------|
| Test Report No. : | CTL1308161300-WU | Sept. 23, 2013 Date of issue |
|-------------------|------------------|---------------------------------|

Equipment under Test : GPS Tracker

Model /Type : M508

List Modes : M518, M528, M538, M548, M558, M568, M578, M588, M598

Difference Description : Only the model's name is different

Applicant : GATOR GROUP CO., LTD

Address : 5 Floor, TGK NO. 11 Building, Yangtian Road, the 72nd Zone of Bao'an, Shenzhen, China

Manufacturer : GATOR GROUP CO., LTD

Address : 5 Floor, TGK NO. 11 Building, Yangtian Road, the 72nd Zone of Bao'an, Shenzhen, China

| | |
|--|-----------------|
| Test Result according to the standards on page 5: | Positive |
|--|-----------------|

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

| | |
|---|-----------|
| 1. TEST STANDARDS | 5 |
| | |
| 2. SUMMARY | 6 |
| | |
| 2.1. General Remarks | 6 |
| 2.2. Equipment Under Test | 6 |
| 2.3. Short description of the Equipment under Test (EUT) | 6 |
| 2.4. EUT operation mode | 6 |
| 2.5. EUT configuration | 7 |
| 2.6. Related Submittal(s) / Grant (s) | 7 |
| 2.7. Modifications | 7 |
| | |
| 3. TEST ENVIRONMENT | 8 |
| | |
| 3.1. Address of the test laboratory | 8 |
| 3.2. Test Facility | 8 |
| 3.3. Environmental conditions | 8 |
| 3.4. Configuration of Tested System | 8 |
| 3.5. EUT Exercise Software | 9 |
| 3.6. Statement of the measurement uncertainty | 9 |
| 3.7. Equipments Used during the Test | 10 |
| 3.8. Summary of Test Result | 11 |
| | |
| 4. TEST CONDITIONS AND RESULTS | 12 |
| | |
| 4.1. Peak Output Power | 12 |
| 4.2. Modulation Characteristic | 17 |
| 4.3. Occupied Bandwidth | 18 |
| 4.4. Spurious Emission At Antenna Terminals (+/- 1MHz) | 23 |
| 4.5. Spurious Emission | 26 |
| 4.6. Frequency Stability under Temperature & Voltage Variations | 27 |
| | |
| 5. TEST SETUP PHOTOS OF THE EUT | 39 |
| | |
| 6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT | 40 |

1. TEST STANDARDS

The tests were performed according to following standards:

[**FCC Part 22 Subpart H:**](#) Public Mobile Services

[**FCC Part 24 Subpart E:**](#) Personal Communications Services

[**EIA/TIA 603-C: 2004**](#)

[**FCC CFR Title 47 Part 2**](#)



2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Aug. 28, 2013

Testing commenced on : Aug. 28, 2013

Testing concluded on : Sept. 23, 2013

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : 120V / 60 Hz 115V / 60Hz
 12 V DC 24 V DC
 Other (specified in blank below)

2.3. Short description of the Equipment under Test (EUT)

A **GPS Tracker** with GSM, GPRS and GPS function.
 For more details, refer to the user's manual of the EUT.
 Serial number: Prototype

2.4. EUT operation mode

CTL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

| Test Mode |
|------------------|
| Mode 1: GSM850 |
| Mode 2: PCS1900 |
| Mode 3: GPRS850 |
| Mode 4: GPRS1900 |

Note:

1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
3. Radiated power output working at GSM link was higher than that working at GPRS link, so all of test items were done working at GSM mode. Refer to peak power output for more details.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- o - supplied by the manufacturer
- o - supplied by the lab

Manufacturer :

Model No. :

0 Manufacturer :
Model No. :

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AA2S-M508 filing to comply with of the FCC Part 22 and Part 24 Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.



3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Bontek Compliance Testing Laboratory Ltd
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 7631A

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2011.

FCC-Registration No.: 338263

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.


3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C
Humidity: 30-60 %
Atmospheric pressure: 950-1050mbar

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

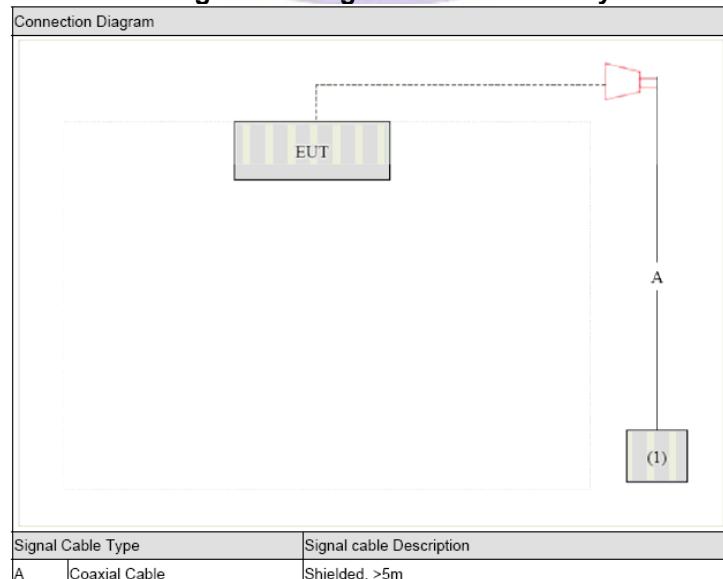

3.5. EUT Exercise Software

1. Setup the EUT and simulators as shown on above.
2. Turn on the power of all equipment.
3. EUT Communicate with CMU200, then select channel to test.

3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Bontek Compliance Testing Laboratory Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Bontek laboratory is reported:

| Test | Range | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission | 30~1000MHz | 4.10dB | (1) |
| Radiated Emission | Above 1GHz | 4.32dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 3.20dB | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3.7. Equipments Used during the Test

| Item | Test Equipment | Manufacturer | Model No. | Last Cal. | Due. Date |
|------|-----------------------------|-----------------|-----------------------|------------|------------|
| 1 | EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 2013/04/14 | 2014/04/13 |
| 2 | Radio Communication Tester | ROHDE & SCHWARZ | CMU200 | 2013/04/14 | 2014/04/13 |
| 3 | Dual Directional Coupler | Agilent | 778D | 2013/04/14 | 2014/04/13 |
| 4 | 10dB attenuator | SCHWARZBECK | MTAIMP-136 | 2013/04/14 | 2014/04/13 |
| 5 | Tunable Bandreject filter | K&L | 3TNF-800 | 2013/04/14 | 2014/04/13 |
| 6 | Tunable Bandreject filter | K&L | 5TNF-1700 | 2013/04/14 | 2014/04/13 |
| 7 | High-Pass Filter | K&L | 9SH10-2700/X12750-O/O | 2013/04/14 | 2014/04/13 |
| 8 | High-Pass Filter | K&L | 41H10-1375/U12750-O/O | 2013/04/14 | 2014/04/13 |
| 9 | Coaxial Cable | Huber+Suhner | AC4-RF-H | 2013/04/14 | 2014/04/13 |
| 10 | AC Power Supply | IDRC | CF-500TP | 2013/04/14 | 2014/04/13 |
| 11 | DC Power Supply | IDRC | CD-035-020PR | 2013/04/14 | 2014/04/13 |
| 12 | RF Current Probe | FCC | F-33-4 | 2013/04/14 | 2014/04/13 |
| 13 | Temperature /Humidity Meter | zhicheng | ZC1-2 | 2013/04/14 | 2014/04/13 |
| 14 | MICROWAVE AMPLIFIER | HP | 8349B | 2013/04/14 | 2014/04/13 |
| 15 | Amplifier | HP | 8447D | 2013/04/14 | 2014/04/13 |
| 16 | SIGNAL GENERATOR | HP | 8647A | 2013/04/14 | 2014/04/13 |
| 17 | Log Periodic Antenna | ELECTRO-METRICS | EM-6950 | 2013/04/14 | 2014/04/13 |
| 18 | Horn Antenna | Schwarzbeck | BBHA9120A | 2013/04/14 | 2014/04/13 |
| 19 | EMI Test Receiver | R&S | ESPI | 2013/04/14 | 2014/04/13 |
| 20 | Loop Antenna | ZHINAN | ZN30900A | 2013/04/14 | 2014/04/13 |
| 21 | Horn Antenna | Schwarzbeck | BBHA9120D | 2013/04/14 | 2014/04/13 |
| 22 | Horn Antenna | Schwarzbeck | BBHA9170 | 2013/04/14 | 2014/04/13 |
| 23 | Spectrum Analyzer | Agilent | E4446A | 2013/04/14 | 2014/04/13 |
| 24 | Wideband Peak Power Meter | Anritsu | ML2495A | 2013/04/14 | 2014/04/13 |
| 25 | Power Sensor | Anritsu | MA2411B | 2013/04/14 | 2014/04/13 |
| 26 | Climate Chamber | ESPEC | EL-10KA | 2013/04/14 | 2014/04/13 |

3.8. Summary of Test Result

No deviations from the test standards

For GSM 850 (FCC Part 22H & Part 2)

| Emission | | | |
|--|---|----------------|-----------|
| Performed Item | Normative References | Test Performed | Deviation |
| Peak Output Power | FCC Part 22.913(a)(2) and Part 2.1046 EIA/TIA 603-C | Yes | No |
| Modulation Characteristic | FCC Part 2.1047(d) | Yes | No |
| Occupied Bandwidth | FCC Part 2.1049 | Yes | No |
| Spurious Emission At Antenna Terminals (+/- 1MHz) | FCC Part 22.917(a) and Part 2.1049 | Yes | No |
| Spurious Emission | FCC Part 22.917(b) and Part 2.1051, 2.1053 EIA/TIA 603-C | Yes | No |
| Frequency Stability Under Temperature & Voltage Variations | FCC Part 22.355 and 2.1055 EIA/TIA 603-C | Yes | No |

For PCS 1900 (FCC Part 24E & Part 2)


| Emission | | | |
|--|---|----------------|-----------|
| Performed Item | Normative References | Test Performed | Deviation |
| Peak Output Power | FCC Part 24.232(b) and Part 2.1046 EIA/TIA 603-C | Yes | No |
| Modulation Characteristic | FCC Part 2.1047(d) | Yes | No |
| Occupied Bandwidth | FCC Part 24.238(b) and Part 2.1049 | Yes | No |
| Spurious Emission At Antenna Terminals (+/- 1MHz) | FCC Part 24.238(a) and Part 2.1049 | Yes | No |
| Spurious Emission | FCC Part 24.238(b) and Part 2.1051, 2.1053 EIA/TIA 603-C | Yes | No |
| Frequency Stability Under Temperature & Voltage Variations | FCC Part 24.235 and 2.1055 EIA/TIA 603-C | Yes | No |

4. TEST CONDITIONS AND RESULTS


4.1. Peak Output Power

TEST CONFIGURATION

Conducted Power Measurement:

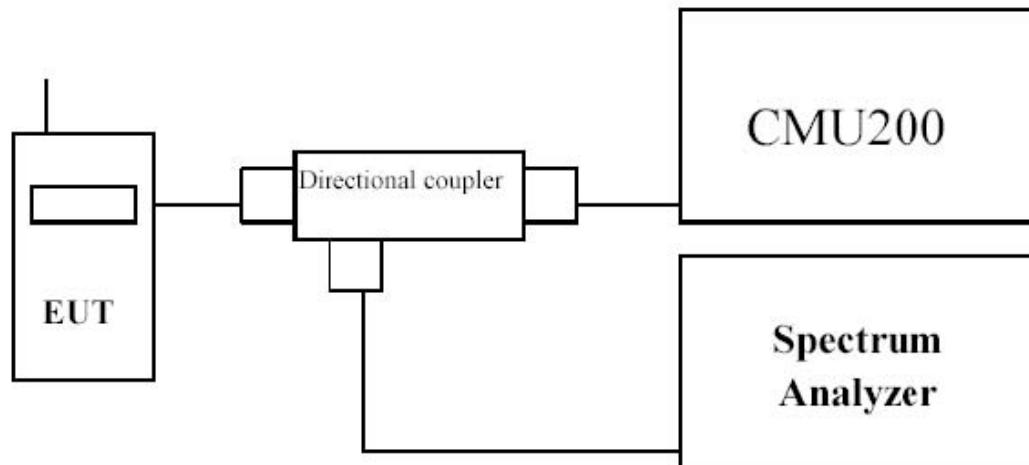

Radiated Power Measurement:

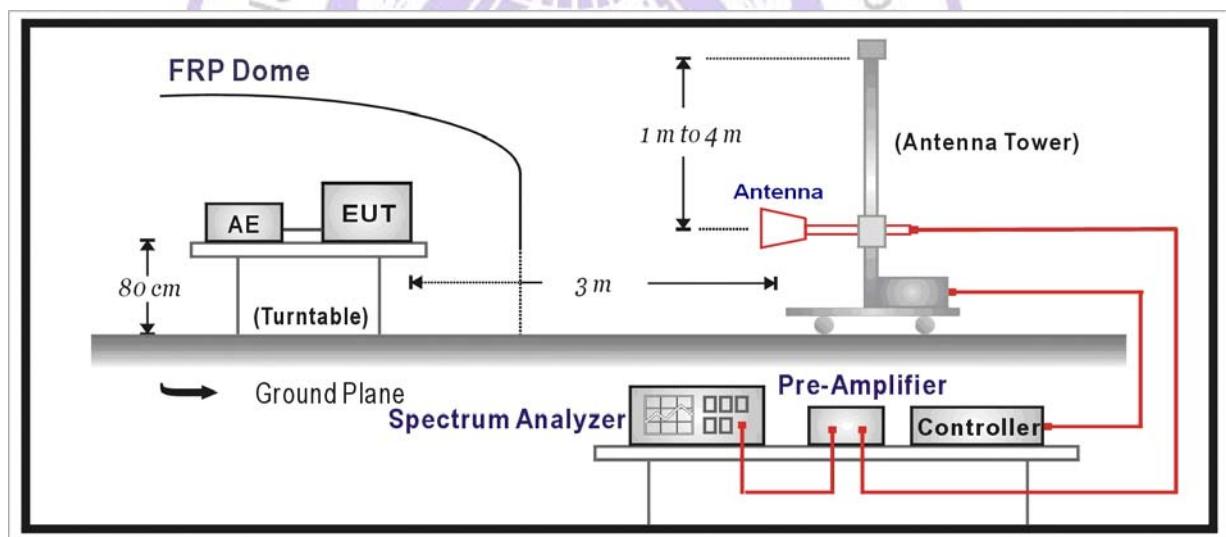

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- EUT Communicate with CMU200, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- a) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c) The output of the test antenna shall be connected to the measuring receiver.
- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q) Test site anechoic chamber refer to ANSI C63.4: 2003.

Base station simulator settings for each test mode:

1. For GSM/GPRS
Configure R&S CMU200 to support GMSK and 8PSK call respectively, and set one timeslot transmission for GMSK GSM/GPRS and 8PSK EDGE.
Measure and record power outputs for both modulations.

LIMIT

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(b):


The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

TEST RESULTS

| | | | | | | | |
|--------------|-------------------|-----------|--|------|--|--|--|
| Product | GPS Tracker | | | | | | |
| Test Item | Peak Output Power | | | | | | |
| Date of Test | 2013/09/18 | Test Site | | AC-6 | | | |

| Band | GSM850 | | | | GSM1900 | | | |
|----------------------------|---------|-------|-------|--------|------------------------|-------|--------|--------|
| | Channel | 128 | 190 | 251 | Tune up power tolerant | 512 | 661 | 810 |
| Frequency (MHz) | 824.2 | 836.6 | 848.8 | / | 1850.2 | 1880 | 1909.8 | / |
| GSM (1 uplink) | 31.79 | 31.84 | 31.82 | 32.5±1 | 29.95 | 29.97 | 29.94 | 29.5±1 |
| GPRS Multi-Slot (1 uplink) | 31.75 | 31.75 | 31.81 | 32.5±1 | 29.81 | 29.91 | 29.90 | 29.5±1 |
| GPRS Multi-Slot (2 uplink) | 31.78 | 31.82 | 31.80 | 32.5±1 | 29.93 | 29.93 | 29.94 | 29.5±1 |
| GPRS Multi-Slot (3 uplink) | 29.76 | 29.75 | 29.79 | 29.5±1 | 29.91 | 29.90 | 29.90 | 29.5±1 |
| GPRS Multi-Slot (4 uplink) | 29.75 | 29.77 | 29.83 | 29.5±1 | 29.93 | 29.92 | 29.91 | 29.5±1 |

Note: Since GSM mode has higher power, so the test items below were not performed to GPRS mode.

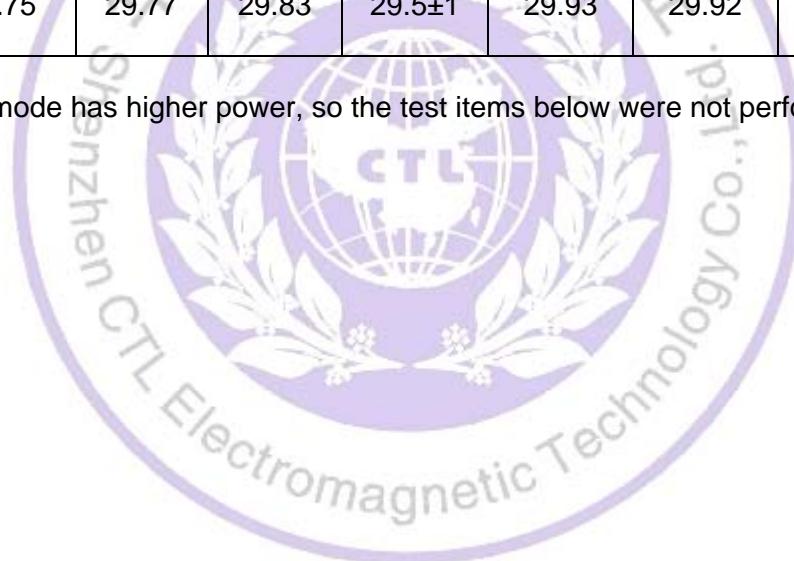

Radiated Measurement

GSM850

| Frequency (MHz) | SA Reading (dBm) | Ant.Pol. (H/V) | SG Reading (dBm) | Cable Loss (dB) | Gain (dBd) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------|------------------|----------------|------------------|-----------------|------------|-----------|-------------|-------------|
| Low Channel 128 (824.20MHz) | | | | | | | | |
| 824.2 | -18.80 | H | 14.96 | 1.76 | -0.02 | 13.18 | 38.50 | -25.32 |
| 824.2 | -1.84 | V | 32.66 | 1.76 | -0.02 | 30.88 | 38.50 | -7.62 |
| Middle Channel 189 (836.40MHz) | | | | | | | | |
| 836.4 | -18.72 | H | 16.04 | 1.75 | 0.10 | 14.39 | 38.50 | -24.11 |
| 836.4 | -1.82 | V | 32.07 | 1.75 | 0.10 | 30.42 | 38.50 | -8.08 |
| High Channel 251 (848.80MHz) | | | | | | | | |
| 848.8 | -17.73 | H | 16.88 | 1.78 | 0.13 | 15.23 | 38.50 | -23.27 |
| 848.8 | -1.15 | V | 32.87 | 1.78 | 0.13 | 31.22 | 38.50 | -7.28 |

ERP=SG Reading-Cable Loss+Gain

PCS1900

| Frequency (MHz) | SA Reading (dBm) | Ant.Pol. (H/V) | SG Reading (dBm) | Cable Loss (dB) | Gain (dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|---------------------------------|------------------|----------------|------------------|-----------------|------------|------------|-------------|-------------|
| Low Channel 512 (1850.20MHz) | | | | | | | | |
| 1850.2 | 23.01 | H | 21.61 | 2.68 | 10.40 | 29.33 | 33.00 | -3.67 |
| 1850.2 | 23.71 | V | 22.12 | 2.68 | 10.40 | 29.84 | 33.00 | -3.16 |
| Middle Channel 661 (1880.00MHz) | | | | | | | | |
| 1880.0 | 21.70 | H | 20.20 | 2.68 | 10.43 | 27.95 | 33.00 | -5.05 |
| 1880.0 | 23.76 | V | 21.92 | 2.68 | 10.43 | 29.67 | 33.00 | -3.33 |
| High Channel 810 (1909.80MHz) | | | | | | | | |
| 1909.8 | 21.97 | H | 20.62 | 2.70 | 10.44 | 28.36 | 33.00 | -4.64 |
| 1909.8 | 23.50 | V | 21.71 | 2.70 | 10.44 | 29.45 | 33.00 | -3.55 |

EIRP=SG Reading-Cable Loss+Gain

GPRS 850

| Frequency (MHz) | SA Reading (dBm) | Ant.Pol. (H/V) | SG Reading (dBm) | Cable Loss (dB) | Gain (dBd) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------|------------------|----------------|------------------|-----------------|------------|-----------|-------------|-------------|
| Low Channel 128 (824.20MHz) | | | | | | | | |
| 824.2 | -17.46 | H | 16.30 | 1.76 | -0.02 | 14.52 | 38.50 | -23.98 |
| 824.2 | -0.76 | V | 33.74 | 1.76 | -0.02 | 31.96 | 38.50 | -6.54 |
| Middle Channel 189 (836.40MHz) | | | | | | | | |
| 836.4 | -16.55 | H | 17.35 | 1.75 | 0.10 | 15.70 | 38.50 | -22.80 |
| 836.4 | -0.62 | V | 34.15 | 1.75 | 0.10 | 32.50 | 38.50 | -6.00 |
| High Channel 251 (848.80MHz) | | | | | | | | |
| 848.8 | -16.09 | H | 17.92 | 1.78 | 0.13 | 16.27 | 38.50 | -22.23 |
| 848.8 | -0.07 | V | 33.95 | 1.78 | 0.13 | 32.30 | 38.50 | -6.20 |

ERP=SG Reading-Cable Loss+Gain


GPRS1900

| Frequency (MHz) | SA Reading (dBm) | Ant.Pol. (H/V) | SG Reading (dBm) | Cable Loss (dB) | Gain (dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|---------------------------------|------------------|----------------|------------------|-----------------|------------|------------|-------------|-------------|
| Low Channel 512 (1850.20MHz) | | | | | | | | |
| 1850.2 | 23.62 | H | 22.22 | 2.68 | 10.40 | 29.94 | 33.00 | -3.06 |
| 1850.2 | 23.84 | V | 22.25 | 2.68 | 10.40 | 29.97 | 33.00 | -3.03 |
| Middle Channel 661 (1880.00MHz) | | | | | | | | |
| 1880.0 | 22.55 | H | 21.05 | 2.68 | 10.43 | 28.80 | 33.00 | -4.20 |
| 1880.0 | 22.81 | V | 22.02 | 2.68 | 10.43 | 29.77 | 33.00 | -3.23 |
| High Channel 810 (1909.80MHz) | | | | | | | | |
| 1909.8 | 23.07 | H | 21.72 | 2.70 | 10.44 | 29.46 | 33.00 | -3.54 |
| 1909.8 | 22.33 | V | 21.81 | 2.70 | 10.44 | 29.55 | 33.00 | -3.45 |

EIRP=SG Reading-Cable Loss+Gain

4.2. Modulation Characteristic

TEST CONFIGURATION

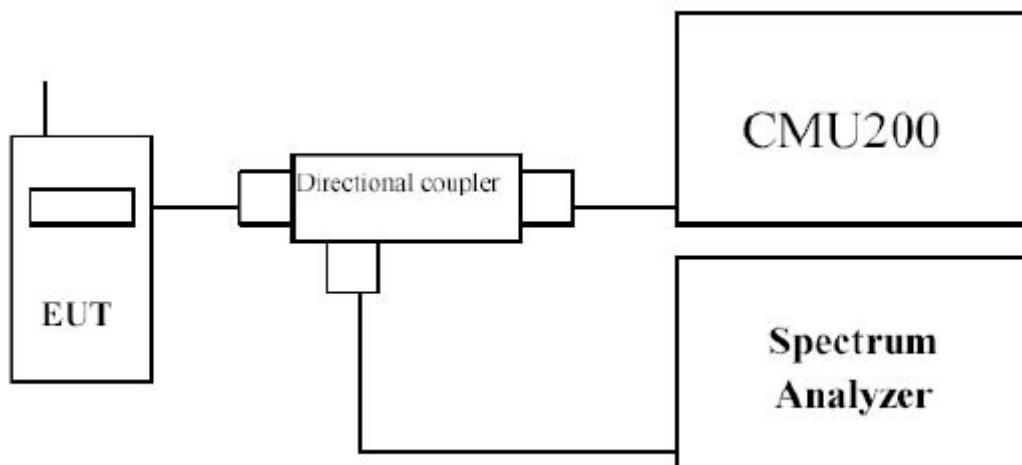

LIMIT

N/A

TEST PROCEDURE

GMSK is a form of binary signaling schemes which represent digital states as a shift between discrete sinusoidal frequencies called Frequency Shift Keying (FSK). Minimum Shift Keying (MSK) is continuous phase FSK with the smallest possible modulation index h . Modulation index is defined as: $h = 2 * F * T_b$ where F = Peak frequency deviation in Hz and T_b = Bit period in seconds

Two discrete frequencies, representing two distinct digital states, with equal phases at switch time $t = 0$ requires a minimum value of $h = 0.5$. The Gaussian part of GMSK describes the fact that the digital pulses are filtered in the time domain. This results in bits which are sinusoidal rather than square. The effective spectrum is then compressed with the average carrier frequency in the center of the passband. This is a great advantage because of the significantly reduced bandwidth. GMSK is utilized because of these bandwidth conservation properties.

The bandwidth for GSM is a 60 MHz up-link at 1850-1910 MHz and down-link at 1930-1990 MHz. The 65 MHz is divided into 299 channels, each of which is 200 kHz wide. Slight spectral spillage is allowed into neighboring channels (which is minimized by GMSK). This separated transmit/receive frequencies scheme under GSM enables easier duplex filtering.


Within the bandwidth, individual channels are subdivided into multiframes (made of 26 frames), frames (made of 8 time slots), and time slots (made of 8 fields). The time slots are 0.57 ms long allowing 156.25 bits of information including overhead.

TEST RESULTS

The modulation of GSM was verified and confirmed compliance with requirement.

4.3. Occupied Bandwidth

TEST CONFIGURATION

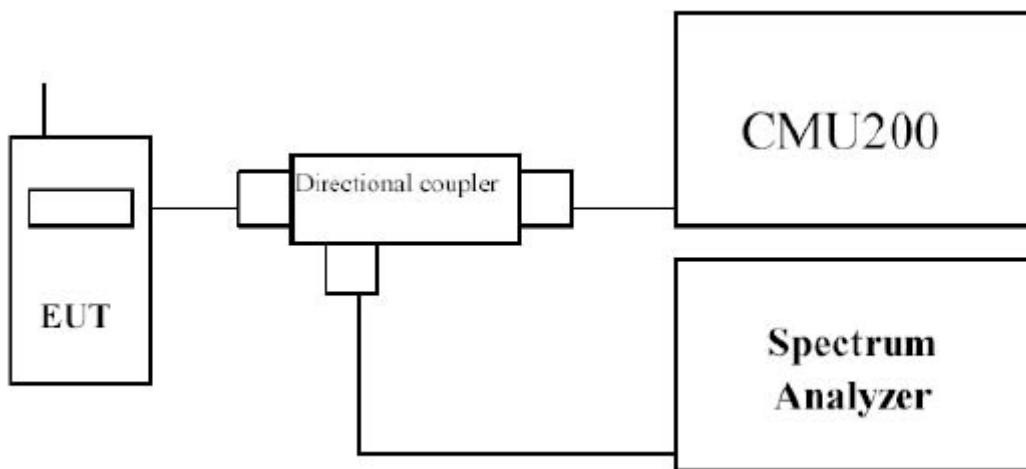

TEST PROCEDURE

Using Occupied Bandwidth measurement function of spectrum analyzer, and setting as follows:


For GPRS/EDGE 850/1900 test --- RBW = 3 kHz and VBW = 10 kHz

For WCDMA FDD Band II/V test --- RBW = 50 kHz and VBW = 200 kHz

LIMIT

N/A

TEST RESULTS

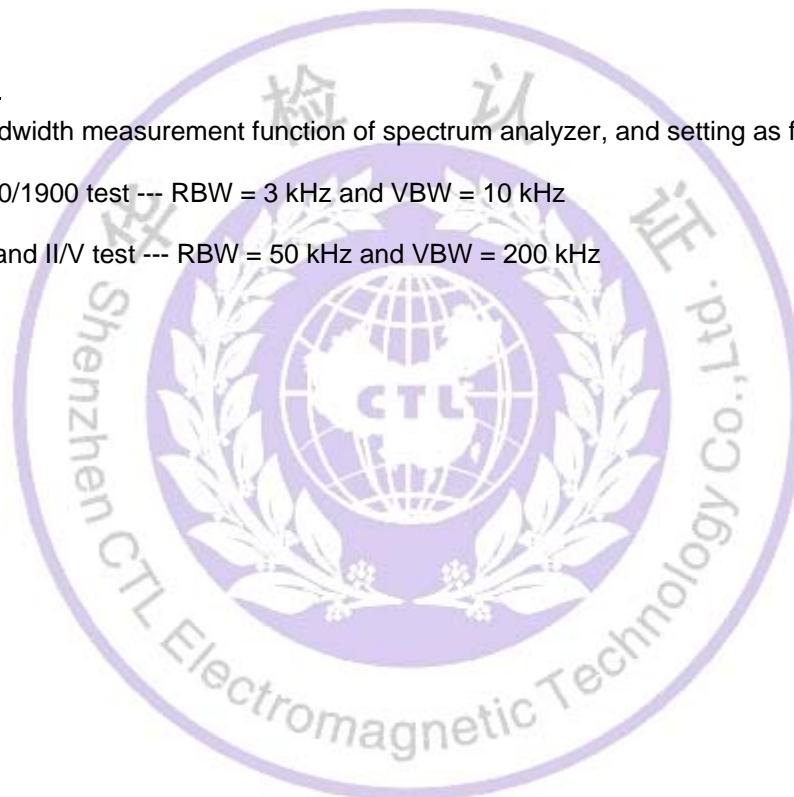

| | | | |
|--------------|----------------------|-----------|------|
| Product | GPS Tracker | | |
| Test Item | Occupied Bandwidth | | |
| Test Mode | Mode 1: GSM 850 Link | | |
| Date of Test | 2013/09/18 | Test Site | AC-6 |

| Channel No. | Frequency (MHz) | -26dB Occupied Bandwidth (kHz) | 99% Occupied Bandwidth (kHz) |
|-------------|-----------------|--------------------------------|------------------------------|
| 128 | 824.20 | 316.05 | 245.47 |
| 189 | 836.40 | 305.62 | 243.12 |
| 251 | 848.80 | 313.74 | 242.92 |

Figure Channel 128 (824.20MHz)



Figure Channel 189 (836.40MHz)


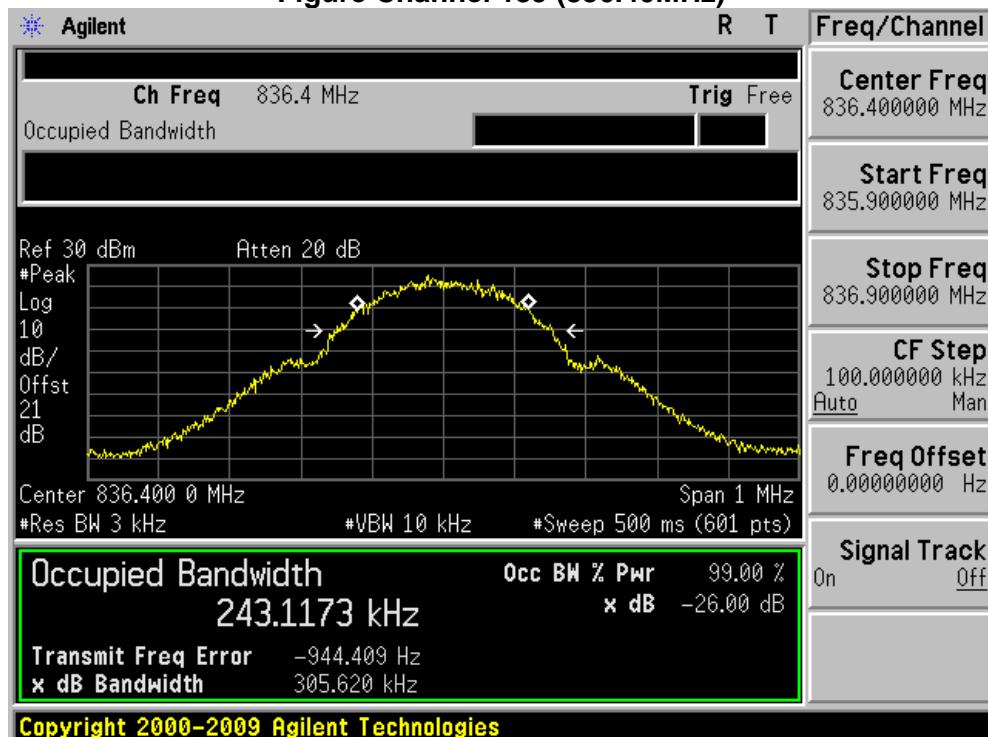


Figure Channel 251 (848.80MHz)

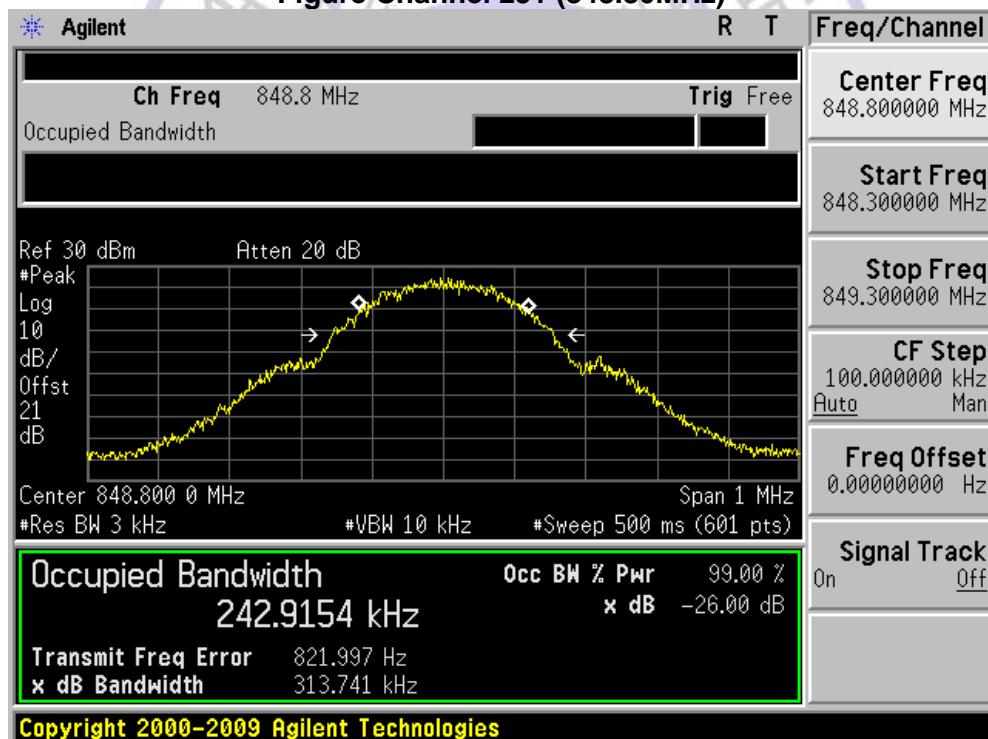

| | | | |
|--------------|-----------------------|-----------|------|
| Product | GPS Tracker | | |
| Test Item | Occupied Bandwidth | | |
| Test Mode | Mode 2: GSM 1900 Link | | |
| Date of Test | 2013/09/18 | Test Site | AC-6 |

| Channel No. | Frequency (MHz) | -26dB Occupied Bandwidth (kHz) | 99% Occupied Bandwidth (kHz) |
|-------------|-----------------|--------------------------------|------------------------------|
| 512 | 1850.20 | 316.77 | 243.61 |
| 661 | 1880.00 | 315.08 | 246.86 |
| 810 | 1909.80 | 314.49 | 246.44 |

Figure Channel 512 (1850.20MHz)

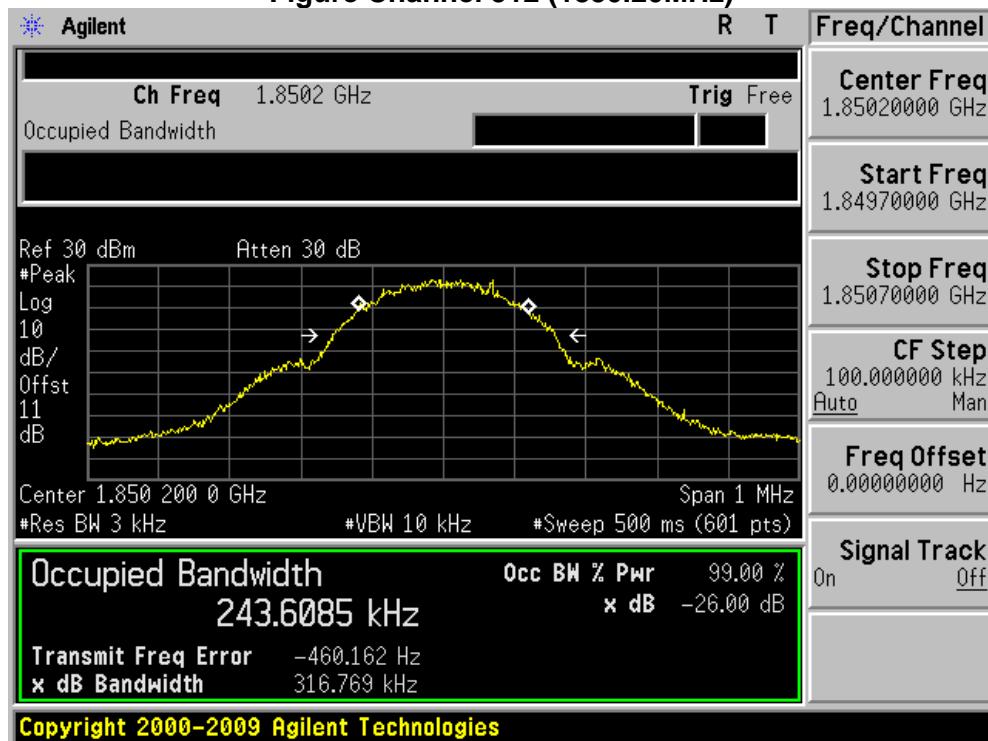
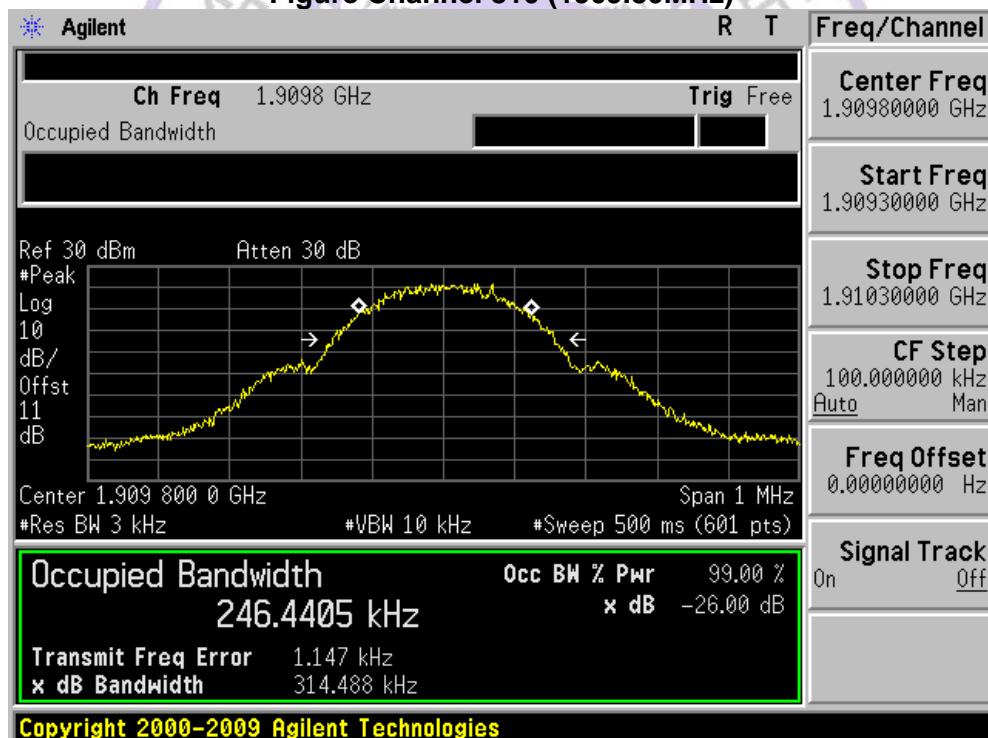


Figure Channel 661 (1880.00MHz)

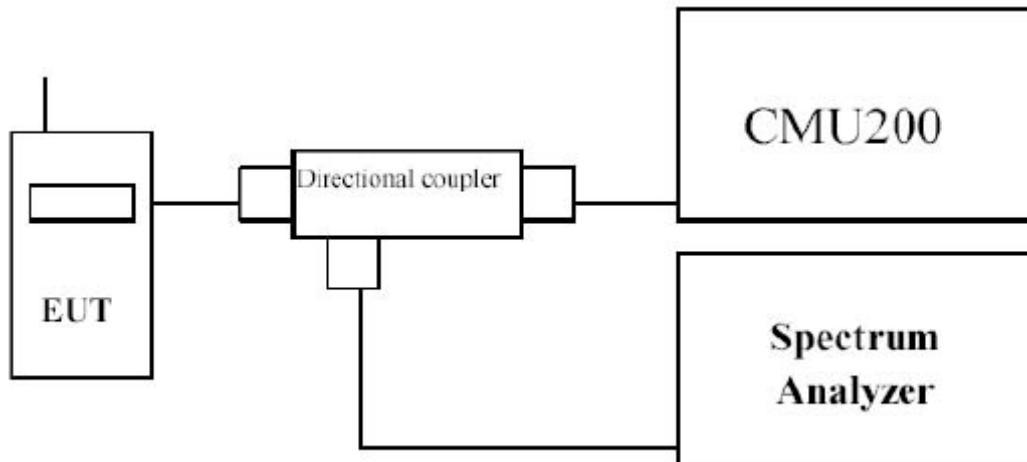


Figure Channel 810 (1909.80MHz)



4.4. Spurious Emission At Antenna Terminals (+/- 1MHz)

TEST CONFIGURATION



TEST PROCEDURE


In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST RESULTS

See next pages.

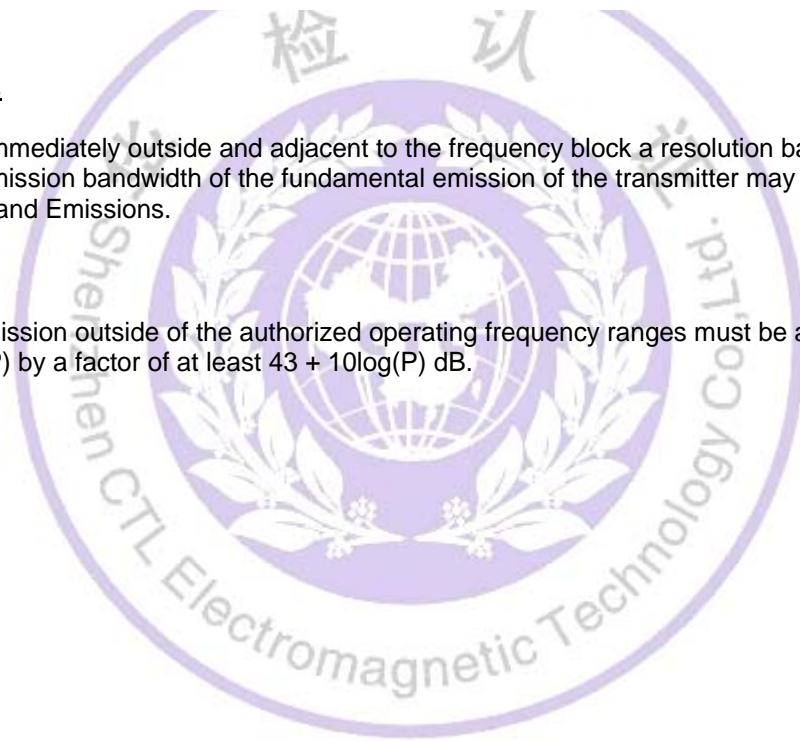

| | | | |
|--------------|---|-----------|------|
| Product | GPS Tracker | | |
| Test Item | Spurious Emission At Antenna Terminals (+/- 1MHz) | | |
| Test Mode | Mode 1: GSM 850 Link | | |
| Date of Test | 2013/09/18 | Test Site | AC-6 |

Figure Channel 128 (824.20MHz)

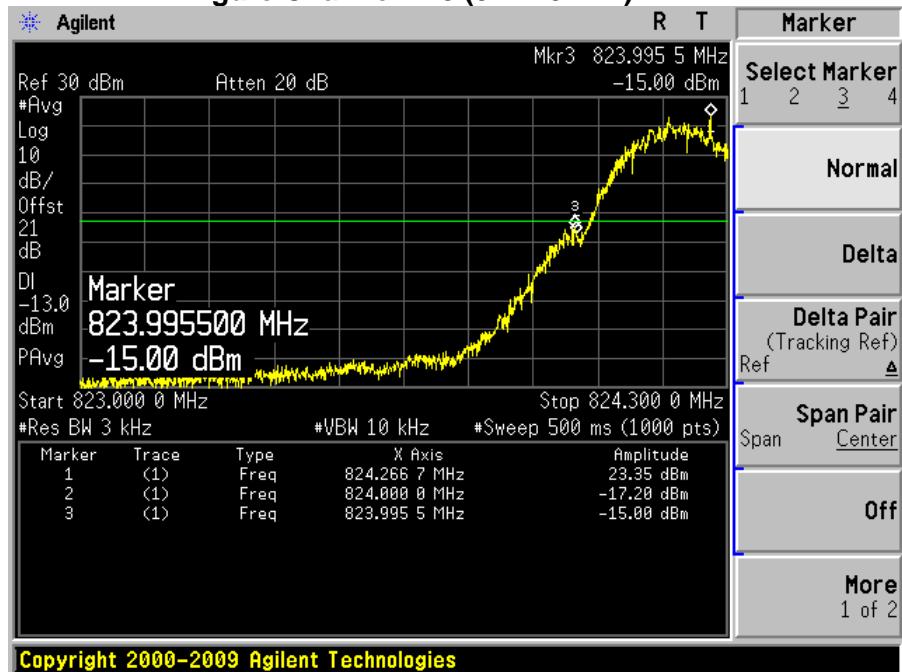


Figure Channel 251 (848.80MHz)



| | | | |
|--------------|---|-----------|------|
| Product | GPS Tracker | | |
| Test Item | Spurious Emission At Antenna Terminals (+/- 1MHz) | | |
| Test Mode | Mode 2: GSM 1900 Link | | |
| Date of Test | 2013/09/18 | Test Site | AC-6 |

Figure Channel 512 (1850.20MHz)


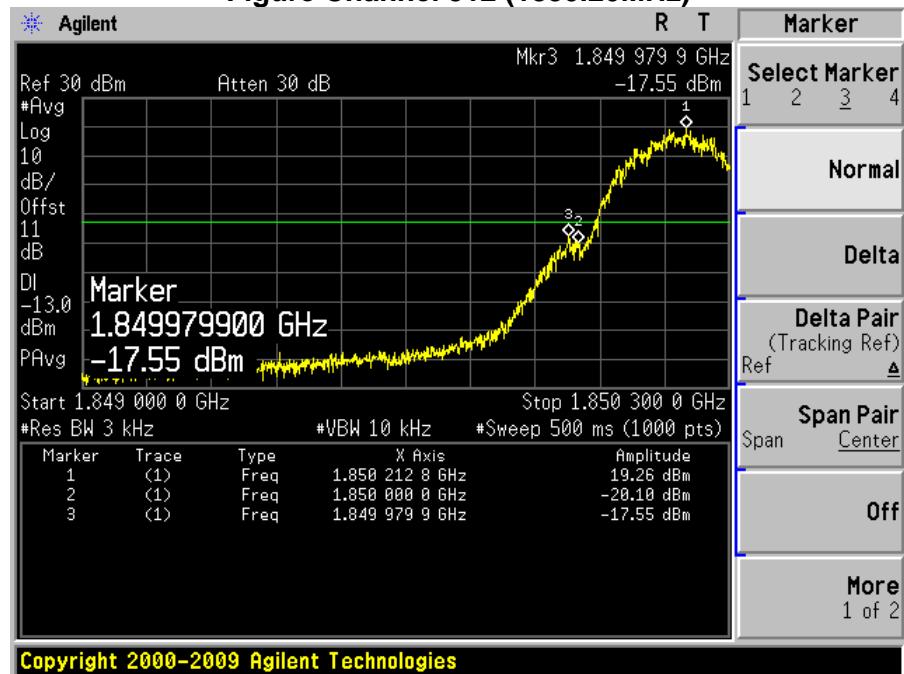



Figure Channel 810 (1909.80MHz)

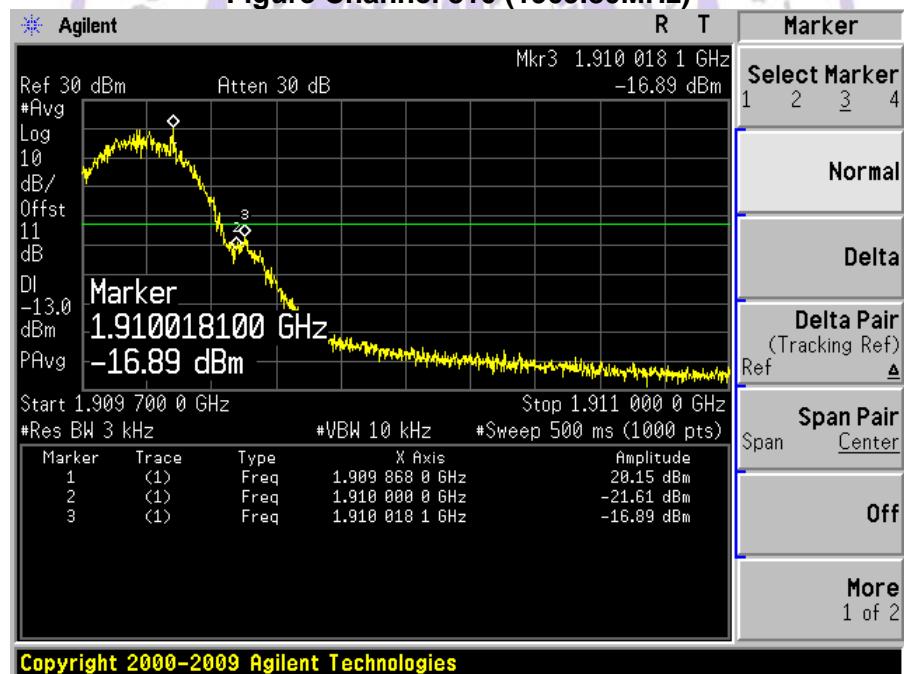


4.5. Spurious Emission

TEST CONFIGURATION

Conducted Spurious Measurement:

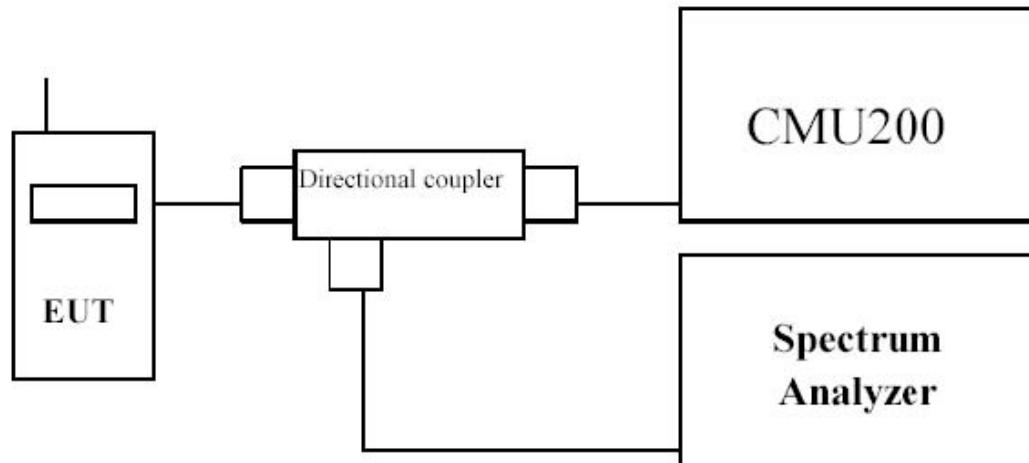

Radiated Spurious Measurement:

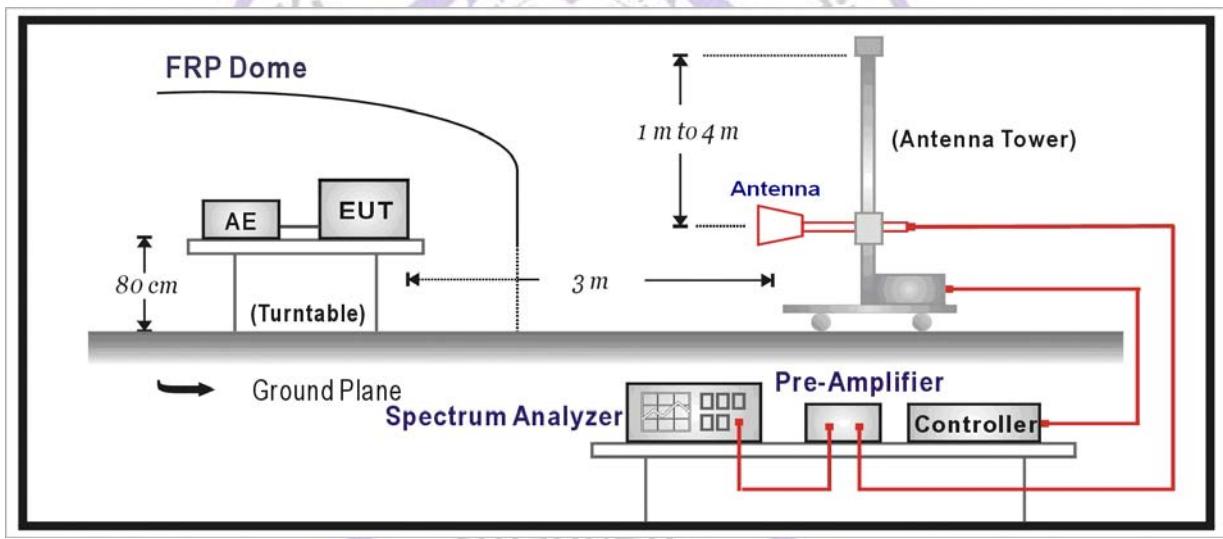

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- EUT Communicate with CMU200, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

- a) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c) The output of the test antenna shall be connected to the measuring receiver.
- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The transmitter shall be replaced by a substitution antenna.
- i) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- j) The substitution antenna shall be connected to a calibrated signal generator.
- k) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- l) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- m) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- n) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- o) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- p) The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- q) Test site anechoic chamber refer to ANSI C63.4: 2009

LIMIT



The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST RESULTS



See next pages.

| | | | |
|--------------|-----------------------------|-----------|------|
| Product | GPS Tracker | | |
| Test Item | Conducted Spurious Emission | | |
| Test Mode | Mode 1: GSM 850 Link | | |
| Date of Test | 2013/09/18 | Test Site | TR-8 |



Low Channel 128(824.2MHz)

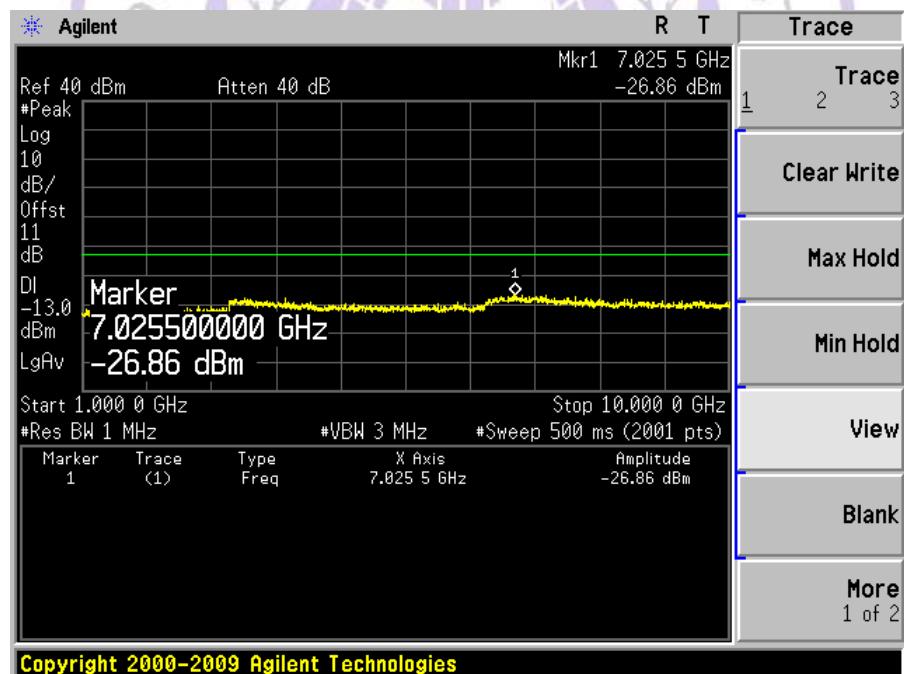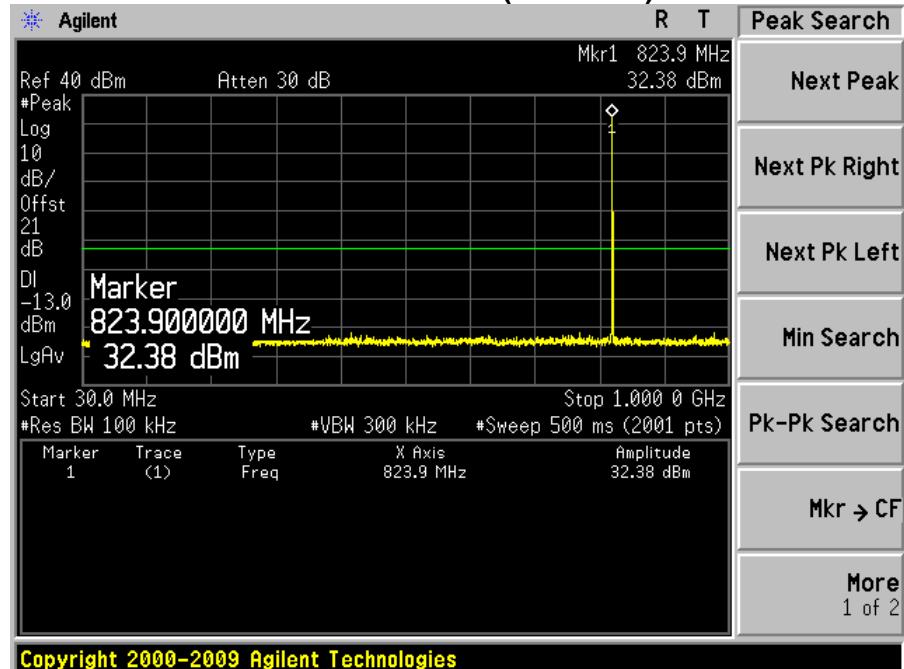

Mid Channel 189(836.4MHz)

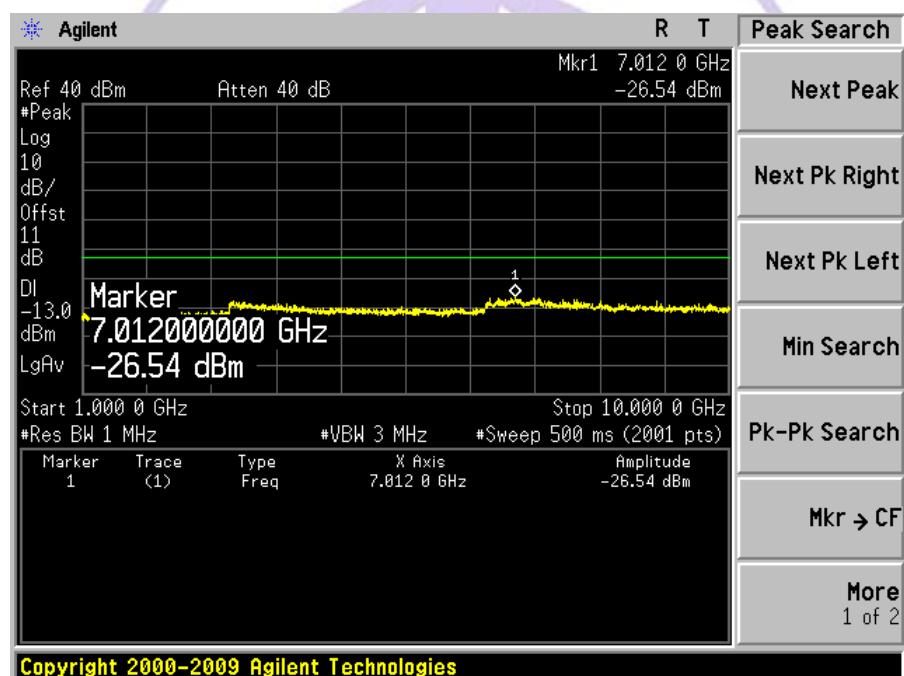
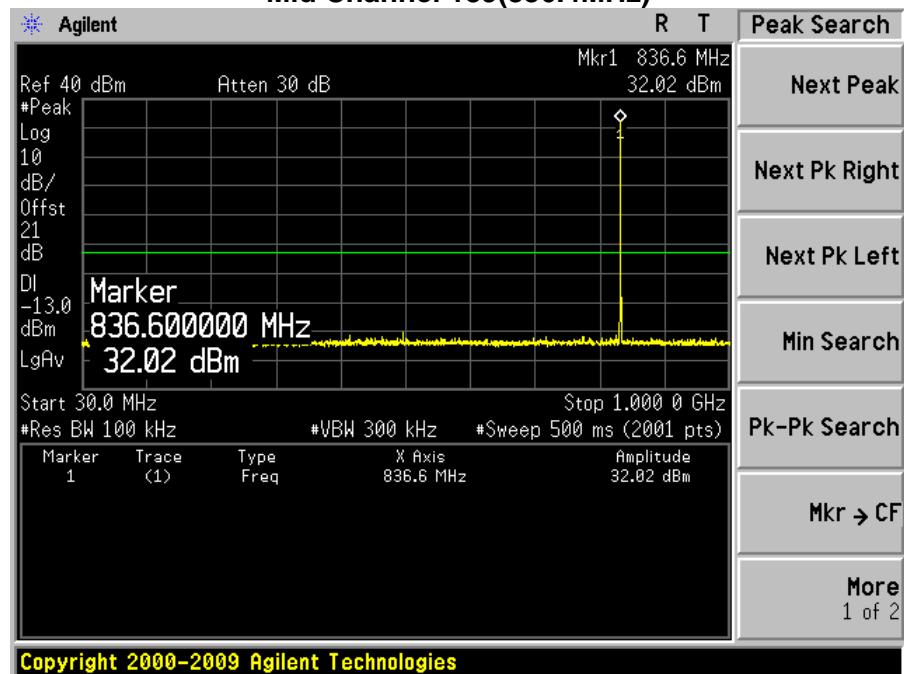


High Channel 251(848.8MHz)

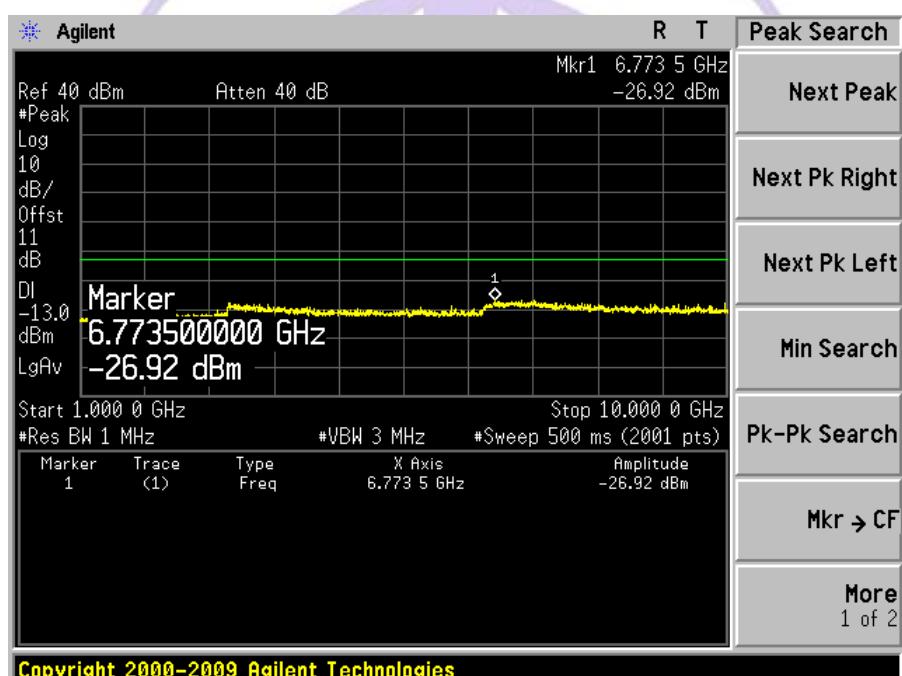
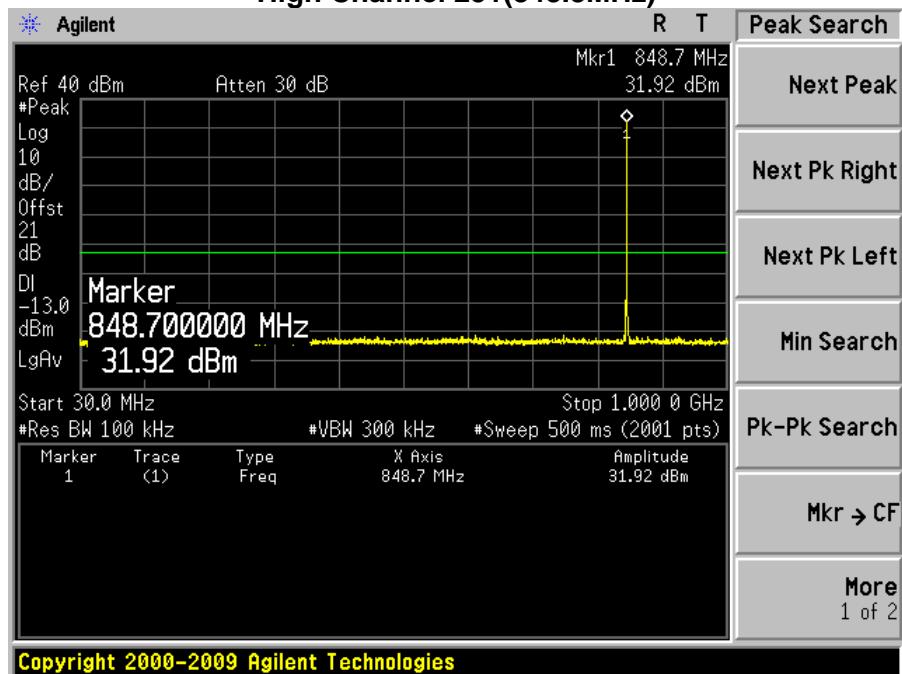


| | | | |
|--------------|-----------------------------|-----------|------|
| Product | GPS Tracker | | |
| Test Item | Conducted Spurious Emission | | |
| Test Mode | Mode 2: GSM 1900 Link | | |
| Date of Test | 2013/09/18 | Test Site | TR-8 |



Low Channel 512(1850.2MHz)

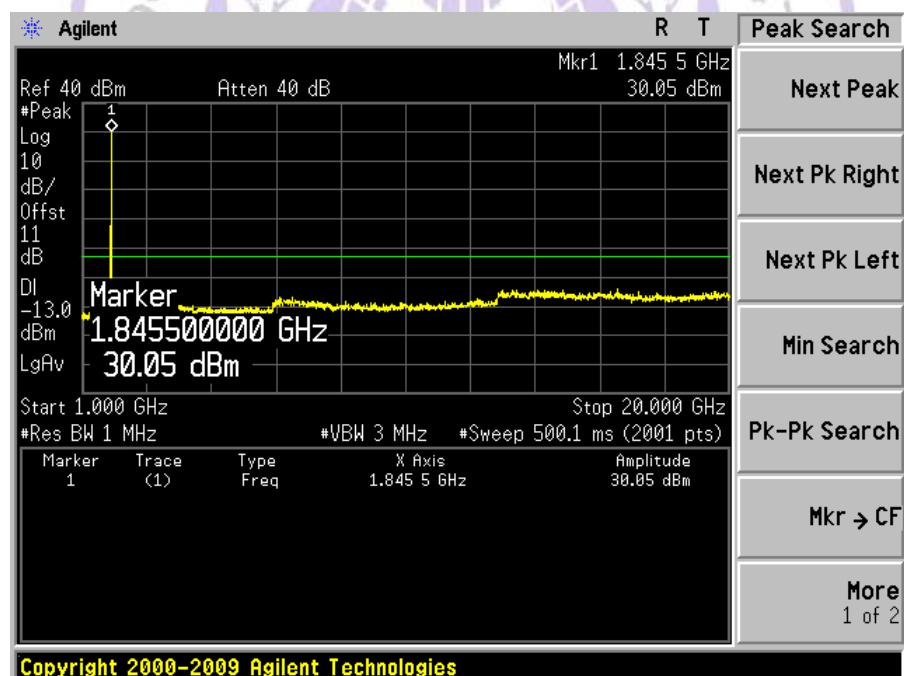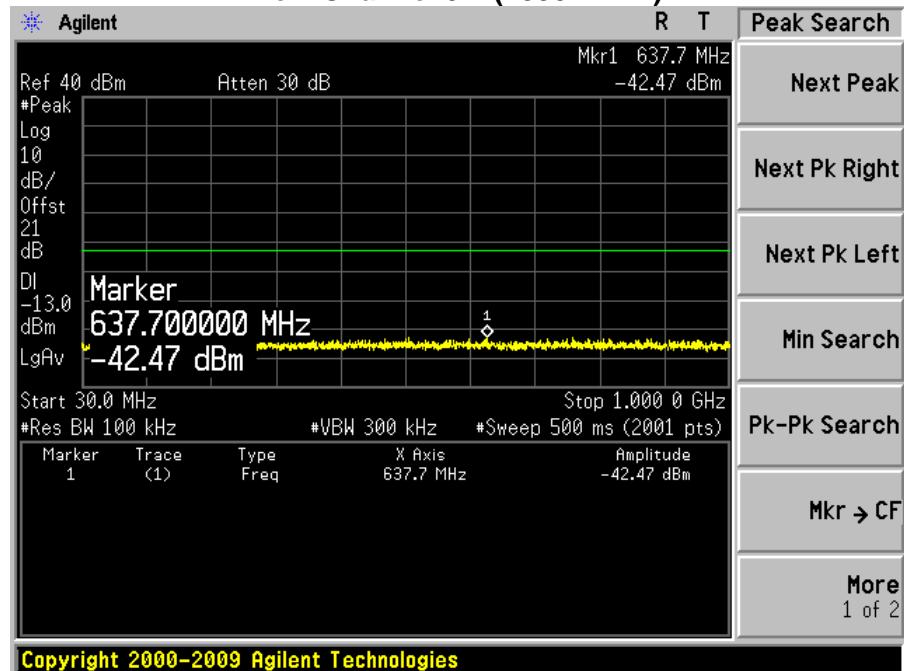

Mid Channel 661(1880.0MHz)

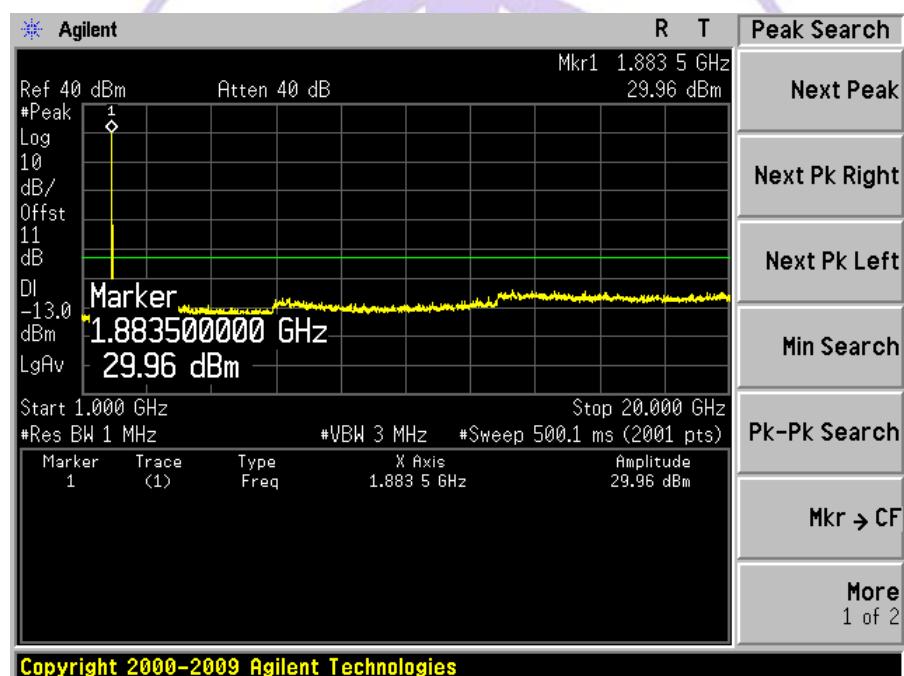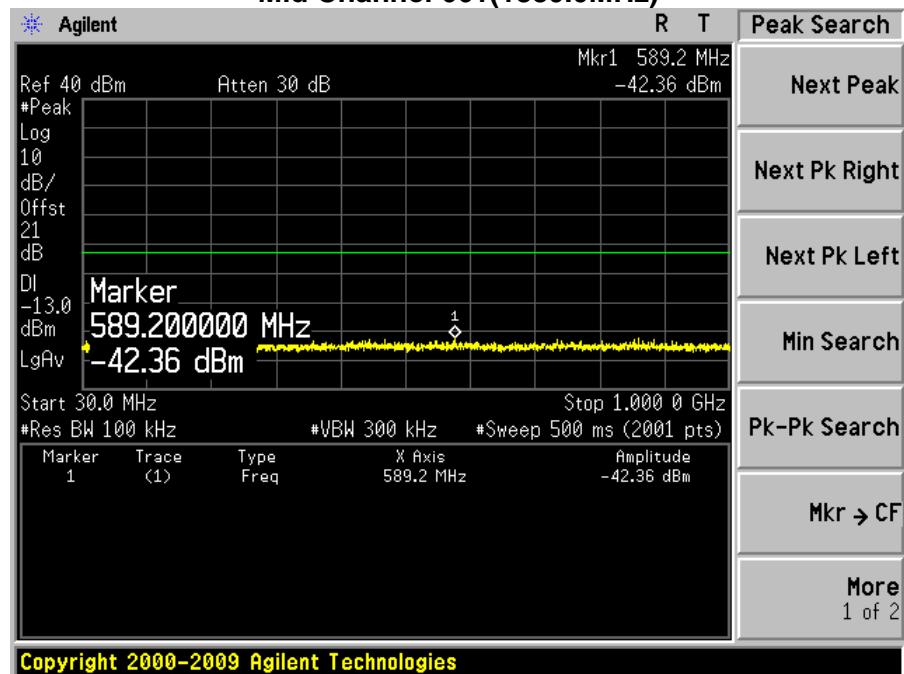

High Channel 810(1909.8MHz)

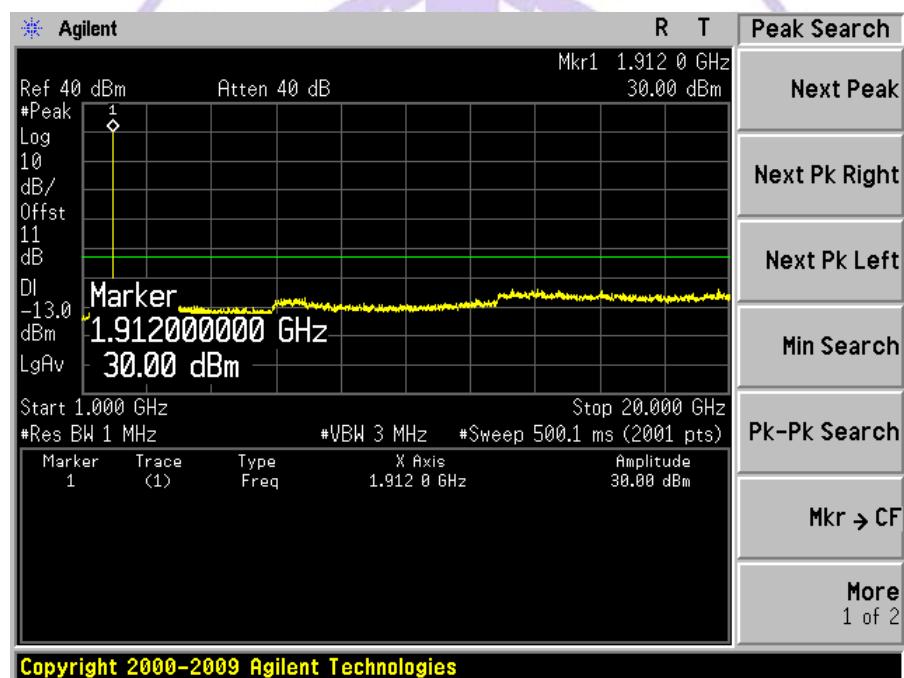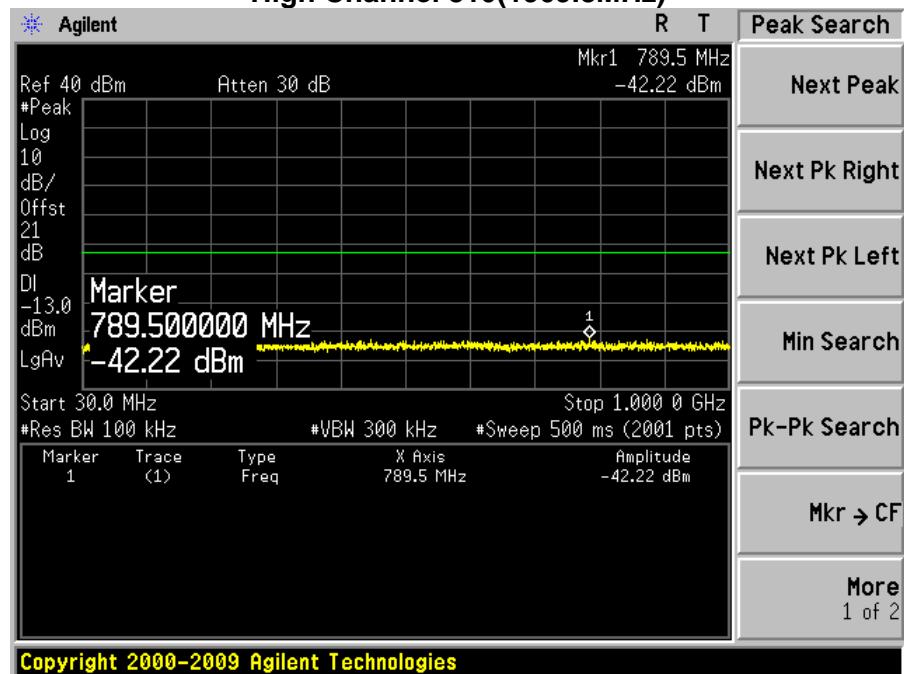

| | | | | | | | | |
|--------------|----------------------------|-----------|--|--|--|------|--|--|
| Product | GPS Tracker | | | | | | | |
| Test Item | Radiated Spurious Emission | | | | | | | |
| Test Mode | Mode 1: GSM 850 Link | | | | | | | |
| Date of Test | 2013/09/18 | Test Site | | | | AC-5 | | |

| Frequency (MHz) | SA Reading (dBm) | Ant.Pol. (H/V) | SG Reading (dBm) | Cable Loss (dB) | Gain (dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|---------------------------------------|------------------------|-------------------|------------------------|-----------------------|---------------|---------------|----------------|----------------|
| Low Channel 128 (824.20MHz) | | | | | | | | |
| 1646.00 | -35.12 | V | -37.69 | 2.50 | 9.75 | -30.44 | -13.00 | -17.44 |
| 2470.50 | -56.63 | V | -55.66 | 3.12 | 10.48 | -48.30 | -13.00 | -35.30 |
| 1646.00 | -29.20 | H | -31.86 | 2.50 | 9.75 | -24.61 | -13.00 | -11.61 |
| 2470.50 | -49.30 | H | -48.19 | 3.12 | 10.48 | -40.83 | -13.00 | -27.83 |
| Middle Channel 189 (836.40MHz) | | | | | | | | |
| 1671.50 | -37.44 | V | -40.10 | 2.52 | 9.95 | -32.67 | -13.00 | -19.67 |
| 2513.00 | -55.23 | V | -54.54 | 3.18 | 10.62 | -47.10 | -13.00 | -34.10 |
| 1671.50 | -30.74 | H | -33.16 | 2.52 | 9.95 | -25.73 | -13.00 | -12.73 |
| 2513.00 | -51.15 | H | -50.08 | 3.18 | 10.62 | -42.64 | -13.00 | -29.64 |
| High Channel 251 (848.80MHz) | | | | | | | | |
| 1697.00 | -36.57 | V | -39.31 | 2.54 | 10.06 | -31.79 | -13.00 | -18.79 |
| 2547.00 | -55.19 | V | -53.62 | 3.14 | 10.68 | -46.08 | -13.00 | -33.08 |
| 1697.00 | -29.60 | H | -31.60 | 2.54 | 10.06 | -24.08 | -13.00 | -11.08 |
| 2547.00 | -49.51 | H | -47.69 | 3.14 | 10.68 | -40.15 | -13.00 | -27.15 |

EIRP=SG Reading-Cable Loss+Gain



| | | | | | | | | |
|--------------|----------------------------|-----------|--|------|--|--|--|--|
| Product | GPS Tracker | | | | | | | |
| Test Item | Radiated Spurious Emission | | | | | | | |
| Test Mode | Mode 2: GSM 1900 Link | | | | | | | |
| Date of Test | 2013/09/18 | Test Site | | AC-5 | | | | |


| Frequency (MHz) | SA Reading (dBm) | Ant.Pol. (H/V) | SG Reading (dBm) | Cable Loss (dB) | Gain (dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|--|------------------------|-------------------|------------------------|-----------------------|---------------|---------------|----------------|----------------|
| Low Channel 512 (1850.20MHz) | | | | | | | | |
| 3703.00 | -46.82 | V | -43.36 | 3.84 | 12.69 | -34.51 | -13.00 | -21.51 |
| 5547.50 | -52.73 | V | -44.23 | 4.82 | 13.15 | -35.90 | -13.00 | -22.90 |
| 3703.00 | -52.65 | H | -49.27 | 3.84 | 12.69 | -40.42 | -13.00 | -27.42 |
| 5547.50 | -50.88 | H | -42.99 | 4.82 | 13.15 | -34.66 | -13.00 | -21.66 |
| Middle Channel 661 (1880.00MHz) | | | | | | | | |
| 3762.50 | -45.55 | V | -42.33 | 3.73 | 12.72 | -33.34 | -13.00 | -20.34 |
| 5641.00 | -52.96 | V | -45.02 | 4.93 | 13.14 | -36.81 | -13.00 | -23.81 |
| 3762.50 | -50.50 | H | -47.20 | 3.73 | 12.72 | -38.21 | -13.00 | -25.21 |
| 5641.00 | -55.20 | H | -47.59 | 4.93 | 13.14 | -39.38 | -13.00 | -26.38 |
| High Channel 810 (1909.80MHz) | | | | | | | | |
| 3822.00 | -43.85 | V | -40.14 | 4.02 | 12.73 | -31.43 | -13.00 | -18.43 |
| 5726.00 | -54.24 | V | -45.62 | 4.87 | 13.11 | -37.38 | -13.00 | -24.38 |
| 3822.00 | -49.41 | H | -45.54 | 4.02 | 12.73 | -36.83 | -13.00 | -23.83 |
| 5726.00 | -50.35 | H | -42.11 | 4.87 | 13.11 | -33.87 | -13.00 | -20.87 |

EIRP=SG Reading-Cable Loss+Gain



4.6. Frequency Stability under Temperature & Voltage Variations

TEST CONFIGURATION

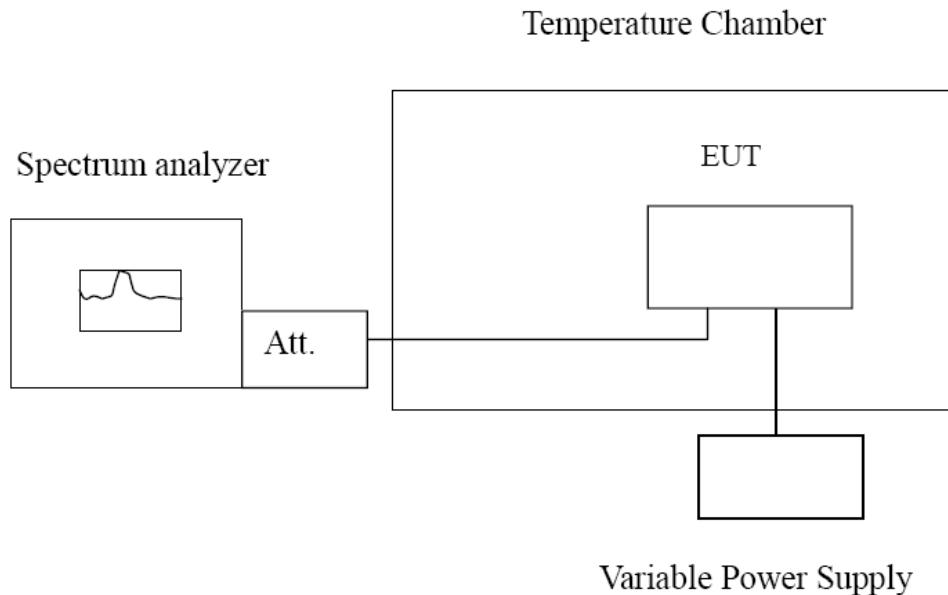

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

LIMIT

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Limit $< \pm 2.5$ ppm

TEST RESULTS

| | | | |
|--------------|--|-----------|-----|
| Product | GPS Tracker | | |
| Test Item | Frequency Stability Under Temperature & Voltage Variations | | |
| Test Mode | Mode 1: GSM 850 Link | | |
| Date of Test | 2013/09/22 | Test Site | AC6 |

Frequency Stability under Temperature

| Temperature Interval (°C) | Test Frequency (MHz) | Deviation (Hz) | Limit (Hz) |
|---------------------------|----------------------|----------------|------------|
| -30 | 836.40 | 66 | ± 2091 |
| -20 | 836.40 | -33 | ± 2091 |
| -10 | 836.40 | -23 | ± 2091 |
| 0 | 836.40 | -44 | ± 2091 |
| 10 | 836.40 | 69 | ± 2091 |
| 20 | 836.40 | -22 | ± 2091 |
| 30 | 836.40 | 36 | ± 2091 |
| 40 | 836.40 | -69 | ± 2091 |
| 50 | 836.40 | 45 | ± 2091 |

Frequency Stability under Voltage

| DC Voltage (V) | Test Frequency (MHz) | Deviation (Hz) | Limit (Hz) |
|----------------|----------------------|----------------|------------|
| 15.60 | 836.40 | -11 | ± 2091 |
| 12.00 | 836.40 | 22 | ± 2091 |
| 9.20 | 836.40 | -36 | ± 2091 |

| | | | |
|--------------|--|-----------|-----|
| Product | GPS Tracker | | |
| Test Item | Frequency Stability Under Temperature & Voltage Variations | | |
| Test Mode | Mode 2: PCS1900 Link | | |
| Date of Test | 2013/09/22 | Test Site | AC6 |


Frequency Stability under Temperature

| Temperature Interval (°C) | Test Frequency (MHz) | Deviation (Hz) | Limit (Hz) |
|---------------------------|----------------------|----------------|------------|
| -30 | 1880.00 | -44 | ± 4700 |
| -20 | 1880.00 | 26 | ± 4700 |
| -10 | 1880.00 | -39 | ± 4700 |
| 0 | 1880.00 | -56 | ± 4700 |
| 10 | 1880.00 | 44 | ± 4700 |
| 20 | 1880.00 | 35 | ± 4700 |
| 30 | 1880.00 | 43 | ± 4700 |
| 40 | 1880.00 | -59 | ± 4700 |
| 50 | 1880.00 | -74 | ± 4700 |

Frequency Stability under Voltage


| DC Voltage (V) | Test Frequency (MHz) | Deviation (Hz) | Limit (Hz) |
|----------------|----------------------|----------------|------------|
| 15.60 | 1880.00 | -28 | ± 4700 |
| 12.00 | 1880.00 | -67 | ± 4700 |
| 9.20 | 1880.00 | 32 | ± 4700 |


5. Test Setup Photos of the EUT

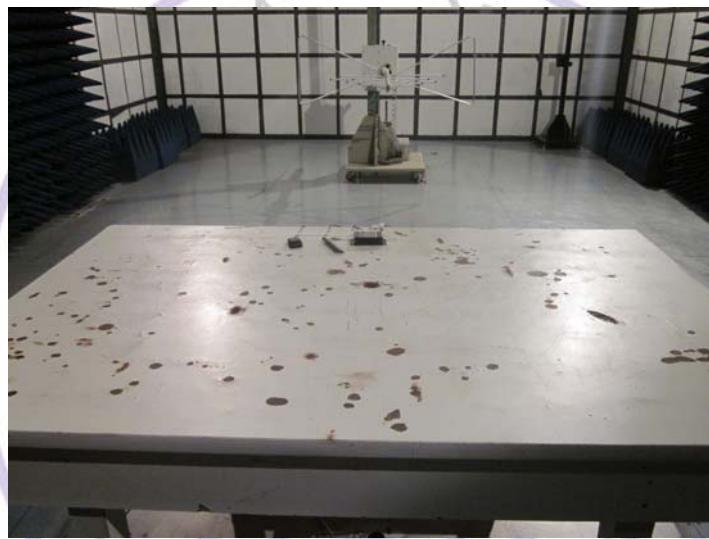


6. External and Internal Photos of the EUT

External Photos of EUT

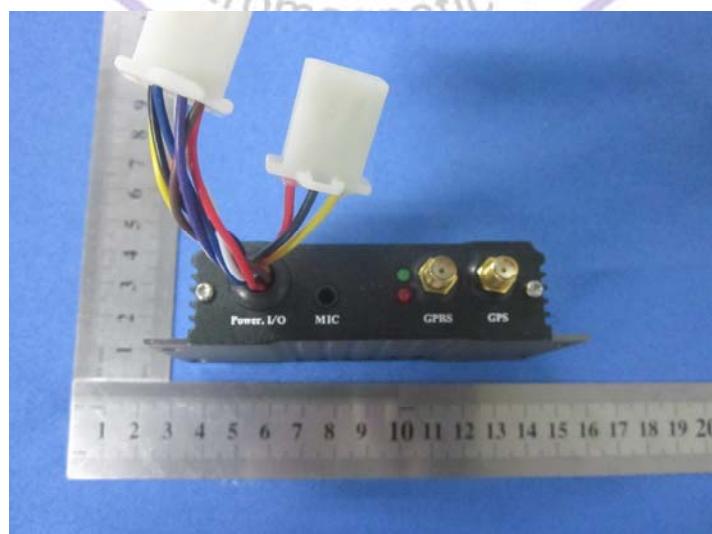

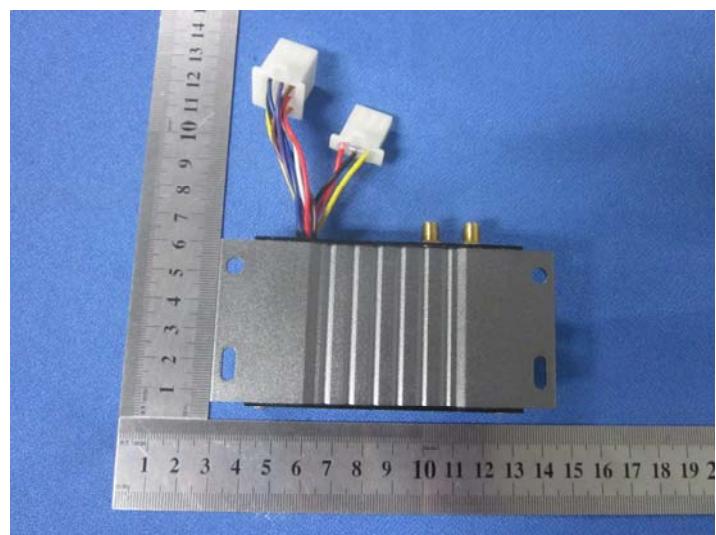

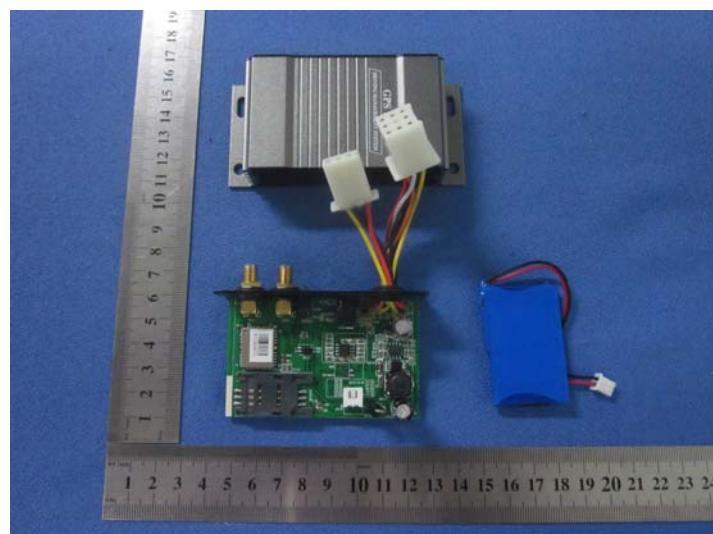

Internal Photos of EUT





.....End of Report.....