



**DATE: 18 February 2014**

**I.T.L. (PRODUCT TESTING) LTD.  
FCC Radio Test Report**


**for**


**VizBee SAS**


**Equipment under test:**

**RFID Ethernet Gateway**

**ETH101**

Written by:   
R. Pinchuck, Documentation

Approved by:   
A. Sharabi, Test Engineer

Approved by:   
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



## Measurement/Technical Report for **VizBee SAS**

### RFID Ethernet Gateway

ETH101

**FCC ID: 2AA2YETH101**

18 February 2014

This report concerns:

Original Grant: X

Class I Change:

Class II Change:

Equipment type:

Spread Spectrum/Digital Device  
2400-2483.5 MHz

Limits used:

47CFR15 Section 15.247, Section 15.209

Measurement procedure used is KDB 558074 D01 09, April 2013 and  
ANSI C63.4-2003.

Application for Certification

prepared by:

R. Pinchuck  
ITL (Product Testing) Ltd.  
1 Bat Sheva St.  
Lod 7116002  
Israel  
e-mail Rpinchuck@itl.co.il

Applicant for this device:

(different from "prepared by")

Alain Blonder  
34a Rue des Vinaigriers  
Paris 75010  
France  
Tel: +33 9 70 44 61 99  
Fax: +33 33177725343  
e-mail: ablonder@vizbee-rfid.com

# TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION</b>	<b>5</b>
1.1	Administrative Information	5
1.2	List of Accreditations	6
1.3	Product Description	7
1.4	Test Methodology	7
1.5	Test Facility	7
1.6	Measurement Uncertainty	7
<b>2.</b>	<b>SYSTEM TEST CONFIGURATION</b>	<b>8</b>
2.1	Justification	8
2.2	EUT Exercise Software	8
2.3	Special Accessories	8
2.4	Equipment Modifications	8
2.5	Configuration of Tested System	9
<b>3.</b>	<b>CONDUCTED AND RADIATED MEASUREMENT TEST SET-UP PHOTO</b>	<b>10</b>
<b>4.</b>	<b>CONDUCTED EMISSION FROM AC MAINS</b>	<b>13</b>
4.1	Test Specification	13
4.2	Test Procedure	13
4.3	Measured Data	13
4.4	Test Instrumentation Used, Conducted Measurement	17
<b>6.</b>	<b>6 DB MINIMUM BANDWIDTH</b>	<b>18</b>
6.1	Test procedure	18
6.2	Results table	20
6.3	Test Equipment Used	21
<b>7.</b>	<b>26 DB MINIMUM BANDWIDTH</b>	<b>22</b>
7.1	Test procedure	22
7.2	Results table	24
7.3	Test Equipment Used	25
<b>8.</b>	<b>MAXIMUM TRANSMITTED PEAK POWER OUTPUT</b>	<b>26</b>
8.1	Test procedure	26
8.2	Results table	28
8.3	Test Equipment Used	29
<b>9.</b>	<b>BAND EDGE SPECTRUM</b>	<b>30</b>
9.1	Test procedure	30
9.2	Results table	31
9.3	Test Equipment Used. Band edge Spectrum	32
<b>10.</b>	<b>RADIATED EMISSION, 9 KHZ – 30 MHZ</b>	<b>33</b>
10.1	Test Specification	33
10.2	Test Procedure	33
10.3	Measured Data	33
10.4	Test Instrumentation Used, Radiated Measurements	34
10.5	Field Strength Calculation	35
<b>11.</b>	<b>SPURIOUS RADIATED EMISSION 30 – 25000 MHZ</b>	<b>36</b>
11.1	Radiated Emission 30-25000 MHz	36
11.2	Test Data	37
11.3	Test Instrumentation Used, Radiated Measurements Above 1 GHz	44
<b>12.</b>	<b>TRANSMITTED POWER DENSITY</b>	<b>45</b>
12.1	Test procedure	45
12.2	Results table	47
12.3	Test Equipment Used	48
<b>13.</b>	<b>AVERAGE FACTOR CALCULATION</b>	<b>49</b>
<b>14.</b>	<b>ANTENNA GAIN/INFORMATION</b>	<b>50</b>



<b>15.</b>	<b>R.F EXPOSURE/SAFETY-----</b>	<b>51</b>
<b>16.</b>	<b>APPENDIX A - CORRECTION FACTORS -----</b>	<b>52</b>
16.1	Correction factors for CABLE .....	52
16.2	Correction factors for CABLE .....	53
16.3	Correction factors for CABLE .....	54
16.4	Correction factors for CABLE .....	55
12.6	Correction factors for LOG PERIODIC ANTENNA .....	56
16.5	Correction factors for LOG PERIODIC ANTENNA .....	57
16.6	Correction factors for BICONICAL ANTENNA .....	58
16.7	Correction factors for BICONICAL ANTENNA .....	59
16.8	Correction factors for Double-Ridged Waveguide Horn.....	60
16.9	Correction factors for Horn Antenna .....	61
16.10	Correction factors for Horn Antenna .....	62
16.11	Correction factors for ACTIVE LOOP ANTENNA .....	63



# 1. General Information

## 1.1 Administrative Information

Manufacturer:	VizBee SAS
Manufacturer's Address:	34a Rue des Vinaigriers Paris 75010 France Tel: +33 9 70 44 61 99 Fax: +33 33177725343
Manufacturer's Representative:	Alain Blonder
Equipment Under Test (E.U.T):	RFID Ethernet Gateway
Equipment Model No.:	ETH101
Equipment Serial No.:	Not designated
Date of Receipt of E.U.T:	08.01.14
Start of Test:	08. 01.14
End of Test:	13.01.14
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15, Subpart C



## **1.2 List of Accreditations**

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

### 1.3 **Product Description**

The Fireflies V5 device, referred to as “Ethernet Gateway” and as the EUT in this report is an active RFID tag / PoE capable Ethernet bridge operating in the 2.4-GHz frequency band. The device consists of two parts: the radio module and the Ethernet controller.

The radio module is driven by a central microcontroller unit which is a true System-on-Chip (SoC) solution for 2.4-GHz IEEE 802.15.4 and Zigbee Applications provided by Texas Instruments, namely CC2530. The SoC features a 2.4-GHz IEEE 802.14.4 compliant RF transceiver connected to a compact ceramic monopole antenna and is running at 32-MHz in active mode.

The Ethernet controller is a PIC18F67J60 from Microchip interface to the LAN connector. The device is powered by the Power Over Ethernet RJ45 LAN port or by a micro USB (5V) connector. A button and a led for each module (radio and Ethernet) control and provide status information on the device.

### 1.4 **Test Methodology**

Both conducted and radiated testing were performed according to the procedures in KDB 558074 D01 09 April 2013 and ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

### 1.5 **Test Facility**

The radiated emissions tests were performed at I.T.L.’s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing November 21, 2012).

I.T.L.’s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

### 1.6 **Measurement Uncertainty**

Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) 0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.6 dB

Note: See ITL Procedure No. PM 198.

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 5.2 dB

Note: See ITL Procedure No. PM 198.

## 2. System Test Configuration

### 2.1 *Justification*

Radiated emission screening was performed in 3 orthogonal orientations. The worst case orientation was the horizontal position as ceiling mounted.

### 2.2 *EUT Exercise Software*

No special exercise software was used.

### 2.3 *Special Accessories*


No special accessories were needed to achieve compliance.

### 2.4 *Equipment Modifications*

No modifications were necessary in order to achieve compliance.



## 2.5 Configuration of Tested System

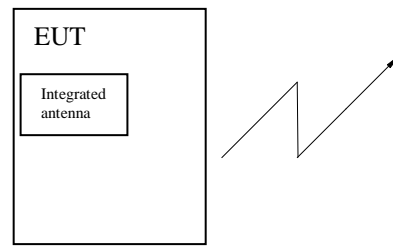

**Figure 1. Configuration of Tested System**

### 3. Conducted and Radiated Measurement Test Set-up Photo




Figure 2. Conducted Emission From AC Mains Test



Figure 3. Radiated Emission Test



**Figure 4. Radiated Emission Test**

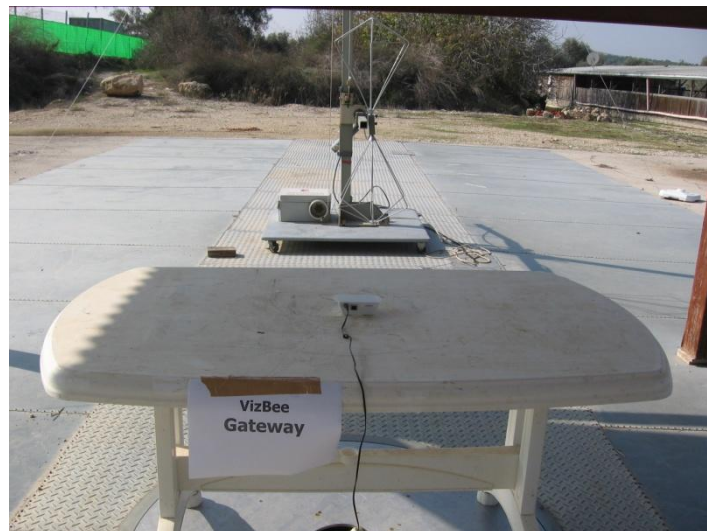

**Figure 5. Radiated Emission Test**



**Figure 6. Radiated Emission Test**

## 4. Conducted Emission from AC Mains

### 4.1 Test Specification

F.C.C., Part 15, Subpart C

### 4.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 3.1. In order to minimize background noise interference, the conducted emission testing was performed inside a shielded room, with the E.U.T placed on a 0.8 meter high wooden table, 0.4 meter from the room's vertical wall.

The E.U.T was powered from 115 V AC via a 50 Ohm / 50  $\mu$ Hn Line Impedance Stabilization Network (LISN) on the phase and neutral lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T

The center of the E.U.T AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The emission voltages at the LISN's outputs were measured using a computerized receiver, complying with CISPR 16 requirements. The specification limits are loaded to the receiver via a 3.5" floppy disk and are displayed on the receiver's spectrum display.

A frequency scan between 0.15 and 30 MHz was performed at 9 kHz I.F. band width, and using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak and average detector.

### 4.3 Measured Data

JUDGEMENT: Passed by 2.4 dB

The margin between the emission levels and the specification limit is, in the worst case, 2.4 dB for the phase line at 26.936007 MHz and 14.2 dB at 26.936007 MHz for the neutral line.

The EUT met the F.C.C. Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 7* to *Figure 10*.

TEST PERSONNEL:

Tester Signature: 

Date: 06.03.14

Typed/Printed Name:

## Conducted Emission

E.U.T Description RFID Ethernet Gateway  
Type ETH101  
Serial Number: Not designated

Specification: FCC Part 15, Subpart C  
Lead: Phase  
Detectors: Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.230416	35.6	32.2	-30.3	19.0	-33.5	0.0
2	0.306889	35.4	31.0	-29.0	17.1	-33.0	0.0
3	0.450698	30.1	34.6	-22.3	10.0	-36.9	0.0
4	1.078417	34.6	31.7	-24.3	25.1	-20.9	0.0
5	18.855237	48.7	45.8	-14.2	35.3	-14.6	0.0
6	26.936007	54.8	52.2	-7.8	47.6	-2.4	0.0


**Figure 7. Detectors: Quasi-Peak, AVERAGE**

*Note: QP Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.*

## Conducted Emission

E.U.T Description RFID Ethernet Gateway  
Type ETH101  
Serial Number: Not designated

Specification: FCC Part 15, Subpart C  
Lead: Phase  
Detectors: Quasi-peak, Average

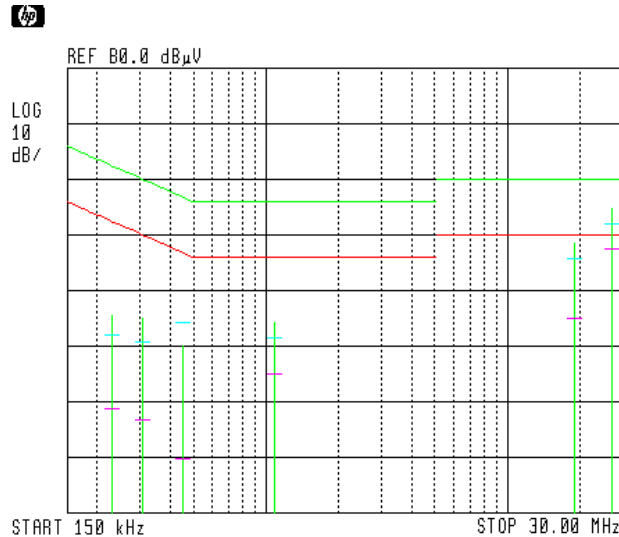

**Figure 8. Detectors: Quasi-peak, Average**

Note: Fail indication on the spectral plot results from peak detector level reading above the limit. This indication is for information only and it should not be interpreted as a test failure.

## Conducted Emission

E.U.T Description    RFID Ethernet Gateway  
Type                    ETH101  
Serial Number:        Not designated

Specification:        FCC Part 15, Subpart C  
Lead:                   Neutral  
Detectors:            Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.230417	36.4	33.9	-28.6	27.7	-24.8	0.0
2	0.306893	32.5	29.5	-30.6	18.0	-32.0	0.0
3	0.450692	28.6	24.9	-32.0	6.2	-40.8	0.0
4	1.078414	32.3	29.7	-26.3	24.2	-21.8	0.0
5	18.855237	41.0	37.4	-22.6	28.7	-21.3	0.0
6	26.936007	44.3	41.2	-18.8	35.8	-14.2	0.0

**Figure 9. Detectors: Peak, AVERAGE**


*Note: QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.*



## Conducted Emission

E.U.T Description    RFID Ethernet Gateway  
Type                    ETH101  
Serial Number:        Not designated

Specification:    FCC Part 15, Subpart C  
Lead:                Neutral  
Detectors:        Peak, Quasi-peak, Average

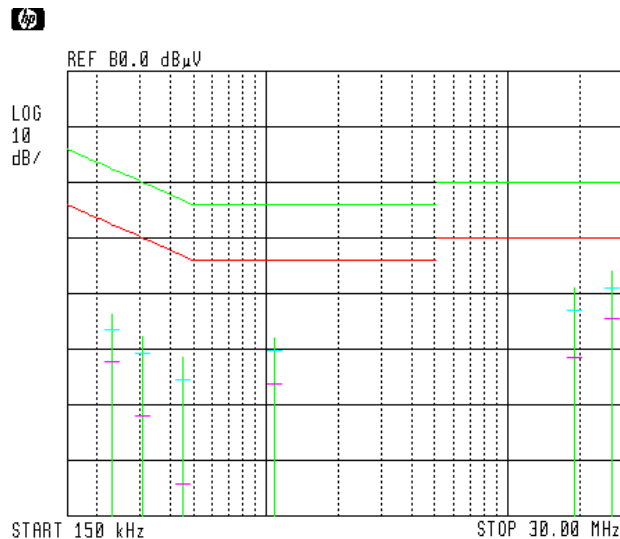

**Figure 10 Detectors: Quasi-peak, Average**

Note: Fail indication on the spectral plot results from peak detector level reading above the limit. This indication is for information only and it should not be interpreted as a test failure.

#### 4.4 Test Instrumentation Used, Conducted Measurement

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
LISN	Fischer	FCC-LISN-2A	127	January 2, 2014	1 Year
LISN	Fischer	FCC-LISN-2A	128	January 2, 2014	1 Year
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
Receiver RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year

## 6. 6 dB Minimum Bandwidth

### 6.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The spectrum bandwidth of the E.U.T. at the point of 6 dB below maximum peak power was measured and recorded.

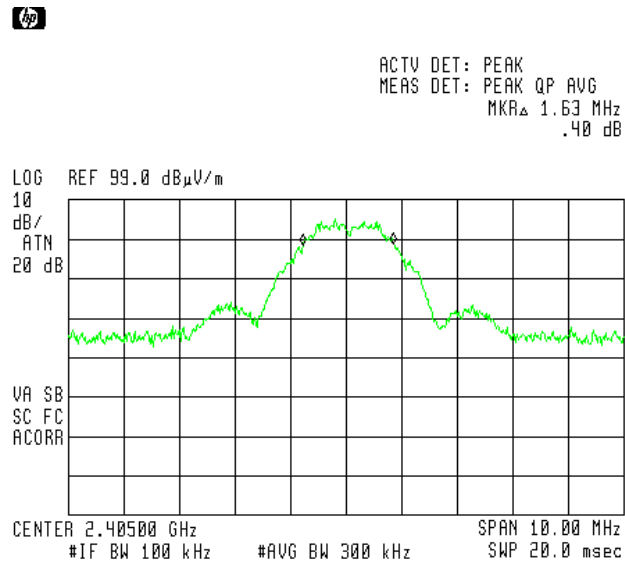


Figure 11 — Low Channel



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR $\Delta$  1.50 MHz  
.65 dB

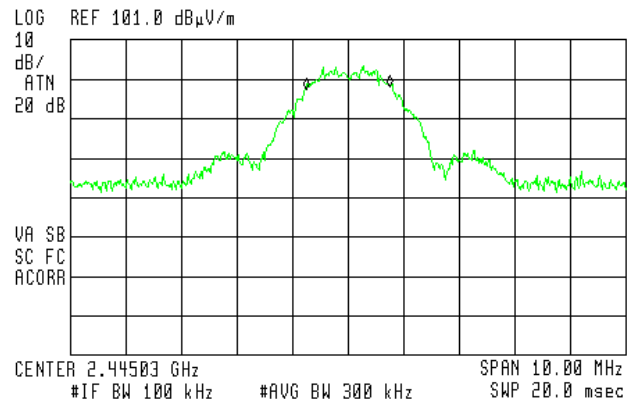


Figure 12 — Mid Channel



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR $\Delta$  1.60 MHz  
.37 dB

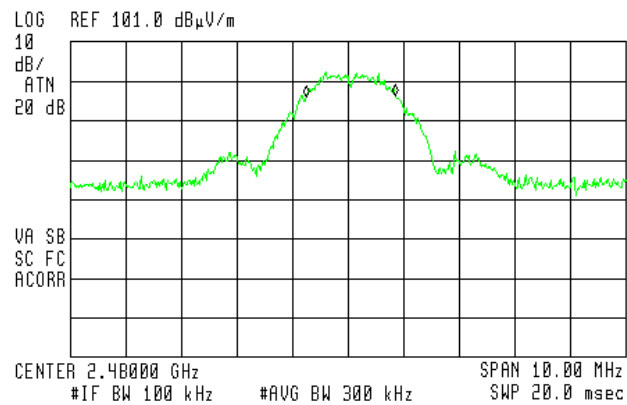


Figure 13 — High Channel

## 6.2 Results table


E.U.T Description: RFID Ethernet Gateway  
Model No.: ETH101  
Serial Number: Not designated  
Specification: F.C.C. Part 15, Subpart C: (15.247-a2)

Operation Frequency (MHz)	Reading (MHz)	Specification (MHz)
2405.00	1.63	0.5
2445.00	1.50	0.5
2480.00	1.60	0.5

**Figure 14 6 dB Minimum Bandwidth**

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: 

Date: 06.03.14

Typed/Printed Name: A. Sharabi

### 6.3 Test Equipment Used.6 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

**Figure 15 Test Equipment Used**

## 7. 26 dB Minimum Bandwidth

### 7.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The spectrum bandwidth of the E.U.T. at the point of 26 dB below maximum peak power was measured and recorded.

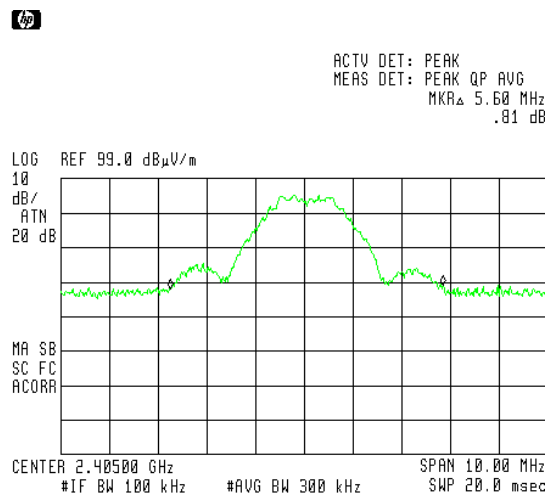


Figure 16 — Low Channel

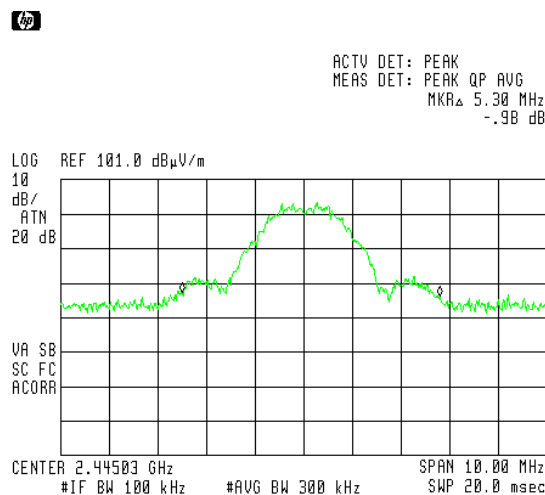


Figure 17 — Mid Channel



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKRΔ 5.18 MHz  
-1.32 dB

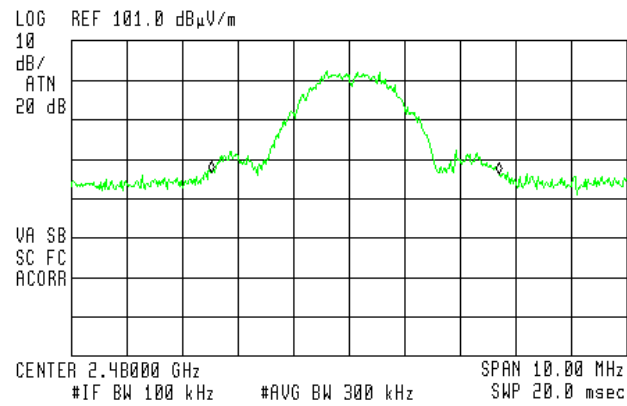


Figure 18 — High Channel

## 7.2 Results table

E.U.T Description: RFID Ethernet Gateway

Model No.: ETH101

Serial Number: Not designated

Specification: F.C.C. Part 15, Subpart C: (15.247-a2)

Operation Frequency (MHz)	Reading (MHz)	Specification (MHz)
2405.00	5.60	N/A
2445.00	5.30	N/A
2480.00	5.18	N/A

**Figure 19 26 dB Minimum Bandwidth**

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: 

Date: 06.03.14

Typed/Printed Name: A. Sharabi



### 7.3 Test Equipment Used. 26 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

**Figure 20 Test Equipment Used**

## 8. Maximum Transmitted Peak Power Output

### 8.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The E.U.T. was tested at low, mid and high channels at 20MHz.

Radiated output power levels were measured at selected operation frequencies and the results were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} \quad [W]$$

E - Field Strength (V/m)

d – Distance from transmitter (m)

G – Antenna gain

P – Peak power (W)

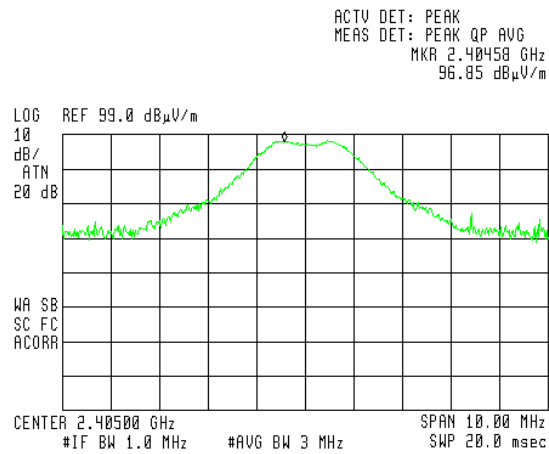


Figure 21 , Low Channel , Vertical

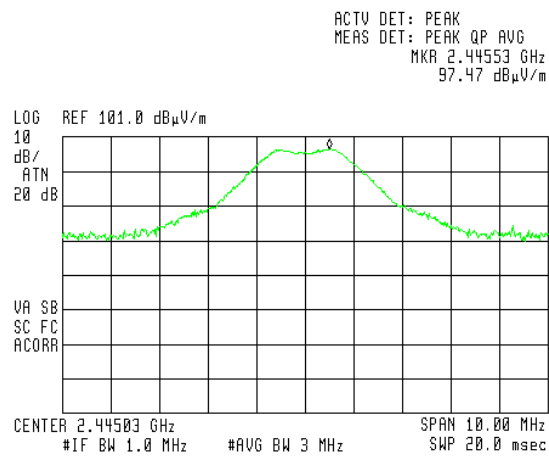


Figure 22, Mid Channel , Vertical

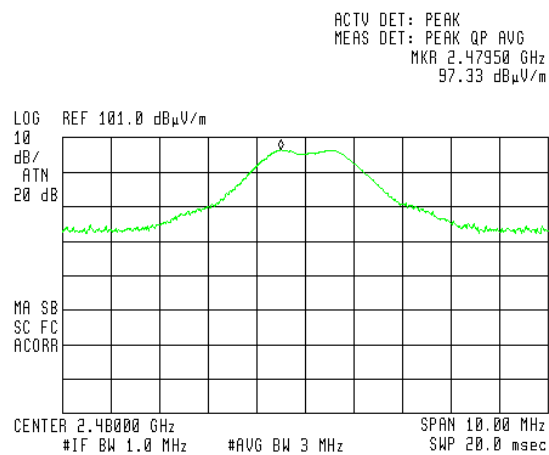


Figure 23 , High Channel, Vertical

## 8.2 Results table

E.U.T. Description: RFID Ethernet Gateway

Model No.: ETH101

Serial Number: Not designated


Specification: F.C.C. Part 15, Subpart C Section 15.247(b)

Operation Frequency (MHz)	Power (dBuV/m)	Power (dBm)	Power (mW)	Specification (mW)	Margin (mW)
2405.00	96.85	1.65	1.46	1000	-998
2445.00	97.47	2.27	1.68	1000	-998
2480.00	97.33	2.13	1.63	1000	-998

**Figure 24 Maximum Peak Power Output**

JUDGEMENT: Passed by 998 mW

TEST PERSONNEL:

Tester Signature: 

Date: 06.03.14

Typed/Printed Name: A. Sharabi

### 8.3 Test Equipment Used. Peak Power Output

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

**Figure 25 Test Equipment Used**

## 9. Band Edge Spectrum

[In Accordance with section 15.247(c)]

### 9.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The E.U.T. was tested at low, mid and high channels at 20MHz.

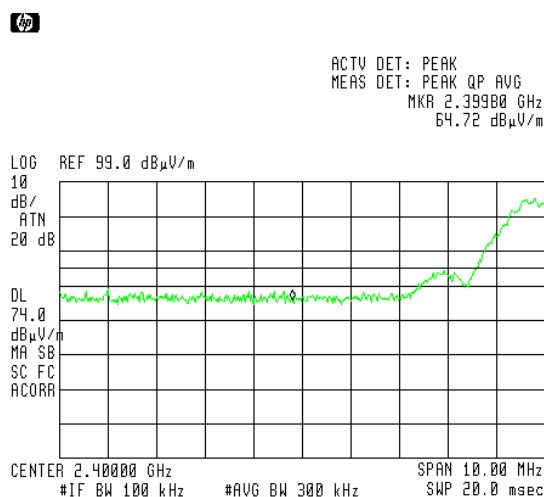


Figure 26 —Lower Band Edge

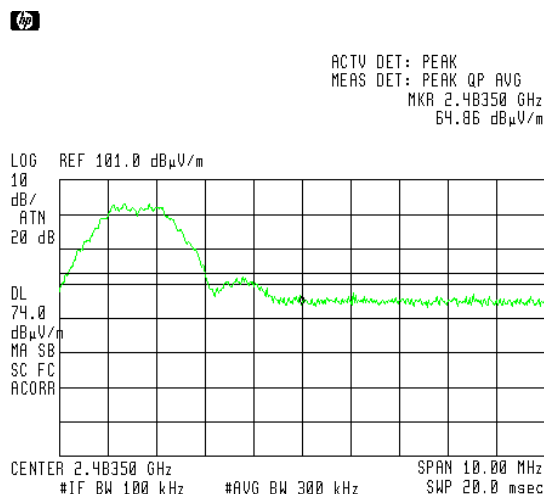


Figure 27 —Upper Band Edge

## 9.2 Results table

E.U.T. Description: RFID Ethernet Gateway  
Model No.: ETH101  
Serial Number: Not designated  
Specification: F.C.C. Part 15, Subpart C (15.247)

Operation Frequency (MHz)	Band Edge Frequency (MHz)	Spectrum Level (dBuV/m)	Specification (dBuV/m)	Margin (dB)
2405	2400	64.72	74.0	-9.28
2480	2483.5	64.86	74.0	-9.14

**Figure 28 Band Edge Spectrum**

JUDGEMENT: Passed by 9.14dB

TEST PERSONNEL:

Tester Signature: 

Date: 06.03.14

Typed/Printed Name: A. Sharabi

### 9.3 Test Equipment Used. Band edge Spectrum

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

**Figure 29 Test Equipment Used**



## 10. Radiated Emission, 9 kHz – 30 MHz

### 10.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

### 10.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the low, mid and high channels using a peak detector.

### 10.3 Measured Data

JUDGEMENT: Passed by more than 20dB.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

TEST PERSONNEL:

Tester Signature: 

Date: 06.03.14

Typed/Printed Name: A. Sharabi

#### 10.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 year
RF Section	HP	85420E	3705A00248	February 26, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	April 4, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

**Figure 30 Test Equipment Used**

### 10.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB $\mu$ V/m]  
 RA: Receiver Amplitude [dB $\mu$ V]  
 AF: Receiving Antenna Correction Factor [dB/m]  
 CF: Cable Attenuation Factor [dB]

Example:  $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

## 11. Spurious Radiated Emission 30 – 25000 MHz

### 11.1 Radiated Emission 30-25000 MHz

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying with CISPR 16 requirements was used.

In the frequency range 2.9-25.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The E.U.T. was operated at the low, mid and high channels using a peak detector.



## 11.2 Test Data

JUDGEMENT: Passed by 9.2dB

For the operation frequency of 2405 MHz, the margin between the emission level and the specification limit is in the worst case 17.6 dB at the frequency of 4810 MHz, vertical polarization.

For the operation frequency of 2445 MHz, the margin between the emission level and the specification limit is in the worst case 21.7 dB at the frequency of 4890 MHz, vertical polarization.

For the operation frequency of 2480 MHz, the margin between the emission level and the specification limit is 9.2dB in the worst case at the frequency of 2483.5 MHz, vertical polarization.

The results for all modulations were the same.

The EUT met the requirements of the F.C.C. Part 15, Subpart C specification.

The details of the highest emissions are given in *Figure 31* to *Figure 36*.

TEST PERSONNEL:

Tester Signature: 

Date: 06.03.14

Typed/Printed Name: A. Sharabi

## Radiated Emission Above 1 GHz

E.U.T Description    RFID Ethernet Gateway  
Type                    ETH101  
Serial Number:        Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical    Frequency range: 1.0 GHz to 25.0 GHz  
Test Distance: 3 meters                            Detector: Peak  
Operation Frequency: 2405 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
2390.0	H	51.9	74.0	-22.1
2390.0	V	52.0	74.0	-22.0
4810.0	H	52.7	74.0	-21.3
4810.0	V	56.4	74.0	-17.6

**Figure 31. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.  
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

\* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

## Radiated Emission Above 1 GHz

E.U.T Description    RFID Ethernet Gateway  
Type                    ETH101  
Serial Number:       Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical      Frequency range: 1.0 GHz to 25.0 GHz  
Test Distance: 3 meters                              Detector: Average  
Operation Frequency: 2405 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
2390.0	H	3.9	54.0	-50.1
2390.0	V	4.0	54.0	-50.0
4810.0	H	4.7	54.0	-49.3
4810.0	V	8.4	54.0	-45.7

**Figure 32. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.  
Detector: Average**

### Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

\*            Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

## Radiated Emission Above 1 GHz

E.U.T Description    RFID Ethernet Gateway  
Type                    ETH101  
Serial Number:        Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical    Frequency range: 1.0 GHz to 25.0 GHz  
Test Distance: 3 meters                            Detector: Peak  
Operation Frequency: 2445 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
4890.0	H	51.8	74.0	-22.2
4890.0	V	52.3	74.0	-21.7

**Figure 33. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.  
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

\* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



## Radiated Emission Above 1 GHz

E.U.T Description    RFID Ethernet Gateway  
Type                    ETH101  
Serial Number:        Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical      Frequency range: 1.0 GHz to 25.0 GHz  
Test Distance: 3 meters                              Detector: Average  
Operation Frequency: 2445 MHz

<b>Freq.</b>	<b>Polarity</b>	<b>Average Amp</b>	<b>Average Specification</b>	<b>Peak. Margin</b>
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
4890.0	H	3.8	54.0	-50.2
4890.0	V	4.3	54.0	-49.7

**Figure 34. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.  
Detector: Average**

### Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

\*            Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

## Radiated Emission Above 1 GHz

E.U.T Description    RFID Ethernet Gateway  
Type                    ETH101  
Serial Number:        Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical    Frequency range: 1.0 GHz to 25.0 GHz  
Test Distance: 3 meters                            Detector: Peak  
Operation Frequency: 2480 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
2483.50	H	62.7	74.0	-11.3
2483.50	V	64.8	74.0	-9.2
4960.0	H	55.8	74.0	-18.2
4960.0	V	57.3	74.0	-16.7

**Figure 35. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.  
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

\* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

\*\*“Correction Factor” = Antenna Factor + Cable Loss

## Radiated Emission Above 1 GHz

E.U.T Description    RFID Ethernet Gateway  
Type                    ETH101  
Serial Number:        Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical      Frequency range: 1.0 GHz to 25.0 GHz  
Test Distance: 3 meters                              Detector: Average  
Operation Frequency: 2480 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
2483.50	H	14.7	54.0	-39.3
2483.50	V	16.8	54.0	-37.2
4960.0	H	7.8	54.0	-46.2
4960.0	V	9.3	54.0	-44.7

**Figure 36. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.  
Detector: Average**

### Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

\*            Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

\*\*“Correction Factor” = Antenna Factor + Cable Loss

### 11.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

## 12. Transmitted Power Density

[In accordance with section 15.247(d)]

### 12.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The spectrum analyzer was set to 3 kHz resolution BW and sweep time of 1 second for each 3 kHz “window”. The spectrum peaks were located at each of the 3 operating frequencies.

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} \quad [\text{W}]$$

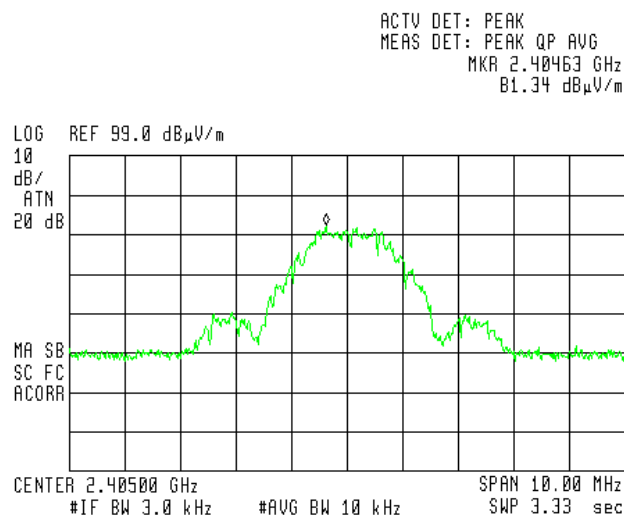


Figure 37 — Low Channel



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 2.44550 GHz  
80.62 dBμV/m

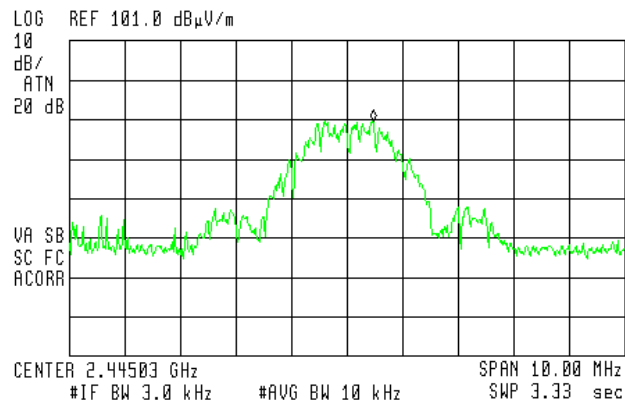


Figure 38 — Mid channel



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 2.47963 GHz  
80.79 dBμV/m

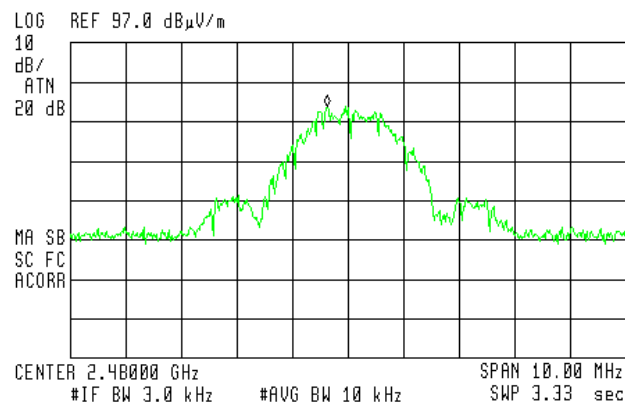


Figure 39 — High channel

## 12.2 Results table

E.U.T. Description: RFID Ethernet Gateway

Model No.: ETH101

Serial Number: Not designated


Specification: F.C.C. Part 15, Subpart C (15.247)

Operation Frequency (MHz)	Reading Spectrum Analyzer (dB $\mu$ V/m)	Reading Spectrum Analyzer (dBm)	Specification (dBm)	Margin (dB)
2405.00	81.34	-13.9	8.0	-21.9
2445.00	80.62	-14.6	8.0	-22.6
2480.00	80.79	-14.4	8.0	-22.4

**Figure 40 Test Results**

JUDGEMENT: Passed by 21.9 dB

TEST PERSONNEL:

Tester Signature: 

Date: 06.03.14

Typed/Printed Name: A. Sharabi

### 12.3 Test Equipment Used. Transmitted Power Density

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

**Figure 41 Test Equipment Used**



## 13. Average Factor Calculation

1. Burst duration = 400usec
2. Time between bursts = 3000msec
3. Pulse duration = N/A
4. pulse period = N/A

$$5. \text{ Average Factor} = 20 \log \left[ \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$$

$$\text{Average Factor} = 20 \log \left[ \frac{0.4}{100} \right] = -48\text{dB}$$

---

**Figure 42. Duty Cycle**

## 14. Antenna Gain/Information

The antenna gain is 2.2 dBi.

### Monopole 2.4 GHz

Typical performance

Board	Frequency Range [MHz]	Avg Gain [dBi]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [ $\Omega$ ]	Operating Temperature [ $^{\circ}$ C]
Case #1 11x40mm	2400 – 2483.5	-4.1 (Peak) -3.7 (Band edges)	2.5 (Peak) 2.1 (Band edges)	65/-0.3 (Peak) 55/-0.6 (Band edges)	-18	50	-40 to +85
Case #2 20x30mm		-4.0 (Peak) -4.3 (Band edges)	2.2 (Peak) 1.5 (Band edges)	52/-2.9 (Peak) 46/-3.4 (Band edges)	-12		

## 15. R.F Exposure/Safety

Typical use of the E.U.T. is in a Tag designed to be used for real time location systems. The typical placement of the E.U.T. is in inside a variety of equipment, such as medical devices, containers, manufacturing equipment and vehicles. The typical distance between the E.U.T. and the user in the worst case application, is 20 cm.

### Calculation of Maximum Permissible Exposure (MPE)

Based on Section 1.1310 Requirements

- (a) FCC limits at 2445 MHz is:  $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

- (b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P<sub>t</sub>- Transmitted Power = 1.68mW

G<sub>T</sub>- Antenna Gain, 2.2 dBi = 1.65 numeric

R- Distance from Transmitter using 20cm worst case

- (c) The peak power density is:

$$S_p = \frac{1.68 \times 1.65}{4\pi(20)^2} = 0.5 \times 10^{-3} \frac{mW}{cm^2}$$

- (e) This is below the FCC limit.

## 16. APPENDIX A - CORRECTION FACTORS

### 16.1 Correction factors for CABLE

from EMI receiver  
to test antenna  
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

#### NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

**16.2 Correction factors for CABLE**  
**from EMI receiver**  
**to test antenna**  
**at 3 meter range.**

FREQUENCY	CORRECTION
(GHz)	FACTOR
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

**NOTES:**

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

**16.3 Correction factors for CABLE**  
**from spectrum analyzer**  
**to test antenna above 2.9 GHz**

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

**NOTES:**

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

**16.4 Correction factors for CABLE**  
**from EMI receiver**  
**to test antenna**  
**at 10 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	9.8
20.0	0.8	1400.0	10.0
30.0	0.9	1600.0	11.3
40.0	1.2	1800.0	12.2
50.0	1.4	2000.0	13.1
60.0	1.6	2300.0	14.5
70.0	1.8	2600.0	15.9
80.0	1.9	2900.0	16.4
90.0	2.0		
100.0	2.1		
150.0	2.6		
200.0	3.2		
250.0	3.8		
300.0	4.2		
350.0	4.6		
400.0	5.1		
450.0	5.3		
500.0	5.6		
600.0	6.3		
700.0	7.0		
800.0	7.6		
900.0	8.0		
1000.0	8.7		

**NOTES:**

1. The cable type is RG-214.
2. The overall length of the cable is 34 meters.
3. The above data is located in file 34M10MO.CBL on the disk marked "Radiated Emissions Tests EMI Receiver".

## 12.6 Correction factors for LOG PERIODIC ANTENNA

### Type LPD 2010/A at 3 and 10 meter ranges.

#### Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

#### Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

#### NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,  
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission  
Test EMI Receiver".



## 16.5 Correction factors for

## LOG PERIODIC ANTENNA

### Type SAS-200/511 at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

#### NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

**16.6 Correction factors for BICONICAL ANTENNA  
Type BCD-235/B,  
at 3 meter range**

<b>FREQUENCY</b> (MHz)	<b>AFE</b> (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

**NOTES:**

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

**16.7 Correction factors for BICONICAL ANTENNA  
Type BCD-235/B,  
10 meter range**

FREQUENCY (MHz)	AFE (dB/m)
30.0	12.1
40.0	10.6
50.0	10.6
60.0	8.9
70.0	8.5
80.0	9.6
90.0	9.4
100.0	9.6
110.0	10.3
120.0	10.7
130.0	12.6
140.0	12.7
150.0	12.7
160.0	13.8
170.0	13.7
180.0	14.9
190.0	13.4
200.0	13.1
210.0	14.0
220.0	14.5
230.0	15.8
240.0	16.0
250.0	16.6
260.0	16.7
270.0	18.3
280.0	18.5
290.0	19.3
300.0	20.9

**NOTES:**

1. Antenna serial number is 1041.
2. The above list is located in file 41BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".



**16.8 Correction factors for  
Horn**

**Double-Ridged Waveguide**

**Model: 3115, S/N 29845  
at 3 meter range.**

FREQUENCY	ANTENNA	ANTENNA	FREQUENCY	ANTENNA	ANTENNA
(GHz)	FACTOR	Gain	(GHz)	FACTOR	Gain
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			



**16.9 Correction factors for**

**Horn Antenna  
Model: SWH-28  
at 1 meter range.**

<b>FREQUENCY</b> <b>(GHz)</b>	<b>AFE</b> <b>(dB /m)</b>	<b>Gain</b> <b>(dB1)</b>
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4



**16.10 Correction factors for**

**Horn Antenna  
Model: V637**

<b>FREQUENCY</b> (GHz)	<b>AFE</b> (dB /m)	<b>Gain</b> (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0



**16.11 Correction factors for ACTIVE LOOP ANTENNA**  
**Model 6502**  
**S/N 9506-2950**

<b>FREQUENCY</b>	<b>Magnetic Antenna Factor</b>	<b>Electric Antenna Factor</b>
<b>(MHz)</b>	<b>(dB)</b>	<b>(dB)</b>
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2