



DATE: 24 October 2013

I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
VizBee SAS

Equipment under test:
RFID Person Tag

PTAG101

Written by: Ronit Pinchuck

R. Pinchuck, Documentation

Approved by: A. Sharabi

A. Sharabi, Test Engineer

Approved by: I. Raz

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for VizBee SAS

RFID Person Tag

PTAG101

FCC ID: 2AA2YPTAG101

24 October 2013

This report concerns: Original Grant:

Class I Change:

Class II Change:

Equipment type: Spread Spectrum/Digital Device
2400-2483.5 MH

Limits used: 47CFR15 Section 15.247

Measurement procedure used is KDB 558074 D01 09 April 2013 and ANSI C63.4-2003.

Application for Certification
prepared by:
Ishaishou Raz
ITL (Product Testing) Ltd.
Kfar Bin Nun
D.N. Shimshon 99780
Israel
e-mail: Sraz@itl.co.il

Applicant for this device:
(different from "prepared by")
Alain Blonder
34a Rue des Vinaigriers
Paris 75010
France
Tel: +33 9 70 44 61 99
Fax: +33 33177725343
e-mail: ablonder@vizbee-rfid.com

TABLE OF CONTENTS

1. GENERAL INFORMATION -----	5
1.1 Administrative Information.....	5
1.2 List of Accreditations	6
1.3 Product Description	7
1.4 Test Methodology	7
1.5 Test Facility	7
1.6 Measurement Uncertainty	7
2. SYSTEM TEST CONFIGURATION-----	8
2.1 Justification.....	8
2.2 EUT Exercise Software	8
2.3 Special Accessories	8
2.4 Equipment Modifications	8
2.5 Configuration of Tested System.....	9
3. CONDUCTED AND RADIATED MEASUREMENT TEST SET-UP PHOTO -----	10
4. CONDUCTED EMISSION FROM AC MAINS-----	13
4.1 Test Specification	13
4.2 Test Procedure	13
4.3 Measured Data	13
4.4 Test Instrumentation Used, Conducted Measurement	18
6. 6 DB MINIMUM BANDWIDTH -----	19
6.1 Test procedure	19
6.2 Results table.....	21
6.3 Test Equipment Used.....	22
7. 26 DB MINIMUM BANDWIDTH-----	23
7.1 Test procedure	23
7.2 Results table.....	25
7.3 Test Equipment Used.....	26
8. MAXIMUM TRANSMITTED PEAK POWER OUTPUT -----	27
8.1 Test procedure	27
8.2 Results table.....	29
8.3 Test Equipment Used.....	30
9. BAND EDGE SPECTRUM -----	31
9.1 Test procedure	31
9.2 Results table.....	32
9.3 Test Equipment Used.....	33
10. RADIATED EMISSION, 9 KHZ – 30 MHZ -----	34
10.1 Test Specification	34
10.2 Test Procedure	34
10.3 Measured Data.....	34
10.4 Test Instrumentation Used, Radiated Measurements.....	35
10.5 Field Strength Calculation	36
11. SPURIOUS RADIATED EMISSION 30 – 25000 MHZ -----	37
11.1 Radiated Emission 30-25000 MHz.....	37
11.2 Test Data.....	38
11.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz	45
12. TRANSMITTED POWER DENSITY -----	46
12.1 Test procedure	46
12.2 Results table.....	48
12.3 Test Equipment Used.....	49
13. AVERAGE FACTOR CALCULATION -----	50
13.1 Test Equipment Used, Average Factor Calculation	51
14. ANTENNA GAIN/INFORMATION	52



15. R.F EXPOSURE/SAFETY-----	53
16. APPENDIX A - CORRECTION FACTORS -----	54
16.1 Correction factors for CABLE	54
16.2 Correction factors for CABLE	55
16.3 Correction factors for CABLE	56
16.4 Correction factors for LOG PERIODIC ANTENNA	57
16.5 Correction factors for LOG PERIODIC ANTENNA	58
16.6 Correction factors for BICONICAL ANTENNA	59
16.7 Correction factors for Double-Ridged Waveguide Horn.....	60
16.8 Correction factors for Horn Antenna	61
16.9 Correction factors for Horn Antenna	62
16.10 Correction factors for ACTIVE LOOP ANTENNA	63



1. General Information

1.1 Administrative Information

Manufacturer: VizBee SAS

Manufacturer's Address: 34a Rue des Vinaigriers
Paris 75010
France

Tel: +33 9 70 44 61 99

Fax: +33 33177725343

Manufacturer's Representative: Alain Blonder

Equipment Under Test (E.U.T): RFID Person Tag

Equipment Model No.: PTAG101

Equipment Serial No.: Not designated

Date of Receipt of E.U.T: 01.10.13

Start of Test: 02.10.13

End of Test: 07.11.13

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: FCC Part 15, Subpart C



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3 Product Description

The RFID person tag is used for locating persons and assets in a defined area, which is covered by a network of RFID readers (FCC ID: 2AA2YREADER101).

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in KDB 558074 D01 09 April 2013 and ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) 0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.6 dB

Note: See ITL Procedure No. PM 198.

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 5.2 dB

Note: See ITL Procedure No. PM 198.



2. System Test Configuration

2.1 ***Justification***

Radiated emission screening was performed in 3 orthogonal orientations. The worst case orientation was the vertical position as wall mounted.

2.2 ***EUT Exercise Software***

No special exercise software was used.

2.3 ***Special Accessories***

No special accessories were needed to achieve compliance.

2.4 ***Equipment Modifications***

No modifications were necessary in order to achieve compliance.



2.5 Configuration of Tested System




Figure 1. Configuration of Tested System

3. Conducted and Radiated Measurement Test Set-up Photo



Figure 2. Conducted Emission Test



Figure 3. Radiated Emission Test

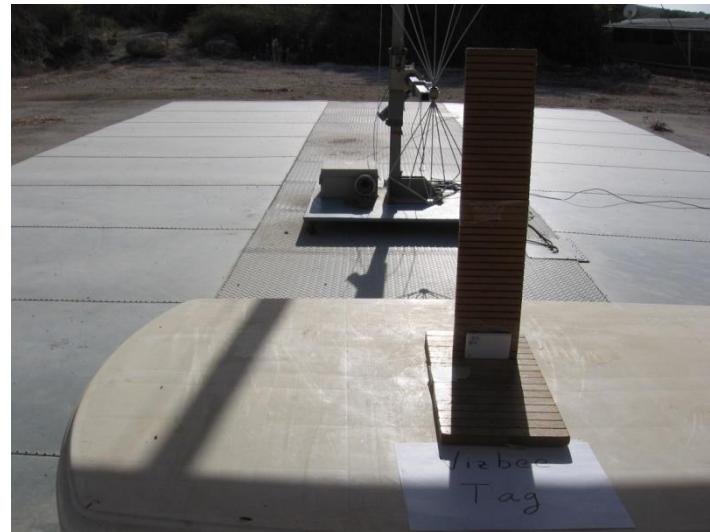


Figure 4. Radiated Emission Test

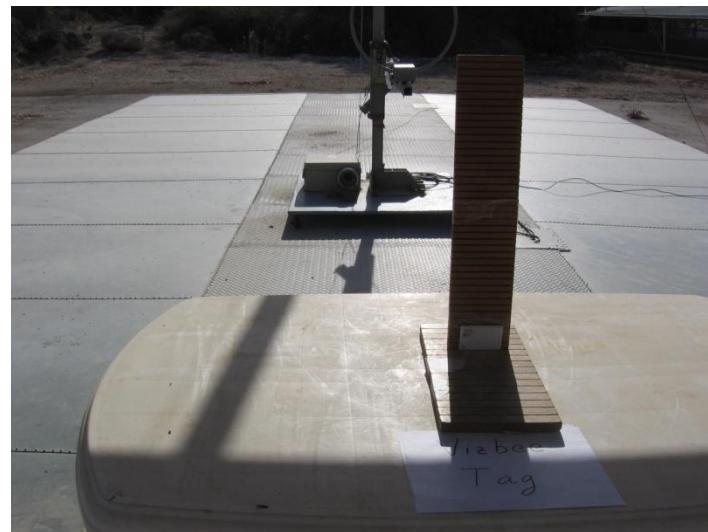


Figure 5. Radiated Emission Test

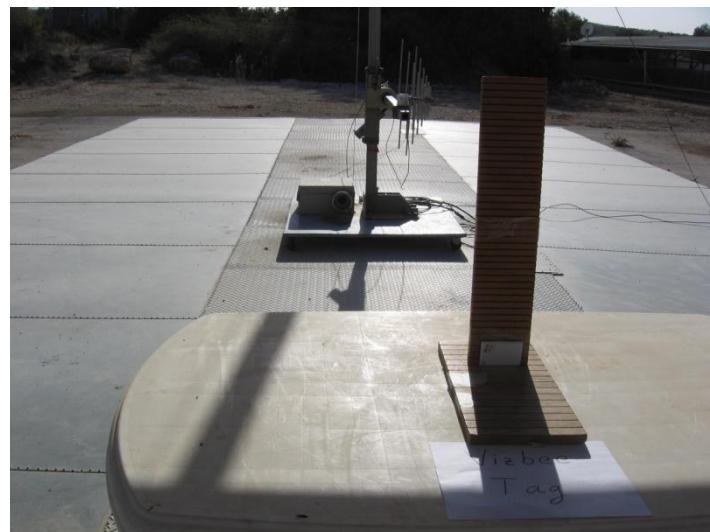


Figure 6. Radiated Emission Test



4. Conducted Emission From AC Mains

4.1 **Test Specification**

F.C.C., Part 15, Subpart C

4.2 **Test Procedure**

The E.U.T operation mode and test set-up are as described in Section 3.1. In order to minimize background noise interference, the conducted emission testing was performed inside a shielded room, with the E.U.T placed on an 0.8 meter high wooden table, 0.4 meter from the room's vertical wall.

The E.U.T was powered from 115 V AC via a 50 Ohm / 50 μ Hn Line Impedance Stabilization Network (LISN) on the phase and neutral lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T

The center of the E.U.T AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The emission voltages at the LISN's outputs were measured using a computerized receiver, complying with CISPR 16 requirements. The specification limits are loaded to the receiver via a 3.5" floppy disk and are displayed on the receiver's spectrum display.

A frequency scan between 0.15 and 30 MHz was performed at 9 kHz I.F. band width, and using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak and average detector.

4.3 **Measured Data**

JUDGEMENT: Passed by 14.38dB

The margin between the emission levels and the specification limit is, in the worst case, 14.98dB for the phase line at 0.206MHz and 14.38dB at 0.206MHz for the neutral line.

The EUT met the F.C.C. Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 7* to *Figure 10*.

TEST PERSONNEL:

Tester Signature: 

Date:07.11.13

Typed/Printed Name: A. Sharabi



Conducted Emission

E.U.T Description RFID Person Tag
Type PTAG101
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Lead: Phase

Detectors: Quasi-peak, Average

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CE22BQP				
Trace2:	CE22BAP				
Trace3:	---				
TRACE		FREQUENCY	LEVEL dB μ V	DELTA	LIMIT dB
1	Quasi Peak	206 kHz	48.38	-14.98	
2	Average	206 kHz	33.91	-19.44	
2	Average	274 kHz	28.88	-22.10	
1	Quasi Peak	278 kHz	36.68	-24.19	
1	Quasi Peak	546 kHz	32.03	-23.96	
2	Average	546 kHz	26.43	-19.56	
1	Quasi Peak	1.094 MHz	25.63	-30.36	
2	Average	1.094 MHz	23.97	-22.02	
1	Quasi Peak	1.434 MHz	22.58	-33.41	
2	Average	1.914 MHz	26.01	-19.99	
1	Quasi Peak	3.278 MHz	33.16	-22.84	
2	Average	3.554 MHz	28.39	-17.60	
1	Quasi Peak	4.99 MHz	37.50	-18.49	
2	Average	4.99 MHz	29.18	-16.82	
1	Quasi Peak	6.97 MHz	21.14	-38.85	
2	Average	6.97 MHz	16.07	-33.92	
1	Quasi Peak	16.338 MHz	21.37	-38.62	
2	Average	17.294 MHz	13.14	-36.85	
2	Average	20.302 MHz	16.90	-33.09	
1	Quasi Peak	20.506 MHz	21.14	-38.85	

Date: 6.NOV.2013 13:23:45

Figure 7. Detectors: Quasi-peak, AVERAGE .

Note: *QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.*

Conducted Emission

E.U.T Description RFID Person Tag
Type PTAG101
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Lead: Phase

Detectors: Quasi-peak, Average

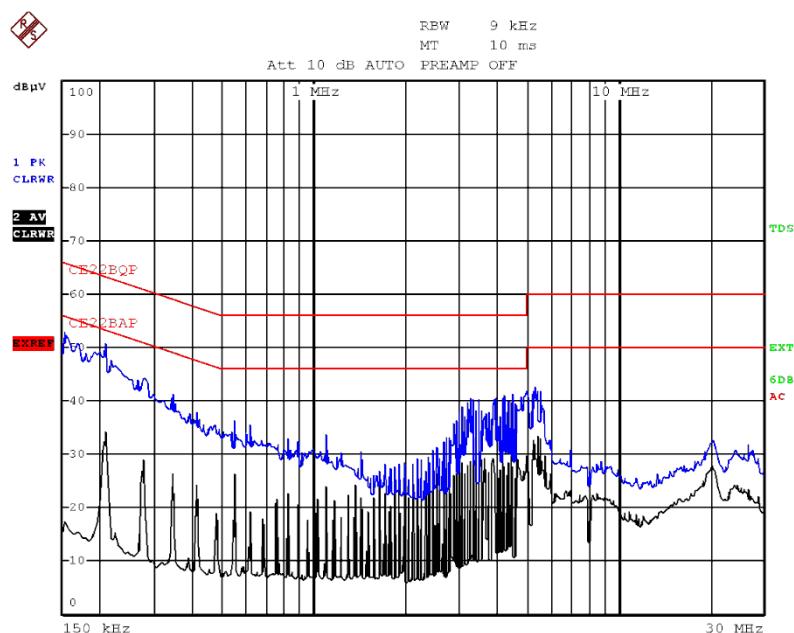


Figure 8. Detectors: Quasi-peak, Average



Conducted Emission

E.U.T Description RFID Person Tag
Type PTAG101
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Lead: Neutral

Detectors: Quasi-peak, Average

EDIT TRACE LIST (Final Measurement Results)					
Trace1:	CE22BQP				
Trace2:	CE22BAP				
Trace3:	---				
TRACE	FREQUENCY	LEVEL dB μ V	DELTA	LIMIT dB	
1 Quasi Peak	206 kHz	48.98	-14.38		
2 Average	206 kHz	35.23	-18.12		
1 Quasi Peak	274 kHz	42.08	-18.91		
2 Average	274 kHz	29.94	-21.05		
2 Average	478 kHz	28.85	-17.52		
1 Quasi Peak	482 kHz	29.11	-27.18		
1 Quasi Peak	746 kHz	24.44	-31.55		
2 Average	750 kHz	26.96	-19.04		
1 Quasi Peak	1.298 MHz	28.29	-27.70		
2 Average	1.57 MHz	27.75	-18.24		
1 Quasi Peak	3.478 MHz	35.41	-20.58		
2 Average	3.546 MHz	21.57	-24.42		
1 Quasi Peak	4.094 MHz	33.86	-22.13		
2 Average	4.982 MHz	29.98	-16.01		
2 Average	9.758 MHz	21.48	-28.51		
1 Quasi Peak	9.826 MHz	27.57	-32.43		
1 Quasi Peak	10.65 MHz	30.96	-29.03		
2 Average	12.286 MHz	23.43	-26.57		
1 Quasi Peak	19.434 MHz	19.33	-40.66		
2 Average	20.186 MHz	13.97	-36.02		

Date: 6.NOV.2013 13:19:00


Figure 9. Detectors: Quasi-peak, AVERAGE

Note: *QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.*

Conducted Emission

E.U.T Description RFID Person Tag
Type PTAG101
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C
Lead: Neutral
Detectors: Quasi-peak, Average

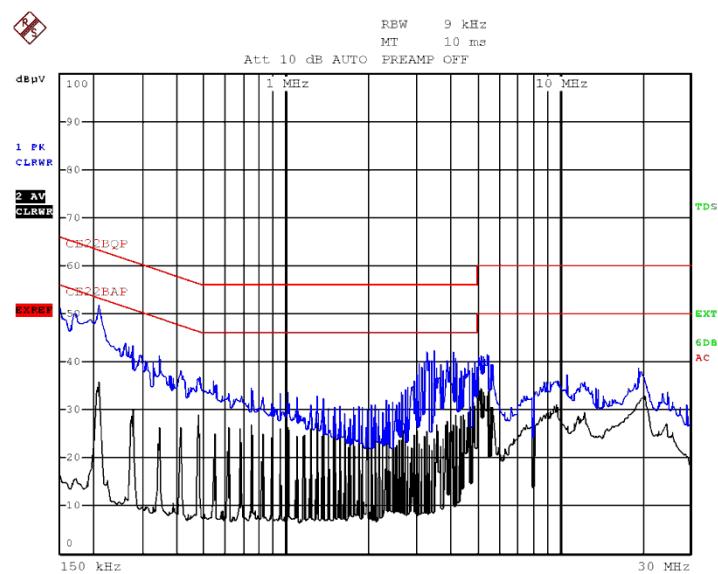

Date: 6.NOV.2013 13:17:09

Figure 10 Conducted Emission: NEUTRAL
Detectors: Quasi-peak, Average



4.4 **Test Instrumentation Used, Conducted Measurement**

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
LISN	Fischer	FCC-LISN-2A	127	December 9, 2012	1 Year
Transient Limiter	HP	11947A	3107A030 41	February 25, 2013	1 Year
EMI Receiver	Rohde & Schwarz	ESCI7	100724	December 27, 2012	1 Year

6. 6 dB Minimum Bandwidth

6.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The spectrum bandwidth of the E.U.T. at the point of 6 dB below maximum peak power was measured and recorded.

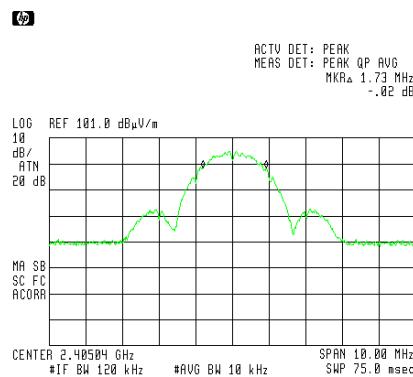


Figure 11 — Low Channel



4

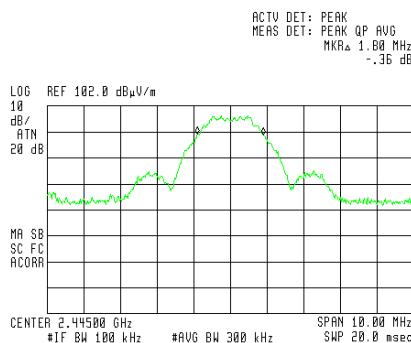


Figure 12 — Mid Channel

5

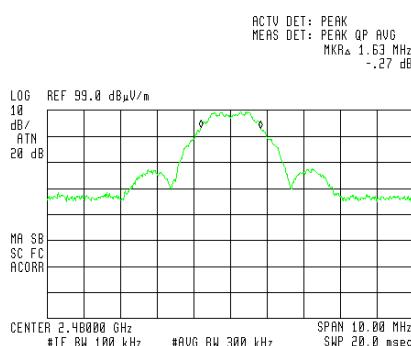


Figure 13 — High Channel



6.2 Results table

E.U.T Description: RFID Person Tag

Model No.: PTAG101

Serial Number: Not designated

Specification: F.C.C. Part 15, Subpart C: (15.247-a2)

Operation Frequency (MHz)	Reading (MHz)	Specification (MHz)
2404.00	1.73	0.5
2444.00	1.80	0.5
2480.00	1.63	0.5

Figure 14 6 dB Minimum Bandwidth

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature:  Date: 30.10.13

Typed/Printed Name: A. Sharabi



6.3 Test Equipment Used.

6 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 15 Test Equipment Used

7. 26 dB Minimum Bandwidth

7.1 *Test procedure*

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The spectrum bandwidth of the E.U.T. at the point of 26 dB below maximum peak power was measured and recorded.

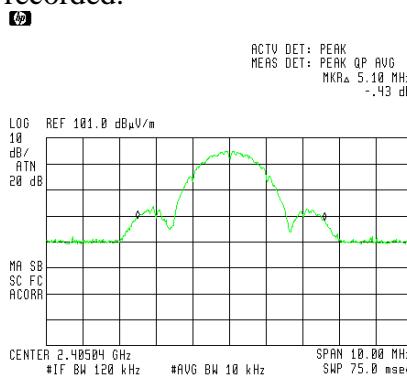


Figure 16 — Low Channel

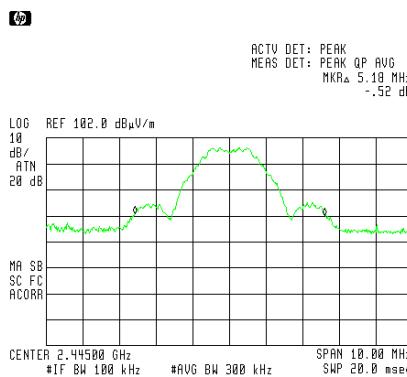


Figure 17 — Mid Channel

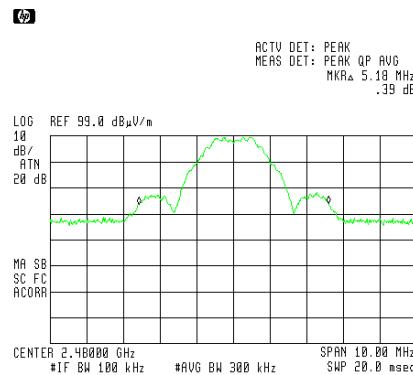


Figure 18 — High Channel



7.2 Results table

E.U.T Description: RFID Person Tag

Model No.: PTAG101

Serial Number: Not designated

Specification: F.C.C. Part 15, Subpart C: (15.247-a2)

Operation Frequency (MHz)	Reading (MHz)	Specification (MHz)
2404.00	5.10	N/A
2444.00	5.18	N/A
2480.00	5.18	N/A

Figure 19 26 dB Minimum Bandwidth

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature:  Date: 30.10.13

Typed/Printed Name: A. Sharabi



7.3 Test Equipment Used.

26 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 20 Test Equipment Used



8. Maximum Transmitted Peak Power Output

8.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The E.U.T. was tested at low, mid and high channels at 20MHz.

Radiated output power levels were measured at selected operation frequencies and the results were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} \text{ [W]}$$

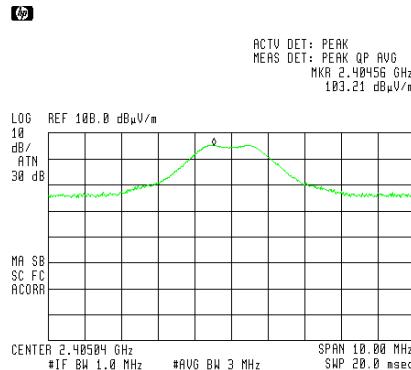


Figure 21 , Low channel , Vertical

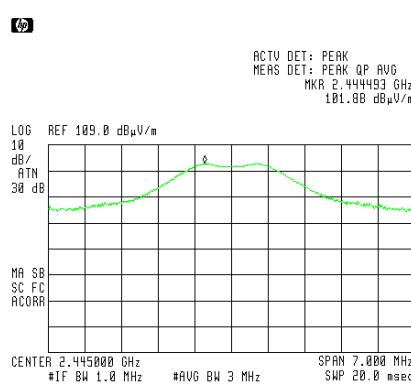


Figure 22, Mid channel , Vertical

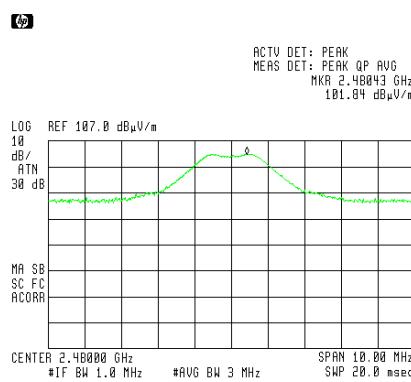


Figure 23 , High Channel, Vertical



8.2 Results table

E.U.T. Description: RFID Person Tag
Model No.: PTAG101
Serial Number: Not designated
Specification: F.C.C. Part 15, Subpart C Section 15.247(b)

Operation Frequency (MHz)	Power (dBuV/m)	Power (mW)	Specification (mW)	Margin (mW)
2404.00	103.21	3.50	1000	-996.6
2444.00	101.88	2.56	1000	-997.4
2480.00	101.84	2.56	1000	-997.4

Figure 24 Maximum Peak Power Output

JUDGEMENT: Passed by 996.6 mW

TEST PERSONNEL:

Tester Signature: 

Date: 30.10.13

Typed/Printed Name: A. Sharabi



8.3 Test Equipment Used.

Peak Power Output

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 25 Test Equipment Used

9. Band Edge Spectrum

[In Accordance with section 15.247(c)]

9.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The E.U.T. was tested at low, mid and high channels at 20MHz with the following modulations: BPSK (6Mbps).

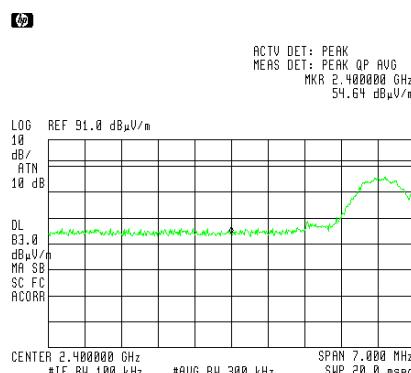


Figure 26 —Lower Band Edge

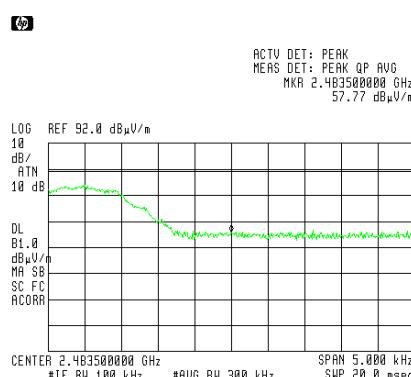


Figure 27 —Upper Band Edge



9.2 Results table

E.U.T. Description: RFID Person Tag

Model No.: PTAG101

Serial Number: Not designated

Specification: F.C.C. Part 15, Subpart C (15.247)

Operation Frequency (MHz)	Band Edge Frequency (MHz)	Spectrum Level dBuV/m	Specification dBuV/m	Margin dB
2404	2400	54.64	83.0	-28.36
2480	2483.5	57.77	81.0	-23.23

Figure 28 Band Edge Spectrum

JUDGEMENT: Passed by 23.23 dB

TEST PERSONNEL:

Tester Signature:  Date: 30.10.13

Typed/Printed Name: A. Sharabi



9.3 Test Equipment Used.

Band edge Spectrum

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 29 Test Equipment Used



10. Radiated Emission, 9 kHz – 30 MHz

10.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

10.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the low, mid and high channels using a peak detector.

10.3 Measured Data

JUDGEMENT: Passed by more than 20dB.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

TEST PERSONNEL:

Tester Signature: 

Date: 30.10.13

Typed/Printed Name: A. Sharabi



10.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 year
RF Section	HP	85420E	3705A00248	February 26, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 21, 2012	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A



10.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]
RA: Receiver Amplitude [dB μ V]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

11. Spurious Radiated Emission 30 – 25000 MHz

11.1 Radiated Emission 30-25000 MHz

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying with CISPR 16 requirements was used.

In the frequency range 2.9-25.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The E.U.T. was operated at the low, mid and high channels using a peak detector.



11.2 **Test Data**

JUDGEMENT: Passed by 17.6dB

For the operation frequency of 2404 MHz, the margin between the emission level and the specification limit is in the worst case 24dB at the frequency of 4826 MHz, vertical polarization.

For the operation frequency of 2444 MHz, the margin between the emission level and the specification limit is in the worst case 17.6dB at the frequency of 4874 MHz, vertical polarization.

For the operation frequency of 2480 MHz, the margin between the emission level and the specification limit is 19.0B in the worst case at the frequency of 4924 MHz, vertical polarization.

The results for all modulations were the same.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The details of the highest emissions are given in *Figure 30* to *Figure 35*.

TEST PERSONNEL:

Tester Signature: 

Date: 30.10.13

Typed/Printed Name: A. Sharabi



Radiated Emission Above 1 GHz

E.U.T Description: RFID Person Tag
Type: PTAG101
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 2404 MHz

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
2390.0	H	46.9	74.0	-27.1
2390.0	V	47.8	74.0	-26.2
4826.0	H	45.0	74.0	-29.0
4826.0	V	50.0	74.0	-24.0

**Figure 30. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission Above 1 GHz

E.U.T Description RFID Person Tag
Type PTAG101
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 2404 MHz

Freq. (MHz)	Polarity (H/V)	Average Amp (dB μ V/m)	Average Specification (dB μ V/m)	Peak. Margin (dB)
2390.0	H	-1.0	54.0	-55.0
2390.0	V	-0.1	54.0	-54.1
4826.0	H	-2.9	54.0	-56.9
4826.0	V	2.1	54.0	-52.1

**Figure 31. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission Above 1 GHz

E.U.T Description: RFID Person Tag
Type: PTAG101
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 2444 MHz

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
4874.0	H	51.5	74.0	-22.5
4874.0	V	56.4	74.0	-17.6

**Figure 32. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission Above 1 GHz

E.U.T Description: RFID Person Tag
Type: PTAG101
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 2444 MHz

Freq. (MHz)	Polarity (H/V)	Average Amp (dB μ V/m)	Average Specification (dB μ V/m)	Peak. Margin (dB)
4874.0	H	3.6	54.0	-50.4
4874.0	V	8.5	54.0	-45.5

**Figure 33. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission Above 1 GHz

E.U.T Description RFID Person Tag
Type PTAG101
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 2480 MHz

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
2483.50	H	54.4	74.0	-19.6
2483.50	V	54.0	74.0	-20.0
4924.00	H	53.0	74.0	-21.0
4924.00	V	55.0	74.0	-19.0

**Figure 34. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

**“Correction Factor” = Antenna Factor + Cable Loss



Radiated Emission Above 1 GHz

E.U.T Description RFID Person Tag
Type PTAG101
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 2480 MHz

Freq. (MHz)	Polarity (H/V)	Average Amp (dB μ V/m)	Average Specification (dB μ V/m)	Peak. Margin (dB)
2483.50	H	6.6	54.0	-47.5
2483.50	V	6.1	54.0	-47.9
4924.00	H	5.1	54.0	-48.9
4924.00	V	7.1	54.0	-46.9

**Figure 35. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

**“Correction Factor” = Antenna Factor + Cable Loss



11.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG C19982	N/A	N/A

12. Transmitted Power Density

[In accordance with section 15.247(d)]

12.1 Test procedure

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

The E.U.T was tested at the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The spectrum analyzer was set to 3 kHz resolution BW. and sweep time of 1 second for each 3 kHz “window”. The spectrum peaks were located at each of the 3 operating frequencies.

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} \quad [\text{W}]$$

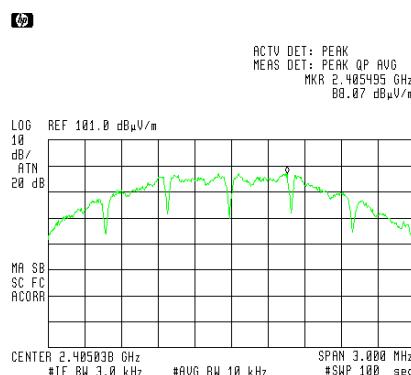


Figure 36 — Low Channel

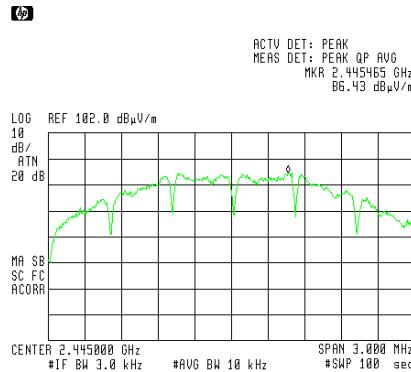


Figure 37 — Mid channel

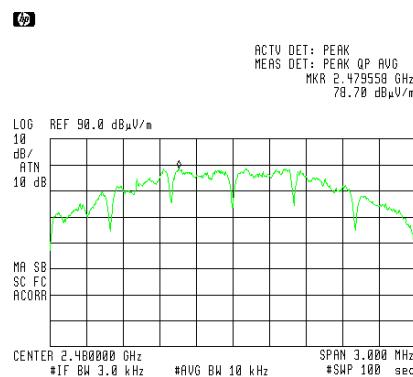


Figure 38 — High channel



12.2 Results table

E.U.T. Description: RFID Person Tag

Model No.: PTAG101

Serial Number: Not designated

Specification: F.C.C. Part 15, Subpart C (15.247)

Operation Frequency (MHz)	Reading Spectrum Analyzer (dB μ V/m)	Spectral Density (mW)	Specification (mW)	Margin (mW)
2404	88.07	0.06	6.3	6.2
2444	86.43	0.06	6.3	6.2
2480	78.70	0.01	6.3	6.2

Figure 39 Test Results

JUDGEMENT: Passed by 6.2mW

TEST PERSONNEL:

Tester Signature: 

Date: 30.10.13

Typed/Printed Name: A. Sharabi



12.3 Test Equipment Used.

Transmitted Power Density

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 40 Test Equipment Used

13. Average Factor Calculation

1. Burst duration = 400usec
2. Time between bursts = 3000msec
3. Pulse duration = N/A
4. pulse period = N/A

$$5. \text{ Average Factor} = 20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$$

$$\text{Average Factor} = 20 \log \left[\frac{0.4}{100} \right] = -47.9 \text{dB}$$

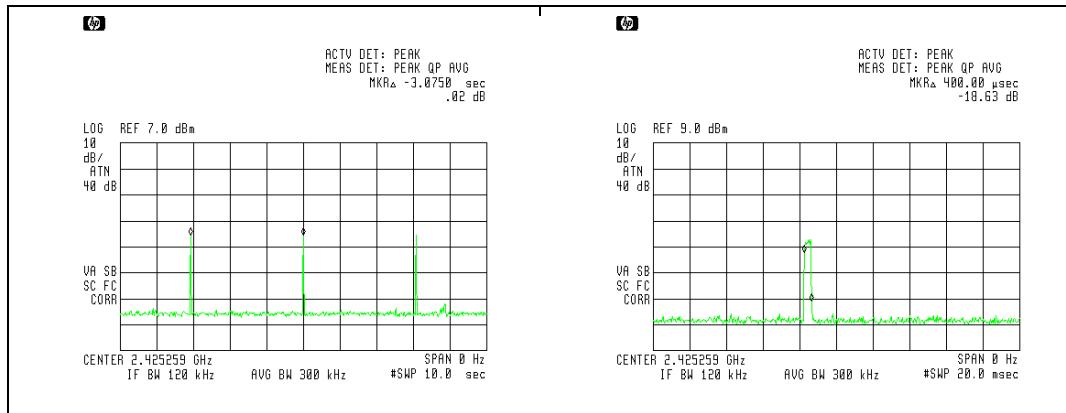


Figure 41. Duty Cycle



13.1 Test Equipment Used, Average Factor Calculation

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A



14. Antenna Gain/Information

The antenna gain is 2.5 dBi.

Monopole 2.4 GHz

Typical performance

Board	Frequency Range [MHz]	Avg Gain [dBi]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [° C]
Case #1 11x40mm	2400 – 2483.5	-4.1 (Peak) -3.7 (Band edges)	2.5 (Peak) 2.1 (Band edges)	65/-0.3 (Peak) 55/-0.6 (Band edges)	-18	50	-40 to +85
Case #2 20x30mm		-4.0 (Peak) -4.3 (Band edges)	2.2 (Peak) 1.5 (Band edges)	52/-2.9 (Peak) 46/-3.4 (Band edges)	-12		



15. R.F Exposure/Safety

Typical use of the E.U.T. is as Tag designed to be used for real time location systems. The typical placement of the E.U.T. is in a badge holder or on a variety of equipment, such as computers, mechanical machines or other asset. The typical distance between the E.U.T. and the user in the worst case application, is 1 cm.

Calculation of Maximum Permissible Exposure (MPE)

Based on Section 1.1310 Requirements

(a) FCC limits at 2444 MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t- Transmitted Power 103.21 (Peak) = 3.5mW

G_T- Antenna Gain, 2.5dBi = 1.8 numeric

R- Distance from Transmitter using 1cm worst case

(c) The peak power density is:

$$S_p = \frac{3.5 \times 1.8}{4\pi(1)^2} = 0.50 \frac{mW}{cm^2}$$

(e) This is below the FCC limit.

16. APPENDIX A - CORRECTION FACTORS

**16.1 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".



16.2 Correction factors for

CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.



16.3 Correction factors for

CABLE

from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.



16.4 Correction factors for

LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".



16.5 Correction factors for

LOG PERIODIC ANTENNA

Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".



**16.6 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".



**16.7 Correction factors for
Horn**

Double-Ridged Waveguide

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENN A Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			



16.8 Correction factors for

Horn Antenna
Model: SWH-28
at 1 meter range.

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4



16.9 Correction factors for

Horn Antenna
Model: V637

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0



16.10 Correction factors for ACTIVE LOOP ANTENNA
Model 6502
S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2