

Report No.: AGC01093130901FE03 Page 1 of 52

# **FCC Test Report**

Report No.: AGC01093130901FE03

**FCC ID** : 2AA3JH108

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Bluetooth Headset

**BRAND NAME** : HNY

H108, H101, H102, H103, H106, H109, H100, H160,

MODEL NAME H161, H162, H163, H165, H166, H168, H169, H180,

H181, H182, H183, H185, H186, H187, H188, H189, H130, H131, H132, H133, H135, H136, H138, H139

**CLIENT**: Shen Zhen Hua Neng Ying Electronic Technology Co.,Ltd

**DATE OF ISSUE** : Sep.26, 2013

**STANDARD(S)** : FCC Part 15 Rules

**REPORT VERSION**: V1.0

# Attestation of Global Compliance (Shenzhen) Co., Ltd.

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 2 of 52

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Sep.26, 2013	Valid	Original Report

### **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RECEIVER INPUT BANDWIDTH	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
2.6. RELATED SUBMITTAL(S) / GRANT (S)	8
2.7. TEST METHODOLOGY	8
2.8. SPECIAL ACCESSORIES	8
2.9. EQUIPMENT MODIFICATIONS	8
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	
8. 20DB BANDWIDTH	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	
9.1. MEASUREMENT PROCEDURE	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	
10. RADIATED EMISSION	
10.1. MEASUREMENT PROCEDURE	
10.2. TEST SETUP	32

10.3. TEST RESULT	33
11. BAND EDGE EMISSION	37
11.1. MEASUREMENT PROCEDURE	37
11.2. TEST SET-UP	37
11.3. TEST RESULT	38
12. NUMBER OF HOPPING FREQUENCY	42
12.1. MEASUREMENT PROCEDURE	42
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	42
12.3. MEASUREMENT EQUIPMENT USED	42
12.4. LIMITS AND MEASUREMENT RESULT	42
13. TIME OF OCCUPANCY (DWELL TIME)	43
13.1. MEASUREMENT PROCEDURE	43
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	43
13.3. MEASUREMENT EQUIPMENT USED	43
13.4. LIMITS AND MEASUREMENT RESULT	43
14. FREQUENCY SEPARATION	46
14.1. MEASUREMENT PROCEDURE	46
14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	46
14.3. MEASUREMENT EQUIPMENT USED	46
14.4. LIMITS AND MEASUREMENT RESULT	46
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	48
APPENDIX B: PHOTOGRAPHS OF EUT	49

Page 5 of 52

#### 1. VERIFICATION OF CONFORMITY

Applicant	Shen Zhen Hua Neng Ying Electronic Technology Co.,Ltd		
Address	3th floor. D. jianye Industrial Park. JiHhua Road. Bantian Street. LongGang District. ShenZhen. GuangDong. China		
Manufacturer	Shen Zhen Hua Neng Ying Electronic Technology Co.,Ltd		
Address	3th floor. D. jianye Industrial Park. JiHua Road. Bantian Street. LongGang District. ShenZhen. GuangDong. China		
Product Designation	Bluetooth Headset		
Brand Name	HNY		
Test Model	H108		
Series Model	H101, H102, H103, H106, H109, H100, H160, H161, H162, H163, H165, H166, H168, H169, H180, H181, H182, H183, H185, H186, H187, H188, H189, H130, H131, H132, H133, H135, H136, H138, H139		
Difference description	All the same except for the appearance.		
Date of test	Sep.23~Sep.26, 2013		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-US-BR/RF (2013-03-01)		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Water Zuo Sep.26, 2013

Checked By

Forrest Lei Sep.26, 2013

Authorized By

Solger Zhang Sep.26, 2013

Page 6 of 52

#### 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

The EUT is "Bluetooth Headset" designed as a "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz	
RF Output Power	5.47dBm(Max)	
Bluetooth Version	V 3.0	
Modulation	GFSK, π /4-DQPSK, 8DPSK	
Number of channels	79	
Hardware Version	ISSC1685-304/305	
Software Version	V 2.1.5.2856	
Antenna Designation	Integral antenna	
Antenna Gain	1.5dBi	
Power Supply	DC3.7V by Battery	
Note: RT is not active when charging		

Note: BT is not active when charging.

The USB port only used for charging and can't be used to transfer data with PC.

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	0	2402MHZ	
	1	2403MHZ	
	÷	:	
	38	2440 MHZ	
2400~2483.5MHZ	39	2441 MHZ	
	40	2442 MHZ	
	÷	:	
	77	2479 MHZ	
	78	2480 MHZ	

Page 7 of 52

#### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01, 51, 03, 55, 05, 04

#### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For ehavior zation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits), 4LSB's (4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following ehavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

Page 8 of 52

#### 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AA3JH108** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

#### 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 9 of 52

#### 3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB Radiated measurement: +/- 3.2dB

#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	WORST
1	Low channel TX	
2	Middle channel TX	
3	High channel TX	
4	Normal Hopping	V

#### Note:

- 1. V means EMI worst mode.
- 2. All the test modes can be supply by Built-in Li-ion battery, only the result of the worst case was recorded in the report, if no other cases.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

Page 10 of 52


### **5. SYSTEM TEST CONFIGURATION**

#### **5.1. CONFIGURATION OF EUT SYSTEM**

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



#### **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth Headset	N/A	H108	EUT
2	PC	DELL	N/A	Peripheral Device
3	USB Cable	N/A	N/A	Peripheral Device

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

Note: N/A means it's not applicable

Page 11 of 52

### **6. TEST FACILITY**

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China		
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003.		

## **ALL TEST EQUIPMENT LIST**

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	100323	07/17/2013	07/16/2014
RF attenuator	N/A	RFA20db	68	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US41421290	07/17/2013	07/16/2014
Amplifier	EM	EM30180	0607030	02/28/2013	02/27/2014
Horn Antenna	EM	EM-AH-10180	67	04/20/2013	04/19/2014
Horn Antenna	A.H. Systems Inc.	SAS-574		07/17/2013	07/16/2014
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/17/2013	07/16/2014
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	26	06/07/2013	06/06/2014
LISN	R&S	ESH3-Z5	8389791009	07/17/2013	07/16/2014
Loop Antenna	Daze	ZN30900N	SEL0097	07/17/2013	07/16/2014
Isolation Transformer	LETEAC	LTBK		07/17/2013	07/16/2014

Page 12 of 52

#### 7. PEAK OUTPUT POWER

#### 7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 4. RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW.
- 5. Record the maximum power from the Spectrum Analyzer.


#### For average power test:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to power probe through an RF attenuator.
- 3. Connect the power probe to the PC.
- 4. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 5. Record the maximum power from the software.
- 6. The maximum peak power shall be less 125mW (21dBm).


Note: The EUT was tested according to DA000705 for compliance to FCC 47CFR 15.247 requirements.

#### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

#### **PEAK POWER TEST SETUP**

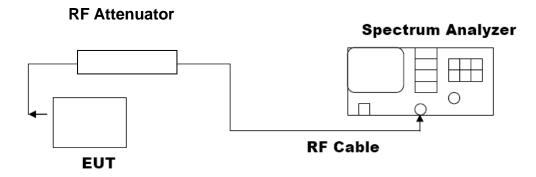


#### **AVERAGE POWER SETUP**




Page 13 of 52

#### 7.3. LIMITS AND MEASUREMENT RESULT


	PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION					
Frequency (GHz)	Pass or Fall					
2.402	-0.44	1.48	21	Pass		
2.441	2.43	4.38	21	Pass		
2.480	3.47	5.43	21	Pass		

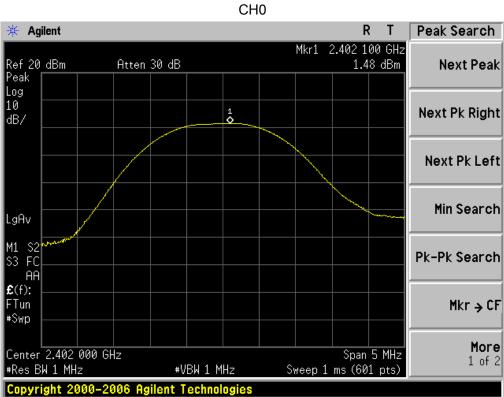

**CH39** 

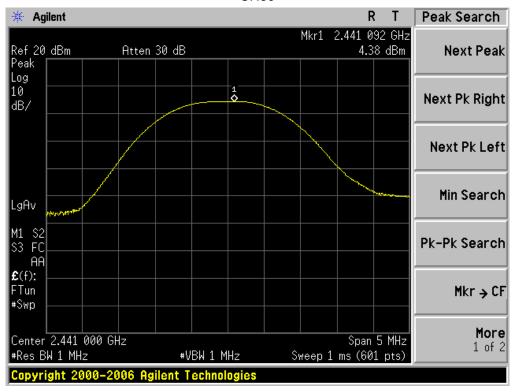


**CH78** 

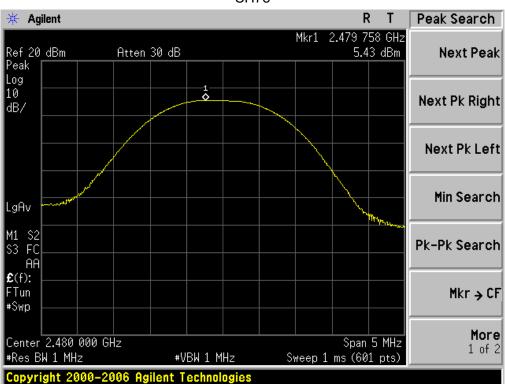


Report No.: AGC01093130901FE03 Page 15 of 52

PEAK OUTPUT POWER MEASUREMENT RESULT FOR Ⅲ /4-DQPSK MODULATION										
Frequency (GHz) Average Power (dBm) Peak Power Applicable Limits (dBm) Pass or Fail										
2.402	-2.55	-0.7	21	Pass						
2.441	2.441 0.55 2.49 21 Pass									
2.480	3.51	5.47	21	Pass						


CH<sub>0</sub>

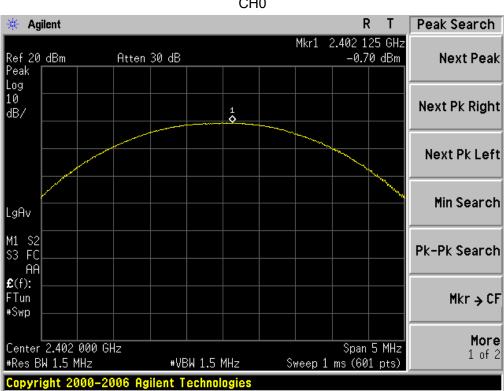

**CH39** 

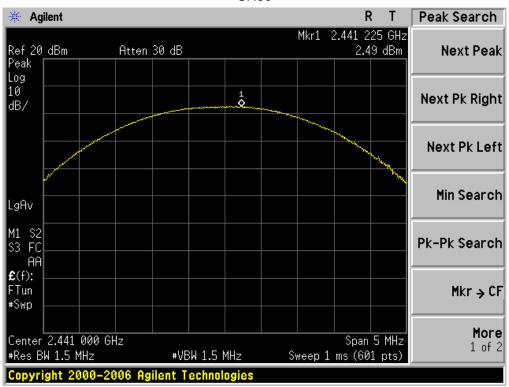


#### **CH78**

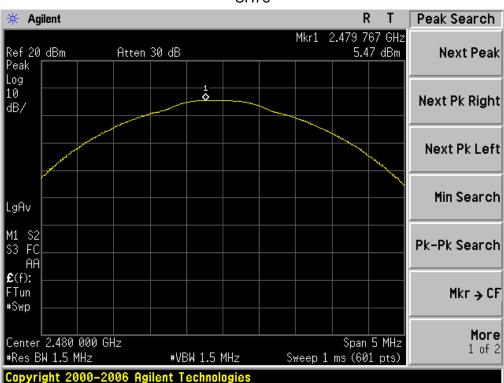


Report No.: AGC01093130901FE03 Page 17 of 52

PEAK OUTPUT POWER MEASUREMENT RESULT FOR 8-DPSK MODULATION									
Frequency Average Power Peak Power Applicable Limits Pass or Fail (GHz) (dBm) (dBm)									
2.402	-2.35	-0.4	21	Pass					
2.441	2.441 0.99 2.83 21 Pass								
2.480	1.93	3.84	21	Pass					


CH0

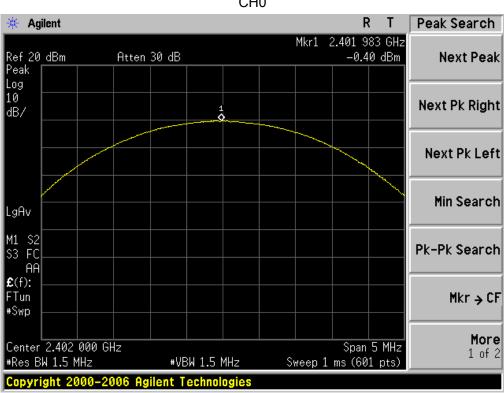

**CH38** 

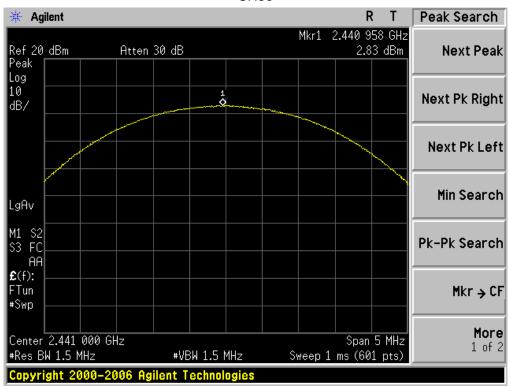

**CH78** 

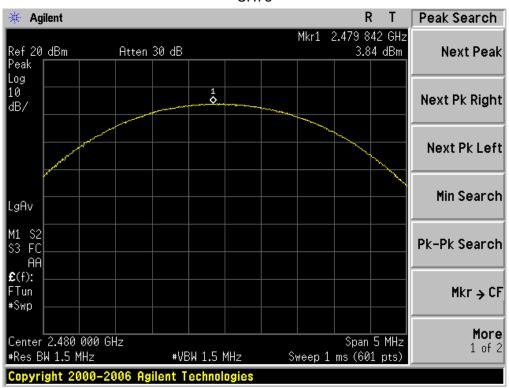


Page 19 of 52

#### 8. 20DB BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

#### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

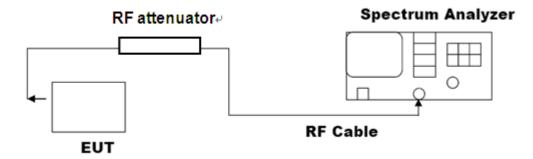

#### **8.3. LIMITS AND MEASUREMENT RESULTS**

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL							
Amplicable Limite		Measurement Resu	lt				
Applicable Limits	Test Da	Criteria					
	Low Channel	0.908	PASS				
N/A	Middle Channel	0.934	PASS				
	High Channel	0.911	PASS				

Page 20 of 52

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



Page 21 of 52

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

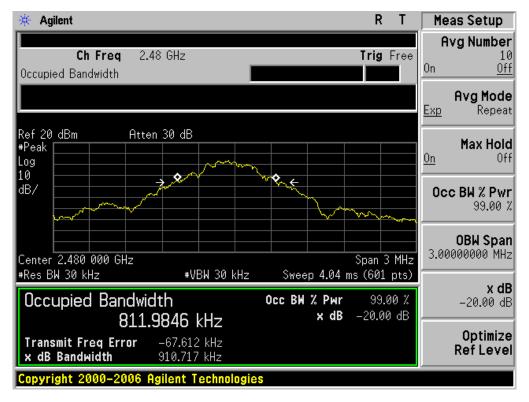

Report No.: AGC01093130901FE03 Page 22 of 52


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESUL						
Applicable Limite		Measurement Resu	lt			
Applicable Limits	Test Da	Test Data (MHz)				
	Low Channel	1.241	PASS			
N/A	Middle Channel	1.333	PASS			
	High Channel	1.234	PASS			

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Page 23 of 52

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

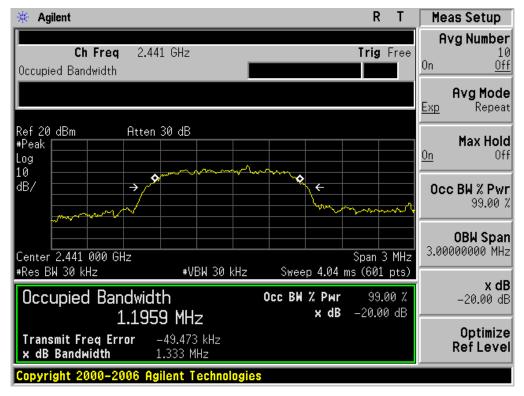

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

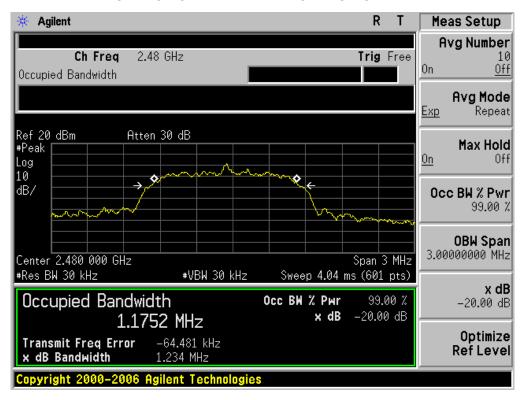

Page 24 of 52


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL							
Applicable Limite		Measurement Resu	lt				
Applicable Limits	Test Da	Criteria					
	Low Channel	1.282	PASS				
N/A	Middle Channel	1.279	PASS				
	High Channel	1.254	PASS				

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Page 25 of 52

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

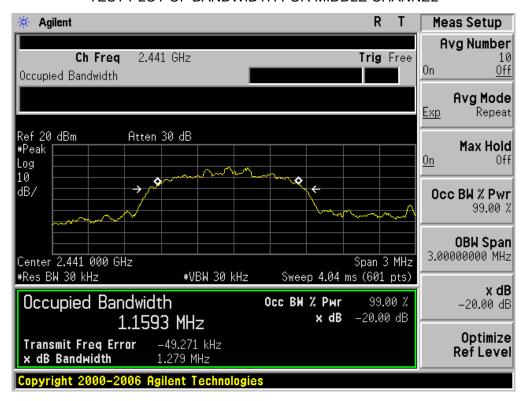

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

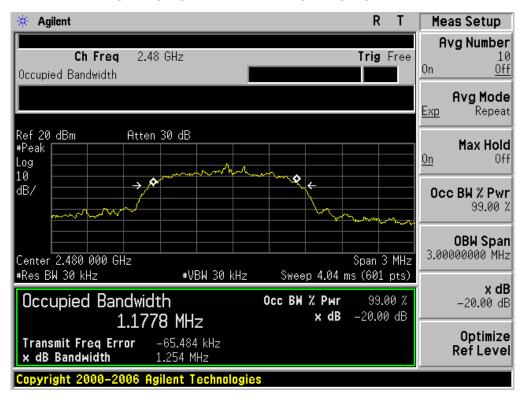

Page 26 of 52

#### 9. CONDUCTED SPURIOUS EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 4. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
  - RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- 5. Set SPA Trace 1 Max hold, then View.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

#### 9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6


#### 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT								
Applicable Limite	Measurement Result							
Applicable Limits	Test Data	Criteria						
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit							
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS						
intentional radiator is operating, the radio frequency	Channel							
power that is produce by the intentional radiator								
shall be at least 20 dB below that in 100KHz								
bandwidth within the band that contains the highest								
level of the desired power.	At least -20dBc than the limit	PASS						
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS						
restricted bands, as defined in §15.205(a), must also								
comply with the radiated emission limits specified								
in§15.209(a))								

Page 27 of 52


# TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

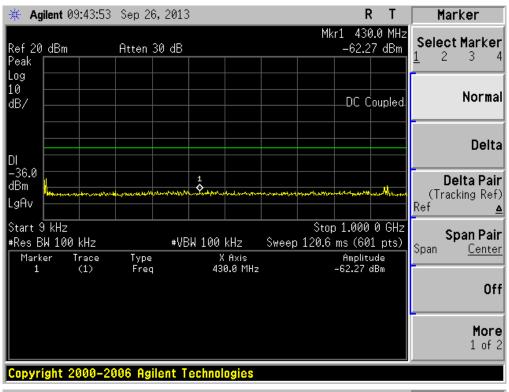


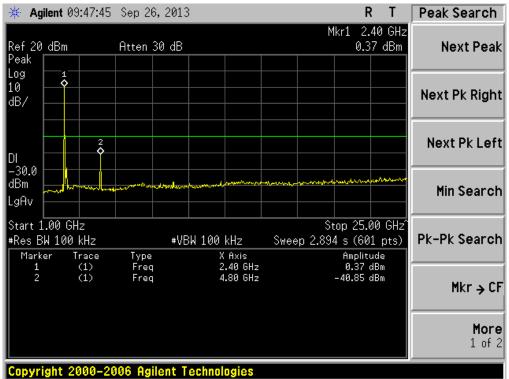


Page 28 of 52


# TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

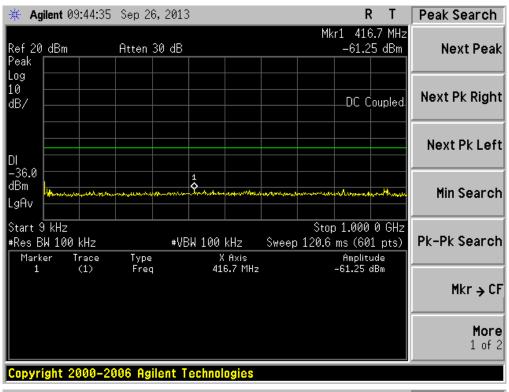

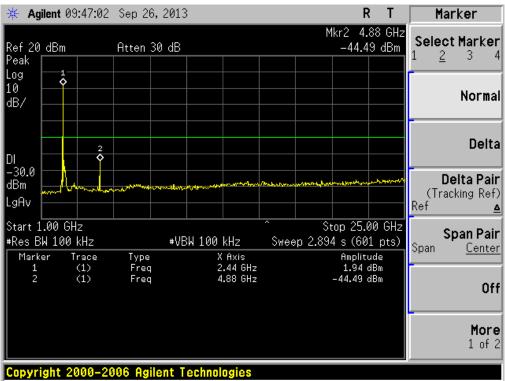

# TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

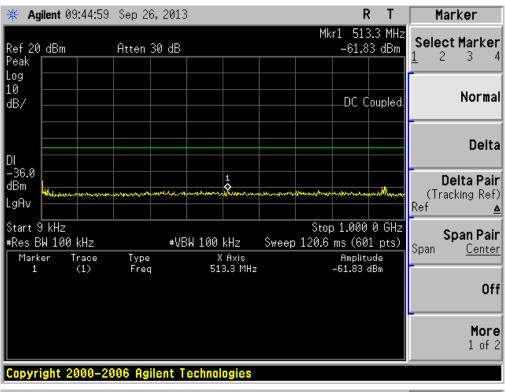

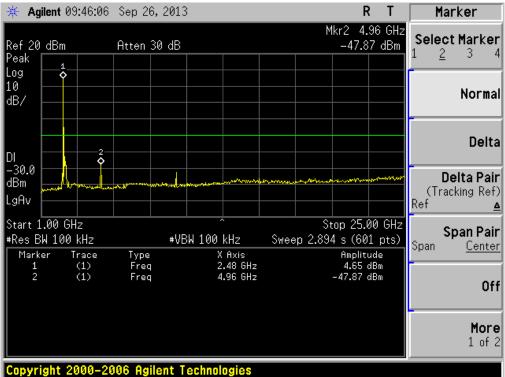

Page 30 of 52

#### 10. RADIATED EMISSION

#### **10.1. MEASUREMENT PROCEDURE**

- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC01093130901FE03 Page 31 of 52

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Report No.: AGC01093130901FE03 Page 32 of 52

#### 10.2. TEST SETUP


#### RADIATED EMISSION TEST SETUP BELOW 30MHz

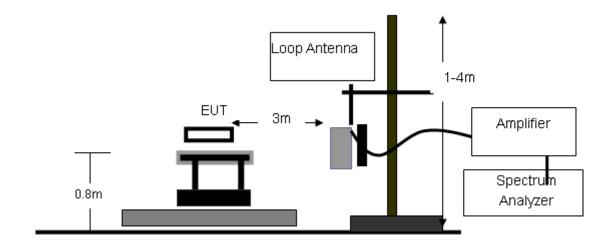

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

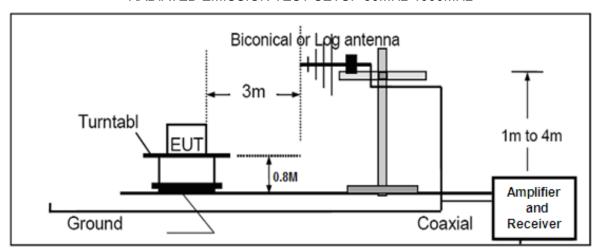

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

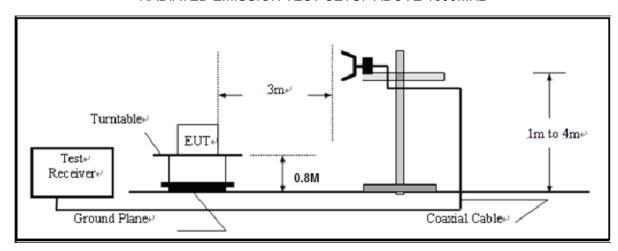


Page 33 of 52

#### 10.3. TEST RESULT

#### RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

#### RADIATED EMISSION BELOW 1GHZ-Horizontal

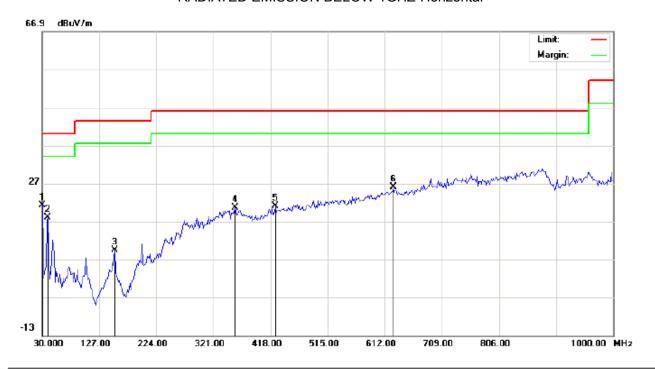

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Headset

M/N: H108

Mode: Normal Hopping

Note:

Polarization: Horizontal Temperature: 26
Power: Humidity: 60 %


Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	30.0000	17.18	4.07	21.25	40.00	-18.75	peak			
2		39.7000	10.37	7.64	18.01	40.00	-21.99	peak			
3		152.8667	3.04	6.37	9.41	43.50	-34.09	peak			
4		358.1833	0.25	20.40	20.65	46.00	-25.35	peak			
5		426.0833	-0.17	21.27	21.10	46.00	-24.90	peak			
6		626.5500	0.30	25.76	26.06	46.00	-19.94	peak			

**RESULT: PASS** 

Page 34 of 52

#### RADIATED EMISSION BELOW 1GHZ-Vertical

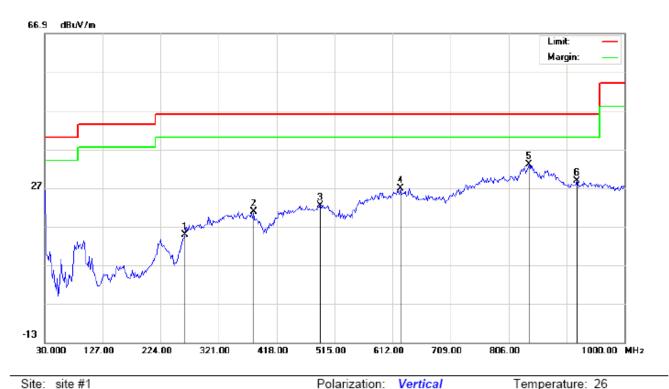

Limit: FCC Class B 3M Radiation

EUT:Bluetooth Headset

M/N: H108

Mode: Normal Hopping

Note:

Polarization: Vertical Temperature: 26
Power: Humidity: 60 %


Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		264.4166	0.80	14.00	14.80	46.00	-31.20	peak			
2		379.2000	1.21	19.67	20.88	46.00	-25.12	peak			
3		490.7500	0.30	22.15	22.45	46.00	-23.55	peak			
4		624.9333	1.07	25.81	26.88	46.00	-19.12	peak			
5	*	839.9500	0.33	32.74	33.07	46.00	-12.93	peak			
6		920.7833	1.52	27.38	28.90	46.00	-17.10	peak			

**RESULT: PASS** 

Page 35 of 52

# RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics) -Horizontal

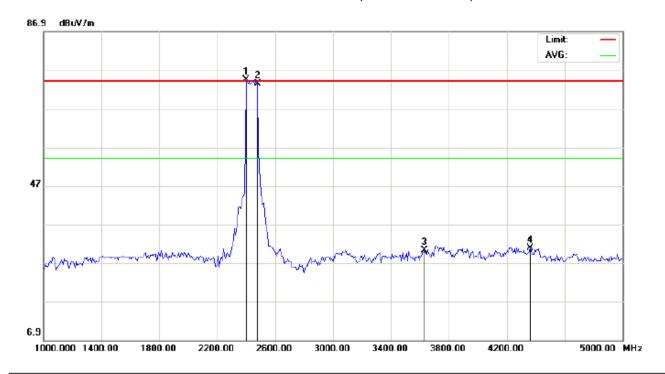

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance: 3m

M/N:H108

Mode: Normal Hopping


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2402.000	82.71	-8.39	74.32	74.00	0.32	peak			
2		2480.000	81.39	-8.08	73.31	74.00	-0.69	peak			
3		3633.333	37.71	-7.47	30.24	74.00	-43.76	peak			
4		4360.000	35.94	-5.20	30.74	74.00	-43.26	peak			

**RESULT: PASS** 

Page 36 of 52

# RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics) -Vertical

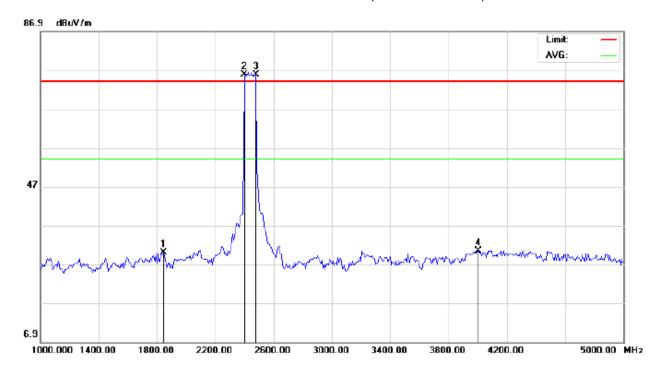

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset

Distance: 3m

M/N:H108

Mode: Normal Hopping

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1846.667	40.16	-10.15	30.01	74.00	-43.99	peak			
2	*	2402.000	84.21	-8.39	75.82	74.00	1.82	peak			
3	Х	2480.000	83.89	-8.08	75.81	74.00	1.81	peak			
4		4006.667	37.51	-7.08	30.43	74.00	-43.57	peak			

#### **RESULT: PASS**

Note: 5~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

Page 37 of 52

## 11. BAND EDGE EMISSION

## 11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency = Operation Frequency, RBW>=1%span, VBW>=RBW
- 3. The band edges was measured and recorded.


## **11.2. TEST SET-UP**

Radiated same as 10.2

Page 38 of 52

## 11.3. TEST RESULT

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL (3Mbps)-Horizontal

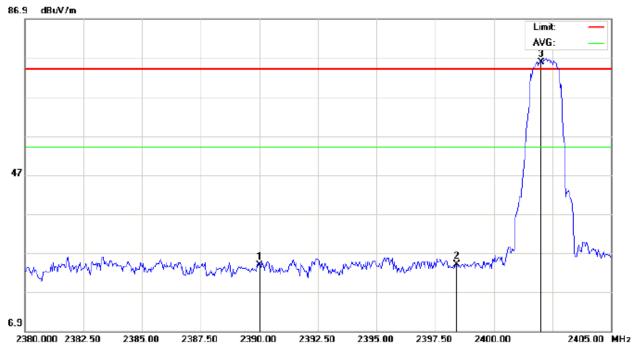

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance: 3m

M/N:H108


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2390.000	32.18	-8.44	23.74	74.00	-50.26	peak			
2		2398.417	32.40	-8.41	23.99	74.00	-50.01	peak			
3	*	2402.000	84.16	-8.39	75.77	74.00	1.77	peak			

Page 39 of 52

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL (3Mbps)-Vertical

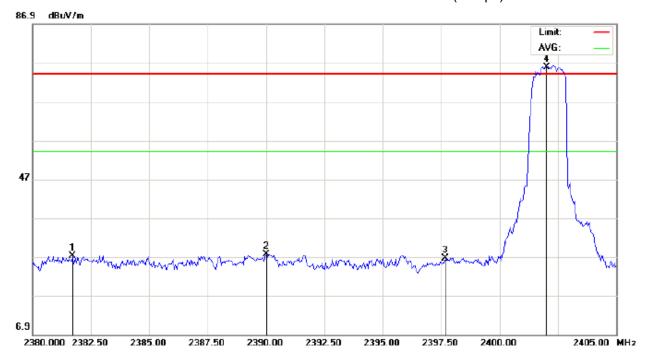

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance: 3m

M/N:H108


Mode: Low Channel TX

Note:

No.	No. Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2381.708	35.64	-8.47	27.17	74.00	-46.83	peak			
2		2390.000	35.99	-8.44	27.55	74.00	-46.45	peak			
3		2397.667	35.05	-8.41	26.64	74.00	-47.36	peak			
4	*	2402.000	84.17	-8.39	75.78	74.00	1.78	peak			

Page 40 of 52

# TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (3Mbps)-Horizontal

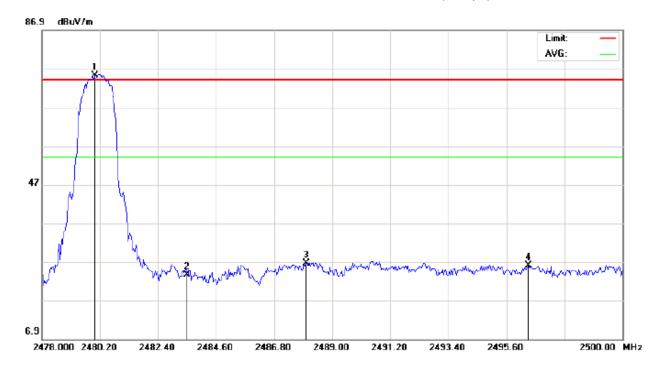

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance: 3m

M/N:H108


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	83.30	-8.08	75.22	74.00	1.22	peak			
2		2483.500	31.74	-8.07	23.67	74.00	-50.33	peak			
3		2488.010	34.75	-8.05	26.70	74.00	-47.30	peak			
4		2496.443	34.01	-8.01	26.00	74.00	-48.00	peak			

Page 41 of 52

# TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (3Mbps)-Vertical

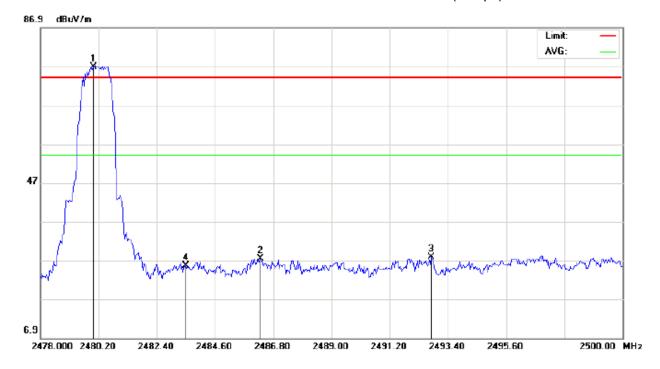

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance: 3m

M/N:H108

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	84.83	-8.08	76.75	74.00	2.75	peak			
2		2486.323	35.36	-8.05	27.31	74.00	-46.69	peak			
3		2492.777	35.85	-8.03	27.82	74.00	-46.18	peak			
4		2483.500	33.61	-8.07	25.54	74.00	-48.46	peak			

**RESULT: PASS** 

Page 42 of 52

#### 12. NUMBER OF HOPPING FREQUENCY

#### 12.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

## 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2


#### 12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 12.4. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS

#### TEST PLOT FOR NO. OF TOTAL CHANNELS

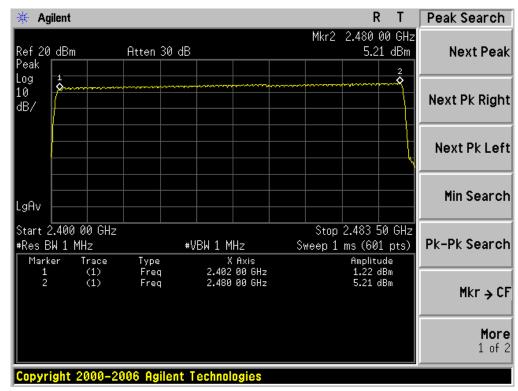

Page 43 of 52

## 13. TIME OF OCCUPANCY (DWELL TIME)

#### 13.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set Span = zero span, centered on a hoping channel
- 4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

## 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

#### 13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 13.4. LIMITS AND MEASUREMENT RESULT

## The Worst Case (3Mbps)

Channel	Time of Pulse for DH5	Period Time	Sweep Time	Limit
Chamer	(ms)	(s)	(ms)	(ms)
Low	2.926	31.6	312.11	400
Middle	2.798	31.6	298.45	400
High	2.894	31.6	308.69	400

Low Channel Time

2.926\*(1600/6)/79\*31.6=312.11 ms

Middle Channel Time


2.798\*(1600/6)/79\*31.6=298.45 ms

**High Channel Time** 


2.894\*(1600/6)/79\*31.6=308.69 ms

Page 44 of 52

#### TEST PLOT OF LOW CHANNEL

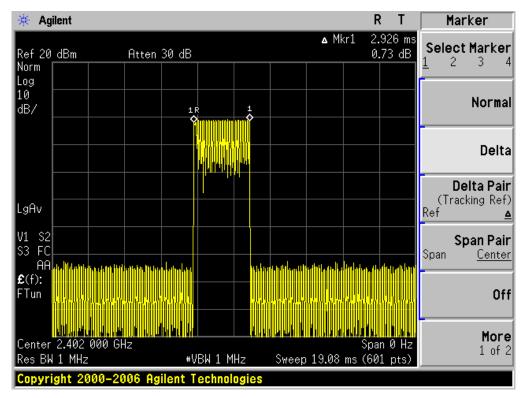


#### TEST PLOT OF MIDDLE CHANNEL

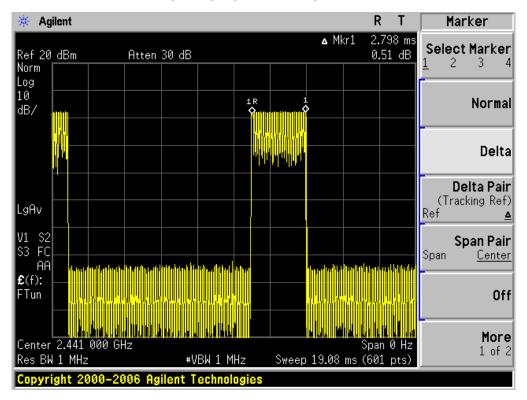

Page 45 of 52

#### TEST PLOT OF HIGH CHANNEL

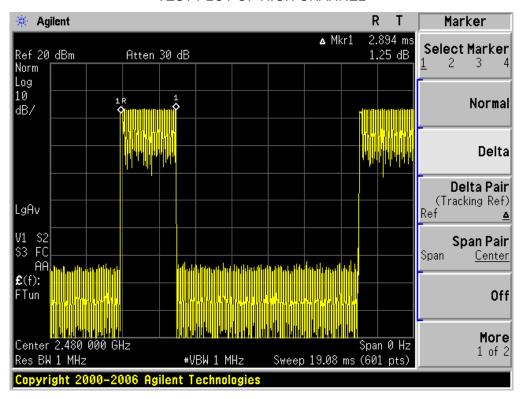

Page 46 of 52

## 14. FREQUENCY SEPARATION

## 14.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold

## 14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

#### 14.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6.3

#### 14.4. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT	
	KHz	KHz	Dage	
CH00-CH01	1008	>=25 KHz or 2/3 20 dB BW	Pass	

Page 47 of 52


## TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

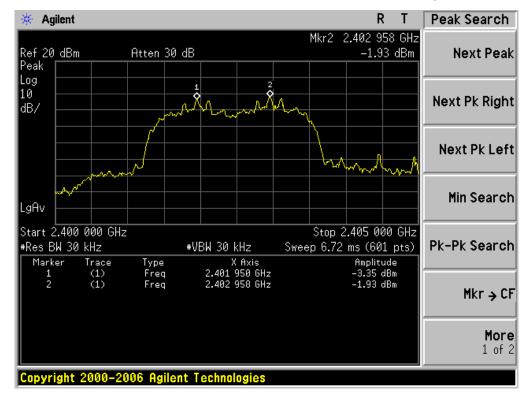

# Report No.: AGC01093130901FE03 Page 48 of 52

# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**


FCC RADIATED EMISSION TEST SETUP

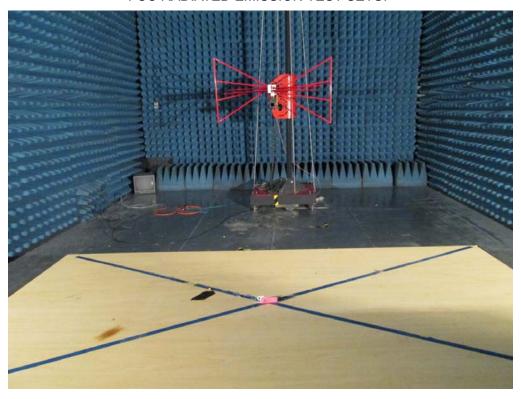


Page 49 of 52

## **APPENDIX B: PHOTOGRAPHS OF EUT**

TOP VIEW OF EUT

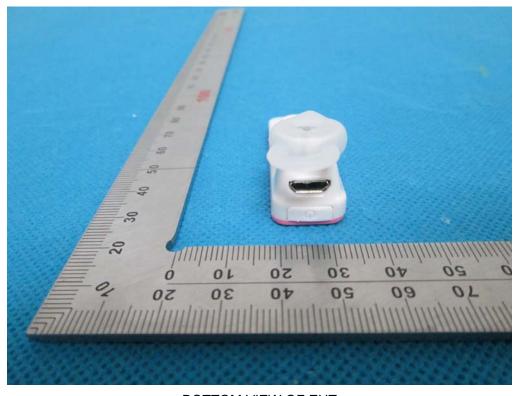

**BOTTOM VIEW OF EUT** 

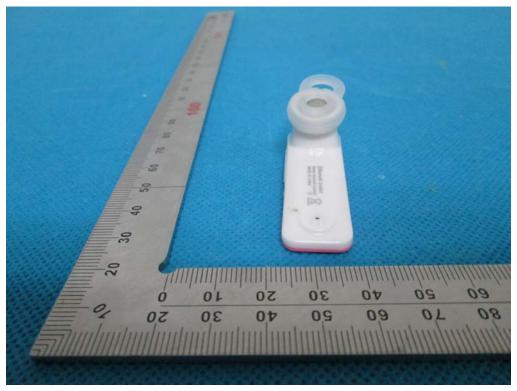

FRONT VIEW OF EUT



**BACK VIEW OF EUT** 




LEFT VIEW OF EUT




RIGHT VIEW OF EUT



**INTERNAL VIEW OF EUT-1** 

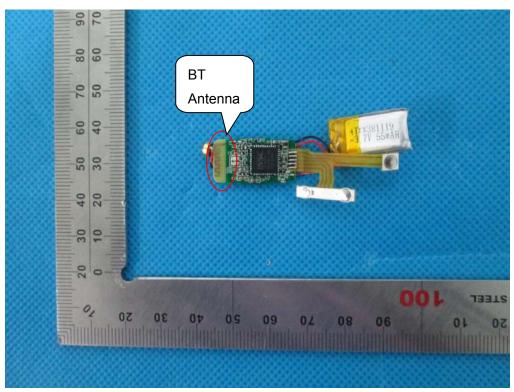

**INTERNAL VIEW OF EUT-2** 

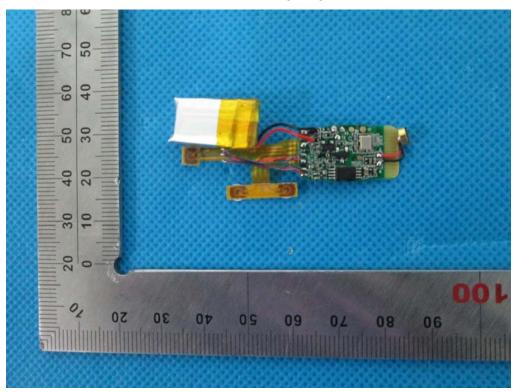

----END OF REPORT----