

FCC TEST REPORT (RFID)

REPORT NO.: RF130814C33-5

MODEL NO.: NeverLost® 6 Tablet

FCC ID: 2AA4L-HTZNLTABLET

RECEIVED: Aug. 14, 2013

TESTED: Sep. 05, 2013 ~ Sep. 09, 2013

ISSUED: Sep. 16, 2013

Applicant: MiTAC International Corp.

Address: Building B, No. 209, Sec. 1, Nan Gang Rd., Nan Gang Dist.,

Taipei 11568, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services

(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,

New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei

Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.





This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



Table of Contents

RELEA	ASE CONTROL RECORD	3
1.	CERTIFICATION	
2.	SUMMARY OF TEST RESULTS	5
2.1 ME	EASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	
3.3	DESCRIPTION OF SUPPORT UNITS	
3.3.1	CONFIGURATION OF SYSTEM UNDER TEST	
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	9
4.	TEST TYPES AND RESULTS	
4.1	Radiated Emission Measurement	
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	
4.1.2	TEST INSTRUMENTS	
4.1.3	TEST PROCEDURES	
4.1.4	DEVIATION FROM TEST STANDARD	
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	
4.1.7	TEST RESULTS	
4.2	FREQUENCY STABILITY	
4.2.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	
4.2.2	TEST INSTRUMENTS	
4.2.3	TEST PROCEDURE	
4.2.4	DEVIATION FROM TEST STANDARD	
4.2.5	TEST SETUP	21
4.2.6	EUT OPERATING CONDITION	
4.2.7	TEST RESULTS	
4.3	20dB bandwidth	23
4.3.1	LIMITS OF 20dB BANDWIDTH MEASUREMENT	
4.3.2	TEST INSTRUMENTS	
4.3.3	TEST PROCEDURE	
4.3.4	DEVIATION FROM TEST STANDARD	
4.3.5	TEST SETUP	
4.3.6	EUT OPERATING CONDITION	
4.3.7	TEST RESULTS	
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	
6.	INFORMATION ON THE TESTING LABORATORIES	26
7.	APPENDIX A - Modifications recorders for engineering changes to the eut BY THE	
	I AR 27	



RELEASE CONTROL RECORD

ISSUE NO).	REASON FOR CHANGE	DATE ISSUED
RF130814	C33-5	Original release	Sep. 16, 2013

Report No.: RF130814C33-5 3 of 27 Report Format Version 5.0.0



1. CERTIFICATION

PRODUCT: Automotive Navigation Device

MODEL: NeverLost® 6 Tablet

BRAND: Hertz

APPLICANT: MiTAC International Corp.

TESTED: Sep. 05, 2013 ~ Sep. 09, 2013

TEST SAMPLE: Production Unit

STANDARDS: FCC Part 15, Subpart C (Section 15.225)

FCC Part 15, Subpart C (Section 15.215)

ANSI C63.10-2009

The above equipment (model: NeverLost® 6 Tablet) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY: . DATE: Sep. 16, 2013

Vera Huang / Specialist

APPROVED BY: , DATE: Sep. 16, 2013

Sam Chen / Assistant Manager



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLI	APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.225, 15.215)				
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK		
15.207	Conducted emission test	N/A	Without AC power port of the EUT.		
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	PASS	Meet the requirement of limit. Minimum passing margin is -66.72dB at 13.56MHz.		
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	PASS	Meet the requirement of limit. Minimum passing margin is -2.16dB at 40.8MHz.		
15.225 (e)	The frequency tolerance	PASS	Meet the requirement of limit.		
15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.		

NOTE: "NA" means Not Applicable.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted Emission	150kHz ~ 30MHz	2.44 dB
Dadiated emissions	30MHz ~ 200MHz	3.34 dB
Radiated emissions	200MHz ~1000MHz	3.35 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Automotive Navigation Device
MODEL NO.	NeverLost® 6 Tablet
POWER SUPPLY	3.7Vdc (battery)
MODULATION TYPE	ASK
OPERATING FREQUENCY	13.56MHz
ANTENNA TYPE	Loop Antenna
DATA CABLE	Refer to Note
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Refer to Note

NOTE:

1. The EUT contains following accessory devices.

ITEM	BRAND	MODEL	DESCRIPTION
Battery	Tian Yu	N425	Rating: 3.7Vdc, 920mAh
WWAN Module	CINTERION	PHS8-P	
WLAN Module	nFore	NF3301	
NFC Module	Jogtek	TM-007A	
BT Module	nFore	NF3301	

2. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



DESCRIPTION OF TEST MODES 3.2

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE		APPLICABLE TO		DESCRIPTION
MODE	RE	FS	BW	DESCRIPTION
-	\checkmark	V	\checkmark	-

Where

RE: Radiated Emission BW: 20dB Bandwidth

FS: Frequency Stability

NOTE:

The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

RADIATED EMISSION TEST:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations antenna ports (if EUT with antenna diversity architecture).

 \boxtimes Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	1	1	ASK

FREQUENCY STABILITY:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- \boxtimes Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	1	1	ASK

20dB BANDWIDTH:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture).
- \boxtimes Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	1	1	ASK

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE	25deg. C, 65%RH	120Vac, 60Hz	David Huang
FS	25deg. C, 65%RH	120Vac, 60Hz	Howard Kao
BW	25deg. C, 65%RH	120Vac, 60Hz	Howard Kao


Report No.: RF130814C33-5 7 of 27 Report Format Version 5.0.0



3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

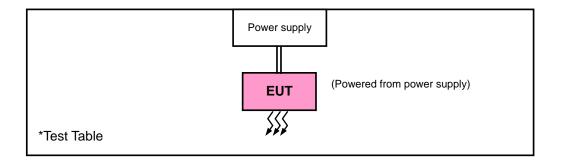



3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RFID Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.225) FCC Part 15, Subpart C (15.215) ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dBuV/m) = 20 \log Emission level (uV/m)$.
- 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100744	Apr. 15, 2013	Apr. 14, 2014
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 17, 2012	Dec. 16, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Jan. 07, 2013	Jan. 06, 2014
Preamplifier EMCI	EMC 012645	980115	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 184045	980116	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 330H	980112	Dec. 28, 2012	Dec. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 19, 2012	Oct. 18, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 19, 2012	Oct. 18, 2013
RF signal cable Worken	RG-213	NA	Dec. 29, 2012	Dec. 28, 2013
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower &Turn Table Controller MF	MF-7802	NA	NA	NA
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

- 2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
- 3. The test was performed in HwaYa Chamber 10.
- 4. The FCC Site Registration No. is 690701.
- 5. The IC Site Registration No. is IC 7450F-10.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
- 3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

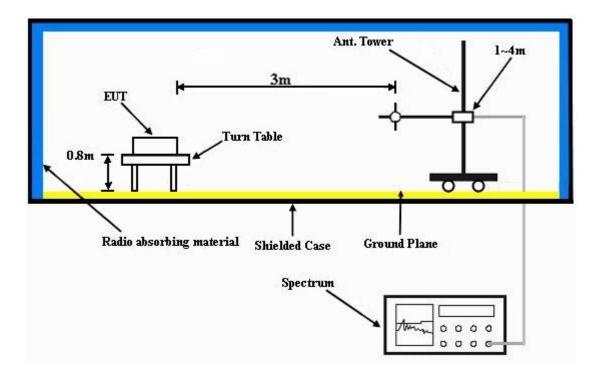

For the actual test configuration, please refer to the attached file (Test Setup Photo).


4.1.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.



4.1.7 TEST RESULTS

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz		
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)		
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang		

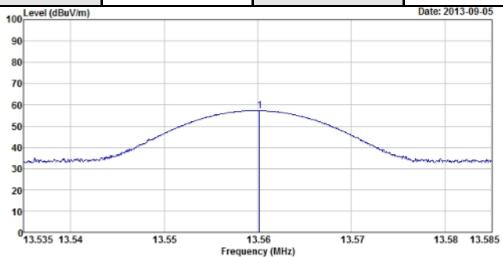

	ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3M									
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK		
13.56	57.28	37.07	124	-66.72	20.21	100	0	Peak		

REMARKS:

- 1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance) Example:


14 of 27

13.56MHz = 15848uV/m30m = 84dBuV/m30m $= 84 + 20\log(30/3)^2$ 3m = 124dBuV/m

Report No.: RF130814C33-5



EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz		
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)		
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang		

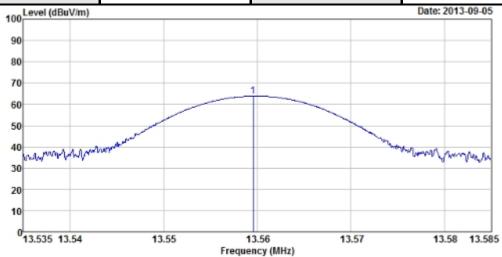

	ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3M									
	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
I	13.56	63.94	43.73	124	-60.06	20.21	100	272	Peak	

- 1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance) Example:

13.56MHz = 15848uV/m

30m

= 84dBuV/m

30m


 $= 84+20\log(30/3)^2$

3m

= 124 dBuV/m



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 1	FREQUENCY RANGE	Below 30MHz	
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)	
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang	

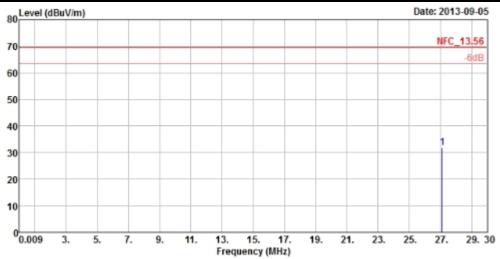


	ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3M									
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK		
27.121	31.77	11.56	69.54	-37.77	20.21	100	360	Peak		

- 1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 1	FREQUENCY RANGE	Below 30MHz	
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK)	
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang	

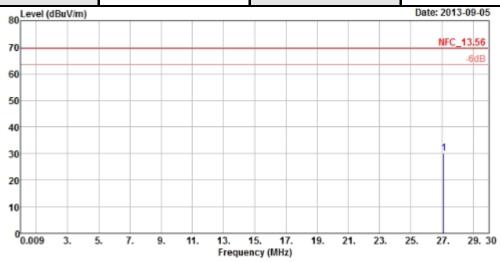


	ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3M									
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	Correction Factor (dB/m)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK		
27.124	30.03	9.82	69.54	-39.51	20.21	100	15	Peak		

- 1. Emission level(dBuV/m)= Read Level (dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.




EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 1	FREQUENCY RANGE	30MHz ~ 1GHz	
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Quasi-peak (QP)	
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang	

HORIZONTAL

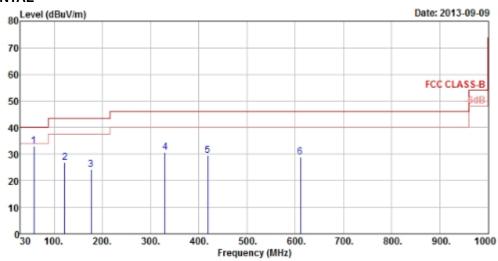

VERTICAL

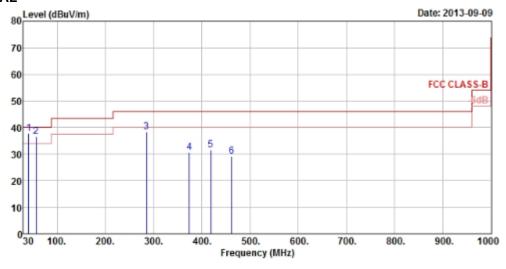



	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
57.54	33.1	51.39	40	-6.9	12.25	0.81	31.35	100	214	Peak
122.07	26.72	46.27	43.5	-16.78	11.15	1.2	31.9	100	136	Peak
176.34	24.27	43.49	43.5	-19.23	11.1	1.48	31.8	100	125	Peak
330.1	30.74	46.73	46	-15.26	13.66	2.16	31.81	100	195	Peak
418.3	29.58	43.43	46	-16.42	15.7	2.49	32.04	100	161	Peak
610.1	28.84	38.07	46	-17.16	19.73	3.12	32.08	100	149	Peak
	Α	NTENN	A POLAR	ITY & TE	ST DISTA	NCE: V	ERTICAL	. AT 3 M		
FREQ.	EMISSION	READ		MADOIN	ANTENNA	CABLE	PREAMP	ANTENNA	TABLE	
(MHz)	LEVEL (dBuV/m)	LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	FACTOR (dB/m)	LOSS (dB)	FACTOR (dB)	HEIGHT (cm)	ANGLE (Degree)	REMARK
(MHz) 40.8										
` ,	(dBuV/m)	(dBuV)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	(cm)	(Degree)	
40.8	(dBuV/m) 37.84	(dBuV) 54.64	(dBuV/m)	(dB) -2.16	(dB/m) 13.55	(dB) 0.67	(dB) 31.02	(cm)	(Degree) 174	Peak
40.8 56.46	(dBuV/m) 37.84 36.7	(dBuV) 54.64 54.89	(dBuV/m) 40 40	(dB) -2.16 -3.3	(dB/m) 13.55 12.35	(dB) 0.67 0.8	(dB) 31.02 31.34	(cm) 100	(Degree) 174 181	Peak Peak
40.8 56.46 285.15	(dBuV/m) 37.84 36.7 38.38	(dBuV) 54.64 54.89 55.63	(dBuV/m) 40 40 46	(dB) -2.16 -3.3 -7.62	(dB/m) 13.55 12.35 12.51	(dB) 0.67 0.8 1.98	(dB) 31.02 31.34 31.74	(cm) 100 100	(Degree) 174 181 265	Peak Peak Peak

Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
 Margin Value = Emission Level - Limit Value



4.2 FREQUENCY STABILITY

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of –20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100039	Jan. 31, 2013	Jan. 30, 2014
WIT STANDARD TEMPERATURE AND HUMIDITY CHAMBER	TH-4S-C	W981030	Jun. 10, 2013	Jun. 09, 2014

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE


- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% range and the frequency record.



4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

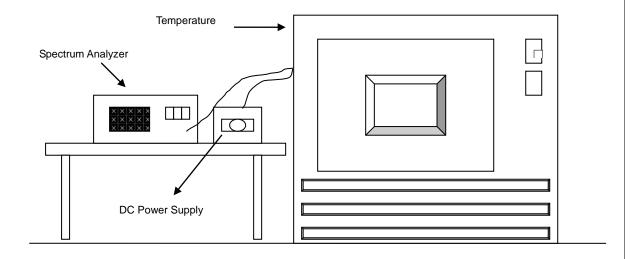

4.2.6 EUT OPERATING CONDITION

Same as Item 4.1.6.



4.2.7 TEST RESULTS

FREQUEMCY STABILITY VERSUS TEMP.									
		0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
TEMP. (°C)	POWER SUPPLY (Vdc)	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
80	13.8	13.560018	0.00013	13.560009	0.00007	13.560011	0.00008	13.560032	0.00024
70	13.8	13.560005	0.00004	13.560277	0.00204	13.560425	0.00313	13.560129	0.00095
60	13.8	13.560145	0.00107	13.560266	0.00196	13.560054	0.00040	13.560071	0.00052
50	13.8	13.560345	0.00254	13.560024	0.00018	13.560231	0.00170	13.560198	0.00146
40	13.8	13.559873	-0.00094	13.559961	-0.00029	13.560573	0.00423	13.560163	0.00120
30	13.8	13.559944	-0.00041	13.559941	-0.00044	13.559955	-0.00033	13.559966	-0.00025
20	13.8	13.560079	0.00058	13.560064	0.00047	13.560067	0.00049	13.560077	0.00057
10	13.8	13.559952	-0.00035	13.559955	-0.00033	13.559968	-0.00024	13.559948	-0.00038
0	13.8	13.559926	-0.00055	13.559936	-0.00047	13.559952	-0.00035	13.559941	-0.00044
-10	13.8	13.559951	-0.00036	13.559931	-0.00051	13.559958	-0.00031	13.559931	-0.00051
-20	13.8	13.560035	0.00026	13.560053	0.00039	13.560046	0.00034	13.560037	0.00027
-30	13.8	13.560036	0.00027	13.560045	0.00033	13.560042	0.00031	13.560029	0.00021

FREQUEMCY STABILITY VERSUS VOLTAGE									
	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
TEMP. (°C)		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
	16	13.560081	0.00060	13.560065	0.00048	13.560071	0.00052	13.560077	0.00057
20	13.8	13.560079	0.00058	13.560064	0.00047	13.560067	0.00049	13.560077	0.00057
	9	13.560082	0.00060	13.560065	0.00048	13.56007	0.00052	13.560078	0.00058



4.3 20dB BANDWIDTH

4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

The 20dB bandwidth shall be specified in operating frequency band.

4.3.2 TEST INSTRUMENTS

Same as Item 4.1.2.

4.3.3 TEST PROCEDURE

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

Same as Item 4.1.5.


4.3.6 EUT OPERATING CONDITION

Same as Item 4.1.6.



4.3.7 TEST RESULTS

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	PASS/FAIL	
13.558512308 MHz	13.561096667 MHz	13.553~13.567	PASS	

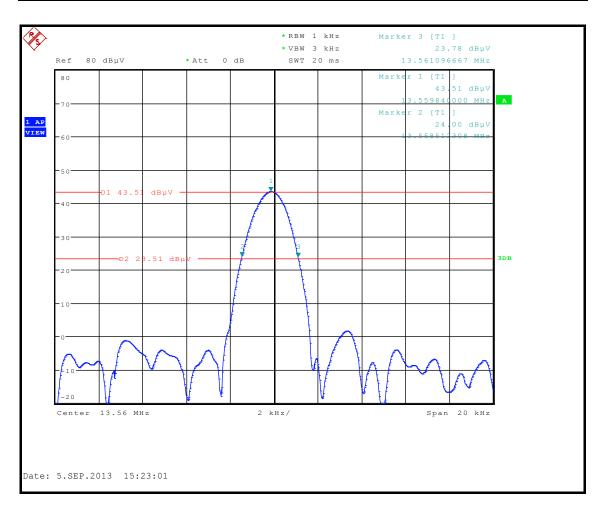



5. PHOTOGRAPHS OF THE TEST CONFIGURATION
Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

 Linko EMC/RF Lab:
 Hsin Chu EMC/RF Lab:

 Tel: 886-2-26052180
 Tel: 886-3-5935343

 Fax: 886-2-26051924
 Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232 Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com
Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---