

### FCC REPORT

**Applicant:** HSH Management Services Ltd.

**Address of Applicant:** 1/F, United Factory Building ,50 Heung Yip Street, Aberdeen, Hong Kong

**Equipment Under Test (EUT)**

Product Name: Smartphone Tablet Dock

Model No.: SPD

**FCC ID:** 2AA57SPD150505

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.249:2014

**Date of sample receipt:** May 06, 2015

**Date of Test:** May 06-13, 2015

**Date of report issued:** May 13, 2015

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A circular logo for GTS (Global United Technology Services Co., Ltd.) is overlaid with a handwritten signature in black ink. The logo contains the text 'GTS', 'GLOBAL TESTING', and 'GLOBAL UNITED TECHNOLOGY SERVICES CO., LTD.' around the perimeter.

**Robinson Lo**

**Laboratory Manager**

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Version No.	Date	Description
00	May 13, 2015	Original

Prepared By:

*Edward. Pan*

Date:

May 13, 2015

Project Engineer

Check By:

*Hank. Yan*

Date:

May 13, 2015

Reviewer

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF EUT .....	5
5.3 TEST MODE .....	6
5.4 DESCRIPTION OF SUPPORT UNITS .....	7
5.5 TEST FACILITY.....	7
5.6 TEST LOCATION .....	7
5.7 DESCRIPTION OF SUPPORT UNITS .....	7
5.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT .....	10
7.2 CONDUCTED EMISSIONS .....	11
7.3 RADIATED EMISSION METHOD .....	14
7.3.1 <i>Field Strength of The Fundamental Signal</i> .....	16
7.3.2 <i>Spurious emissions</i> .....	17
7.3.3 <i>Bandedge emissions</i> .....	21
7.4 20dB OCCUPY BANDWIDTH .....	22
8 TEST SETUP PHOTO .....	26
9 EUT CONSTRUCTIONAL DETAILS .....	28

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

## 5 General Information

### 5.1 Client Information

Applicant:	HSH Management Services Ltd.
Address of Applicant:	1/F, United Factory Building ,50 Heung Yip Street, Aberdeen, Hong Kong
Manufacturer:	HSH Management Services Ltd.
Address of Manufacturer:	1/F, United Factory Building ,50 Heung Yip Street, Aberdeen, Hong Kong

### 5.2 General Description of EUT

Product Name:	Smartphone Tablet Dock
Model No.:	SPD
Software version:	V1.0
Hardware version:	REV.A
Serial Number:	prototype
Bluetooth Version:	V4.0 Dual-mode (V2.1+EDR and BLE)
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4DQPSK, 8DPSK
Antenna Type:	PCB Antenna
Antenna gain:	0dBi
Power supply:	Model No.: LTE18W-S1-E Input: AC 100-240V 50/60Hz 0.5A Output: DC 5 V 3A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

### 5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

<b>Final Test Mode:</b>
The EUT was tested in GFSK, Pi/4 QPSK, 8DPSK modulation, and found the GFSK modulation is the worst case.
According to ANSI C63.4 standards, the test results recorded on the report is the "worst case".

## 5.4 Description of Support Units

None

## 5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

## 5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Room 301-309, 3th Floor, Block A, Huafeng Jinyuan Business Building, No. 300 Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

## 5.7 Description of Support Units

Manufacturer	Description	Model	Serial Number
Apple	Mobile Phone	MD235ZP	C35HCKSUDTCO
E-STAR	I.T.E Adapter	LTE18W-S1-E	120600267

## 5.8 Other Information Requested by the Customer

None.

## 6 Test Instruments list

Radiated Emission & occupied bandwidth						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 28 2015	Mar. 27 2016
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Jul. 01 2014	Jun 30 2015
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 01 2014	Jun 30 2015
5	Loop Antenna	ZHINAN	ZN30900A	GTS534	Feb. 22 2015	Feb. 21 2016
6	BiConiLog Antenna	SCHWARZBECK MESS- ELEKTRONIK	VULB9163	GTS214	Jul. 01 2014	Jun 30 2015
7	Double -ridged waveguide horn	SCHWARZBECK MESS- ELEKTRONIK	9120D-829	GTS208	June 27 2014	June 26 2015
8	Horn Antenna	ETS-LINDGREN	3160-09	GTS217	Mar. 28 2015	Mar. 27 2016
9	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
10	Coaxial Cable	GTS	Coaxial Cable (9k ~ 30M)	GTS213	Mar. 28 2015	Mar. 27 2016
11	Coaxial Cable	GTS	Coaxial Cable (30M ~ 1G)	GTS211	Mar. 28 2015	Mar. 27 2016
12	Coaxial cable	GTS	Coaxial Cable (1G ~ 18G)	GTS210	Mar. 28 2015	Mar. 27 2016
13	Coaxial Cable	GTS	Coaxial Cable (18G ~ 40G)	GTS212	Mar. 28 2015	Mar. 27 2016
14	Amplifier(100kHz- 3GHz)	HP	8347A	GTS204	Jul. 01 2014	Jun. 30, 2015
15	Amplifier(2GHz- 20GHz)	HP	8349B	GTS206	Jul. 01 2014	Jun. 30, 2015
16	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 27 2014	June 26 2015
17	Band filter	Amindeon	82346	GTS219	Mar. 28 2015	Mar. 27 2016
18	Coaxial Cable (SMA Connect)	GTS	Coaxial Cable (10M ~ 10G)	GTS674	Jul. 01 2014	Jun. 30, 2015




<b>Conducted Emission:</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal.Date (mm-dd-yy)</b>	<b>Cal.Due date (mm-dd-yy)</b>
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	July 01 2014	June 30 2015
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015
3	10dB Pulse Limita	Rohde & Schwarz	ESH3-Z2	GTS224	July 01 2014	June 30 2015
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015
5	LISN	SCHWARZBECK MESS- ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015
6	Coaxial Cable	GTS	Coaxial Cable (9k ~ 30M)	GTS227	July 01 2014	June 30 2015
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

<b>General used equipment:</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal.Date (mm-dd-yy)</b>	<b>Cal.Due date (mm-dd-yy)</b>
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

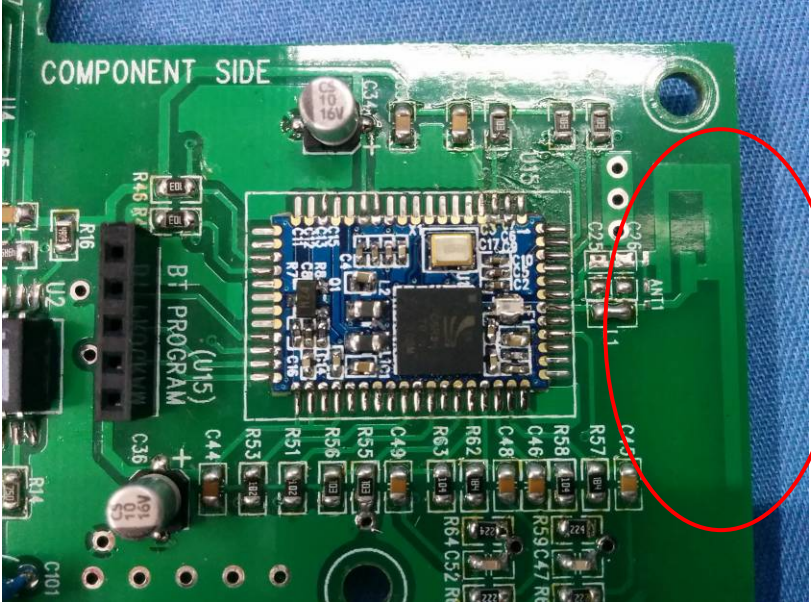
<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>E.U.T Antenna:</b> <i>The antenna is PCB Antenna, the best case gain of the antenna is 0dBi</i>	
	

## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.4:2009														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p><i>Remark</i>  <i>E.U.T: Equipment Under Test</i>  <i>LISN: Line Impedance Stabilization Network</i>  <i>Test table height=0.8m</i></p>														
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2009 on conducted measurement.</li> </ol>														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Pass														

### Measurement data:


Line:

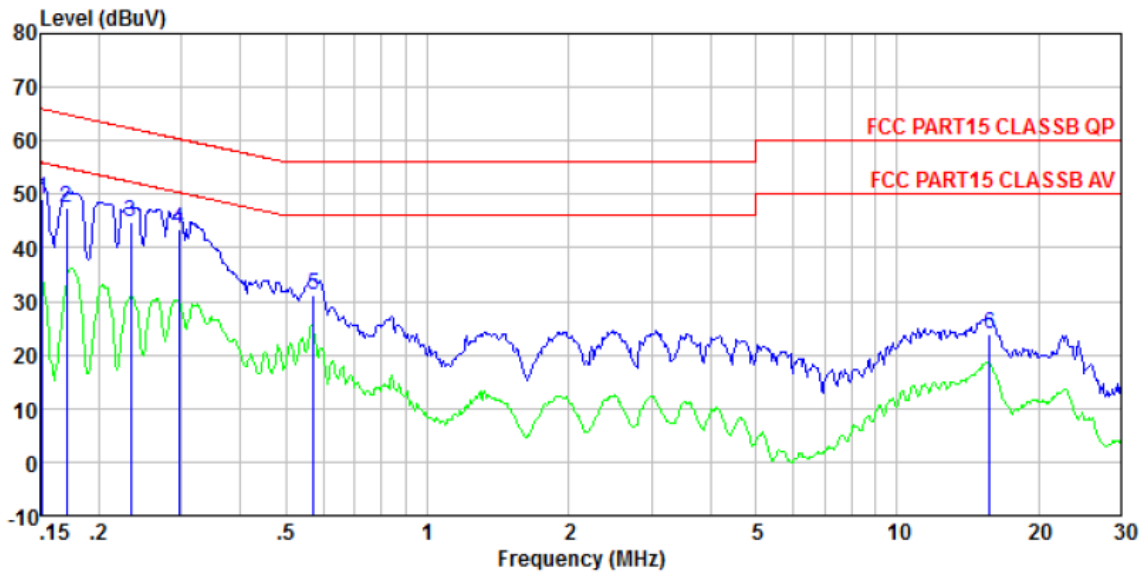

Site : Shielded room  
 Condition : FCC PART15 CLASSB QP LISN-2013 LINE  
 Job No. : 0624RF  
 Test mode : Normal operation  
 : while linking with the phone  
 Power Supply : AC 120V/60Hz  
 Test Engineer: Qing

	Read	Limit	LISN	Cable	Over		
Freq	Level	Level	Line	Factor	Loss	Limit	Remark
MHz	dBuV	dBuV	dBuV	dB	dB	dB	
1	0.152	48.97	49.24	65.91	0.15	0.12	-16.67 QP
2	0.170	47.21	47.48	64.94	0.15	0.12	-17.46 QP
3	0.234	44.39	44.63	62.30	0.12	0.12	-17.67 QP
4	0.296	43.27	43.48	60.37	0.11	0.10	-16.89 QP
5	0.573	31.03	31.28	56.00	0.13	0.12	-24.72 QP
6	15.718	23.45	23.98	60.00	0.31	0.22	-36.02 QP

**Neutral:**

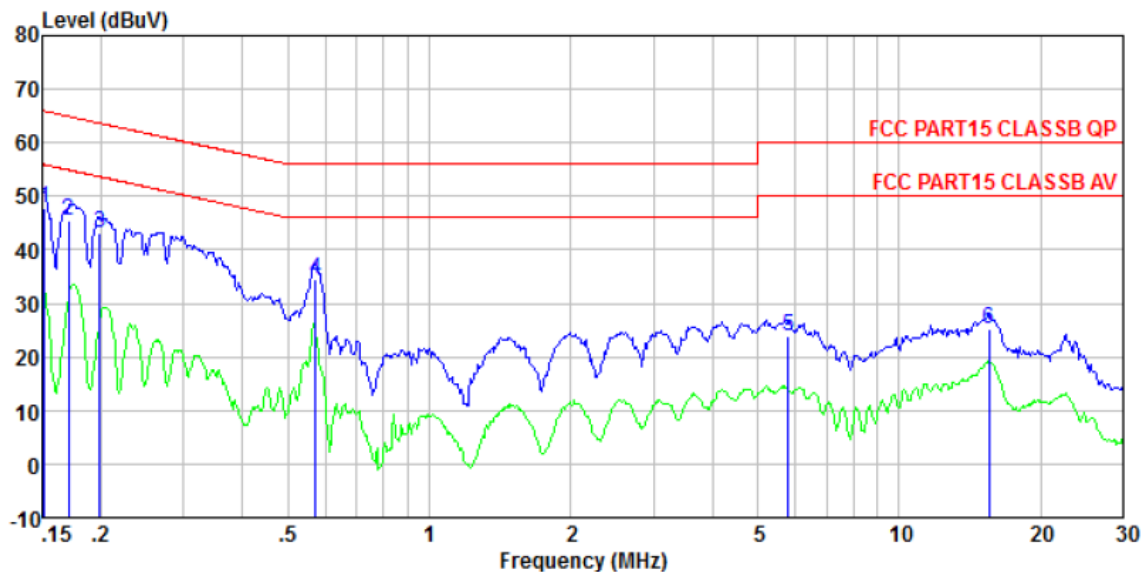


Site : Shielded room  
 Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL  
 Job No. : 0624RF  
 Test mode : Normal operation  
 : while linking with the phone  
 Power Supply : AC 120V/60Hz  
 Test Engineer: Qing


	Read	Limit	LISN	Cable	Over		
Freq	Level	Level	Line	Factor	Loss	Limit	Remark
MHz	dBuV	dBuV	dBuV	dB	dB	dB	
1	0.152	47.57	47.76	65.91	0.07	0.12	-18.15 QP
2	0.170	45.42	45.61	64.94	0.07	0.12	-19.33 QP
3	0.199	42.84	43.04	63.67	0.07	0.13	-20.63 QP
4	0.573	34.32	34.51	56.00	0.07	0.12	-21.49 QP
5	5.805	23.40	23.72	60.00	0.16	0.16	-36.28 QP
6	15.552	24.64	25.20	60.00	0.34	0.22	-34.80 QP

**Notes:**


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

## 7.3 Radiated Emission Method

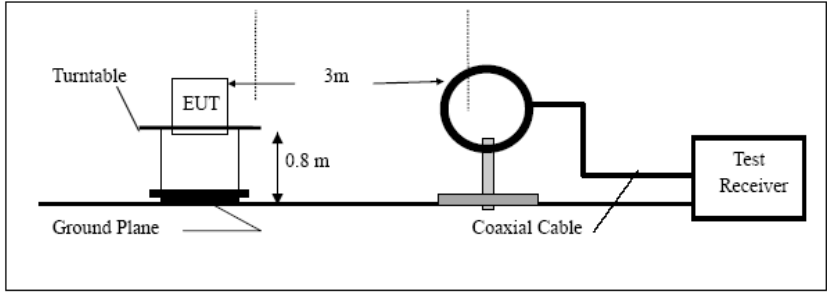Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4:2009				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
		114.00		Peak Value	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-1.705MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	<p>Below 30MHz</p>  <p>Below 1GHz</p>				

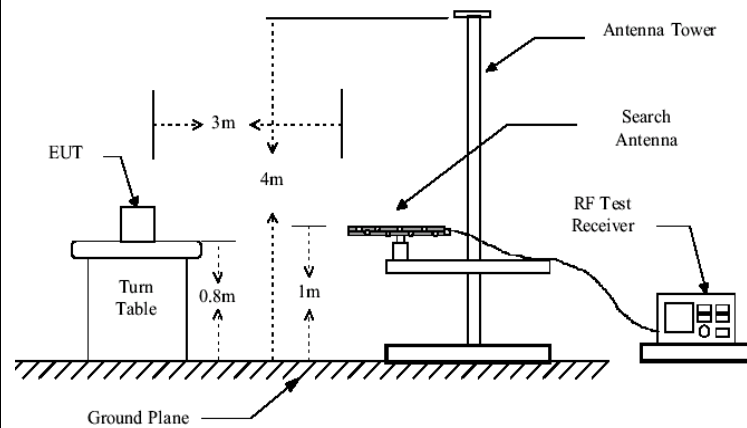

Above 1GHz

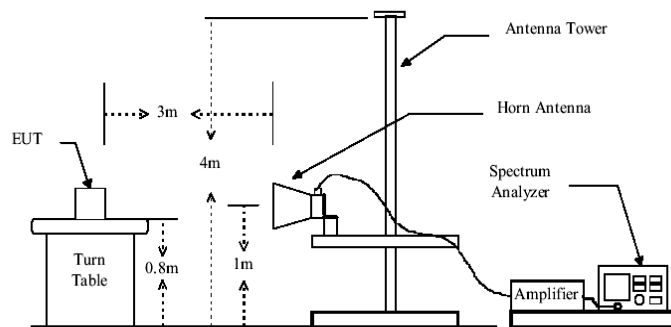

**Test Procedure:**

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with

	<p>polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>For the test above 1GHz, when radiated measurements are made at the measurement distance and the measurement antenna does not completely encompass a large EUT at that distance, additional measurements at a greater distance may be necessary to demonstrate that emissions were at maximum at the limit distance.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

**Measurement data:**

**7.3.1 Field Strength of The Fundamental Signal**

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	94.51	27.58	5.39	30.18	97.30	114.00	-16.70	Vertical
2402.00	91.50	27.58	5.39	30.18	94.29	114.00	-19.71	Horizontal
2441.00	92.60	27.55	5.43	30.06	95.52	114.00	-18.48	Vertical
2441.00	90.44	27.55	5.43	30.06	93.36	114.00	-20.64	Horizontal
2480.00	95.82	27.52	5.47	29.93	98.88	114.00	-15.12	Vertical
2480.00	92.31	27.52	5.47	29.93	95.37	114.00	-18.63	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	83.19	27.58	5.39	30.18	85.98	94.00	-8.02	Vertical
2402.00	80.33	27.58	5.39	30.18	83.12	94.00	-10.89	Horizontal
2441.00	81.15	27.55	5.43	30.06	84.07	94.00	-9.93	Vertical
2441.00	78.12	27.55	5.43	30.06	81.04	94.00	-12.96	Horizontal
2480.00	84.70	27.52	5.47	29.93	87.76	94.00	-6.24	Vertical
2480.00	81.08	27.52	5.47	29.93	84.14	94.00	-9.86	Horizontal

Remark: RBW 3MHz, VBW 10MHz, peak detector for PK value, RBW 3MHz, VBW 10MHz AV detector for AV value



## 7.3.2 Spurious emissions

Note:

1. The measured field strength at frequencies below 30MHz are lower than the limit over 30dB. So the data isn't reported.

### ■ Below 1GHz

Remark: The test was performed at the lowest, middle and highest channel. The data of lowest channel was found as the worst, so only the data of that channel is reported.

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
37.03	52.76	14.82	0.63	30.06	38.15	40.00	-1.85	Vertical
74.92	50.67	9.80	0.98	29.83	31.62	40.00	-8.38	Vertical
125.01	52.29	11.70	1.40	29.54	35.85	43.50	-7.65	Vertical
199.99	51.20	12.57	1.84	29.20	36.41	43.50	-7.09	Vertical
400.43	46.86	17.10	2.85	29.50	37.31	46.00	-8.69	Vertical
605.66	44.18	20.47	3.74	29.30	39.09	46.00	-6.91	Vertical
55.42	40.66	14.98	0.82	29.96	26.50	40.00	-13.50	Horizontal
125.01	50.43	11.70	1.40	29.54	33.99	43.50	-9.51	Horizontal
232.53	55.30	13.72	2.03	29.50	41.55	46.00	-4.45	Horizontal
319.94	51.74	15.33	2.47	29.88	39.66	46.00	-6.34	Horizontal
605.66	42.54	20.47	3.74	29.30	37.45	46.00	-8.55	Horizontal
893.86	37.02	23.05	4.83	29.10	35.80	46.00	-10.20	Horizontal

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	36.44	31.78	8.60	32.09	44.73	74.00	-29.27	Vertical
7206.00	31.26	36.15	11.65	32.00	47.06	74.00	-26.94	Vertical
9608.00	30.96	37.95	14.14	31.62	51.43	74.00	-22.57	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	40.55	31.78	8.60	32.09	48.84	74.00	-25.16	Horizontal
7206.00	32.94	36.15	11.65	32.00	48.74	74.00	-25.26	Horizontal
9608.00	30.30	37.95	14.14	31.62	50.77	74.00	-23.23	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	25.42	31.78	8.60	32.09	33.71	54.00	-20.29	Vertical
7206.00	20.04	36.15	11.65	32.00	35.84	54.00	-18.16	Vertical
9608.00	19.17	37.95	14.14	31.62	39.64	54.00	-14.36	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	29.55	31.78	8.60	32.09	37.84	54.00	-16.16	Horizontal
7206.00	22.16	36.15	11.65	32.00	37.96	54.00	-16.04	Horizontal
9608.00	18.83	37.95	14.14	31.62	39.30	54.00	-14.70	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

*Remark:*

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
3. *“\*” , means this data is the too weak instrument of signal is unable to test.*

Test channel:	Middle channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	38.22	31.85	8.67	32.12	46.62	74.00	-27.38	Vertical
7323.00	32.44	36.37	11.72	31.89	48.64	74.00	-25.36	Vertical
9764.00	32.01	38.35	14.25	31.62	52.99	74.00	-21.01	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	42.69	31.85	8.67	32.12	51.09	74.00	-22.91	Horizontal
7323.00	34.27	36.37	11.72	31.89	50.47	74.00	-23.53	Horizontal
9764.00	31.52	38.35	14.25	31.62	52.50	74.00	-21.50	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	26.88	31.85	8.67	32.12	35.28	54.00	-18.72	Vertical
7323.00	21.03	36.37	11.72	31.89	37.23	54.00	-16.77	Vertical
9764.00	20.05	38.35	14.25	31.62	41.03	54.00	-12.97	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	31.21	31.85	8.67	32.12	39.61	54.00	-14.39	Horizontal
7323.00	23.27	36.37	11.72	31.89	39.47	54.00	-14.53	Horizontal
9764.00	19.86	38.35	14.25	31.62	40.84	54.00	-13.16	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

*Remark:*

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
3. *“\*” , means this data is the too weak instrument of signal is unable to test.*

Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	39.43	31.93	8.73	32.16	47.93	74.00	-26.07	Vertical
7440.00	33.24	36.59	11.79	31.78	49.84	74.00	-24.16	Vertical
9920.00	32.72	38.81	14.38	31.88	54.03	74.00	-19.97	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	44.15	31.93	8.73	32.16	52.65	74.00	-21.35	Horizontal
7440.00	35.18	36.59	11.79	31.78	51.78	74.00	-22.22	Horizontal
9920.00	32.35	38.81	14.38	31.88	53.66	74.00	-20.34	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	28.00	31.93	8.73	32.16	36.50	54.00	-17.50	Vertical
7440.00	21.79	36.59	11.79	31.78	38.39	54.00	-15.61	Vertical
9920.00	20.72	38.81	14.38	31.88	42.03	54.00	-11.97	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	32.48	31.93	8.73	32.16	40.98	54.00	-13.02	Horizontal
7440.00	24.12	36.59	11.79	31.78	40.72	54.00	-13.28	Horizontal
9920.00	20.64	38.81	14.38	31.88	41.95	54.00	-12.05	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

*Remark:*

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
3. *“\*” , means this data is the too weak instrument of signal is unable to test.*

### 7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	43.74	27.59	5.38	30.18	46.53	74.00	-27.47	Horizontal
2400.00	60.65	27.58	5.39	30.18	63.44	74.00	-10.56	Horizontal
2390.00	44.37	27.59	5.38	30.18	47.16	74.00	-26.84	Vertical
2400.00	62.78	27.58	5.39	30.18	65.57	74.00	-8.43	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	34.09	27.59	5.38	30.18	36.88	54.00	-17.12	Horizontal
2400.00	45.38	27.58	5.39	30.18	48.17	54.00	-5.83	Horizontal
2390.00	34.10	27.59	5.38	30.18	36.89	54.00	-17.11	Vertical
2400.00	47.11	27.58	5.39	30.18	49.90	54.00	-4.10	Vertical

Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	45.94	27.53	5.47	29.93	49.01	74.00	-24.99	Horizontal
2500.00	44.95	27.55	5.49	29.93	48.06	74.00	-25.94	Horizontal
2483.50	46.93	27.53	5.47	29.93	50.00	74.00	-24.00	Vertical
2500.00	46.03	27.55	5.49	29.93	49.14	74.00	-24.86	Vertical


**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.93	27.53	5.47	29.93	40.00	54.00	-14.00	Horizontal
2500.00	34.81	27.55	5.49	29.93	37.92	54.00	-16.08	Horizontal
2483.50	38.21	27.53	5.47	29.93	41.28	54.00	-12.72	Vertical
2500.00	34.80	27.55	5.49	29.93	37.91	54.00	-16.09	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

## 7.4 20dB Occupy Bandwidth

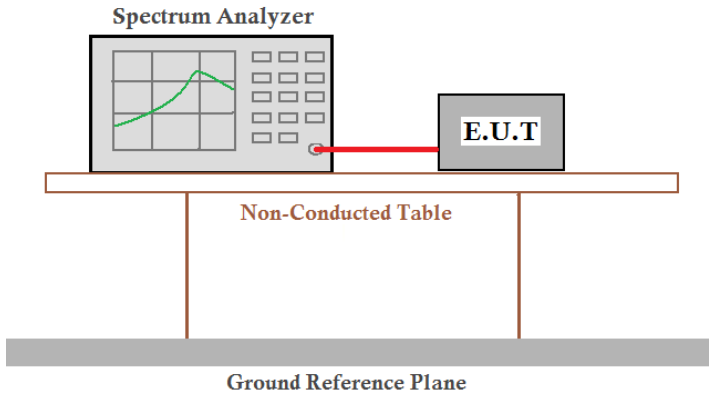
Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.4:2009
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

### Measurement Data


Modulation Type	Test channel	20dB bandwidth(MHz)	Result
GFSK	Lowest	1.109	Pass
	Middle	1.095	Pass
	Highest	1.089	Pass
Pi/4QPSK	Lowest	1.352	Pass
	Middle	1.352	Pass
	Highest	1.350	Pass
8DPSK	Lowest	1.336	Pass
	Middle	1.345	Pass
	Highest	1.346	Pass

Test plot as follows:


Modulation Type:	GFSK
------------------	------

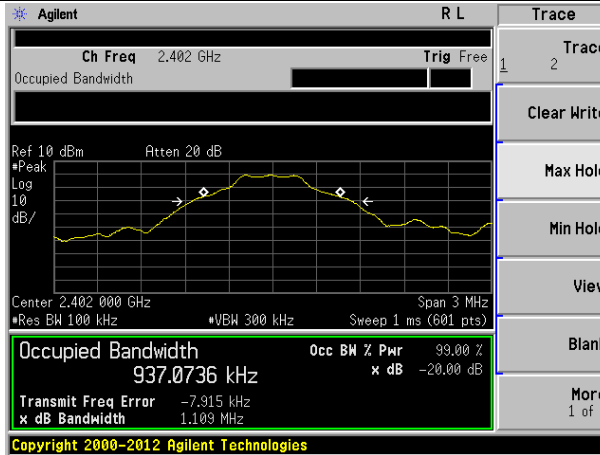

Lowest channel

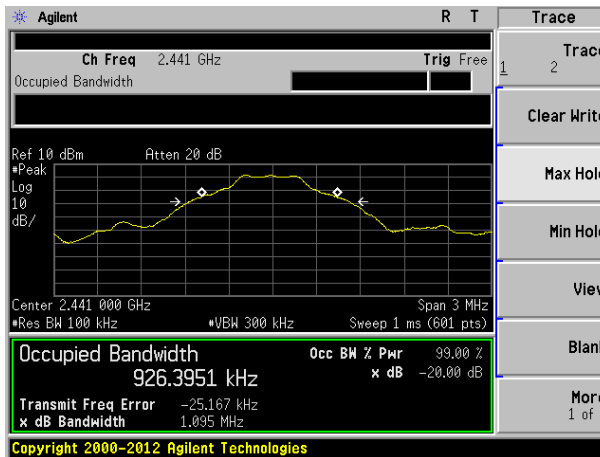


Middle channel

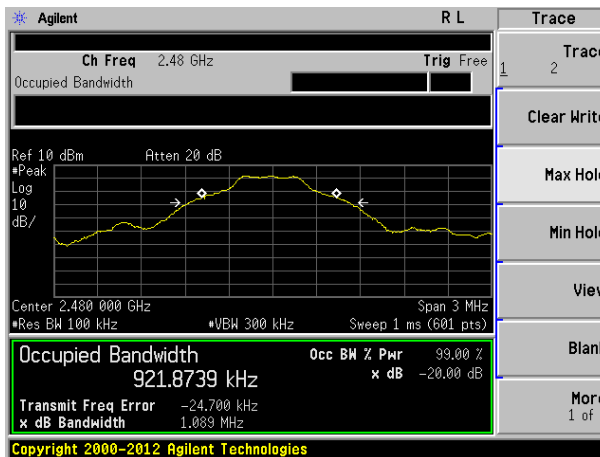


Highest channel


Modulation Type:	Pi/4QPSK
------------------	----------

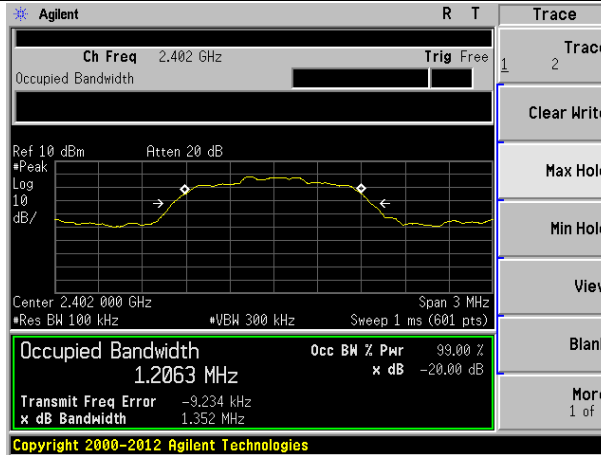

Lowest channel

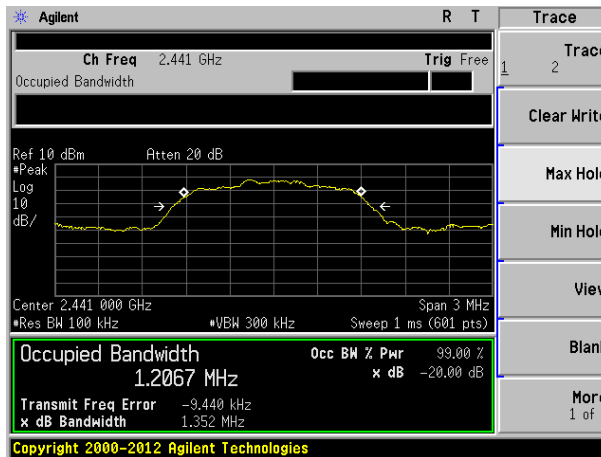


Middle channel

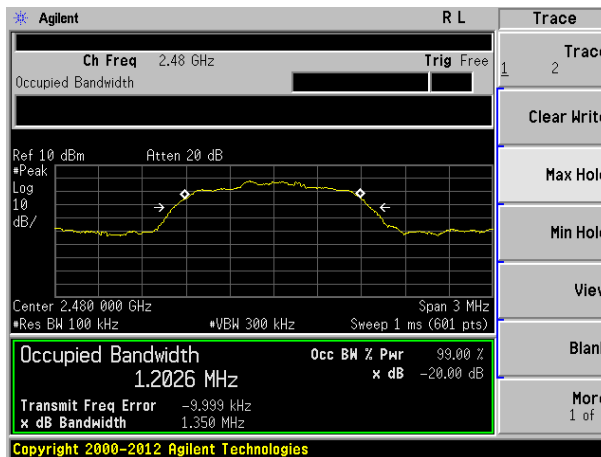


Highest channel




Modulation Type:	8DPSK
------------------	-------

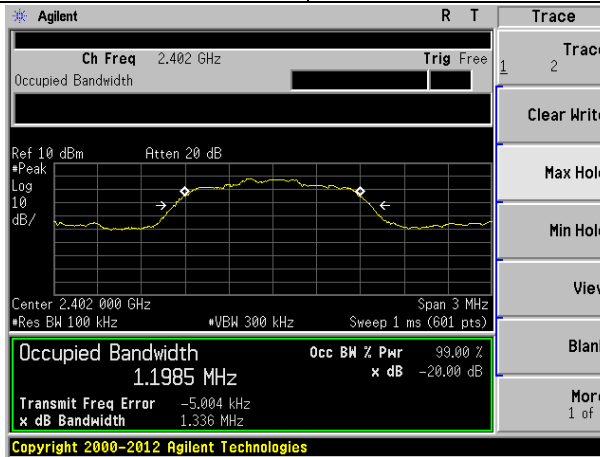

Lowest channel

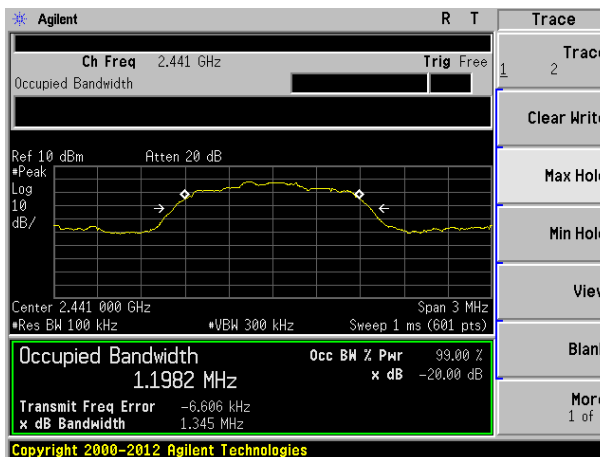



Middle channel

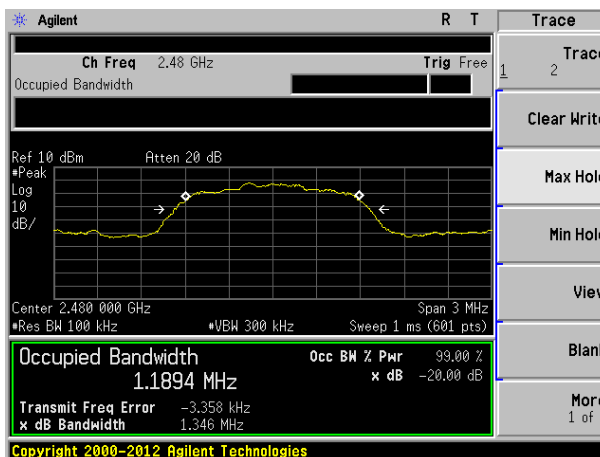


Highest channel

## 8 Test Setup Photo

Radiated Emission

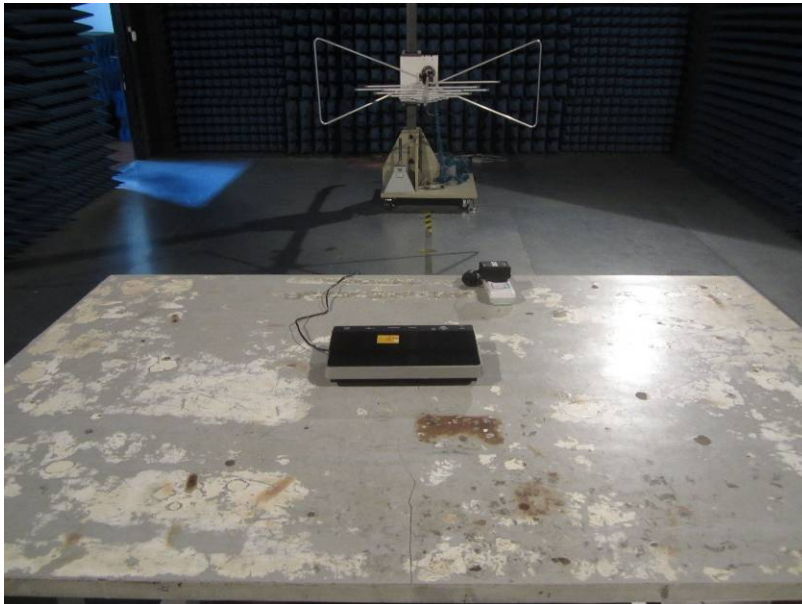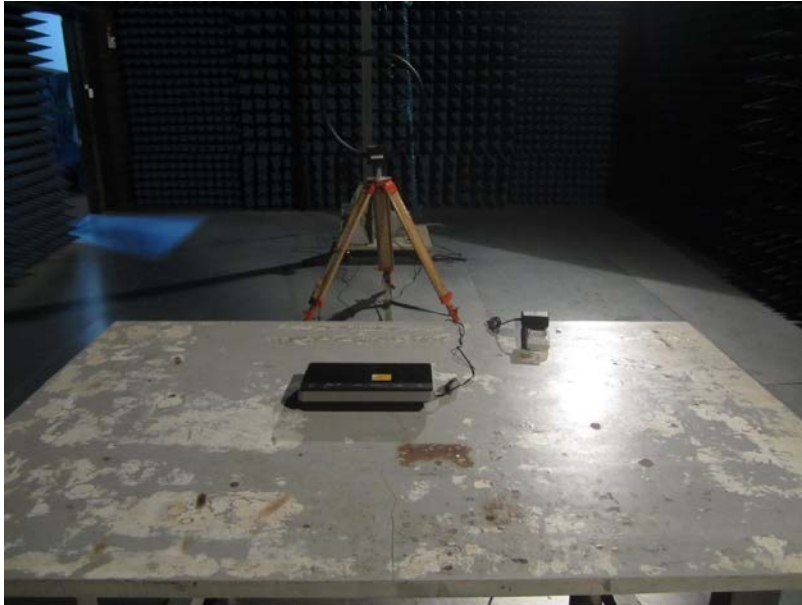

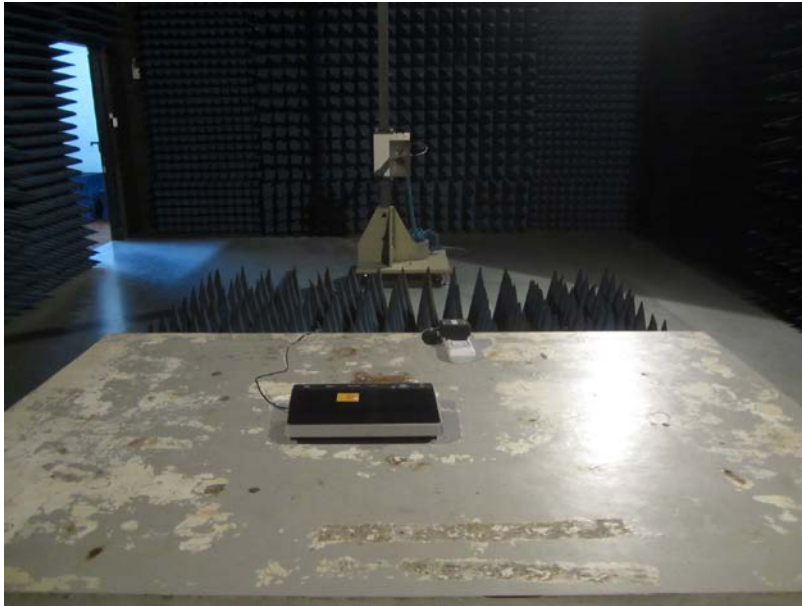




## Conducted Emissions






## 9 EUT Constructional Details




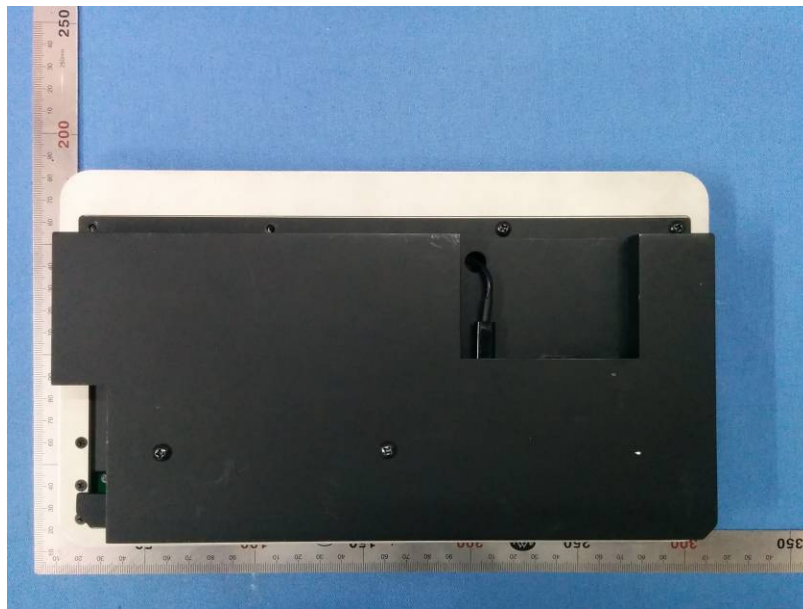


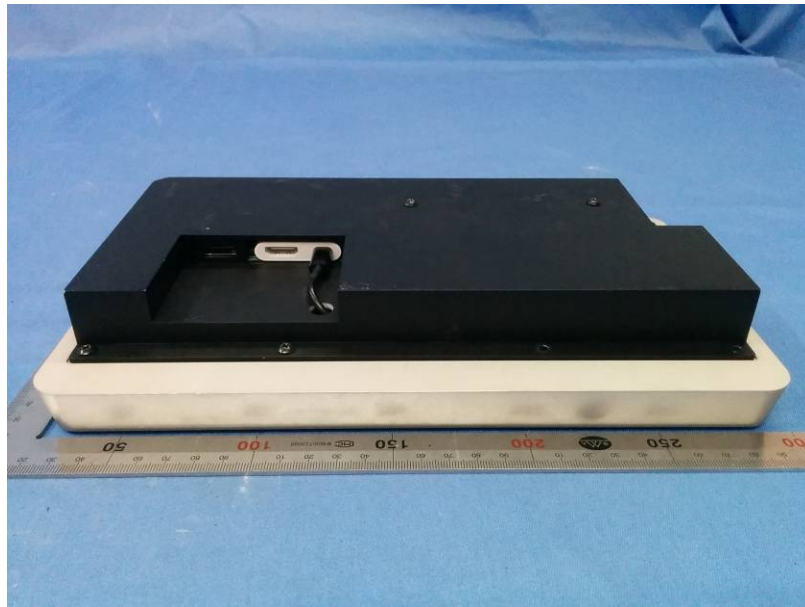
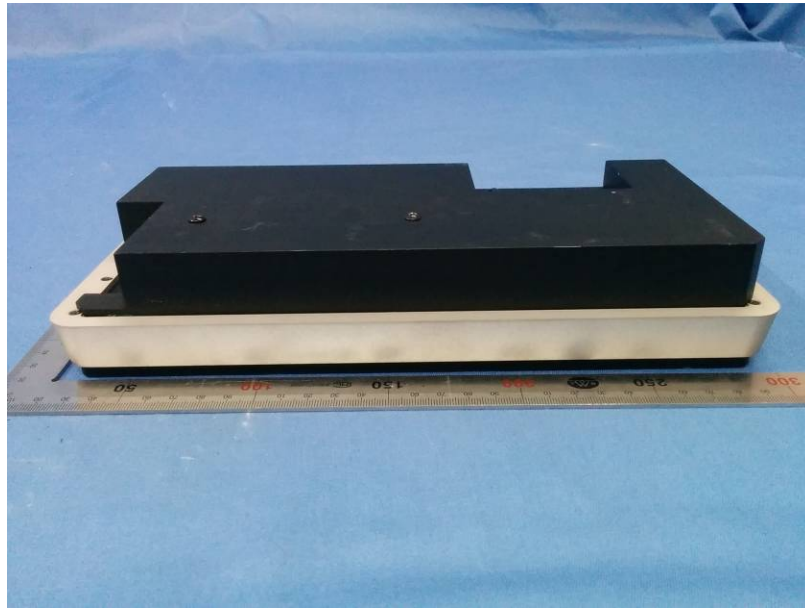


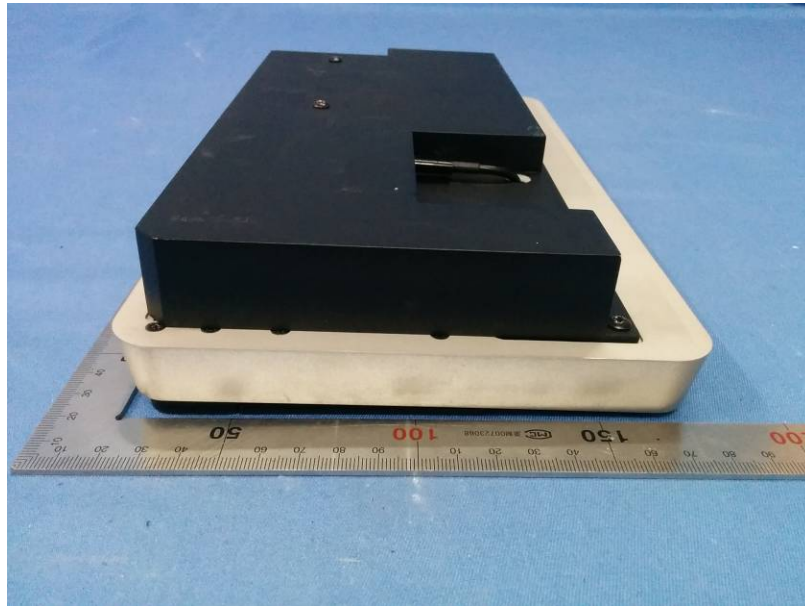


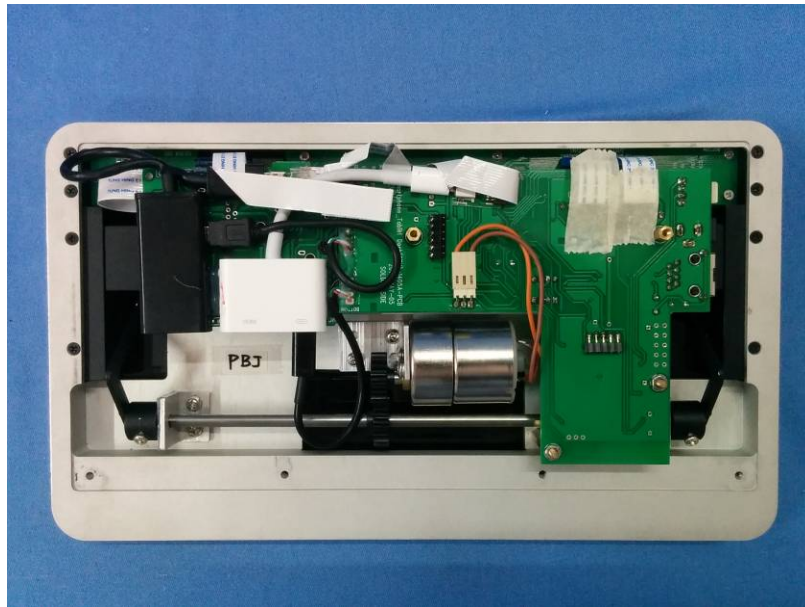
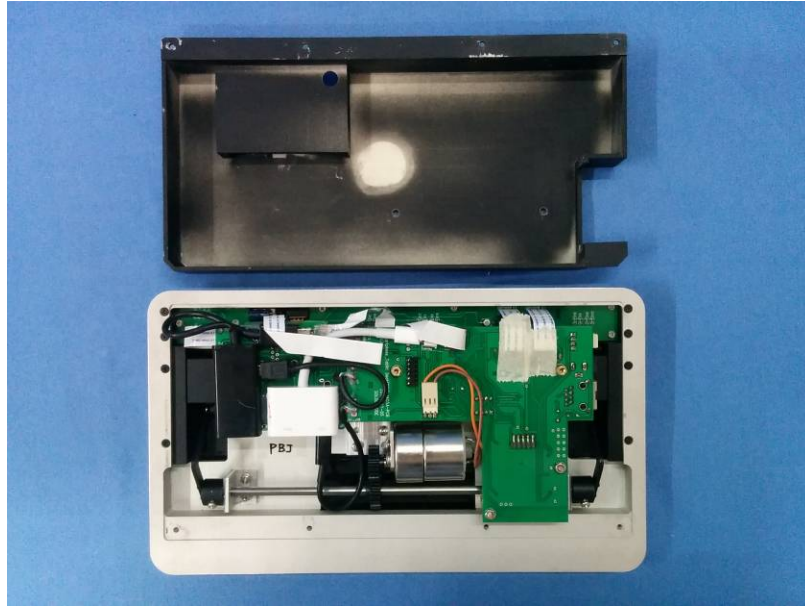






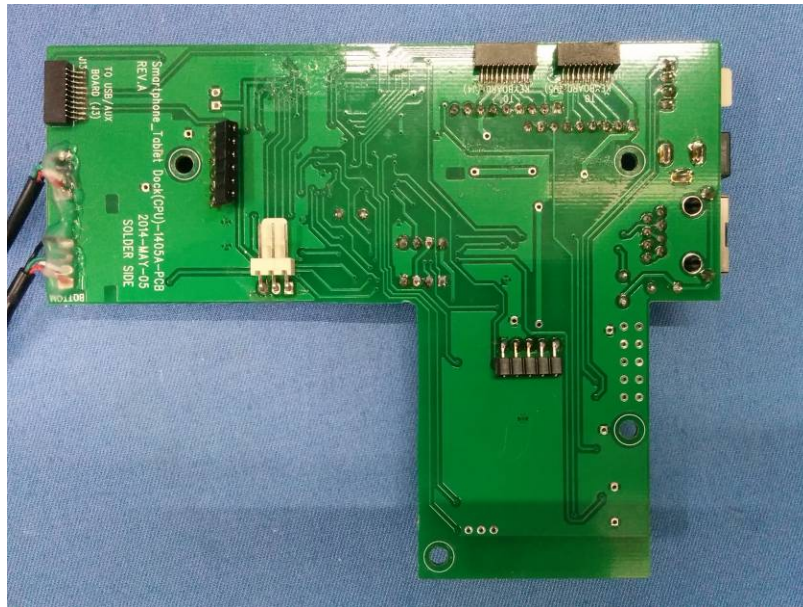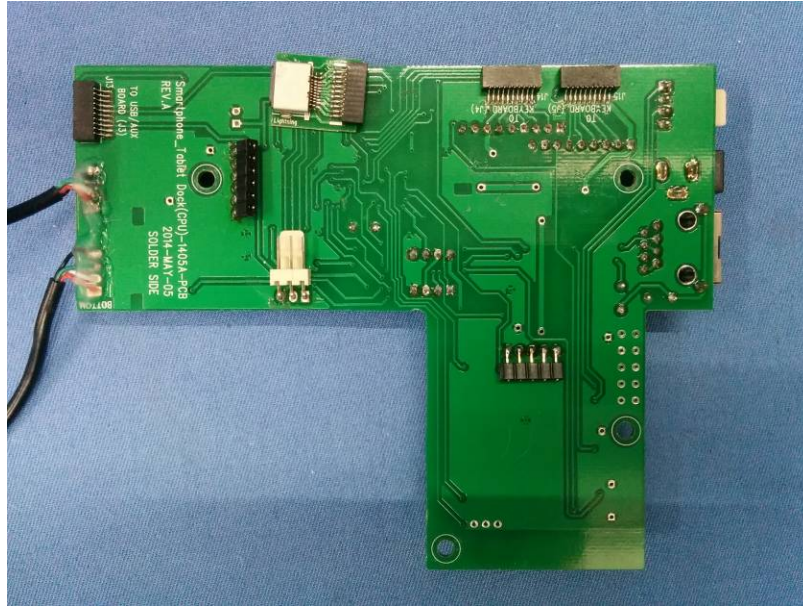

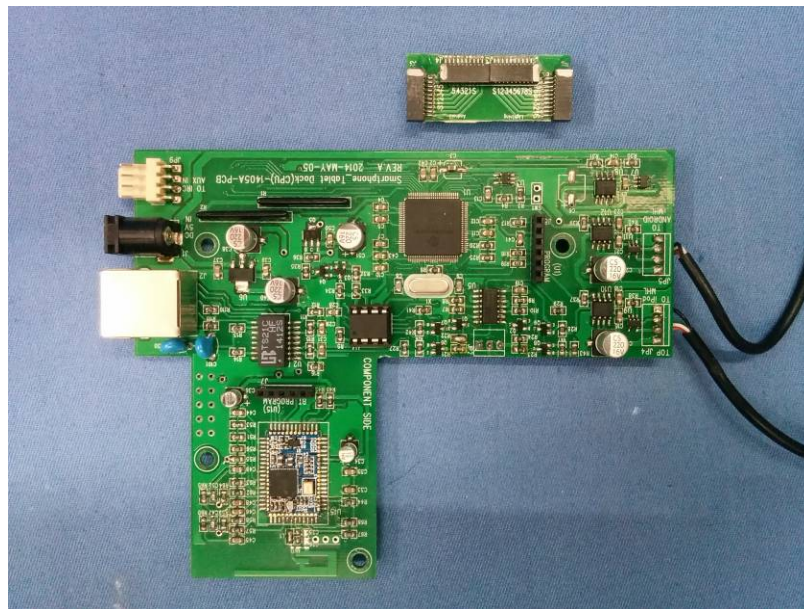
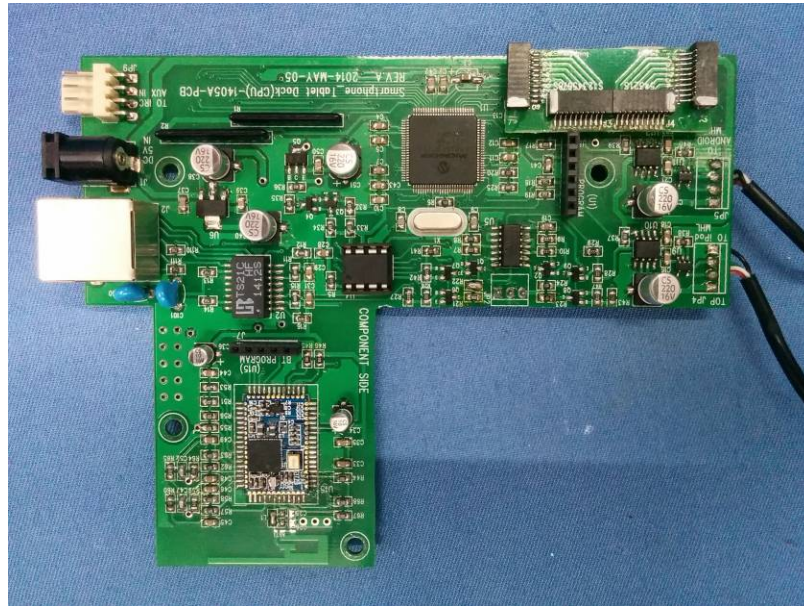


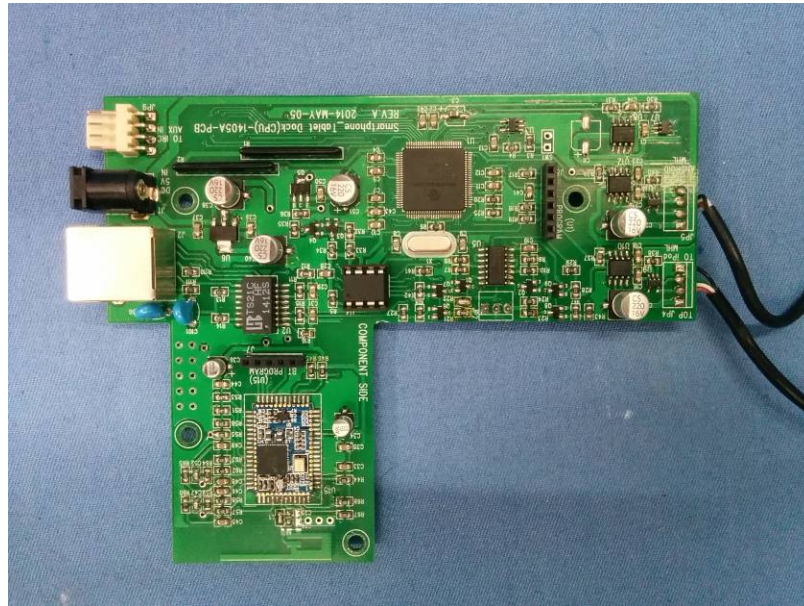


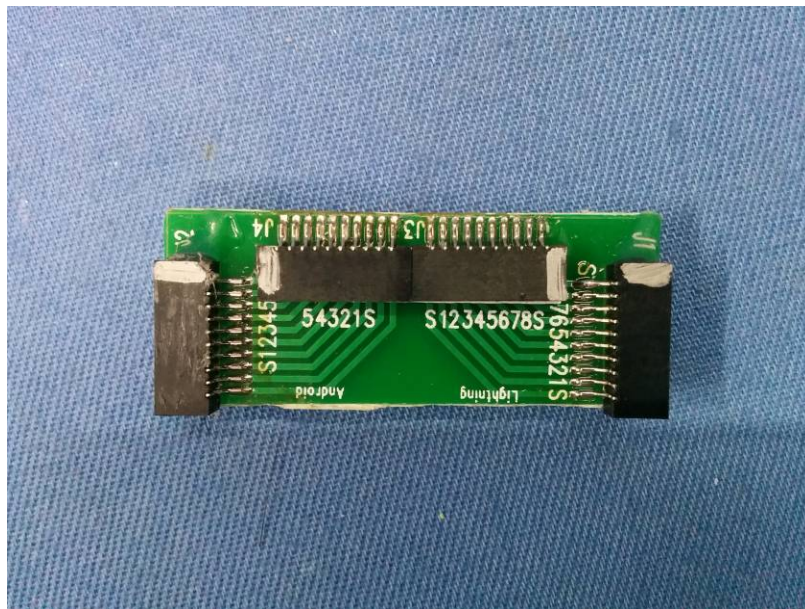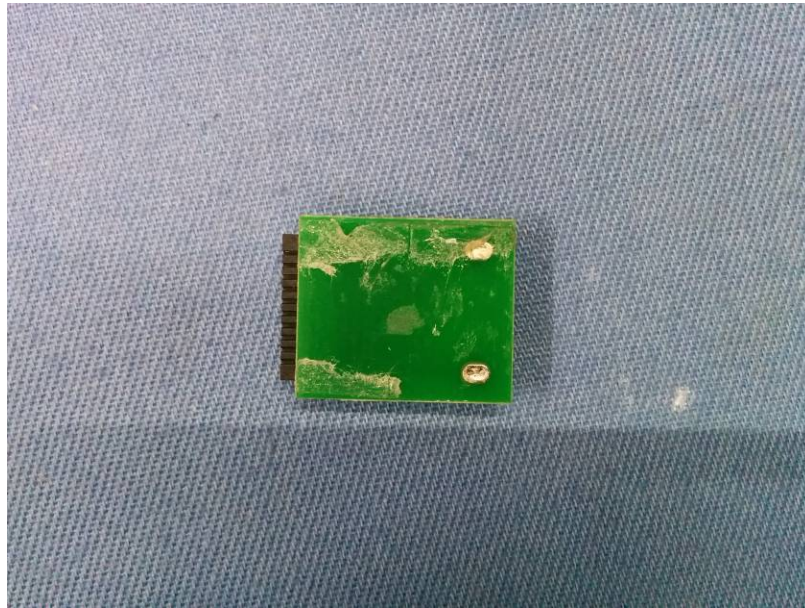

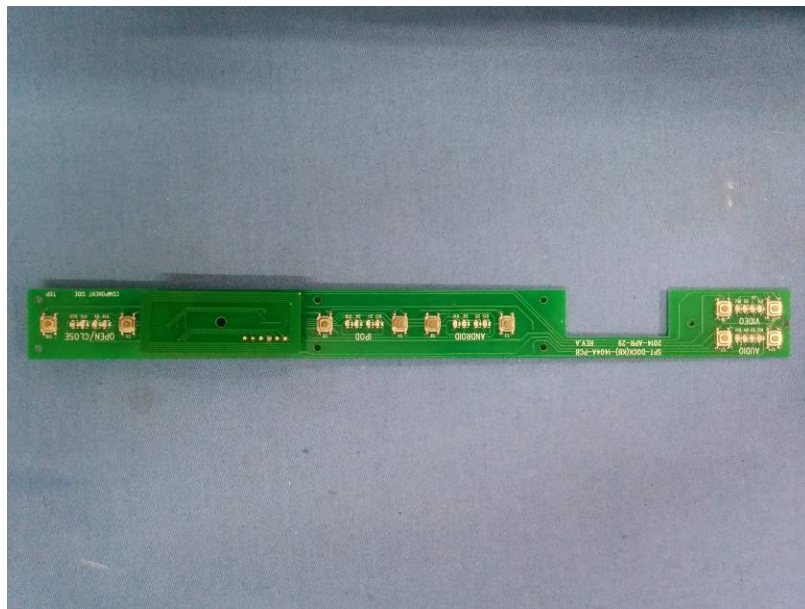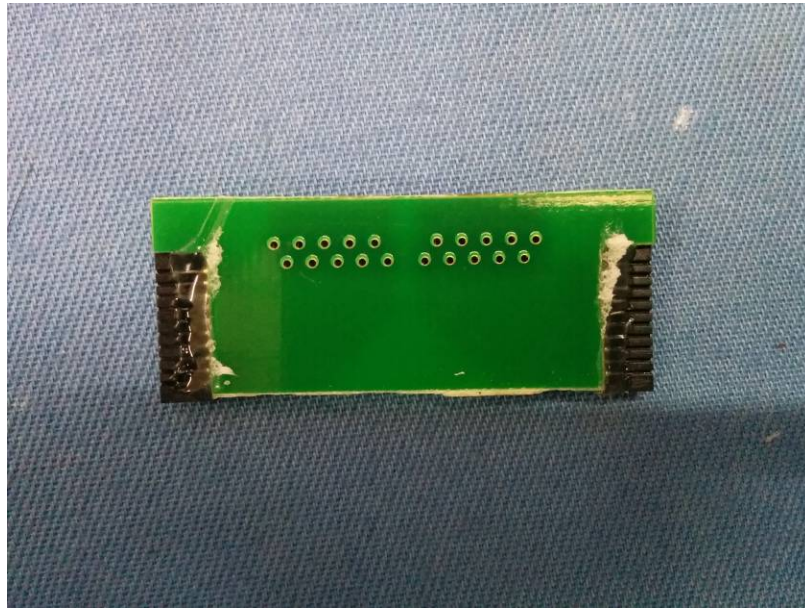



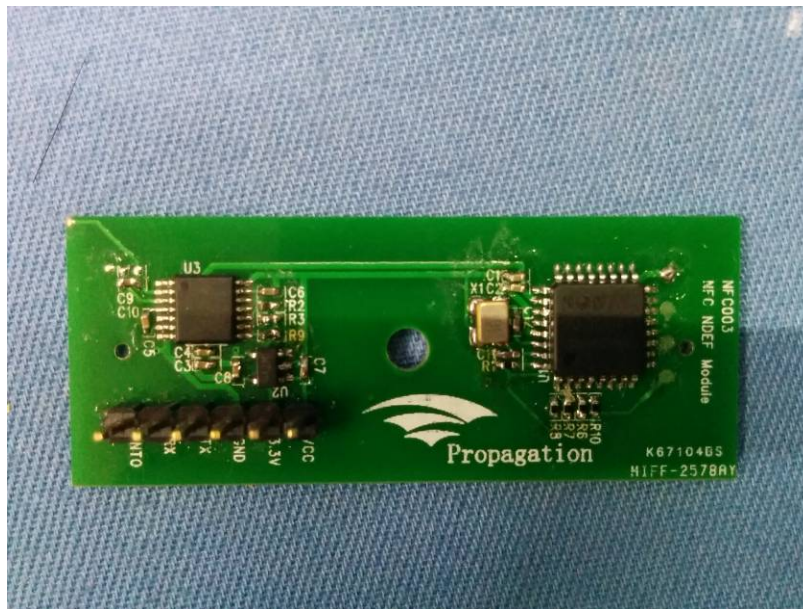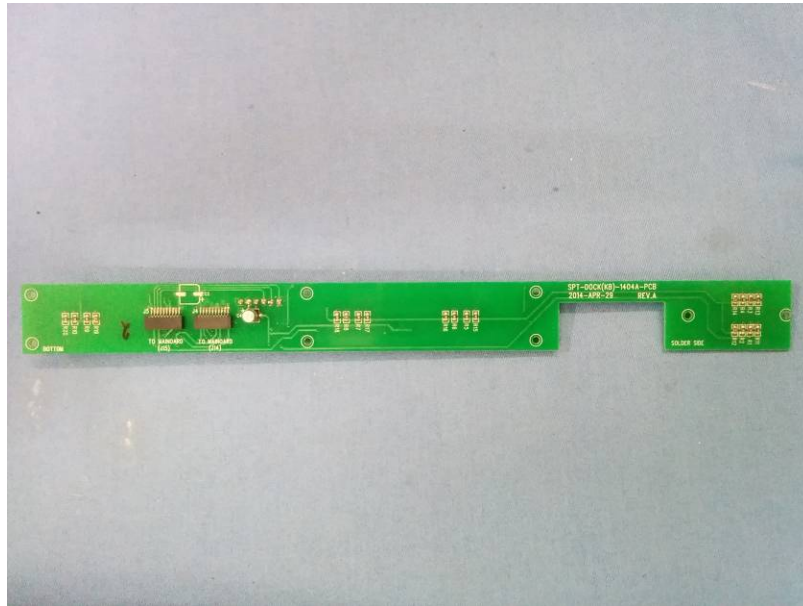

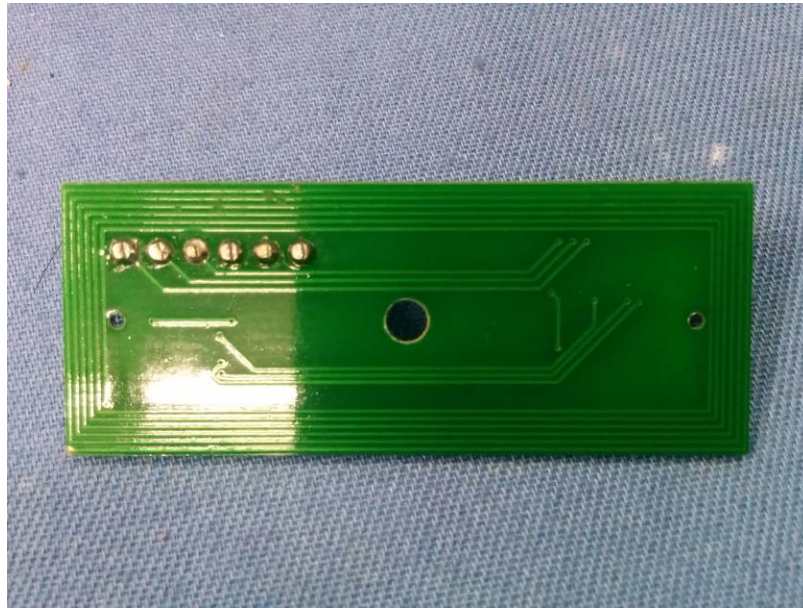

-----End-----