

Shenzhen CTL Electromagnetic Technology Co., Ltd. Tel: +86-755-89486194 Fax: +86-755-89486194-805

Jackychen Lung Cri Lung Cri

FCC PART 15 SUBPART B TEST REPORT

Report Reference No...... CTL1308301369-WD

Compiled by

(position+printed name+signature)..: File administrators Jacky Chen

Name of the organization performing

the tests

Test Engineer Tracy Qi

(position+printed name+signature)..:

Approved by

(position+printed name+signature)..: Manager Tracy Qi

Date of issue...... Sept. 06, 2013

Representative Laboratory Name .: Shenzhen CTL Electromagnetic Technology Co., Ltd.

Address...... Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,

Nanshan District, Shenzhen, China 518055

Test Firm...... Bontek Compliance Testing Laboratory Ltd

Nanshan, Shenzhen, China

Applicant's name...... CaptionCall, LLC

Test specification:

Standard FCC Part 15B: Unintentional Radiators

Master TRF...... Dated 2011-01

Shenzhen CTL Electromagnetic Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Electromagnetic Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Electromagnetic Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Router

FCC ID...... 2AA6ZCR1

Trade Mark N/A

Model/Type reference CR1

802.11n(40MHz):2422~2452

Data Rate...... 802.11b: 1/2/5.5/11 Mbps

802.11q: 6/9/12/18/24/36/48/54 Mbps

802.11n: up to 135 Mbps

Antenna Gain 2dBi

Antenna type Undetachable

Result..... Positive

V1.0 Page 2 of 23 Report No.: CTL1308301369-WD

TEST REPORT

Test Report No. :	CTL1308301369-WD	Sept. 06, 2013
	C1E1300301309-WD	Date of issue

Equipment under Test : Router

Model /Type : CR1

Applicant CaptionCall, LLC

Address : 4215 South Riverboat Road, Salt Lake City, UTAH 84020.

USA.

Manufacturer SHENZHEN MTN ELECTRONICS CO.,LTD.

Address MTN Industrial Park, NO.3 Fuhua Road, Pingxi

Neighborhood, Longgang District, Shenzhen, China

Test Result according to the standards on page 5:	Positive	
---	----------	--

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

Report No.: CTL1308301369-WD

1. TEST STANDARDS	<u>4</u>
2. SUMMARY	
2.1. General Remarks	
2.2. Equipment Under Test	
2.3. Short description of the Equipment under Test (EUT)	
2.4. EUT operation mode	
2.5. EUT configuration	
2.6. Related Submittal(s) / Grant (s)	
2.7. Modifications	6
2 TEST ENVIRONMENT	7
3. TEST ENVIRONMENT	<u></u>
3.1. Address of the test laboratory	7
3.2. Test Facility	7
3.3. Environmental conditions	
3.4. Configuration of Tested System	
3.5. Statement of the measurement uncertainty	8
3.6 Equipments Used during the Test	8
3.6. Equipments Used during the Test	9
3.8. Test Software	Q
3.0. Test Gottware	
4. TEST CONDITIONS AND RESULTS	<u></u>
4.1. Conducted Emissions Test	40
4.1. Conducted Emissions Test	10
4.2. Radiated Emissions Test	
5. TEST SETUP PHOTOS OF THE EUT	
The state of the s	
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	4.0
U. EXIERNAL AND INTERNAL PROTUG OF THE EUT	<u>19</u>
"omagnetic"	
ridgilo	

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Part 15B: Unintentional Radiators

ANCI C63.4: 2003



V1.0 Page 5 of 23 Report No.: CTL1308301369-WD

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Aug. 30, 2013

Testing commenced on : Aug. 30, 2013

Testing concluded on : Sept. 06, 2013

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : ● 120V / 60 Hz o 115V / 60Hz

o 12 V DC o 24 V DC

o Other (specified in blank below)

2.3. Short description of the Equipment under Test (EUT)

The device is a Router.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

Test Mode:

1. The EUT has been tested under normal operating condition.

2. Test Mode:

Test Mode(TM)	Description	Remark		
1	Normal Working	Connect to PC		

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The following data show only with the worst case setup

The worst case of Y axis was reported.

Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

The worst case of AC Conducted Emission and Radiated Emission is mode 1; the test data of this mode was reported.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Network Cable	0.8	Unshielded	Without Core

- supplied by the manufacturer
- supplied by the lab

Notebook PC
 Manufacturer : lenovo

Model No.: E43L

V1.0 Page 6 of 23 Report No.: CTL1308301369-WD

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AA6ZCR1 filing to comply with of the FCC Part 15B Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.



V1.0 Report No.: CTL1308301369-WD Page 7 of 23

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Bontek Compliance Testing Laboratory Ltd 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 7631A

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2011.

FCC-Registration No.: 338263

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.


3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges

15-35 ° C Temperature: Humidity: 30-60 % nagnetic Techni 950-1050mbar Atmospheric pressure:

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

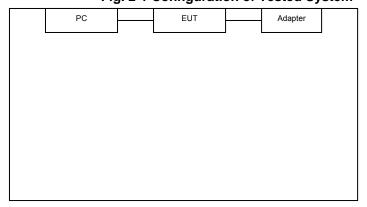

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Bontek Compliance Testing Laboratory Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Bontek laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Last Cal.	Due. Date
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	2013/04/14	2014/04/13
2	Radio Communication Tester	ROHDE & SCHWARZ	CMU200	2013/04/14	2014/04/13
3	Dual Directional Coupler	Agilent	778D	2013/04/14	2014/04/13
4	10dB attenuator	SCHWARZBECK	MTAIMP-136	2013/04/14	2014/04/13
5	Tunable Bandreject filter	K&L	3TNF-800	2013/04/14	2014/04/13
6	Tunable Bandreject filter	K&L	5TNF-1700	2013/04/14	2014/04/13
7	High-Pass Filter	K&L	9SH10- 2700/X12750- O/O	2013/04/14	2014/04/13
8	High-Pass Filter	K&L	41H10- 1375/U12750- O/O	2013/04/14	2014/04/13
9	Coaxial Cable	Huber+Suhner	AC4-RF-H	2013/04/14	2014/04/13
10	AC Power Supply	IDRC	CF-500TP	2013/04/14	2014/04/13
11	DC Power Supply	IDRC	CD-035-020PR	2013/04/14	2014/04/13
12	RF Current Probe	FCC	F-33-4	2013/04/14	2014/04/13
13	Temperature /Humidity Meter	zhicheng	ZC1-2	2013/04/14	2014/04/13
14	MICROWAVE AMPLIFIER	HP	8349B	2013/04/14	2014/04/13
15	Amplifier	HP	8447D	2013/04/14	2014/04/13
16	SIGNAL GENERATOR	HP	8647A	2013/04/14	2014/04/13
17	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	2013/04/14	2014/04/13
18	Horn Antenna	Schwarzbeck	BBHA9120A	2013/04/14	2014/04/13
19	EMI Test Receiver	R&S	ESPI	2013/04/14	2014/04/13
20	Loop Antenna	ZHINAN	ZN30900A	2013/04/14	2014/04/13
21	Horn Antenna	Schwarzbeck	BBHA9120D	2013/04/14	2014/04/13
22	Horn Antenna	Schwarzbeck	BBHA9170	2013/04/14	2014/04/13

3.7. Summary of Test Result

No deviations from the test standards

Test Item	Test Requirement	Standard Paragraph	Result
Radiated Emission	FCC PART 15	Section 15.109	PASS
Conducted Emission	FCC PART 15	Section 15.107	PASS

3.8. Test Software

No software was uesd during the tests.




V1.0 Page 10 of 23 Report No.: CTL1308301369-WD

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

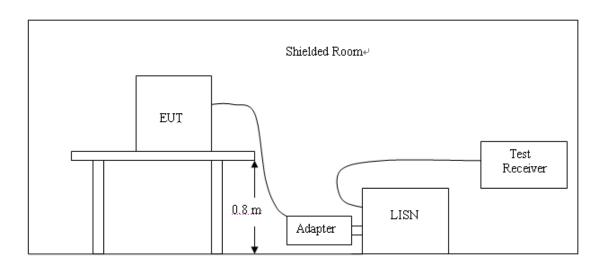

TEST PROCEDURE

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage (dΒμν)					
	CLA	SS A	CLASS B			
(···· i=)	Q.P.	Ave.	Q.P.	Ave.		
0.15 - 0.50	79	66	66-56*	56-46*		
0.50 - 5.00	73	60	56	46		
5.00 - 30.0	73	60	60	50		

^{*} Decreasing linearly with the logarithm of the frequency


For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

- 1. Please follow the guidelines in ANSI C63.4-2003.
- 2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 4. All the support units are connecting to the other LISN.
- 5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 7. Both sides of AC line were checked for maximum conducted interference.
- 8. The frequency range from 150 kHz to 30 MHz was searched.
- 9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

The RBW/VBW for 150KHz to 30MHz: 9KHz

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M)FIN" Short Description: 150K-30M Voltage

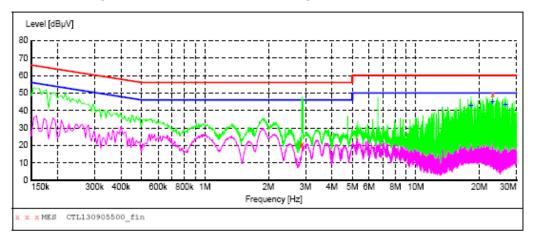


MEASUREMENT RESULT: "CTL130905500_fin"

9/5/2013	4:31PM	I						
Freque	ency MHz	Level :	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
2.859	9000	19.80	9.9	56	36.2	QP	Ll	GND
2.886	6000	20.70	9.9	56	35.3	QP	Ll	GND
23.127	7000	49.20	10.4	60	10.8	QP	Ll	GND

MEASUREMENT RESULT: "CTL130905500_fin2"

9/5/2013 4:31 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
18.244500 23.127000 26.610000	43.10 45.50 43.40	10.4 10.4 10.5	50 50 50	6.9 4.5 6.6		L1 L1 L1	GND GND GND
	3	Pi	3/10	<u> </u>		1	50
	1.	1000			70	Chil	
		011	om	agne	etic '		

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

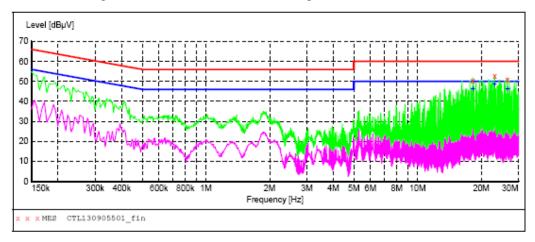

MEASUREMENT RESULT: "CTL130905501_fin"

9/5/	2013 4:35	PM						
F	requency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
1	8.244500	50.40	10.4	60	9.6	QP	N	GND
2	3.127000	52.60	10.4	60	7.4	QP	N	GND
2	6.610000	50.70	10.5	60	9.3	QP	N	GND

MEASUREMENT RESULT: "CTL130905501 fin2"


9/5/2013 4:3 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
18.244500 23.127000 26.610000	46.50 48.80 46.60	10.4 10.4 10.5	50 50 50	3.5 1.2 3.4	AV	NNN	GND GND GND	

V1.0 Page 13 of 23 Report No.: CTL1308301369-WD


4.2. Radiated Emissions Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

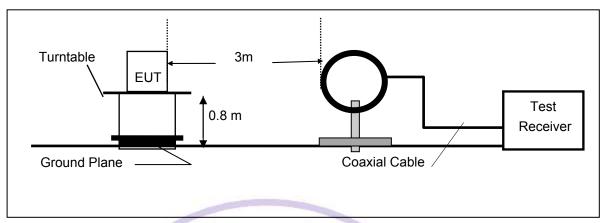

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

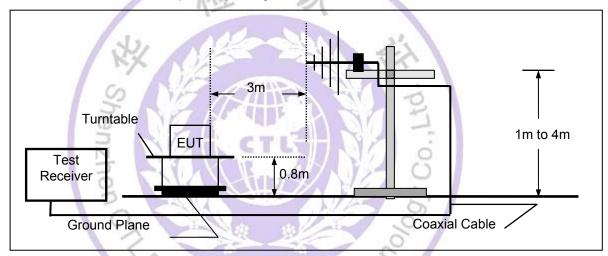

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

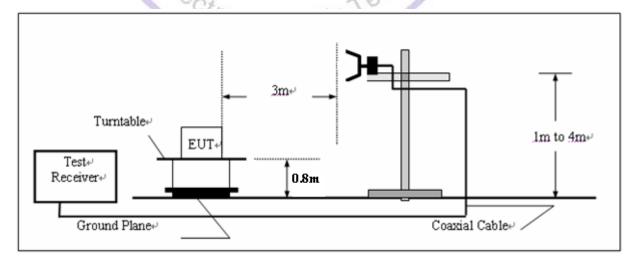

LIMIT

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)		
0.009 - 0.490	2400/F(kHz)	300		
0.490 - 1.705	24000/F(kHz)	30		
1.705 – 30.0	30	30		
30 – 88	100	3		
88 – 216	150	3		
216 - 960	200	3		
Above 960	500	3		

FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	


TEST PROCEDURE

- 1. The testing follows the guidelines in ANSI C63.4-2003.
- 2. The EUT was placed on a turn table which is 0.8m above ground plane.
- 3. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° C to 360°C to acquire the highest emissions from EUT
- 4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5. Repeat above procedures until all frequency measurements have been completed.
- 6. Based on the Frequency Generator in the device include 40MHz, the frequency of processor is 360MHz, so the test frequency range from 9KHz to 4GHz per FCC PART 15.33(a) and 1.33(b)(1).

TEST RESULTS

SWEEP TABLE: "test (30M-1G)"
Short Description: Field Strength
Start Stop Detector Meas. IF Transducer


Start Stop Detector Meas. IF Train Frequency Frequency Time Bandw.
30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

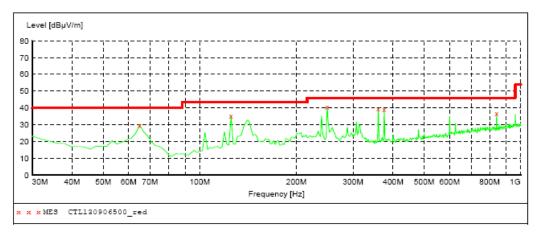


MEASUREMENT RESULT: "CTL130906500 red"

9/6/2013 8:54	MA							
Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
64.920000	29.80	8.4	40.0	10.2		0.0	0.00	HORIZONTAL
125.060000	35.20	15.0	43.5	8.3		0.0	0.00	HORIZONTAL
249.220000	40.80	14.1	46.0	5.2		0.0	0.00	HORIZONTAL
359.800000	39.60	17.3	46.0	6.4		0.0	0.00	HORIZONTAL
375.320000	39.00	17.7	46.0	7.0		0.0	0.00	HORIZONTAL
840.920000	36.70	25.2	46.0	9.3		0.0	0.00	HORIZONTAL

The Carronagnetic Technology



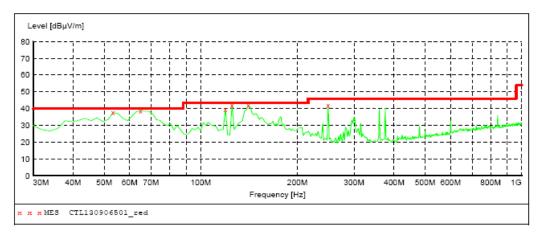

MEASUREMENT RESULT: "CTL130906501_red"

9/6/2013 8:	59AM							
Frequency MHz		Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	37.70	8.3	40.0	2.3		0.0	0.00	VERTICAL
64.920000	38.60	8.4	40.0	1.4		0.0	0.00	VERTICAL
119.240000	39.60	15.2	43.5	3.9		0.0	0.00	VERTICAL
125.060000	42.30	15.0	43.5	1.2		0.0	0.00	VERTICAL
140.580000	41.80	14.6	43.5	1.7		0.0	0.00	VERTICAL
249.220000	42.30	14.1	46.0	3.7		0.0	0.00	VERTICAL
	The state of the s		AND AND ADDRESS.	AND REAL PROPERTY.	400.7	- TO 117	200	

Remark:

- (1) Measuring frequencies from 9 KHz to the 4GHz, Loop Antenna used below 30MHz. See Section 3.6 table item 20. Radiated emission test from 9KHz to 30MHz, above 1GHz were verified, and no any emission was found except system noise floor.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Datas of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The test results from 9KHz to 30MHz, above 1GHz are not reported because the emissions levels that are 20dB below the official limit.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 100KHz. Below 30MHz was 10KHz. Above 1GHz was 1MHz.

V1.0 Page 17 of 23 Report No.: CTL1308301369-WD

5. Test Setup Photos of the EUT











V1.0 Page 19 of 23 Report No.: CTL1308301369-WD

6. External and Internal Photos of the EUT

External Photos of EUT















V1.0 Page 22 of 23 Report No.: CTL1308301369-WD

Internal Photos of EUT









