



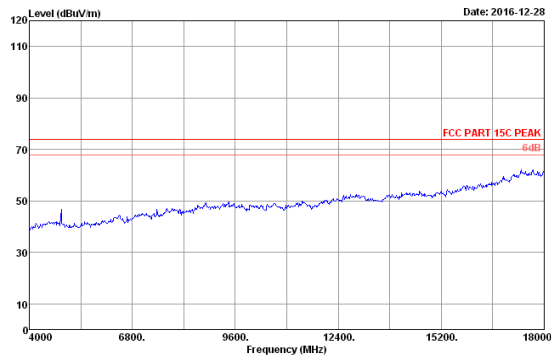


Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx Mode
 N/N:CR2

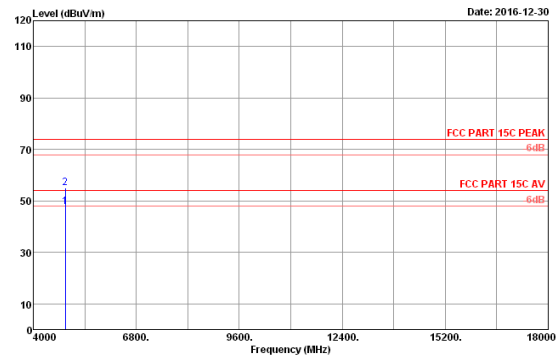


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	39.04	35.69	47.80	54.00	6.20	Average
2	4874.00	32.65	11.80	46.15	35.69	54.81	74.00	19.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Ant Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

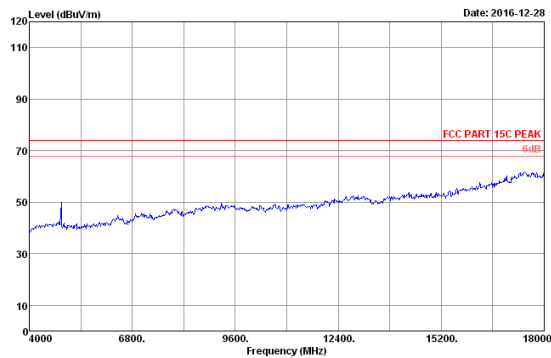


Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx Mode
 N/N:CR2

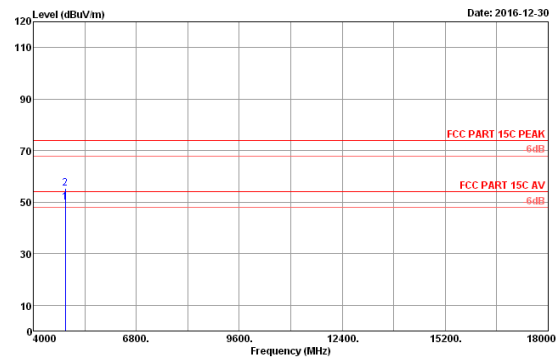

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	41.15	35.69	49.81	54.00	4.09	Average
2	4874.00	32.65	11.80	46.67	35.69	55.43	74.00	18.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Ant Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

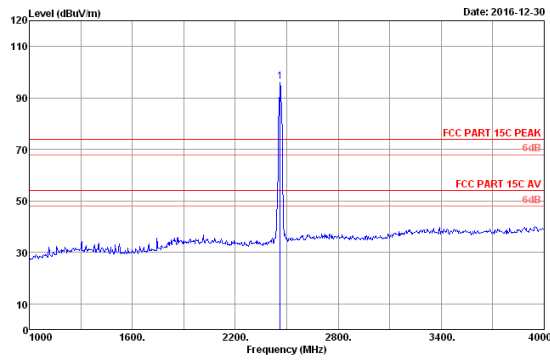

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	96.14	36.38	96.40	74.00	-22.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

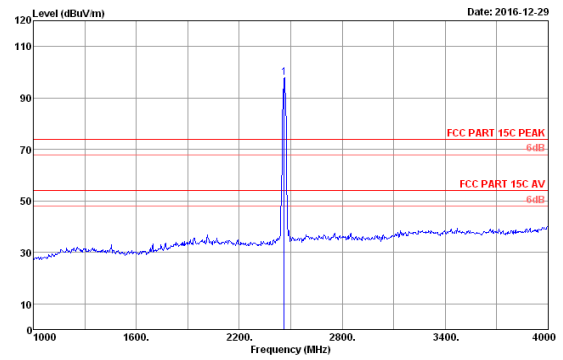

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	97.51	36.38	97.77	74.00	-23.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

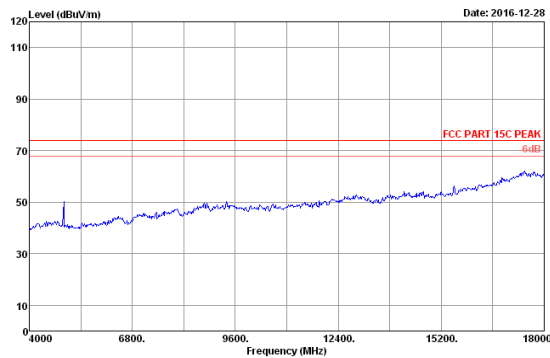

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	41.85	35.70	50.53	54.00	3.47	Average
2	4924.00	32.55	11.83	46.35	35.70	55.03	74.00	18.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

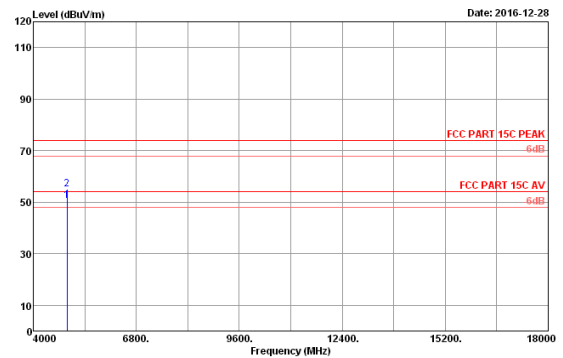


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	41.85	35.70	50.53	54.00	3.47	Average
2	4924.00	32.55	11.83	46.35	35.70	55.03	74.00	18.97	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

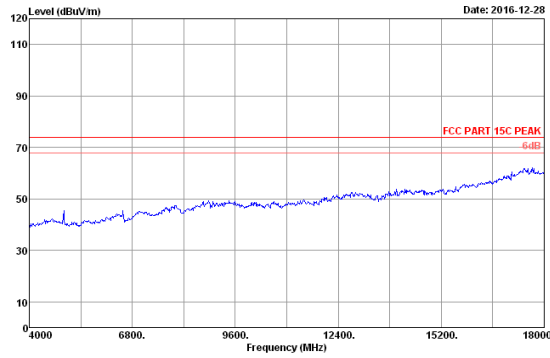


Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx Mode
 N/N:CR2

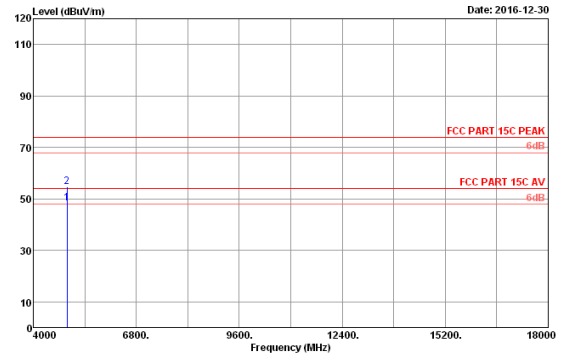

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	39.67	35.70	48.35	54.00	5.65	Average
2	4924.00	32.55	11.83	46.03	35.70	54.71	74.00	19.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

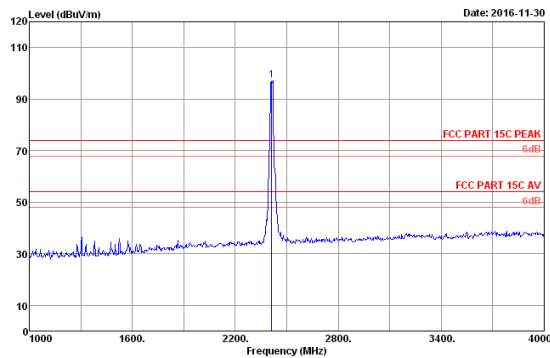

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.16	8.35	97.25	36.39	97.37	74.00	-23.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

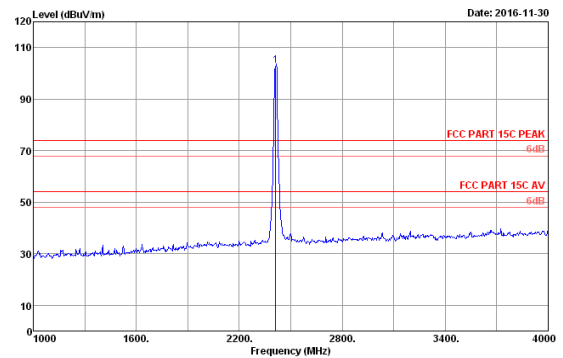


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.16	8.35	102.86	36.39	102.98	74.00	-28.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

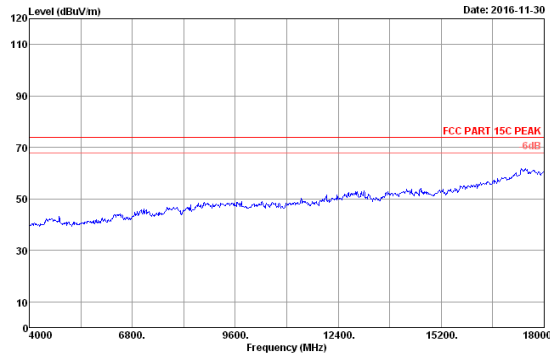


Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx Mode
 N/N:CR2

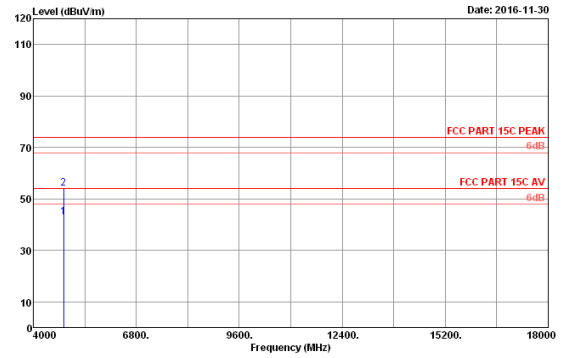


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.75	11.77	34.19	35.68	43.03	54.00	10.97	Average
2	4824.00	32.75	11.77	45.28	35.68	54.12	74.00	19.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Ant Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

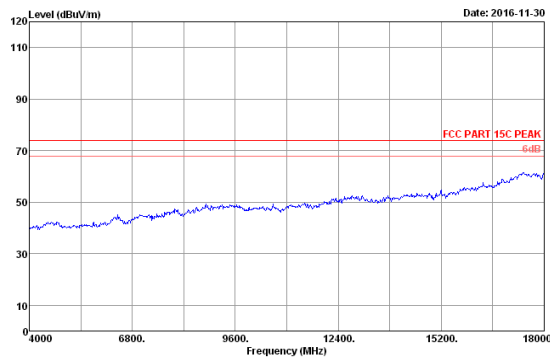


Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx Mode
 N/N:CR2

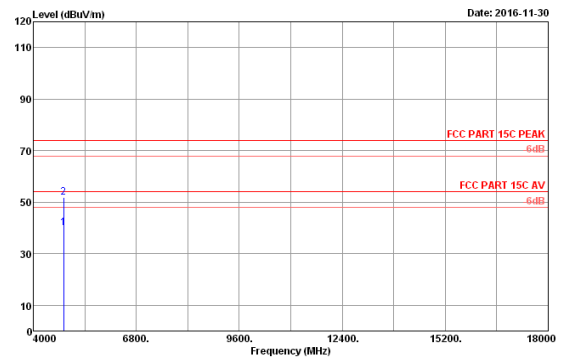

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.75	11.77	31.28	35.68	40.12	54.00	13.88	Average
2	4824.00	32.75	11.77	42.99	35.68	51.83	74.00	22.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Ant Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

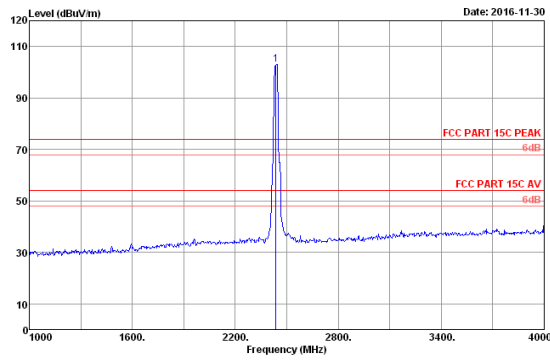

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	102.81	36.38	103.01	74.00	-29.01	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

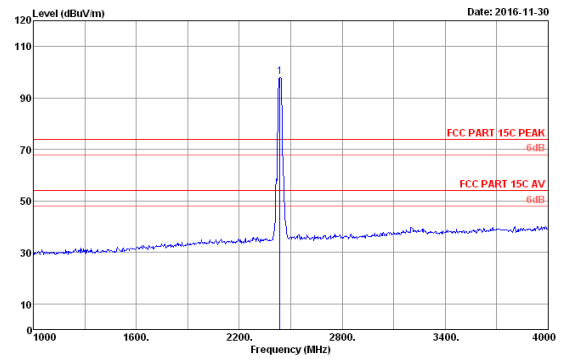


Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	98.04	36.38	98.24	74.00	-24.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

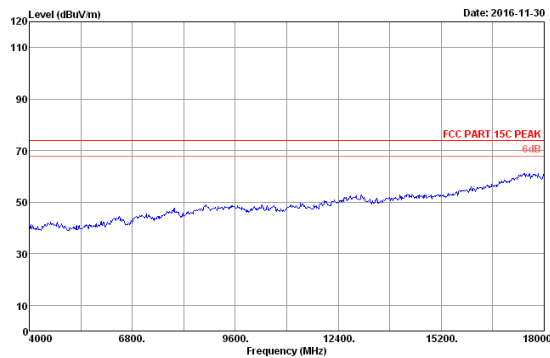


Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx Mode
 N/N:CR2

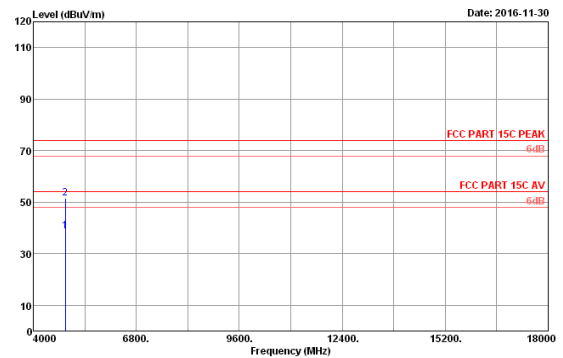


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	30.11	35.69	38.87	54.00	15.13	Average
2	4874.00	32.65	11.80	42.85	35.69	51.61	74.00	22.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

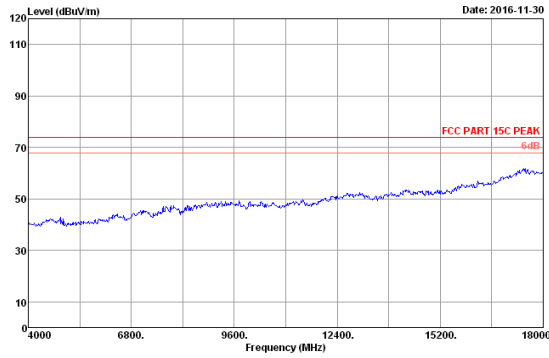


Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx Mode
 N/N:CR2

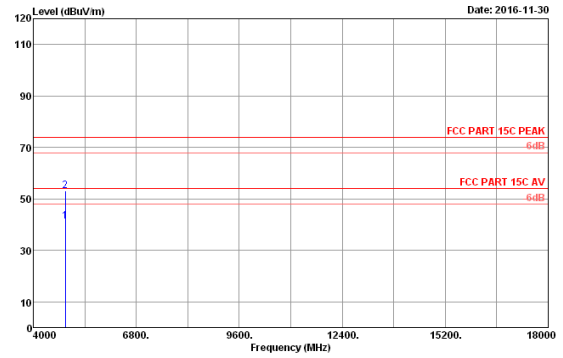

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	32.68	35.69	41.34	54.00	12.66	Average
2	4874.00	32.65	11.80	44.38	35.69	53.14	74.00	20.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

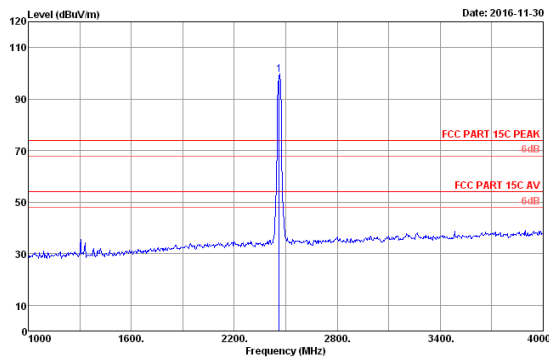

Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	99.15	36.38	99.41	74.00	-25.41	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

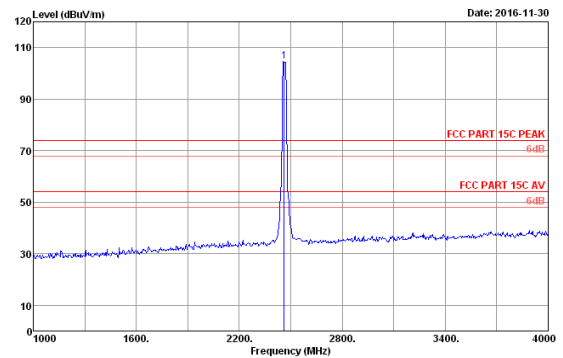


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	104.52	36.38	104.78	74.00	-30.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

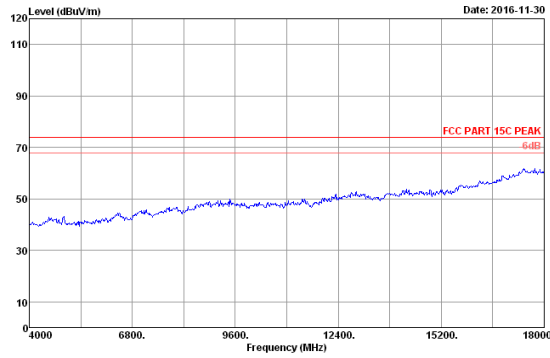


Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx Mode
 N/N:CR2

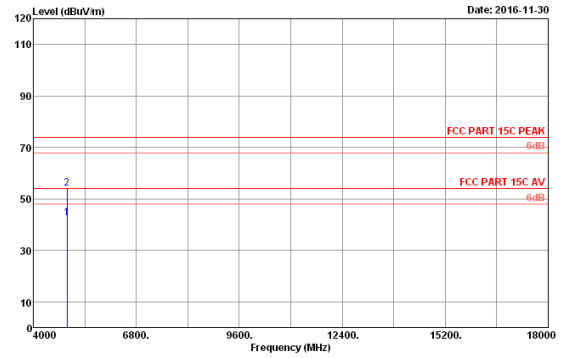


Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	33.89	35.70	42.57	54.00	11.43	Average
2	4924.00	32.55	11.83	45.54	35.70	54.22	74.00	19.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

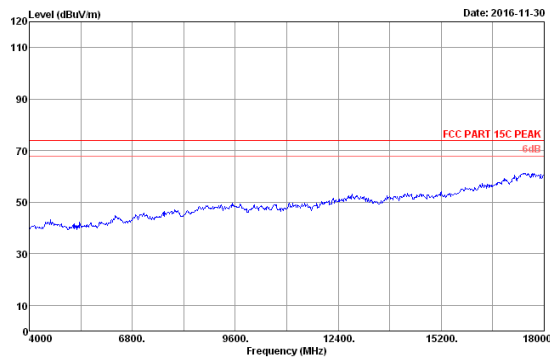


Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx Mode
 N/N:CR2

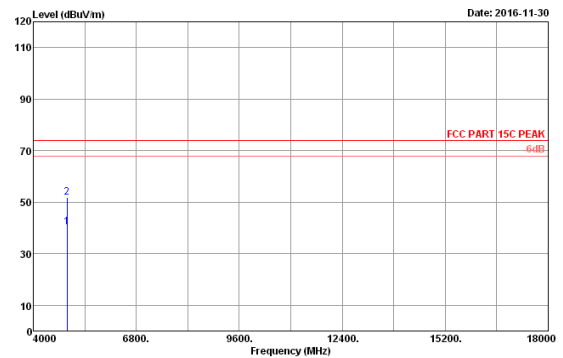

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	31.55	35.70	40.23	74.00	33.77	Average
2	4924.00	32.55	11.83	43.24	35.70	51.92	74.00	22.08	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

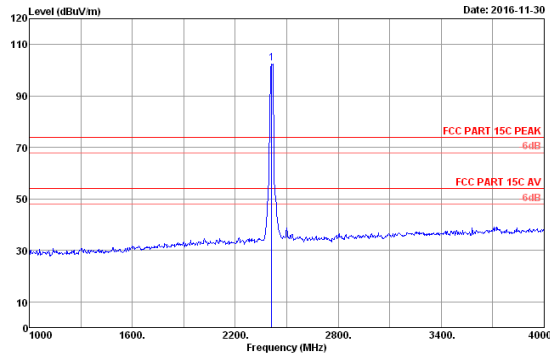

Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.16	8.35	102.65	36.39	102.67	74.00	-28.67	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

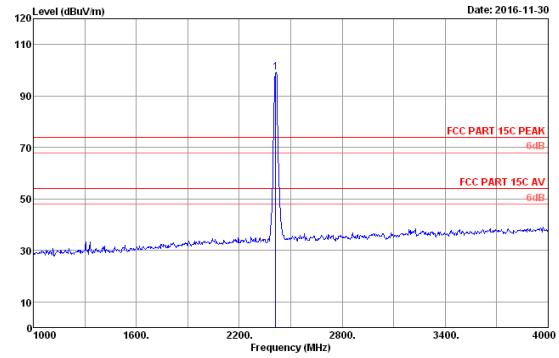


Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.16	8.35	99.14	36.39	99.26	74.00	-25.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

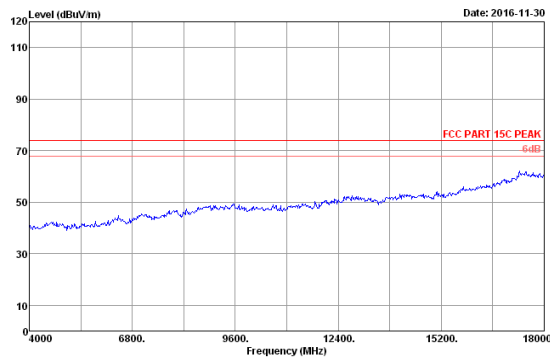


Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx Mode
 N/N:CR2

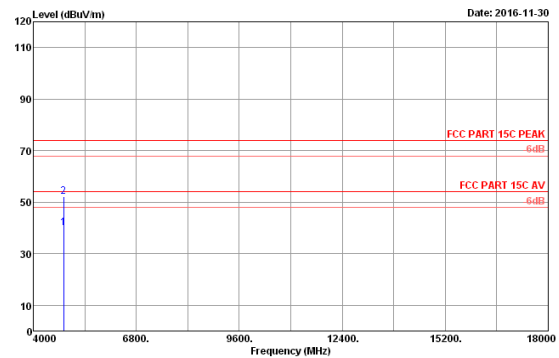


Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.75	11.77	31.27	35.68	40.11	54.00	13.89	Average
2	4824.00	32.75	11.77	43.17	35.68	52.01	74.00	21.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

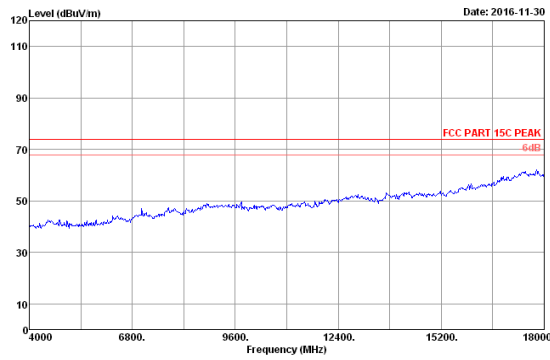


Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx Mode
 N/N:CR2

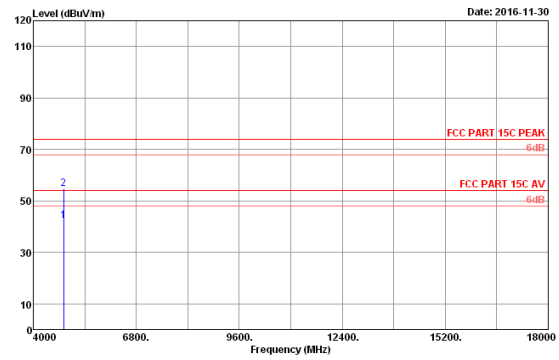

Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.75	11.77	33.28	35.68	42.12	54.00	11.88	Average
2	4824.00	32.75	11.77	45.74	35.68	54.68	74.00	19.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

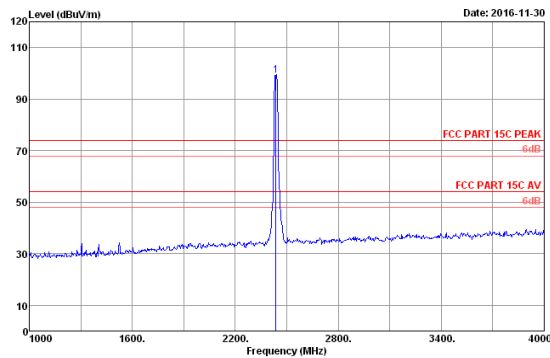

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	99.10	36.38	99.30	74.00	-25.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

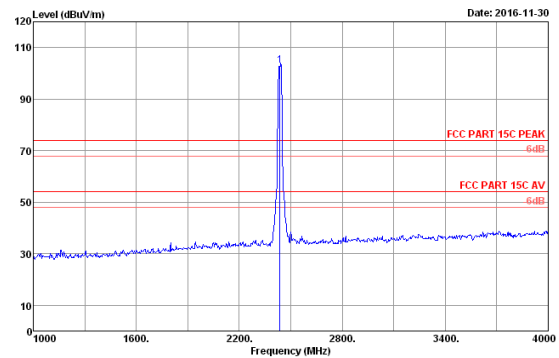


Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	102.87	36.38	103.07	74.00	-29.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

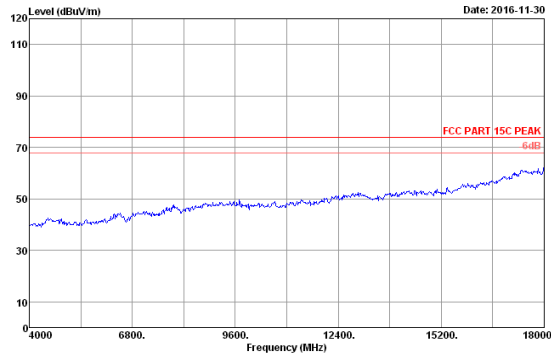


Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx Mode
 N/N:CR2

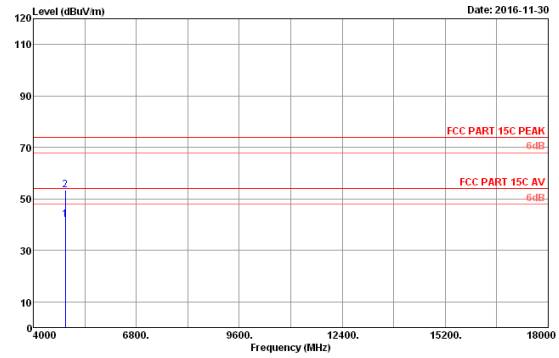


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	33.24	35.69	42.00	54.00	12.00	Average
2	4874.00	32.65	11.80	44.57	35.69	53.33	74.00	20.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Ant Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

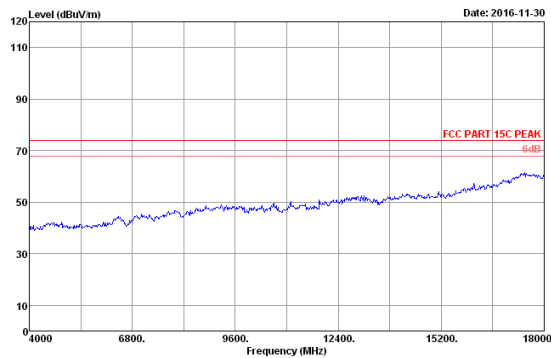


Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx Mode
 N/N:CR2

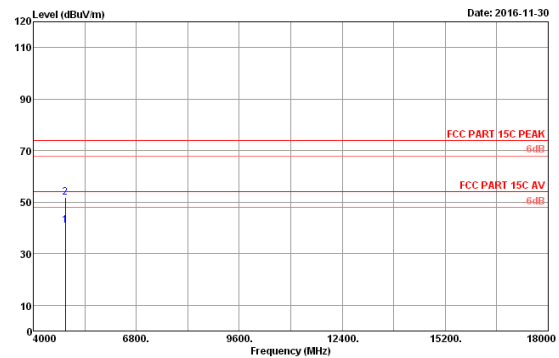

Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	32.14	35.69	40.90	54.00	13.10	Average
2	4874.00	32.65	11.80	43.15	35.69	51.91	74.00	22.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Ant Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

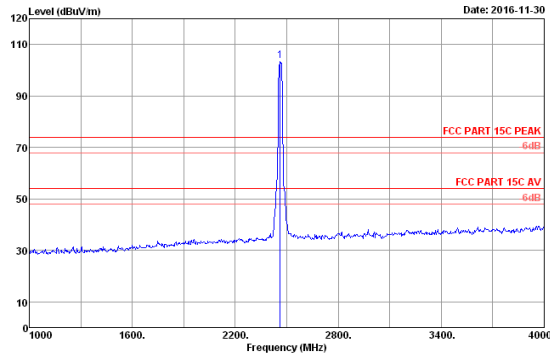

Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	103.47	36.38	103.73	74.00	-29.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

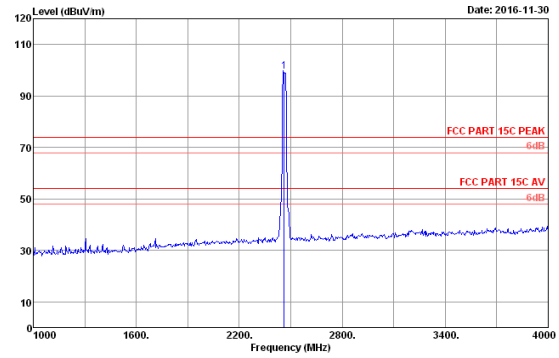


Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	99.18	36.38	99.44	74.00	-25.44	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

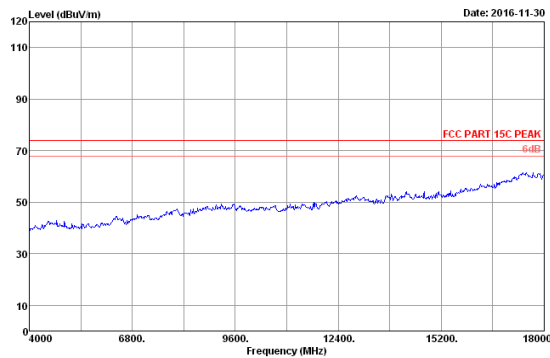


Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx Mode
 M/N:CR2

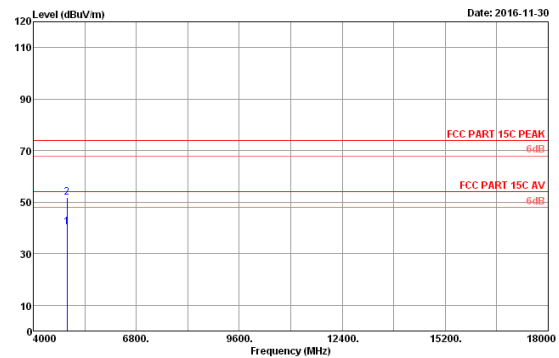


Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	31.56	35.70	40.24	54.00	13.76	Average
2	4924.00	32.55	11.83	43.12	35.70	51.80	74.00	22.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

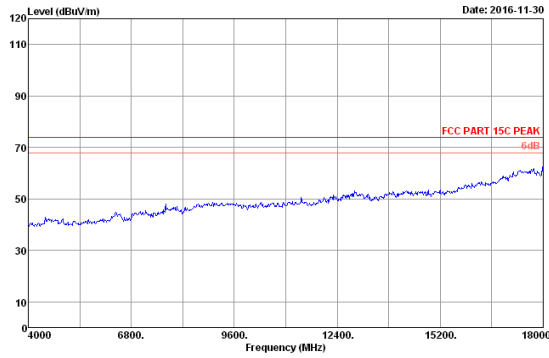


Site no. : 3m Chamber Data no. : T3
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx Mode
 N/N:CR2

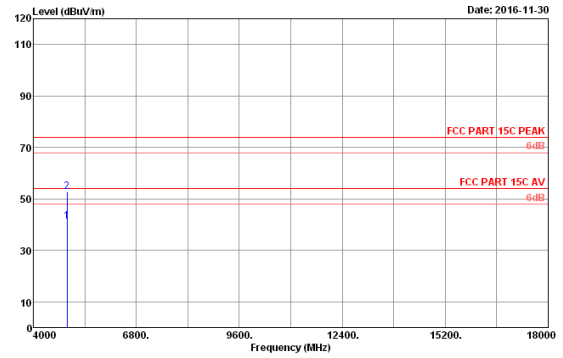

Site no. : 3m Chamber Data no. : T4
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	32.59	35.70	41.27	54.00	12.73	Average
2	4924.00	32.55	11.83	44.01	35.70	52.69	74.00	21.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

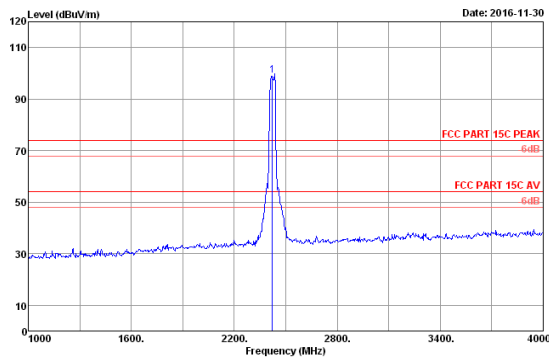

Site no. : 3m Chamber Data no. : T9
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	28.18	8.36	99.13	36.38	99.29	74.00	-25.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

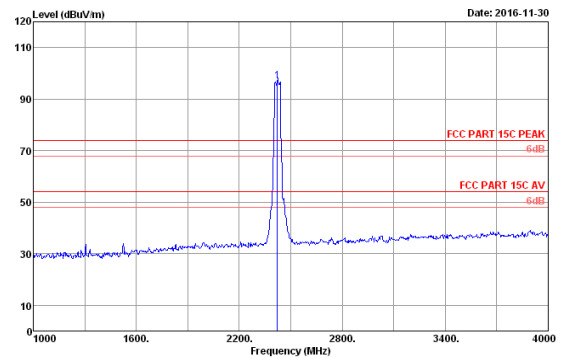


Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	28.18	8.36	96.80	36.38	96.96	74.00	-22.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

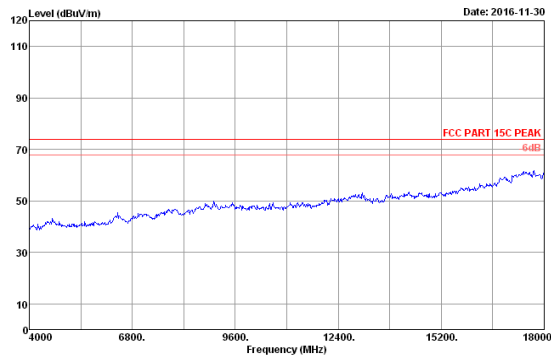


Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx Mode
 N/N:CR2

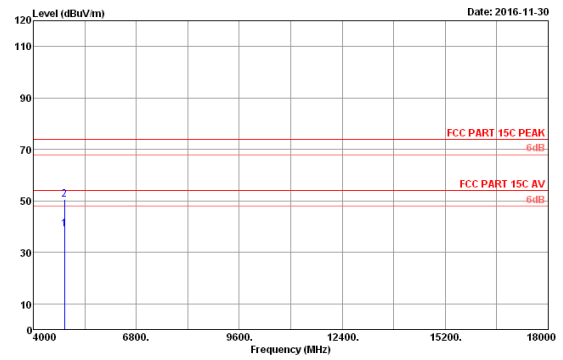


Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	32.71	11.78	30.26	35.68	39.06	54.00	14.94	Average
2	4844.00	32.71	11.78	41.64	35.68	50.45	74.00	23.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Ant Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

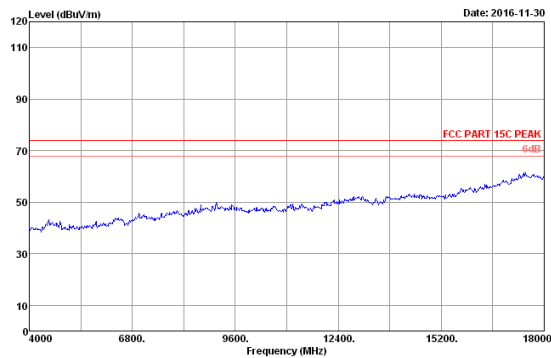


Site no. : 3m Chamber Data no. : 83
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx Mode
 N/N:CR2

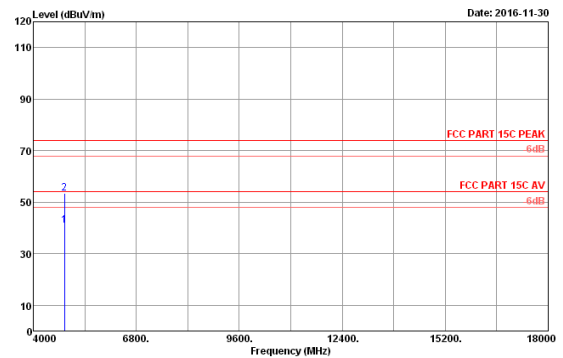

Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	32.71	11.78	32.14	35.68	40.95	54.00	13.05	Average
2	4844.00	32.71	11.78	44.55	35.68	53.36	74.00	20.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Ant Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

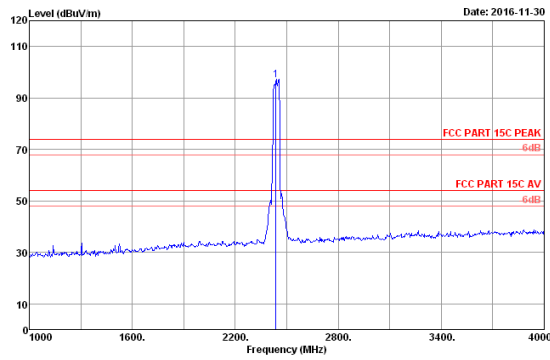

Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	96.84	36.38	97.04	74.00	-23.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

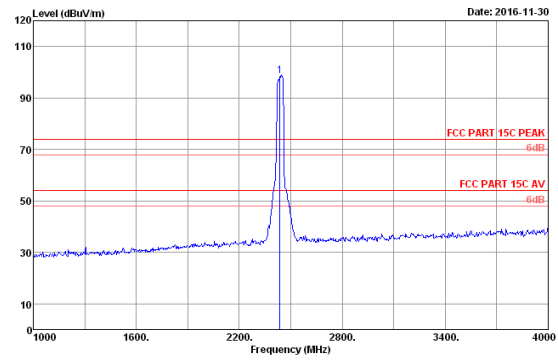


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	98.27	36.38	98.47	74.00	-24.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

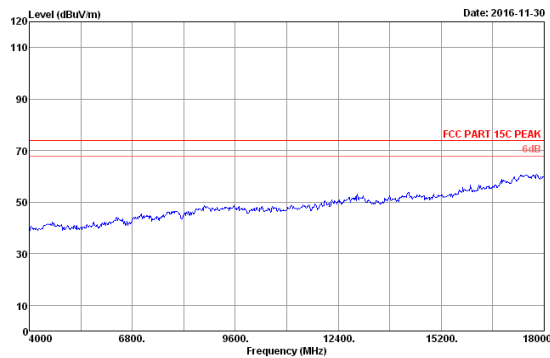


Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx Mode
 M/N:CR2

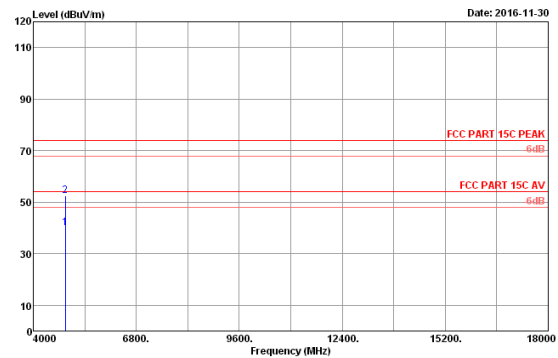


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	31.28	35.69	40.04	54.00	13.96	Average
2	4874.00	32.65	11.80	43.81	35.69	52.57	74.00	21.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

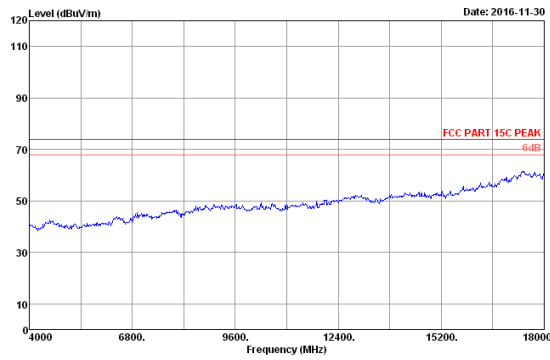


Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx Mode
 N/N:CR2

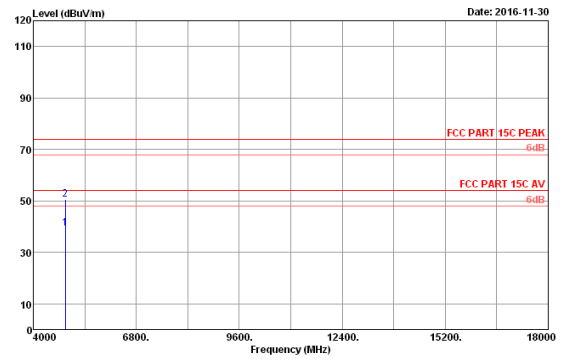

Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	30.51	35.69	39.27	54.00	14.73	Average
2	4874.00	32.65	11.80	41.74	35.69	50.50	74.00	23.50	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

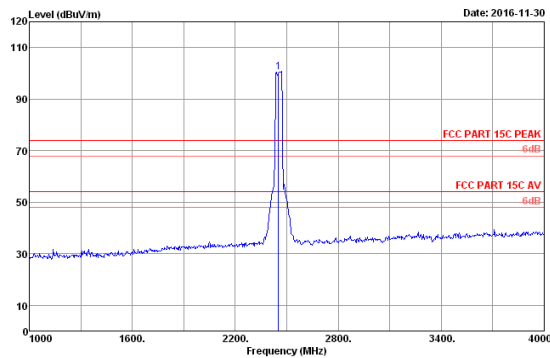

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	28.22	8.39	100.27	36.38	100.50	74.00	-26.50	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

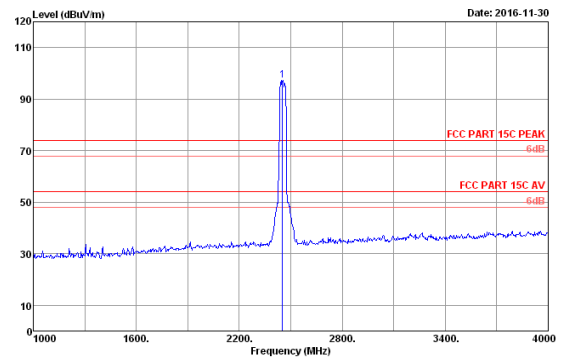


Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx Mode
 N/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	28.22	8.39	97.15	36.38	97.38	74.00	-23.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

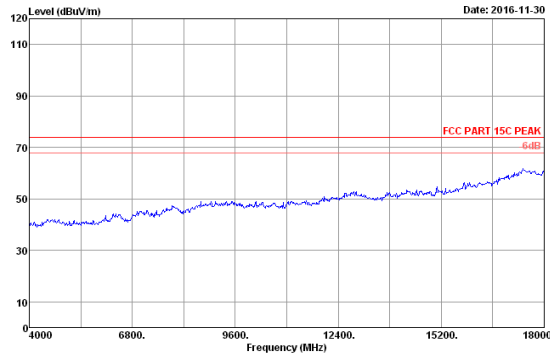


Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx Mode
 M/N:CR2

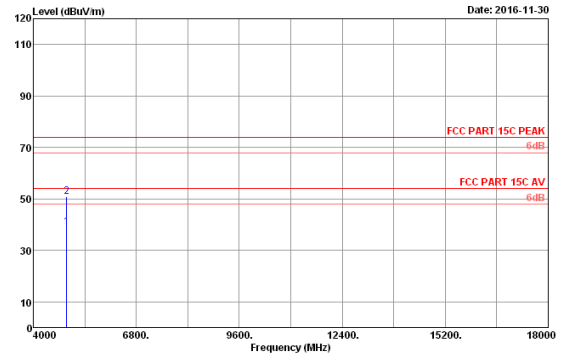


Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	32.59	11.82	30.28	35.70	38.99	54.00	15.01	Average
2	4904.00	32.59	11.82	42.04	35.70	50.75	74.00	23.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -AMP Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

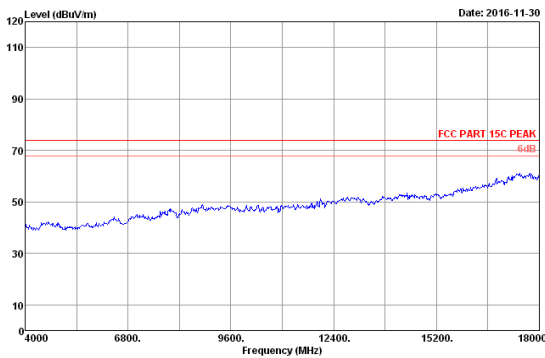

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx Mode
 M/N:CR2

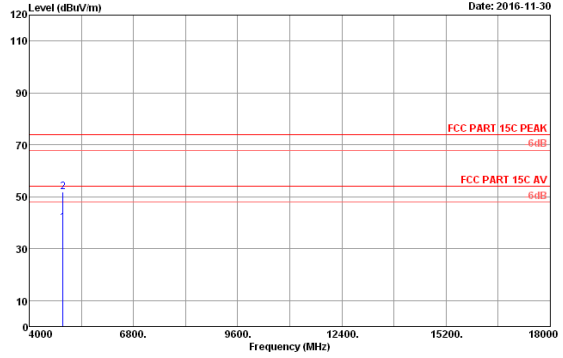

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	32.59	11.82	31.28	35.70	39.99	54.00	14.01	Average
2	4904.00	32.59	11.82	43.11	35.70	51.82	74.00	22.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -AMP Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	Apr.23,16	1 Year
3.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,16	1 Year

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions with peak detector.


5.4. Test result

PASS (The testing data was attached in the next pages.)





ANTA:


Test Mode: IEEE 802.11b

Test CH1: 2412MHz

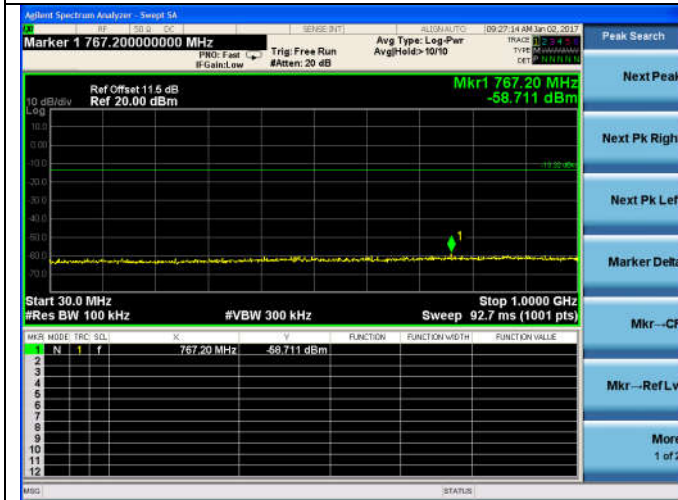


Test CH6: 2437MHz

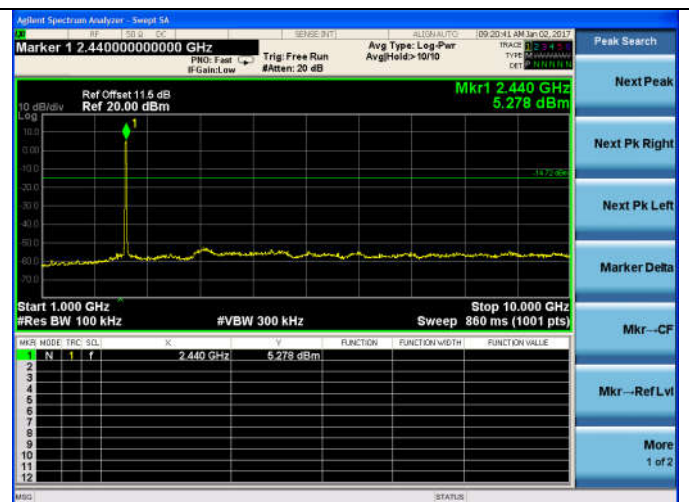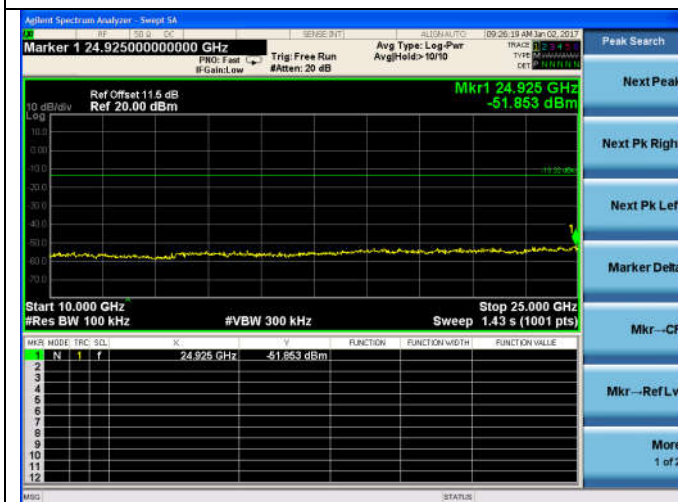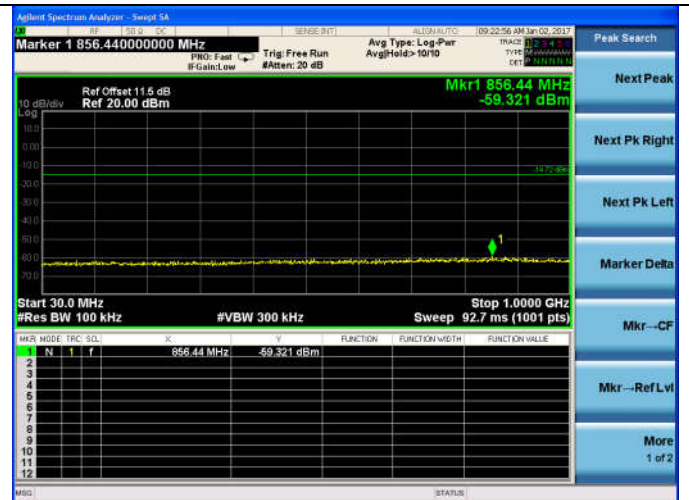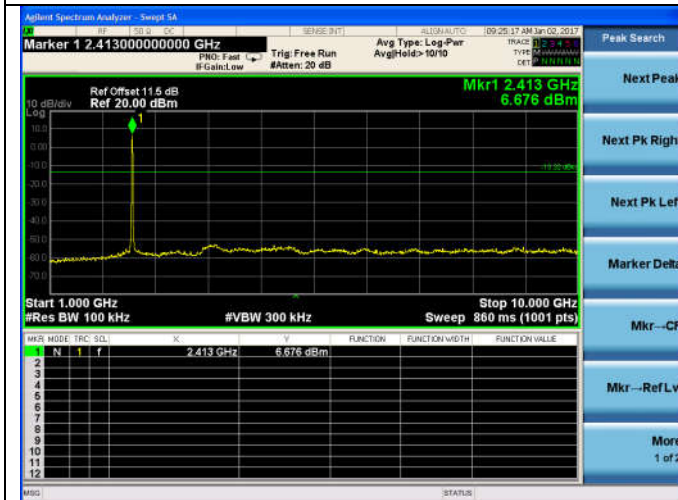


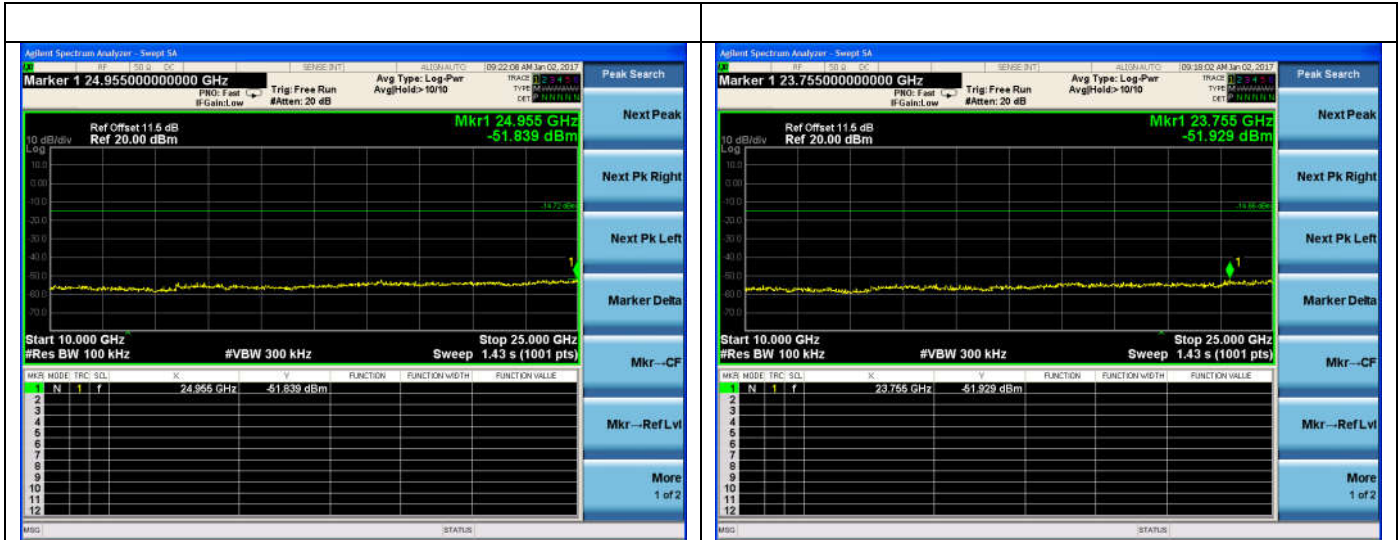






Test CH11: 2462MHz

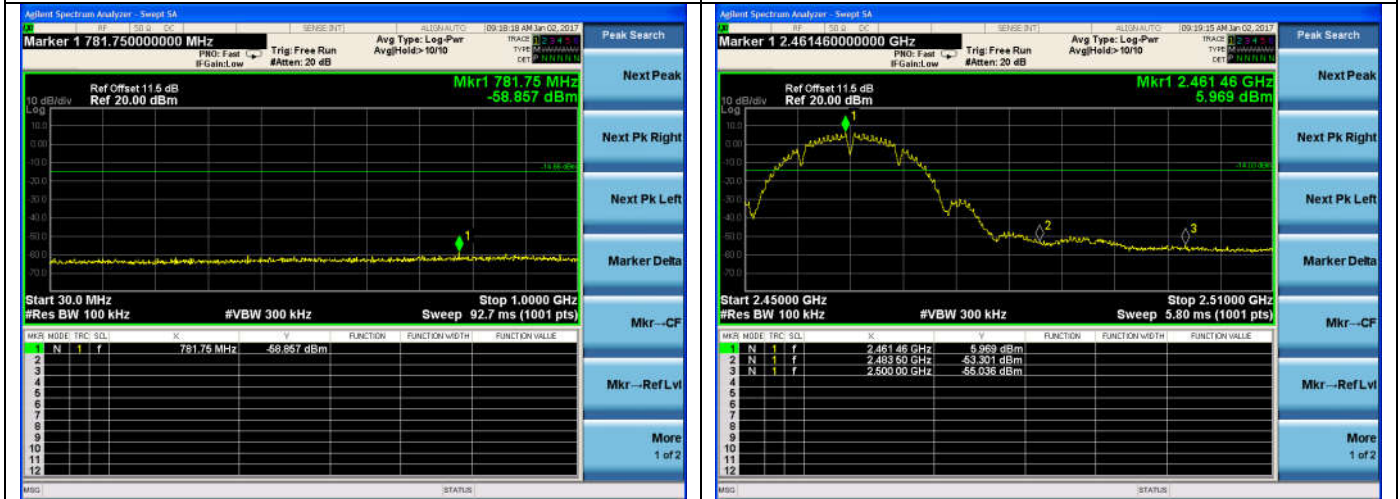






Test Mode: IEEE 802.11g Test CH1: 2412MHz

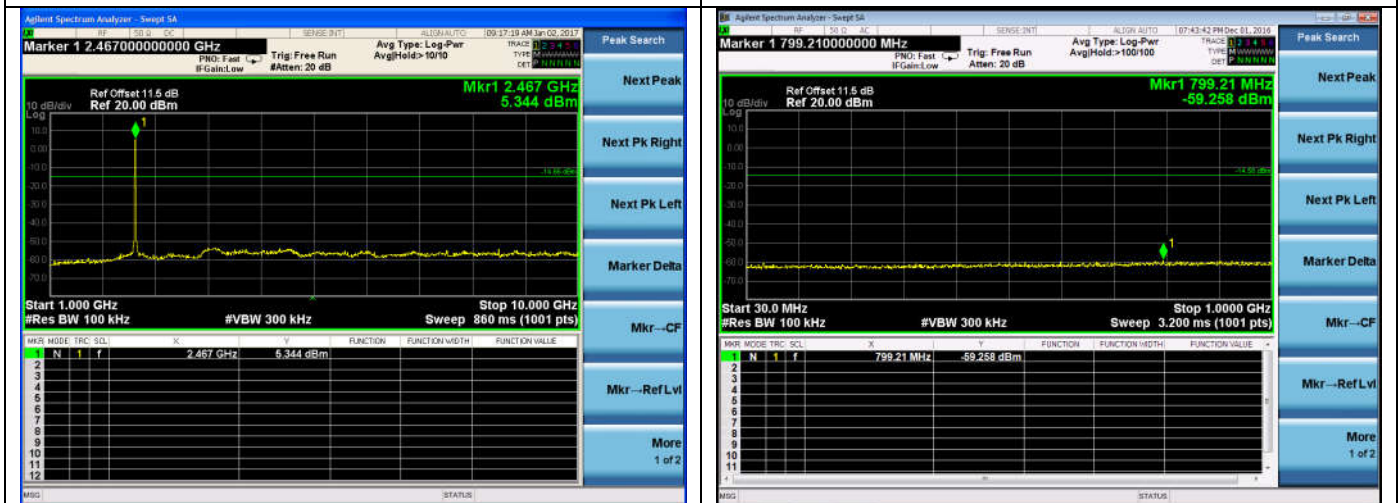

Test CH6: 2437MHz


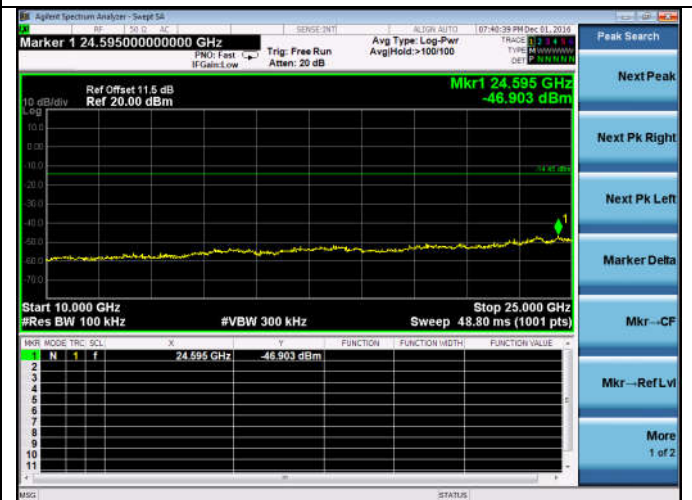
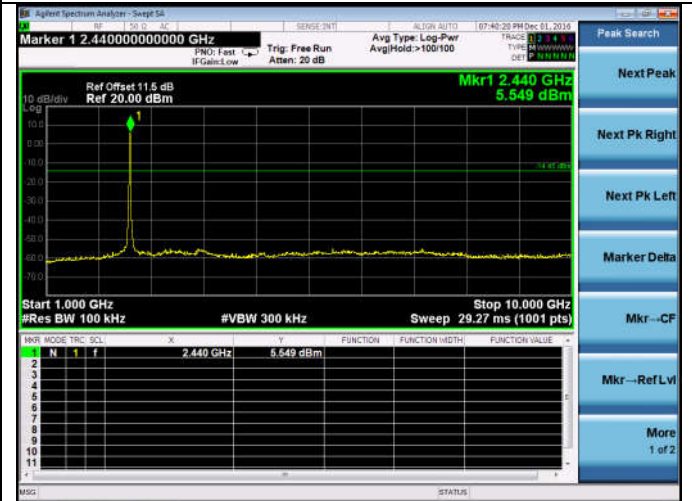
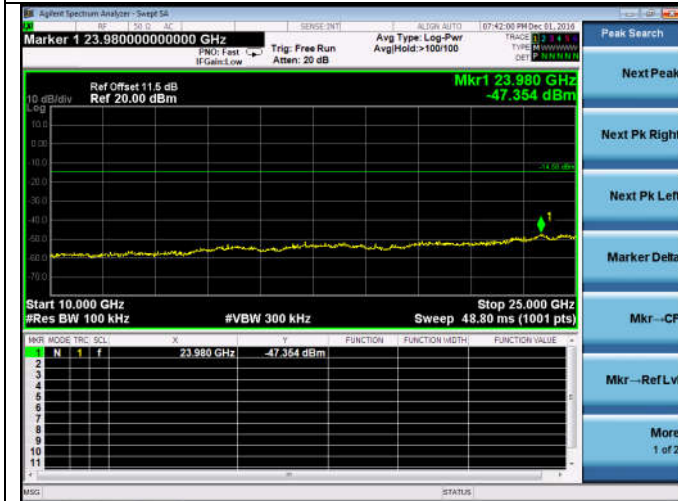
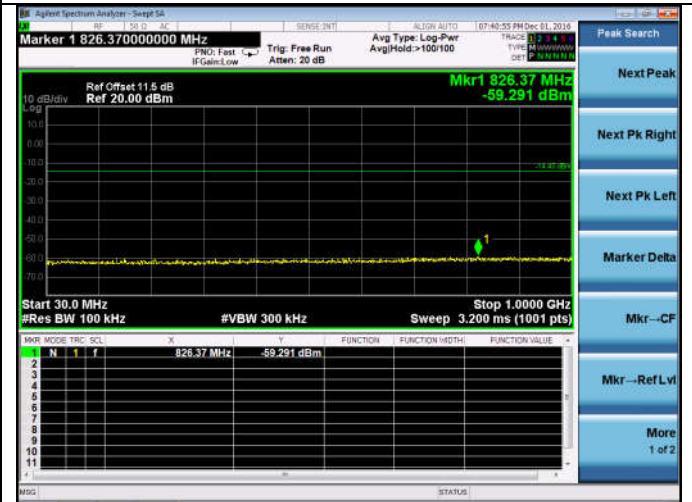
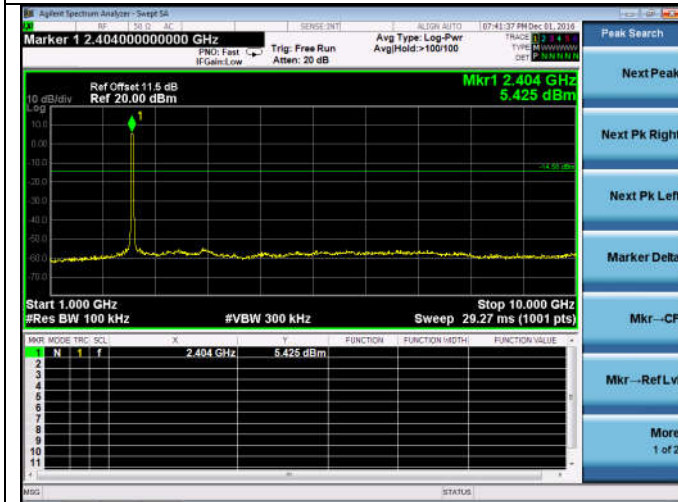


Test CH11: 2462MHz

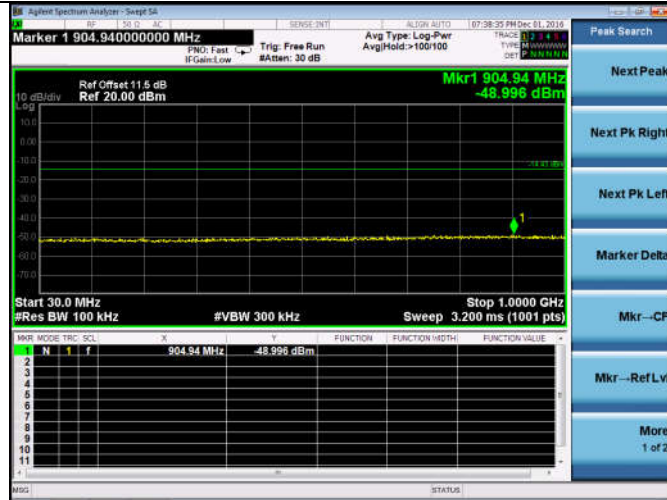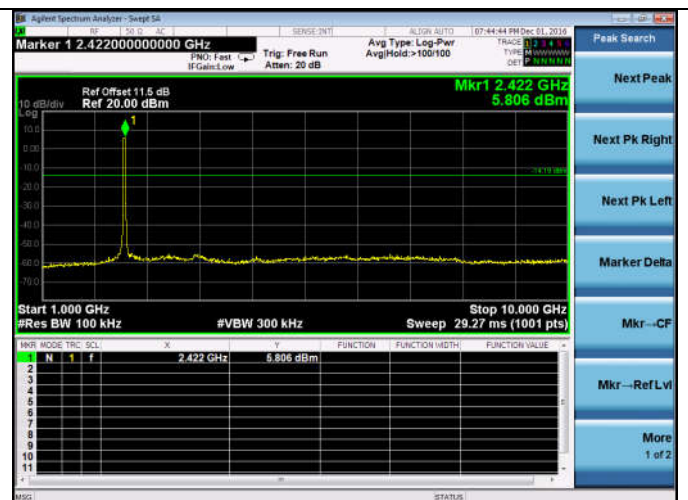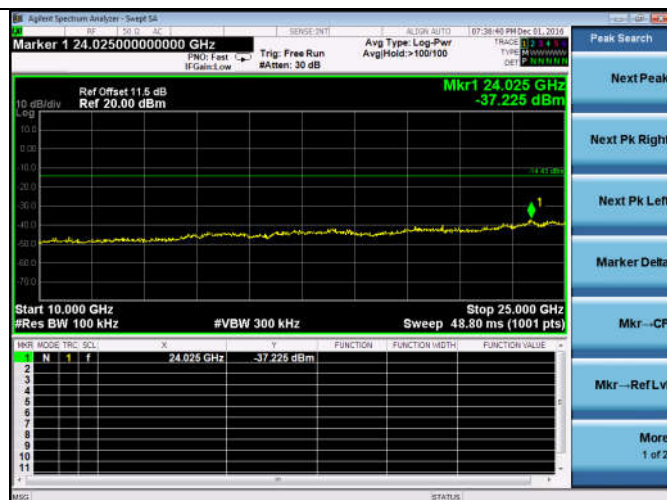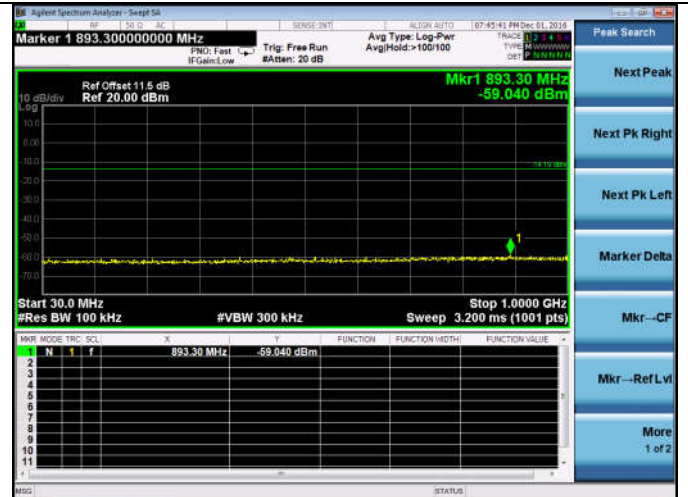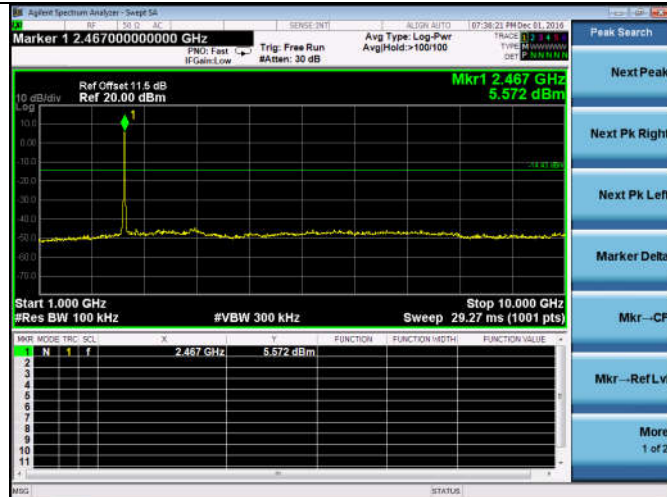
Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz


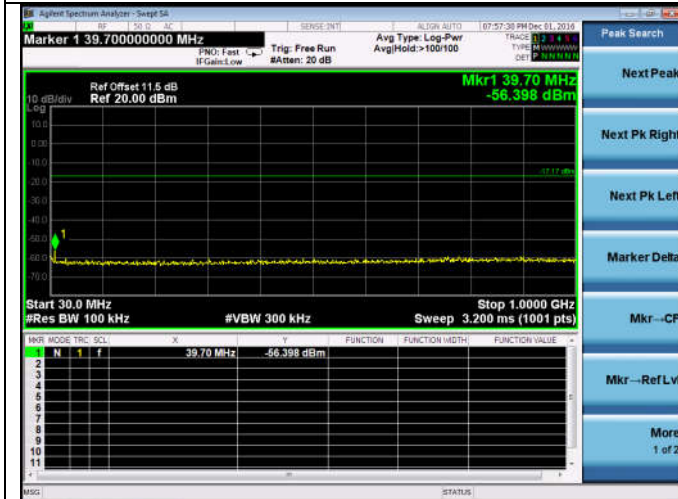


Test Mode: IEEE 802.11n HT40
Test CH3: 2422MHz

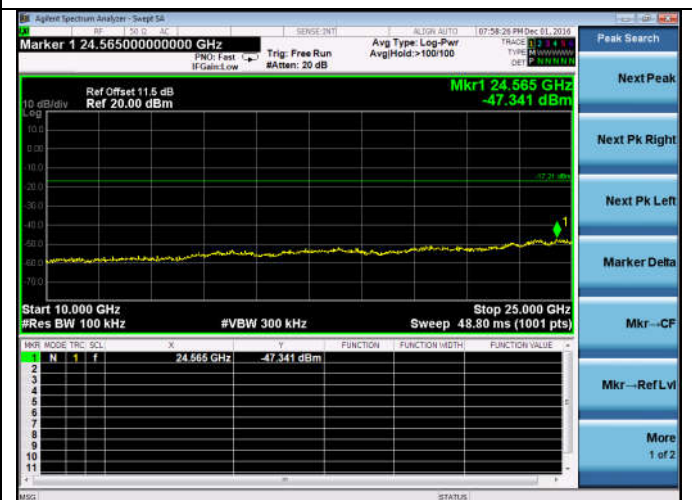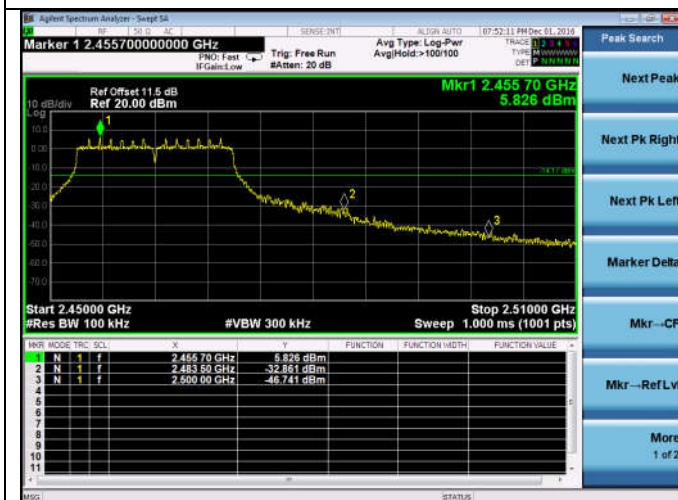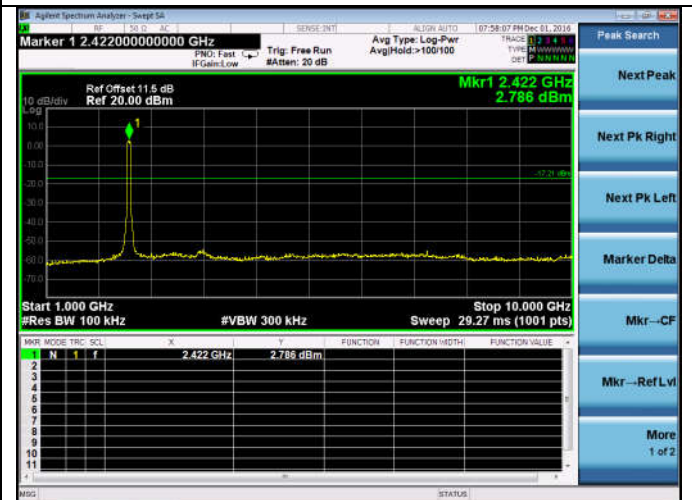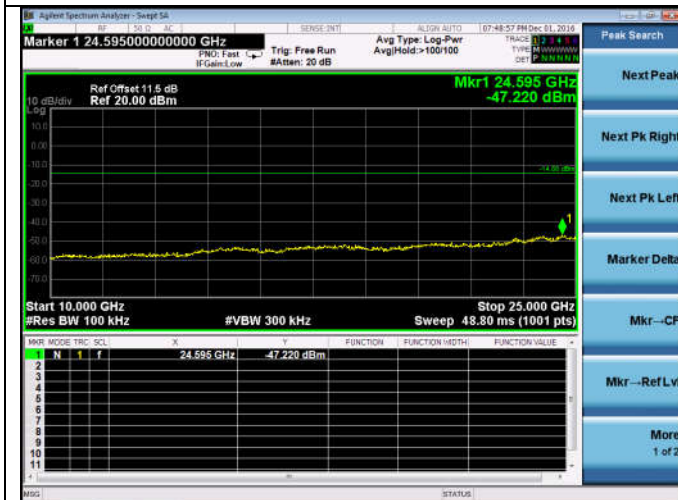
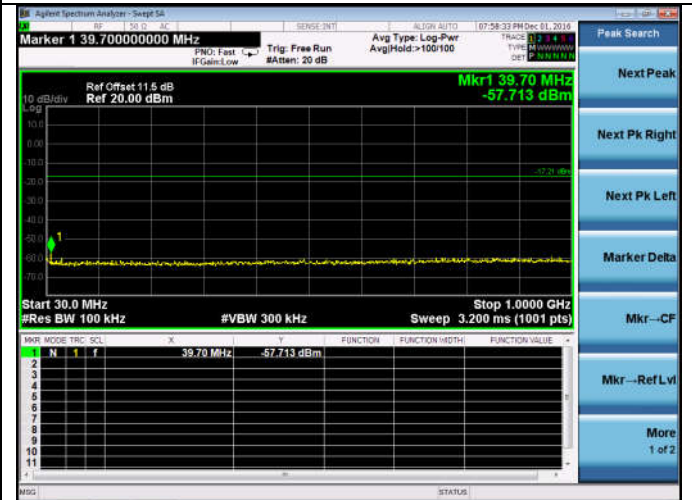
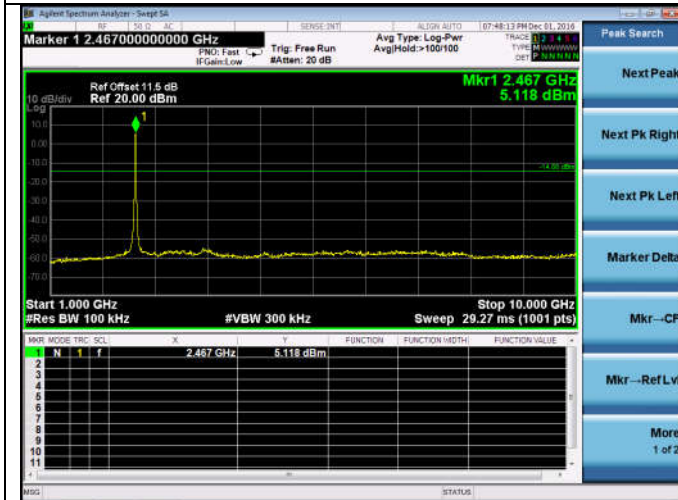





Test CH6: 2437MHz



Test CH9: 2452MHz




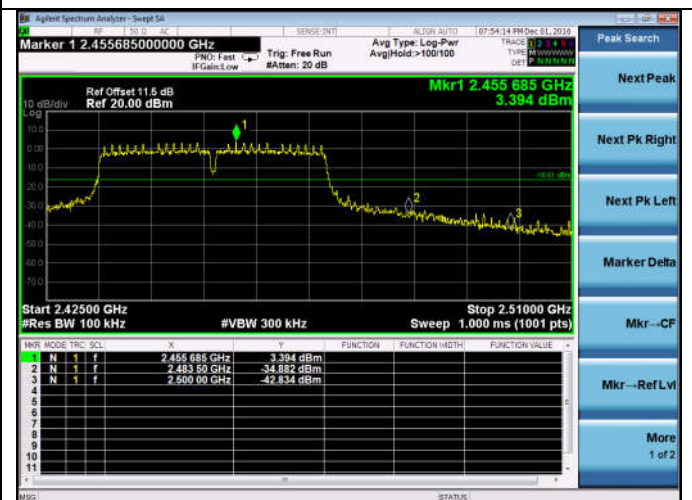
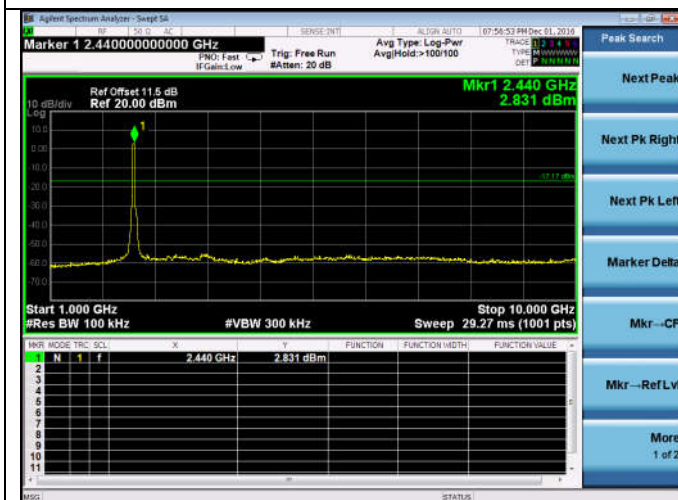
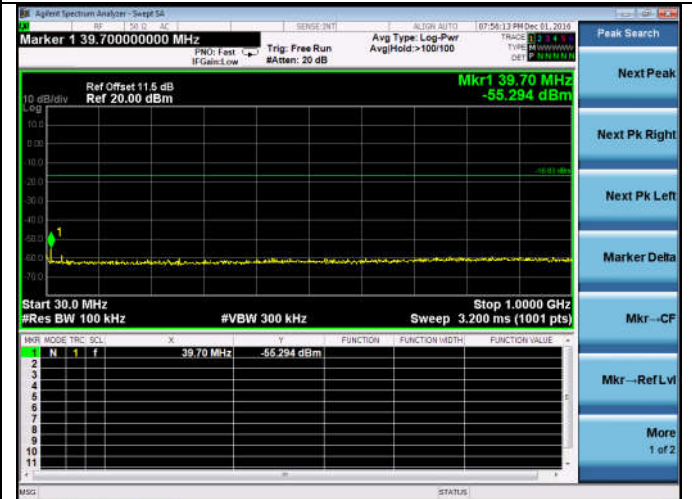


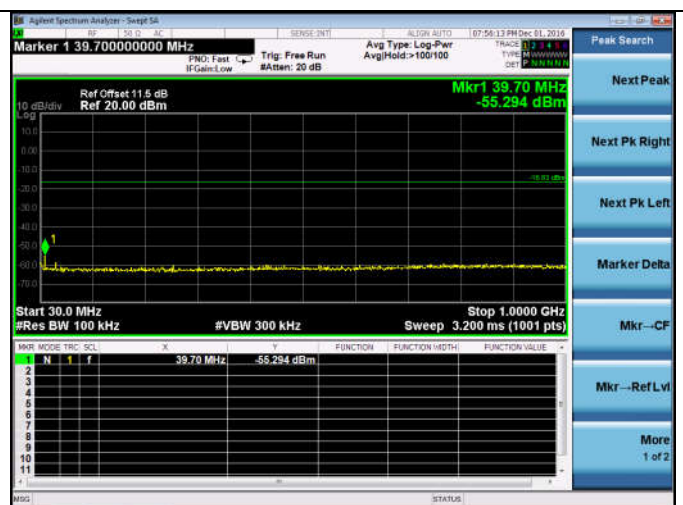


ANTB:


Test Mode: IEEE 802.11b

Test CH1: 2412MHz

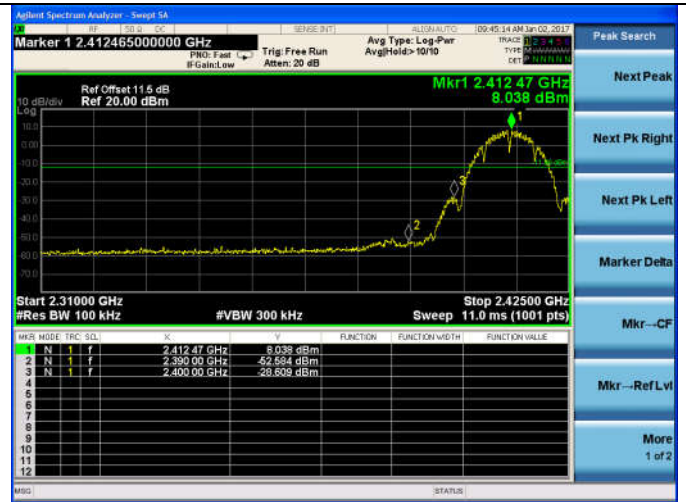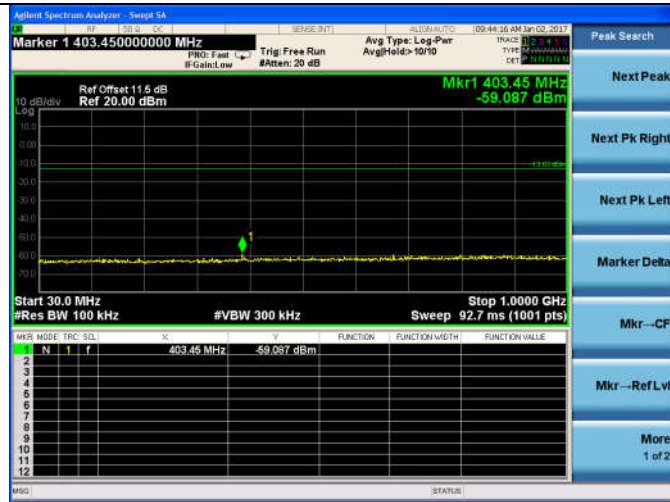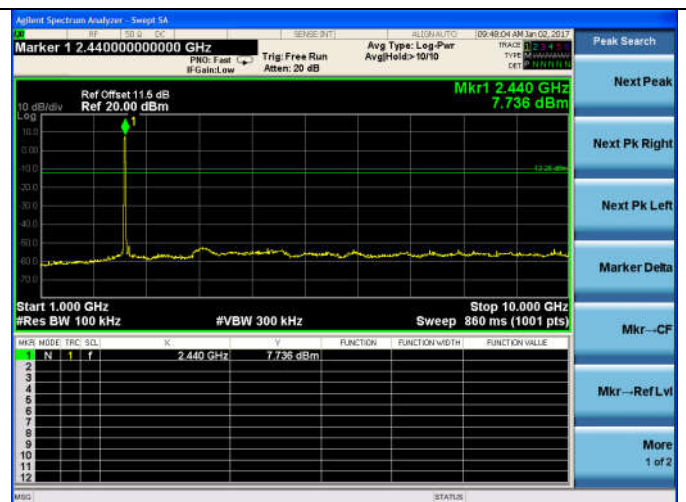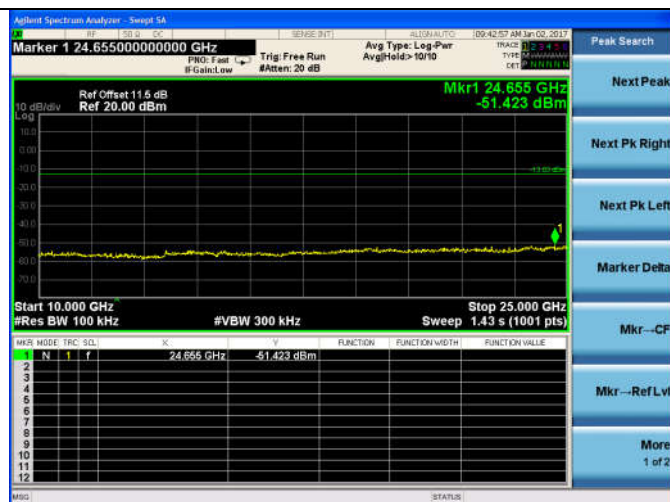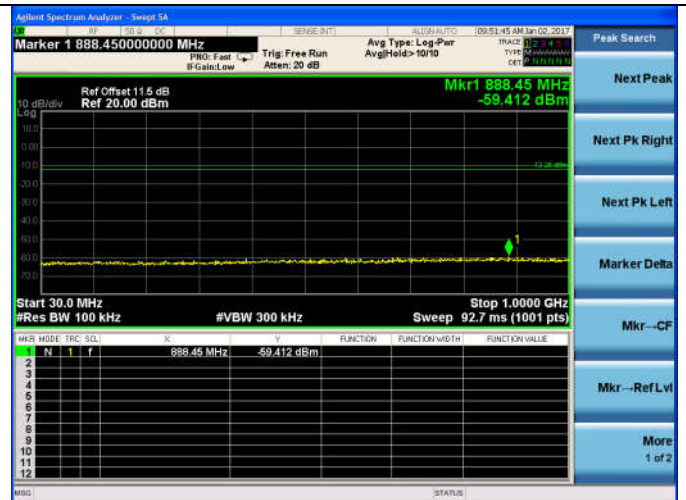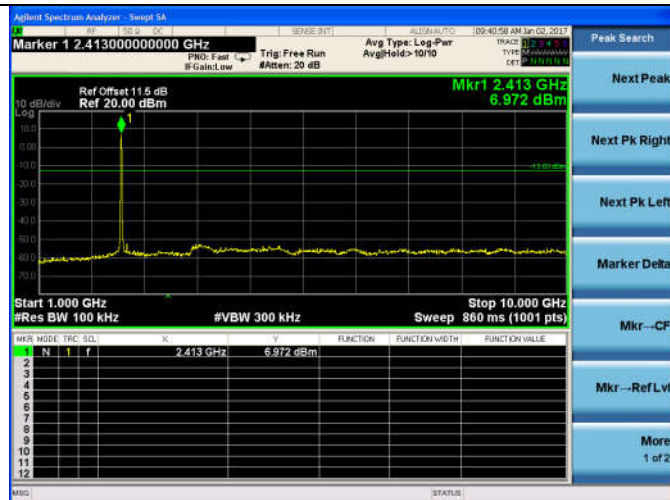

Test CH6: 2437MHz

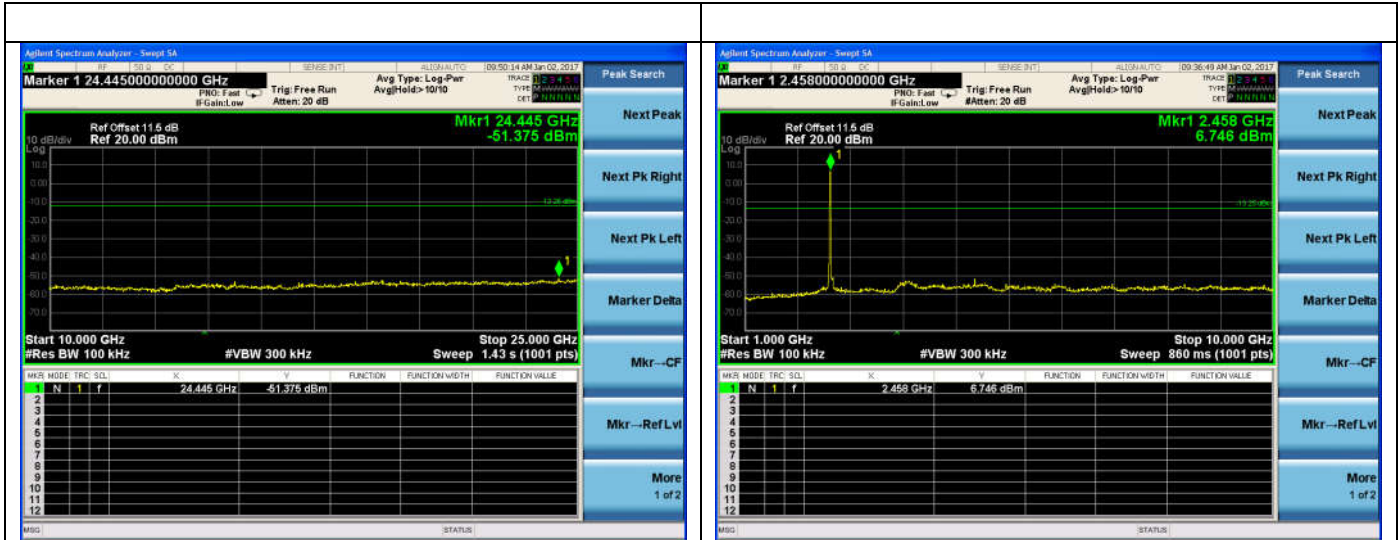


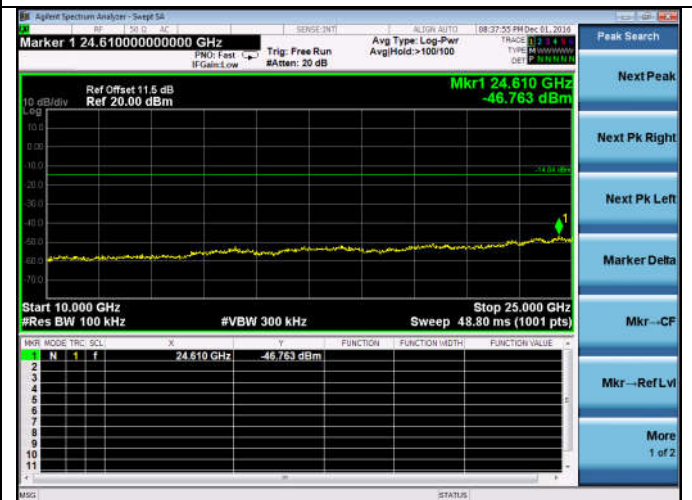
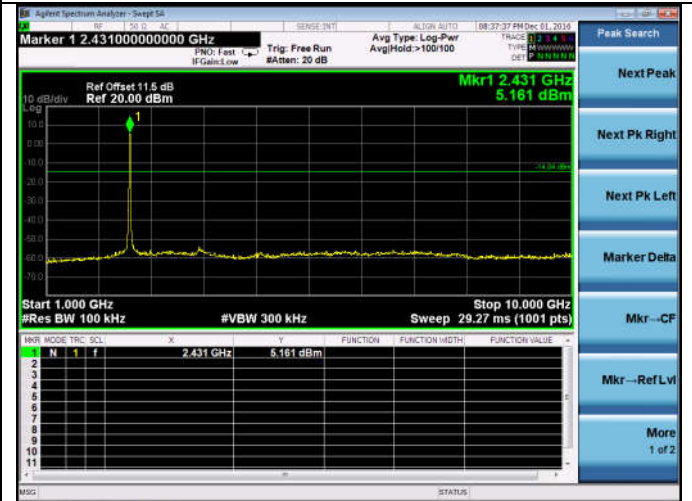
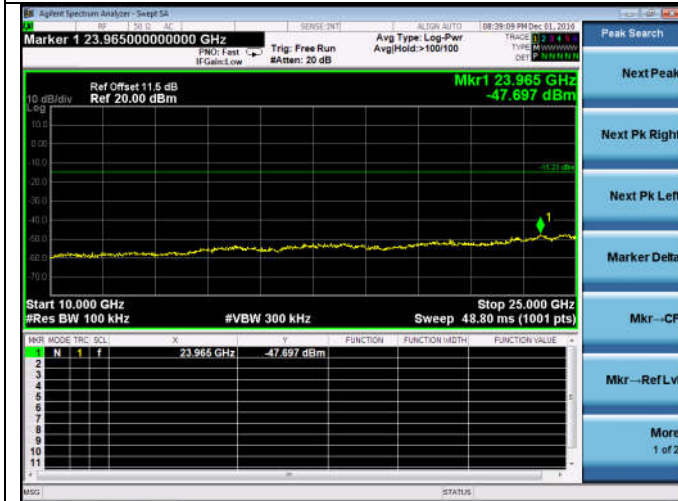
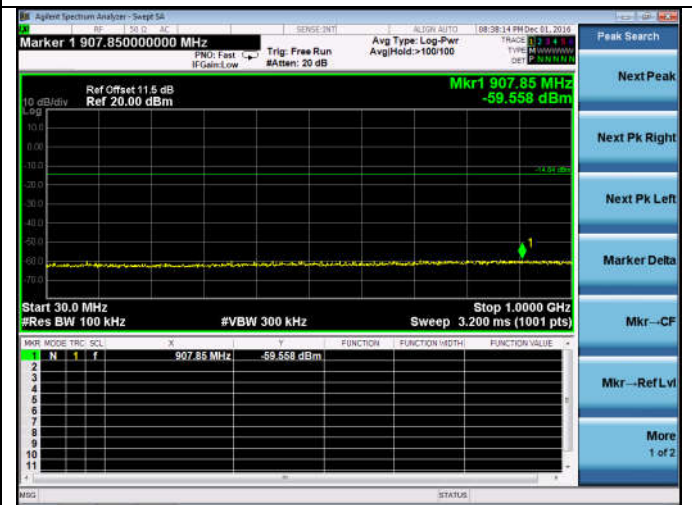
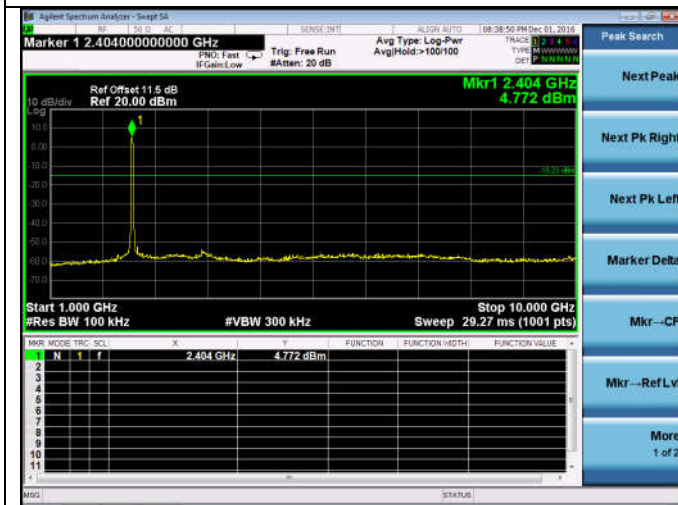
Test CH11: 2462MHz

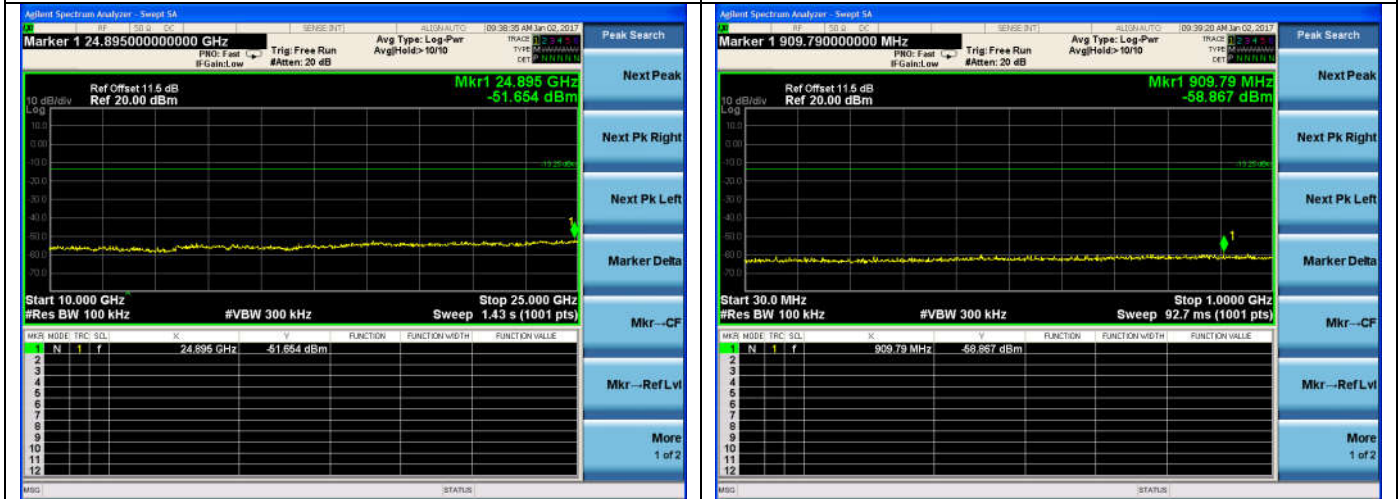


Test Mode: IEEE 802.11g Test CH1: 2412MHz

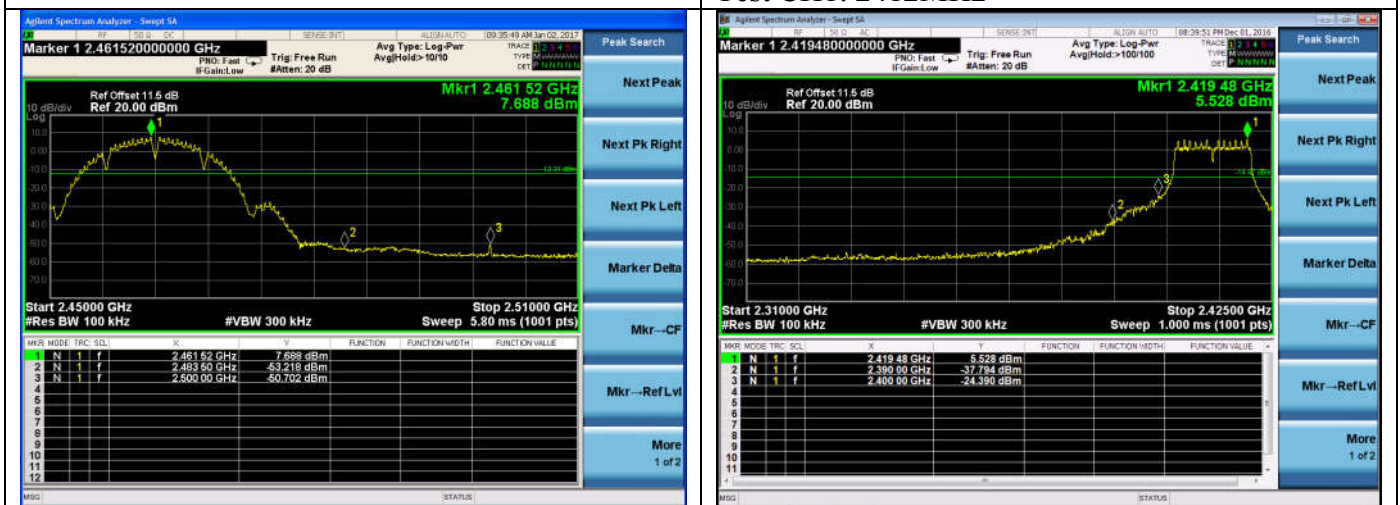

Test CH6: 2437MHz



Test CH11: 2462MHz

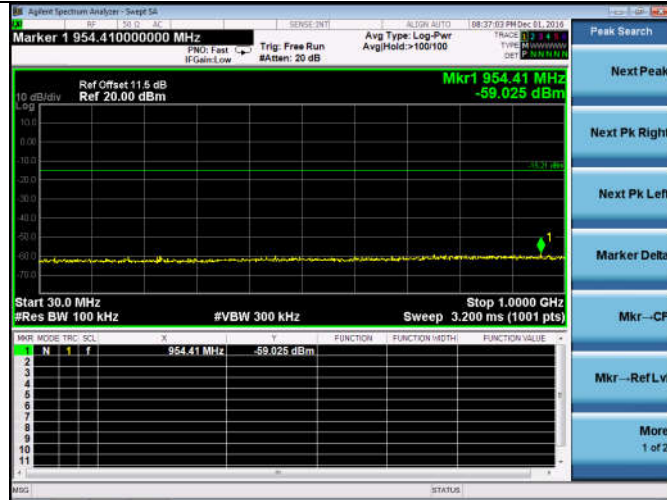
Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz
