

RF Test Report

Applicant : KRONOZ
Product Type : Smart Watch
Trade Name : MYKRONOZ
Model Number : ZeTime Petite
Test Specification : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Receive Date : Oct. 31, 2017
Test Period : Nov. 23 ~ Nov. 27, 2017
Issue Date : Dec. 11, 2017

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Test Firm MRA designation number: TW0010

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Dec. 04, 2017	Initial Issue	Janet Chao
01	Dec. 11, 2017	Revised Report Information	Janet Chao

Verification of Compliance

Issued Date: Dec. 11, 2017

Applicant : KRONOZ
Product Type : Smart Watch
Trade Name : MYKRONOZ
Model Number : ZeTime Petite
FCC ID : 2AA7D-ZET1P
EUT Rated Voltage : DC 5V
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Jet Lu Reviewed By : Eric Ou Yang
(Manager) (Jet Lu) (Testing Engineer) (Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	5
2	EUT Description.....	6
3	Test Methodology.....	7
3.1.	Mode of Operation.....	7
3.2.	EUT Exercise Software	7
3.3.	Configuration of Test System Details.....	8
3.4.	Test Instruments	9
3.5.	Test Site Environment.....	10
4	AC Power Line Conducted Emission Measurement.....	11
5	Radiated Emission Measurement	15
6	Maximum Conducted Output Power Measurement.....	30
7	6dB RF Bandwidth Measurement.....	31
8	Maximum Power Density Measurement	33
9	Out of Band Conducted Emissions Measurement	35
10	Antenna Measurement	39

1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.7
Radiated Emission	9kHz ~ 30MHz	1.7
	30MHz ~ 1000MHz	5.7
	1000MHz ~ 18000MHz	5.5
	18000MHz ~ 26500MHz	4.8
	26500MHz ~ 40000MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96%	
Power Spectral Density	+0.71 dB / -0.77 dB	

2 EUT Description

Applicant	KRONOZ ROUTE DE VALAVRAN 96, GENTHOD, 1294, Switzerland	
Manufacturer	KRONOZ ROUTE DE VALAVRAN 96, GENTHOD, 1294, Switzerland	
Product Type	Smart Watch	
Trade Name	MYKRONOZ	
Model No.	ZeTime Petite	
FCC ID	2AA7D-ZET1P	
Frequency Range	2402 ~ 2480 MHz	
Modulation Type	GFSK	
Operate Temp. Range	-10 ~ +55 °C	
Antenna information	Type	Max. Gain (dBi)
	Monopole Antenna	-3.89
RF Output Power	0.00098 W	

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: Bluetooth LE Continuous TX mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in TX mode only.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.


3.2. EUT Exercise Software

1	Setup the EUT shown on "Configuration of Test System Details."
2	Turn on the power of all equipment.
3	Turn on TX function
4	EUT run test program.


Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1

3.3. Configuration of Test System Details

Conducted Emission

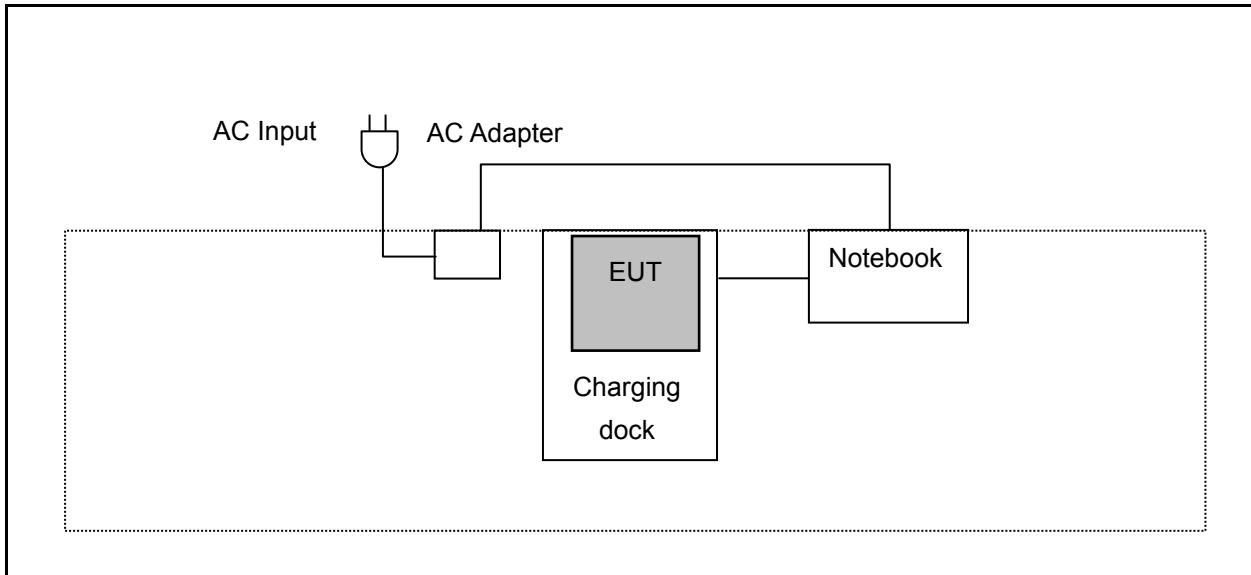

Radiated Emissions

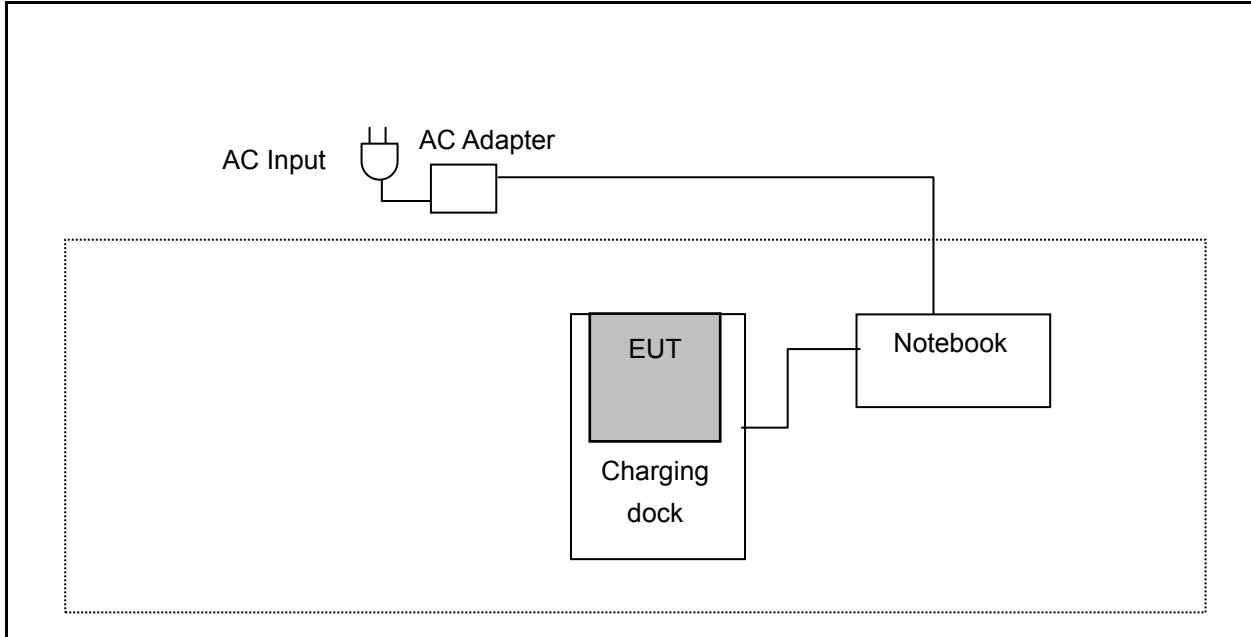

3.4. Test Instruments

For Conducted Emission

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/18/2017	1 year
LISN	R&S	ENV216	101040	04/01/2017	1 year
LISN	R&S	ENV216	101041	03/15/2017	1 year
RF Cable	Woken	00100D1380194M	TE-02-02	05/19/2017	1 year
Test Site	ATL	TE02	TE02	N.C.R.	-----

For Radiated Emissions

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector (9KHz~1GHz)	Agilent	N9039A	MY46520256	04/24/2017	1 year
Spectrum Analyzer (3Hz~44GHz)	Agilent	E4446A	MY46180578	04/24/2017	1 year
Pre Amplifier (1~26.5GHz)	Agilent	8449B	3008A02237	10/16/2017	1 year
Pre Amplifier (100KHz~1.3GHz)	Agilent	8447D	2944A11119	01/12/2017	1 year
Pre Amplifier (26.5~40GHz)	EMCI	EMC2654045	980028	08/29/2017	1 year
Pre Amplifier (1~26.5GHz)	EMCI	EMC012645SE	980289	01/16/2017	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/26/2017	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/22/2017	1 year
Horn Antenna (18~40GHz)	ETS	3116	86467	09/11/2017	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	01/26/2017	1 year
Microwave Cable	EMCI	EMC102-KM-KM-1 4000	151001	02/20/2017	1 year
Microwave Cable	EMCI	EMC-104-SM-SM- 14000	140202	02/20/2017	1 year
Microwave Cable	EMCI	EMC104-SM-SM-6 00	140301	02/20/2017	1 year
Test Site	ATL	TE01	888001	08/29/2017	1 year

Note: N.C.R. = No Calibration Request.

For Conducted

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Sensor	Anritsu	MA2411B	1126022	08/28/2017	1 year
Power Meter	Anritsu	ML2495A	1135009	08/28/2017	1 year
Spectrum Analyzer (3Hz~13.2GHz)	Agilent	E4445A	MY45300744	12/19/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 500	140303	02/22/2017	1 year
Spectrum Analyzer (9KHz~26.5GHz)	Agilent	E4408B	MY45107753	08/14/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment


Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

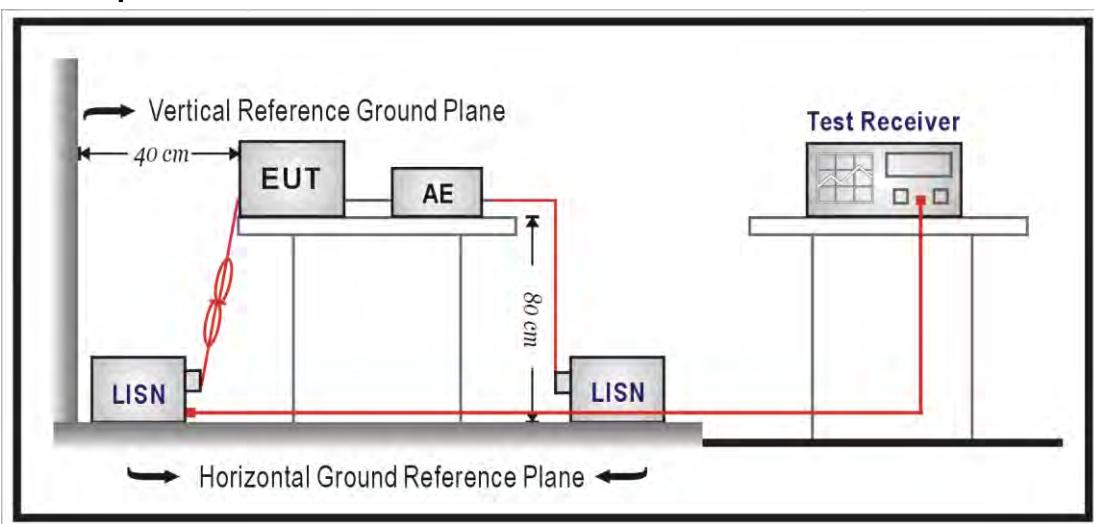

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50Ω // $50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50Ω // $50\mu\text{H}$ coupling impedance with 50ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12mm insulating material.


Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150kHz to 30MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4m. All of interconnecting cables that hang closer than 40cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1m. All 50Ω ports of the LISN shall be resistively terminated into 50Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

■ Test Result

Standard:	FCC Part 15.247	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Line:	L1	Date:	11/27/2017
Description:			

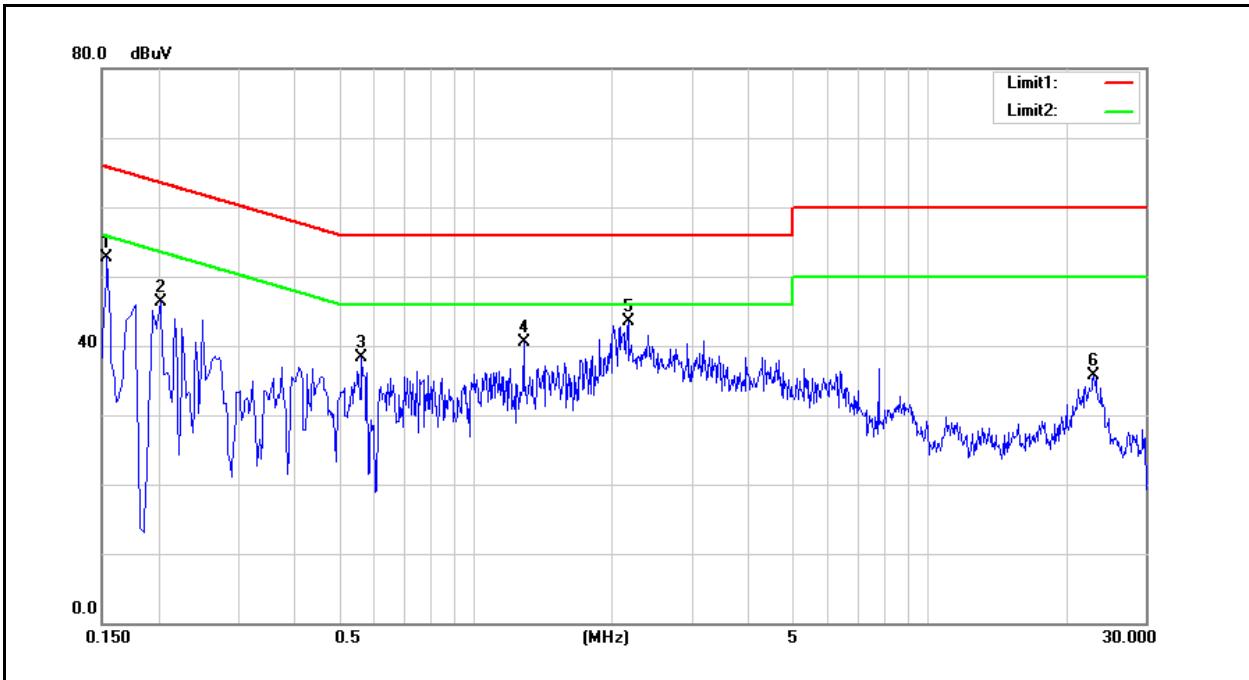


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	41.98	28.53	9.68	51.66	38.21	65.78	55.78	-14.12	-17.57	Pass
2	0.2020	35.65	23.17	9.68	45.33	32.85	63.53	53.53	-18.20	-20.68	Pass
3	0.5620	27.67	18.32	9.68	37.35	28.00	56.00	46.00	-18.65	-18.00	Pass
4	1.2780	22.32	15.26	9.73	32.05	24.99	56.00	46.00	-23.95	-21.01	Pass
5	2.1700	27.51	20.41	9.75	37.26	30.16	56.00	46.00	-18.74	-15.84	Pass
6	23.1260	19.88	11.66	10.52	30.40	22.18	60.00	50.00	-29.60	-27.82	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Line:	N	Date:	11/27/2017
Description:			

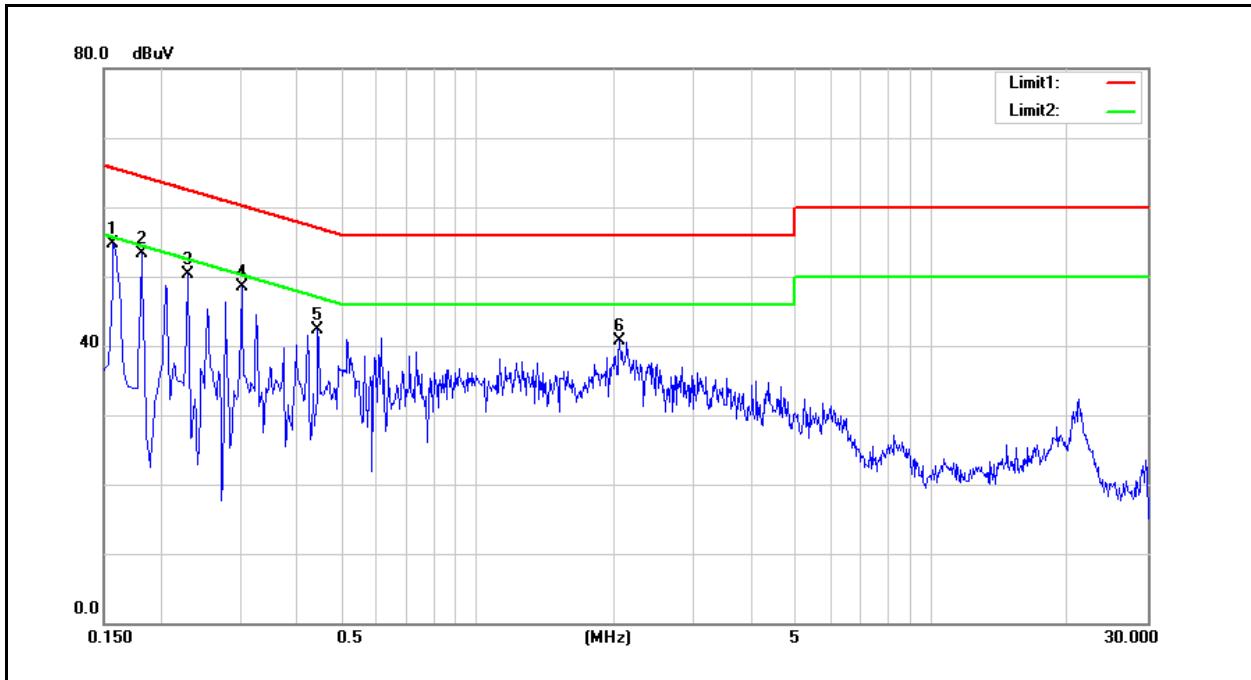

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	42.38	25.56	9.68	52.06	35.24	65.57	55.57	-13.51	-20.33	Pass
2	0.1820	36.42	15.18	9.69	46.11	24.87	64.39	54.39	-18.28	-29.52	Pass
3	0.2300	34.56	11.27	9.69	44.25	20.96	62.45	52.45	-18.20	-31.49	Pass
4	0.3020	31.69	19.18	9.71	41.40	28.89	60.19	50.19	-18.79	-21.30	Pass
5	0.4460	22.84	15.75	9.70	32.54	25.45	56.95	46.95	-24.41	-21.50	Pass
6	2.0620	26.80	18.08	9.77	36.57	27.85	56.00	46.00	-19.43	-18.15	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5 Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9kHz ~ 30MHz

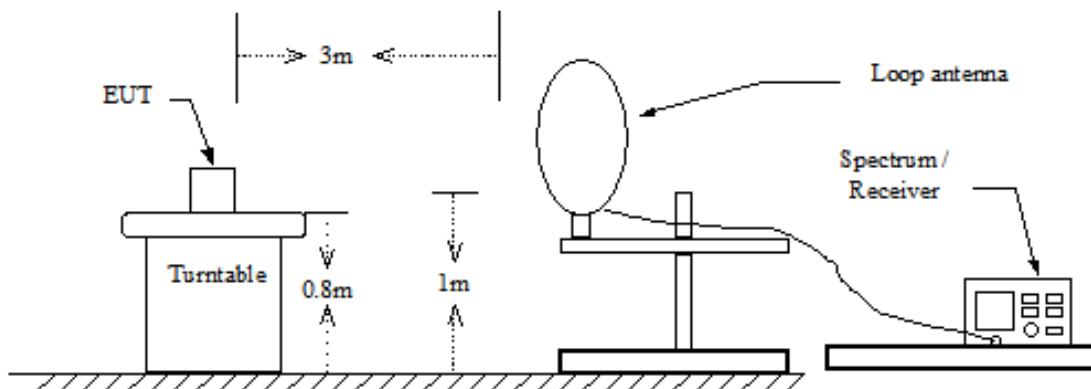

Below 1GHz

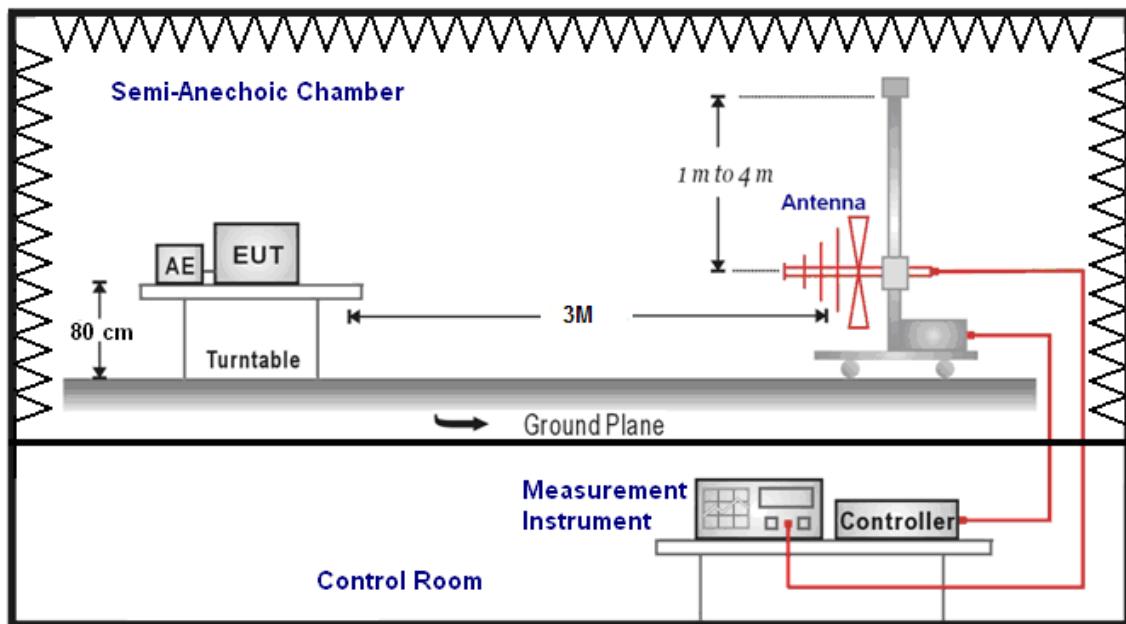

Above 1GHz

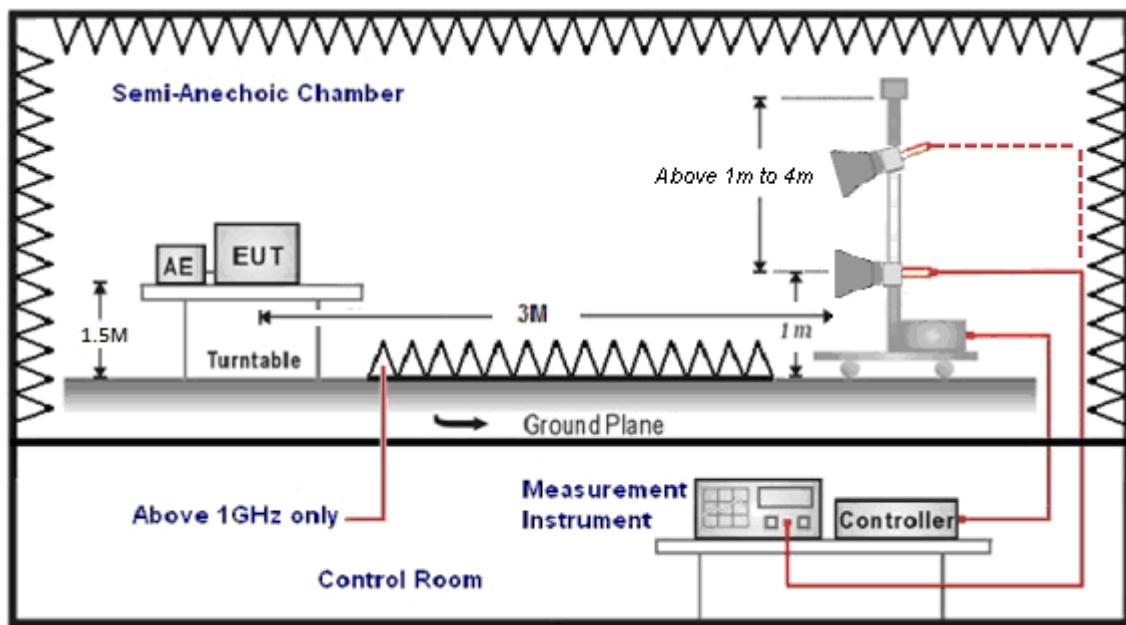

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height(below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >98% / 1/T for average measurements when Duty cycle <98%. A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ **Test Result**

Below 1GHz

Standard:	FCC Part 15.247			Test Distance:	3m		
Test Mode:	Mode 1			Power:	AC 120V/60Hz		
				Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
				Date:	11/24/2017		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
48.4300	37.67	-10.80	26.87	40.00	-13.13	QP	H
95.9600	45.08	-15.87	29.21	43.50	-14.29	QP	H
191.9900	41.35	-12.37	28.98	43.50	-14.52	QP	H
288.0200	40.41	-10.46	29.95	46.00	-16.05	QP	H
359.8000	39.22	-8.71	30.51	46.00	-15.49	QP	H
960.2300	32.59	3.32	35.91	54.00	-18.09	QP	H
48.4300	43.28	-10.80	32.48	40.00	-7.52	QP	V
68.8000	44.57	-12.93	31.64	40.00	-8.36	QP	V
195.8700	45.59	-12.56	33.03	43.50	-10.47	QP	V
404.4200	38.06	-7.26	30.80	46.00	-15.20	QP	V
661.4700	32.21	-2.07	30.14	46.00	-15.86	QP	V
960.2300	31.12	3.32	34.44	54.00	-19.56	QP	V


Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2402MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/24/2017
Ant.Polar.:	Horizontal		

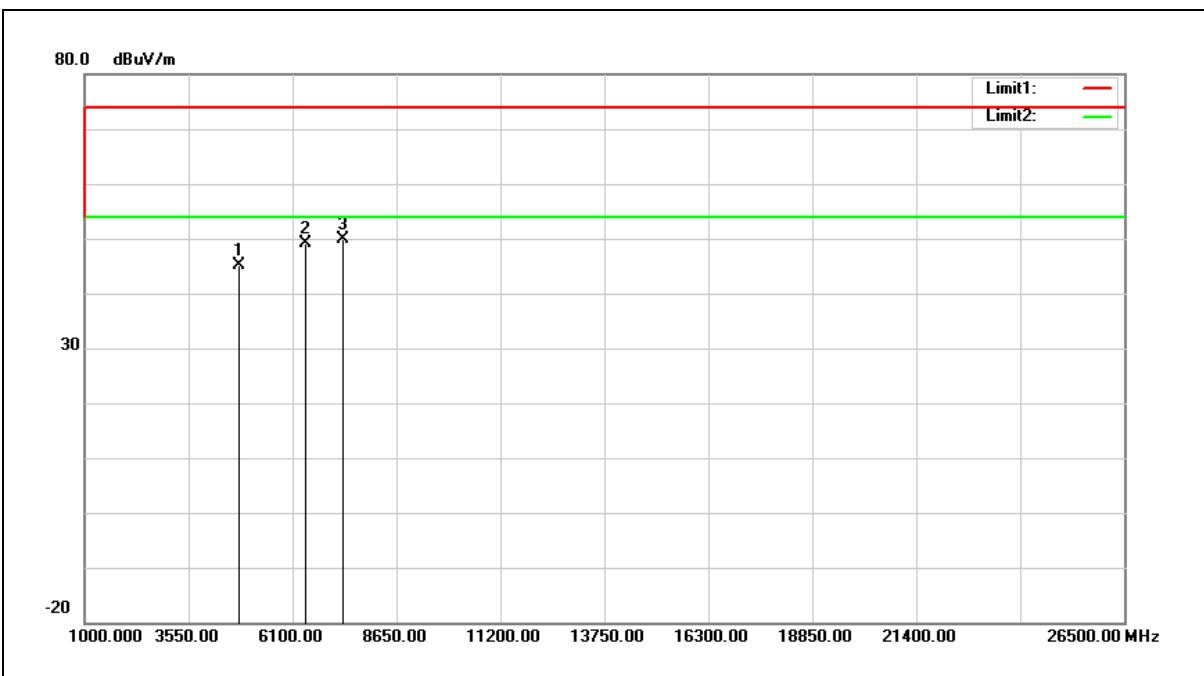


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	49.38	-4.35	45.03	74.00	-28.97	peak
2	6406.000	50.49	-1.32	49.17	74.00	-24.83	peak
3	7324.000	50.14	-0.20	49.94	74.00	-24.06	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2402MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/24/2017
Ant.Polar.:	Vertical		

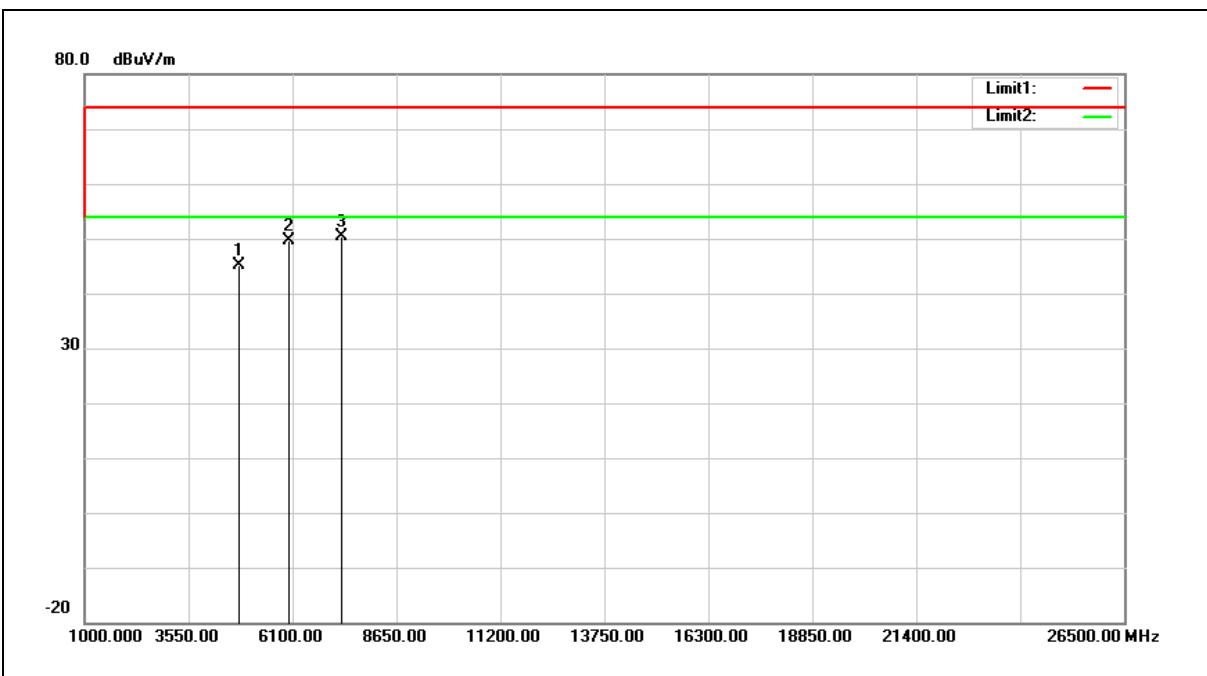


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	49.49	-4.35	45.14	74.00	-28.86	peak
2	5998.000	51.57	-2.04	49.53	74.00	-24.47	peak
3	7298.500	50.69	-0.26	50.43	74.00	-23.57	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2440MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/24/2017
Ant.Polar.:	Horizontal		

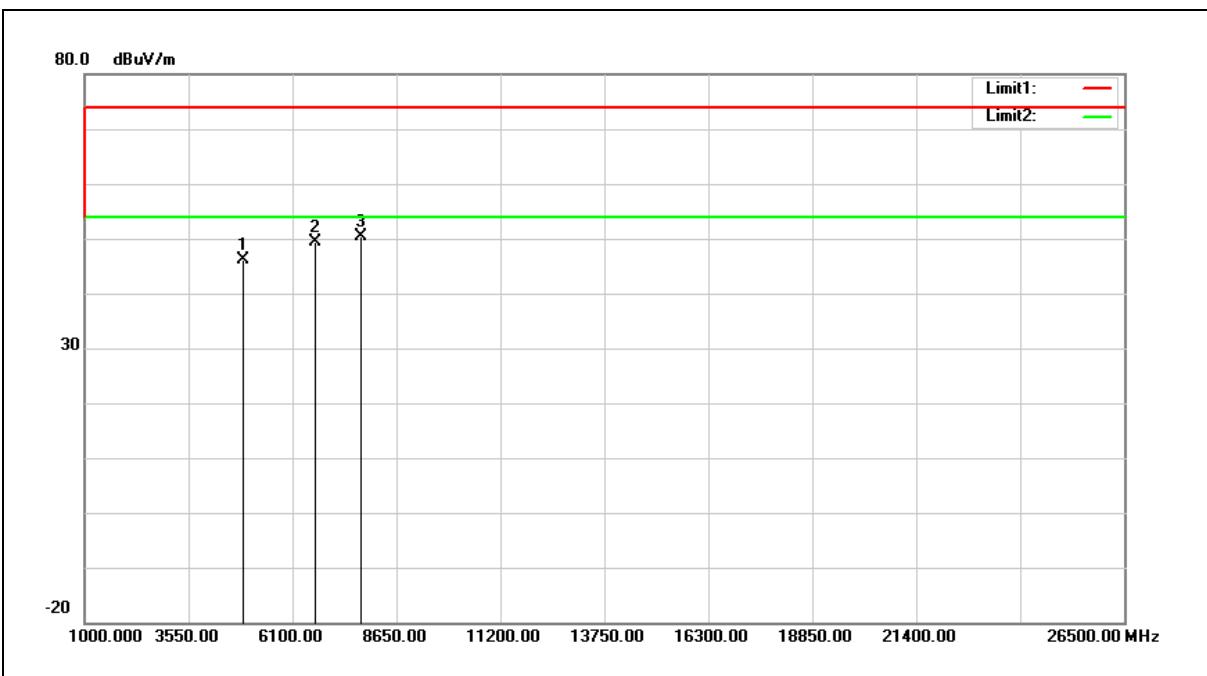


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	50.49	-4.37	46.12	74.00	-27.88	peak
2	6661.000	50.74	-1.29	49.45	74.00	-24.55	peak
3	7783.000	49.73	0.60	50.33	74.00	-23.67	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2440MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/24/2017
Ant.Polar.:	Vertical		

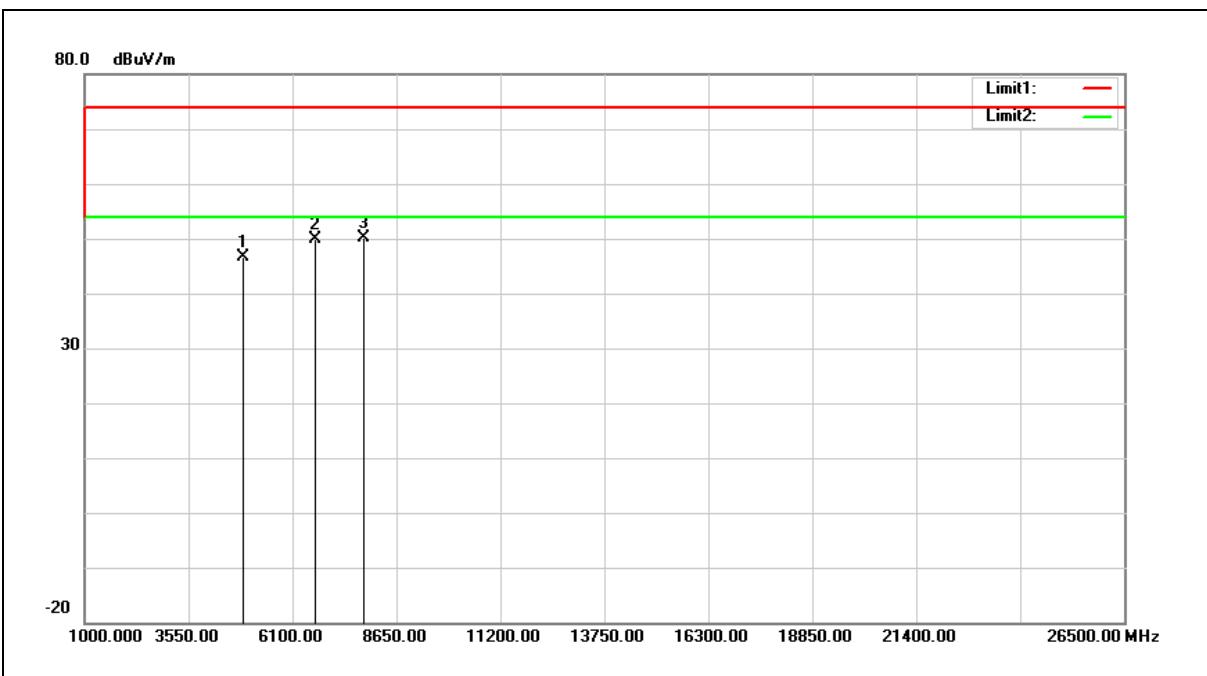


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	51.00	-4.37	46.63	74.00	-27.37	peak
2	6661.000	51.20	-1.29	49.91	74.00	-24.09	peak
3	7859.500	49.46	0.79	50.25	74.00	-23.75	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2480MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/24/2017
Ant.Polar.:	Horizontal		

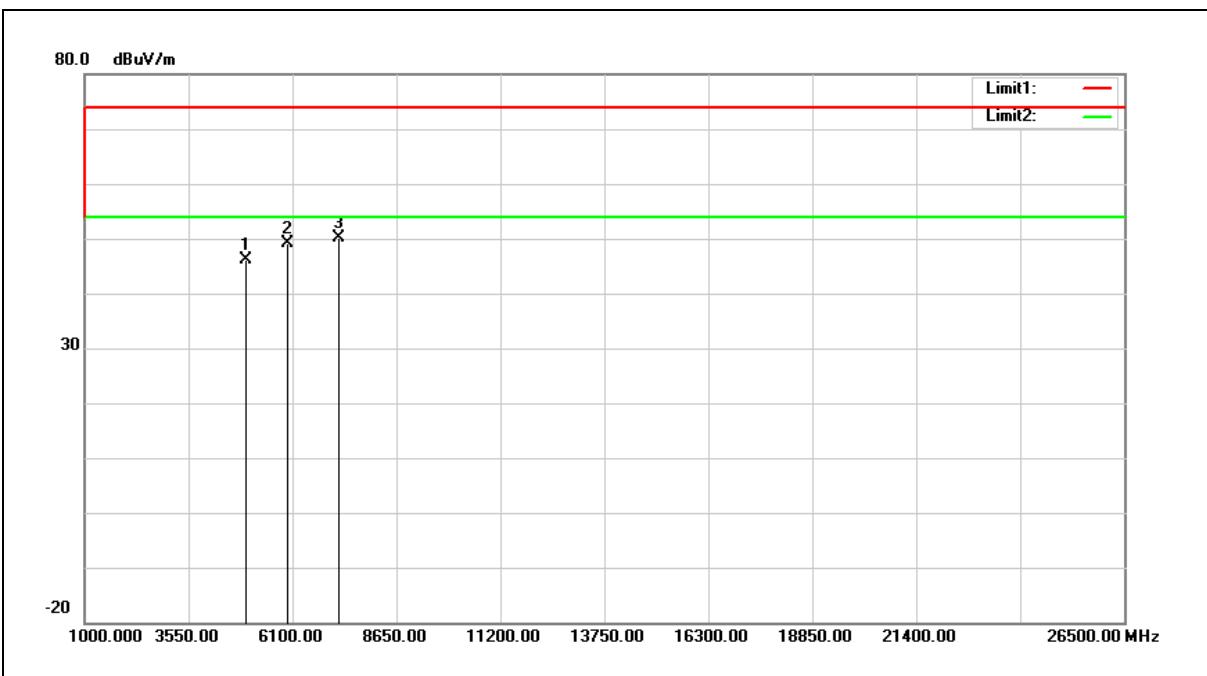


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	50.59	-4.39	46.20	74.00	-27.80	peak
2	5972.500	51.16	-2.12	49.04	74.00	-24.96	peak
3	7222.000	50.52	-0.47	50.05	74.00	-23.95	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2480MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/24/2017
Ant.Polar.:	Vertical		

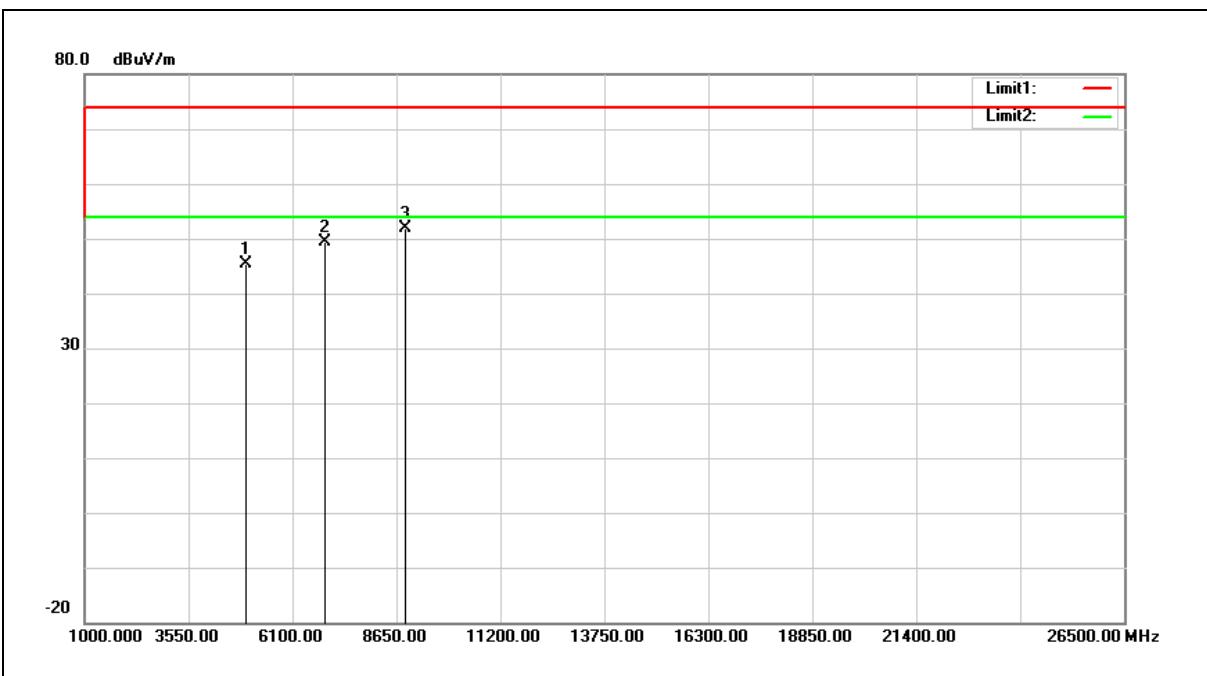

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	49.85	-4.39	45.46	74.00	-28.54	peak
2	6890.500	50.40	-1.03	49.37	74.00	-24.63	peak
3	8854.000	48.41	3.44	51.85	74.00	-22.15	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2402MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/24/2017
Ant.Polar.:	Horizontal		

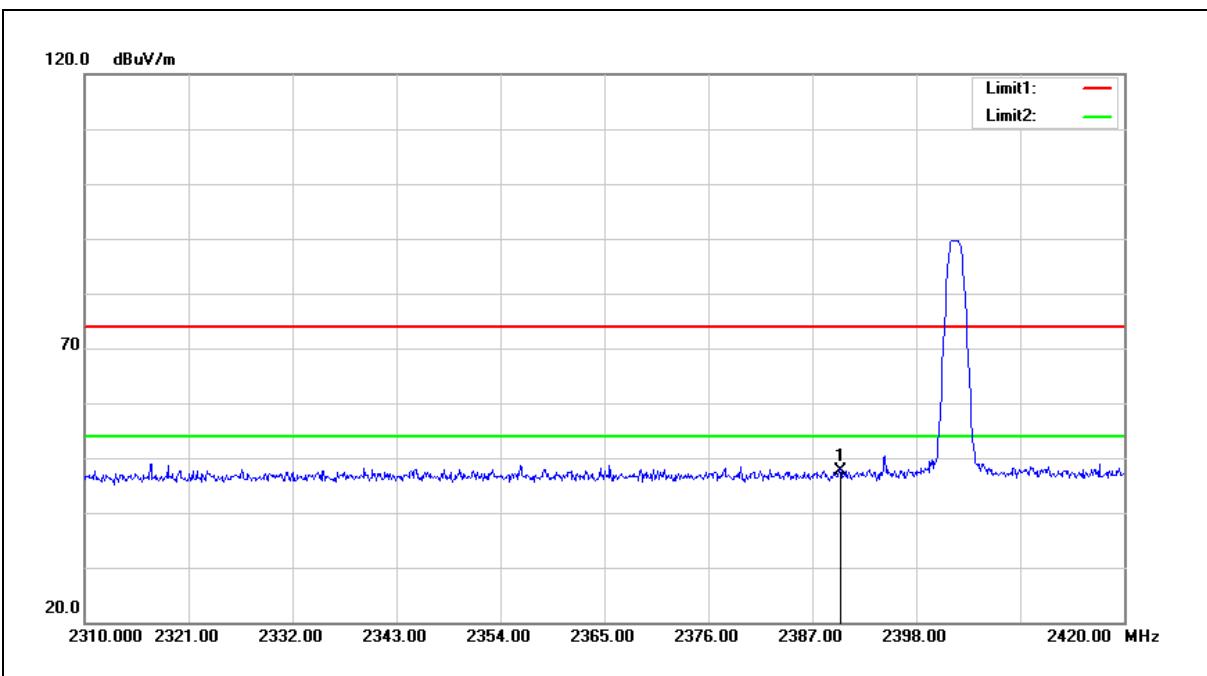


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	57.16	-9.62	47.54	74.00	-26.46	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2402MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/24/2017
Ant.Polar.:	Vertical		

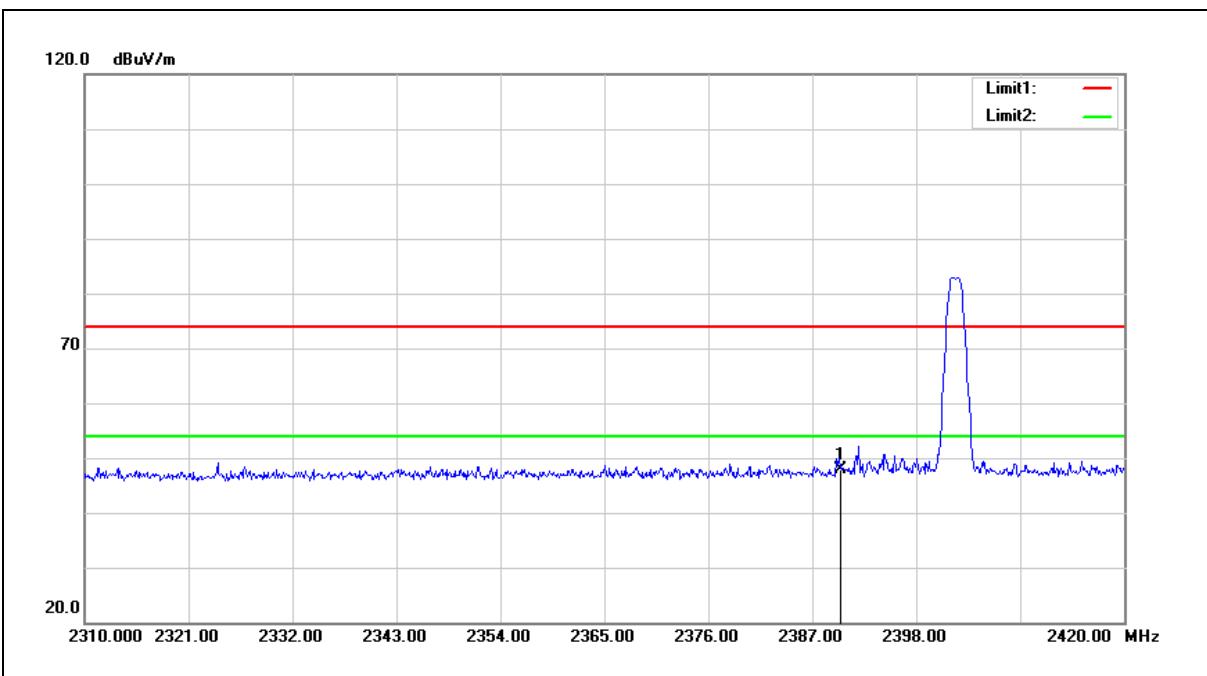


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	57.53	-9.62	47.91	74.00	-26.09	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2480MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/24/2017
Ant.Polar.:	Horizontal		

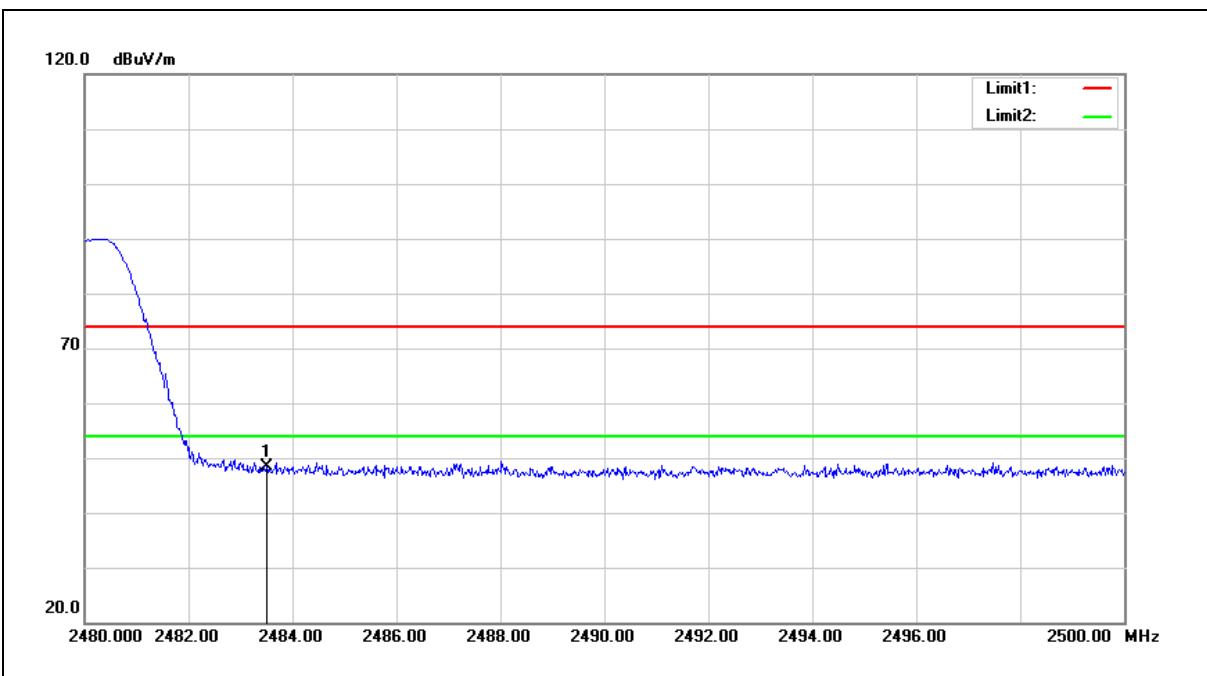


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.53	-9.20	48.33	74.00	-25.67	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2480MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/24/2017
Ant.Polar.:	Vertical		

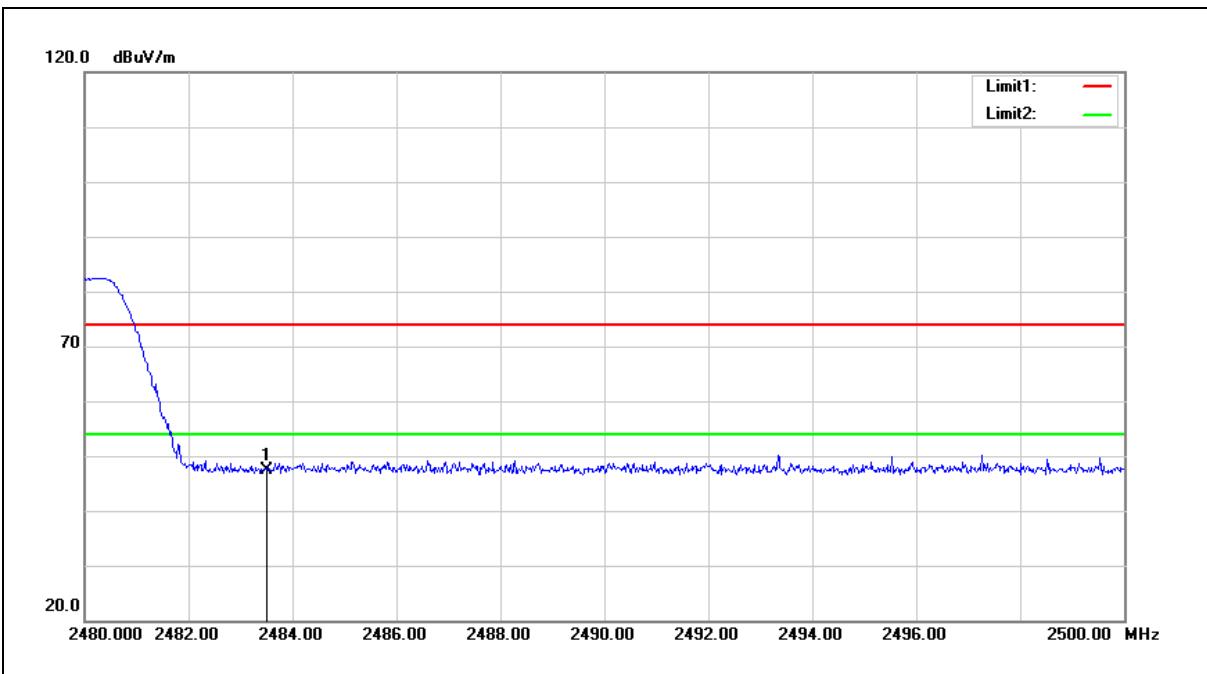

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.53	-9.20	47.33	74.00	-26.67	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3. When the peak results are less than average limit, so not need to evaluate the average.

6 Maximum Conducted Output Power Measurement

■ Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

■ Test Setup

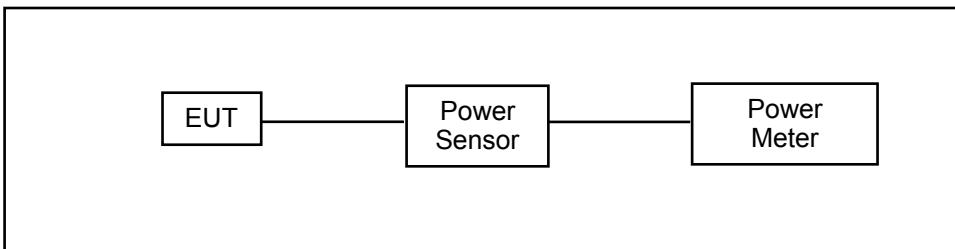

■ Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10-2013 section 11.9.2.3 Method AVGPM.

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor..

■ Test Result

Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	-5.38	0.00029	-0.13	0.00097	< 30
2440	-6.08	0.00025	-0.51	0.00089	< 30
2480	-5.13	0.00031	-0.09	0.00098	< 30

Note: The relevant measured result has the offset with cable loss already.


7 6dB RF Bandwidth Measurement

■ Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

■ Test Setup

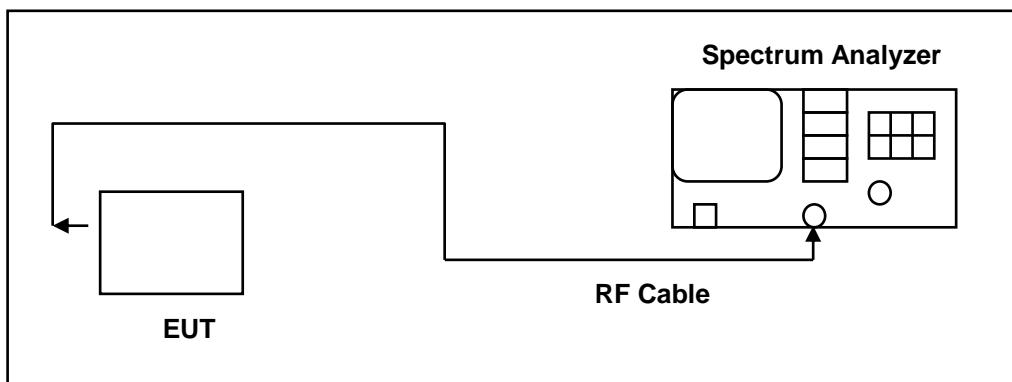

■ Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.




6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

■ Test Result

Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	742.400	> 500
2440	751.800	> 500
2480	739.200	> 500

■ Test Graphs

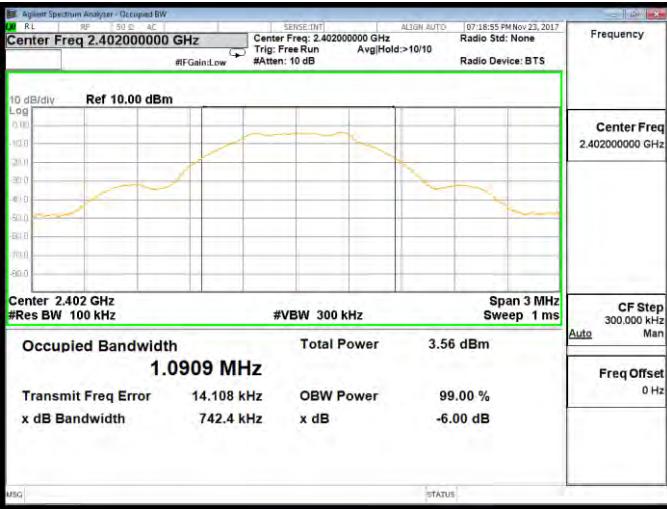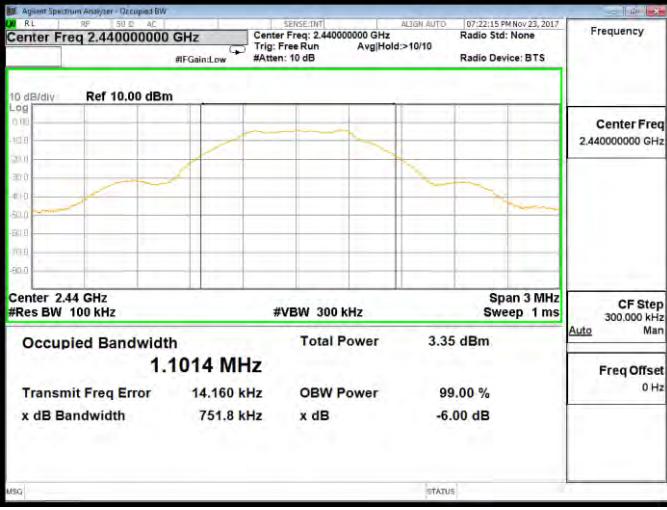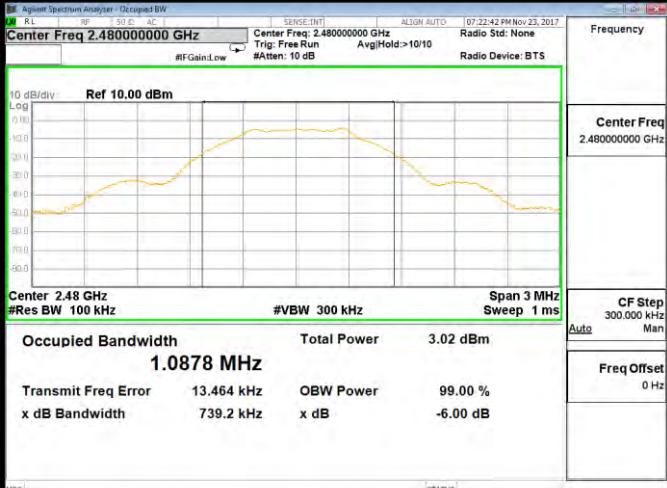
Test Mode:	Mode 2
2402 MHz	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref 10.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>10.0</p> <p>0.0</p> <p>-10.0</p> <p>-20.0</p> <p>-30.0</p> <p>-40.0</p> <p>-50.0</p> <p>-60.0</p> <p>-70.0</p> <p>-80.0</p> <p>Center 2.402 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 1.0909 MHz</p> <p>Total Power 3.56 dBm</p> <p>Transmit Freq Error 14.108 kHz</p> <p>x dB Bandwidth 742.4 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Center Freq 2.402000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p>
2440 MHz	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz</p> <p>Ref 10.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>10.0</p> <p>0.0</p> <p>-10.0</p> <p>-20.0</p> <p>-30.0</p> <p>-40.0</p> <p>-50.0</p> <p>-60.0</p> <p>Center 2.44 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 1.1014 MHz</p> <p>Total Power 3.35 dBm</p> <p>Transmit Freq Error 14.160 kHz</p> <p>x dB Bandwidth 751.8 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Center Freq 2.440000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p>
2480 MHz	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref 10.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>10.0</p> <p>0.0</p> <p>-10.0</p> <p>-20.0</p> <p>-30.0</p> <p>-40.0</p> <p>-50.0</p> <p>-60.0</p> <p>Center 2.48 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 1.0878 MHz</p> <p>Total Power 3.02 dBm</p> <p>Transmit Freq Error 13.464 kHz</p> <p>x dB Bandwidth 739.2 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Center Freq 2.480000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p>

8 Maximum Power Density Measurement

■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ Test Setup

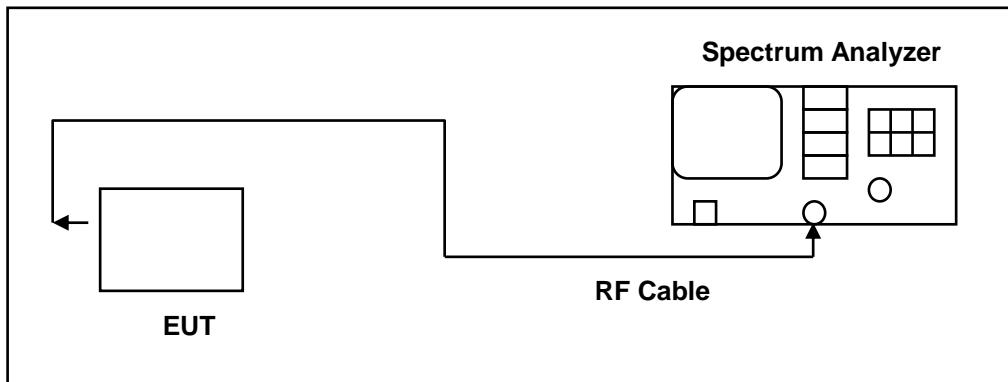

■ Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 section 10.2 Method PKPSD for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

■ Test Result

Frequency (MHz)	Measurement Results (dBm/3KHz)	Limit (dBm)
2402	-19.950	< 8
2440	-20.147	< 8
2480	-19.703	< 8

■ Test Graphs


Test Mode:	Mode 2
2402 MHz	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Span 1.000 MHz</p> <p>#Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Sweep 2.667 ms (40001 pts)</p> <p>MSO</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.401500000 GHz</p> <p>Stop Freq 2.402500000 GHz</p> <p>CF Step 100.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p>
2440 MHz	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.440000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Span 1.000 MHz</p> <p>#Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Sweep 2.667 ms (40001 pts)</p> <p>MSO</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.440000000 GHz</p> <p>Start Freq 2.439500000 GHz</p> <p>Stop Freq 2.440500000 GHz</p> <p>CF Step 100.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p>
2480 MHz	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Span 1.000 MHz</p> <p>#Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Sweep 2.667 ms (40001 pts)</p> <p>MSO</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.479500000 GHz</p> <p>Stop Freq 2.480500000 GHz</p> <p>CF Step 100.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p>

9 Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

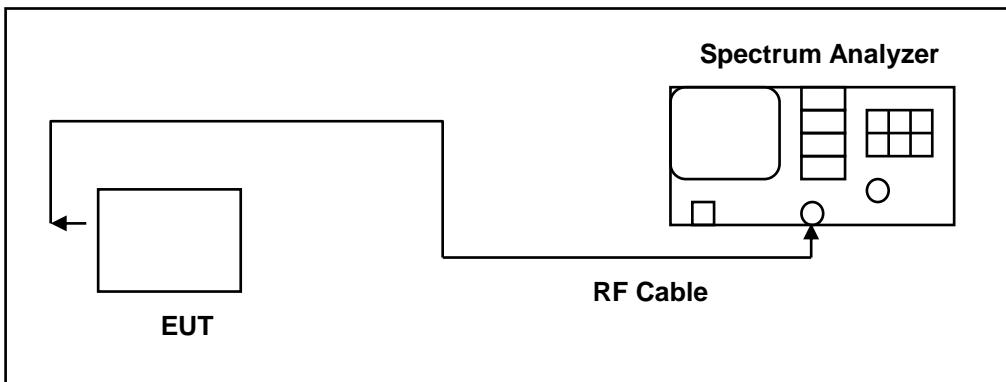



■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.



The test was performed at 3 channels.

■ Test Graphs

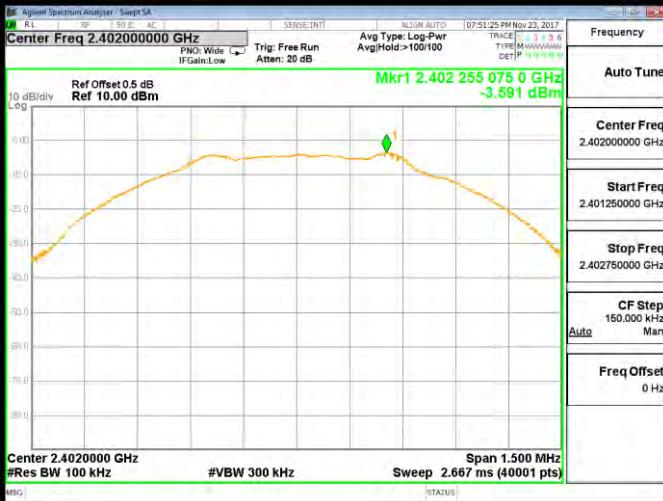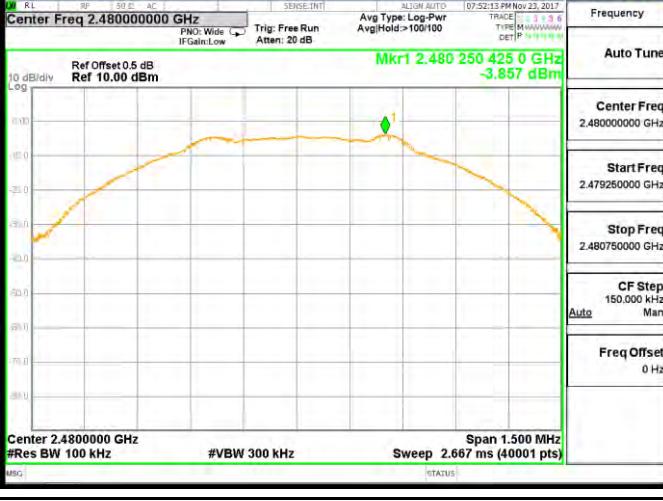Reference level	
Test Mode:	Mode 2
2402 MHz	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Span 1.500 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Sweep 2.667 ms (40001 pts)</p> <p>Mkr1 2.402 255 075 0 GHz -3.591 dBm</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.401250000 GHz</p> <p>Stop Freq 2.402750000 GHz</p> <p>CF Step 150.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p>
2440 MHz	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.440000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Span 1.500 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Sweep 2.667 ms (40001 pts)</p> <p>Mkr1 2.440 255 112 5 GHz -3.822 dBm</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.440000000 GHz</p> <p>Start Freq 2.439250000 GHz</p> <p>Stop Freq 2.440750000 GHz</p> <p>CF Step 150.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p>
2480 MHz	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Span 1.500 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Sweep 2.667 ms (40001 pts)</p> <p>Mkr1 2.480 250 425 0 GHz -3.857 dBm</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.479250000 GHz</p> <p>Stop Freq 2.480750000 GHz</p> <p>CF Step 150.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p>

Out of Band Conducted Emissions

Test Mode:	Mode 2
2402 MHz	 <p>Start Freq 30.000000 MHz Ref Offset 0.5 dB Ref 10.00 dBm Mkr1 2.4024 GHz -3.954 dBm Stop 26.50 GHz Sweep 88.00 ms (40001 pts)</p>
2440 MHz	 <p>Start Freq 30.000000 MHz Ref Offset 0.5 dB Ref 10.00 dBm Mkr1 2.4408 GHz -5.589 dBm Stop 26.50 GHz Sweep 88.00 ms (40001 pts)</p>
2480 MHz	 <p>Start Freq 30.000000 MHz Ref Offset 0.5 dB Ref 10.00 dBm Mkr1 2.4805 GHz -4.991 dBm Stop 26.50 GHz Sweep 88.00 ms (40001 pts)</p>

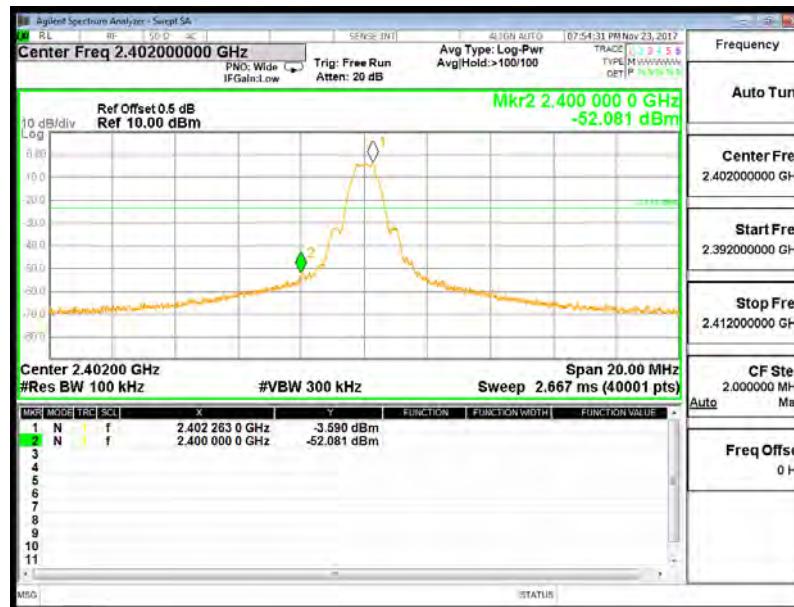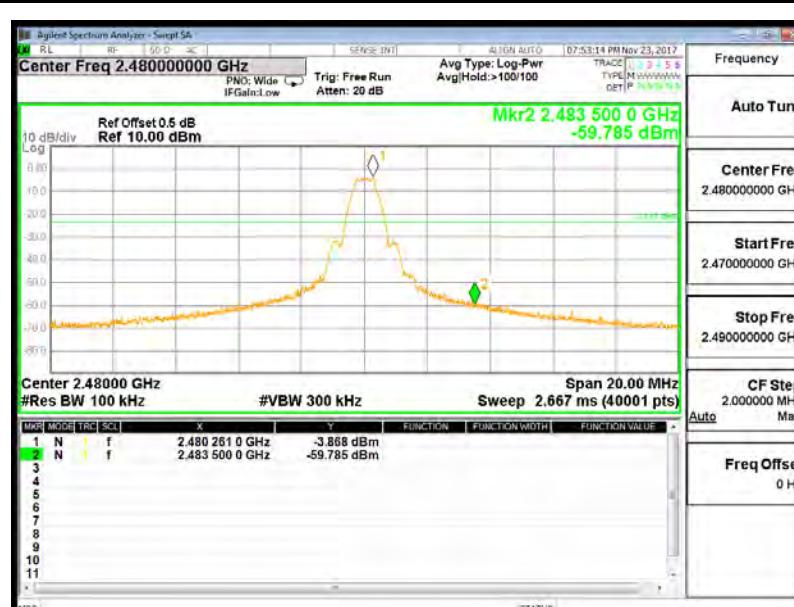Conducted Band Edge	
Test Mode:	Mode 2
2402 MHz	<p>Agilent Spectrum Analyzer - Script SA</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 0.5 dB Ref 10.00 dBm</p> <p>Span 20.00 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (40001 pts)</p> <p>Mkr2 2.400 000 0 GHz -52.081 dBm</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.39200000 GHz</p> <p>Stop Freq 2.41200000 GHz</p> <p>CF Step 2.00000 MHz</p> <p>Freq Offset 0 Hz</p>  <p>MSG STATUS</p>
2480 MHz	<p>Agilent Spectrum Analyzer - Script SA</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 0.5 dB Ref 10.00 dBm</p> <p>Span 20.00 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (40001 pts)</p> <p>Mkr2 2.483 500 0 GHz -59.785 dBm</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47000000 GHz</p> <p>Stop Freq 2.49000000 GHz</p> <p>CF Step 2.00000 MHz</p> <p>Freq Offset 0 Hz</p>  <p>MSG STATUS</p>

10 Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

■ Antenna Connector Construction

See section 2 – antenna information.