



FCC 47 CFR PART 15 SUBPART C

Product Type : Smart Watch
Applicant : Kronoz LLC
Address : Avenue Louis Casai 18 1209 Geneva Switzerland
Trade Name : MyKronoz
Model Number : ZeWatch³
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2013
ANSI C63.10:2013

Receive Date : 14 Sep, 2015
Test Period : 15 Sep, 2015 to 31 Sep, 2015
Issue Date : 21 Oct, 2015

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	21 Oct, 2015	Initial Issue	



Certification of Compliance

Issued Date: 2015/10/21

Product Type : Smart Watch
Applicant : Kronoz LLC
Address : Avenue Louis Casai 18 1209 Geneva Switzerland
Trade Name : MyKronoz
Model Number : ZeWatch³
FCC ID : 2AA7D-ZEWH3
EUT Rated Voltage : DC 3.7V
Test Voltage : DC 3.7V
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2013
ANSI C63.10:2013
Test Result : Complied
Test Laboratory : Site 1:
A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .The test results of this report relate only to the tested sample identified in this report.

Approved By

(Manager)

Reviewed By

(Testing Engineer)

(Fly Lu)

TABLE OF CONTENTS

1 General Information	6
2 Test Summary.....	6
3 Measurement Uncertainty.....	7
4 EUT Description.....	7
4.1. Customized Configurations.....	7
5 Test Methodology.....	8
5.1. Mode of Operation	8
5.2. EUT Exercise Software.....	8
5.3. Configuration of Test System Details	9
5.4. Test Site Environment.....	10
6 Conducted Emission Measurement.....	11
6.1. Limit.....	11
6.2. Test Instruments	11
6.3. Test Setup.....	11
6.4. Test Procedure.....	12
6.5. Test Result.....	13
7 Radiated Emission Measurement	15
7.1. Limit.....	15
7.2. Test Instruments	15
7.3. Setup.....	16
7.4. Test Procedure.....	17
7.5. Test Result.....	19
8 Maximum Conducted Output Power Measurement.....	24
8.1. Limit.....	24
8.2. Test Setup	24
8.3. Test Instruments	24
8.4. Test Procedure.....	24
8.5. Test Result.....	25
9 6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement.....	26
9.1. Limit.....	26
9.2. Test Setup	26
9.3. Test Instruments	26
9.4. Test Procedure.....	26
9.5. Test Result.....	27
9.6. Test Graphs	28
10 Maximum Power Density Measurement	29



10.1. Limit.....	29
10.2. Test Setup.....	29
10.3. Test Instruments	29
10.4. Test Procedure.....	29
10.5. Test Result.....	30
10.6. Test Graphs	31
11 Out of Band Conducted Emissions Measurement	32
11.1. Limit.....	32
11.2. Test Setup.....	32
11.3. Test Instruments	32
11.4. Test Procedure.....	32
11.5. Test Graphs	33
12 Band Edges Measurement.....	39
12.1. Limit.....	39
12.2. Test Setup.....	39
12.3. Test Instruments	40
12.4. Test Procedure.....	40
12.5. Test Result.....	41
13 Antenna Requirement	44
13.1. Limit.....	44
13.2. Refer to statement below for compliance	44
13.3. Antenna Connector Construction.....	44
14 Exemption from Routine Evaluation Limits for FCC – SAR Evaluation.....	45



1 General Information

1.1 Applied Standard Applied Rules: FCC 47 CFR PART 15 SUBPART C: Oct., 2013 ANSI C63.10:2013
1.2 Test Location TestLocation1: A Test Lab Techno Corp. No. 140-1, Changan Street, Bade City, Taoyuan County 334, Taiwan R.O.C. Taiwan Accreditation Foundation accreditation number: 1330
1.3 Test Environment Condition Ambient Temperature: 19.5to 25°C Ambient Relative Humidity:40 to 55 % Atmospheric Pressure: Not applicable

2 Test Summary

Test Item	FCC Part No.	Requirements	Verdict
DTS (6 dB) Bandwidth	15.247(a)(2)	≥ 500 kHz.	PASS
Maximum Peak Conducted Output Power	15.247(b)(3)	For directional gain:< 30dBm – (G[dBi] –6 [dB]),peak; Other wise :< 30dBm, peak.	PASS
Maximum Power Spectral Density Level	15.247(e)	For directional gain :< 8dBm/3 kHz – (G[dBi] –6[dB]), peak. Other wise :< 8dBm/3 kHz, peak.	PASS
Band Edges Compliance	15.247(d)	< -20dB/100 kHz if total peak power \leq power limit.	PASS
Unwanted Emissions into Non-Restricted Frequency Bands	15.247(d)	< -20dB/100 kHz if total peak power \leq power limit.	PASS
Unwanted Emissions into Restricted Frequency Bands(Conducted)	15.247(d) 15.209	< -20dB/100 kHz if total peak power \leq power limit.	PASS
Unwanted Emissions into Restricted Frequency Bands(Radiated)	15.247(d) 15.209	FCC Part 15.209 field strength limit;	PASS
AC Power Line Conducted Emissions	15.207	FCC Part 15.207 conducted limit;	PASS

3 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz	± 2.02
	9kHz ~ 30MHz	± 3.14
	30MHz ~ 1000MHz	Horizontal ± 3.98
		Vertical ± 3.62
	1000MHz ~ 18000MHz	Horizontal ± 3.11
		Vertical ± 3.07
	18000MHz ~ 40000MHz	Horizontal ± 3.66
		Vertical ± 3.54

4 EUT Description

Product Type	Smart Watch
Trade Name	MyKronoz
Model No.	ZeWatch ³
Applicant	Kronoz LLC Avenue Louis Casai 18 1209 Geneva Switzerland
Manufacturer	Kronoz LLC Avenue Louis Casai 18 1209 Geneva Switzerland
FCC ID	2AA7D-ZEWH3
Frequency Range	Bluetooth v4.0 LE: 2402 ~ 2480 MHz
Modulation Type	Bluetooth v4.0 LE: GFSK
Antenna Type	Integrated Antenna
Antenna Gain	Bluetooth: 0.5 dBi
Hardware Version	V1.2
Software Version	V1.3
RF Output Power (PK)	Bluetooth v4.0 LE: 4.327 dBm / 2.708 mW
99 % Occupied Bandwidth	Bluetooth v4.0 LE: 1.0773 MHz

4.1. Customized Configurations

#EUT Conf.	Signal Description	Operating Frequency
TM1_Ch0	GFSK modulation	2402MHz
TM1_Ch19	GFSK modulation	2440MHz
TM1_Ch39	GFSK modulation	2480MHz

5 Test Methodology

5.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: Bluetooth v4.0 LE TX Mode(Fixed channel)

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown. For radiated spurious emission above 1GHz the worst case was in Mode 2. For power line conducted emissions and radiated spurious emission below 1GHz the worst case was in Mode 1. And the duty cycle is 100% during the test.


By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

5.2. EUT Exercise Software

1	Setup the EUT and assistant equipment as shown on 5.3
2	Turn on the power of all equipment.
3	Make EUT into continue transmitting mode or receiving mode under the help of PC software.


5.3. Configuration of Test System Details

Conducted Emissions

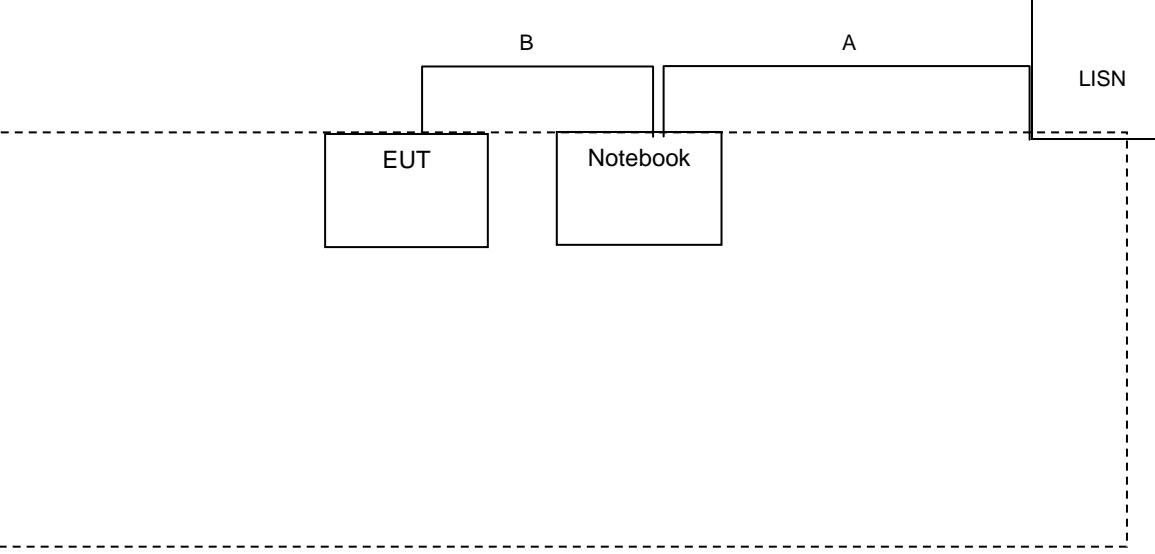Mode 1		
		
Signal Cable Type		Signal Cable Description
A	AC Power Cable	Non-Shielded, 0.8m
B	USB Power Cable	Non-Shielded, 0.2m

Auxiliary equipment description					
Product		Manufacturer	Model Number	S/N	Power Cord
(1)	Notebook	DELL	LAPITIU	6699565657	Non-Shielded, 0.8m
--	--	--	--	--	--

Radiated Emissions

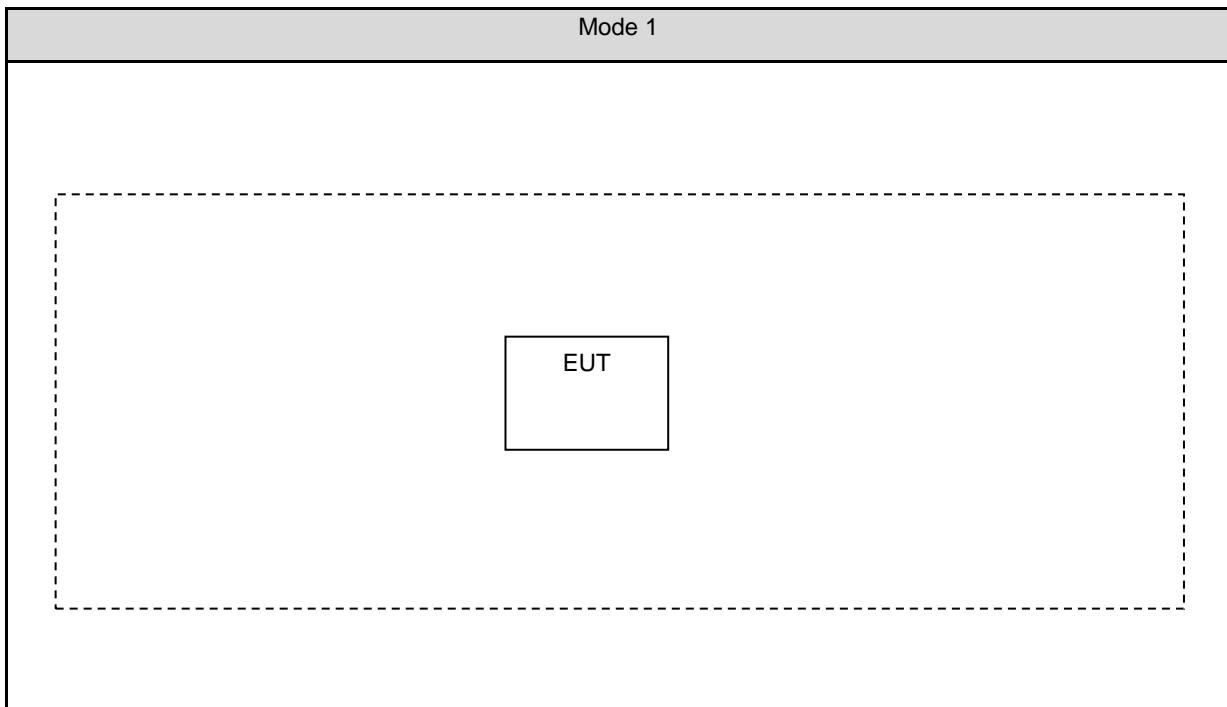

5.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

6 Conducted Emission Measurement

6.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


6.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/06/2015	(1)
LISN	R&S	ENV216	101040	03/07/2015	(1)
LISN	R&S	ENV216	101041	03/07/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----
RF cable	WOKEN	---	C.10-07-04	10/24/2014	(1)
RF cable	WOKEN	---	C.10-07-05	10/24/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request. All the RF cables apply to 9 KHz to 40GHz.

6.3. Test Setup

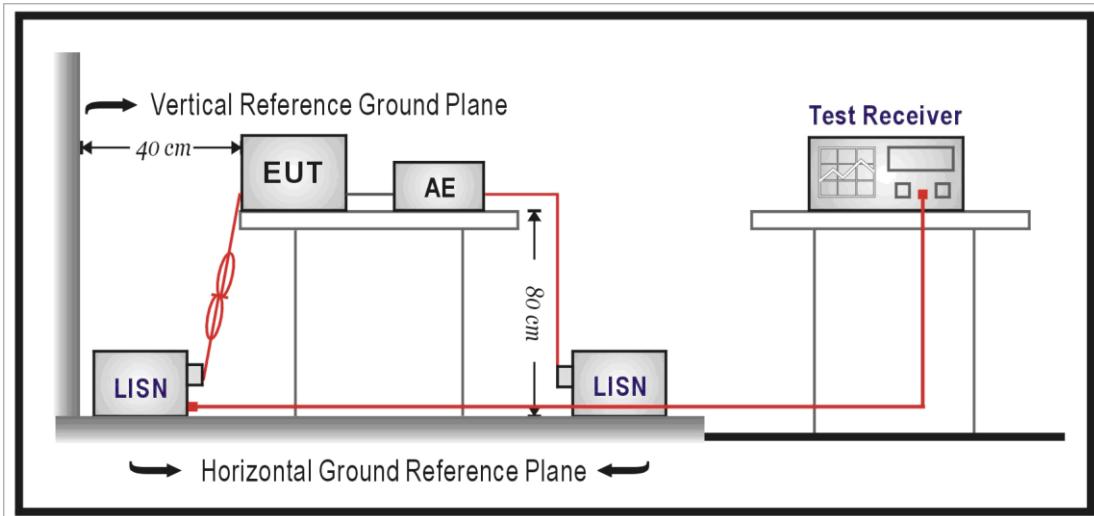



6.4. Test Procedure

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.


Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model ENV216 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

Note : After verification, EUT connects to the PC or AC adapter were carried out with the worst case test modes as shown, it is EUT connects to the PC.


6.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	ZeWatch ³	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	2015/9/21
Description:			

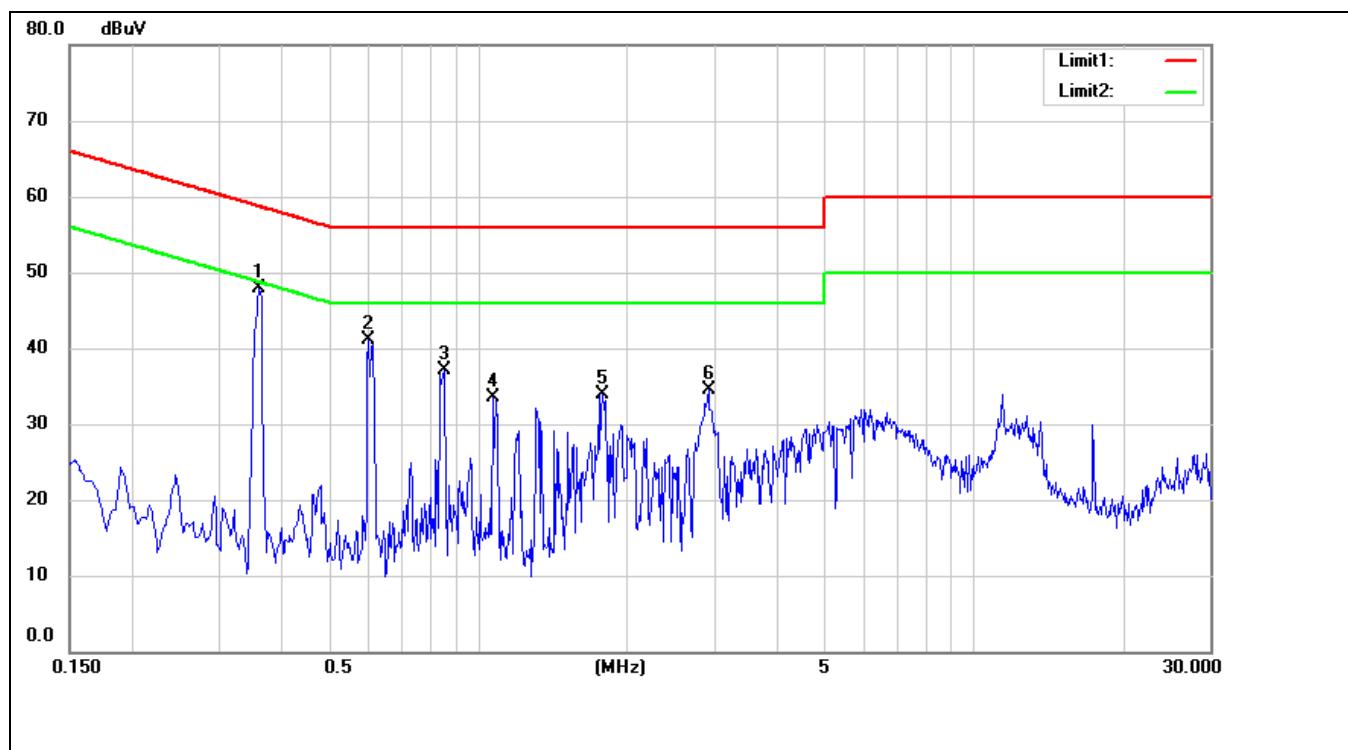

No.	Frequency (MHz)	QP Reading (dBuV)	AVG Reading (dBuV)	Correction Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)	Remark
1	0.3620	37.74	35.30	9.59	47.33	44.89	58.68	48.68	-11.35	-3.79	Pass
2	0.6020	30.65	26.01	9.60	40.25	35.61	56.00	46.00	-15.75	-10.39	Pass
3	0.8580	23.14	9.14	9.61	32.75	18.75	56.00	46.00	-23.25	-27.25	Pass
4	1.0740	22.46	13.59	9.62	32.08	23.21	56.00	46.00	-23.92	-22.79	Pass
5	1.7860	20.44	10.45	9.65	30.09	20.10	56.00	46.00	-25.91	-25.90	Pass
6	2.9220	21.49	12.24	9.69	31.18	21.93	56.00	46.00	-24.82	-24.07	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	ZeWatch ³	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	2015/9/21
Description:			

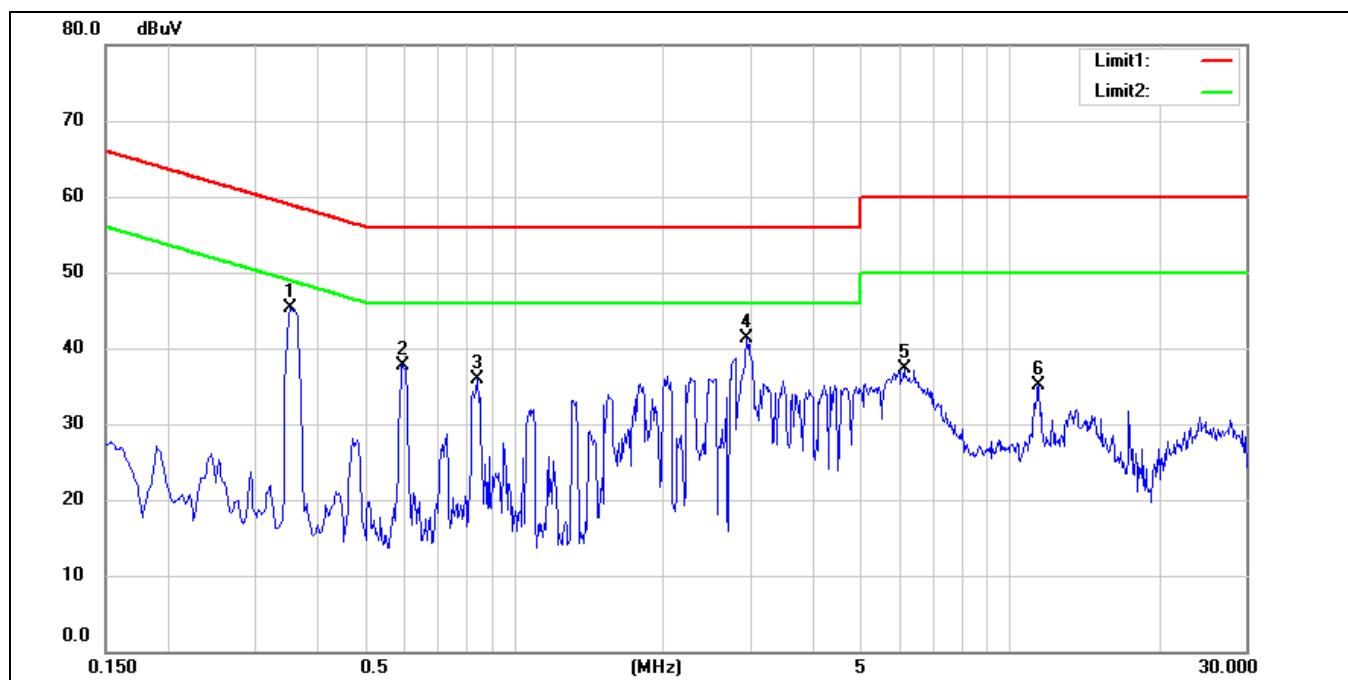

No.	Frequency (MHz)	QP Reading (dBuV)	AVG Reading (dBuV)	Correction Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)	Remark
1	0.3540	33.85	26.69	9.59	43.44	36.28	58.87	48.87	-15.43	-12.59	Pass
2	0.5980	26.97	22.21	9.60	36.57	31.81	56.00	46.00	-19.43	-14.19	Pass
3	0.8460	23.40	15.77	9.61	33.01	25.38	56.00	46.00	-22.99	-20.62	Pass
4	2.9540	27.82	8.44	9.71	37.53	18.15	56.00	46.00	-18.47	-27.85	Pass
5	6.1420	24.08	10.83	9.81	33.89	20.64	60.00	50.00	-26.11	-29.36	Pass
6	11.4660	20.40	13.15	9.95	30.35	23.10	60.00	50.00	-29.65	-26.90	Pass

7 Radiated Emission Measurement

7.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

7.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2015	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2015	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/18/2015	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2015	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/02/2015	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2014	(3)
Test Site	ATL	TE01	888001	08/28/2014	(1)
RF cable	WOKEN	---	C.10-07-07	10/24/2014	(1)
RF cable	WOKEN	---	C.10-07-08	10/24/2014	(1)
RF cable	WOKEN	---	C.10-07-09	10/24/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


Note: N.C.R. = No Calibration Request. All the RF cables apply to 9 KHz to 40GHz.

7.3. Setup


9KHz-30MHz

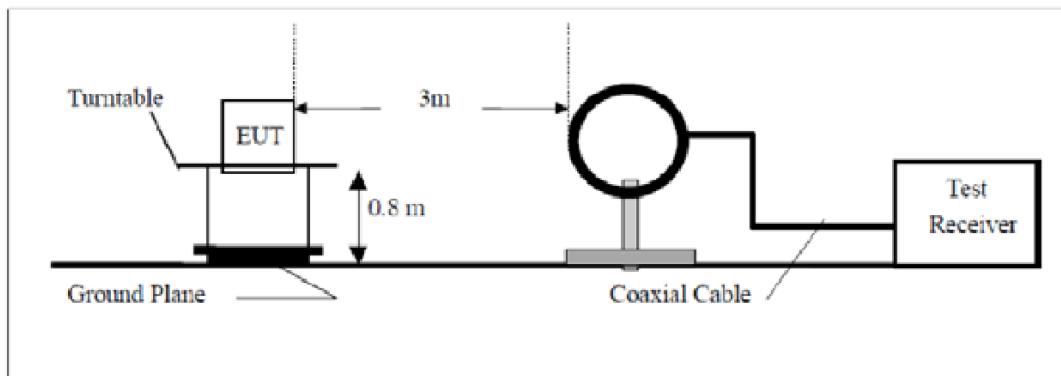

30MHz-1 GHz

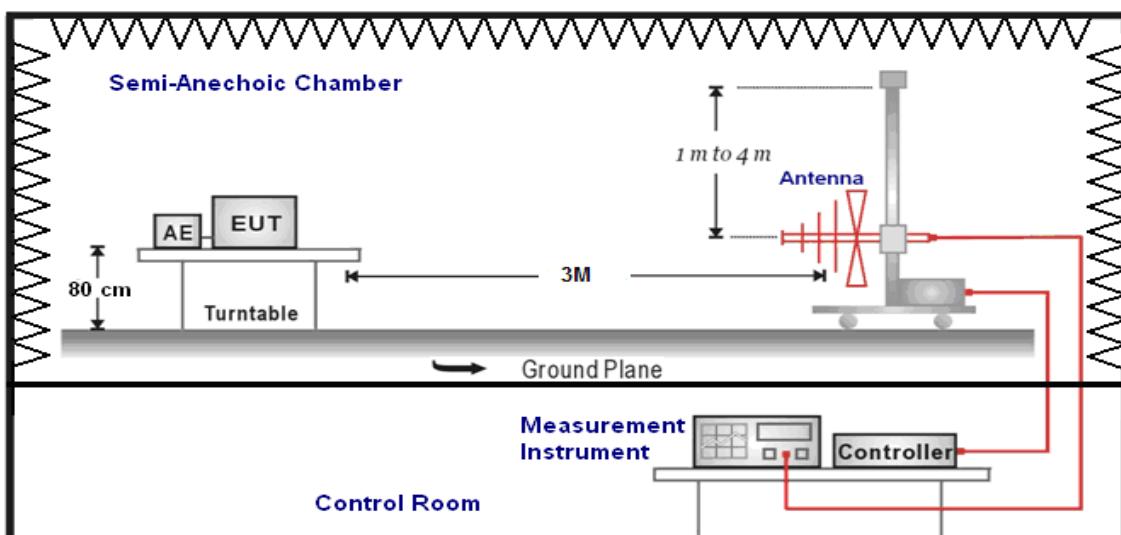

Above 1GHz

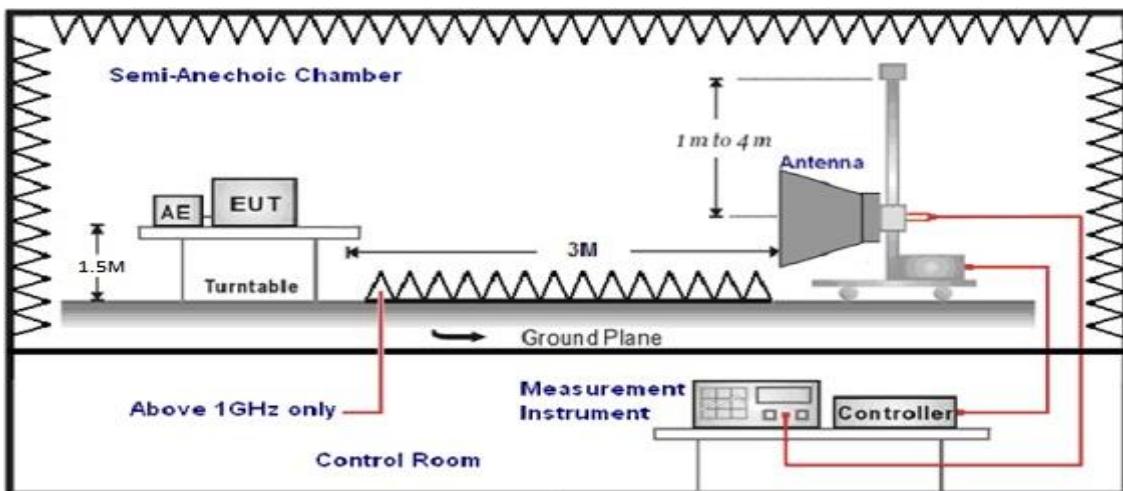

7.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height for below 1GHz and 1.5 meters height for above 1GHz, top surface 1.0 x 1.5 meter. The spectrum was examined from 9 KHz to 26.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$$



FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

- (a) For fundamental frequency : Transmitter Output < +30dBm
- (b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.




7.5. Test Result

Below 1GHz


Standard:	FCC Class B 3M Radiation		Test Distance:	3m			
Test item:	Radiated Emission			Power:	DC 3.7V		
Model Number:	ZeWatch ³			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	2015/9/25		
Frequency:	2402MHz						
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
227.5000	23.12	-12.67	10.45	46.00	-35.55	QP	H
347.0000	24.04	-8.54	15.50	46.00	-30.50	QP	H
460.0000	25.54	-6.13	19.41	46.00	-26.59	QP	H
612.5000	27.51	-3.00	24.51	46.00	-21.49	QP	H
752.0000	27.53	-0.23	27.30	46.00	-18.70	QP	H
874.0000	30.06	1.97	32.03	46.00	-13.97	QP	H
256.5000	21.75	-11.12	10.63	46.00	-35.37	QP	V
398.0000	25.98	-7.39	18.59	46.00	-27.41	QP	V
513.0000	24.71	-5.17	19.54	46.00	-26.46	QP	V
645.0000	25.17	-2.60	22.57	46.00	-23.43	QP	V
757.0000	23.17	-0.16	23.01	46.00	-22.99	QP	V
877.5000	24.80	2.07	26.87	46.00	-19.13	QP	V

Note: No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz). And only the worst case is recorded here for 30MHz to 1GHz.

Horizontal


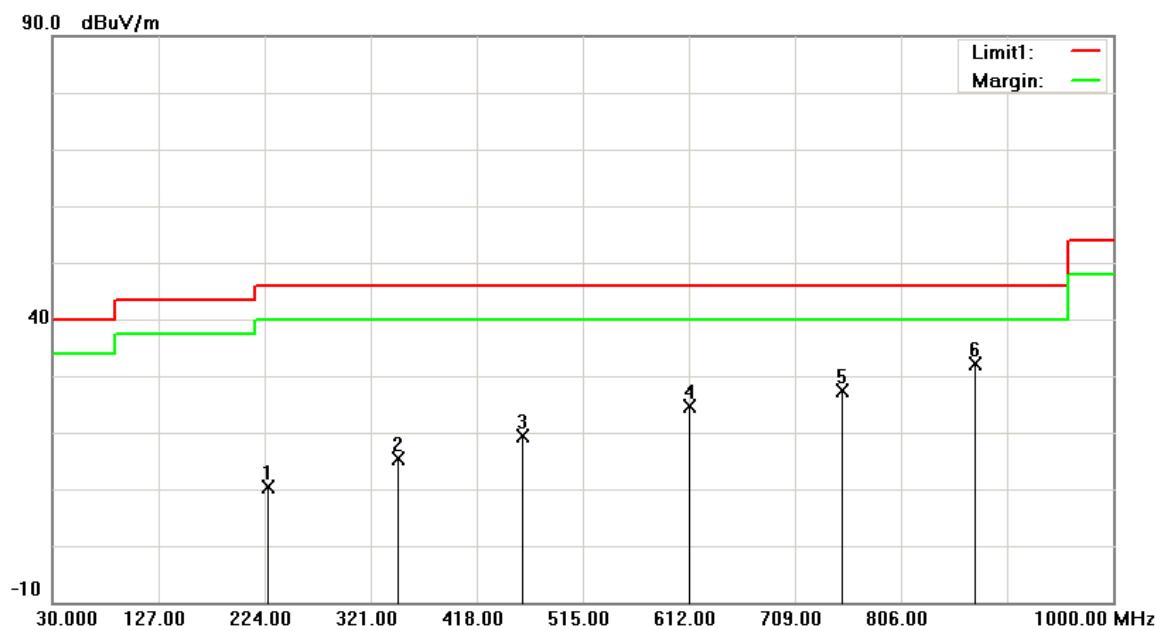


Vertical

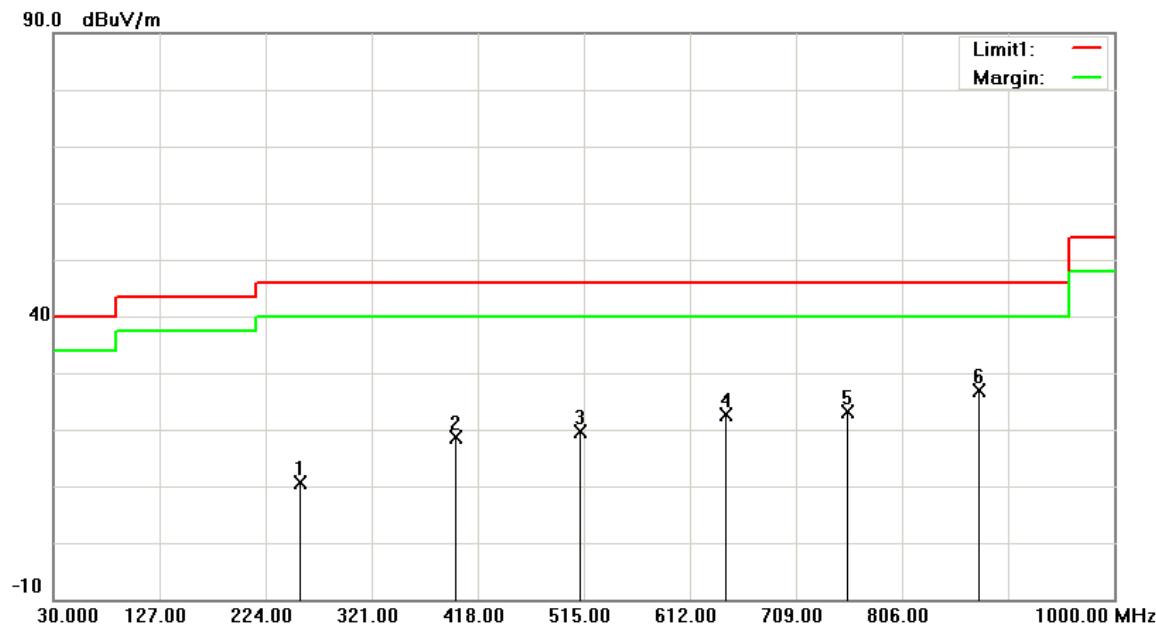


Above 1GHz

Standard:	FCC Class B 3M Radiation		Test Distance:	3m			
Test item:	Radiated Emission			Power:	DC 3.7V		
Model Number:	ZeWatch ³			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	2015/9/25		
Frequency:	2402MHz						
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3058.000	35.80	2.17	37.97	74.00	-36.03	peak	H
4605.000	31.31	6.91	38.22	74.00	-35.78	peak	H
6831.000	31.34	12.32	43.66	74.00	-30.34	peak	H
3023.000	35.71	2.01	37.72	74.00	-36.28	peak	V
4598.000	32.66	6.89	39.55	74.00	-34.45	peak	V
6733.000	31.24	12.12	43.36	74.00	-30.64	peak	V

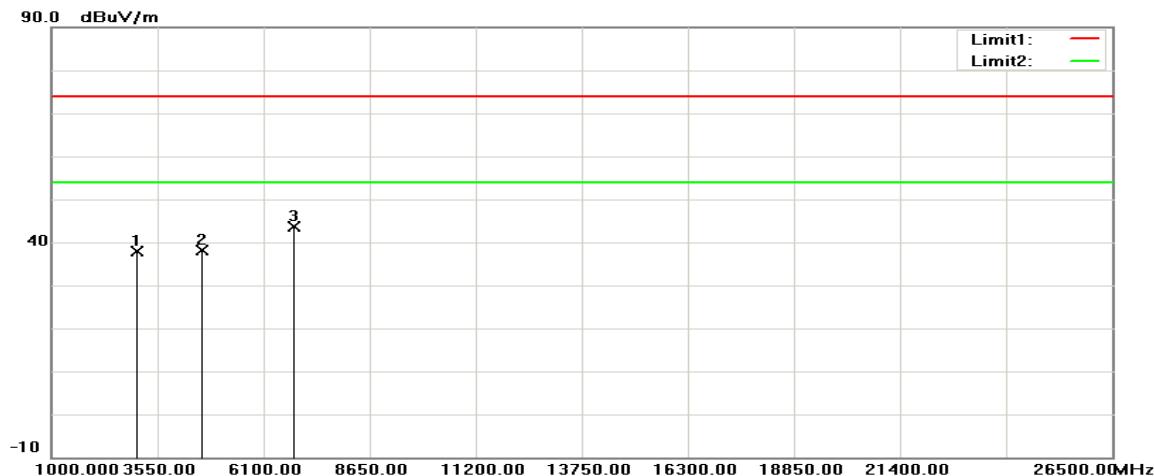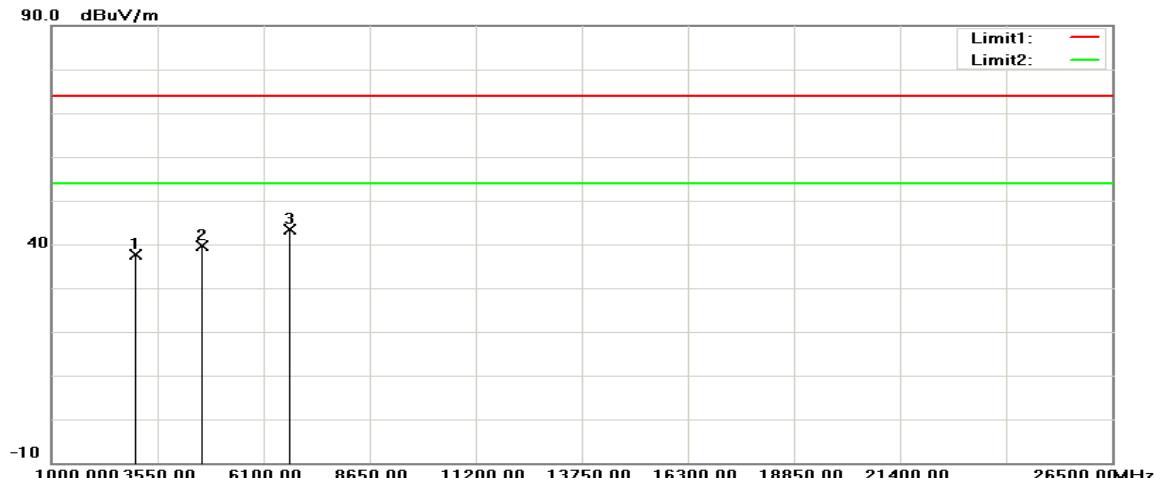
Horizontal

Vertical


Standard:	FCC Class B 3M Radiation		Test Distance:	3m			
Test item:	Radiated Emission			Power:	DC 3.7V		
Model Number:	ZeWatch ³			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	2015/9/25		
Frequency:	2440MHz						
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3065.000	35.64	2.20	37.84	74.00	-36.16	peak	H
4633.000	30.40	7.00	37.40	74.00	-36.60	peak	H
6691.000	32.79	12.04	44.83	74.00	-29.17	peak	H
3023.000	34.98	2.01	36.99	74.00	-37.01	peak	V
4619.000	30.93	6.95	37.88	74.00	-36.12	peak	V
6705.000	31.54	12.07	43.61	74.00	-30.39	peak	V


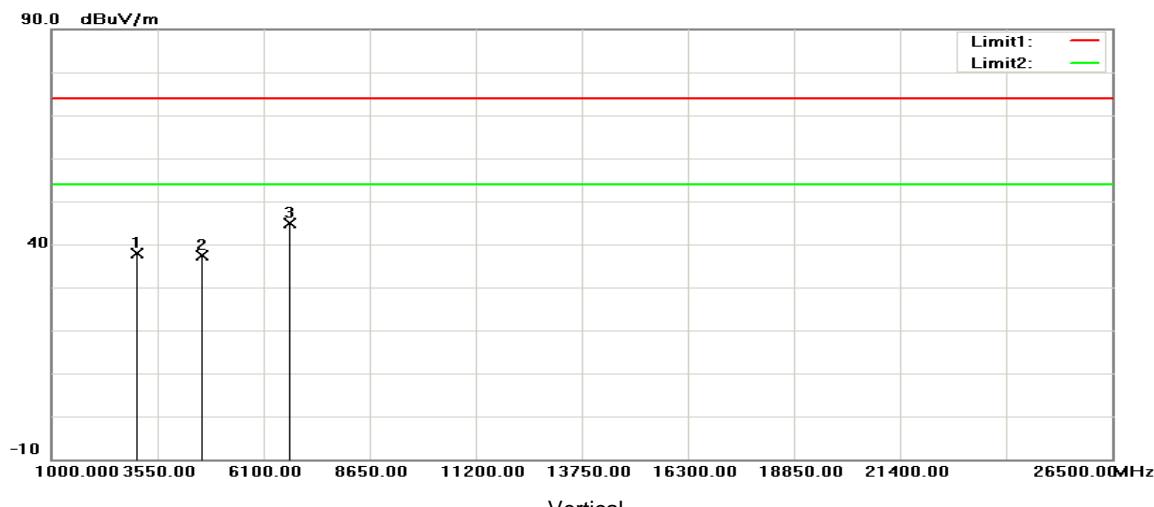
Horizontal

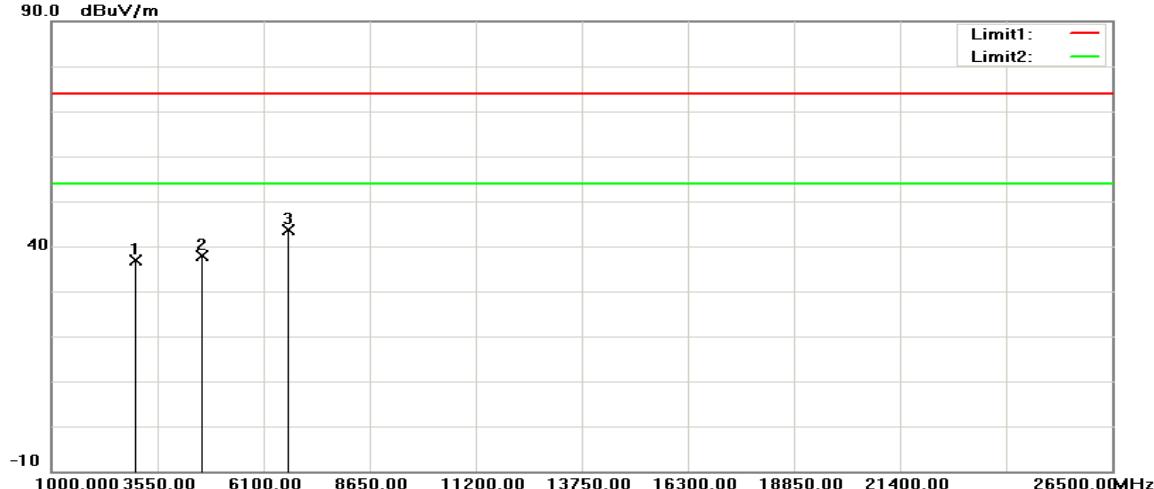

Vertical



Standard:	FCC Class B 3M Radiation	Test Distance:	3m				
Test item:	Radiated Emission	Power:	DC 3.7V				
Model Number:	ZeWatch ³	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	2	Date:	2015/9/25				
Frequency:	2480MHz						
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2974.000	35.89	1.83	37.72	74.00	-36.28	peak	H
4591.000	32.28	6.86	39.14	74.00	-34.86	peak	H
6691.000	32.73	12.04	44.77	74.00	-29.23	peak	H
3030.000	35.77	2.05	37.82	74.00	-36.18	peak	V
4598.000	32.14	6.89	39.03	74.00	-34.97	peak	V
6726.000	32.03	12.11	44.14	74.00	-29.86	peak	V

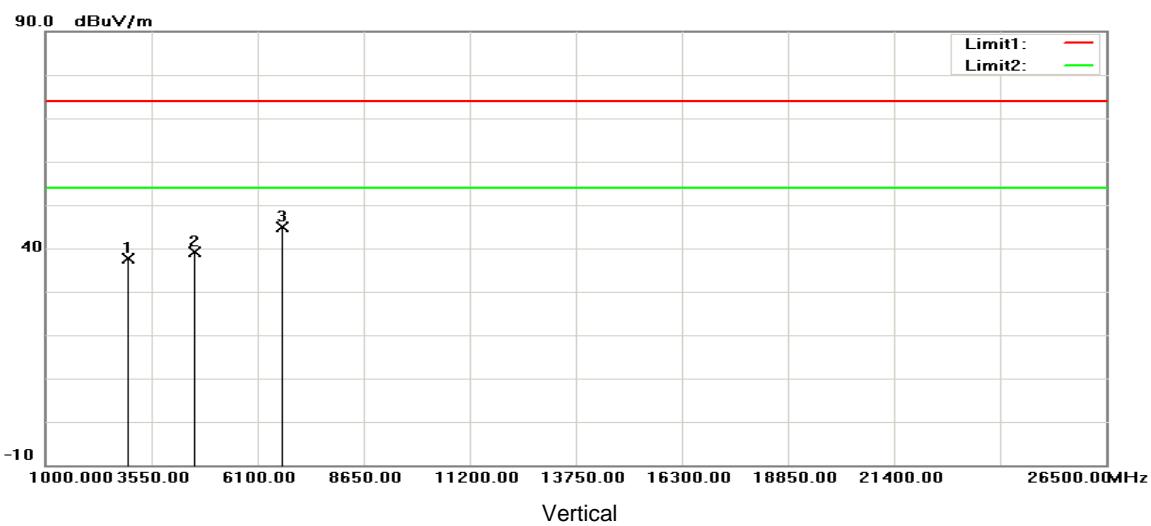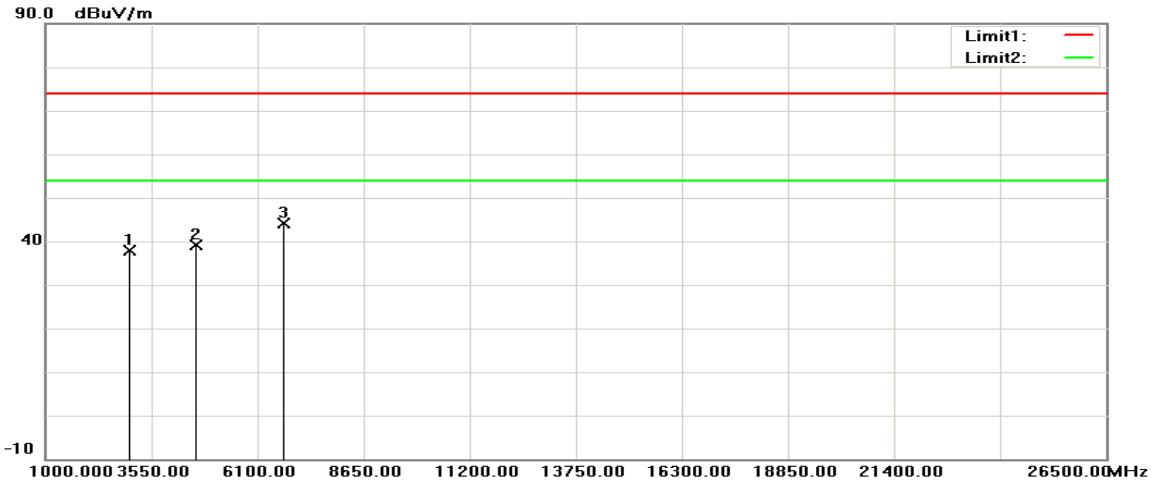
Horizontal

Vertical


8 Maximum Conducted Output Power Measurement

8.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

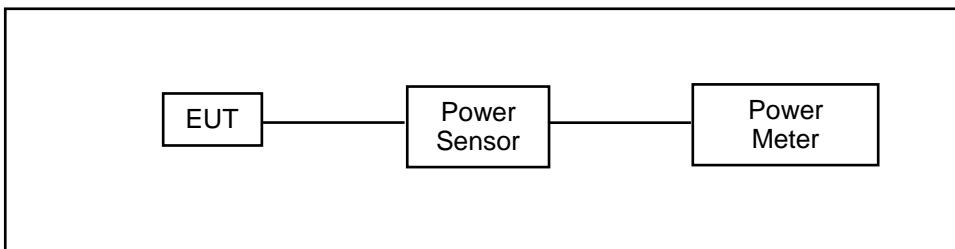8.2. Test Setup



8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/15/2014	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/15/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----
RF cable	WOKEN	---	C.10-07-02	10/24/2014	(1)
RF cable	WOKEN	---	C.10-07-03	10/24/2014	(1)
Temporary antenna connector	---	---	A01-224	05/24/2015	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

All the RF cables apply to 9 KHz to 40GHz. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

8.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to $(GAIN - 6)/3$ dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.



8.5. Test Result

Model Number	ZeWatch ³		
Test Item	Maximum Conducted Output Power		
Test Mode	Mode 2		
Date of Test	2015/09/16	Test Site	TE05
Frequency (MHz)	Peak Power		Limit (dBm)
	(dBm)	(mW)	
2402	4.327	2.708	< 30
2440	3.934	2.474	< 30
2480	3.186	2.083	< 30


9 6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

9.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

9.2. Test Setup

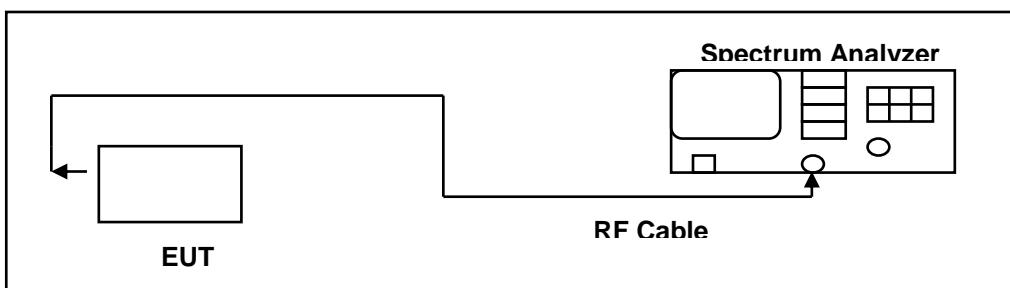

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY53420615	05/12/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----
RF cable	WOKEN	---	C.10-07-02	10/24/2014	(1)
RF cable	WOKEN	---	C.10-07-03	10/24/2014	(1)
Temporary antenna connector	---	---	A01-224	05/24/2015	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

All the RF cables apply to 9 KHz to 40GHz. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

9.4. Test Procedure

The EUT was setup to ANSI C63.10:2013; tested for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

99 % Occupied Bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.



9.5. Test Result

Model Number	ZeWatch ³		
Test Item	6dB RF Bandwidth & 99 % Occupied Bandwidth		
Test Mode	Mode 2		
Date of Test	2015/09/16	Test Site	TE05
Frequency (MHz)	6dB Bandwidth (kHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
2402	681.0	1.0773	≤500
2440	673.7	1.0764	≤500
2480	701.3	1.0752	≤500

9.6. Test Graphs

Mode 2


2402	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>20.0</p> <p>10.0</p> <p>0.0</p> <p>-10.0</p> <p>-20.0</p> <p>-30.0</p> <p>-40.0</p> <p>-50.0</p> <p>-60.0</p> <p>Center 2.402 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.0773 MHz</p> <p>Total Power 10.5 dBm</p> <p>Transmit Freq Error 28.695 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 681.0 kHz</p> <p>x dB -6.00 dB</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Center Freq 2.402000000 GHz</p>
2440	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz</p> <p>Ref Offset 10.45 dB</p> <p>Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>20.0</p> <p>10.0</p> <p>0.0</p> <p>-10.0</p> <p>-20.0</p> <p>-30.0</p> <p>-40.0</p> <p>-50.0</p> <p>-60.0</p> <p>Center 2.44 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.0764 MHz</p> <p>Total Power 10.1 dBm</p> <p>Transmit Freq Error 28.468 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 673.7 kHz</p> <p>x dB -6.00 dB</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Center Freq 2.440000000 GHz</p>
2480	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 10.45 dB</p> <p>Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>20.0</p> <p>10.0</p> <p>0.0</p> <p>-10.0</p> <p>-20.0</p> <p>-30.0</p> <p>-40.0</p> <p>-50.0</p> <p>-60.0</p> <p>Center 2.48 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.0752 MHz</p> <p>Total Power 9.35 dBm</p> <p>Transmit Freq Error 25.654 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 701.3 kHz</p> <p>x dB -6.00 dB</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Center Freq 2.480000000 GHz</p>

10 Maximum Power Density Measurement

10.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

10.2. Test Setup

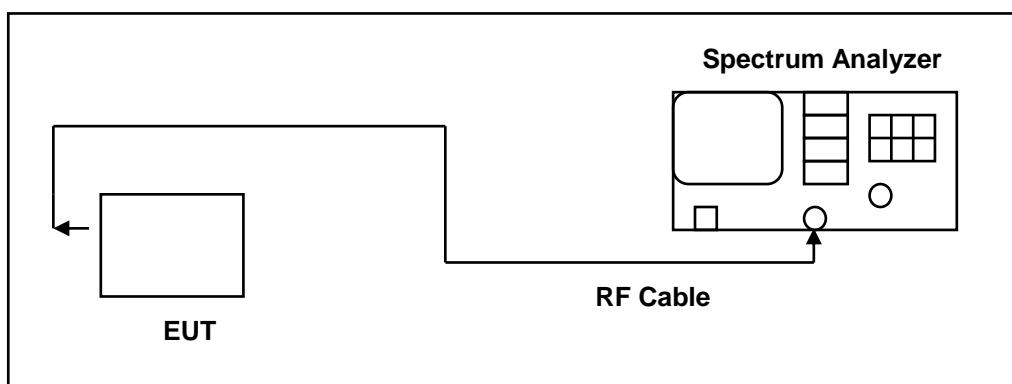

10.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY53420615	05/12/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----
RF cable	WOKEN	---	C.10-07-02	10/24/2014	(1)
RF cable	WOKEN	---	C.10-07-03	10/24/2014	(1)
Temporary antenna connector	---	---	A01-224	05/24/2015	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

All the RF cables apply to 9 KHz to 40GHz. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

10.4. Test Procedure

The EUT was setup to ANSI C63.10:2013; tested for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.


7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.5. Test Result

Model Number	ZeWatch ³		
Test Item	Maximum Power Density		
Test Mode	Mode 2		
Date of Test	2015/9/16	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm/3kHz)
2402	-7.854		< 8
2440	-9.271		< 8
2480	-9.808		< 8

10.6. Test Graphs

Mode 2

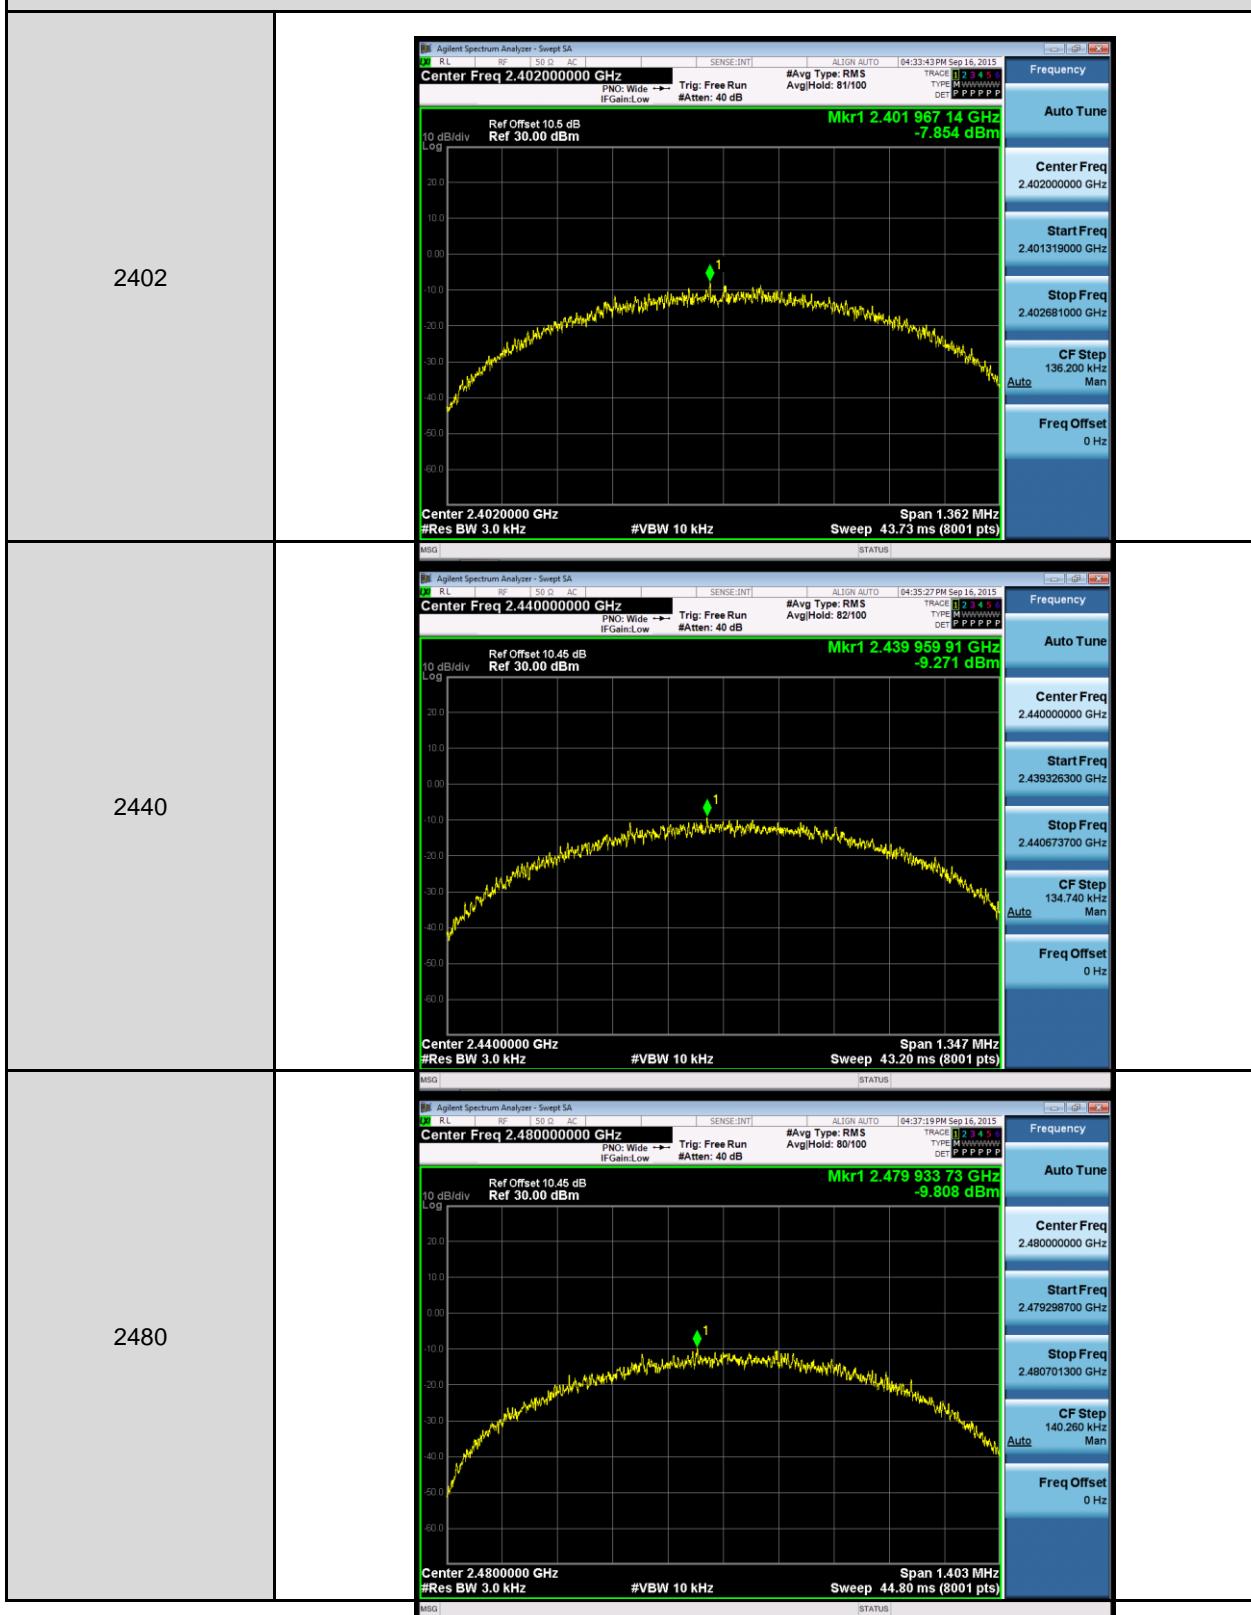


11 Out of Band Conducted Emissions Measurement

11.1.Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

11.2.Test Setup

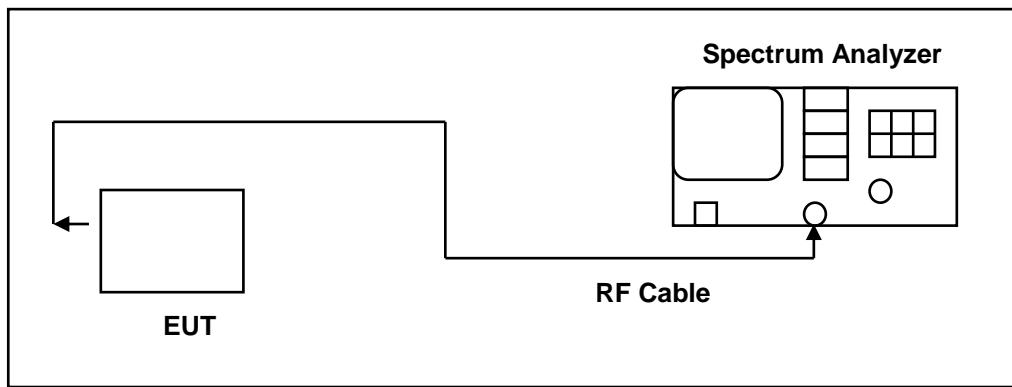

11.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY53420615	05/12/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----
RF cable	WOKEN	---	C.10-07-02	10/24/2014	(1)
RF cable	WOKEN	---	C.10-07-03	10/24/2014	(1)
Temporary antenna connector	---	---	A01-224	05/24/2015	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

All the RF cables apply to 9 KHz to 40GHz. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

11.4.Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.


All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.


The test was performed at 3 channels.


11.5. Test Graphs


Reference level




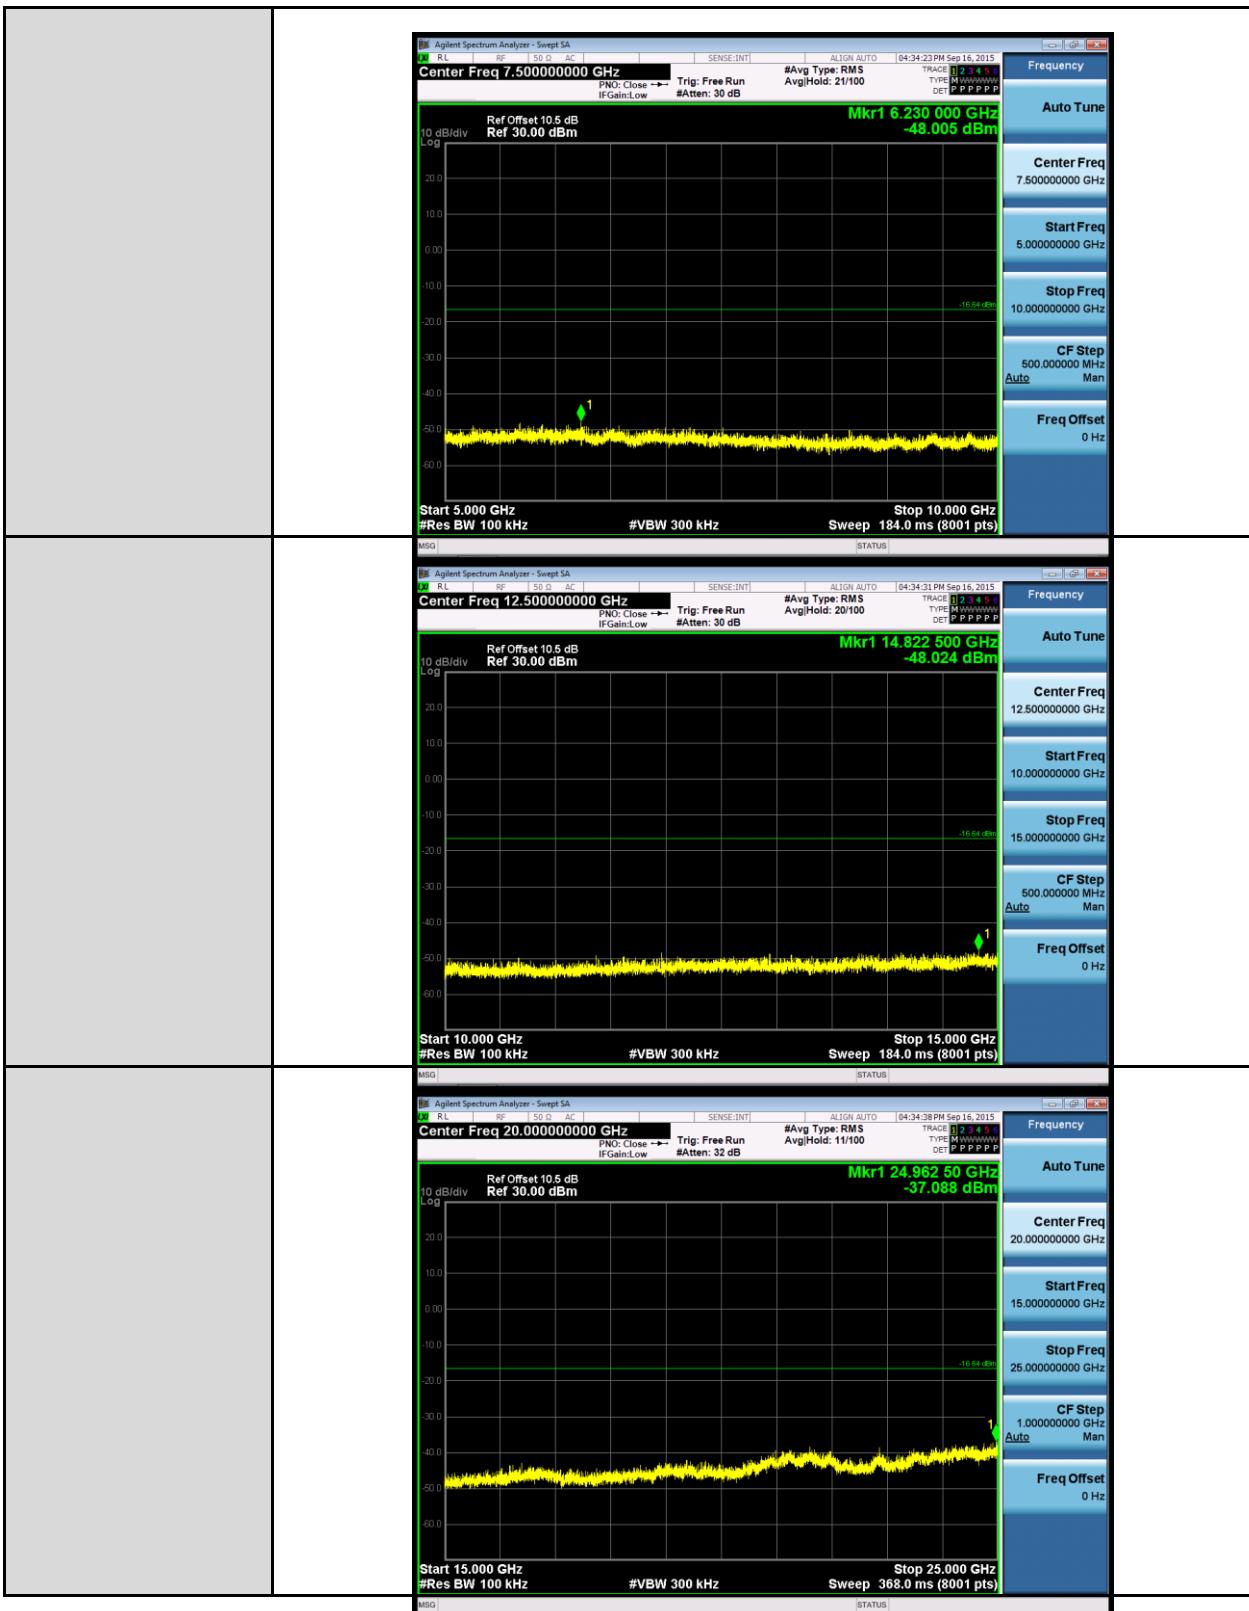

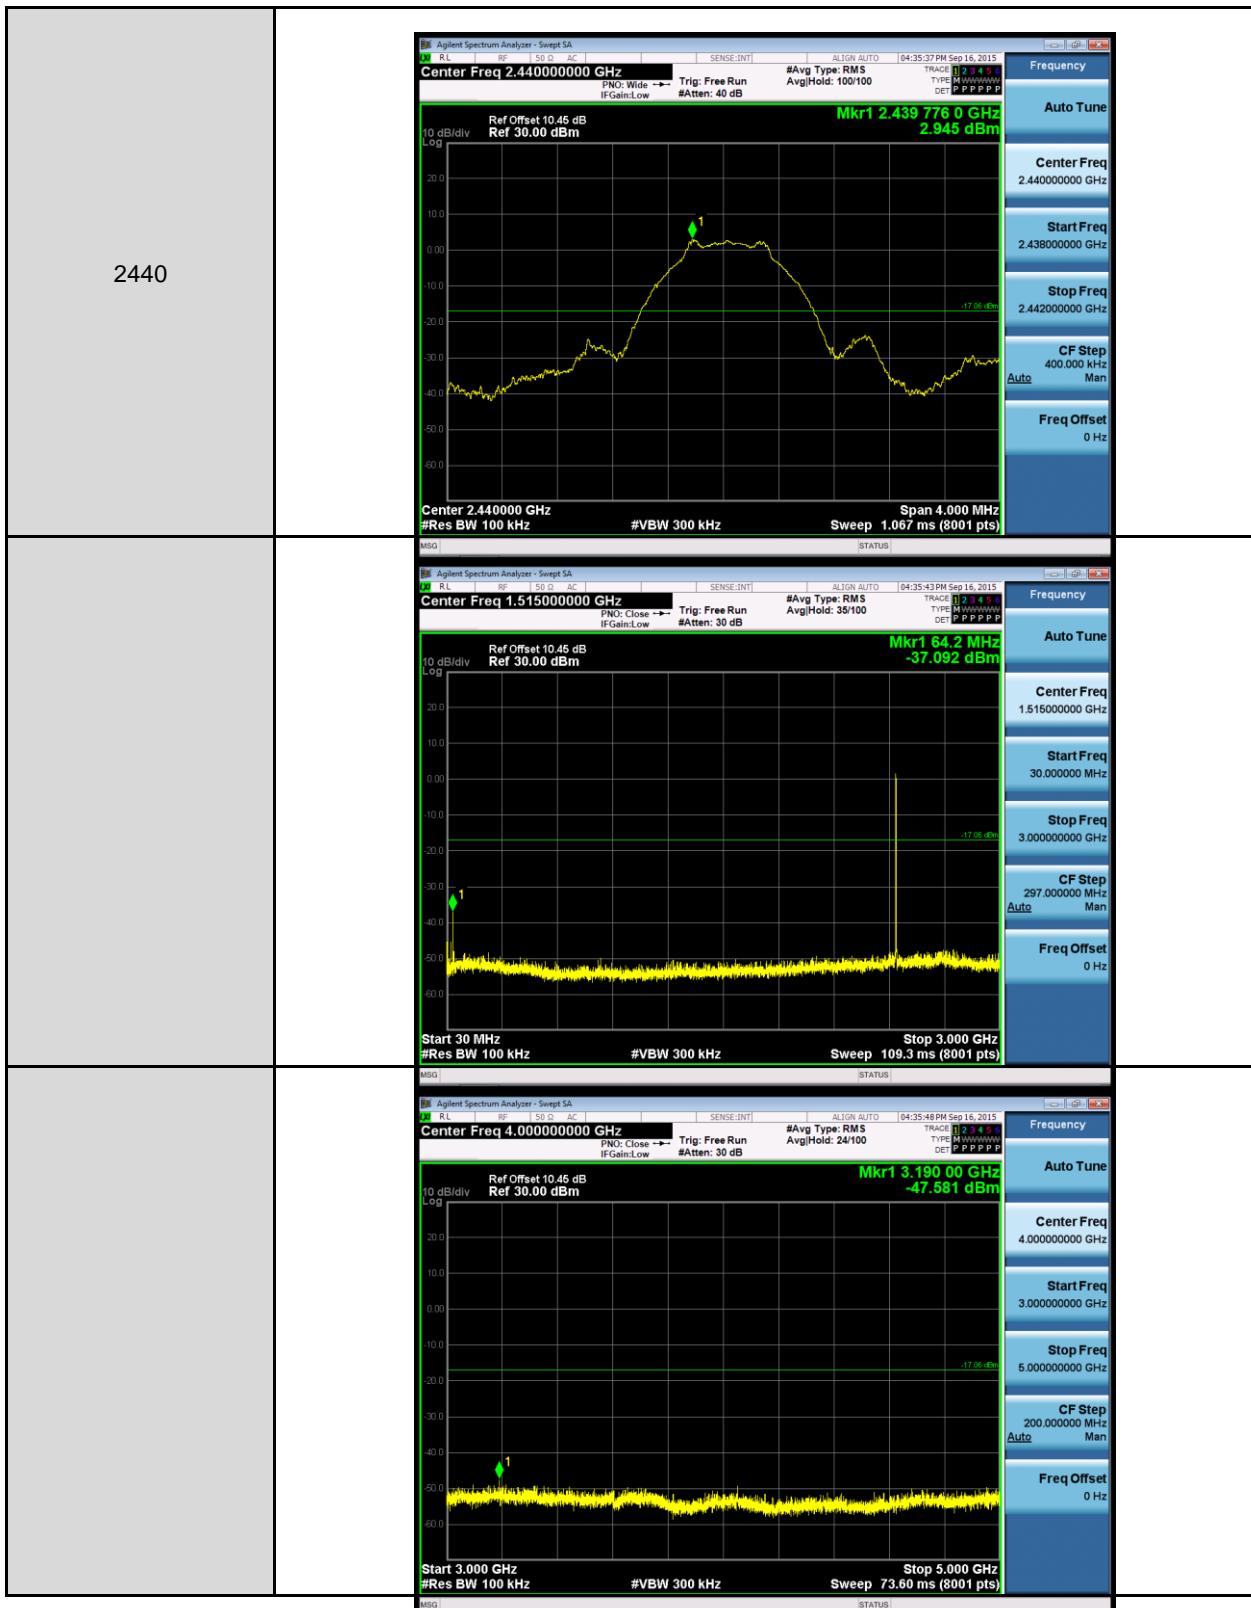

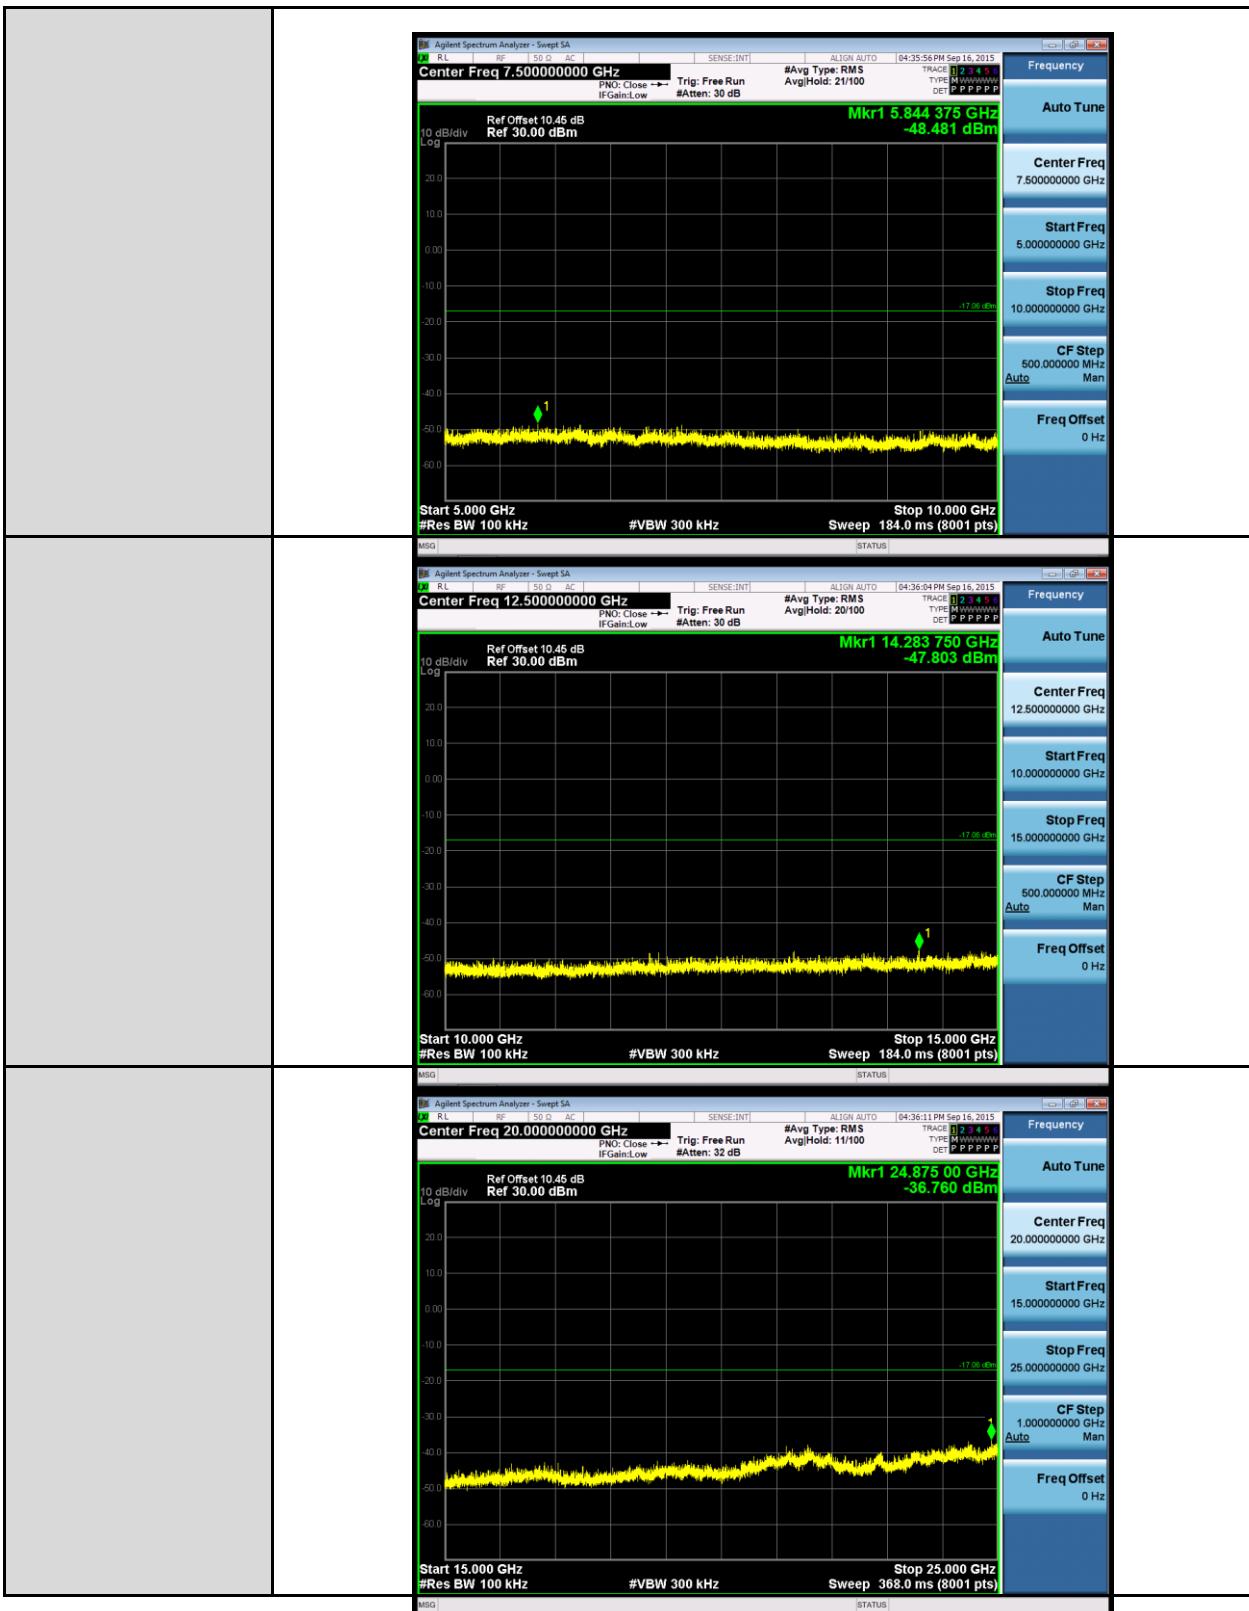

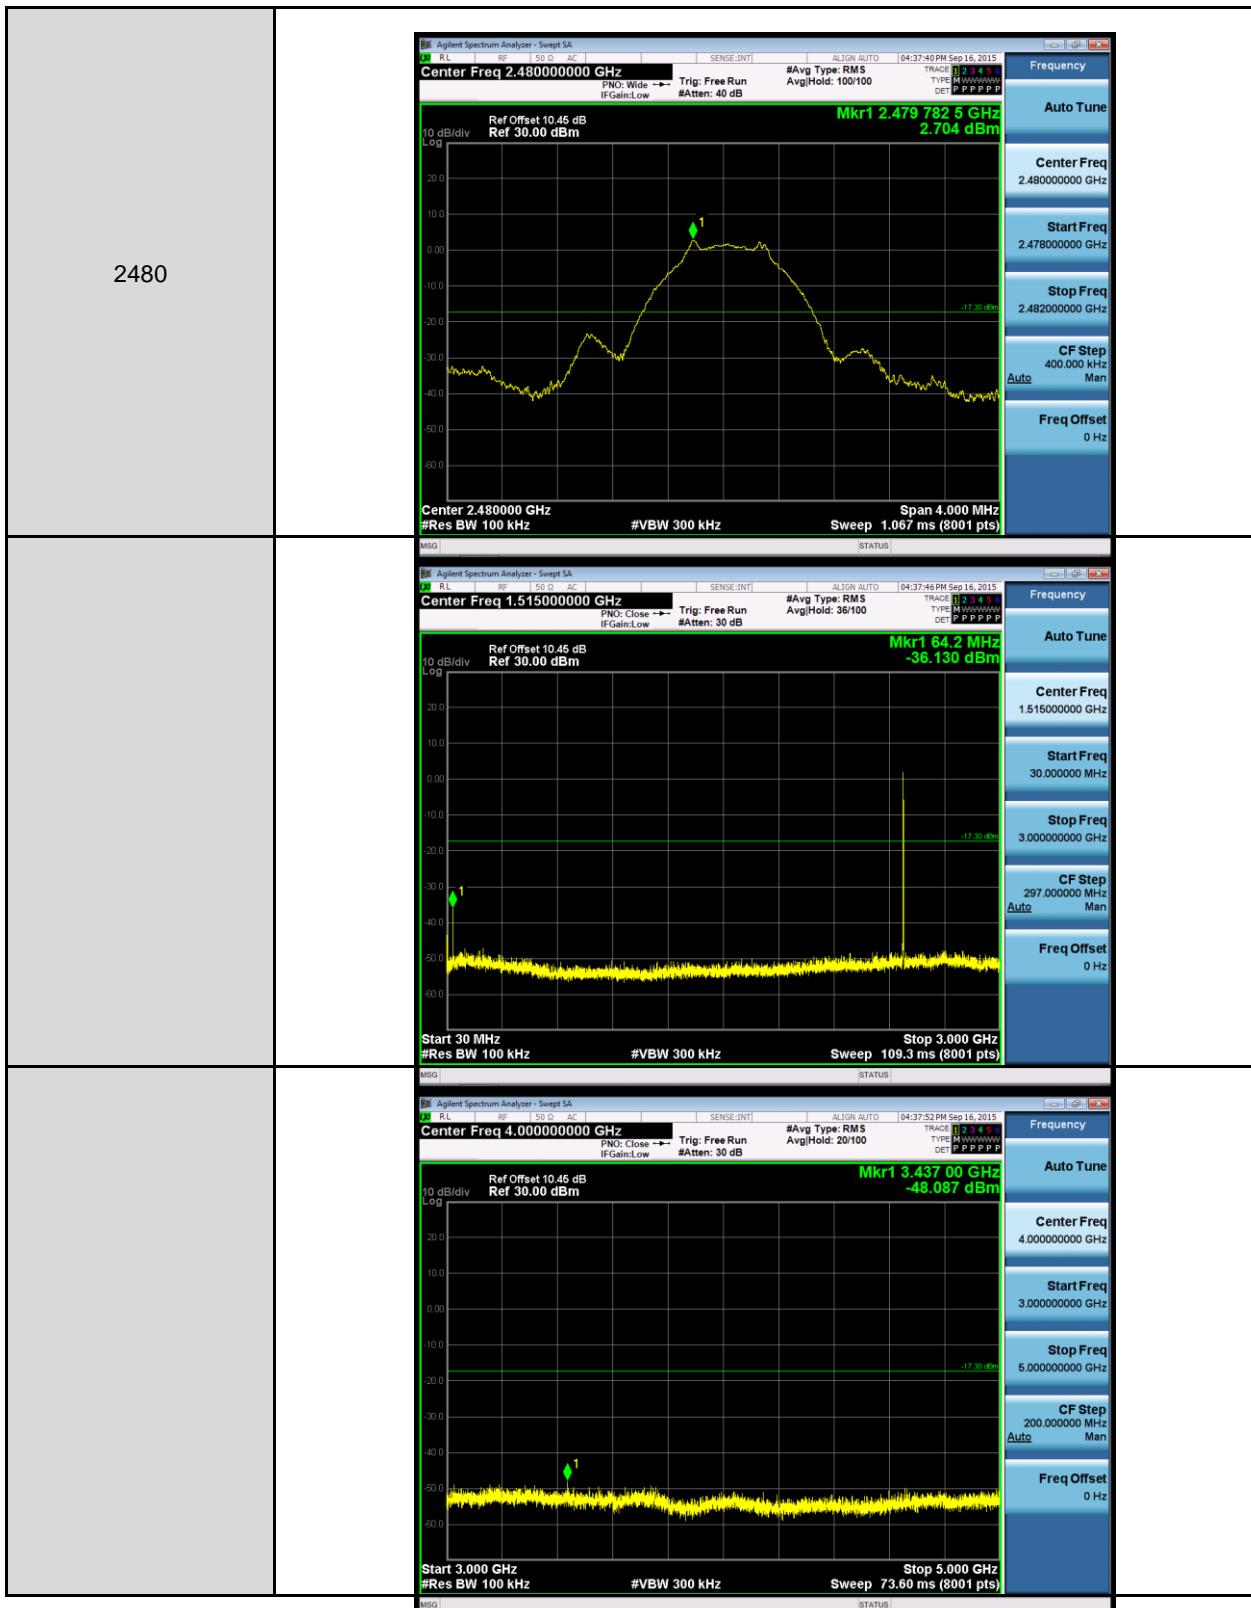

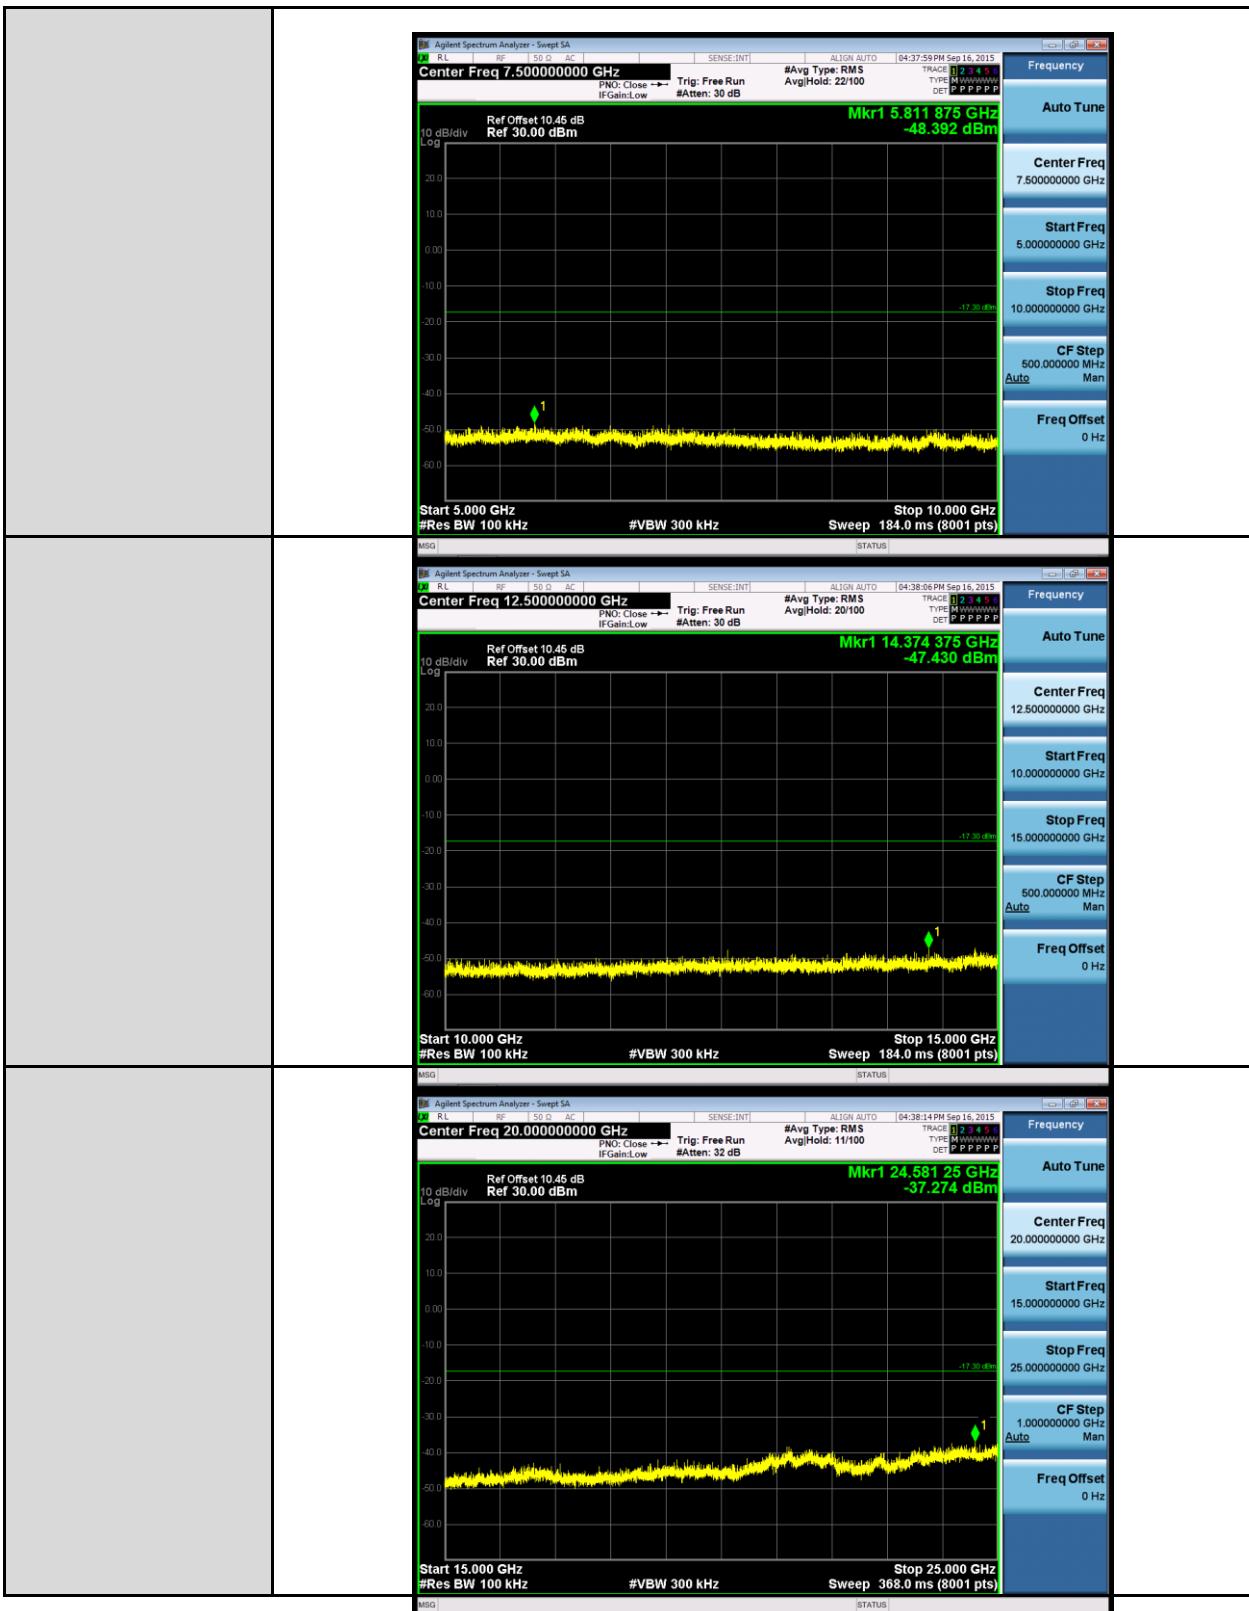


12 Band Edges Measurement

12.1. Limit


In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

12.2. Test Setup

radiated method

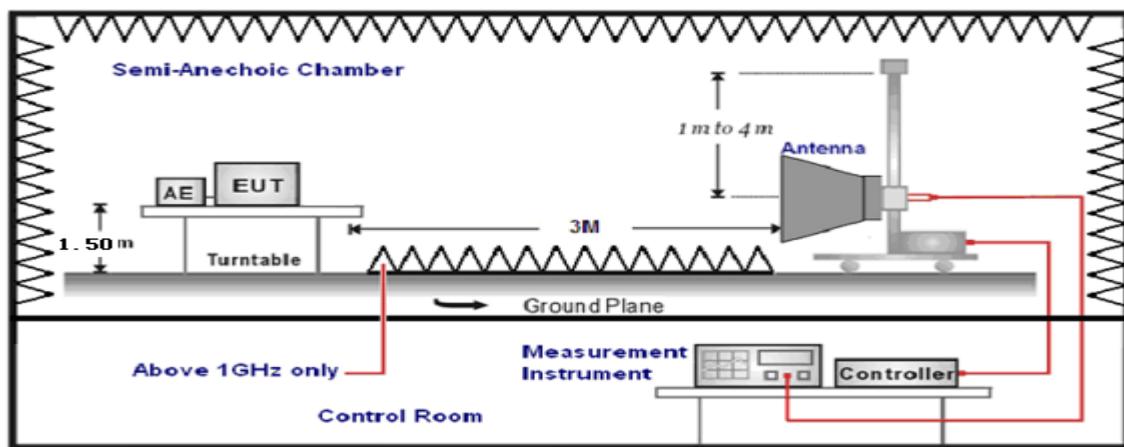

conducted method

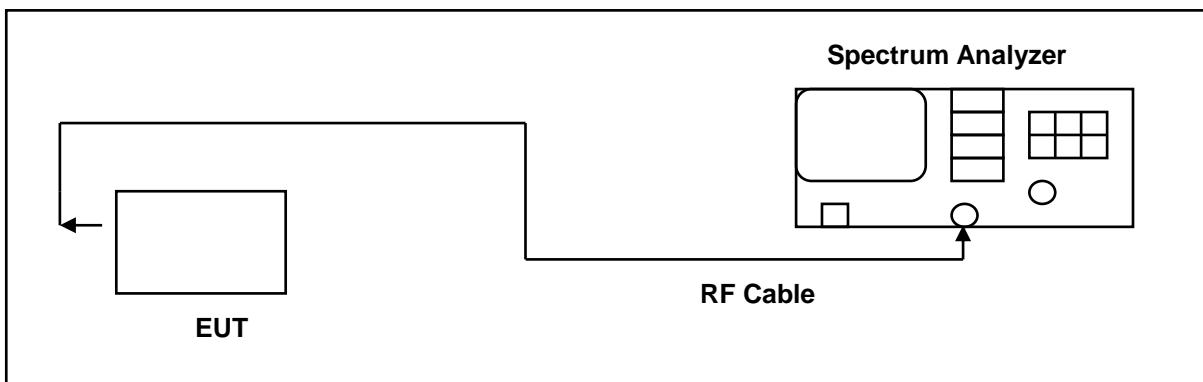



12.3. Test Instruments

3 Meter Chamber					
Model No.	Equipment	Manufacturer	Serial Number	Cal. Date	Remark
9X6X6	3m Semi-anechoic chamber	Albatross Projects	SB3450/01	Oct.12, 2013	2 Years
HF907	Horn Antenna	Rohde & Schwarz	100309	May.15,2015	1 Year
SCU26	Pre Amplifier	Rohde & Schwarz	10020	May.15.2014	2 Years
SCU40	Pre Amplifier	Rohde & Schwarz	10015	May.15.2014	2 Years
ESU40	Test Receiver	Rohde & Schwarz	100263	May.15.2014	2 Years
---	RF cable	WOKEN	S02-1404-09-065	May.11.2015	1 year
---	RF cable	WOKEN	S02-1404-09-047	May.11.2015	1 year
---	RF cable	WOKEN	S02-1404-09-052	May.11.2015	1 year

For Conducted

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY53420615	05/12/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----
RF cable	WOKEN	---	C.10-07-02	10/24/2014	(1)
RF cable	WOKEN	---	C.10-07-03	10/24/2014	(1)
Temporary antenna connector	---	---	A01-224	05/24/2015	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

All the RF cables apply to 9 KHz to 40GHz. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

12.4. Test Procedure

The EUT was setup to ANSI C63.10:2013; tested for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.


The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz.


For the restricted band the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


For the non-restricted band the resolution bandwidth is set to 100 KHz, and then the video bandwidth is set to 300 KHz for peak measurements.

12.5. Test Result

Conducted Band Edge

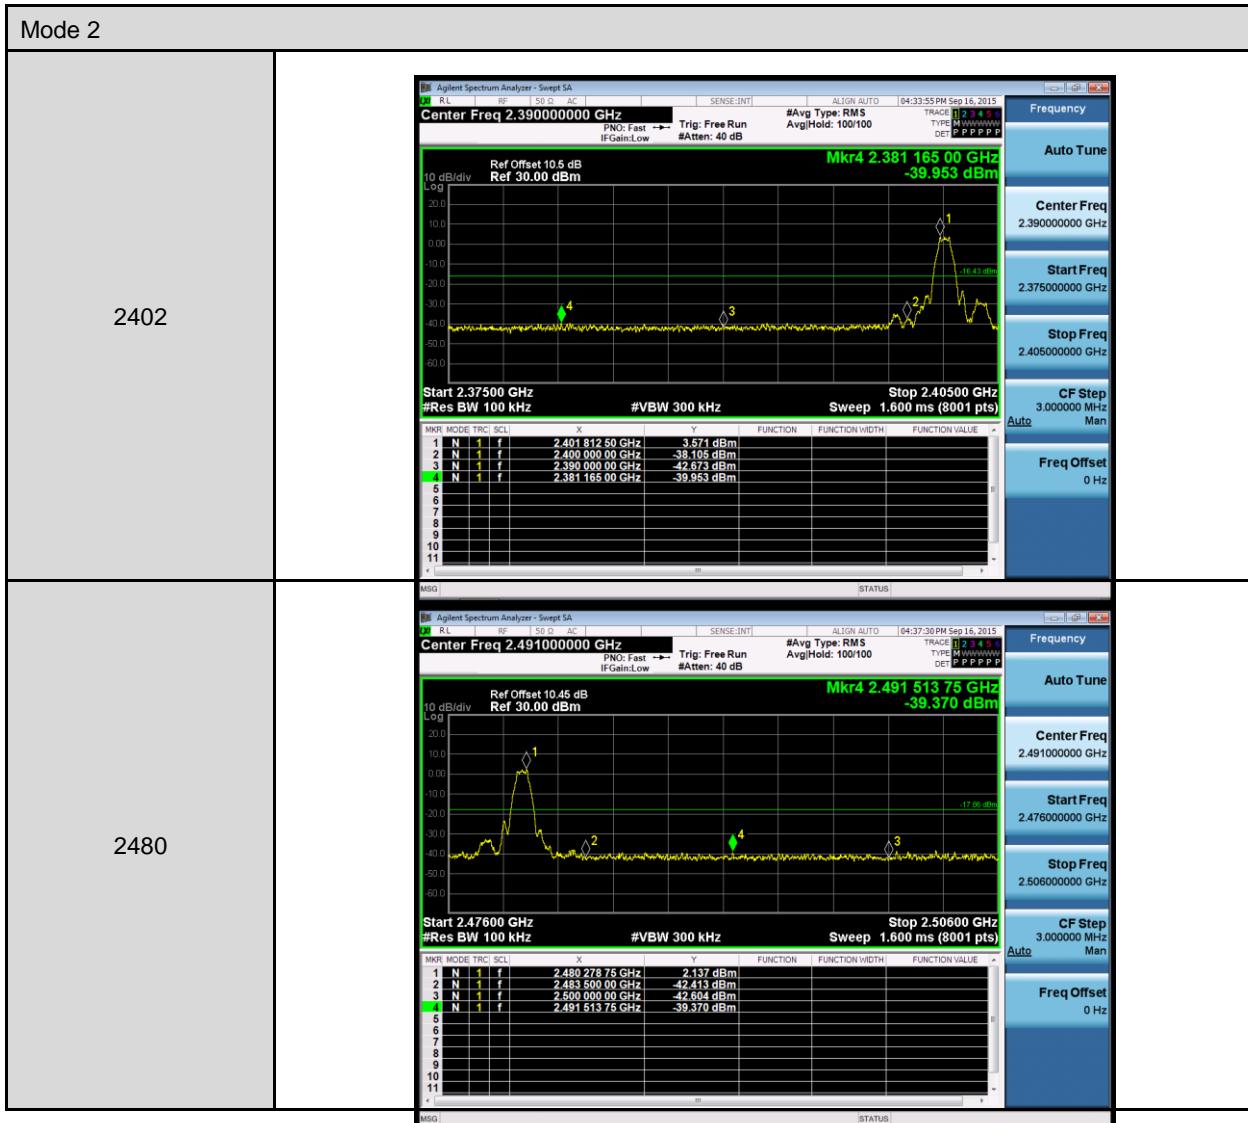

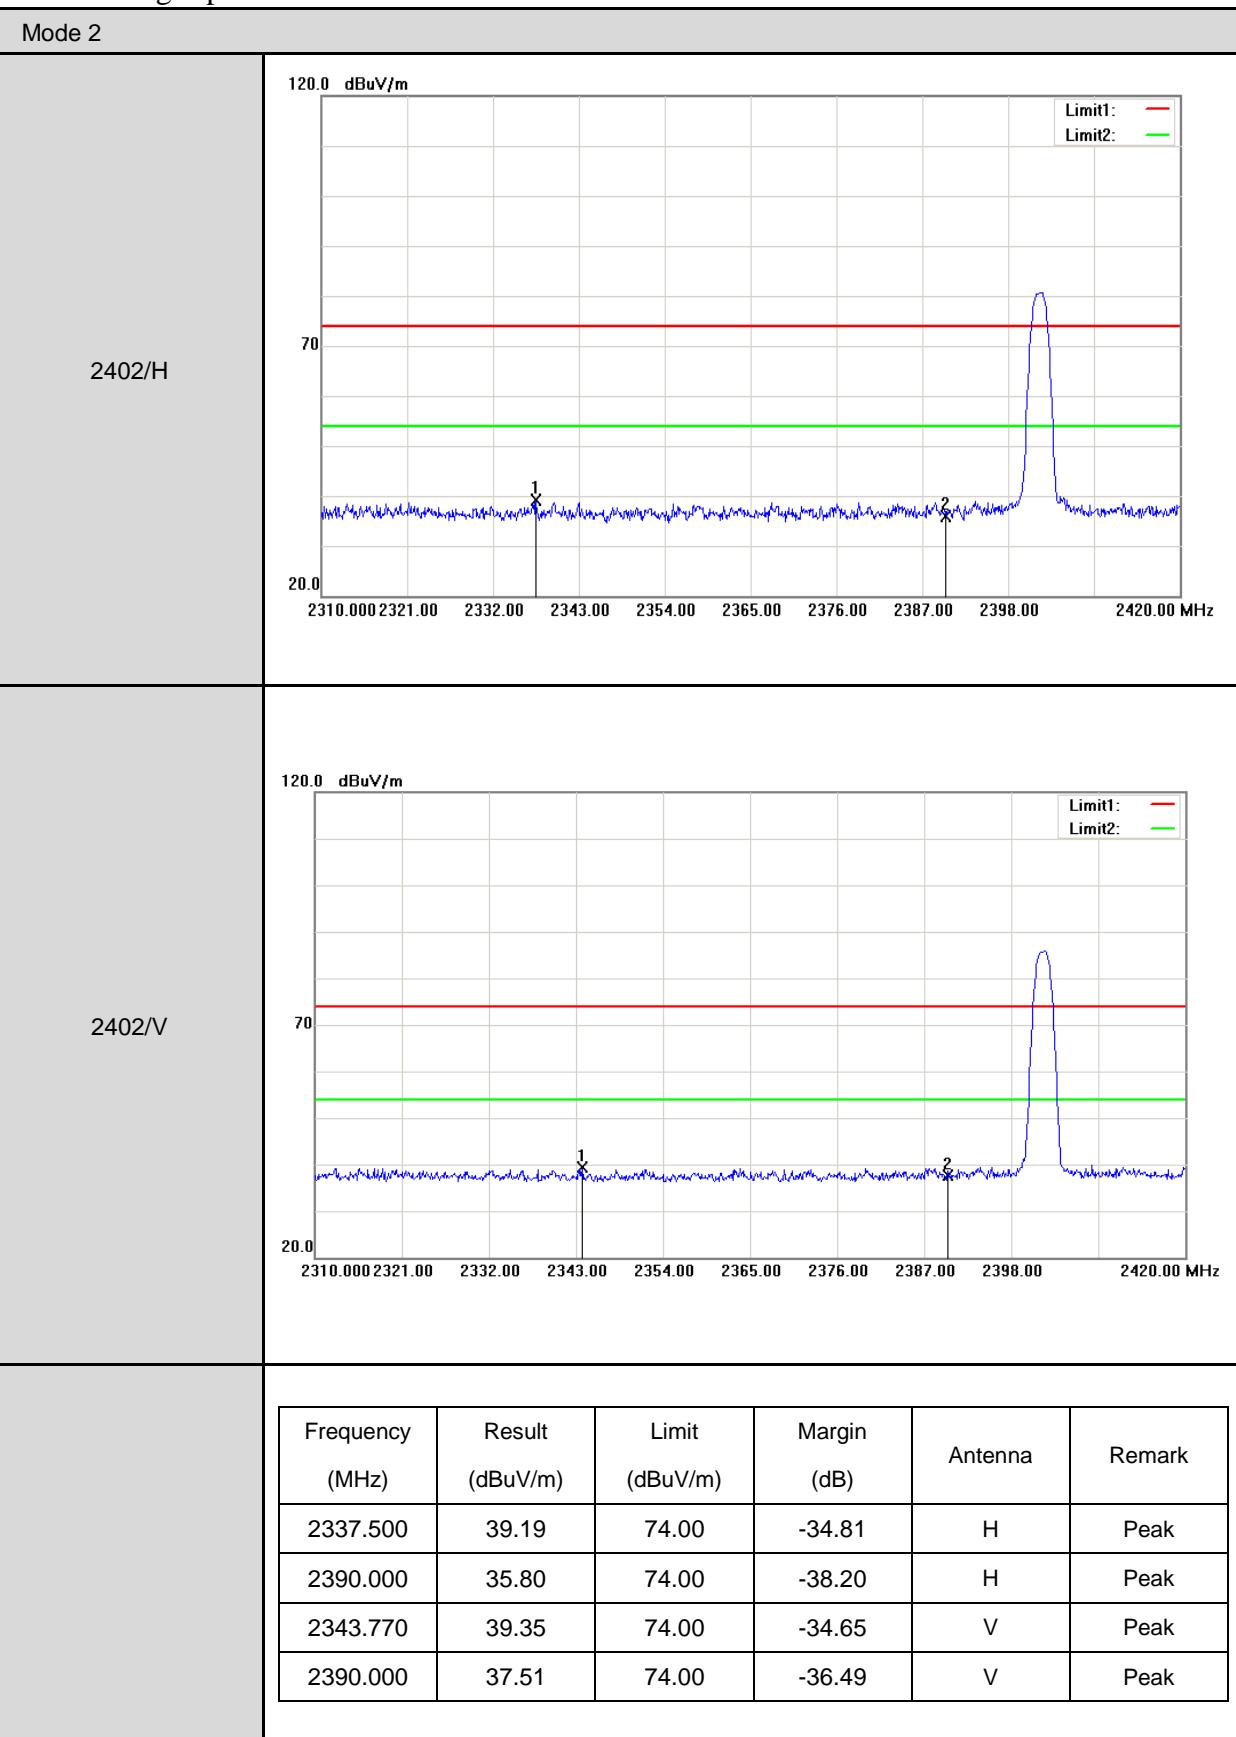Radiated Band Edge spurious emission

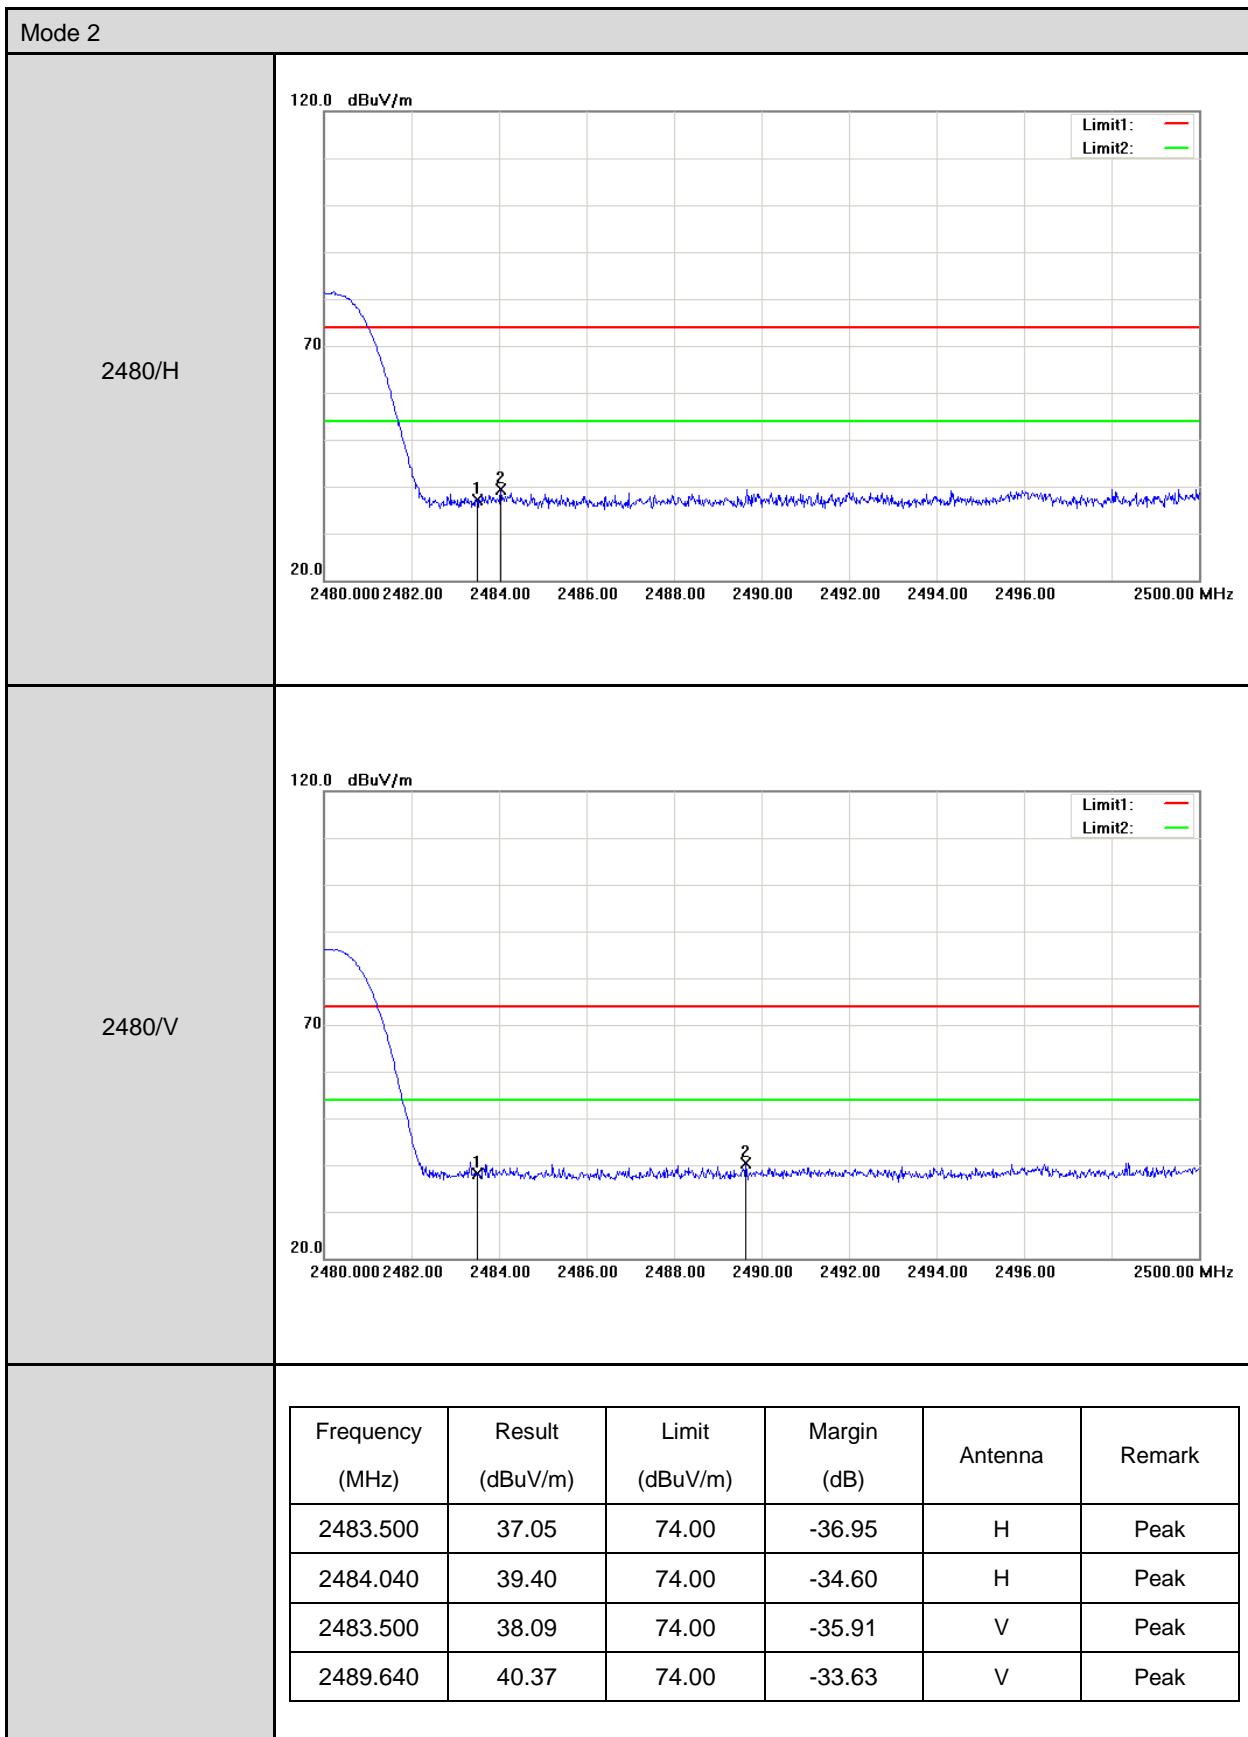




13 Antenna Requirement

13.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

13.2.Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

13.3.Antenna Connector Construction

The antenna used in this product is Integrated Antenna. And the maximum Gain of this antenna is as below:

Bluetooth: 0.5 dBi

Antenna Type	Integrated Antenna
--------------	--------------------

14 Exemption from Routine Evaluation Limits for FCC – SAR Evaluation

FCC ID: 2AA7D-ZEWH3

Exposure category: General population/uncontrolled environment

EUT Type: Production Unit

Device Type: Portable Device

Refer Standard: KDB 447498 D01 General RF Exposure Guidance v06

FCC Part 2 §2.1093

Evaluation method

According to KDB447498 D01 General RF Exposure Guidance v06Section 4.3.1 Standalone SAR test exclusion considerations:“ Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition, listed below, is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.²² The minimum test separation distance is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander (see 5) of section 4.1). To qualify for SAR test exclusion, the test separation distances applied must be fully explained and justified by the operating configurations and exposure conditions of the transmitter and applicable host platform requirements, typically in the SAR measurement or SAR analysis report, according to the required published RF exposure KDB procedures. When no other RF exposure testing or reporting is required, a statement of justification and compliance must be included in the equipment approval, in lieu of the SAR report, to qualify for the SAR test exclusion. When required, the device specific conditions described in the other published RF exposure KDB procedures must be satisfied before applying these SAR test exclusion provisions; for example, handheld PTT two-way radios, handsets, laptops & tablets etc.²³ “

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} (\text{GHz})] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- f (GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Conducted Power Results

Bluetooth

Mode	Channel	Frequency (MHz)	Peak Conducted Output Power (dBm)
GFSK-BLE	00	2402	4.327
	19	2440	3.934
	39	2480	3.186

Manufacturing tolerance

Bluetooth

GFSK-BLE (Peak)			
Channel	Channel 00	Channel 19	Channel 39
Target (dBm)	4.327	3.934	3.186
Tolerance \pm (dB)	1.0	1.0	1.0

Evaluation Results

Band/Mode	f (GHz)	Antenna Distance (mm)	RF output power (including tune-up tolerance)		SAR Test Exclusion Threshold	SAR Test Exclusion
			dBm	mW		
BT*	2.402	5	5.327	3.410	1.06<3.0	Yes

BT*-BT including BLE (lower power BT)

Conclusion

The measurement results comply with the FCC Limit per 47 CFR 2.1093 for the uncontrolled RF Exposure and SAR Exclusion Threshold per KDB 447498 v06.

.....End of Report.....