

STAR SYSTEMS INTERNATIONAL LIMITED

Application
For
Certification

FCC ID: 2AA7KDORADOWF

RFID data collector

Model: Dorado
Brand Name: Star Systems International

WiFi Transceiver

Report No.: 131018006SZN-004

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-12]

Prepared and Checked by:

Sign on file

Sen Lv
Project Engineer

Approved by:

Andy Yan
Project Engineer
Date: January 29, 2014

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF no.: FCC 15C_Tx_b

INTERTEK TESTING SERVICE

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	Summary of Tests
<i>EXHIBIT 2:</i>	General Description
<i>EXHIBIT 3:</i>	System Test Configuration
<i>EXHIBIT 4:</i>	Measurement Results
<i>EXHIBIT 5:</i>	Equipment Photographs
<i>EXHIBIT 6:</i>	Product Labeling
<i>EXHIBIT 7:</i>	Technical Specifications
<i>EXHIBIT 8:</i>	Instruction Manual
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Miscellaneous Information
<i>EXHIBIT 11:</i>	Test Equipment List

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

STAR SYSTEMS INTERNATIONAL LIMITED MODEL: Dorado

FCC ID: 2AA7KDORADOWF

This report concerns (check one) Original Grant Class II Change

Equipment Type: DTS - Part 15 Digital Transmission Systems (WiFi transmitter portion)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until : _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-12 Edition] provision.

Report prepared by:

Sen Lv
Intertek Testing Services Shenzhen Ltd.
Kejiyuan Branch
6F, Block D, Huahan Building, Langshan Road,
Nanshan District, Shenzhen, P. R. China
Phone: (86 755) 8614 0653
Fax: (86 755) 8614 6751

INTERTEK TESTING SERVICES

Table of Contents

1.0 <u>Summary of test results</u>	2
2.0 <u>General Description</u>	4
2.1 Product Description	5
2.2 Related Submittal(s) Grants	5
2.3 Test Methodology	5
2.4 Test Facility	5
3.0 <u>System Test Configuration</u>	7
3.1 Justification	7
3.2 EUT Exercising Software	7
3.3 Details of EUT and Description of Peripherals	8
3.4 Measurement Uncertainty	8
3.5 Equipment Modification	8
3.6 Support Equipment List and Description	8
4.0 <u>Measurement Results</u>	10
4.1 Maximum Conducted Output Power at Antenna Terminals	10
4.2 Minimum 6dB RF Bandwidth	16
4.3 Maximum Power Density	26
4.4 Out of Band Conducted Emissions	35
4.5 Out of Band Radiated Emissions	60
4.6 Transmitter Radiated Emissions in Restricted Bands	61
4.7 Field Strength Calculation	62
4.8 Radiated Spurious Emission	63
4.9 Conducted Emission	77
4.10 Radiated Emission from Digital Section of Transceiver	80
4.11 Transmitter Duty Cycle Calculation and Measurements	81
5.0 <u>Equipment Photographs</u>	83
6.0 <u>Product Labelling</u>	85
7.0 <u>Technical Specifications</u>	87
8.0 <u>Instruction Manual</u>	89
9.0 <u>Confidentiality Request</u>	91
10.0 <u>Miscellaneous Information</u>	93
11.0 <u>Test Equipment List</u>	95

INTERTEK TESTING SERVICES

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1

SUMMARY OF TEST RESULTS

INTERTEK TESTING SERVICES

1.0 Summary of Test results

STAR SYSTEMS INTERNATIONAL LIMITED
MODEL: Dorado

FCC ID: 2AA7KDORADOWF

TEST	REFERENCE	RESULTS
Max. Output power	15.247(b)(3)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(e)	Pass
Out of Band Antenna Conducted Emission	15.247(d)	Pass
Radiated Emission in Restricted Bands	15.247(d)	Pass
AC Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

INTERTEK TESTING SERVICES

EXHIBIT 2

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

2.0 General Description

2.1 Product Description

The Equipment Under Test (EUT) is a RFID data collector, it is able to read ID cards through 902.75-927.25MHz and transmit data through WiFi function operating in 2412-2462 MHz, 11channels with 5MHz separation, and in 2422-2452MHz, 7 channels with 5MHz separation. The EUT was powered by a 3.7 VDC Li-ion rechargeable battery charged by an USB Power Adapter with AC 120V, 60Hz input. For more detail information pls. refer to the user manual.

Type of Modulation: BPSK, QPSK, 16QAM, 64QAM, CCK, DQPSK, DBPSK.
Antenna Type: Integral Antenna.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

INTERTEK TESTING SERVICES

2.2 Related Submittal(s) Grants

This is an application for certification of:
DTS- Part 15 Digital Transmission Systems (WiFi transmitter portion)

Remaining portions are subject to the following procedures:

1. Receiver portion of WiFi: exempt from technical requirement of this Part.
2. RFID Function: Refer to report 131018006SZN-005
3. Transfer data function: this function has been completed in DoC.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009) and KDB 558074. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, Block D, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: 242492).

INTERTEK TESTING SERVICES

EXHIBIT 3

SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. The EUT was powered by a 3.7 VDC fully charged Li-ion rechargeable battery which is charged by an USB Power Adapter with AC 120V, 60Hz input during the test. Only the worst case data was reported.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

Power Parameters of IEEE 802.11b/g/n

Test software setting of IEEE 802.11b/g/n			
Channel No.	Output Power	Data rate	Modulation type
1,6,11	5.0	802.11b: 1-11Mbps	802.11b: CCK, DQPSK, DBPSK
	5.0	802.11g: 6-54Mbps	802.11g: BPSK, QPSK, 16QAM
	5.0	802.11n-HT20: 6.5-65Mbps	802.11n: BPSK, QPSK, 16QAM
3,6,9	5.0	802.11n-HT40: 13.5-135Mbps	802.11n: BPSK, QPSK, 16QAM, 64QAM

TRF no.: FCC 15C_TX_b

FCC ID: 2AA7KDORADOWF

Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

3.3 Special Accessories

One shielded USB cable with a ferrite core is used.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

3.5 Equipment Modification

Any modifications installed previous to testing by STAR SYSTEMS INTERNATIONAL LIMITED will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch.

3.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Model No.
110cm shielded USB Cable with a ferrite core	Shenzhen Zoko Industry Development Co.,Ltd	N/A
USB Power Adapter	Juxing Electronic (Huizhou) Co.,Ltd.	JXAS0050500100VU, Input: AC 100-240V; 50/60Hz Output: DC 5V; 1000mA

INTERTEK TESTING SERVICES

EXHIBIT 4

MEASUREMENT RESULTS

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 5, 2013

Model: Dorado

4.0 Measurement Results

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna power of the EUT was connected to the input of a spectrum analyzer. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set according to the FCC KDB 558074 spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band edges and power was read directly in dBm. External attenuation and cable loss were compensated from the measured value.

For antennas with gains of 6 dBi or less, maximum allowed Transmitter output is 1 watt (+30 dBm).

IEEE 802.11b (Antenna Gain = 2.18dBi) (CCK, 1Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	6.30	4.27
Middle Channel: 2437	6.56	4.53
High Channel: 2462	5.90	3.89

IEEE 802.11g (Antenna Gain = 2.18dBi) (16QAM, 6Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	7.16	5.20
Middle Channel: 2437	6.74	4.72
High Channel: 2462	6.71	4.69

IEEE 802.11n-HT20 (Antenna Gain = 2.18dBi) (16QAM, 6.5Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	7.69	5.87
Middle Channel: 2437	7.59	5.74

TRF no.: FCC 15C_TX_b

FCC ID: 2AA7KDORADOWF

Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

High Channel: 2462	7.53	5.66
--------------------	------	------

IEEE 802.11n-HT40 (Antenna Gain = 2.18dBi) (64QAM, 13.5Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2422	7.62	5.78
Middle Channel: 2437	7.48	5.60
High Channel: 2452	7.47	5.58

Cable loss: 0.5 dB External Attenuation: 0 dB

Cable loss, external attenuation has been included in OFFSET function

EUT max. output level = 7.69dBm


For RF Exposure, the information is saved with filename: RF exposure.pdf.

The test plots are attached as below.


INTERTEK TESTING SERVICES

802.11b


RS

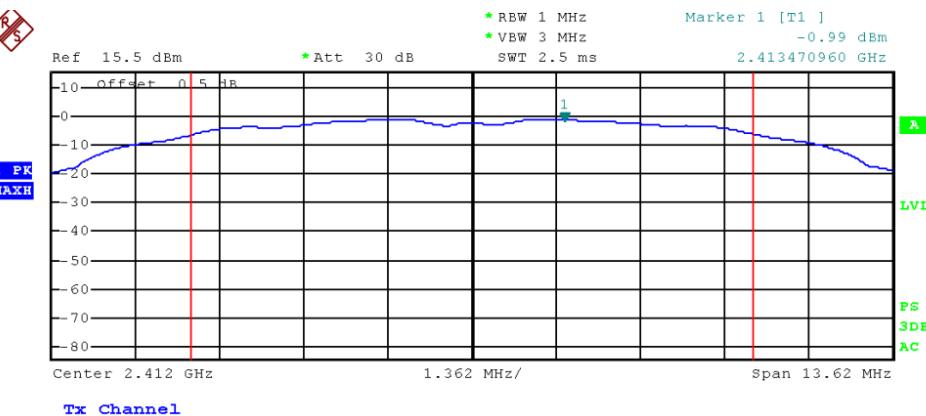

RS

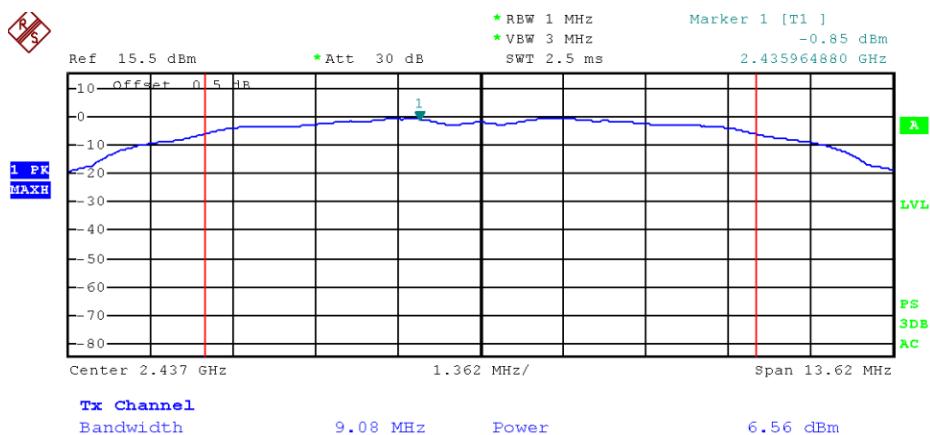


RS

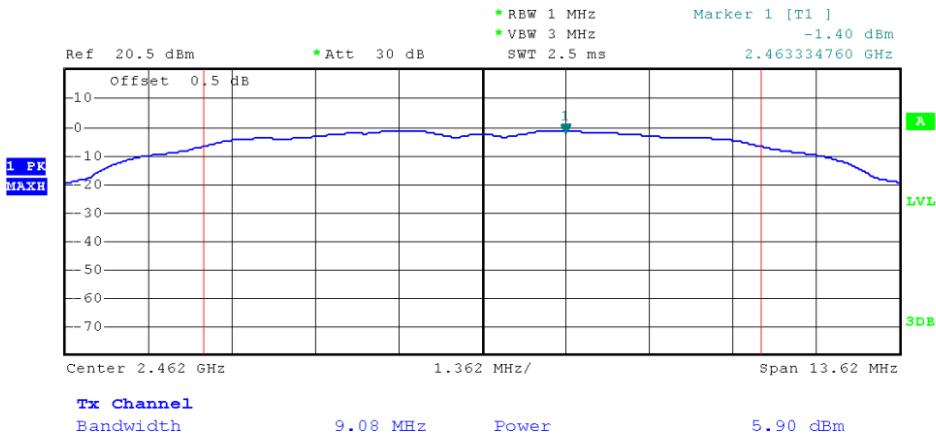

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES




802.11g

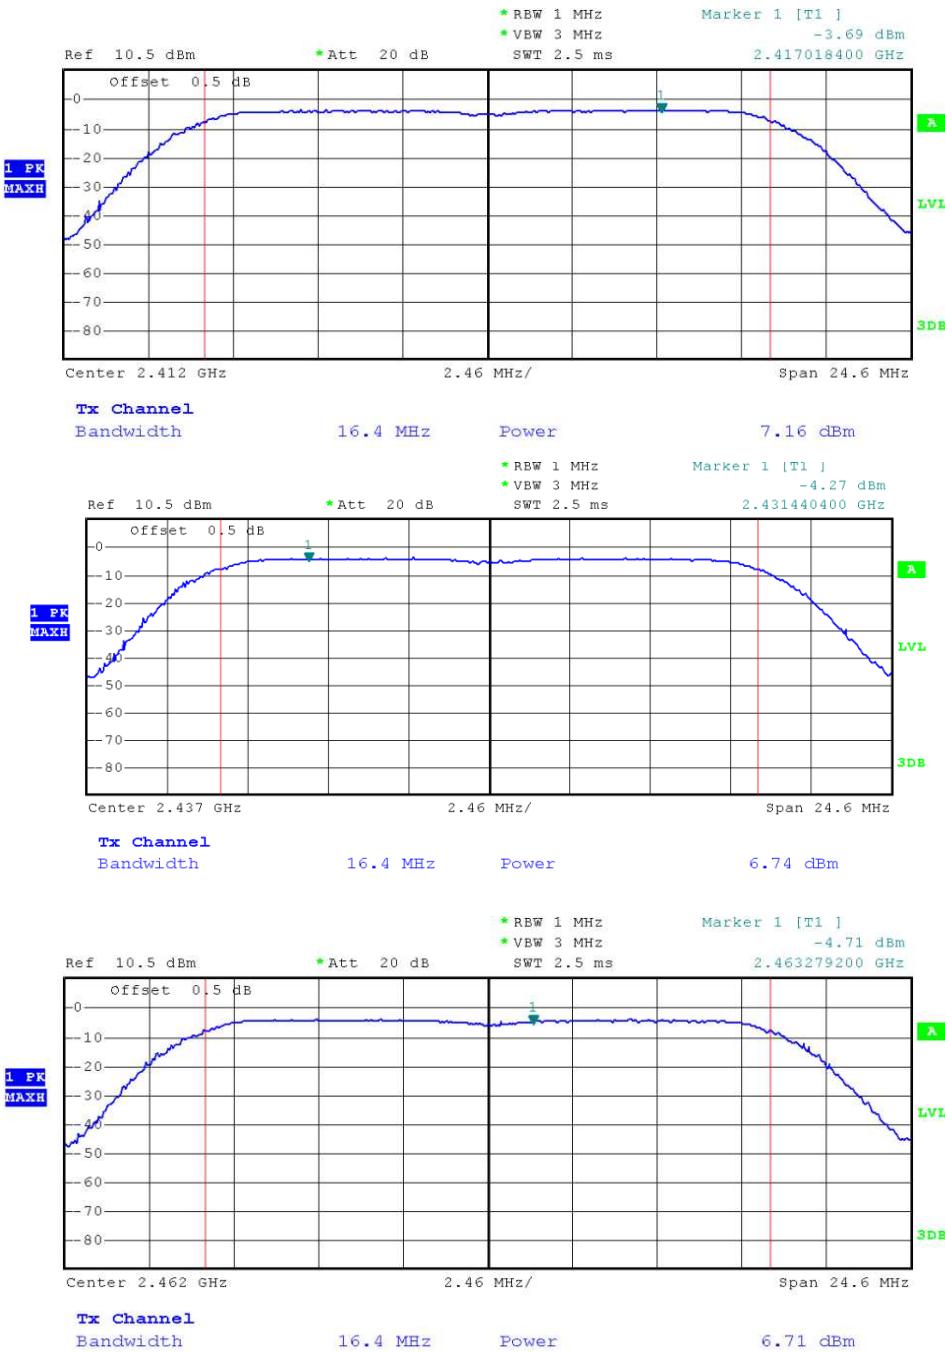

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004




INTERTEK TESTING SERVICES

802.11 n-HT20

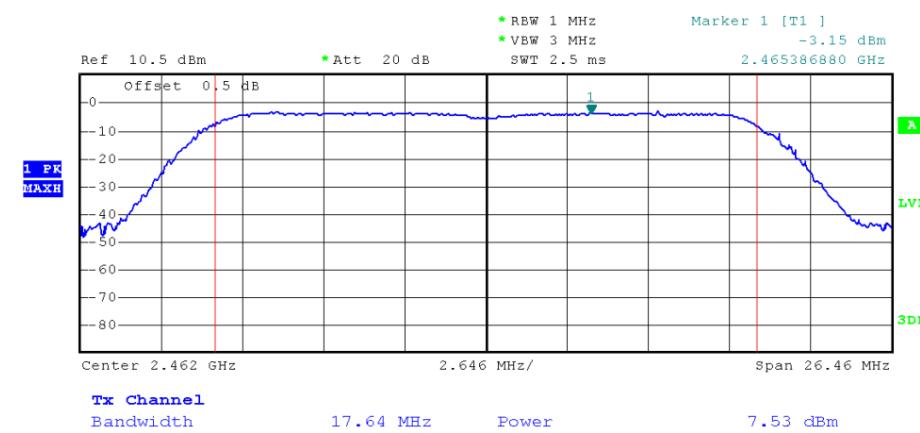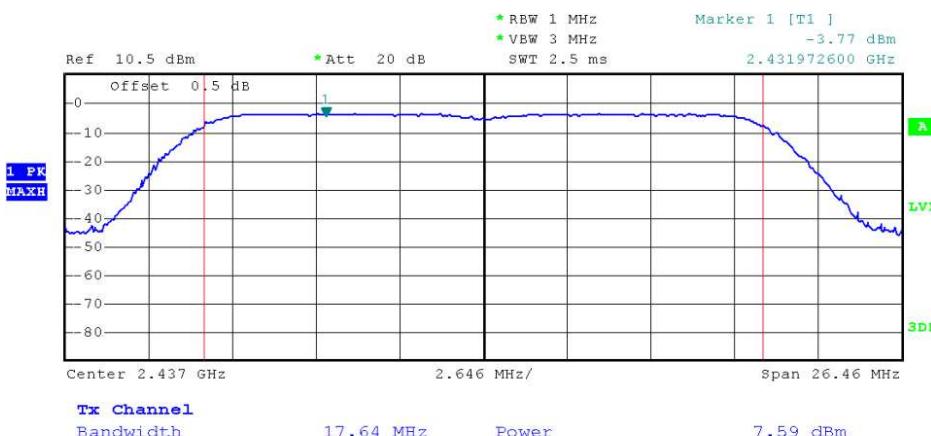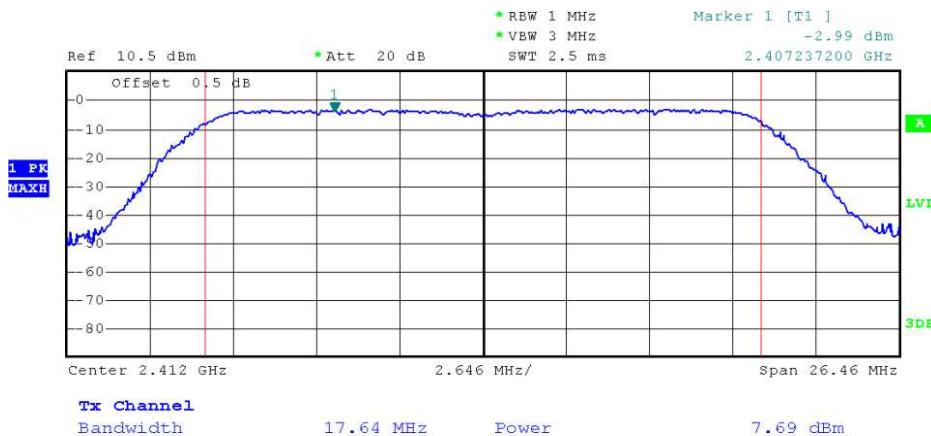

INTERTEK TESTING SERVICES

802.11 n-HT40

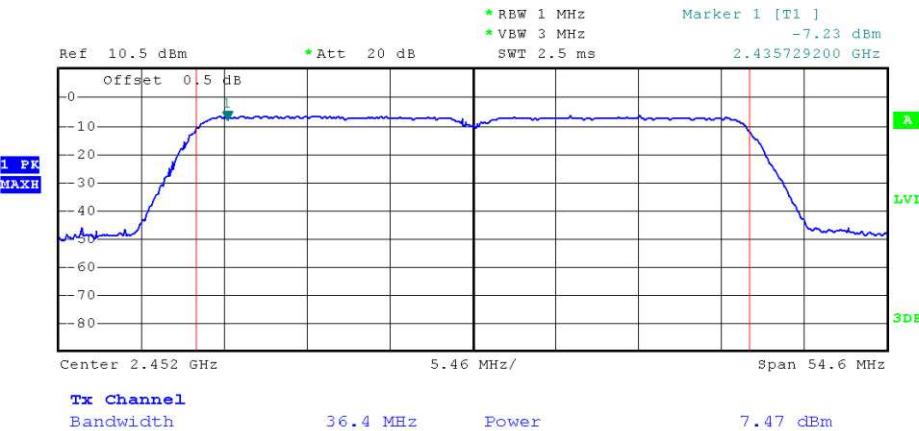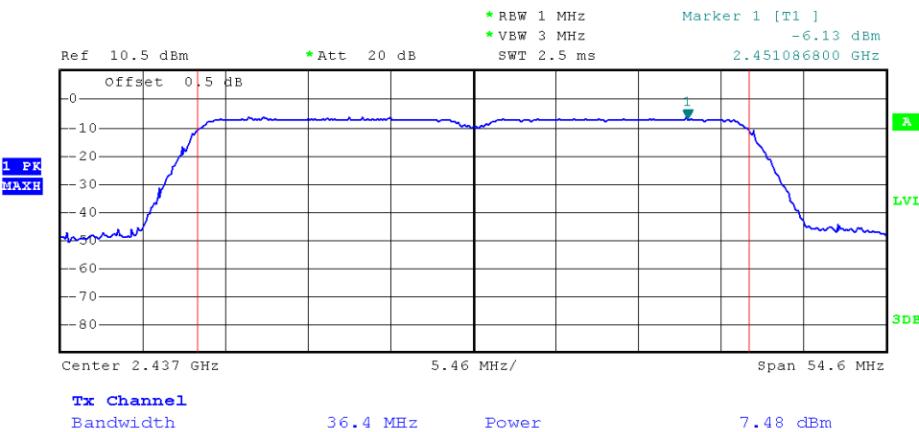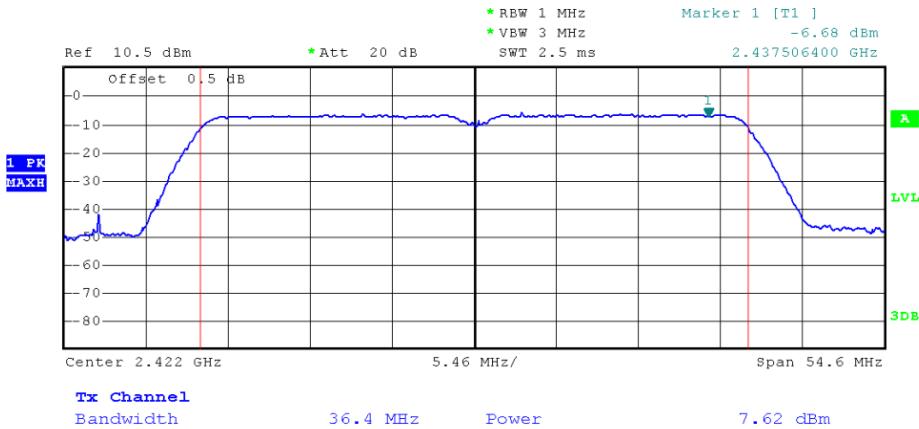

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 5, 2013

Model: Dorado

4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 KHz according to FCC KDB 558074. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Limit: The 6 dB Bandwidth is at least 500 kHz.

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	9.08
2437	9.08
2462	9.08

IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	16.40
2437	16.40
2462	16.40

IEEE 802.11n-HT20 (16QAM, 6.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	17.64
2437	17.64
2462	17.64

TRF no.: FCC 15C_TX_b

FCC ID: 2AA7KDORADOWF

Report No.: 131018006SZN-004



INTERTEK TESTING SERVICES

IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2422	36.40
2437	36.40
2452	36.40

The test plots are attached as below.


INTERTEK TESTING SERVICES

802.11b

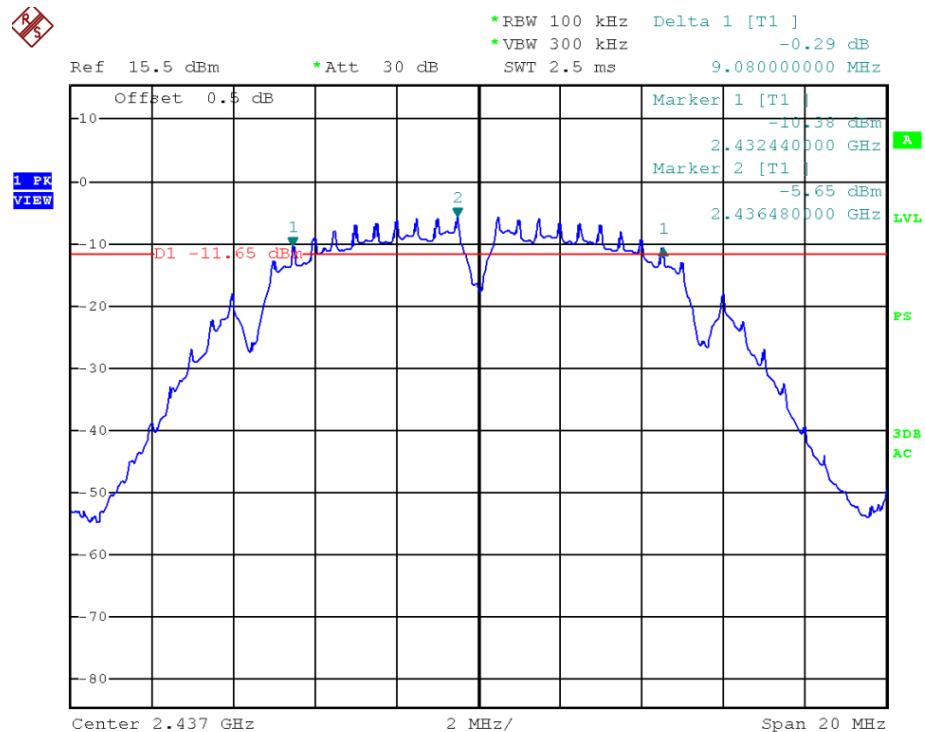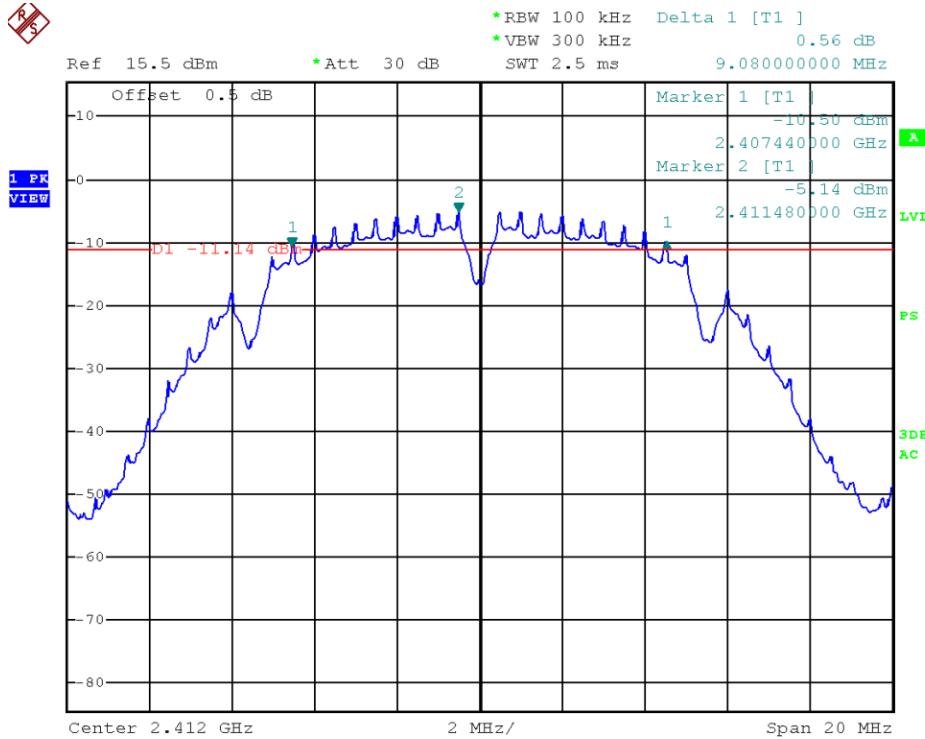

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

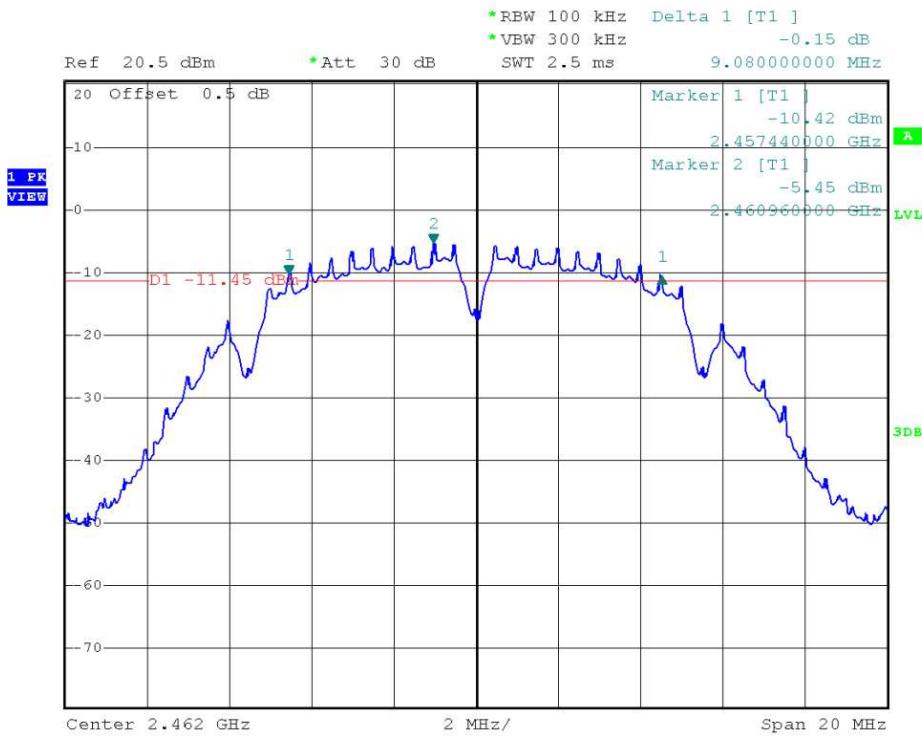

TRF no.: FCC 15C_TX_b
FCC ID: 2AA7KDORADOWF
Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

802.11g

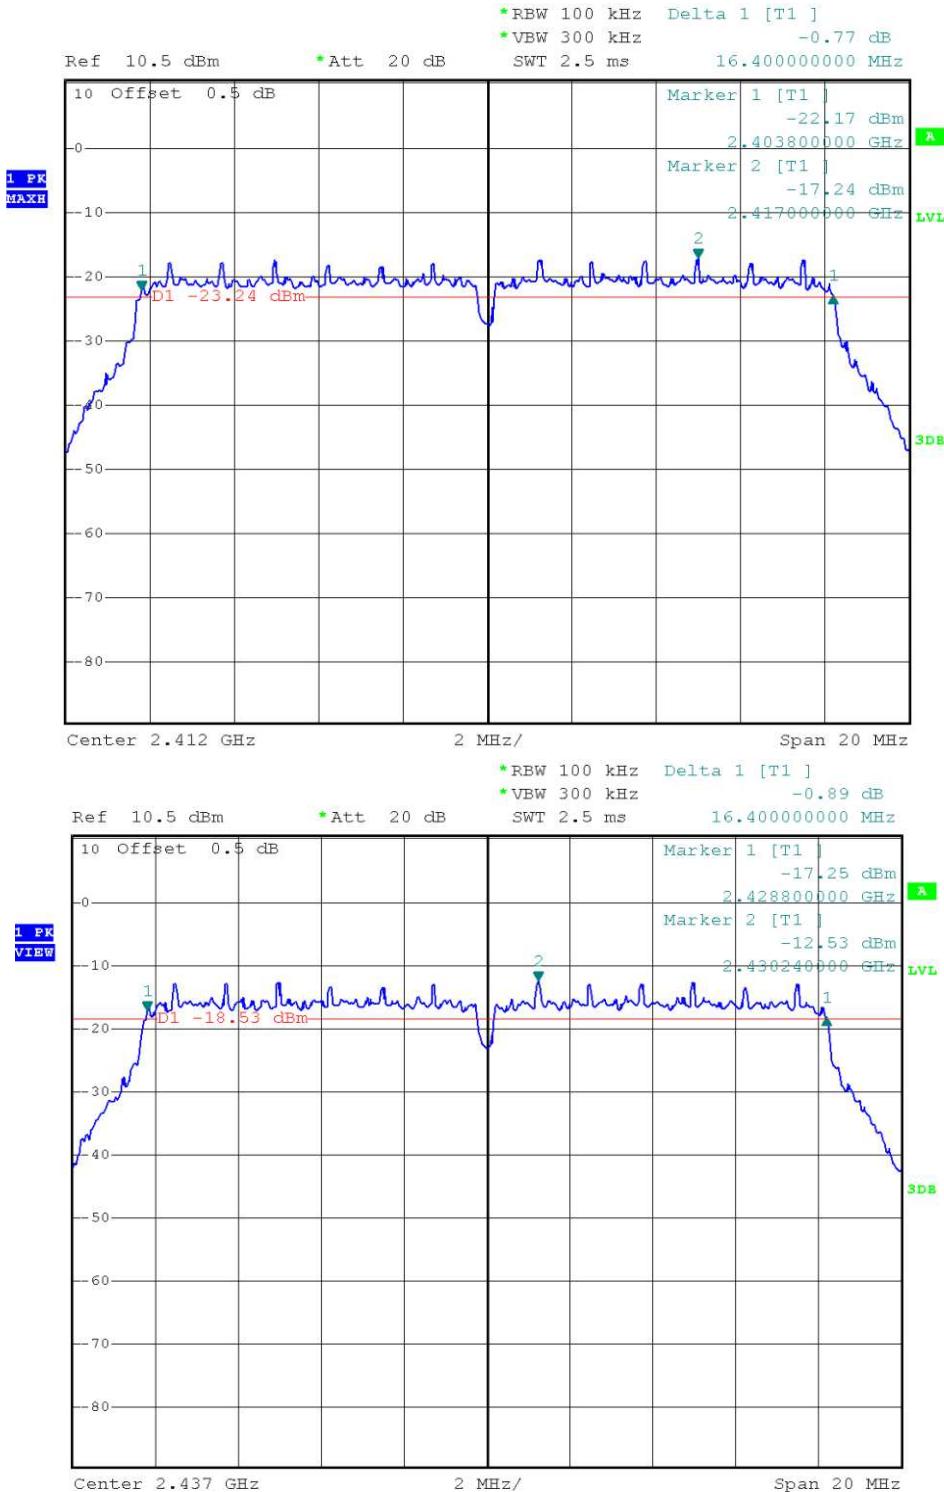

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004



INTERTEK TESTING SERVICES

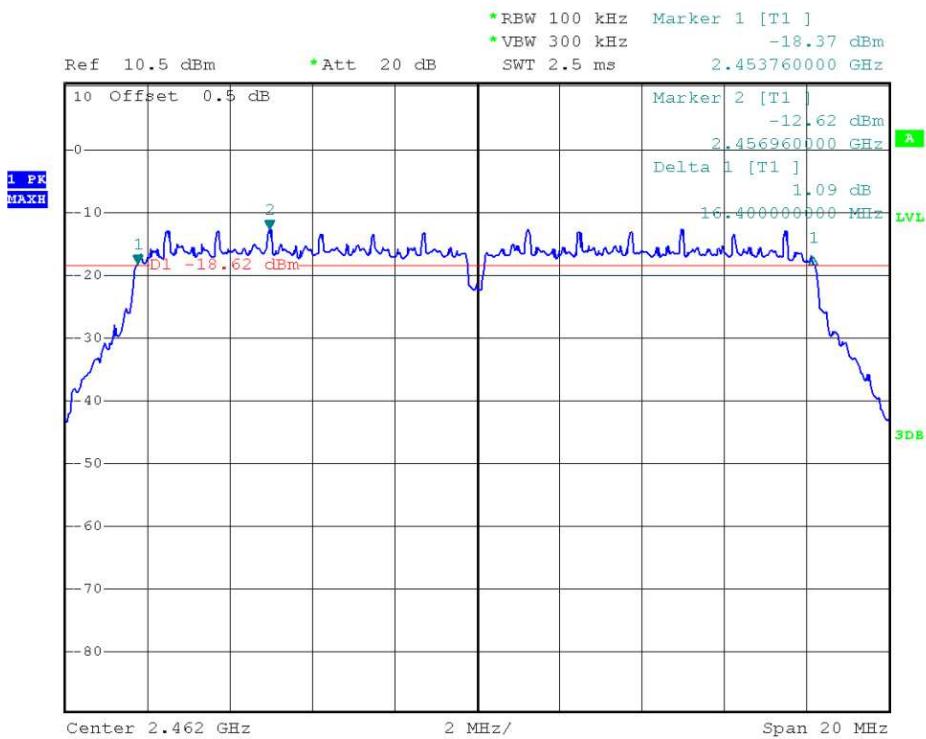

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

802.11 n-HT20

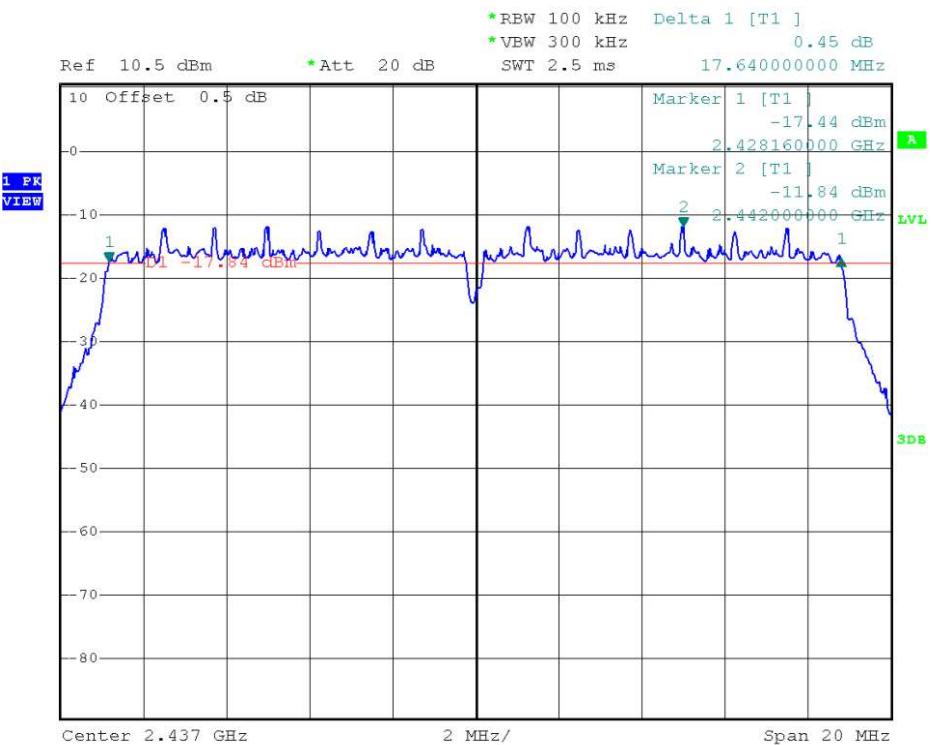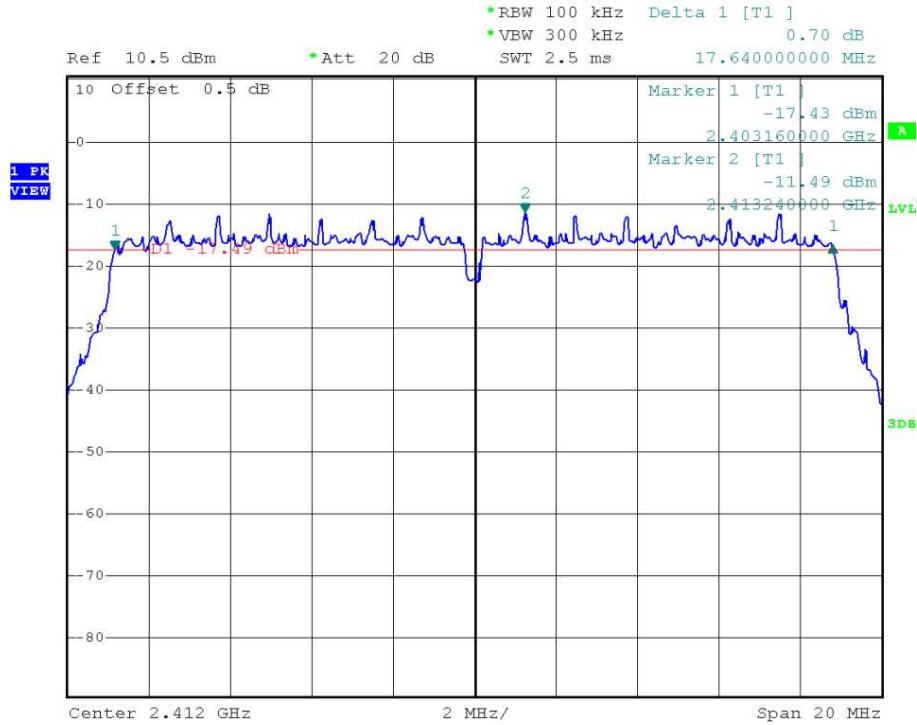

TRF no.: FCC 15C_TX_b
FCC ID: 2AA7KDORADOWF
Report No.: 131018006SZN-004



INTERTEK TESTING SERVICES

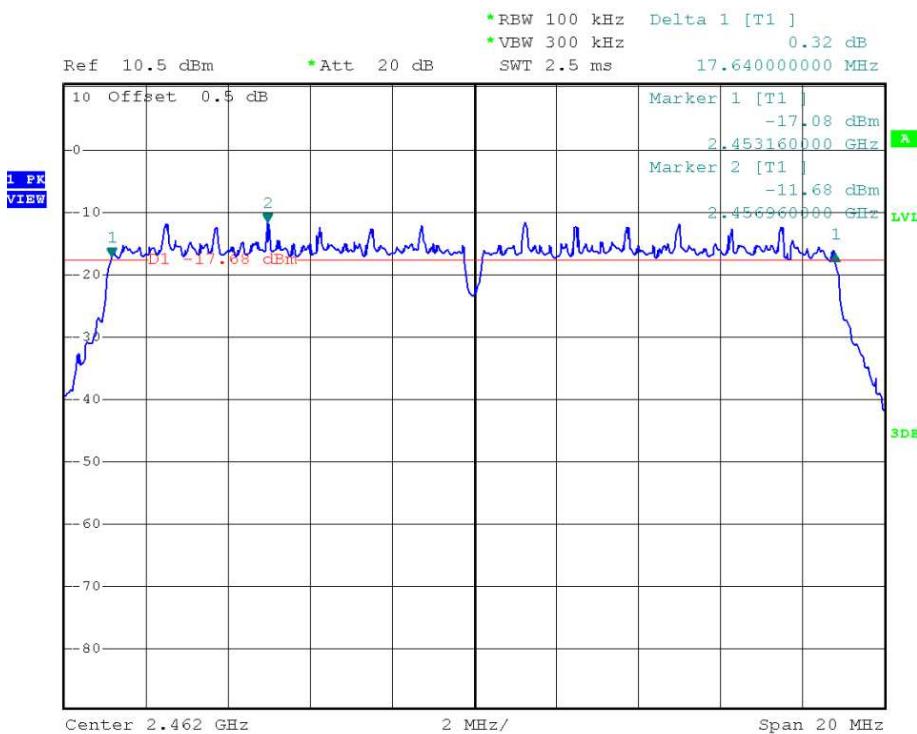

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

802.11 n-HT40

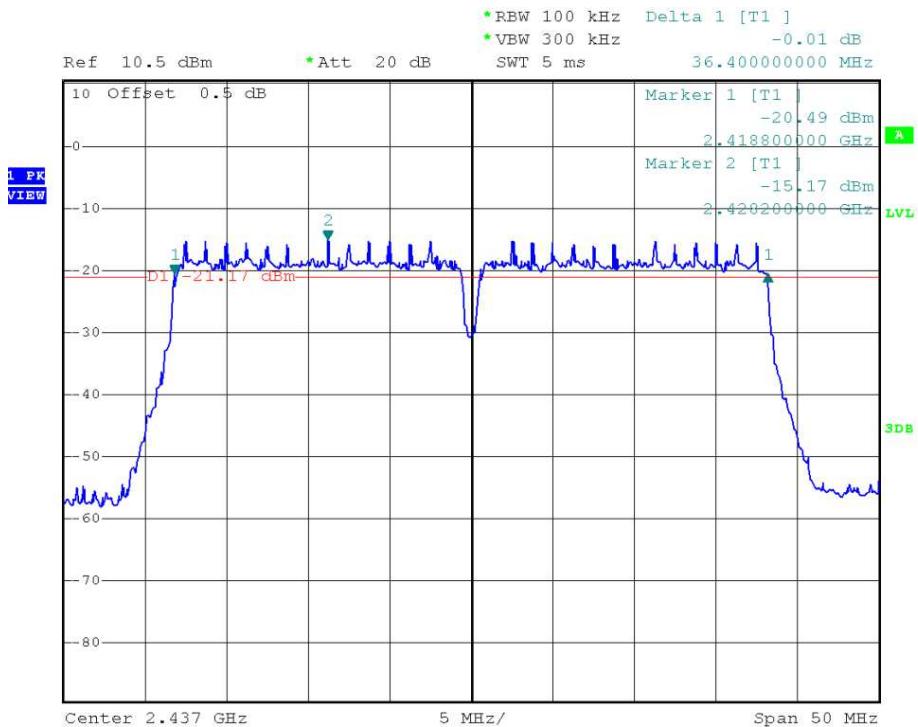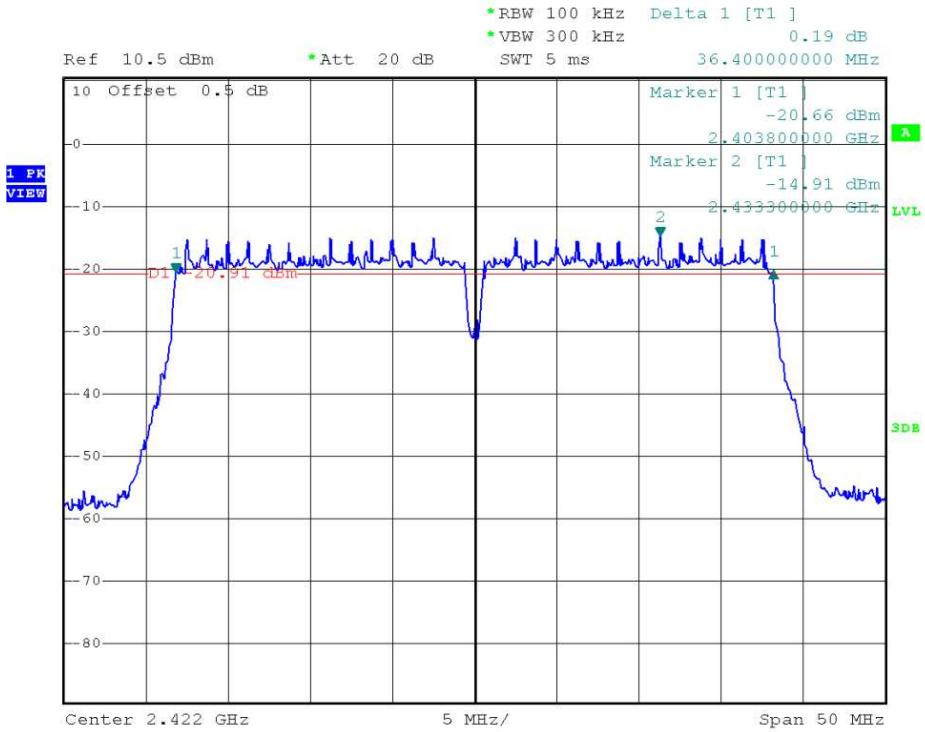

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

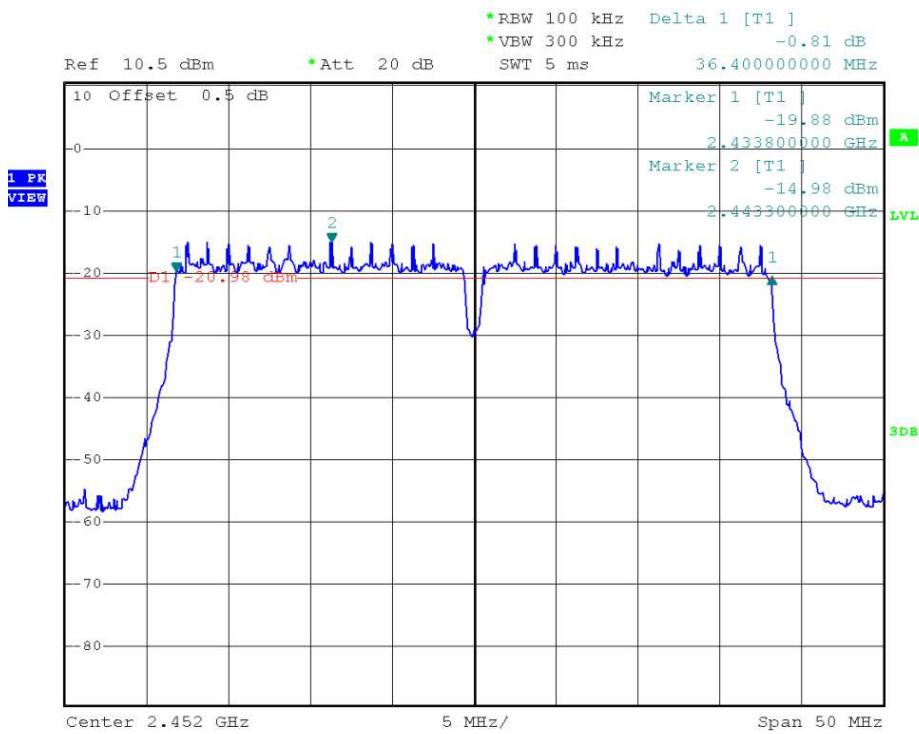

TRF no.: FCC 15C_TX_b
FCC ID: 2AA7KDORADOWF
Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 5, 2013

Model: Dorado

4.3 Maximum Power Density Reading, FCC Rule 15.247(e):

The Measurement Procedure PKPSD was set according to the FCC KDB 558074.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/ 3 kHz.

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-5.45
2437	-5.75
2462	-5.43

IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-12.15
2437	-12.66
2462	-12.69

IEEE 802.11n-HT20 (16QAM, 6.5Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-11.35
2437	-11.75
2462	-11.61

IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2422	-14.96
2437	-15.16
2452	-14.92

The test plots are attached as below.



TRF no.: FCC 15C_TX_b

FCC ID: 2AA7KDORADOWF

Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

802.11b

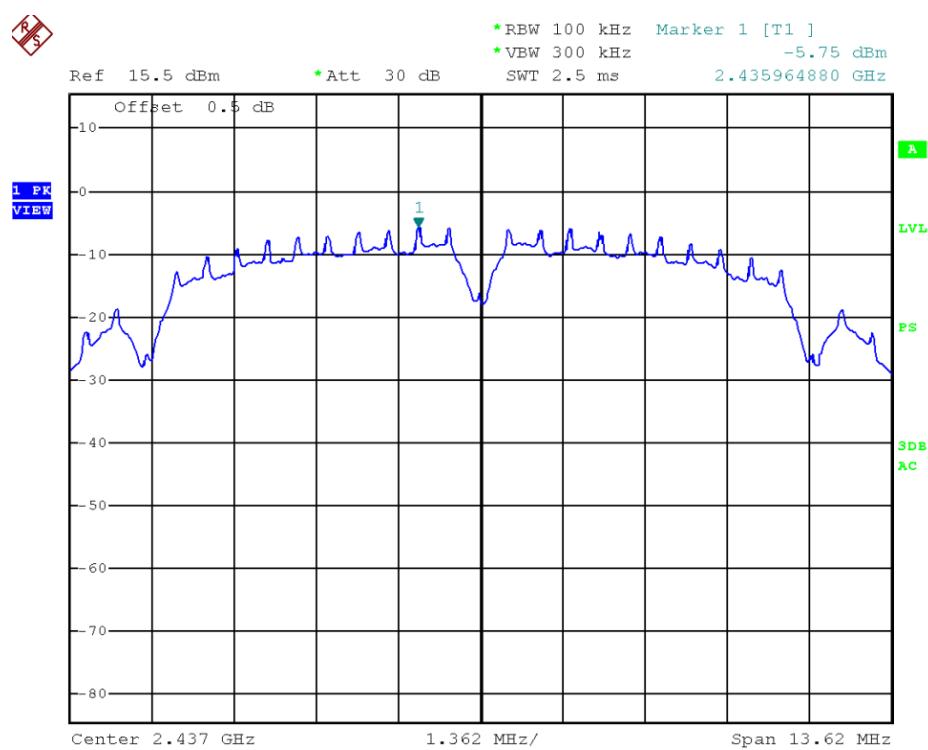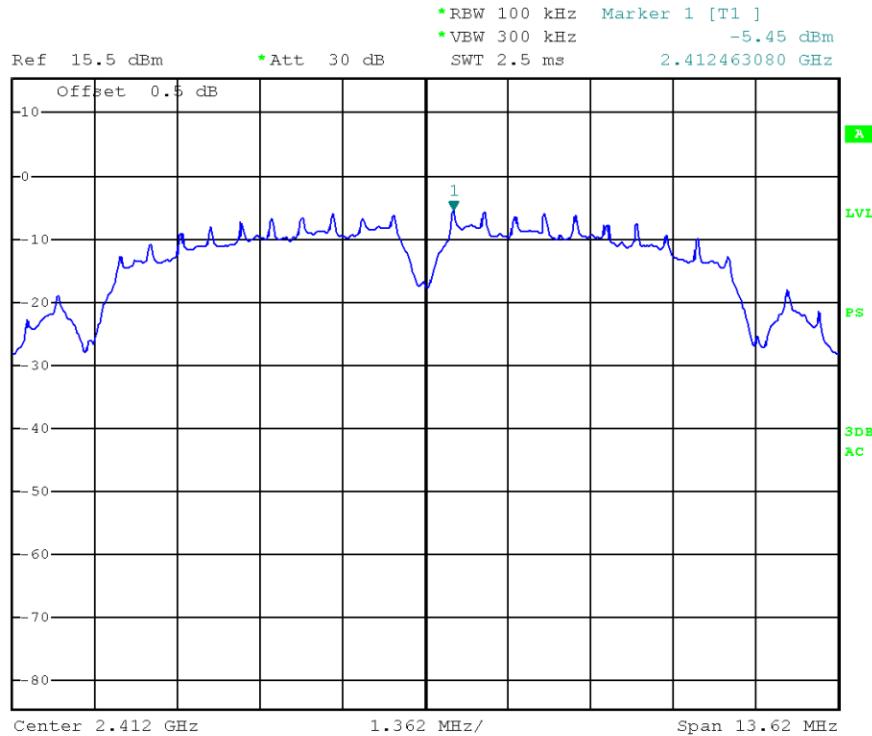

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

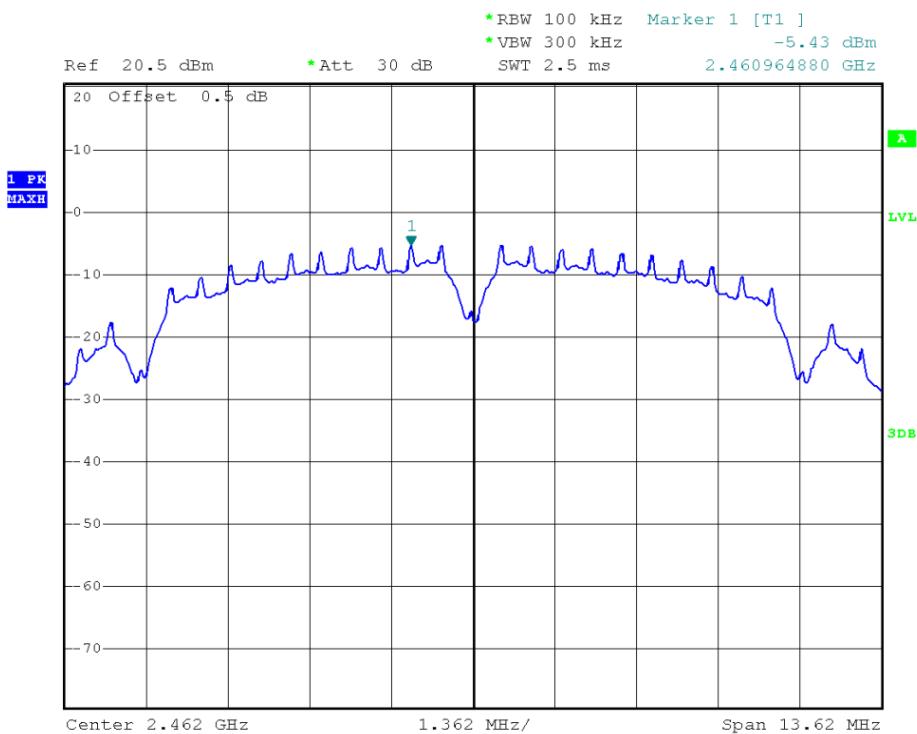

TRF no.: FCC 15C_TX_b
FCC ID: 2AA7KDORADOWF
Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

802.11g

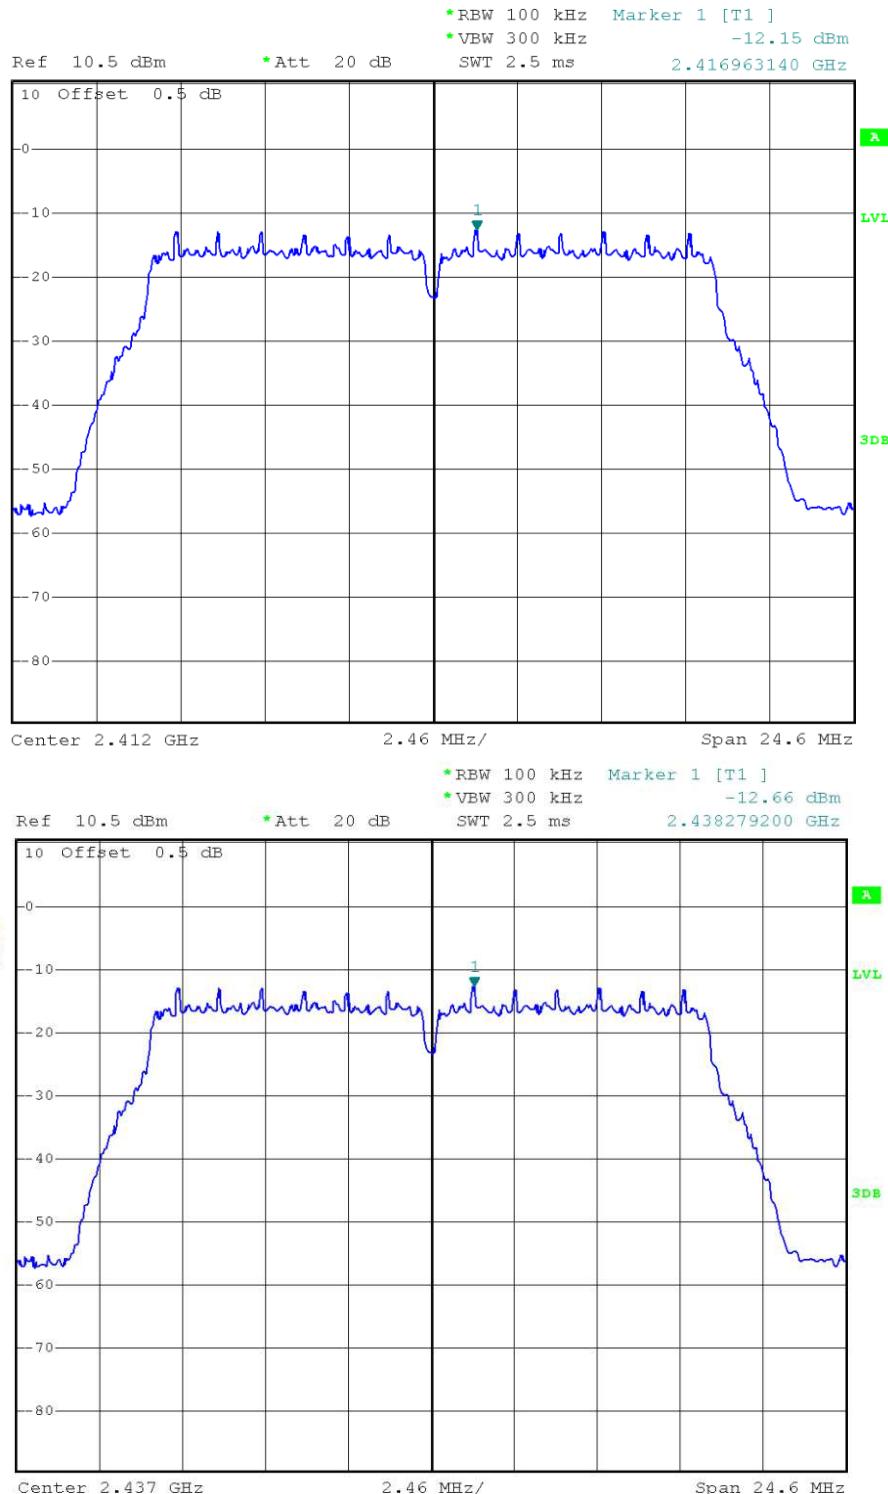

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004



INTERTEK TESTING SERVICES

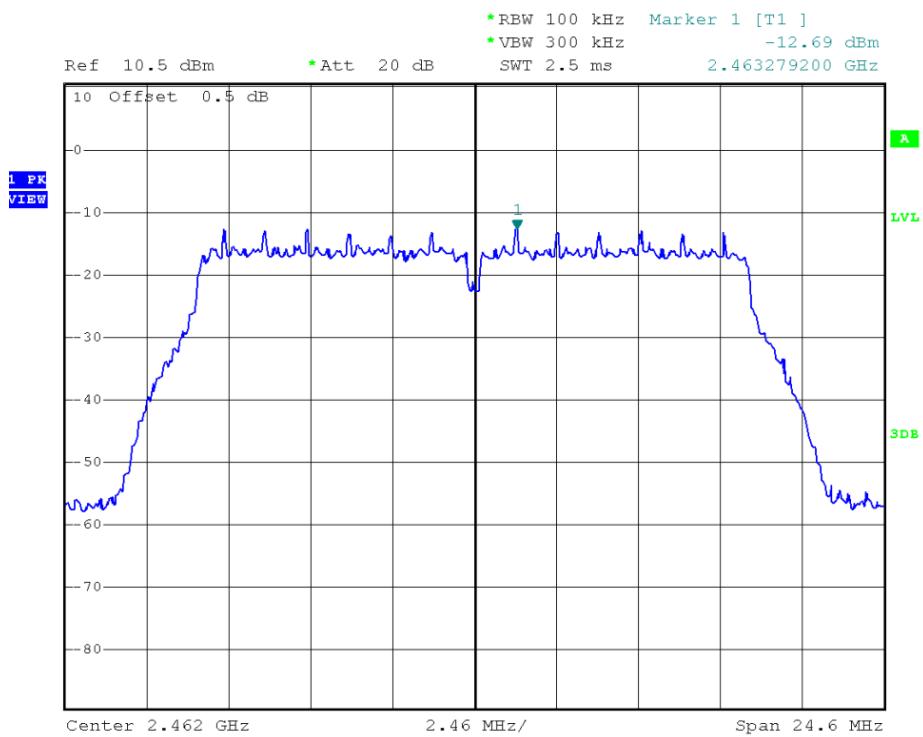

TRF no.: FCC 15C_TX_b
FCC ID: 2AA7KDORADOWF
Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

802.11 n-HT20

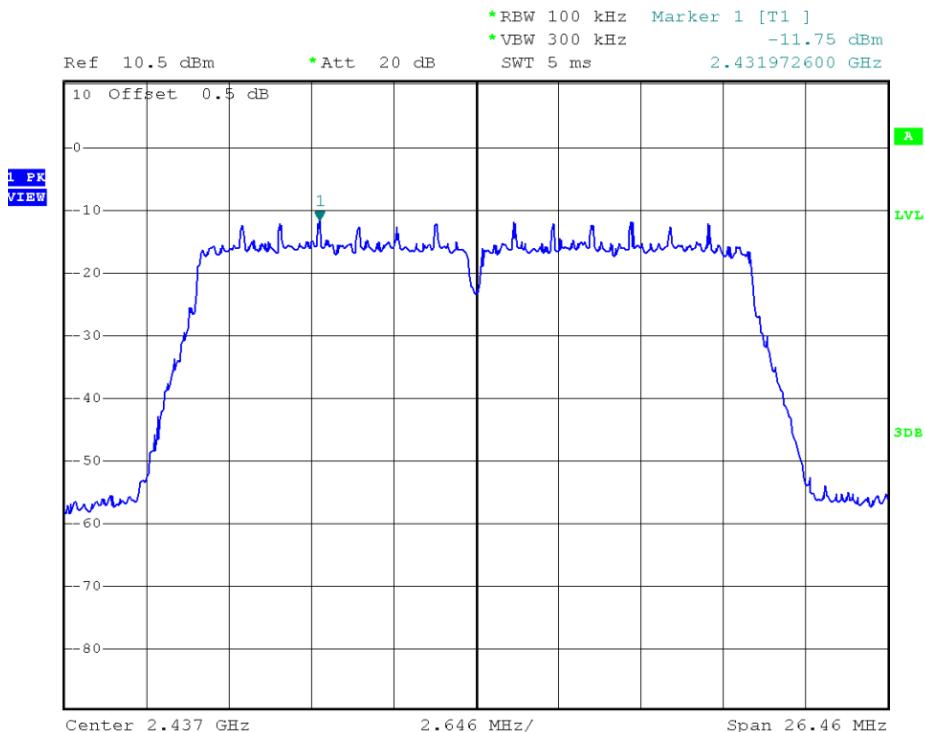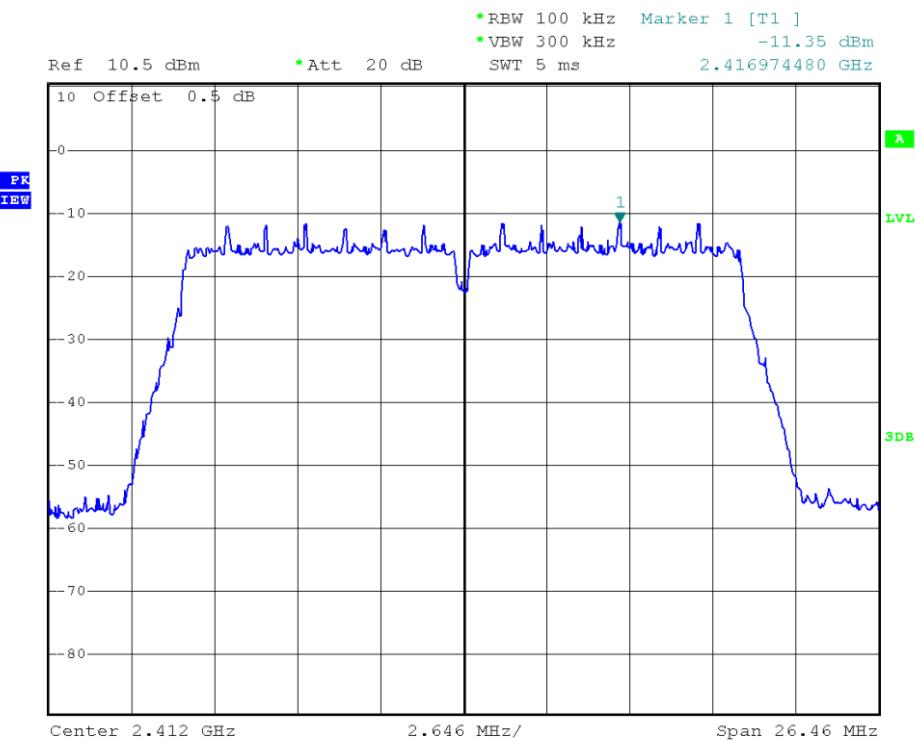

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004



INTERTEK TESTING SERVICES

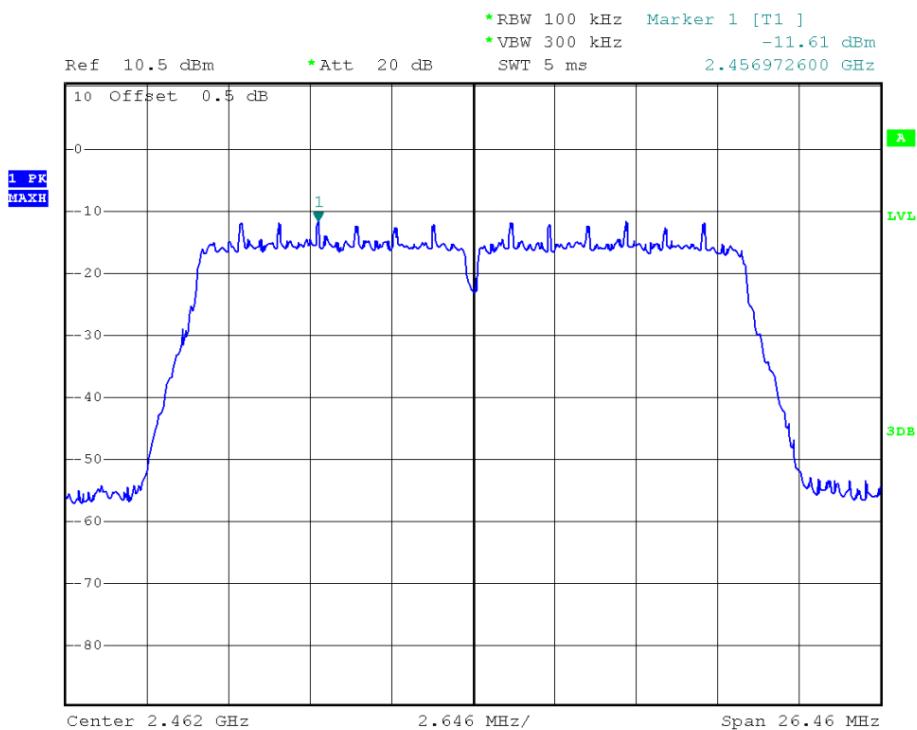

TRF no.: FCC 15C_TX_b
FCC ID: 2AA7KDORADOWF
Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

802.11 n-HT40

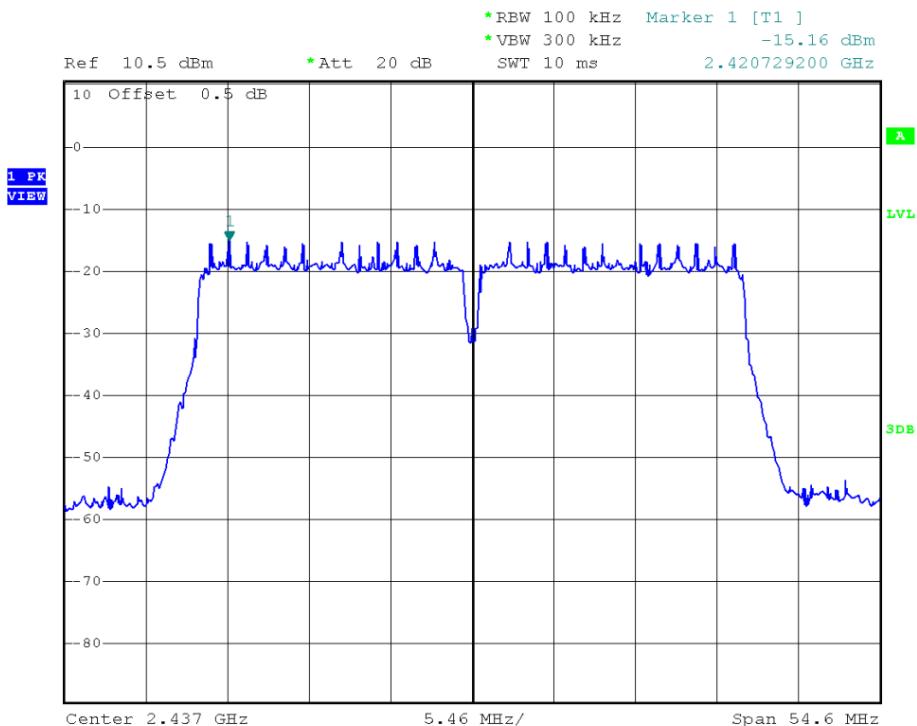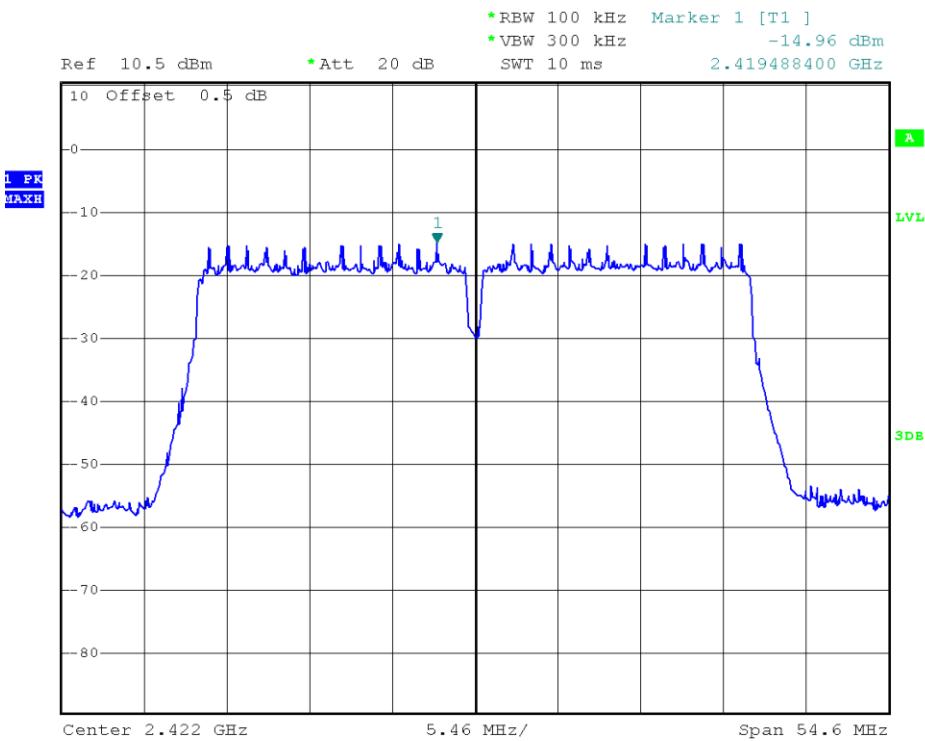

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

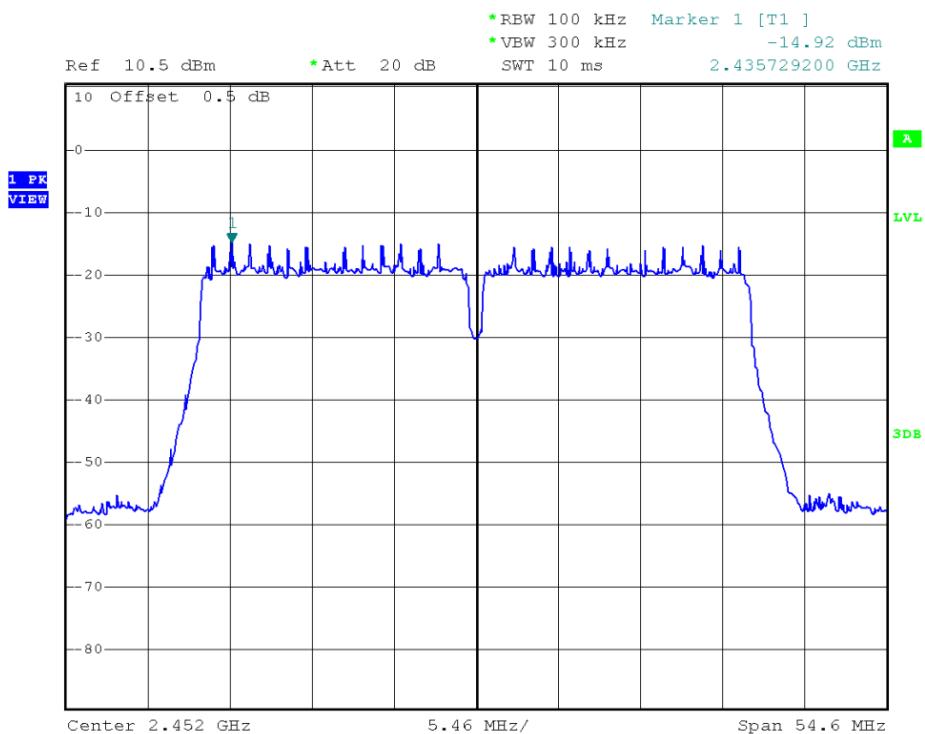

TRF no.: FCC 15C_TX_b
FCC ID: 2AA7KDORADOWF
Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 5, 2013

Model: Dorado

4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. The Measurement Procedure was set according to the FCC KDB 558074.

Refer to the attached test plots for out of band conducted emissions data with rate of 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n-HT20 and 13.5Mbps for 802.11n-HT40.


The test plots showed all spurious emission up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

The test plots are attached as below.

INTERTEK TESTING SERVICES

802.11b

Channel 01 (2412MHz) Reference Level: -5.45dBm

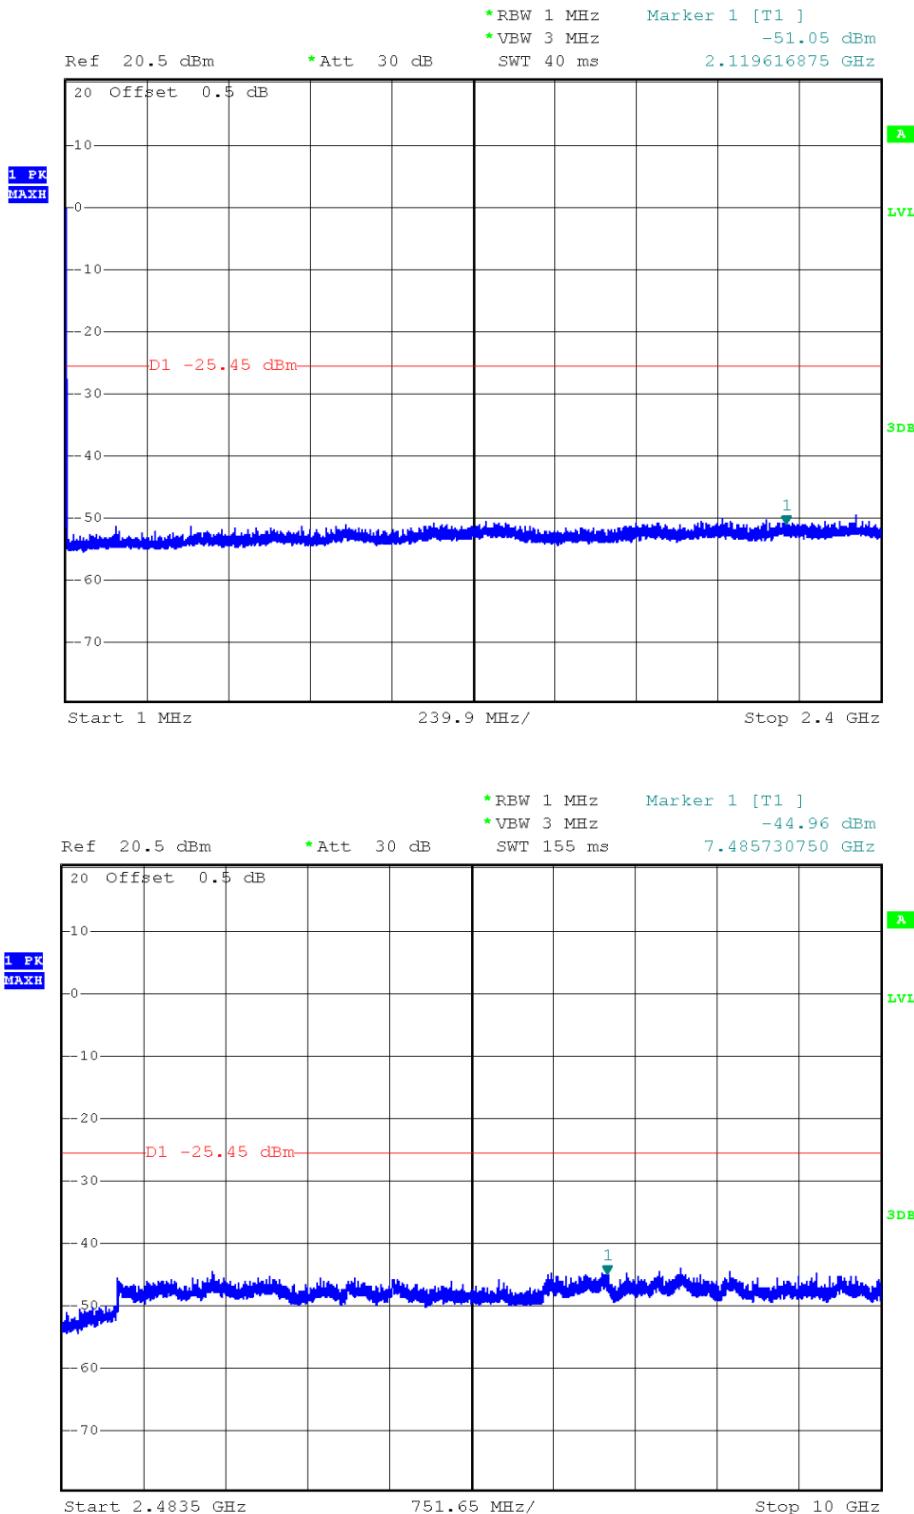


TRF no.: FCC 15C_TX_b

FCC ID: 2AA7KDORADOWF

Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

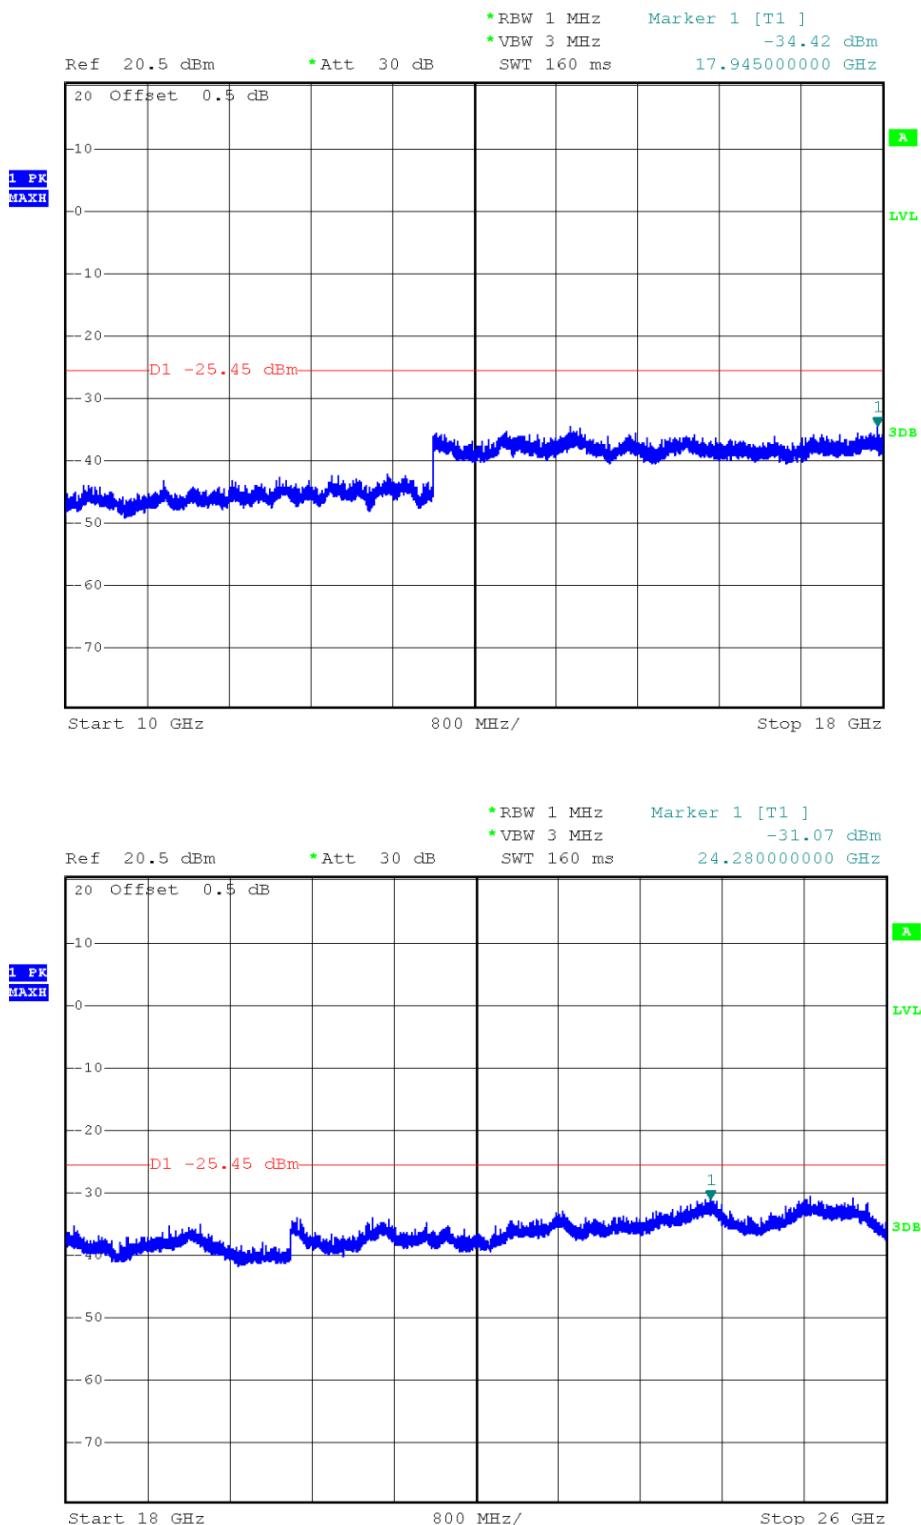

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004



INTERTEK TESTING SERVICES

Channel 06 (2437MHz) Reference Level: -5.75dBm

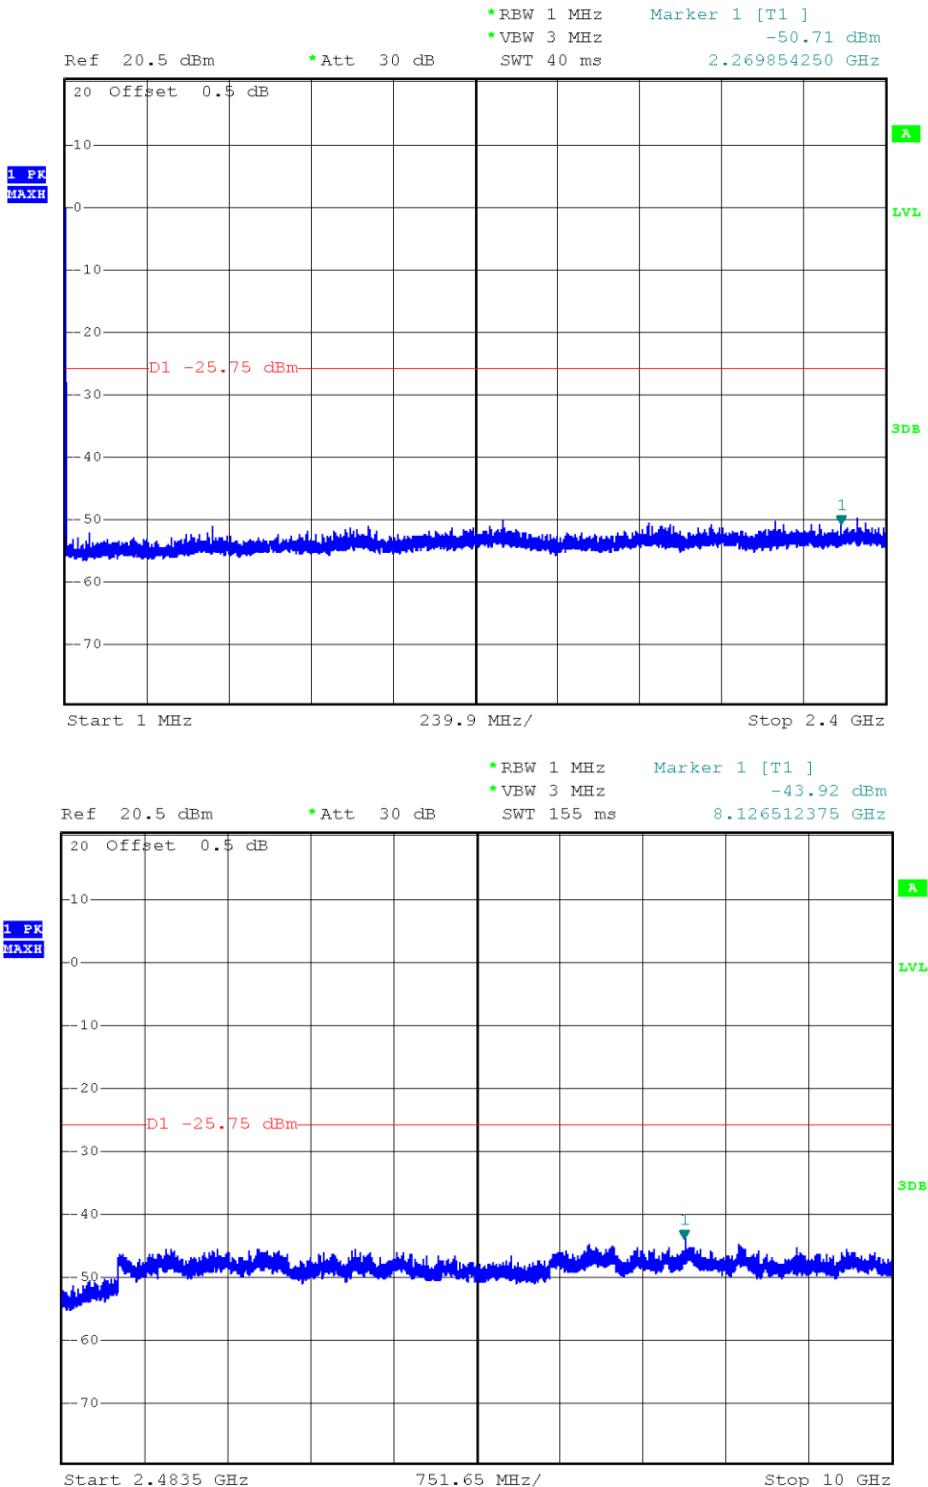



TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

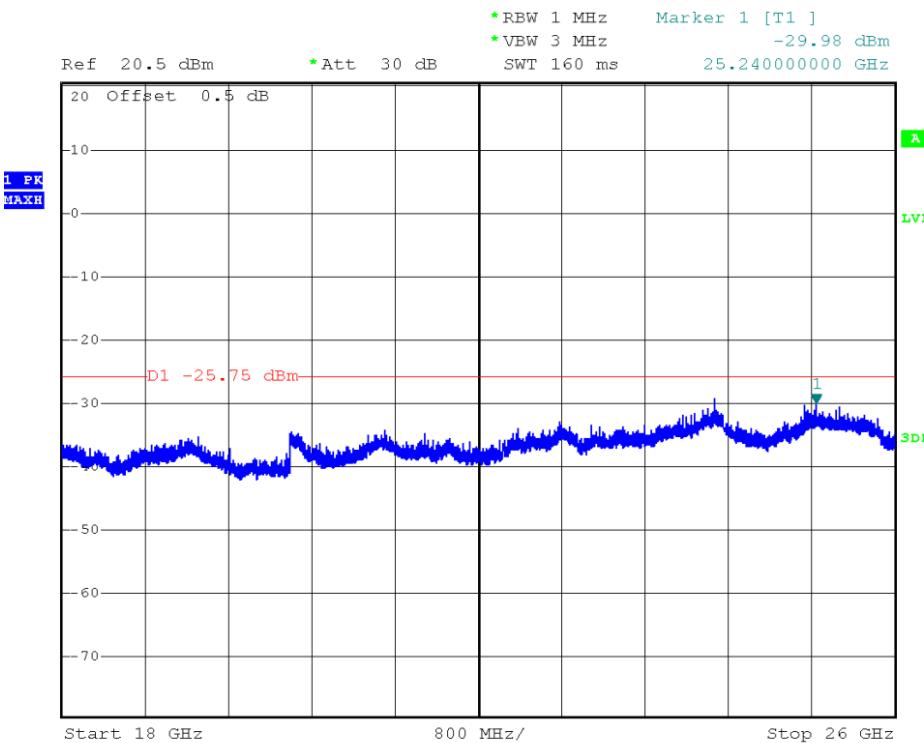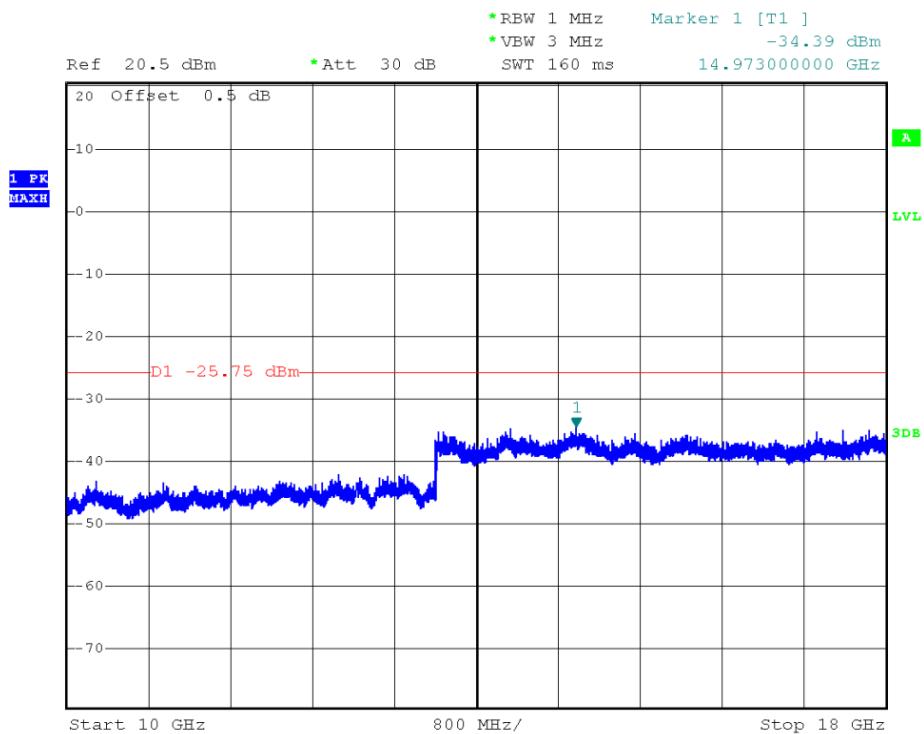


INTERTEK TESTING SERVICES

Channel 11 (2462MHz) Reference Level: -5.43dBm

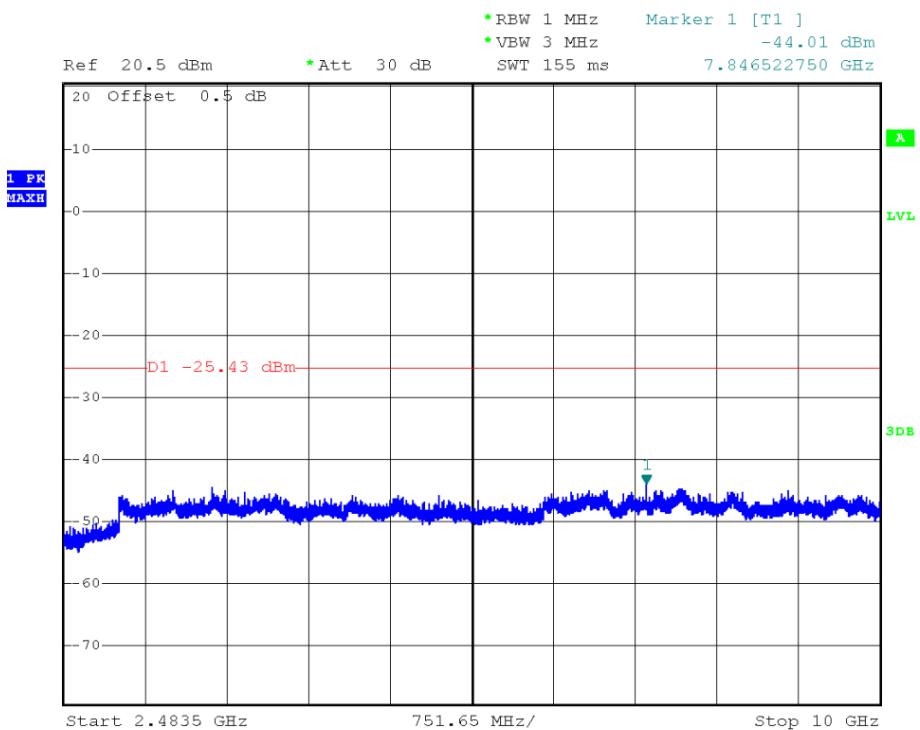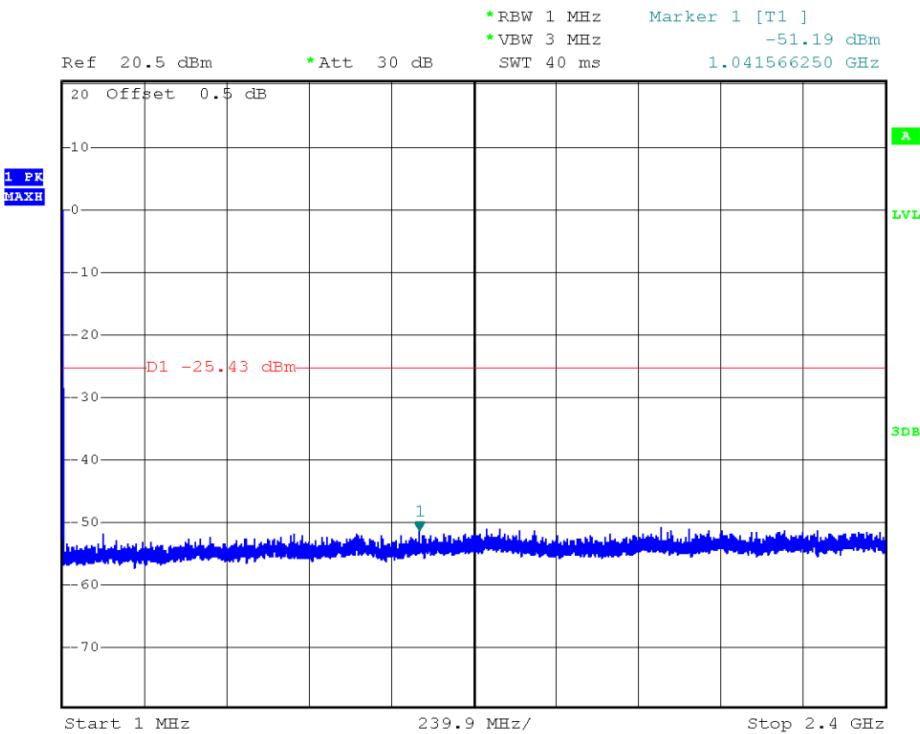

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

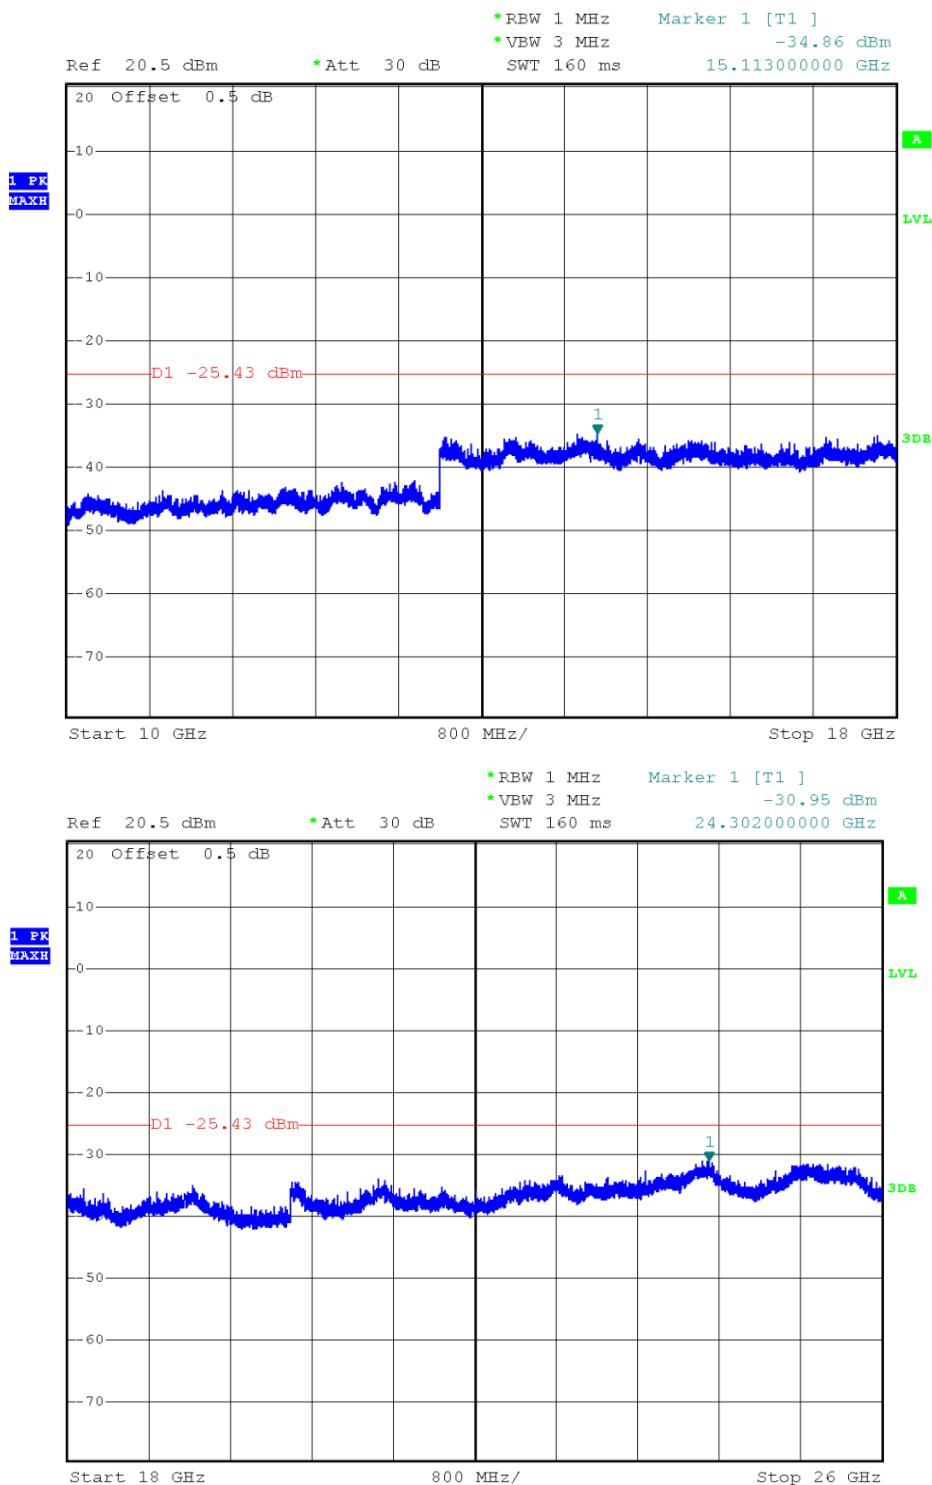


TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

802.11g

Channel 01 (2412MHz) Reference Level: -12.15dBm

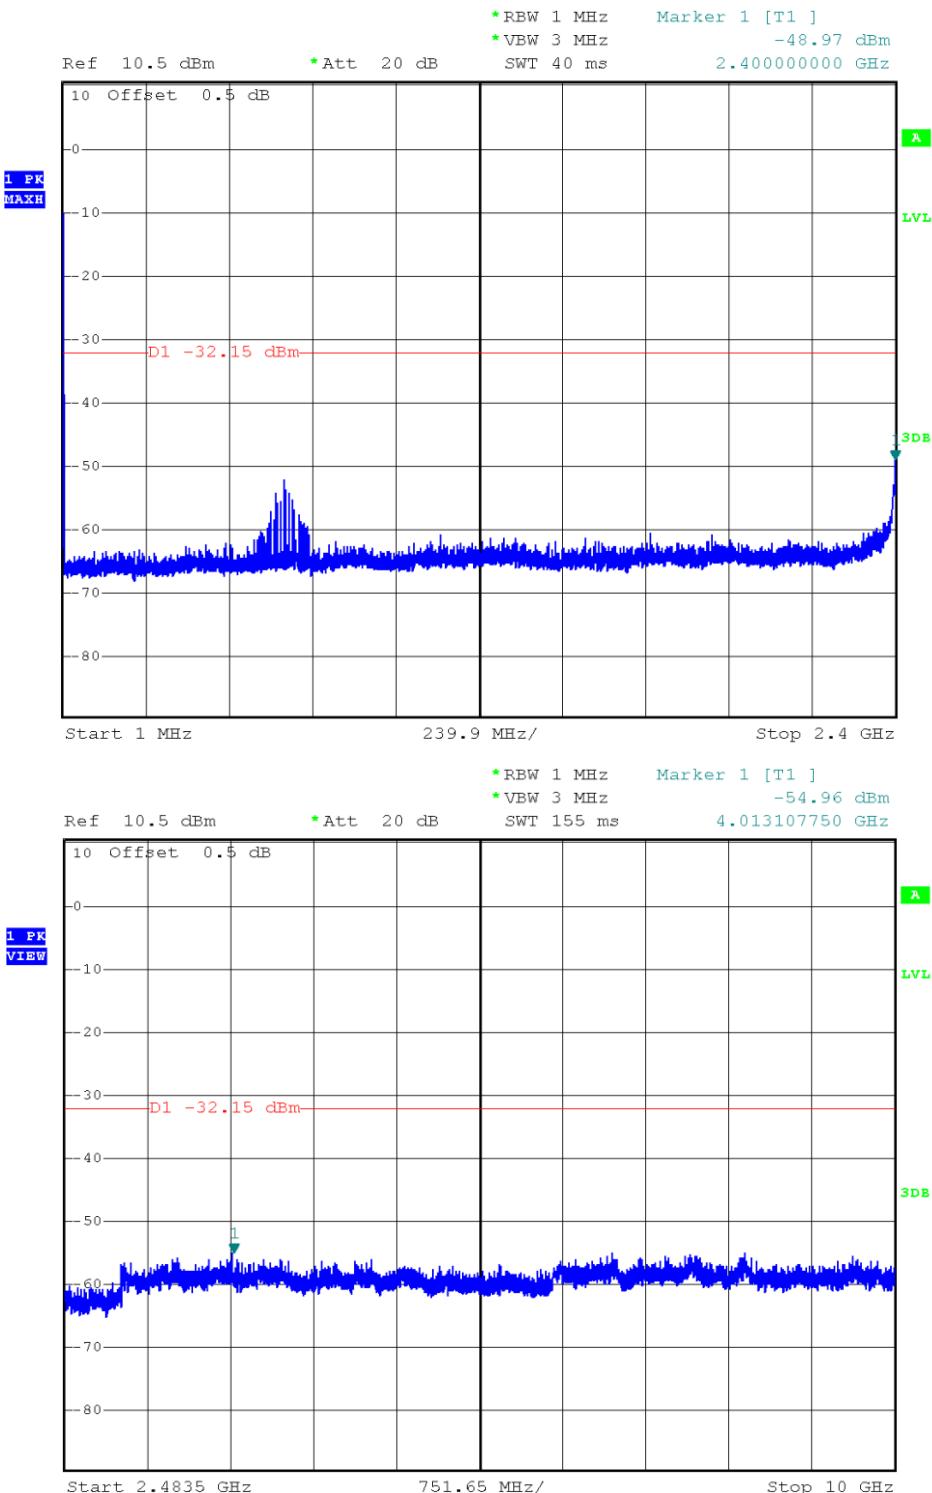


TRF no.: FCC 15C_TX_b

FCC ID: 2AA7KDORADOWF

Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

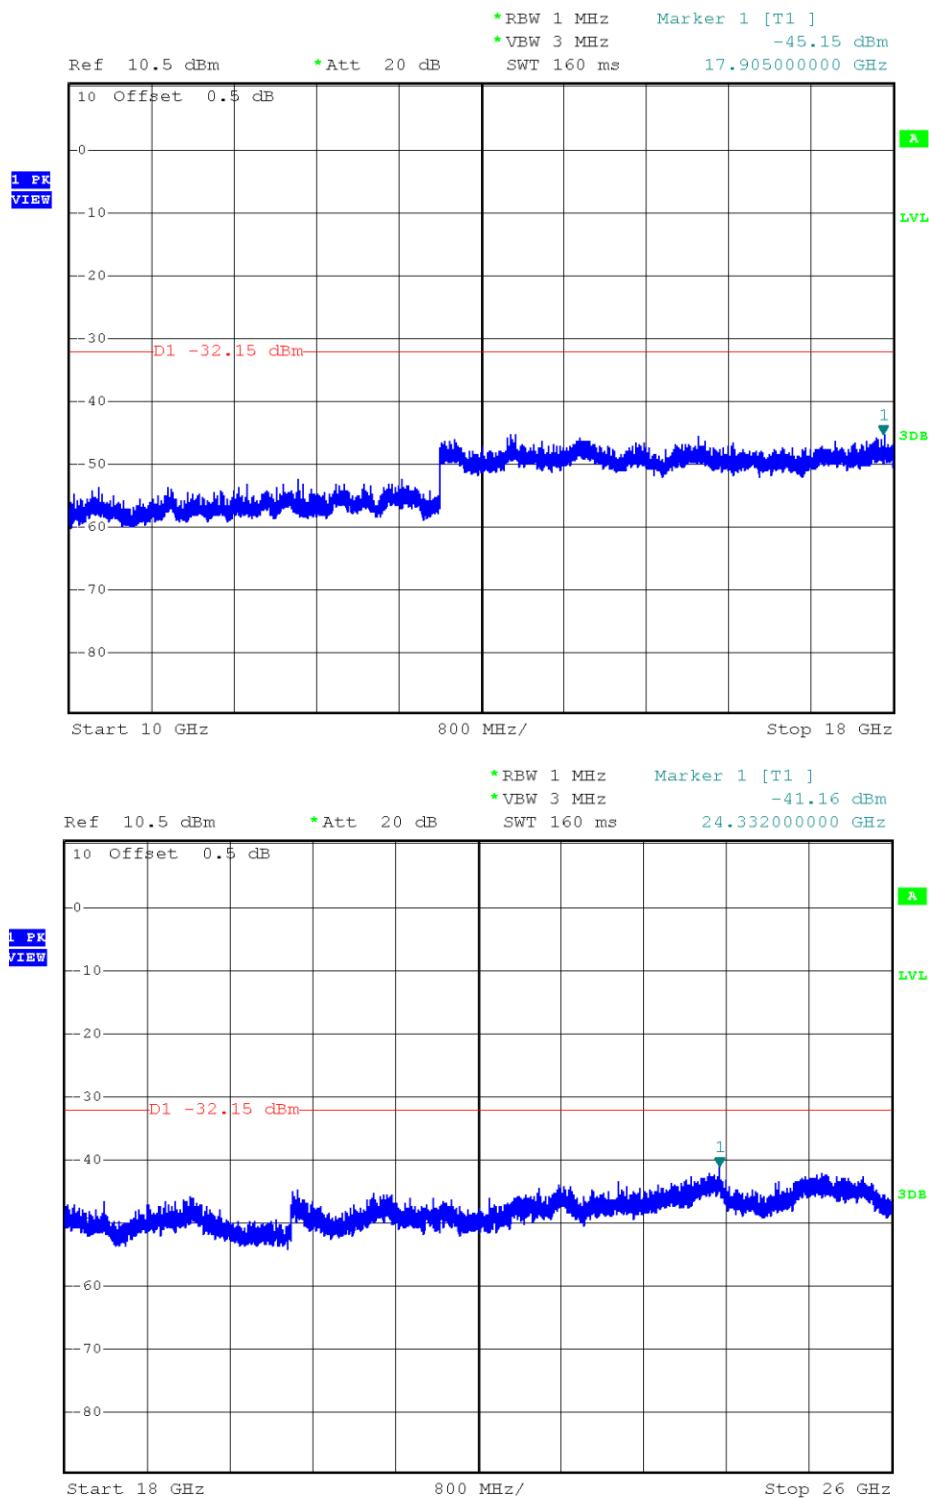

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004



INTERTEK TESTING SERVICES

Channel 06 (2437MHz) Reference Level: -12.66dBm

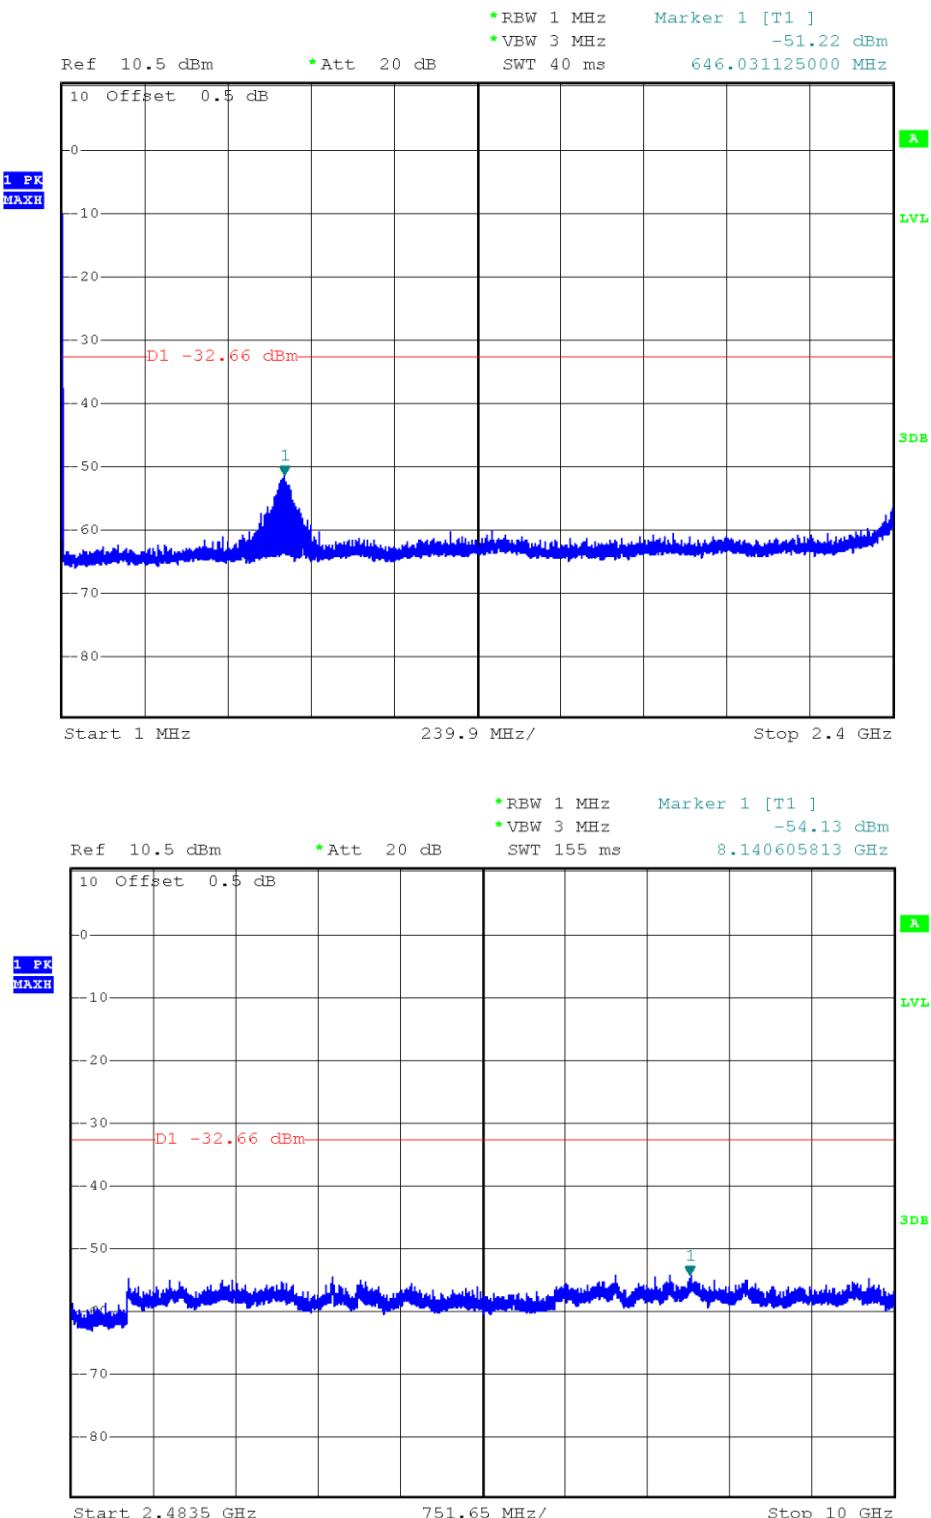

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

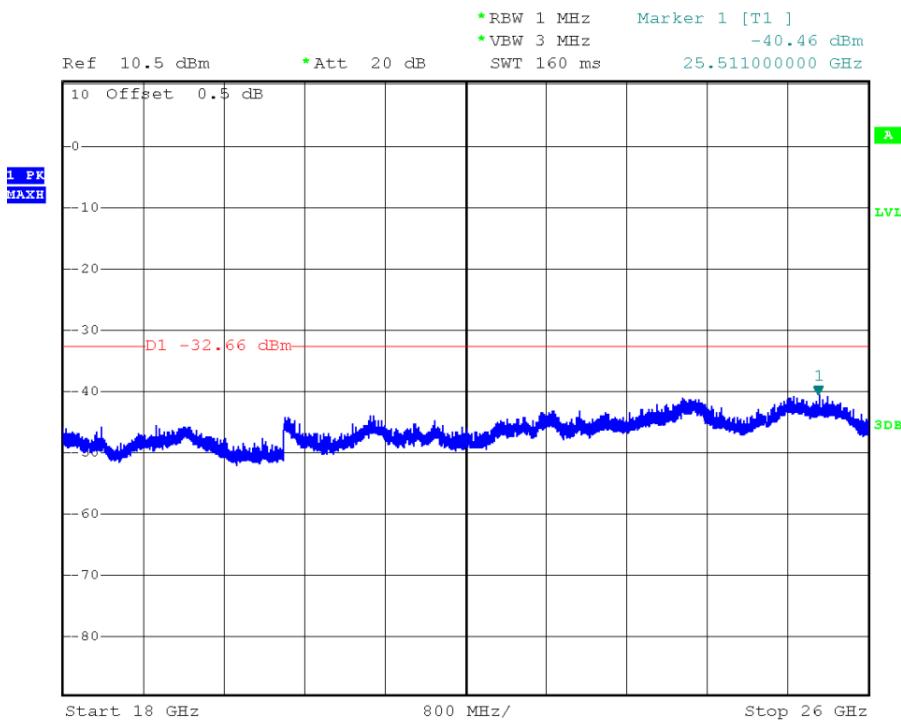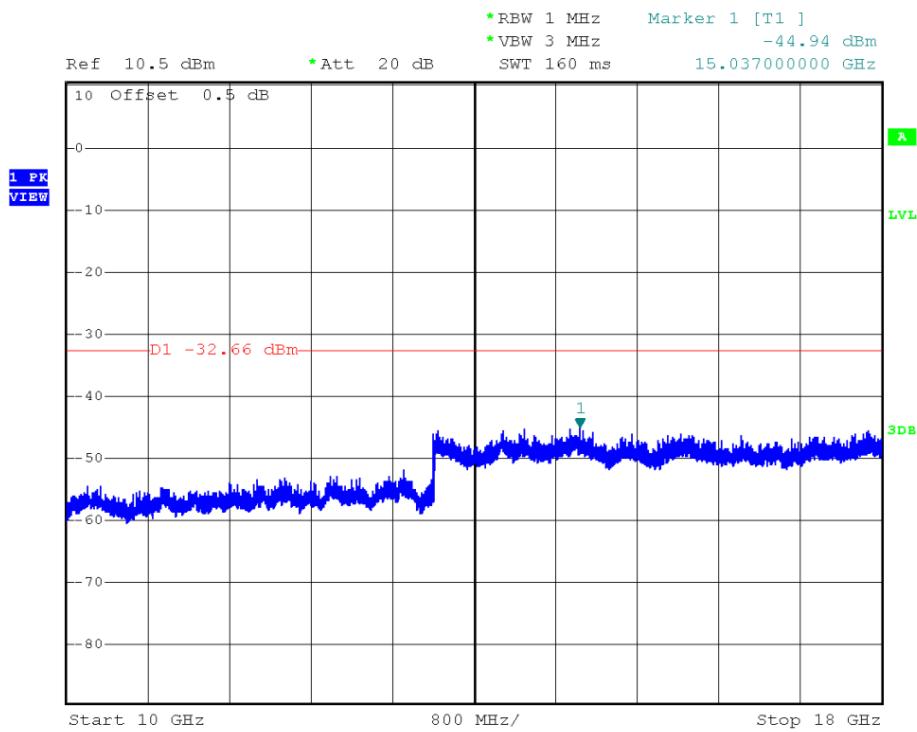

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

Channel 11 (2462MHz) Reference Level: -12.69dBm

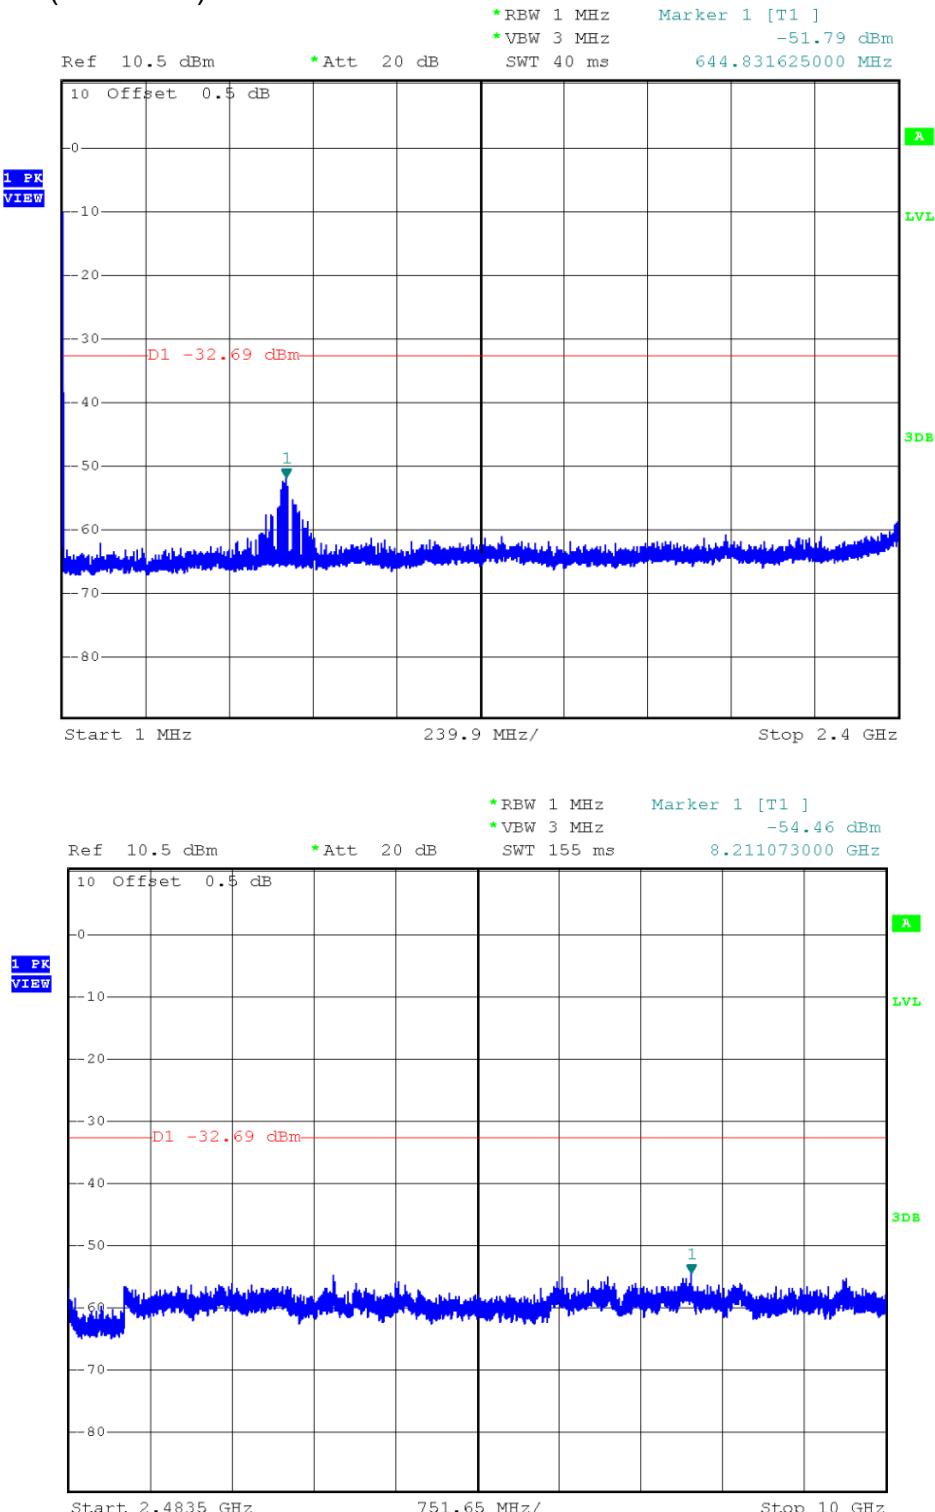

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

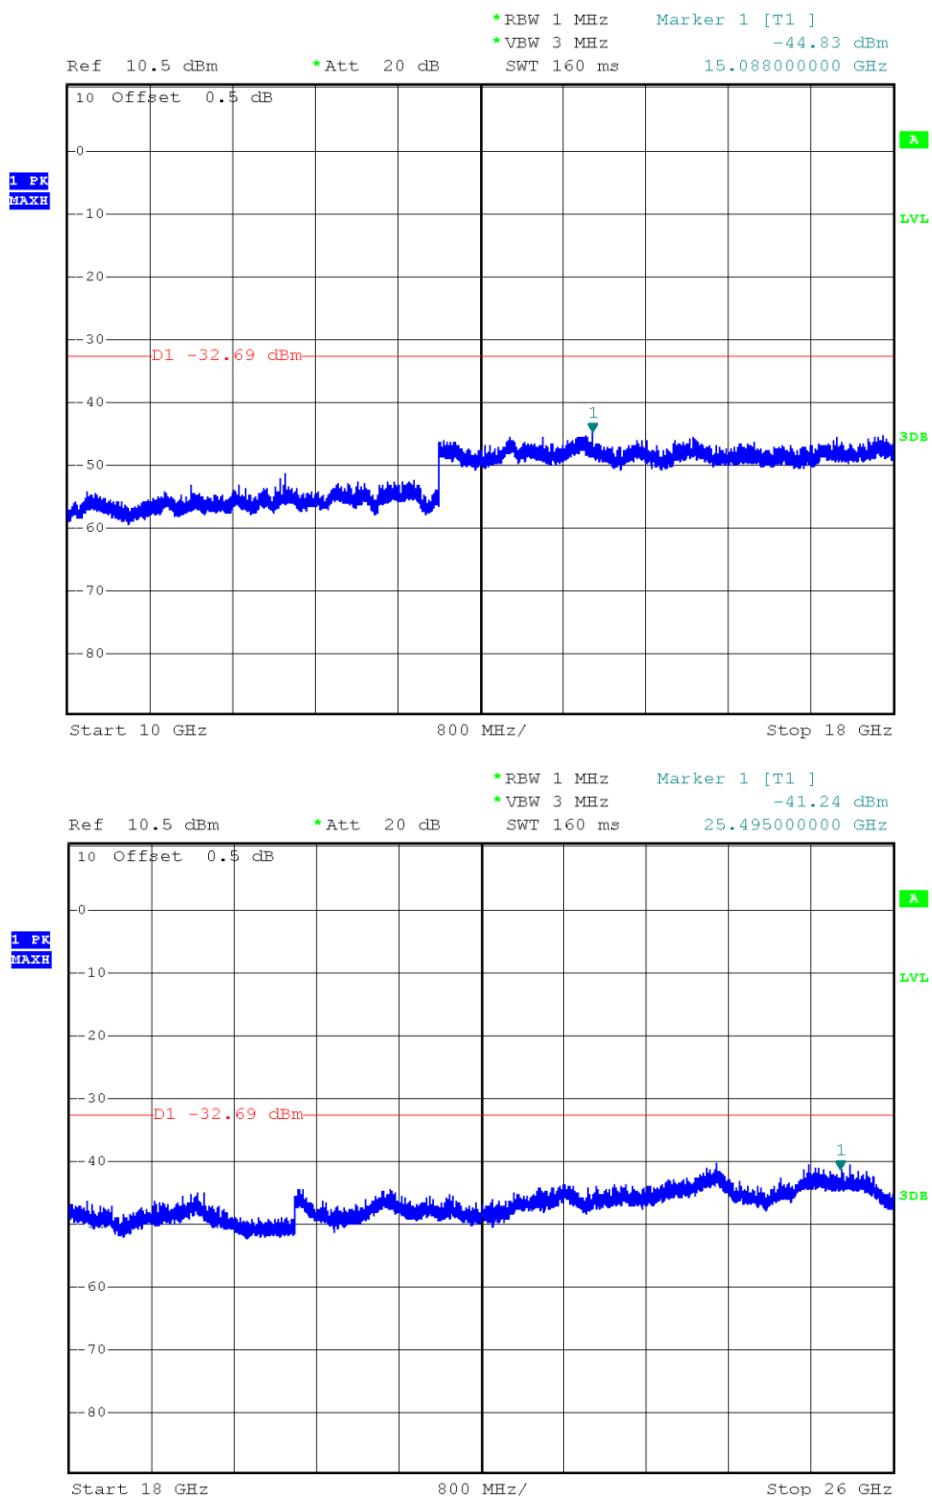


TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

802.11 n-HT20

Channel 01 (2412MHz) Reference Level: -11.35dBm

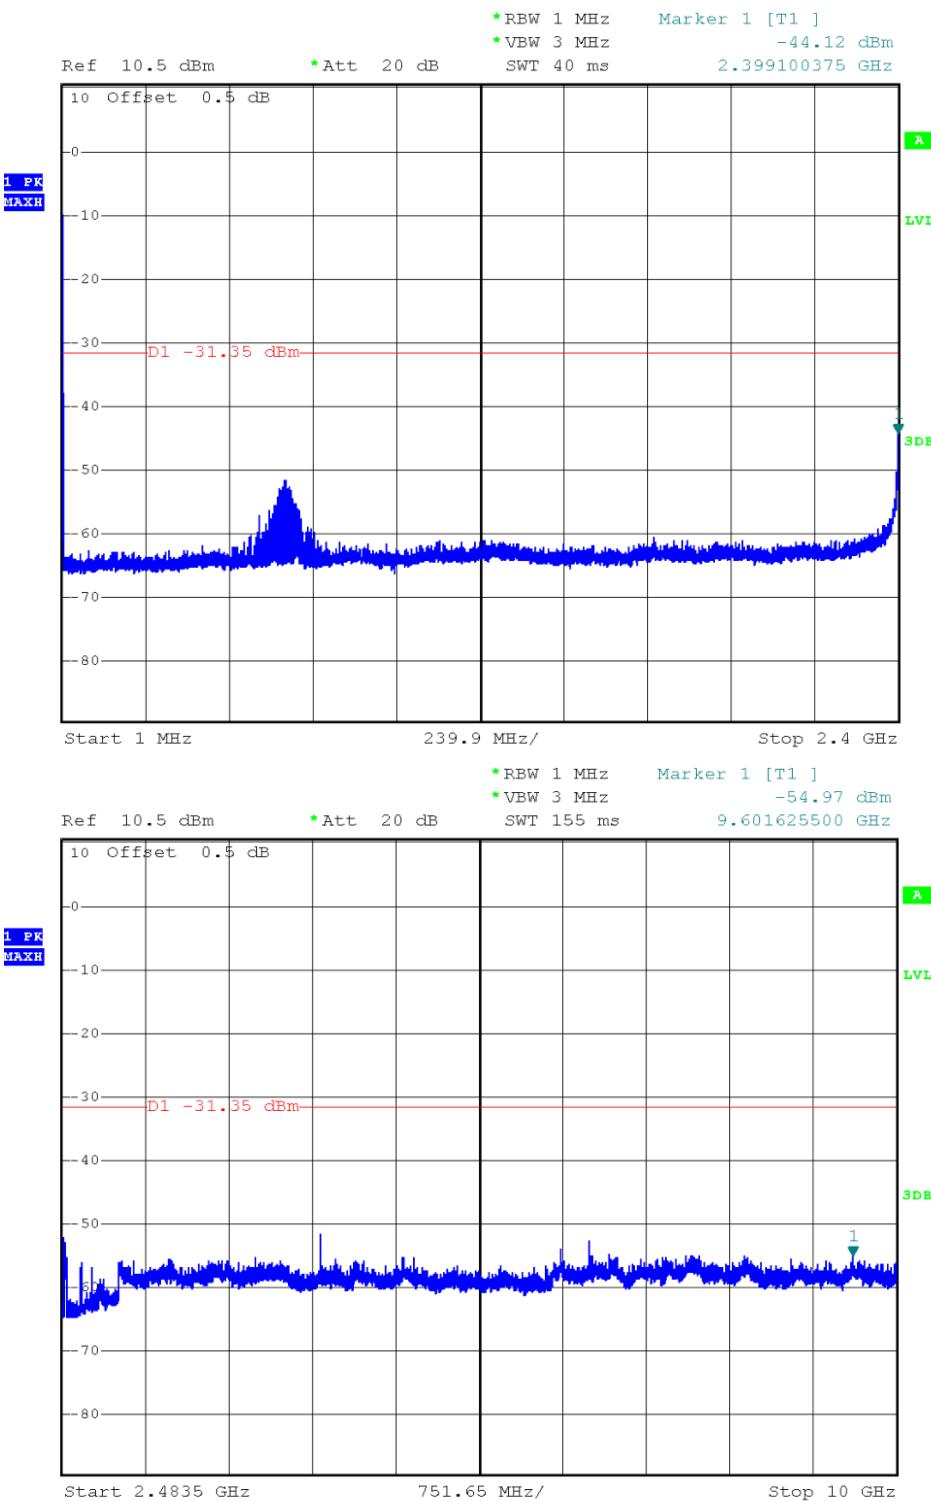


TRF no.: FCC 15C_TX_b

FCC ID: 2AA7KDORADOWF



Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

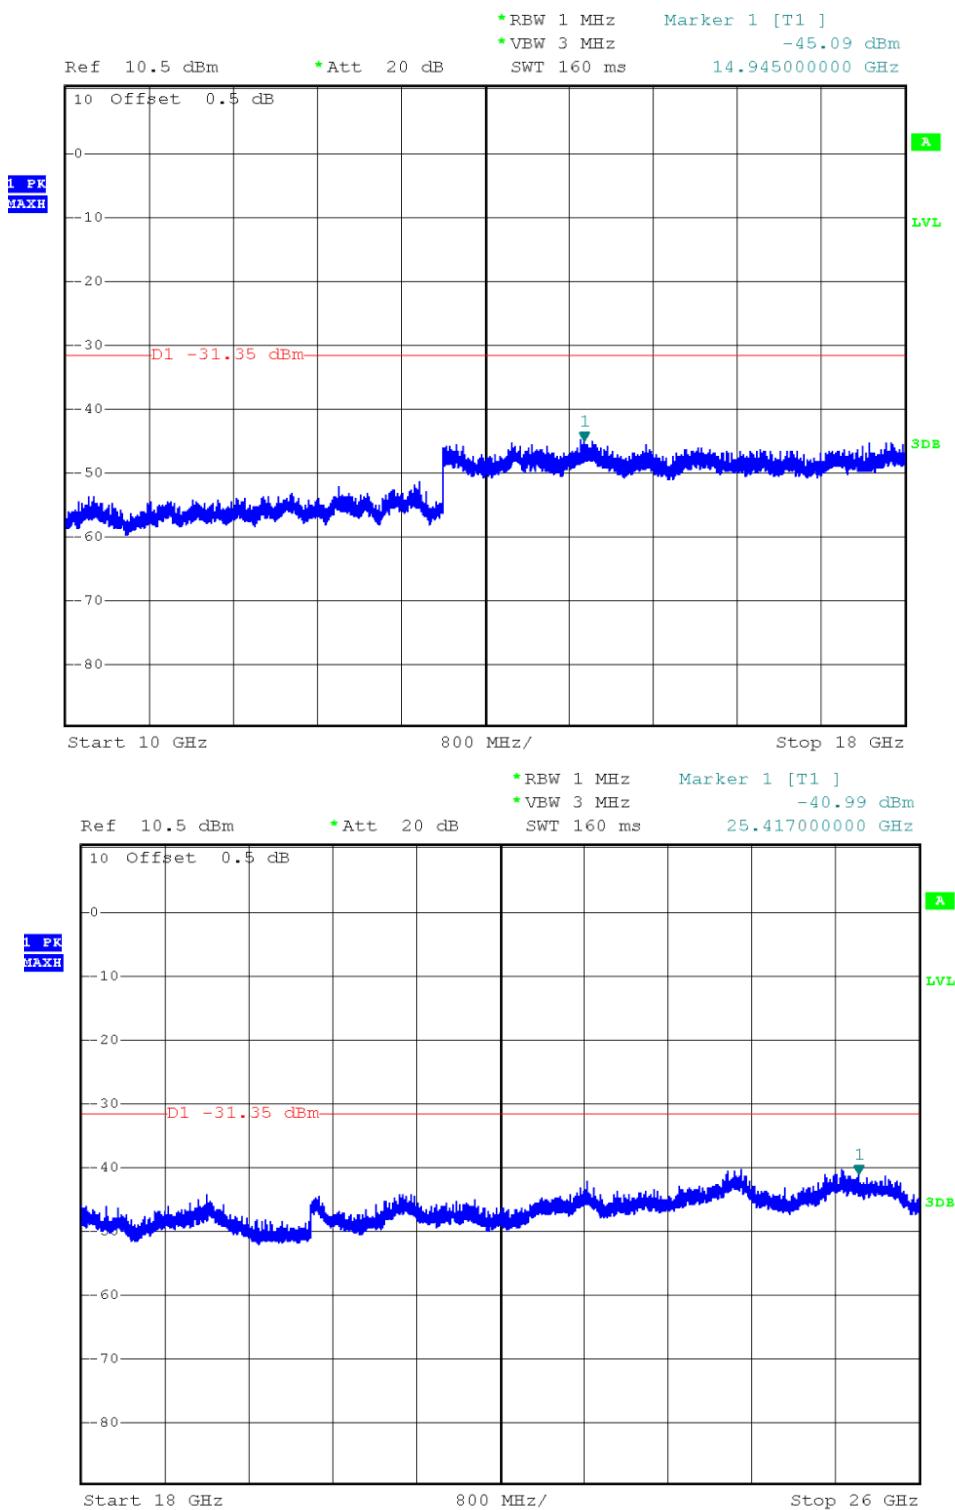


INTERTEK TESTING SERVICES

Channel 06 (2437MHz) Reference Level: -11.75dBm

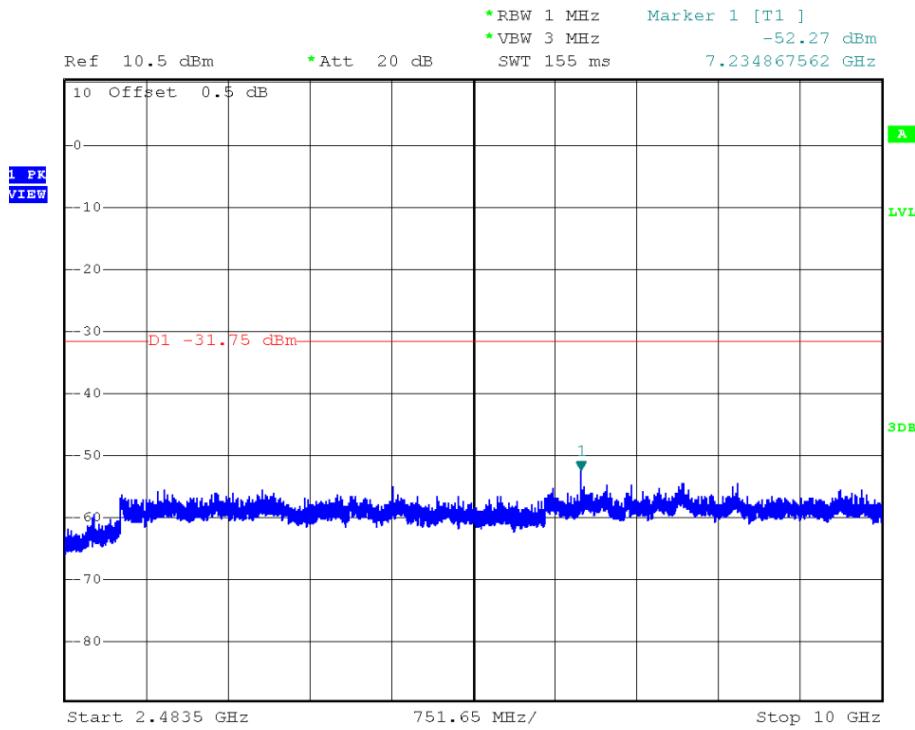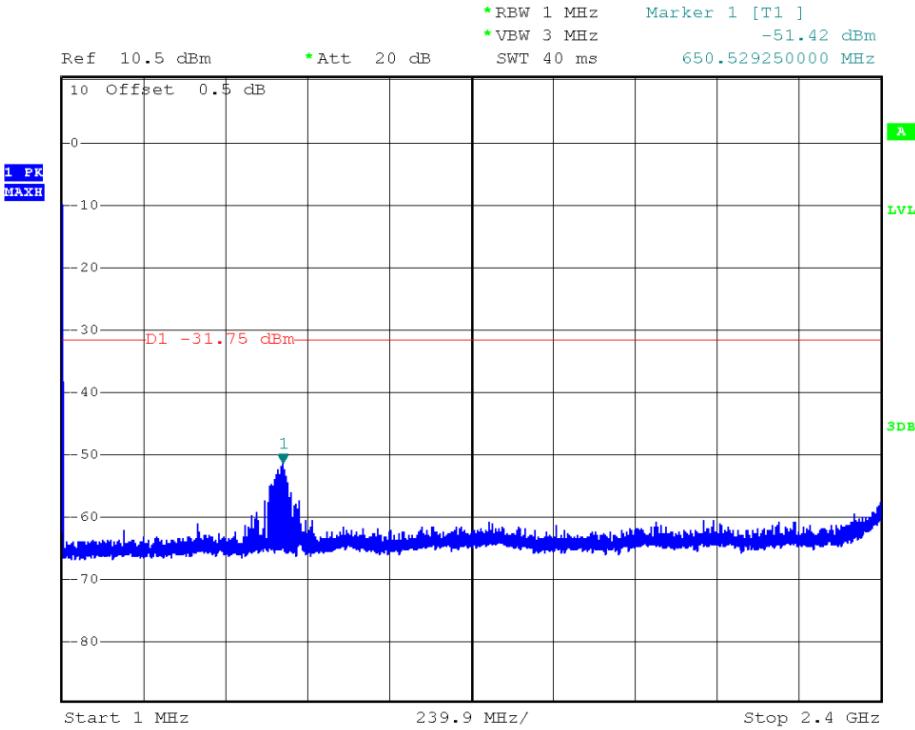

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

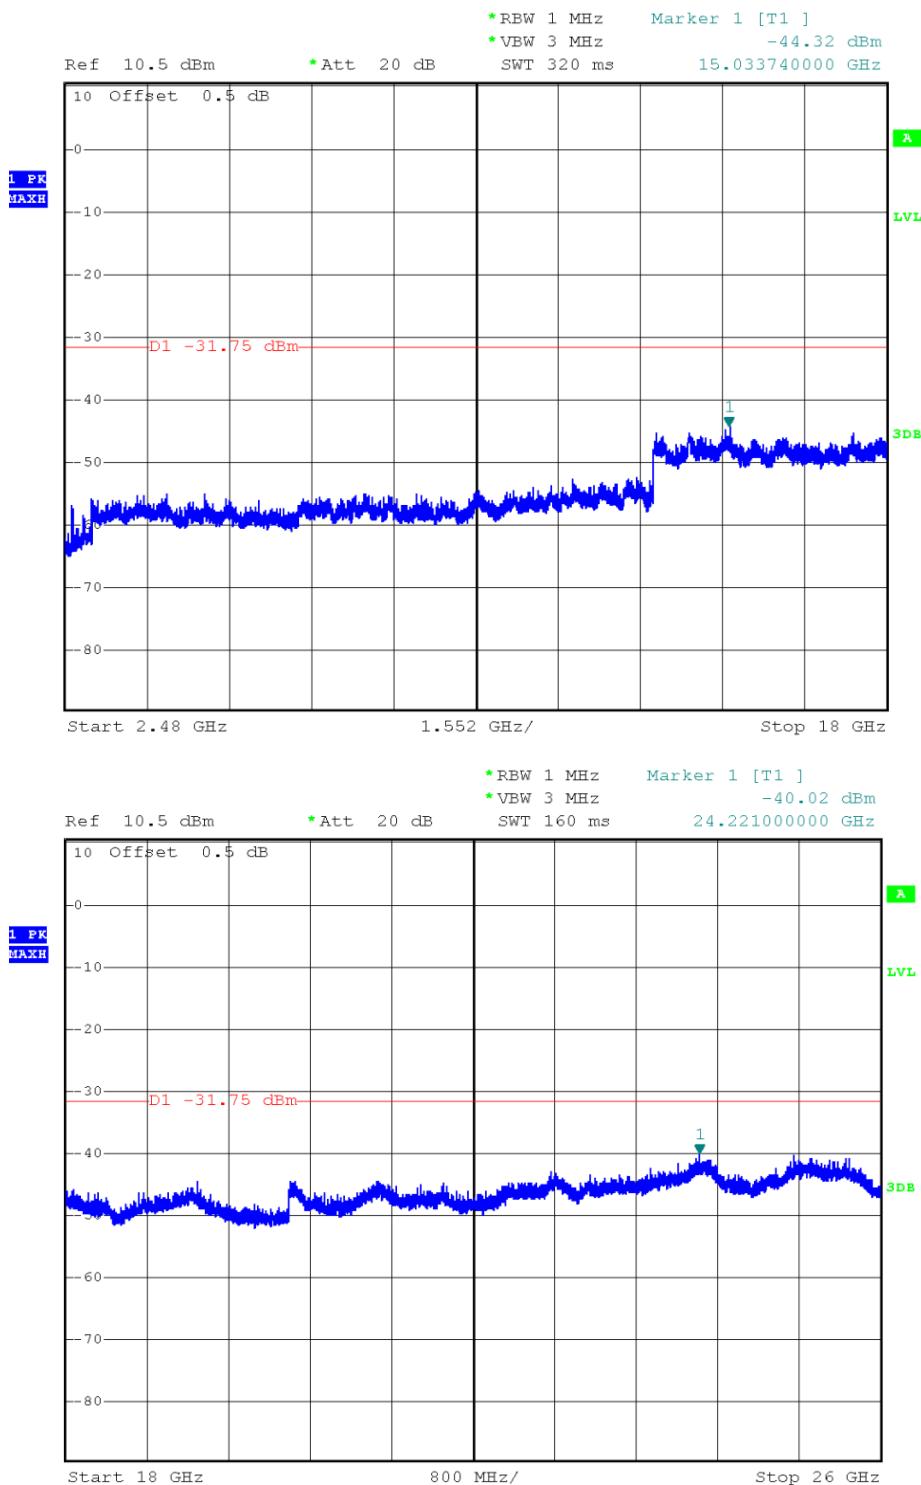

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004



INTERTEK TESTING SERVICES

Channel 11 (2462MHz) Reference Level: -11.61dBm

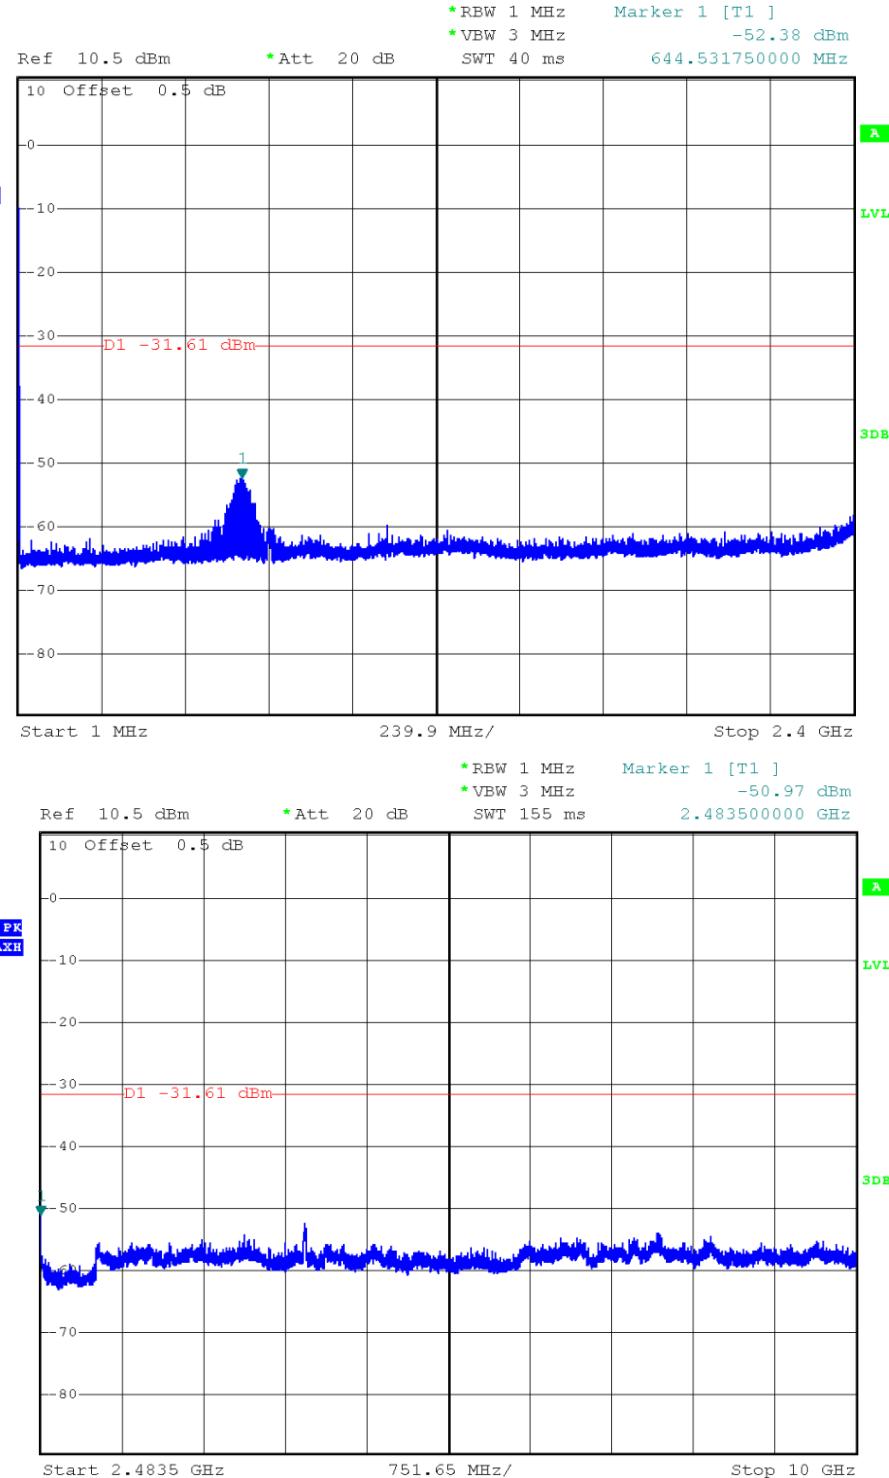

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

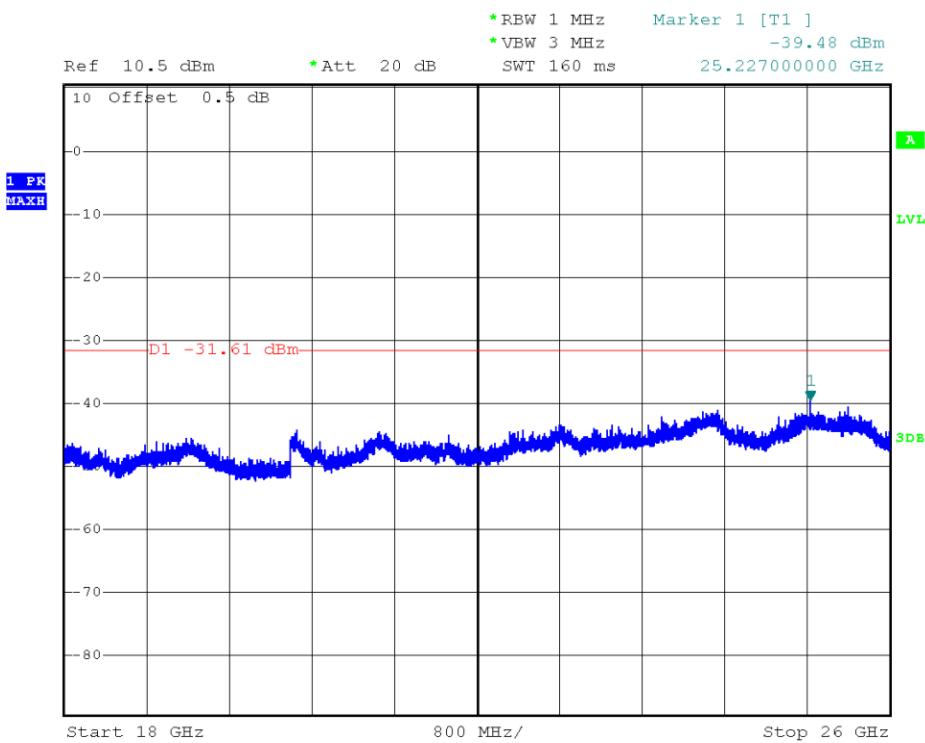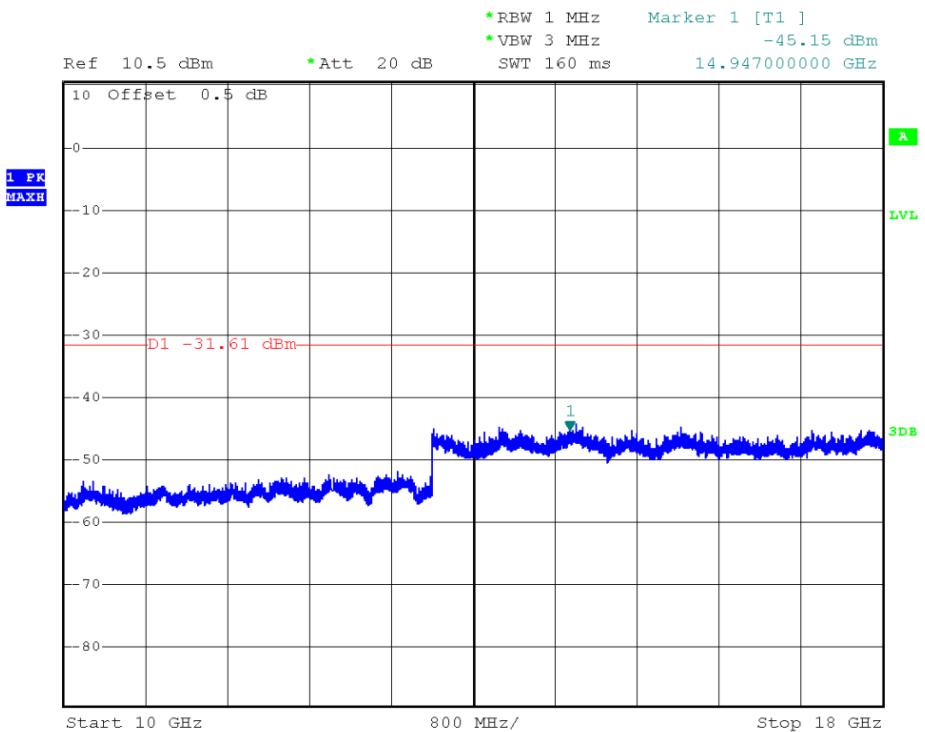


TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

802.11 n-HT40

Channel 03 (2422MHz) Reference Level: -14.96dBm

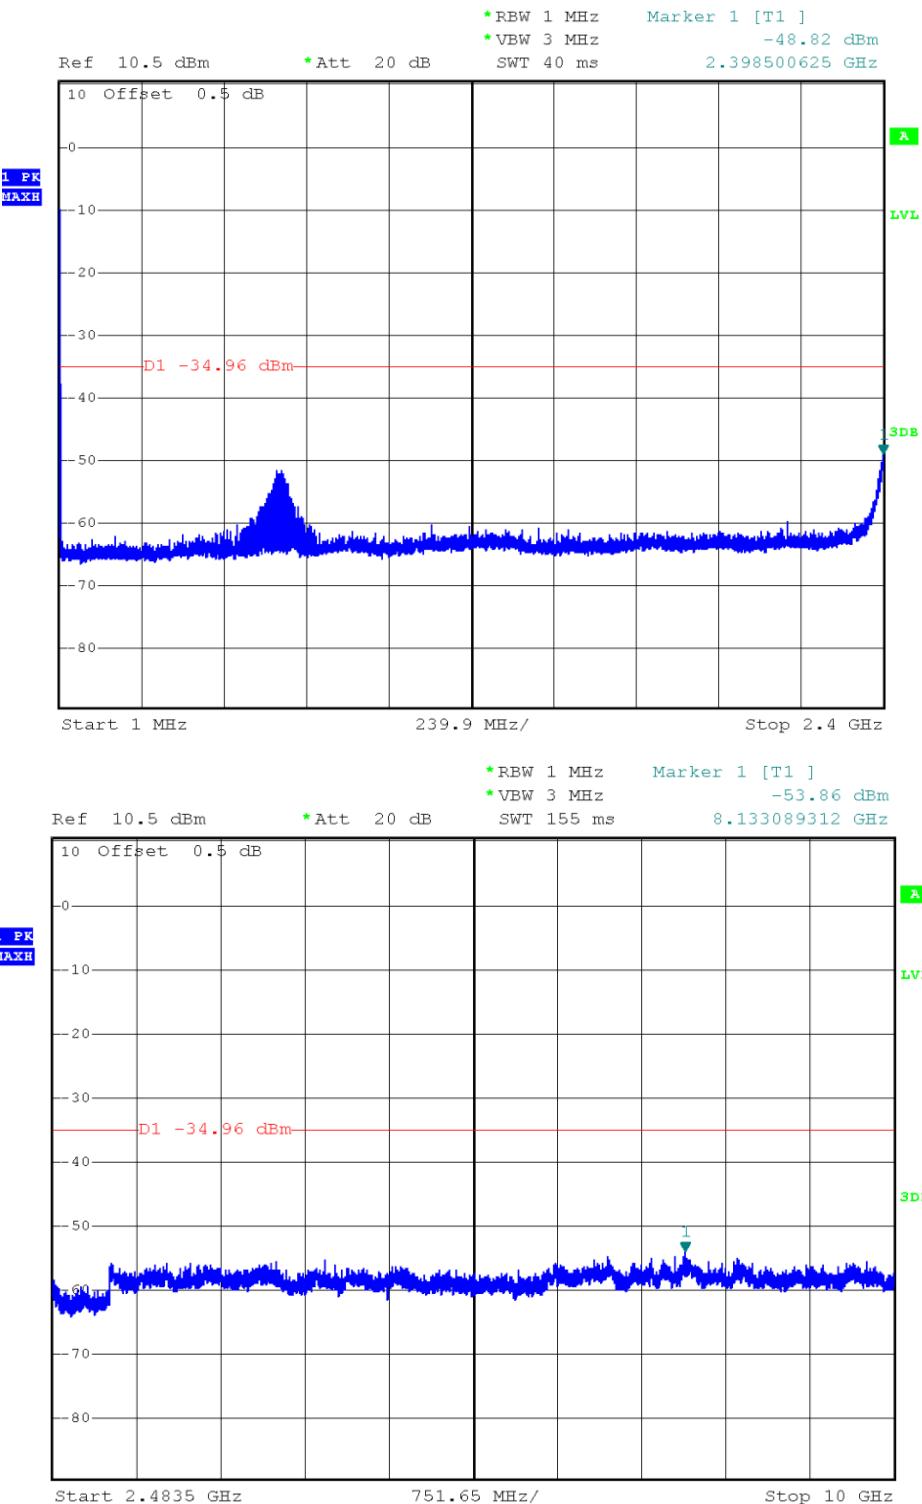


TRF no.: FCC 15C_TX_b

FCC ID: 2AA7KDORADOWF

Report No.: 131018006SZN-004



INTERTEK TESTING SERVICES

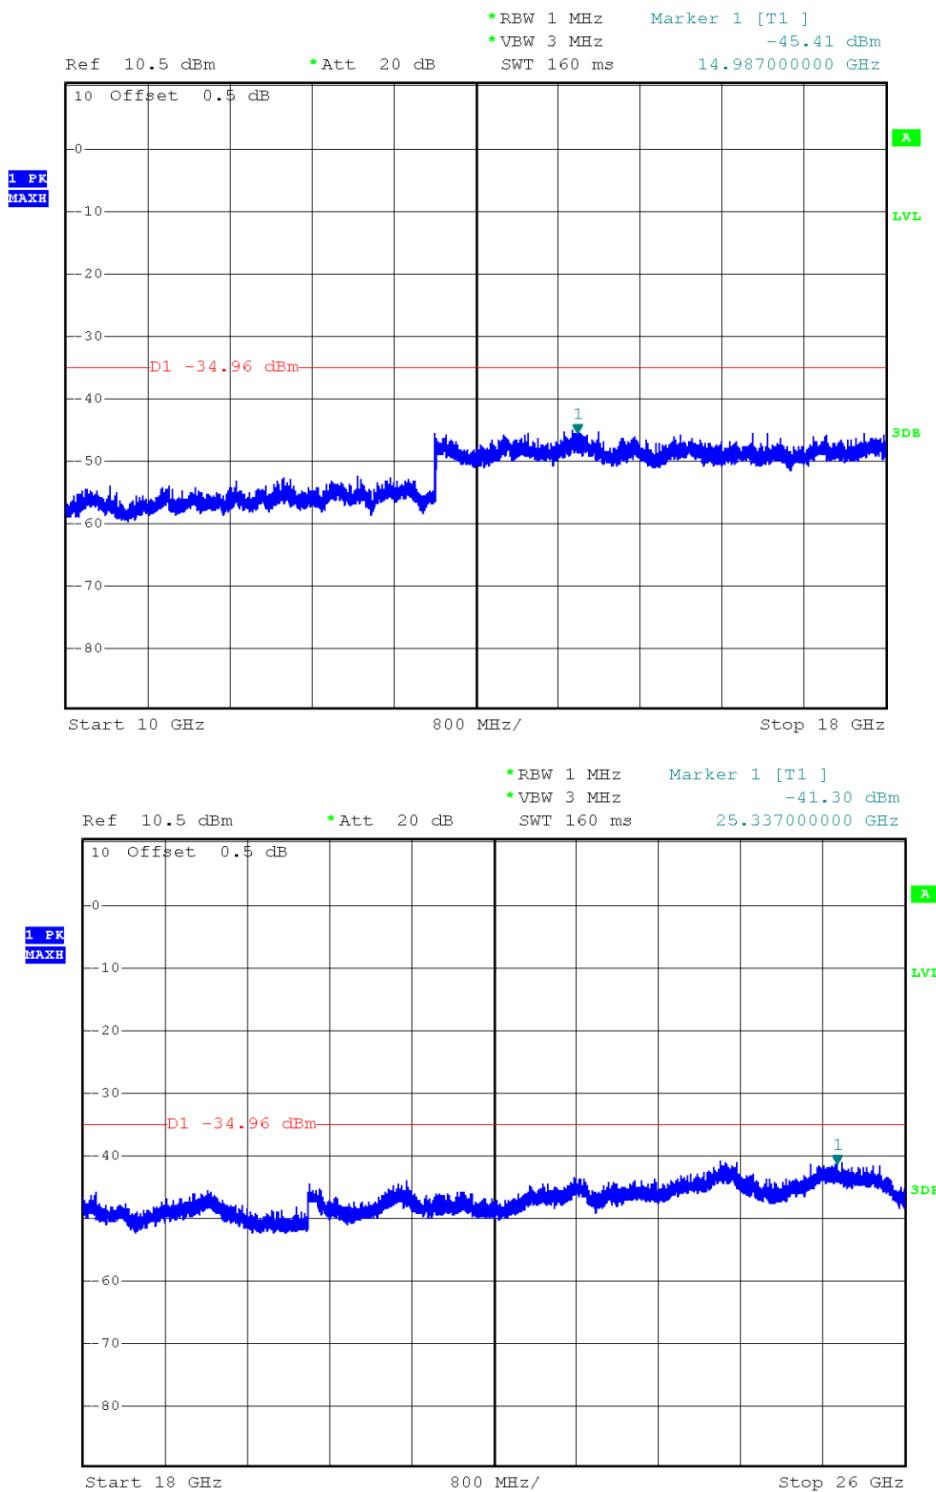

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

Channel 06 (2437MHz) Reference Level: -15.16dBm

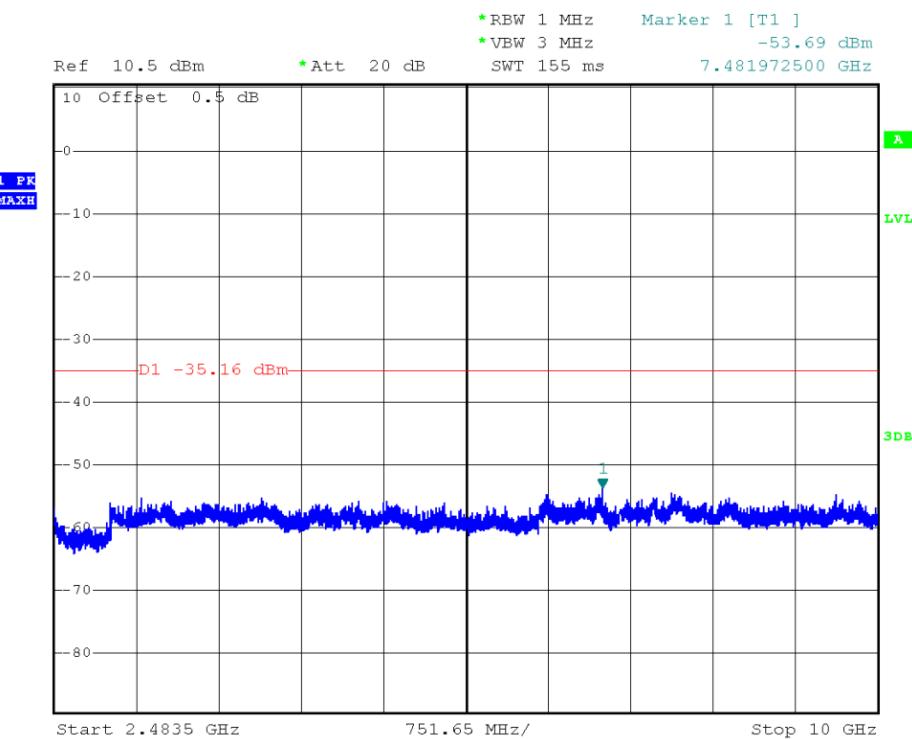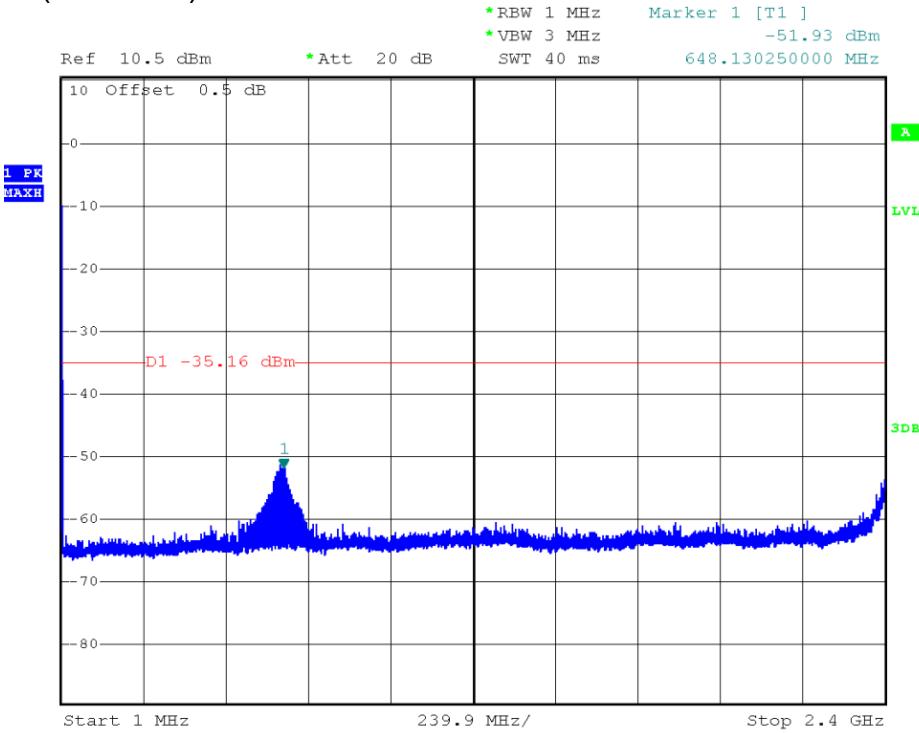

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

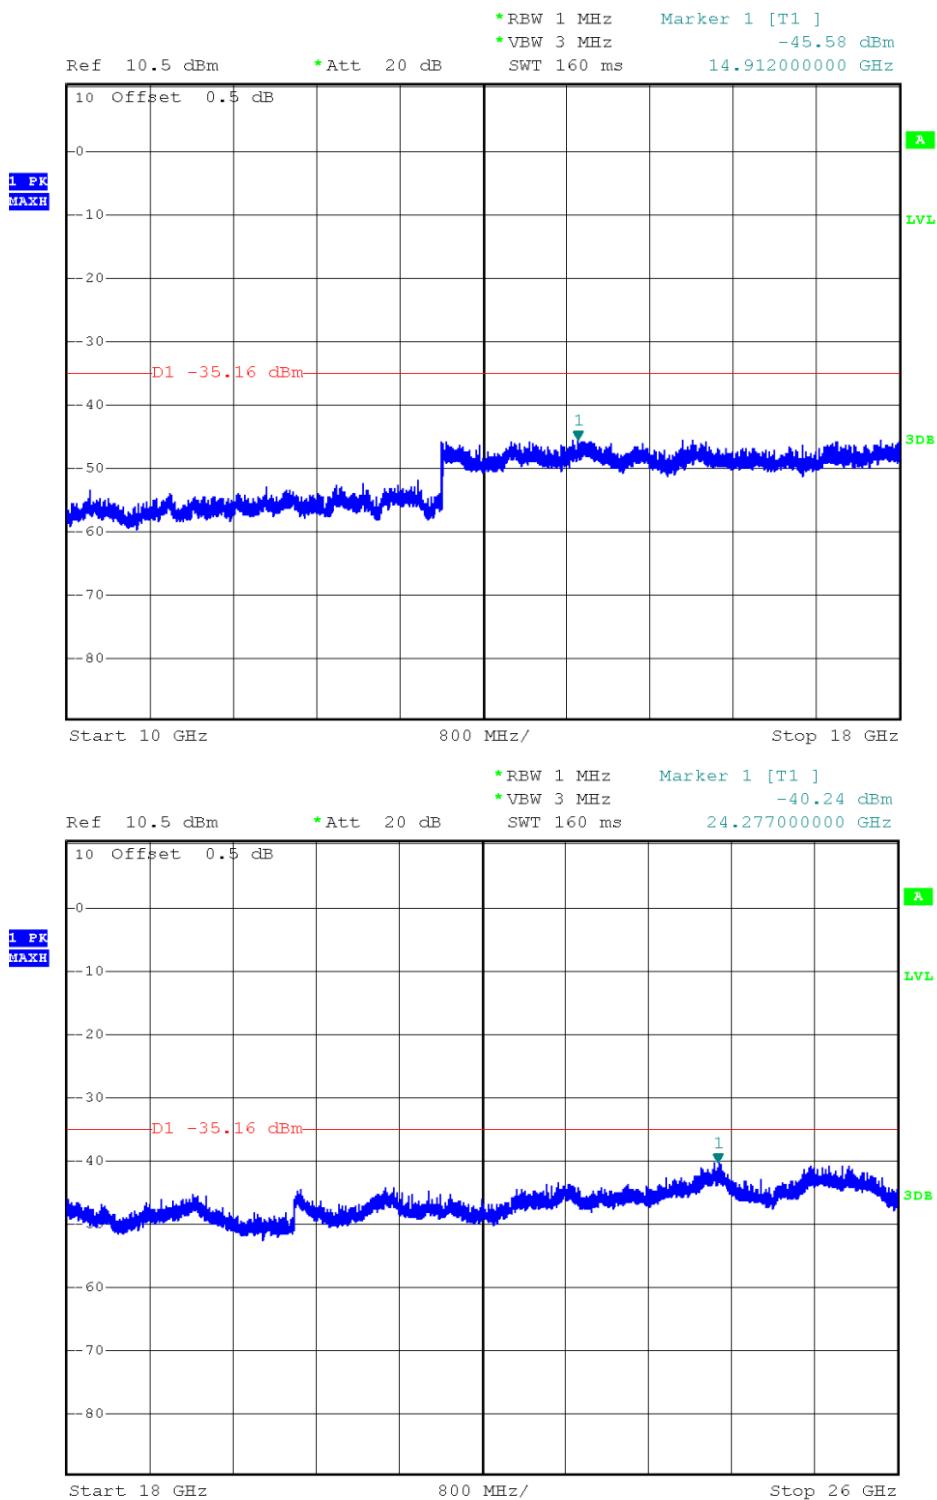

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004


INTERTEK TESTING SERVICES

Channel 9 (2452MHz) Reference Level: -14.92dBm

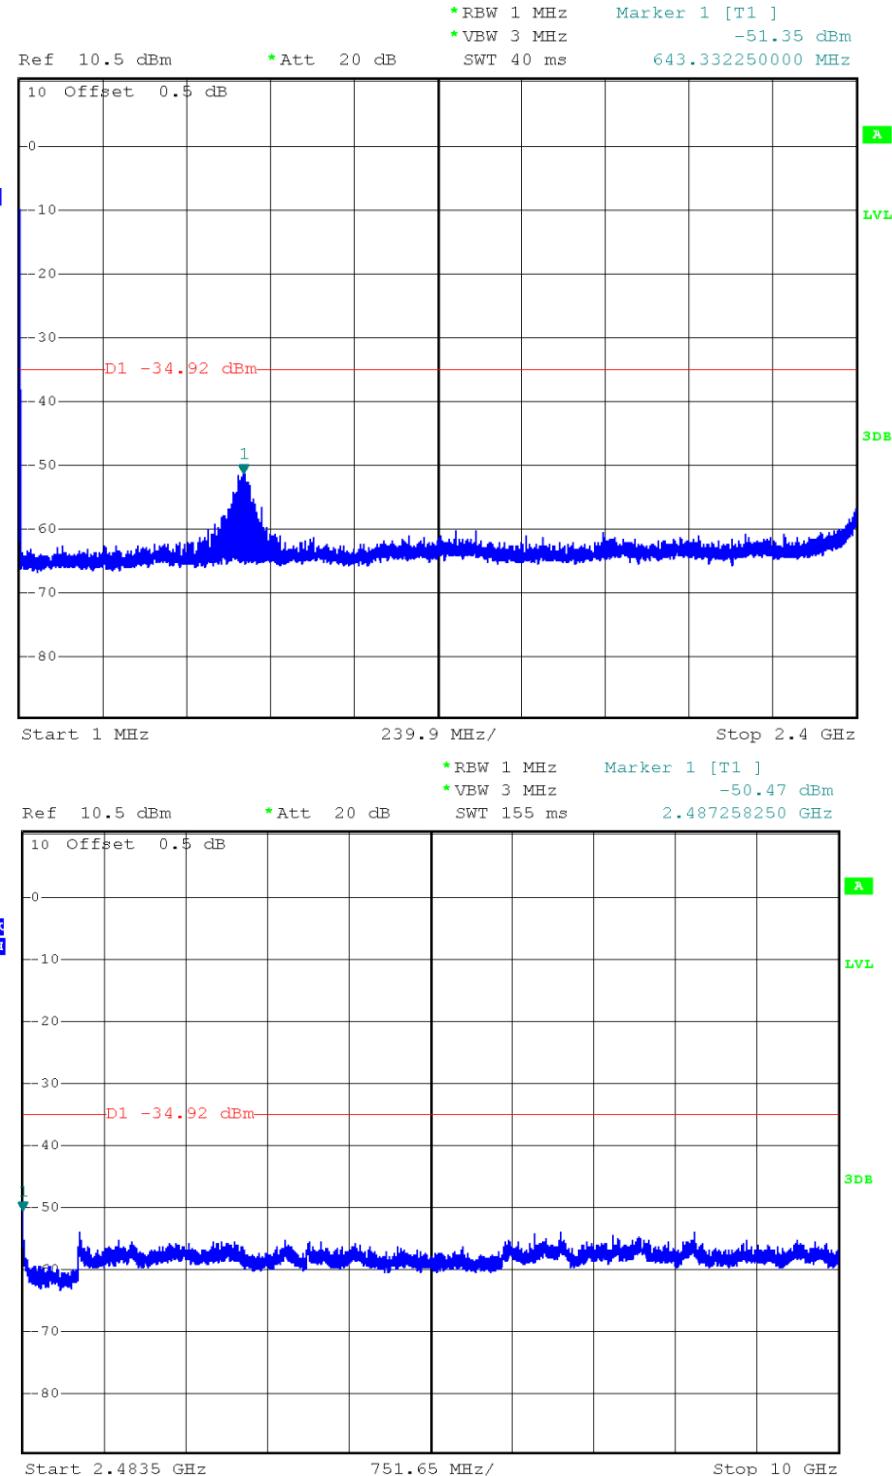

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

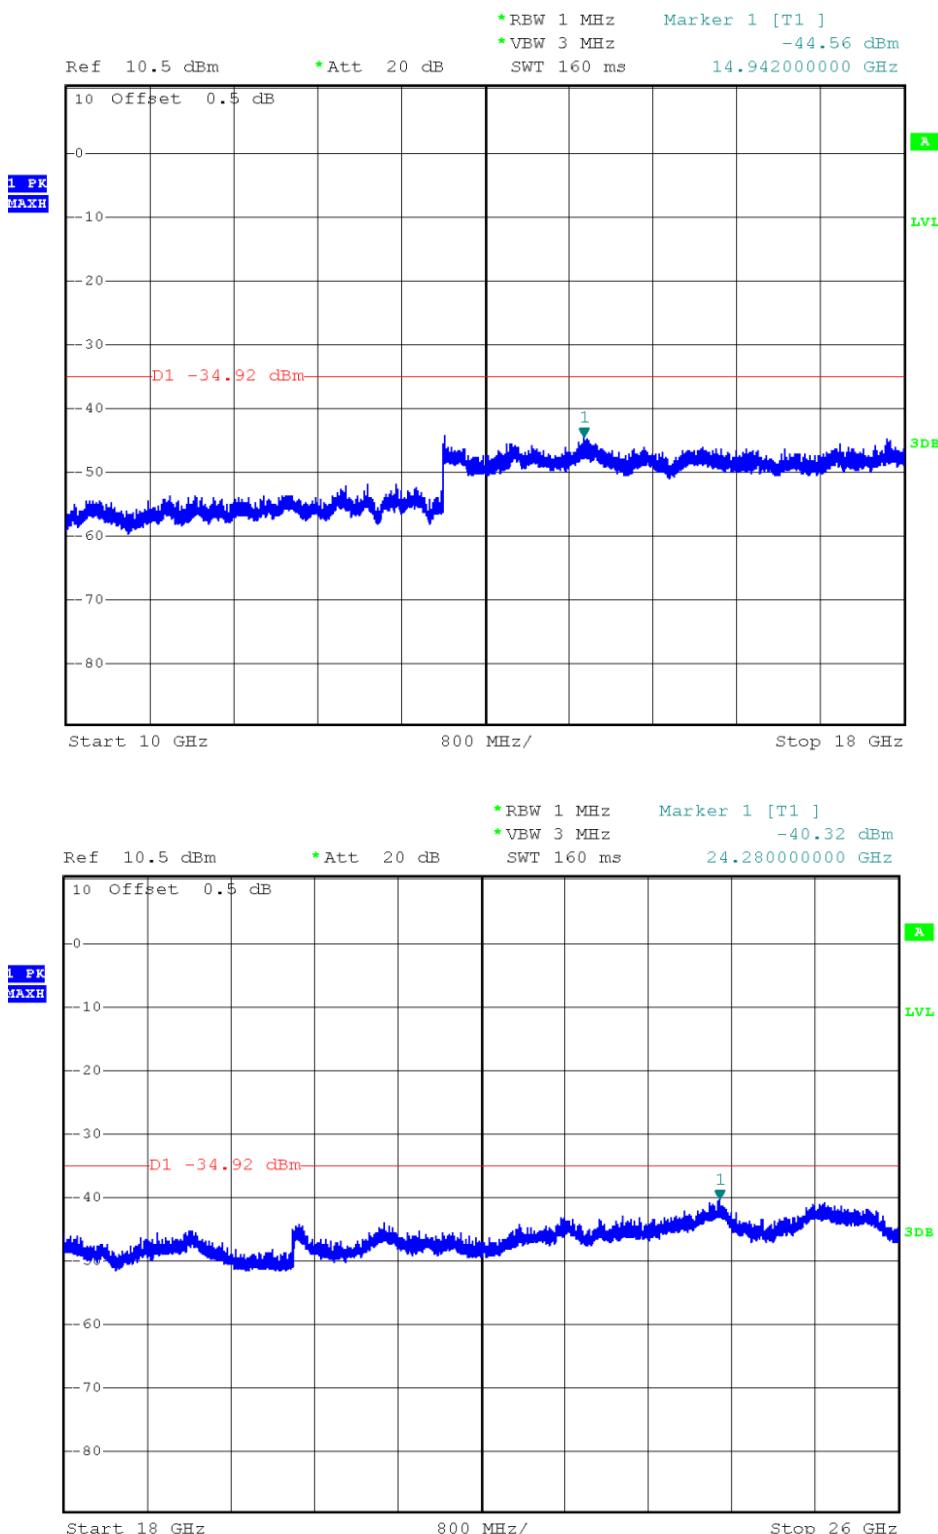

TRF no.: FCC 15C_TX_b
 FCC ID: 2AA7KDORADOWF
 Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 2, 2013

Model: Dorado

4.5 Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d):

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

- Not required, since all emissions are more than 20dB below fundamental
- See attached data sheet

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 5, 2013

Model: Dorado

4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b), (c):

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 2, 2013

Model: Dorado

4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD$$

Where FS = Field Strength in dB μ V/m
RA = Receiver Amplitude (including preamplifier) in dB μ V
CF = Cable Attenuation Factor in dB
AF = Antenna Factor in dB
AG = Amplifier Gain in dB
PD = Pulse Desensitization in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB. The net field strength for comparison to the appropriate emission limit is 42 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m}$$

$$\text{Level in mV/m} = \text{Common Antilogarithm} [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

TRF no.: FCC 15C_TX_b

FCC ID: 2AA7KDORADOWF

Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

4.8 Radiated Spurious Emission

Worst Case Radiated Spurious Emission (802.11g) at 2387.143MHz is passed by 1.5 dB margin.

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Worst Case Operating Mode: 802.11 n-HT20 (TX-Channel 11)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	30.970	24.2	20.0	16.6	20.8	40.0	-19.2
Horizontal	280.745	31.6	20.0	13.7	25.3	46.0	-20.7
Horizontal	594.055	28.2	20.0	18.9	27.1	46.0	-18.9
Vertical	87.715	41.1	20.0	7.2	28.3	40.0	-11.7
Vertical	274.925	38.8	20.0	14.1	32.9	46.0	-13.1
Vertical	666.320	33.2	20.0	19.3	32.5	46.0	-13.5

NOTES: 1. Quasi-Peak detector is used except for others stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. All emissions are below the QP limit.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11b (TX-Channel 01)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	54.2	36.1	34.1	52.2	74.0	-21.8
Horizontal	*2390.000	73.7	36.8	26.5	63.4	74.0	-10.6

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	48.3	36.1	34.1	46.3	54.0	-7.7
Horizontal	*2390.000	61.7	36.8	26.5	51.4	54.0	-2.6

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11b (TX-Channel 06)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	57.8	36.1	34.5	56.2	74.0	-17.8
Horizontal	*7311.000	49.7	35.6	37.1	51.2	74.0	-22.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	50.5	36.1	34.5	48.9	54.0	-5.1
Horizontal	*7311.000	25.7	35.6	37.1	27.2	54.0	-26.8

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11b (TX-Channel 11)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	57.9	36.1	34.7	56.5	74.0	-17.5
Horizontal	*2483.700	55.5	35.6	39.5	59.4	74.0	-14.6

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	50.4	36.1	34.7	49.0	54.0	-5.0
Horizontal	*2483.700	47.4	35.6	39.5	51.3	54.0	-2.7

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
 - * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11g (TX-Channel 01)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	55.1	36.1	34.1	53.1	74.0	-20.9
Horizontal	*2387.143	75.7	36.8	26.5	65.4	74.0	-8.6

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	34.1	36.1	34.1	32.1	54.0	-21.9
Horizontal	*2387.143	62.8	36.8	26.5	52.5	54.0	-1.5

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11g (TX-Channel 06)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	48.1	36.1	34.5	46.5	74.0	-27.5
Horizontal	*7311.000	50.0	35.6	37.1	51.5	74.0	-22.5

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	38.8	36.1	34.5	37.2	54.0	-16.8
Horizontal	*7311.000	36.4	35.6	37.1	37.9	54.0	-16.1

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11g (TX-Channel 11)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	58.5	36.1	34.7	57.1	74.0	-16.9
Horizontal	*2483.715	54.5	35.6	39.5	58.4	74.0	-15.6

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	37.5	36.1	34.7	36.1	54.0	-17.9
Horizontal	*2483.715	47.0	35.6	39.5	50.9	54.0	-3.1

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11 n-HT20 (TX-Channel 01)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	59.3	36.1	34.1	57.3	74.0	-16.7
Horizontal	*2388.914	70.4	36.8	26.5	60.1	74.0	-13.9

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	42.8	36.1	34.1	40.8	54.0	-13.2
Horizontal	*2388.914	60.8	36.8	26.5	50.5	54.0	-3.5

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
 - * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11 n-HT20 (TX-Channel 06)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	60.9	36.1	34.5	59.3	74.0	-14.7
Horizontal	*7311.000	49.9	35.6	37.1	51.4	74.0	-22.6

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	44.9	36.1	34.5	43.3	54.0	-10.7
Horizontal	*7311.000	36.7	35.6	37.1	38.2	54.0	-15.8

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11 n-HT20 (TX-Channel 11)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	61.3	36.1	34.7	59.9	74.0	-14.1
Horizontal	*2483.610	56.1	35.6	39.5	60.0	74.0	-14.0

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	44.1	36.1	34.7	42.7	54.0	-11.3
Horizontal	*2483.610	47.3	35.6	39.5	51.2	54.0	-2.8

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11 n-HT40 (TX-Channel 03)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4844.000	57.8	36.1	34.1	55.8	74.0	-18.2
Horizontal	*2389.151	68.7	36.8	26.5	58.4	74.0	-15.6

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4844.000	40.9	36.1	34.1	38.9	54.0	-15.1
Horizontal	*2389.151	60.0	36.8	26.5	49.7	54.0	-4.3

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11 n-HT40 (TX-Channel 06)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	58.3	36.1	34.5	56.7	74.0	-17.3
Horizontal	*7311.000	47.8	35.6	37.1	49.3	74.0	-24.7

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	40.8	36.1	34.5	39.2	54.0	-14.8
Horizontal	*7311.000	34.4	35.6	37.1	35.9	54.0	-18.1

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 3, 2013

Model: Dorado

Mode: 802.11 n-HT40 (TX-Channel 9)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4904.000	59.1	36.1	34.7	57.7	74.0	-16.3
Horizontal	*2483.660	57.0	35.6	39.5	60.9	74.0	-13.1

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4904.000	43.7	36.1	34.7	42.3	54.0	-11.7
Horizontal	*2483.660	45.5	35.6	39.5	49.4	54.0	-4.6

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

4.9 Conducted Emission

Worst Case Conducted emission at 0.906MHz is Passed by 18.2 dB margin

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

INTERTEK TESTING SERVICES


Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: November 29, 2013

Model: Dorado

Worst Case Operating Mode: 802.11 n-HT20 (TX-Channel 11)

Conducted Emission Test - FCC

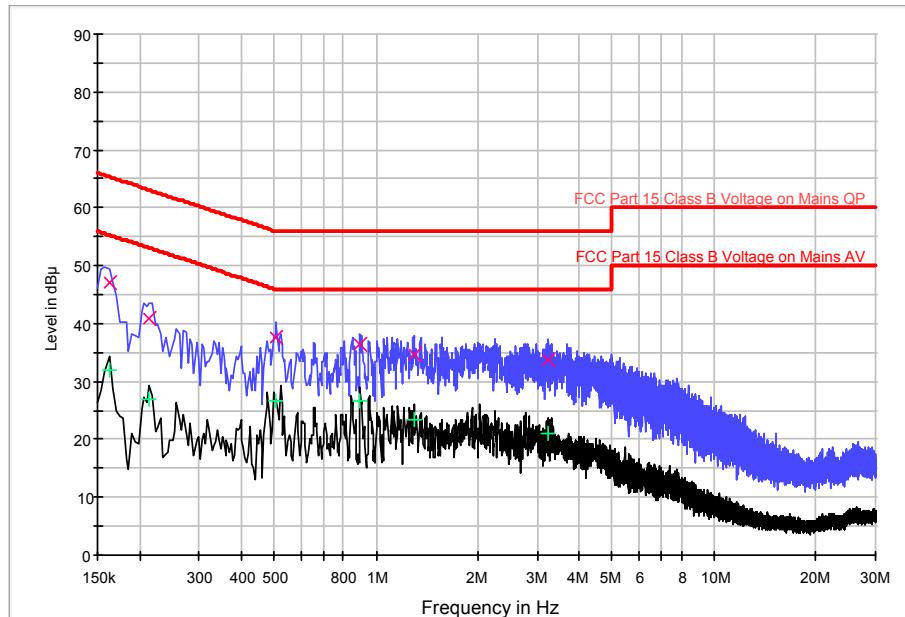

Result Table QP

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.162000	47.0	L1	9.8	18.4	65.4
0.214000	41.0	L1	9.7	22.0	63.0
0.506000	37.7	L1	9.7	18.3	56.0
0.898000	36.5	L1	9.8	19.5	56.0
1.298000	34.6	L1	9.8	21.4	56.0
3.246000	33.8	L1	9.8	22.2	56.0

Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.162000	32.0	L1	9.8	23.4	55.4
0.214000	27.0	L1	9.7	26.0	53.0
0.506000	26.5	L1	9.7	19.5	46.0
0.898000	26.6	L1	9.8	19.4	46.0
1.298000	23.4	L1	9.8	22.6	46.0
3.246000	20.9	L1	9.8	25.1	46.0

TRF no.: FCC 15C_TX_b

FCC ID: 2AA7KDORADOWF

Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES


Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: November 29, 2013

Model: Dorado

Worst Case Operating Mode: 802.11n-HT20 (TX-Channel 01)

Conducted Emission Test - FCC

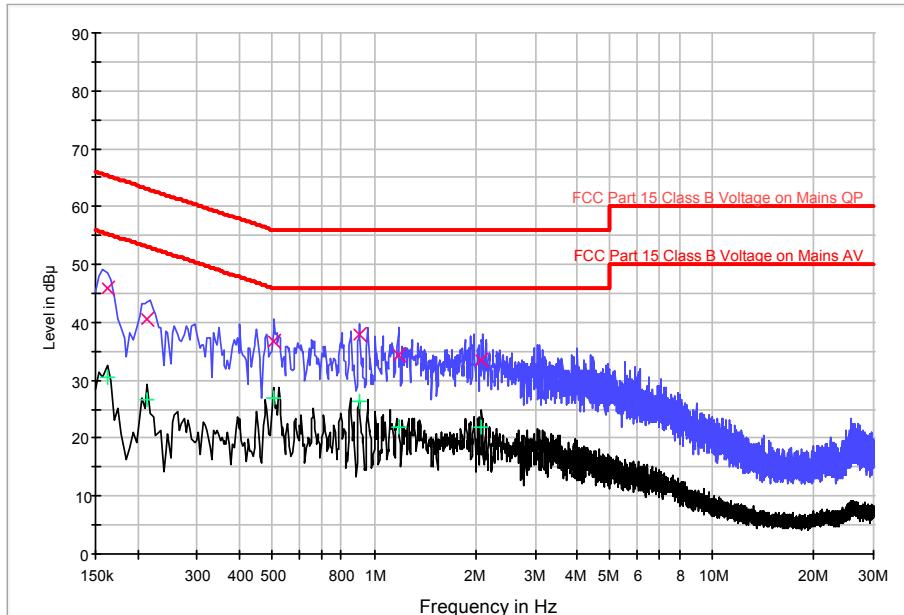

Result Table QP

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.162000	45.9	N	10.2	19.5	65.4
0.214000	40.5	N	10.2	22.5	63.0
0.502000	36.8	N	10.2	19.2	56.0
0.906000	37.8	N	10.3	18.2	56.0
1.182000	34.3	N	10.3	21.7	56.0
2.082000	33.4	N	10.4	22.6	56.0

Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.162000	30.4	N	10.2	25.0	55.4
0.214000	26.5	N	10.2	26.5	53.0
0.502000	26.9	N	10.2	19.1	46.0
0.906000	26.5	N	10.3	19.5	46.0
1.182000	21.8	N	10.3	24.2	46.0
2.082000	22.0	N	10.4	24.0	46.0

TRF no.: FCC 15C_TX_b

FCC ID: 2AA7KDORADOWF

Report No.: 131018006SZN-004

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 5, 2013

Model: Dorado

4.10 Radiated Emissions from Digital Section of Transceiver, FCC Ref: 15.109

- [] Not required - No digital part
- [] Test results are attached
- [x] Included in the separated report.

INTERTEK TESTING SERVICES

Applicant: STAR SYSTEMS INTERNATIONAL LIMITED

Date of Test: December 5, 2013

Model: Dorado

4.11 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for Transmitter timing
	See Transmitter timing diagram provided by manufacturer
x	Not applicable, duty cycle was not used.

INTERTEK TESTING SERVICES

EXHIBIT 5

EQUIPMENT PHOTOGRAPHS

INTERTEK TESTING SERVICES

5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.doc & internal photos.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 6

PRODUCT LABELLING

INTERTEK TESTING SERVICES

6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 7

TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

INTERTEK TESTING SERVICES

EXHIBIT 8

INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

INTERTEK TESTING SERVICES

EXHIBIT 9

CONFIDENTIALITY REQUEST

INTERTEK TESTING SERVICES

9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 10

MISCELLANEOUS INFORMATION

INTERTEK TESTING SERVICES

10.0 Discussion of Pulse Desensitization

The determination of pulse desensitivity was made in accordance with Hewlett Packard Application Note 150-2, *Spectrum Analysis ... Pulsed RF*.

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

INTERTEK TESTING SERVICES

EXHIBIT 11

TEST EQUIPMENT LIST

INTERTEK TESTING SERVICES

11.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00066460	20-Jul-13	20-Jan-14
SZ185-01	EMI Receiver	R&S	ESCI	100547	20-Jul-13	20-Jan-14
SZ061-07	Pyramidal Horn Antenna	ETS	3160-09	00083067	20-Jul-13	20-Jan-14
SZ061-08	Horn Antenna	ETS	3115	00092346	17-Oct-13	17-Apr-14
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	17-Oct-13	17-Apr-14
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	20-Jul-13	20-Jan-14
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	18-Oct-13	18-Apr-14
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	18-Oct-13	18-Apr-14
SZ062-02	RF Cable	RADIALL	RG 213U	--	20-Jul-13	20-Jan-14
SZ062-06	RF Cable	RADIALL	0.04-26.5GHz	--	17-Oct-13	17-Apr-14
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	17-Oct-13	17-Apr-14
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	20-Jul-13	20-Jan-14
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	18-Oct-13	18-Apr-14
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	18-Oct-13	18-Apr-14
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	18-Oct-13	18-Apr-14
SZ188-03	Shielding Room	ETS	RFD-100	4100	18-Oct-13	18-Apr-14