



# FCC Part 15C Test Report

## FCC ID:2AA8L8811S-RF

Product Name:	8811S-RF Getway
Trademark:	N/A
Model Name :	8811S-RF, 8811S-RF-xxxY(x=0~9,Y=A~Z), S-2000P, WS-2000PK, WS-2XXXZ(X=0~9, Z=A-Z)
Prepared For :	<b>ODSONIC INTERNATIONAL(HK)CO.,LIMITED</b>
Address :	FLAT/RM 704 7/F, BRIGHT WAY TOWER 33MONG KOK ROAD, MONG KOK KL
Prepared By :	<b>Shenzhen BCTC Technology Co., Ltd.</b>
Address :	No.101, Yousong Road, Longhua New District, Shenzhen,China
Test Date:	Jun. 22 – Jul. 06, 2017
Date of Report :	Jul. 06, 2017
Report No.:	<b>BCTC-FY170704685-1E</b>



## VERIFICATION OF COMPLIANCE

**Applicant's name** ..... : **ODSONIC INTERNATIONAL(HK)CO.,LIMITED**

Address ..... : FLAT/RM 704 7/F, BRIGHT WAY TOWER 33MONG KOK ROAD,  
MONG KOK K

**Manufacture's Name** ..... : **ODSONIC INTERNATIONAL(HK)CO.,LIMITED**

Address ..... : FLAT/RM 704 7/F, BRIGHT WAY TOWER 33MONG KOK ROAD,  
MONG KOK K

**Product description**

Product name ..... : 8811S-RF Getway

Trademark: N/A

Model Name: 8811S-RF, 8811S-RF-xxxY(x=0~9, Y=A~Z), S-2000P,  
WS-2000PK, WS-2XXXZ(X=0~9, Z=A-Z)

Standards: FCC Part15.249  
ANSI C63.10-2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Test Result ..... : **Pass**

Prepared by(Engineer): Eric Yang

Reviewer(Supervisor): Jade Yang

Approved(Manager): Carson Zhang





Table of Contents	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>4</b>
<b>1.1 TEST FACILITY</b>	<b>4</b>
<b>1.2 MEASUREMENT UNCERTAINTY</b>	<b>5</b>
<b>2 . GENERAL INFORMATION</b>	<b>6</b>
<b>2.1 GENERAL DESCRIPTION OF EUT</b>	<b>6</b>
<b>2.2 DESCRIPTION OF TEST MODES</b>	<b>7</b>
<b>2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING</b>	<b>7</b>
<b>2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>8</b>
<b>2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)</b>	<b>9</b>
<b>2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	<b>10</b>
<b>3 . EMC EMISSION TEST</b>	<b>11</b>
<b>3.1 CONDUCTED EMISSION MEASUREMENT</b>	<b>11</b>
<b>3.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	<b>11</b>
<b>3.1.2 TEST PROCEDURE</b>	<b>11</b>
<b>3.1.3 DEVIATION FROM TEST STANDARD</b>	<b>11</b>
<b>3.1.4 TEST SETUP</b>	<b>12</b>
<b>3.1.5 EUT OPERATING CONDITIONS</b>	<b>12</b>
<b>3.1.6 TEST RESULTS</b>	<b>13</b>
<b>3.2 RADIATED EMISSION MEASUREMENT</b>	<b>15</b>
<b>3.2.1 RADIATED EMISSION LIMITS</b>	<b>15</b>
<b>3.2.2 TEST PROCEDURE</b>	<b>16</b>
<b>3.2.3 DEVIATION FROM TEST STANDARD</b>	<b>16</b>
<b>3.2.4 TEST SETUP</b>	<b>17</b>
<b>3.2.5 EUT OPERATING CONDITIONS</b>	<b>18</b>
<b>3.2.6 TEST RESULTS</b>	<b>19</b>
<b>4 . BANDWIDTH TEST</b>	<b>23</b>
<b>4.1 APPLIED PROCEDURES / LIMIT</b>	<b>23</b>
<b>4.1.1 TEST PROCEDURE</b>	<b>23</b>
<b>4.1.2 DEVIATION FROM STANDARD</b>	<b>23</b>
<b>4.1.3 TEST SETUP</b>	<b>23</b>
<b>4.1.4 EUT OPERATION CONDITIONS</b>	<b>23</b>
<b>4.1.5 TEST RESULTS</b>	<b>24</b>
<b>5 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>27</b>
<b>5.1 DEVIATION FROM STANDARD</b>	<b>28</b>
<b>5.2 EUT OPERATION CONDITIONS</b>	<b>28</b>
<b>5.3 TEST RESULTS</b>	<b>28</b>

**Table of Contents****Page**

<b>6 . ANTENNA REQUIREMENT</b>	<b>31</b>
<b>6.1 STANDARD REQUIREMENT</b>	<b>31</b>
<b>6.2 EUT ANTENNA</b>	<b>31</b>
<b>7 . EUT TEST PHOTO</b>	<b>32</b>

**1. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

<b>FCC Part15 (15.249) , Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.207(a)	Conducted Emission	PASS	
15.209(a)&&15.249(a)&15.249(c)&15.205(a)	Fundamental &Radiated Spurious Emission Measurement	PASS	
15.215(c)	Bandwidth	PASS	
15.249(d)	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

**1.1 TEST FACILITY**

Shenzhen BCTC Technology Co., Ltd.

Add.:No.101,Yousong Road,Longhua New District, Shenzhen,China

FCC Registration No.:187086



## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	8811S-RF Getway								
Trade Name	N/A								
Model Name	8811S-RF								
Serial Model	8811S-RF, 8811S-RF-xxxY(x=0~9, Y=A~Z), S-2000P, WS-2000PK, WS-2XXXZ(X=0~9, Z=A-Z)								
Model Difference	All the model are the same circuit and RF module, except model names.								
Product Description	<table border="1"><tr><td>Operation Frequency:</td><td>2407-2477MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Number Of Channel</td><td>3 CH</td></tr><tr><td>Antenna Designation:</td><td>Please see Note 3.</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	2407-2477MHz	Modulation Type:	GFSK	Number Of Channel	3 CH	Antenna Designation:	Please see Note 3.
Operation Frequency:	2407-2477MHz								
Modulation Type:	GFSK								
Number Of Channel	3 CH								
Antenna Designation:	Please see Note 3.								
Channel List	Please refer to the Note 2.								
Power	AC120V/60Hz								
Adapter	Model: A062-0501000IU AC Power Input: 100-240V~ 50/60Hz 0.3A Output: 5V --- 1000mA								
Connecting I/O Port(s)	Please refer to the User's Manual								
hardware version	-								
Software version	-								

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List	
Channel	Frequency (MHz)
00	2407
01	2435
02	2477

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	FPCB antenna	N/A	1	WIFI antenna
2	N/A	N/A	FPCB antenna	N/A	1	2.4G antenna

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH00	GFSK
Mode 2	CH01	
Mode 3	CH02	
Mode 4	Link mode	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

## 2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Frequency	2407MHz	2435MHz	2477MHz
Channel	Low	Middle	High



## 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test




Conducted Emission Test



RF test setup:

Block diagram of EUT configuration(TX Mode)

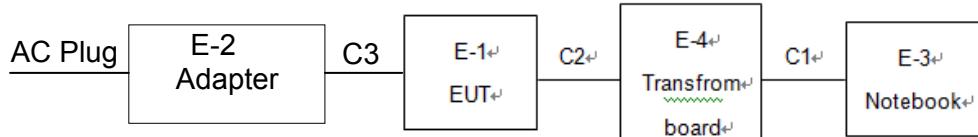

Note:

1. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.
2. Using the notebook and the transform board to control the fixed transmitting frequency and other test mode. After finishing the test setting, the notebook and the transform board will be removed during measurements.



## 2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	8811S-RF Getway	N/A	8811S-RF	N/A	EUT
E-2	Adapter	N/A	A062-0501000IU	N/A	N/A
E-3	Notebook	Lenovo	S2	N/A	Lab Provide
E-4	Transfrom board	N/A	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.8M	USB cable unshielded
C2	NO	NO	0.5M	Connection cable unshielded
C3	NO	NO	1.2M	USB cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45108040	2016.08.27	2017.08.26
2	Test Receiver (9kHz-7GHz)	R&S	ESPI	101318	2016.08.27	2017.08.26
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB 9168	VULB91 68-438	2016.08.27	2017.08.26
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1201	2016.09.03	2017.09.03
5	Horn Antenna (14GHz-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	2016.09.03	2017.09.03
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2016.08.27	2017.08.26
7	Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2016.08.27	2017.08.26
8	Amplifier (18GHz-40GHz)	SCHWARZBECK	BBV 9721	9721-205	2016.08.27	2017.08.26
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	2016.09.03	2017.09.03
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	2016.08.27	2017.08.26
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	2016.08.27	2017.08.26
12	Antenna connector	Florida RF Labs	N/A	RF 01#	2016.08.27	2017.08.26
13	Power Meter	ANRITSU	ML2487A	6K00001568	2016.08.27	2017.08.26
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	2016.08.27	2017.08.26
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	2016.08.27	2017.08.26
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	2016.08.27	2017.08.26
17	D.C. Power Supply	LongWei	PS-305D	010964729	2016.08.27	2017.08.26

### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-10 1165-ha	2016.06.06	2017.06.05
2	LISN	R&S	NSLK81 26	812646 6	2016.08.25	2017.08.24
3	LISN	R&S	NSLK81 26	812648 7	2016.08.25	2017.08.24
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06
5	RF cables	R&S	R204	R20X	2016.07.06	2017.07.05



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

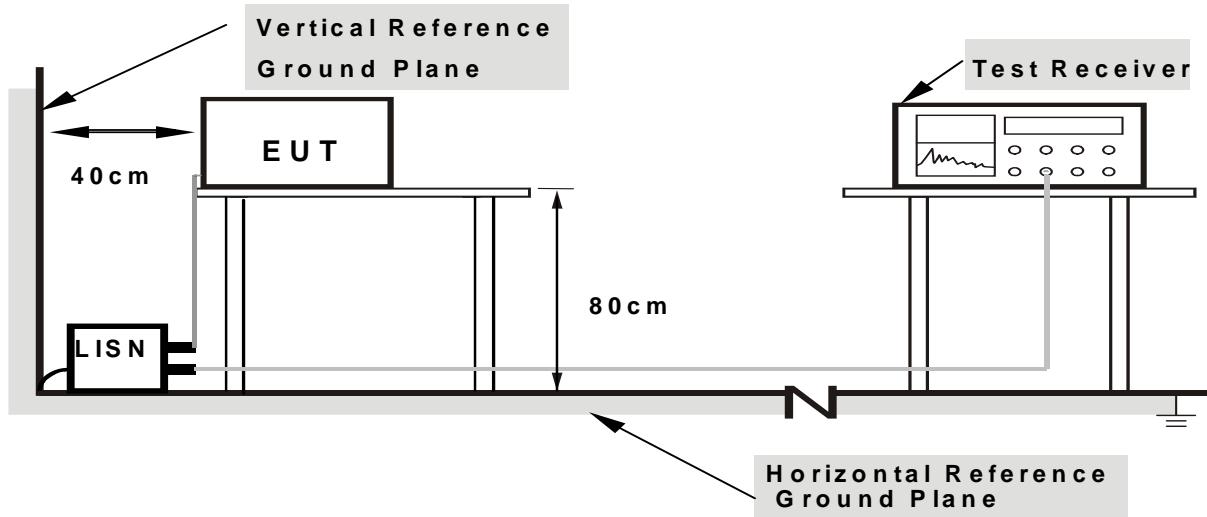

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.



### 3.1.6 TEST RESULTS

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	Input: AC120V/60Hz Output: DC 5.0V	Test Mode :	Mode 4

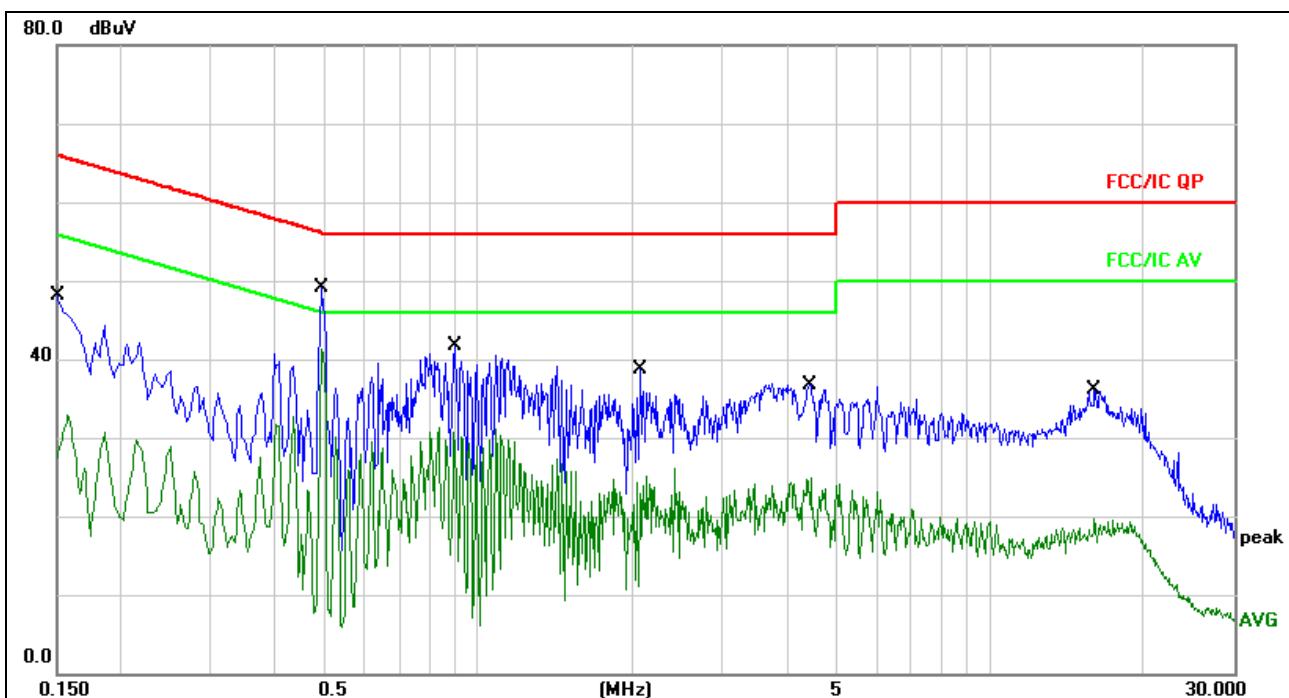


#### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
1		0.1500	38.53	9.67	48.20	65.99	-17.79	QP
2		0.1500	23.24	9.67	32.91	55.99	-23.08	AVG
3		0.4940	39.45	9.68	49.13	56.10	-6.97	QP
4	*	0.4940	31.58	9.68	41.26	46.10	-4.84	AVG
5		0.9020	31.95	9.69	41.64	56.00	-14.36	QP
6		0.9020	21.68	9.69	31.37	46.00	-14.63	AVG
7		2.0700	28.95	9.71	38.66	56.00	-17.34	QP
8		2.0700	15.36	9.71	25.07	46.00	-20.93	AVG
9		4.4540	26.99	9.73	36.72	56.00	-19.28	QP
10		4.4540	15.13	9.73	24.86	46.00	-21.14	AVG
11		15.9700	26.26	9.87	36.13	60.00	-23.87	QP
12		15.9700	9.92	9.87	19.79	50.00	-30.21	AVG



Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	Input: AC120V/60Hz Output: DC 5.0V	Test Mode :	Mode 4

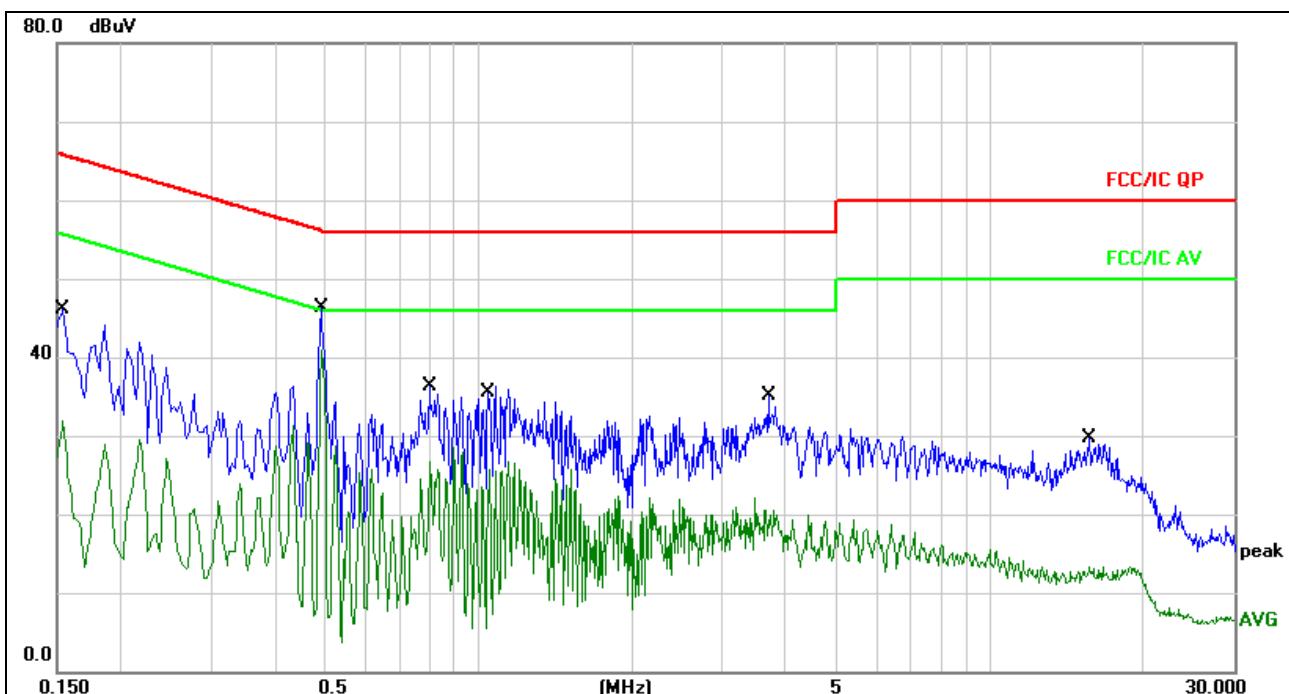**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over Detector	Comment
1		0.1539	36.45	9.67	46.12	65.78	-19.66	QP
2		0.1539	22.21	9.67	31.88	55.78	-23.90	AVG
3		0.4940	36.64	9.68	46.32	56.10	-9.78	QP
4	*	0.4940	31.23	9.68	40.91	46.10	-5.19	AVG
5		0.8020	26.70	9.69	36.39	56.00	-19.61	QP
6		0.8020	17.01	9.69	26.70	46.00	-19.30	AVG
7		1.0500	26.62	9.69	36.31	56.00	-19.69	QP
8		1.0500	16.05	9.69	25.74	46.00	-20.26	AVG
9		3.6940	25.38	9.73	35.11	56.00	-20.89	QP
10		3.6940	10.77	9.73	20.50	46.00	-25.50	AVG
11		15.6580	19.76	9.87	29.63	60.00	-30.37	QP
12		15.6580	3.42	9.87	13.29	50.00	-36.71	AVG



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

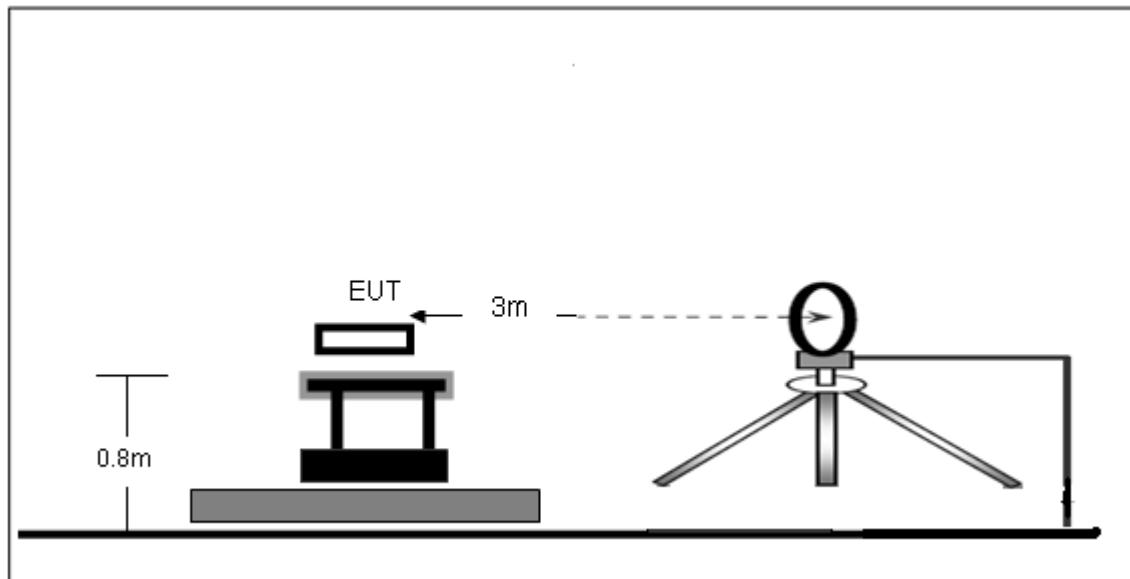

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

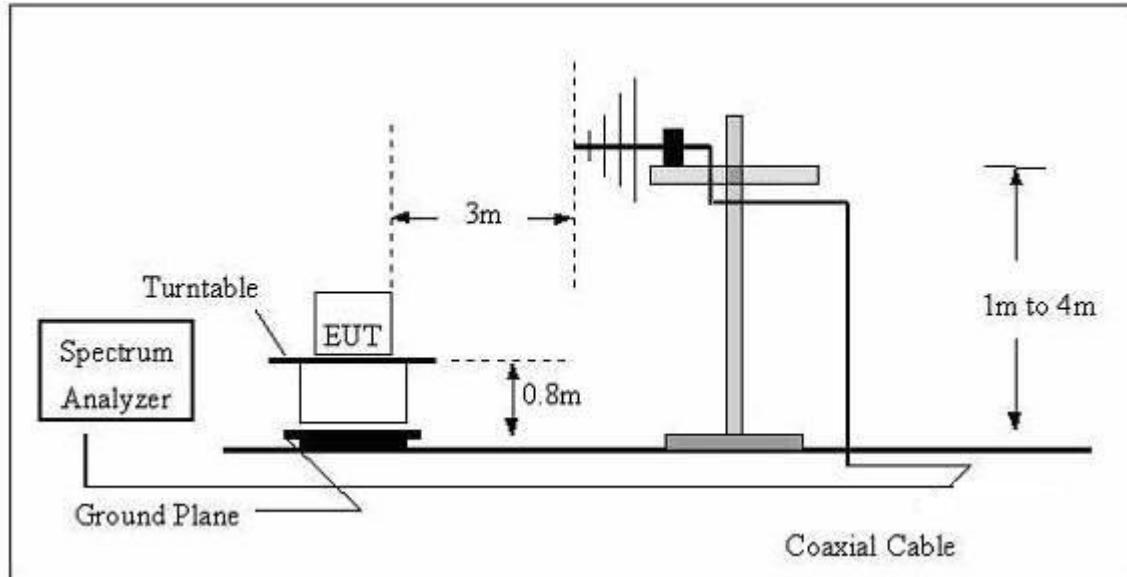

## (C) Radiated Emission Test-Up Frequency Above 1GHz

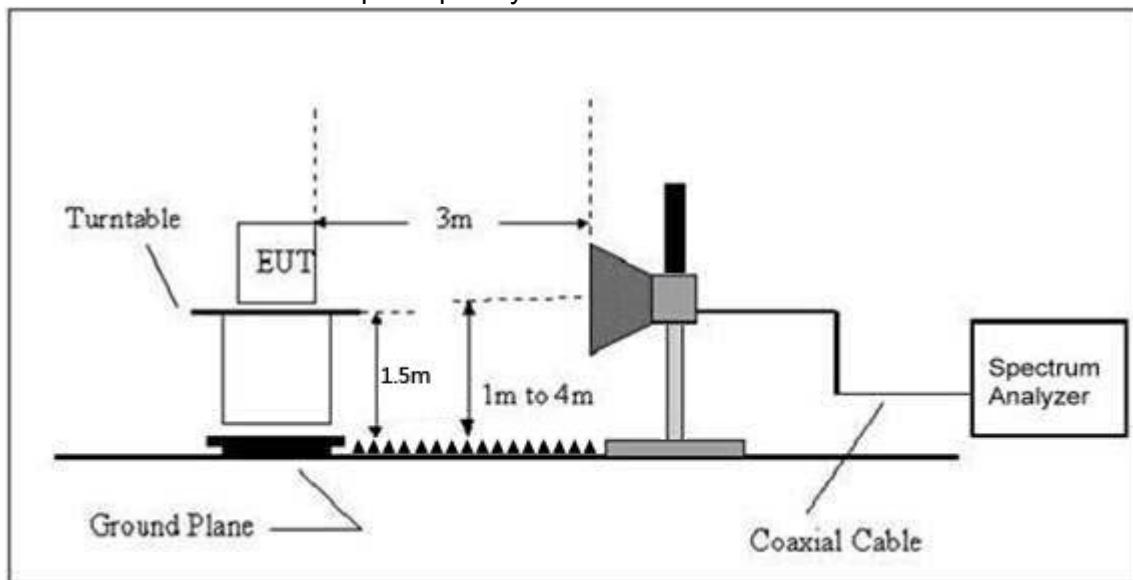

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.2.6 TEST RESULTS

#### Radiated Spurious Emission (Below 30MHz )

Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	AC120V/60Hz		
Test Mode :	Mode 4		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.



## Radiated Spurious Emission (Between 30MHz – 1GHz)


Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC120V/60Hz		
Test Mode : (Worst)	Mode 4		

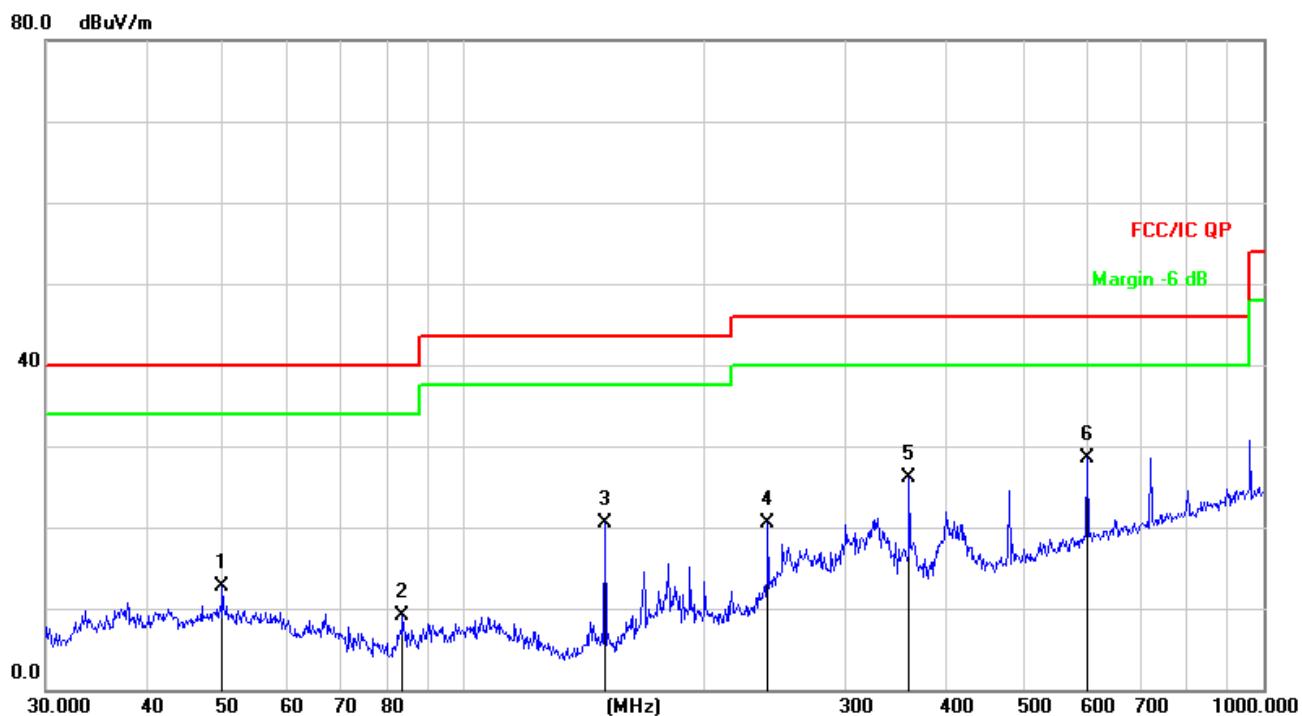

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		49.8814	27.36	-14.75	12.61	40.00	-27.39	QP
2		83.8156	29.01	-19.88	9.13	40.00	-30.87	QP
3		150.0108	40.17	-19.64	20.53	43.50	-22.97	QP
4		239.9874	34.67	-14.12	20.55	46.00	-25.45	QP
5		360.4476	36.41	-10.40	26.01	46.00	-19.99	QP
6	*	601.4265	33.04	-4.47	28.57	46.00	-17.43	QP



Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	AC120V/60Hz		
Test Mode :	Mode 4 (Worst)		

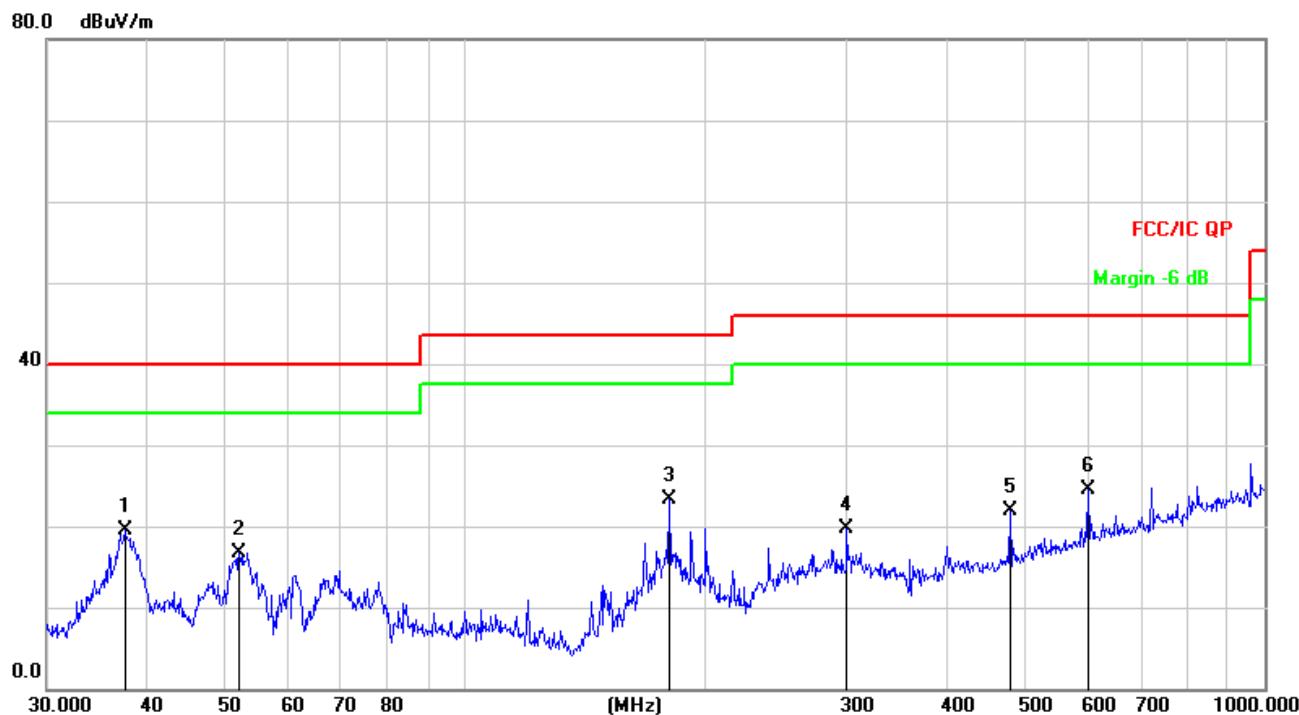

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		37.5479	35.82	-16.39	19.43	40.00	-20.57	QP
2		52.2079	31.52	-14.76	16.76	40.00	-23.24	QP
3	*	180.0165	41.08	-17.76	23.32	43.50	-20.18	QP
4		300.3672	31.75	-12.09	19.66	46.00	-26.34	QP
5		480.5276	29.66	-7.68	21.98	46.00	-24.02	QP
6		601.4265	29.05	-4.47	24.58	46.00	-21.42	QP

Radiated Spurious Emission ( 1GHz to 10<sup>th</sup> harmonics)

## GFSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel 2407MHz</b>									
V	2407.00	102.57	38.11	7.44	20.36	92.26	114	-21.74	PK
V	2407.00	82.45	38.11	7.44	20.36	72.14	94	-21.86	AV
V	4814.00	61.81	38.65	7.80	23.61	54.57	74	-19.43	PK
V	4814.00	48.33	38.65	7.80	23.61	41.09	54	-12.91	AV
V	17850.00	34.24	38.75	10.36	26.57	32.42	74	-41.58	PK
H	2407.00	102.82	38.11	7.44	20.36	92.51	114	-21.49	PK
H	2407.00	81.27	38.11	7.44	20.36	70.96	94	-23.04	AV
H	4814.00	58.86	38.65	7.80	23.61	51.62	74	-22.38	PK
H	4814.00	38.45	38.65	7.80	23.61	31.21	54	-22.79	AV
H	17850.00	35.36	38.75	10.36	26.57	33.54	74	-40.46	PK
<b>Middle Channel 2435MHz</b>									
V	2435.00	103.27	38.11	7.44	20.36	92.96	114	-21.04	PK
V	2435.00	84.60	38.11	7.44	20.36	74.29	94	-19.71	AV
V	4870.00	57.36	38.65	7.80	23.61	50.12	74	-23.88	PK
V	4870.00	43.64	38.65	7.80	23.61	36.40	54	-17.60	AV
V	17850.00	35.31	38.75	10.36	26.57	33.49	74	-40.51	PK
H	2435.00	101.59	38.11	7.44	20.36	91.28	114	-22.72	PK
H	2435.00	82.02	38.11	7.44	20.36	71.71	94	-22.29	AV
H	4870.00	62.57	38.65	7.80	23.61	55.33	74	-18.67	PK
H	4870.00	39.43	38.65	7.80	23.61	32.19	54	-21.81	AV
H	17850.00	35.88	38.75	10.36	26.57	34.06	74	-39.94	PK
<b>High Channel 2477MHz</b>									
V	2477.00	101.65	38.17	7.47	20.51	91.46	114	-22.54	PK
V	2477.00	83.19	38.17	7.47	20.51	73.00	94	-21.00	AV
V	4954.00	58.51	38.69	7.83	23.83	51.48	74	-22.52	PK
V	4954.00	39.23	38.69	7.83	23.83	32.20	54	-21.80	AV
V	17850.00	33.86	38.75	10.36	26.57	32.04	74	-41.96	PK
H	2477.00	79.69	38.17	7.47	20.51	69.5	114	-44.5	PK
H	2477.00	61.43	38.17	7.47	20.51	51.24	94	-42.76	AV
H	4954.00	58.15	38.69	7.83	23.83	51.12	74	-22.88	PK
H	4954.00	38.62	38.69	7.83	23.83	31.59	54	-22.41	AV
H	17850.00	32.48	38.75	10.36	26.57	30.66	74	-43.34	PK

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Remark:**

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



## 4. BANDWIDTH TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.249	Bandwidth	(20dB bandwidth)	2403-2478	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100KHz
VB	$\geq$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW $\geq$  RBW, Sweep time = Auto.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP



#### 4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




#### 4.1.5 TEST RESULTS

EUT :	8811S-RF Getway	Model Name :	8811S-RF
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1012 hPa	Test Voltage :	AC120V/60Hz
Test Mode :	CH00 / CH01 /C02		

	Frequency	20dB Bandwidth (kHz)	Result
GFSK	2407 MHz	1337	PASS
	2435 MHz	1356	PASS
	2477 MHz	1365	PASS

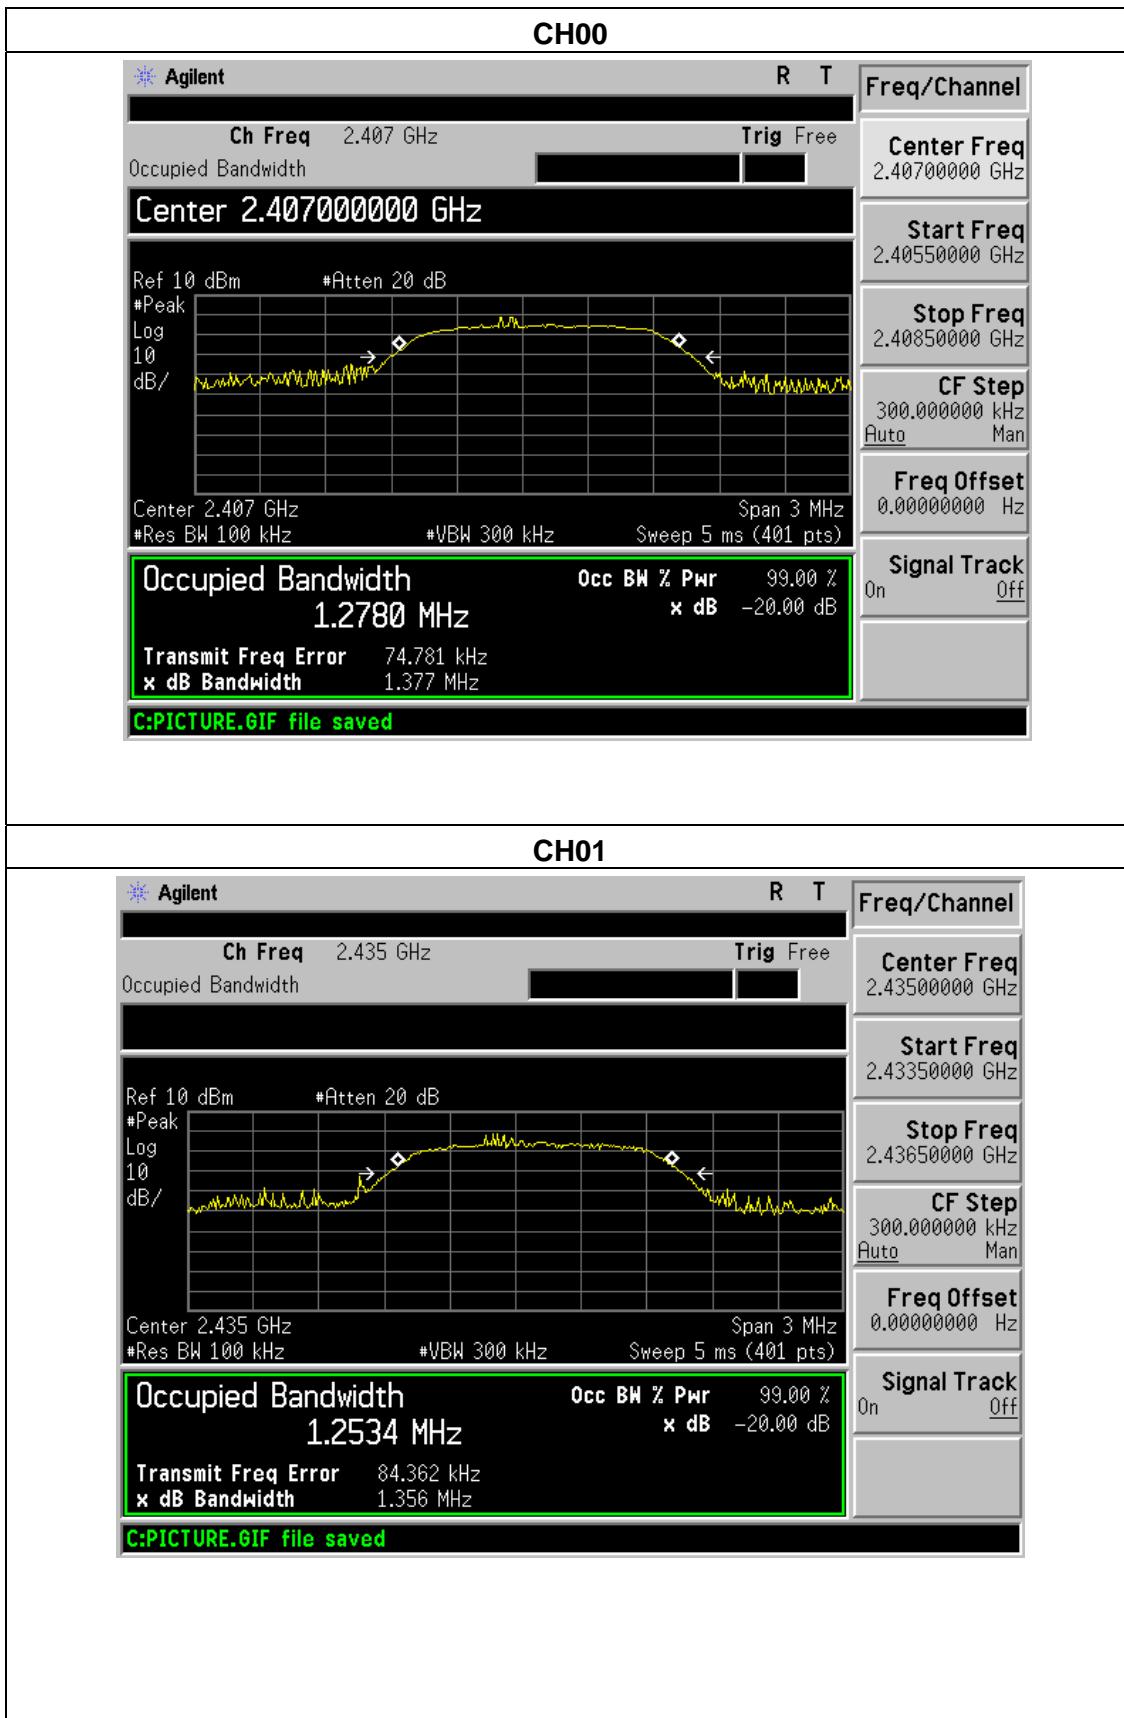

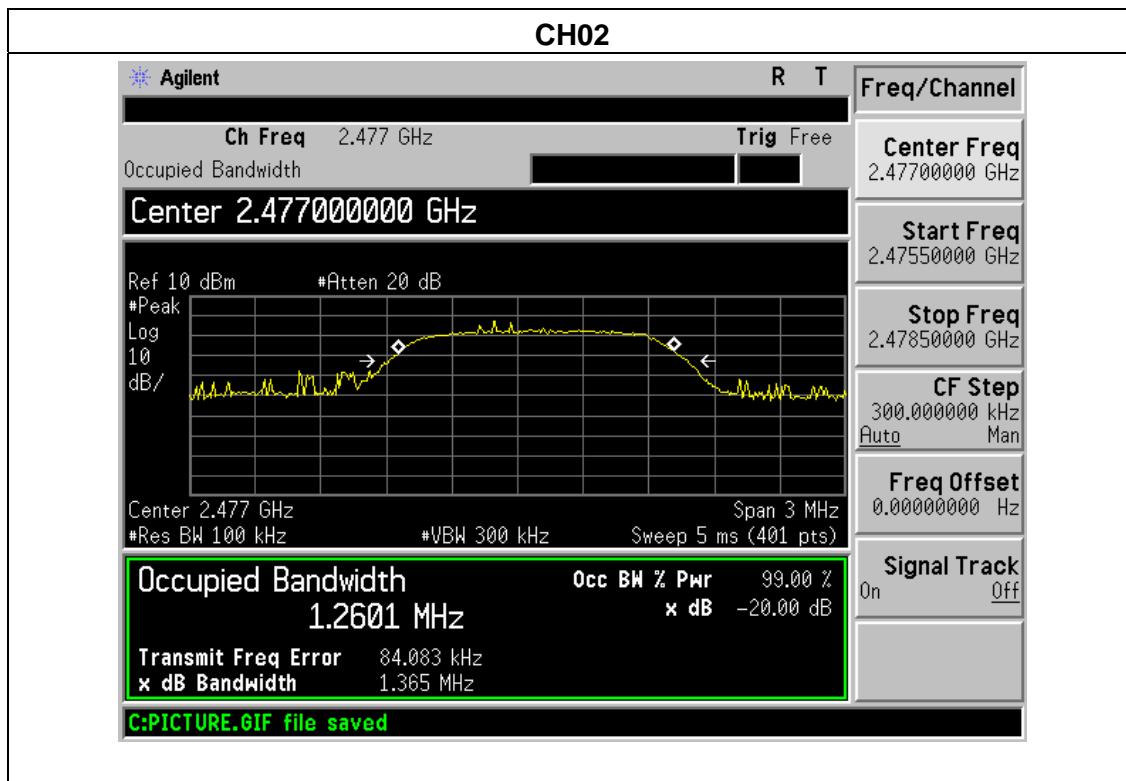



## 5. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)(c)

### TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

#### Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



## 5.1 DEVIATION FROM STANDARD


No deviation.

## 5.2 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 5.3 TEST RESULTS

Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	AC120V/60Hz
Test Mode :	CH00/ CH02		

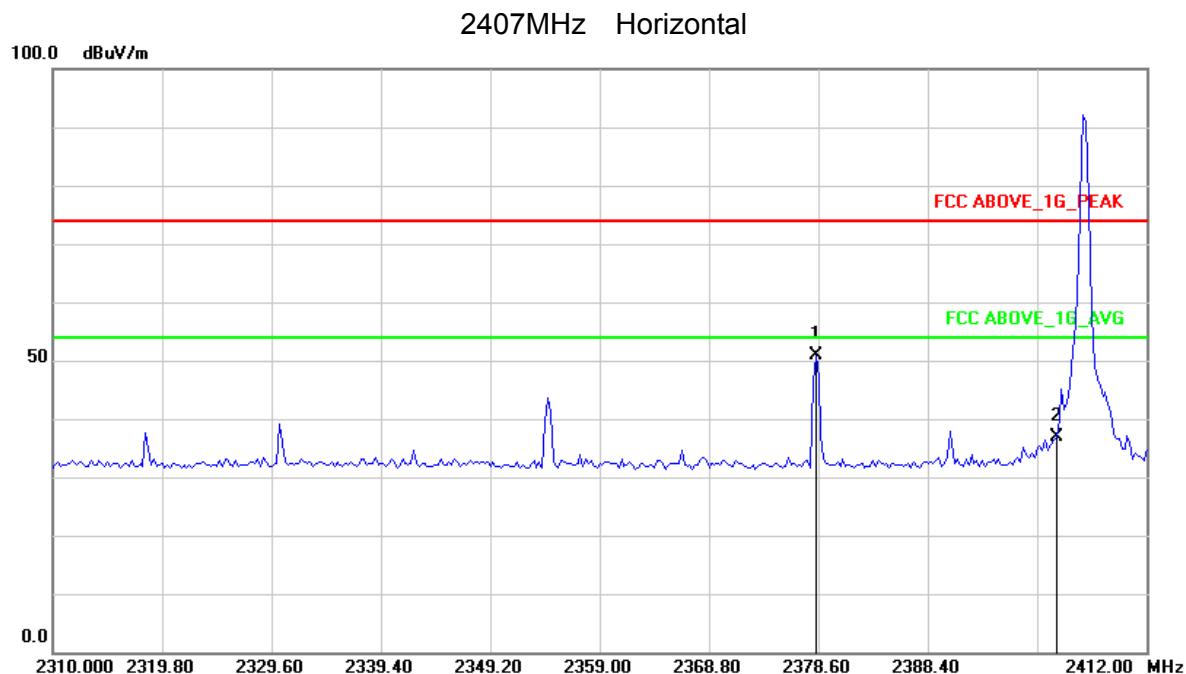


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.500	52.5	-3.12	49.38	74.00	-24.62	peak
2	2400.000	41.7	-3.24	38.46	74.00	-35.54	peak

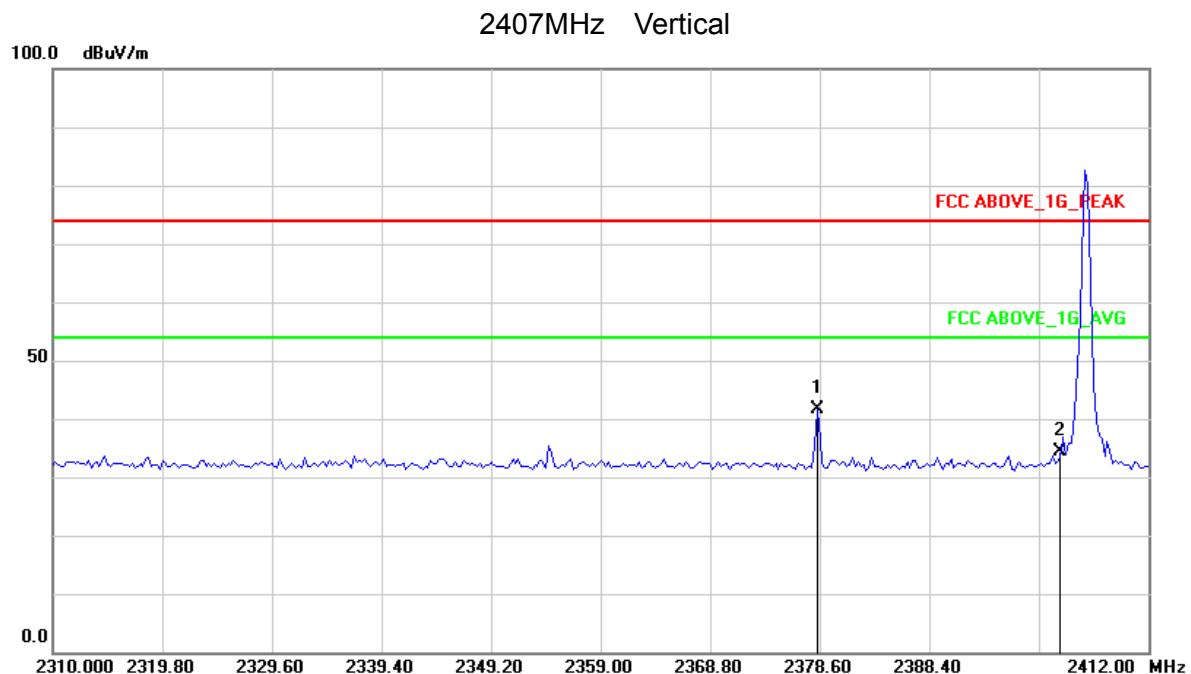

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.5	45.29	-3.12	42.17	74.00	-31.83	peak
2	2400.000	36.87	-3.24	33.63	74.00	-40.37	peak




## 2477MHz Horizontal

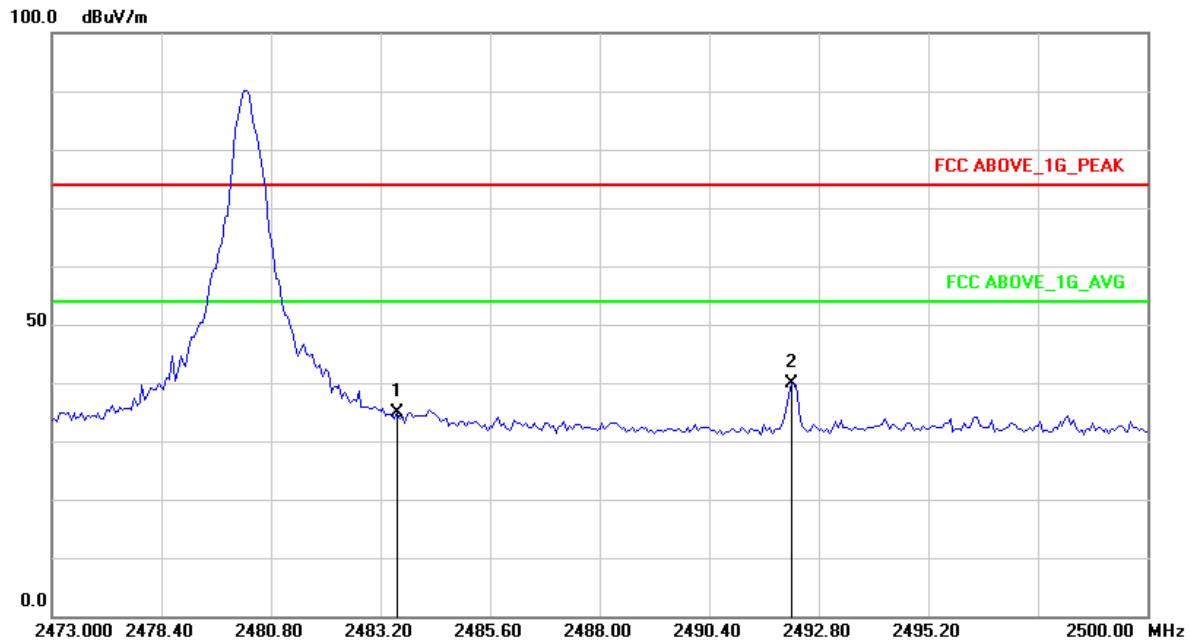

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2481.000	39.2	-3.53	35.67	74.00	-38.33	peak
2	2490.500	42.8	-3.53	39.27	74.00	-34.73	peak

## 2477MHz Vertical

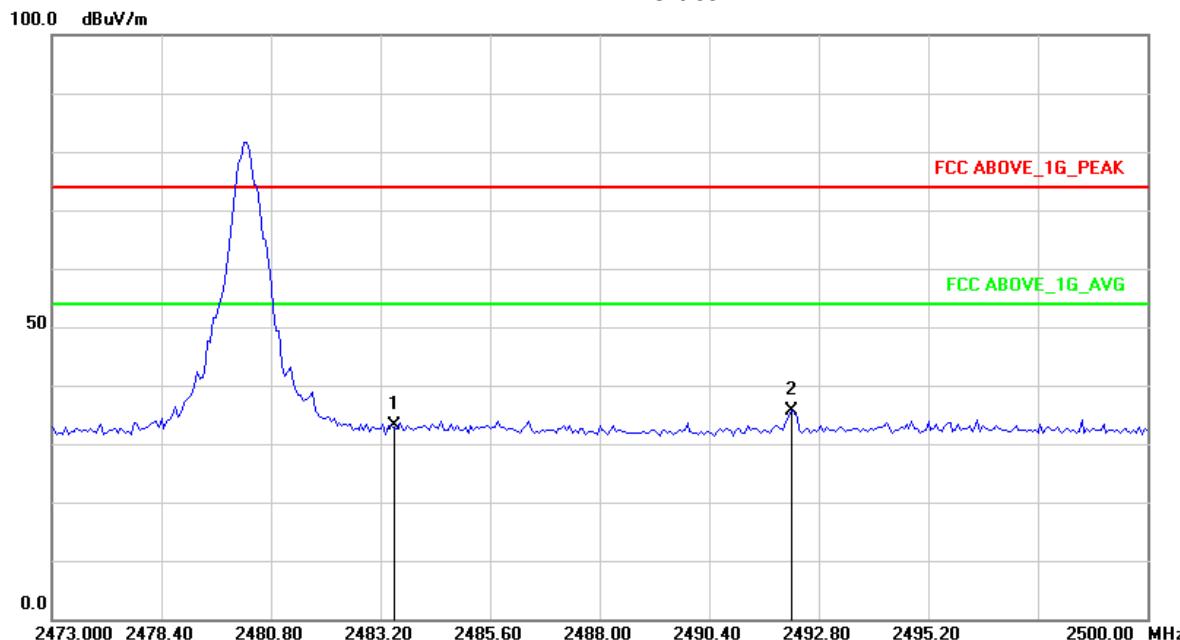

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2481.000	37.57	-3.53	34.04	74.00	-39.96	peak
2	2490.500	38.63	-3.53	35.10	74.00	-38.90	peak

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.



## 6. ANTENNA REQUIREMENT

### 6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 6.2 EUT ANTENNA

The EUT antenna is FPCB antenna. It complies with the standard requirement.

## 7. EUT TEST PHOTO

**Radiated Measurement Photos**





### 7.1. EUT PHOTO



\*\*\*\*\* END OF REPORT \*\*\*\*\*