

# CENTRE OF TESTING SERVICE INTERNATIONAL

**OPERATE ACCORDING TO ISO/IEC 17025** 

# FCC ID TEST REPORT

TEST REPORT NUMBER: CGZ3150421-00416-EF



CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China







	TEST REPORT For FCC ID
	TEST REPORT OF TOOLS
	47 CFR PART 15 OCT, 2014
Report Reference No	- CGZ3150421-00416-EF
Date of issue	. 23 April 2015
Testing Laboratory Name	. CENTRE OF TESTING SERVICE CO., LTD.
Address	. A101,No.65,Zhuji Highway,Tianhe District,Guangzhou, China
Testing location/ procedure	. Full application of Harmonised standards ■
	Partial application of Harmonised standards $\square$
	Other standard testing method $\square$
Applicant's name	. Rigado, LLC
Address	. 2601 25 <sup>th</sup> St SE, Suite 200, Salem, OR 97302 USA
Test specification	
Standard	· 47 CFR PART 15 OCT, 2014
Test Report Form No	. CTSEMC-1.0
TRF Originator	. CENTRE OF TESTING SERVICE CO., LTD.
Master TRF	. Dated 2009-01
CENTRE OF TESTING SERVICE O	CO., LTD. All rights reserved.
CENTRE OF TESTING SERVICE C material. CENTRE OF TESTING SE	in whole or in part for non-commercial purposes as long as the CO., LTD. is acknowledged as copyright owner and source of the ERVICE CO., LTD takes no responsibility for and will not assume liability er's interpretation of the reproduced material due to its placement and
Test item description	: SCS-001
Trade Mark	Rigado
Manufacturer	Rigado, LLC
Model/Type reference	SCS-001
Ratings	DC 5V by adapter;
	Adapter Input:AC 100~240V, 50/60Hz; Output:DC 5V
Operating Frequency	. 2402.0 MHz~2480.0 MHz
Result	Positive

Compiled by:

Supervised by:

Approved by:

Kate zhang / Fileadministrators

Duke yang / Technique principal

Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





# FCCID-TEST REPORT

**Test Report No. : CGZ3150421-00416-EF** 23 April 2015 Date of issue

Type / Model	SCS-001
EUT	SCS-001
Applicant	Rigado, LLC
Address	2601 25th St SE, Suite 200, Salem, OR 97302 USA
Telephone	+1-971-208-9864
Fax	+1-971-208-9869
Contact	Thomas Evans
Manufacturer	Rigado, LLC
Address	2601 25th St SE, Suite 200, Salem, OR 97302 USA
Telephone	+1-971-208-9864
Fax	+1-971-208-9869
Contact	Thomas Evans
Factory	Rigado, LLC
Address	2601 25th St SE, Suite 200, Salem, OR 97302 USA
Telephone	+1-971-208-9864
Fax	+1-971-208-9869
Contact	Thomas Evans

Test Result according to the standards on page 1: PASSED

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





# **TABLE OF CONTENTS**

Description	Page
1.0 TEST STANDARDS	5
2.0 SUMMARY	5
2.1 GENERAL REMARKS	5
2.2 FINAL ASSESSMENT	5
3.0 EQUIPMENT UNDER TEST	5
2.4 Power curry overta utilizer	E
3.1 Power supply system utilised	
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	
3.4 EUT CONFIGURATION	
4.0 TEST ENVIRONMENT	7
4.1 Address of the test laboratory	7
4.2 TEST FACILITY	
4.3 ENVIRONMENTAL CONDITIONS	
4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT	
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	
4.6 MEASUREMENT UNCERTAINTY	
5.0 SUMMARY OF STANDARDS AND RESULTS	8
5.1.DESCRIPTION OF STANDARDS AND RESULTS	8
6.0 POWER LINE CONDUCTED EMISSION TEST	9
6.1.Test Equipment	9
6.2. BLOCK DIAGRAM OF TEST SETUP	
6.3. POWER LINE CONDUCTED EMISSION TEST LIMITS	g
6.4.Test Procedure	9
6.5. Power Line Conducted Emission Test Results	9
7.0 6DB BANDWIDTH MEASUREMENT	12
7.1 LIMITS	
7.2 MEASUREMENT EQUIPMENT USED	12
7.3 TEST CONFIGURATION	
7.4 TEST PROCEDURE	12
7.5 TEST RESULTS	12
8.0 PEAK POWER	15
8.1 LIMIT	15
8.2 MEASUREMENT EQUIPMENT USED	15
8.3 TEST CONDIGURATION	15

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

**CENTRE OF TESTING SERVICE** 



# CT5

8.4 TEST PROCEDURE	
8.5 TEST RESULTS	16
9.0 PEAK POWER SPECTRAL DENSITY	19
9.1 LIMIT	19
9.2 MEASUREMENT EQUIPMENT USED	19
9.3 TEST CONFIGURATION	
9.4 TEST PROCEDURE	
9.5 TEST RESULTS	
10.0 BAND EDGES MEASUREMENT	22
10.1 LIMIT	22
10.2 MEASUREMENT EQUIPMENT USED	
10.3 TEST CONFIGURATION	
10.4 TEST PROCEDURE	
10.5 TEST RESULTS	
11.0 SPURIOUS EMISSIONS	25
11.1 LIMIT	25
11.2 TEST EQUIPMENT	
11.3 TEST CONFIGURATION	
11.4 TEST PROCEDURE	
11.5 TEST RESULTS	
12.0 ANTENNA REQUIREMENTS	35
12.1 STANDARD APPLICABLE	35
12.2 Antenna Construction and Directional Gain	35
13.0 DEVIATION TO TEST SPECIFICATIONS	35

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn







# 1.0 TEST STANDARDS

The tests were performed according to following standards:

- 47 CFR PART 15 OCT, 2014
- ANSI C63.4-2009

#### 2.0 SUMMARY

#### 2.1 GENERAL REMARKS

Date of receipt of test sample	21 April 2015
Testing commenced on	21~23 April 2015
Testing concluded on	23 April 2015

#### 2.2 FINAL ASSESSMENT

TI FA	C requirements		4   !		4 41	1!		
INALI	i radiliramante	nartaining to tr	ובאומחאבז בה	etandarde and	τρετρα	nnaration	made '	ar 🗅
111616	O I GUUII GIIIGIII O	Delianina lo li	ic iculilicai	Stanuarus anu	ıcsıcu	ODGLAUOLI	IIIUUGG (	aıc

<ul> <li>fulfilled.</li> </ul>
- not fulfilled

The equipment under test

fulfils the FCC requirements cited on page 1.

- does not fulfil the FCC requirements cited on page 1.

# 3.0 EQUIPMENT UNDER TEST

# 3.1 Power supply system utilised

Power supply voltage : ■ AC 120V/60Hz for Adapter

# 3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: 1

Serial number: Prototype

#### 3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

☐ - Standby

☐ TX- Y position

☐ TX- Zposition

■ TX- X position

802.11b/g/n(20M):TX-X Position Low (2402.0 MHz) , TX-X Position Middle (2440.0 MHz ), TX-X Position High (2480.0 MHz)

Note:Operation mode TX -X position of EUT is the radiated test worst case. So only these test results be recorded in the test report.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

#### **CENTRE OF TESTING SERVICE**





# 3.4 EUT configuration

# 3.4.1. Description of configuration (EUT)

Description	:	SCS-001
Model Number	:	SCS-001
Operation frequency	:	2402~2480MHz
BT	:	4.0
Modulation Technology	:	GFSK

# 3.4.2. Tested Supporting System Details

#### 3.4.2.1. Notebook

M/N		F83VF
S/N		AEN0AS64740305D
Manufacturer		ASUS
Power Cord	:	Unshielded, Detachabled, 1.5m , 3Pin
FCC ID		By DoC

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

**Report No.:** CGZ3150421-00416-EF Page 6 of 35





#### 4.0 TEST ENVIRONMENT

# 4.1 Address of the test laboratory

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

# 4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### IC-Registration No.: 8374A

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on May 22, 2014.

#### FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 13,2012.

#### 4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 ° C
Humidity:	25~75 %
Atmospheric pressure:	86~106 kPa

#### 4.4 Definitions of symbols used in this test report

- - The black square indicates that the listed condition, standard or equipment is applicable for this report.
- □ The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

#### 4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

**Report No.:** CGZ3150421-00416-EF Page 7 of 35







# 4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Power disturbance	30MHz~300MHz	±1.38dB	(1)
	30MHz~300MHz	±3.14dB	(1)
Radiation emission (3m)	300MHz~1000MHz	±3.18dB	(1)
	1GHz~26.5GHz	±3.54dB	(1)

<sup>(1).</sup> This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

# 5.0 Summary of standards and results

# 5.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION					
Description of Test Item	Standard	Results			
Conducted Emission Test	FCC Part 15 : 15.207 ANSI C63.4-2009	PASSED			
6dB Bandwidth Measurement	FCC Part 15.247(a)(2) ANSI C63.4-2009	PASSED			
Peak Power	FCC Part 15.247(b)(3)(4) ANSI C63.4-2009	PASSED			
Peak Power Spectral Density	15.247(e) Power Density ANSI C63.4-2009	PASSED			
Dand added maggurament	FCC Part 15.247(d)	PASSED			
Band edges measurement	ANSI C63.4-2009	PASSED			
Spurious Emissions	FCC Part 15: 15.209	PASSED			
Spurious Emissions	ANSI C63.4-2009	PASSED			
Antonno Doguiromento	FCC Part 15: 15.203	DACCED			
Antenna Requirements	ANSI C63.4-2009	PASSED			
N/A is an abbreviation for Not Applicable.					

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3150421-00416-EF






# 6.0 Power Line Conducted Emission Test

#### **6.1.Test Equipment**

Conduc	Conducted Disturbance							
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.			
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2014/11			
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2014/11			
3	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/026	2014/11			
4	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2014/11			
5	EMI Test Software	EZ-EMC	Farad	N/A	N/A			

# 6.2. Block Diagram of Test Setup



(EUT: SCS-001)

#### 6.3. Power Line Conducted Emission Test Limits

Standard: FCC Part 15: 15.207, ANSI C63.4-2009

		Maximum RF Line Voltage			
Frequ	uency	Quasi-Peak Level	Average Level		
rioquoney		dB(μV)	dB(μV)		
150kHz	~ 500kHz	66 ~ 56*	56 ~ 46*		
500kHz	~ 5MHz	56	46		
5MHz	~ 30MHz	60	50		

Notes: 1. \* Decreasing linearly with logarithm of frequency.

#### 6.4.Test Procedure

The Adapter Power connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC Part 15C on Conducted Emission Test.

# 6.5. Power Line Conducted Emission Test Results

PASSED.

The frequency range from 150KHz~30MHz is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

**Report No.:** CGZ3150421-00416-EF Page 9 of 35

<sup>2.</sup> The lower limit shall apply at the transition frequencies.






#### **CENTRE OF TESTING SERVICE**

Test point:	L	Result:	■ - passed
Frequency range:	0.15MHz~30MHz		□ - not passed

EUT	SCS-001
Operating Condition	TX
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Operator	Duke
MODEL NO	SCS-001

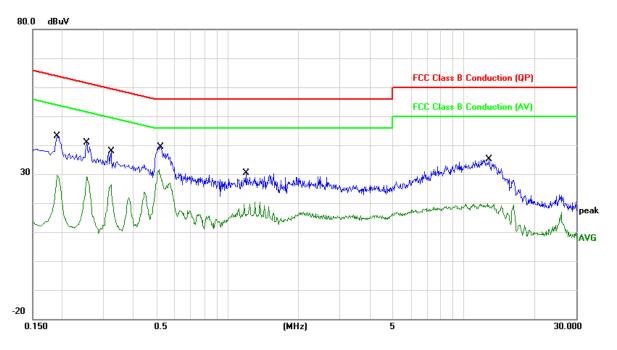

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	0.1900	10.83	29.13	39.96	64.04	-24.08	QP
2	0.1900	10.83	17.20	28.03	54.04	-26.01	AVG
3	0.2540	10.85	25.86	36.71	61.63	-24.92	QP
4	0.2540	10.85	17.01	27.86	51.63	-23.77	AVG
5	0.3220	10.86	22.78	33.64	59.66	-26.02	QP
6	0.3220	10.86	14.37	25.23	49.66	-24.43	AVG
7	0.5220	10.91	24.92	35.83	56.00	-20.17	QP
8	0.5220	10.91	18.04	28.95	46.00	-17.05	AVG
9	1.2020	10.91	10.57	21.48	56.00	-34.52	QP
10	1.2020	10.91	4.39	15.30	46.00	-30.70	AVG
11	12.7900	11.09	16.21	27.30	60.00	-32.70	QP
12	12.7900	11.09	6.66	17.75	50.00	-32.25	AVG
Remark:	Other frequen	cy mini ma	rgin all >6 dB	of Limit			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


**Report No.:** CGZ3150421-00416-EF Page 10 of 35







Test point: N Result: ■ - passed Frequency range: 0.15MHz~30MHz □ - not passed

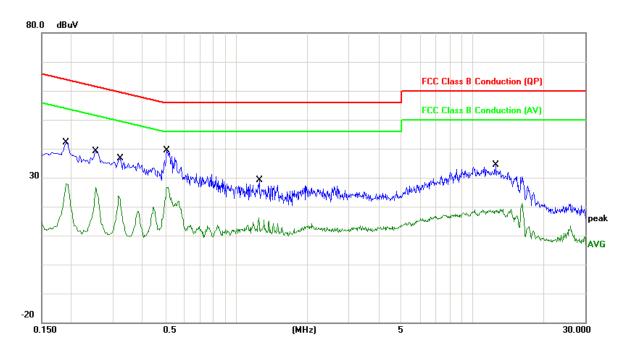

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	0.1900	10.83	29.19	40.02	64.04	-24.02	QP
2	0.1900	10.83	14.61	25.44	54.04	-28.60	AVG
3	0.2540	10.85	25.30	36.15	61.63	-25.48	QP
4	0.2540	10.85	13.41	24.26	51.63	-27.37	AVG
5	0.3220	10.86	20.70	31.56	59.66	-28.10	QP
6	0.3220	10.86	10.21	21.07	49.66	-28.59	AVG
7	0.5100	10.91	22.57	33.48	56.00	-22.52	QP
8	0.5100	10.91	14.47	25.38	46.00	-20.62	AVG
9	1.2500	10.91	10.24	21.15	56.00	-34.85	QP
10	1.2500	10.91	2.26	13.17	46.00	-32.83	AVG
11	12.5580	11.10	14.68	25.78	60.00	-34.22	QP
12	12.5580	11.10	6.00	17.10	50.00	-32.90	AVG
Remark:	Other frequen	icy mini ma	rgin all >6 dB	of Limit		•	

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

**Report No.:** CGZ3150421-00416-EF Page 11 of 35





# 7.0 6dB BANDWIDTH MEASUREMENT


#### 7.1 LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 7.2 MEASUREMENT EQUIPMENT USED

20dB Bandwidth							
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.		
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2015/03		

#### 7.3 TEST CONFIGURATION



#### 7.4 TEST PROCEDURE

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span =1.5 times of bandwidth, Sweep = auto.
- 4. Mark the peak frequency and -6dB (upper and lower) frequency.
- 5. Repeat until all the rest channels are investigated

#### 7.5 TEST RESULTS

Modulation Standard	Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (KHz)	Result
	Low	2402	0.652		PASSED
GFSK	Middle	2440	0.640	>500	PASSED
	High	2480	0.644		PASSED

Remark: The Bandwidth is Delta 2 of following the graph. And the Delta 2 is Marker 2 subtract Marker 1.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


**Report No.:** CGZ3150421-00416-EF Page 12 of 35





#### **Test Plot**



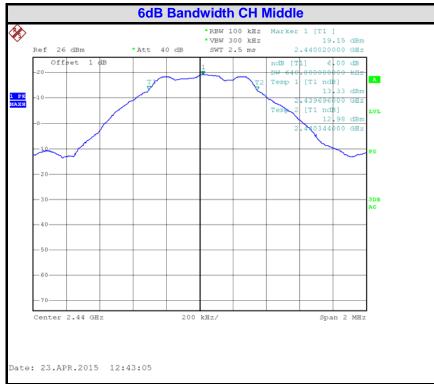

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service

Report No.: CGZ3150421-00416-EF







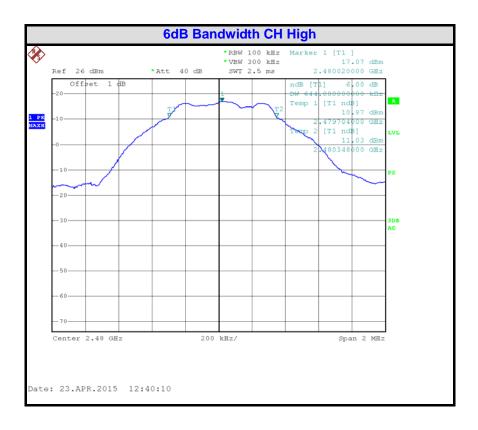

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





# 8.0 PEAK POWER

#### **8.1 LIMIT**


The maximum peak output power of the intentional radiator shall not exceed the following:

- 1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
- 2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **8.2 MEASUREMENT EQUIPMENT USED**

Peak Power							
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.		
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2015/03		
2	Power meter	ROHDE & SCHWARZ	NRVS	842856/049	2015/03		

#### 8.3 TEST CONDIGURATION



Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

**Report No.:** CGZ3150421-00416-EF Page 15 of 35

#### **CENTRE OF TESTING SERVICE**





#### **8.4 TEST PROCEDURE**

- 1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2. Set RBW = 1 MHz.
- 3. Set VBW ≥ 3 MHz.
- 4. Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode.
- 5. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power Intervals, the trigger may be set to "free run".
- 6. Trace average 100 traces in power averaging mode.
- 7. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

#### **8.5 TEST RESULTS**

# **Passed**

#### **Test Data**

Modulation Standard	Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
	Low	2402	20.93	30dBm	PASSED
GFSK	Middle	2440	19.37		PASSED
	High	2480	17.40		PASSED

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service


**Report No.:** CGZ3150421-00416-EF Page 16 of 35





#### **Test Plot**

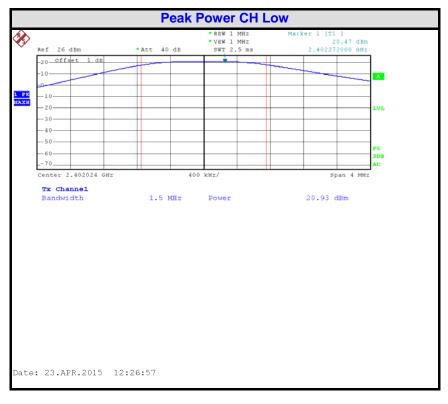

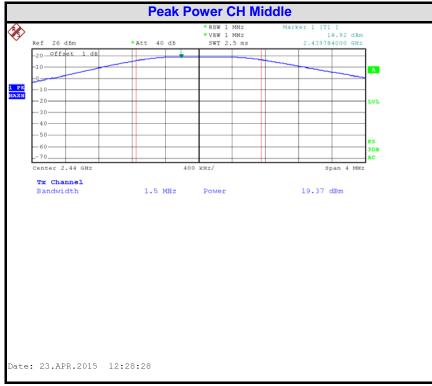

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471


Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn







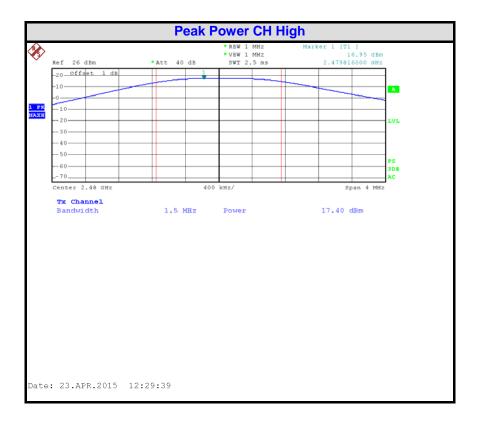

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





# 9.0 PEAK POWER SPECTRAL DENSITY


#### **9.1 LIMIT**

- For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
- 2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section

#### 9.2 MEASUREMENT EQUIPMENT USED

Peak Power Spectral Density							
Item	Test Equipment Manufacturer Model No. Serial No. Last Cal.						
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2015/03		

#### 9.3 TEST CONFIGURATION



#### 9.4 TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5 times the bandwidth, Sweep=Auto couple
- 4. Record the max. reading.
- 5. Repeat the above procedure until the measurements for all frequencies are completed.

#### 9.5 TEST RESULTS

#### **PASSED**

#### **Test Data**

Modulation Standard	Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
GFSK	Low	2402	6.52	8	PASSED
	Middle	2440	5.59		PASSED
	High	2480	4.21		PASSED

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service


**Report No.:** CGZ3150421-00416-EF Page 19 of 35





#### **Test Plot**

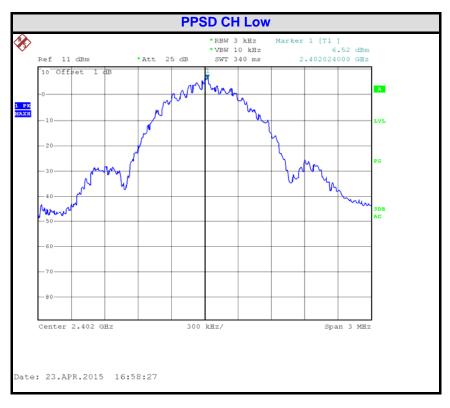

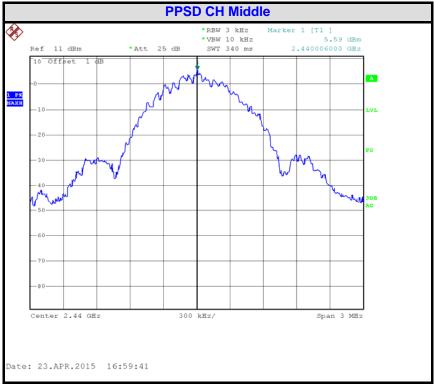

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

#### **CENTRE OF TESTING SERVICE**





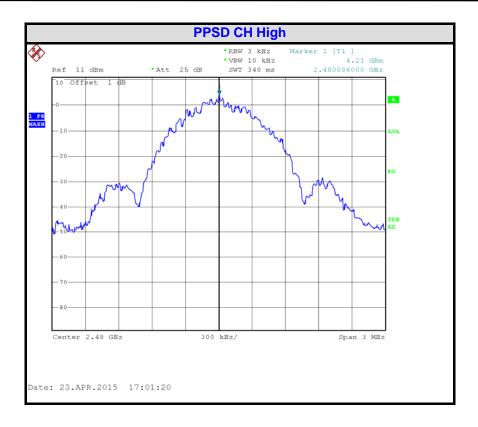

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





#### 10.0 BAND EDGES MEASUREMENT


#### **10.1 LIMIT**

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### **10.2 MEASUREMENT EQUIPMENT USED**

Radiated disturbance (electric field)									
Item	em Test Equipment Manufacturer Model No. Serial No. Last Cal.								
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2015/03				

# 10.3 Test Configuration



#### **10.4 TEST PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span = 1.5 times the bandwidth, Sweep=Auto couple
- 4. Record the max. reading.
- 5. Repeat the above procedure until the measurements for all frequencies are

#### **10.5 TEST RESULTS**

Refer to attach spectrum analyzer data chart.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service


**Report No.:** CGZ3150421-00416-EF Page 22 of 35





#### **Test Polt:**

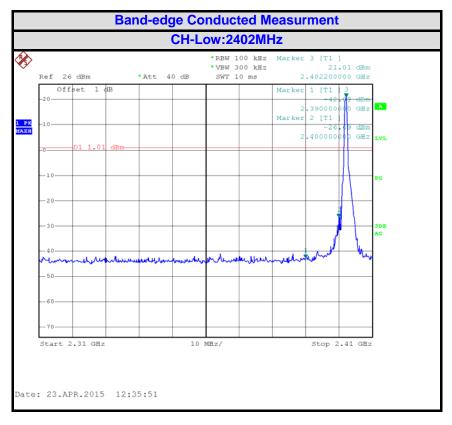

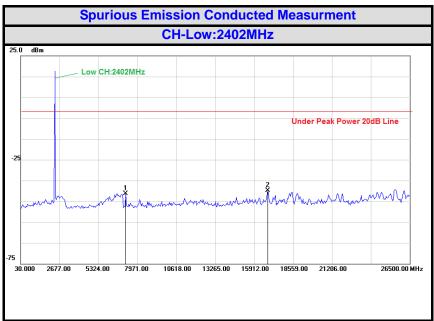

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn







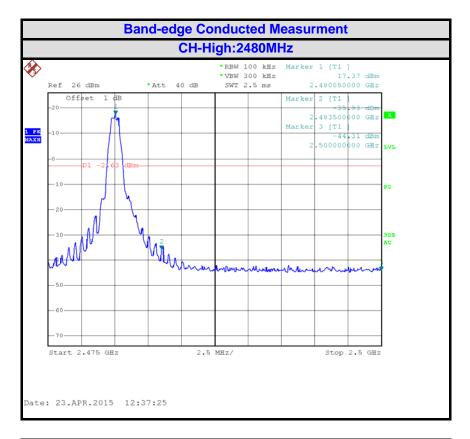

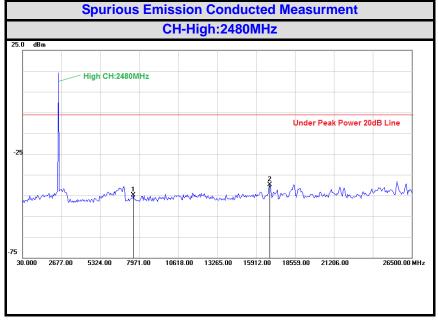

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn







# 11.0 SPURIOUS EMISSIONS

#### **11.1 LIMIT**

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FRE	QUEN	CY	DISTANCE	FIELD STREN	GTHS LIMIT
	MHz		Meters	μV/m	dB(μV)/m
0.009	~	0.490	300	2400/F(kHz)	
0.490	~	1.705	30	24000/F(kHz)	
1.705	~	30	30	30	
30	~	88	3	100	40.0
88	~	216	3	150	43.5
216	~	960	3	200	46.0
960	~	1000	3	500	54.0
Λ,	oove 1	000	3	Other:74.0 dB(µ	ιV)/m (Peak)
A	Jove II	000	3	54.0 dB(μV)/n	

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

# 11.2 Test Equipment

Radia	Radiated disturbance (electric field)										
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.						
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2014/11						
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2015/03						
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2015/03						
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2015/03						
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2015/03						
6	Loop Antenna	A.R.A	PLA-1030/B	1030	2014/11						
7	EMI Test Software	EZ-EMC	Farad	N/A	N/A						

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


**Report No.:** CGZ3150421-00416-EF Page 25 of 35






# 11.3 TEST CONFIGURATION

Below 30MHz

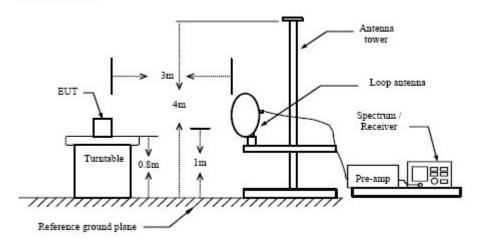

Below 1 GHz

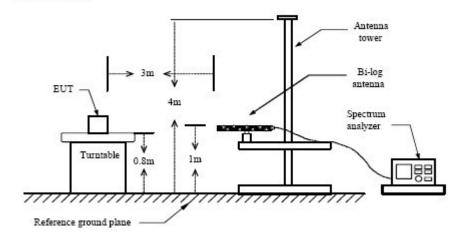

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service

**Report No.:** CGZ3150421-00416-EF Page 26 of 35





#### Above 1 GHz

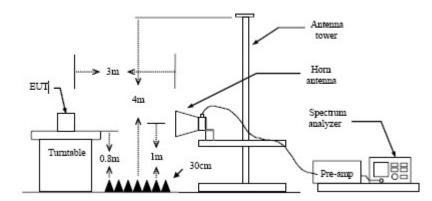

#### 11.4 TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.

#### 11.5 TEST RESULTS

The frequency range from 9KHz~30MHz,30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.



# **CENTRE OF TESTING SERVICE**





Test Mode: TX –X Position Mode Result: □ - passed □ - not passed

	No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.
		(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
Ī	Rema	ark: The test re	sult readi	ng value is to l	ow, margin a	II > 10dB of t	he limit.	

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


**Report No.:** CGZ3150421-00416-EF Page 28 of 35







EUT	SCS-001
Operating Condition	AC 120V/50Hz
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Operator	Duke
MODEL NO	SCS-001

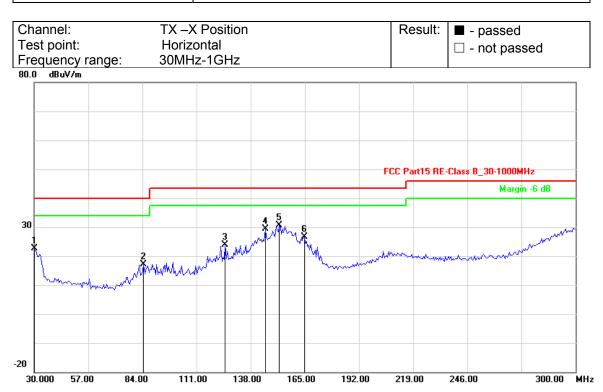

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	30.0000	-16.04	38.74	22.70	40.00	-17.30	QP
2	84.6493	-19.57	36.82	17.25	40.00	-22.75	QP
3	125.2305	-16.42	40.34	23.92	43.50	-19.58	QP
4	145.2505	-16.00	45.27	29.27	43.50	-14.23	QP
5	152.2846	-15.96	46.51	30.55	43.50	-12.95	QP
6	164.7295	-15.97	42.54	26.57	43.50	-16.93	QP
Remark	: Other frequen	icy mini ma	rgin all >6 dB o	of Limit			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service

Report No.: CGZ3150421-00416-EF

# CENTRE OF TESTING SERVICE





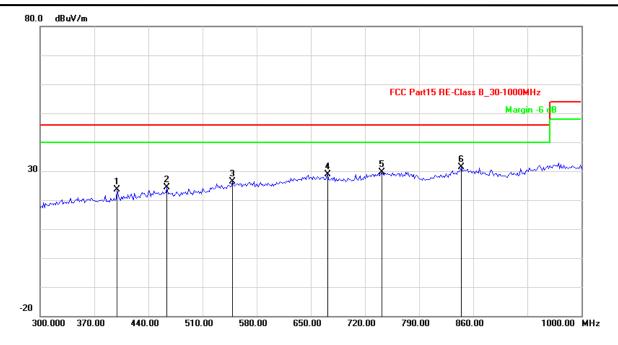

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	399.5992	-10.52	34.22	23.70	46.00	-22.30	QP		
2	464.1283	-8.36	32.70	24.34	46.00	-21.66	QP		
3	548.2966	-5.76	32.22	26.46	46.00	-19.54	QP		
4	671.7435	-3.44	32.23	28.79	46.00	-17.21	QP		
5	741.8838	-1.94	31.57	29.63	46.00	-16.37	QP		
6	844.2886	-0.63	31.93	31.30	46.00	-14.70	QP		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn







Channel:	Low Channel	Result:	■ - passed
Test point:	Horizontal		☐ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	4086.172	0.10	38.92	39.02	74.00	-34.98	peak		
2	4086.172	0.10	24.46	24.56	54.00	-29.44	AVG		
3	6877.756	8.21	41.14	49.35	74.00	-24.65	peak		
4	6877.756	8.21	27.07	35.28	54.00	-18.72	AVG		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								

Channel:	Middle Channel	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	3711.423	-1.02	40.38	39.36	74.00	-34.64	peak		
2	3711.423	-1.02	26.71	25.69	54.00	-28.31	AVG		
3	5496.994	4.73	39.98	44.71	74.00	-29.29	peak		
4	5496.994	4.73	25.48	30.21	54.00	-23.79	AVG		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								

Channel:	High Channel	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	3843.687	-0.65	36.89	36.24	74.00	-37.76	peak	
2	3843.687	-0.65	22.01	21.36	54.00	-32.64	AVG	
3	6048.096	6.70	39.66	46.36	74.00	-27.64	peak	
4	6048.096	6.70	25.87	32.57	54.00	-21.43	AVG	
Remark:	Remark: Other frequency mini margin all >6 dB of Limit							

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


**Report No.:** CGZ3150421-00416-EF Page 31 of 35







Channel:	TX –X Position	Result:	■ - passed
Test point:	Vertical		☐ - not passed
Frequency range:	30MHz-1GHz		

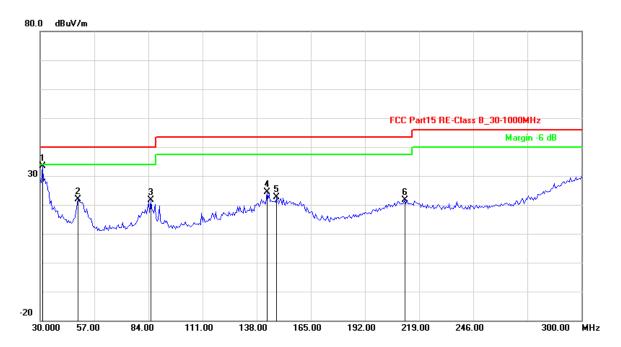

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	31.0822	-16.18	49.68	33.50	40.00	-6.50	QP		
2	48.9379	-18.48	40.30	21.82	40.00	-18.18	QP		
3	85.1904	-19.53	41.25	21.72	40.00	-18.28	QP		
4	143.0862	-16.02	40.46	24.44	43.50	-19.06	QP		
5	147.9559	-15.98	38.56	22.58	43.50	-20.92	QP		
6	211.8036	-10.32	31.98	21.66	43.50	-21.84	QP		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service

**Report No.:** CGZ3150421-00416-EF Page 32 of 35

#### **CENTRE OF TESTING SERVICE**





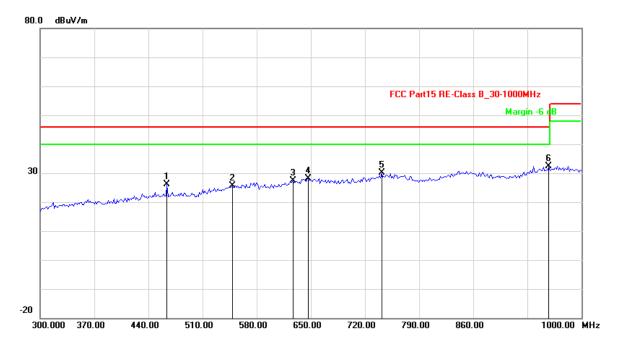

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	464.1283	-8.36	34.38	26.02	46.00	-19.98	QP		
2	548.2966	-5.76	31.34	25.58	46.00	-20.42	QP		
3	626.8537	-4.30	31.78	27.48	46.00	-18.52	QP		
4	646.4930	-3.39	31.58	28.19	46.00	-17.81	QP		
5	741.8838	-1.94	32.11	30.17	46.00	-15.83	QP		
6	957.9158	0.35	32.05	32.40	46.00	-13.60	QP		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3150421-00416-EF







Channel:	Low Channel	Result:	■ - passed
Test point:	Vertical		☐ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	3314.629	-2.33	39.93	37.60	74.00	-36.40	peak	
2	3314.629	-2.33	25.35	23.02	54.00	-30.98	AVG	
3	4571.142	1.87	39.63	41.50	74.00	-32.50	peak	
4	4571.142	1.87	24.98	26.85	54.00	-27.15	AVG	
Remark:	Remark: Other frequency mini margin all >6 dB of Limit							

Channel:	Middle Channel	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3887.776	-0.53	38.90	38.37	74.00	-35.63	peak
2	3887.776	-0.53	26.16	25.63	54.00	-28.37	AVG
3	5783.567	5.80	39.56	45.36	74.00	-28.64	peak
4	5783.567	5.80	25.44	31.24	54.00	-22.76	AVG
Remark: Other frequency mini margin all >6 dB of Limit							

Channel:	High Channel	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	4328.657	1.00	37.11	38.11	74.00	-35.89	peak	
2	4328.657	1.00	23.63	24.63	54.00	-29.37	AVG	
3	6268.537	7.12	40.41	47.53	74.00	-26.47	peak	
4	6268.537	7.12	25.53	32.65	54.00	-21.35	AVG	
Remark:	Remark: Other frequency mini margin all >6 dB of Limit							

Note:Level=Reading+Factor. Margin= Level-Limit

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

**Report No.:** CGZ3150421-00416-EF Page 34 of 35

#### **CENTRE OF TESTING SERVICE**





# 12.0 Antenna Requirements

# 12.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### 12.2 Antenna Construction and Directional Gain

Antenna type: External antenna

Antenna Gain: 5 dBi

# 13.0 Deviation to test specifications

The following identical model(s):

N/A

Belong to the tested device:

Product description: SCS-001 Model name: SCS-001

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

**Report No.:** CGZ3150421-00416-EF Page 35 of 35