



RF TEST REPORT



Report No.: FCC_IC_RF_SL18071101-RII-001_Zigbee
Supersede Report No.:

| | | |
|---|---|--|
| Applicant | : | Rigado Inc. |
| Product Name | : | BMD-345 Bluetooth 5 BLE + 802.15.4 module |
| Model No. | : | BMD-345 |
| Test Standard | : | 47 CFR 15.247 RSS 247 Iss 2: Feb 2017 |
| Test Method | : | ANSI C63.10: 2013 RSS Gen Iss 5: Apr 2018 558074 D01 DTS Meas Guidance v04 |
| FCC ID | : | 2AA9B11 |
| IC | : | 12208A-11 |
| Dates of test | : | 08/02/2018 -08/16/2018 |
| Issue Date | : | 08/23/2018 |
| Test Result | : | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |
| Equipment complied with the specification <input checked="" type="checkbox"/> | | |
| Equipment did not comply with the specification <input type="checkbox"/> | | |

This Test Report is Issued Under the Authority of:

| | |
|---|--|
|  |  |
| Rachana Khanduri | Chen Ge |
| Test Engineer | Engineer Reviewer |

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

| Country/Region | Accreditation Body | Scope |
|----------------|------------------------|-----------------------------------|
| USA | FCC, A2LA | EMC, RF/Wireless, Telecom |
| Canada | IC, A2LA, NIST | EMC, RF/Wireless, Telecom |
| Taiwan | BSMI, NCC, NIST | EMC, RF, Telecom, Safety |
| Hong Kong | OFTA, NIST | RF/Wireless, Telecom |
| Australia | NATA, NIST | EMC, RF, Telecom, Safety |
| Korea | KCC/RRA, NIST | EMI, EMS, RF, Telecom, Safety |
| Japan | VCCI, JATE, TELEC, RFT | EMI, RF/Wireless, Telecom |
| Mexico | NOM, COFETEL, Caniety | Safety, EMC, RF/Wireless, Telecom |
| Europe | A2LA, NIST | EMC, RF, Telecom, Safety |
| Israel | MOC, NIST | EMC, RF, Telecom, Safety |

Accreditations for Product Certifications

| Country | Accreditation Body | Scope |
|-----------|--------------------|------------------|
| USA | FCC TCB, NIST | EMC, RF, Telecom |
| Canada | IC FCB, NIST | EMC, RF, Telecom |
| Singapore | iDA, NIST | EMC, RF, Telecom |
| EU | NB | EMC & RED |
| Japan | MIC (RCB 208) | RF, Telecom |
| Hong Kong | OFTA (US002) | RF, Telecom |

CONTENTS

| | | |
|-----------|---|-----------|
| 1 | REPORT REVISION HISTORY | 4 |
| 2 | EXECUTIVE SUMMARY | 5 |
| 3 | CUSTOMER INFORMATION | 5 |
| 4 | TEST SITE INFORMATION | 5 |
| 5 | MODIFICATION | 5 |
| 6 | EUT INFORMATION | 6 |
| 6.1 | EUT Description | 6 |
| 6.2 | Radio Description | 6 |
| 7 | SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION..... | 7 |
| 7.1 | Supporting Equipment | 7 |
| 7.2 | Cabling Description | 7 |
| 7.3 | Test Software Description | 7 |
| 8 | TEST SUMMARY..... | 8 |
| 9 | MEASUREMENT UNCERTAINTY | 9 |
| 9.1 | Radiated Emissions (100kHz to 30MHz) | 9 |
| 9.2 | Radiated Emissions (30MHz to 1GHz)..... | 9 |
| 9.3 | Radiated Emissions (1GHz to 40GHz)..... | 10 |
| 9.4 | RF conducted measurement..... | 10 |
| 10 | MEASUREMENTS, EXAMINATION AND DERIVED RESULTS | 11 |
| 10.1 | Antenna Requirement..... | 11 |
| 10.2 | Conducted Emissions..... | 12 |
| 10.3 | 6dB & 99% Bandwidth..... | 15 |
| 10.4 | Output Power | 19 |
| 10.5 | Band Edge | 23 |
| 10.6 | Peak Spectral Density | 25 |
| 10.7 | Radiated Spurious Emissions below 1GHz | 29 |
| 10.8 | Radiated Spurious Emissions between 1GHz – 25GHz | 31 |
| | ANNEX A. TEST INSTRUMENT | 34 |
| | ANNEX B. SIEMIC ACCREDITATION | 35 |

1 Report Revision History

| Report No. | Report Version | Description | Issue Date |
|-------------------------------------|----------------|-------------|------------|
| FCC_IC_RF_SL18071101-RII-001_Zigbee | None | Original | 08/23/2018 |
| | | | |
| | | | |
| | | | |
| | | | |

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Rigado Inc
Product: BMD-345 Bluetooth 5 BLE + 802.15.4 module
Model: BMD-345

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

| | | |
|----------------------|---|---|
| Applicant Name | : | Rigado Inc |
| Applicant Address | : | 3950 Fairview Industrial Dr SE, STE 100, Salem OR 97302 USA |
| Manufacturer Name | : | Rigado Inc |
| Manufacturer Address | : | 3950 Fairview Industrial Dr SE, STE 100, Salem OR 97302 USA |

4 Test site information

| | |
|----------------------|---|
| Lab performing tests | SIEMIC Laboratories |
| Lab Address | 775 Montague Expressway, Milpitas, CA 95035 |
| FCC Test Site No. | 881796 |
| IC Test Site No. | 4842D-2 |
| VCCI Test Site No. | A0133 |

5 Modification

| Index | Item | Description | Note |
|-------|------|-------------|------|
| - | - | - | - |
| | | | |
| | | | |
| | | | |
| | | | |

6 EUT Information

6.1 EUT Description

| | |
|---------------------------|---|
| Product Name | BMD-345 Bluetooth 5 BLE + 802.15.4 module |
| Model No. | BMD-345 |
| Trade Name | Rigado Inc |
| Serial No. | 32D093 |
| Host Model No. | N/A |
| Input Power | 5VDC (USB) |
| Power Adapter Manu/Model | N/A |
| Power Adapter SN | N/A |
| Hardware Version | vA |
| Software Version | N/A |
| Date of EUT received | 07/31/2018 |
| Equipment Class/ Category | DTS |
| Port/Connectors | USB |

6.2 Radio Description

802.15.4:

| Radio Type | 802.15.4 |
|------------------------|--|
| Operating Frequency | 2402MHz-2480MHz |
| Modulation | O-QPSK |
| Channel Spacing | 5 MHz |
| Antenna Type | External PCB Trace Antenna- ¼ wave length dipole |
| Antenna Gain | 0.5 dBi |
| Antenna Connector Type | N/A |

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

| Item | Supporting Equipment Description | Model | Serial Number | Manufacturer | Note |
|------|----------------------------------|----------------|---------------|--------------|------|
| 1 | Laptop | Latitude E5410 | N/A | Dell | - |
| 2 | Supporting PCB | N/A | N/A | Rigado | - |
| | | | | | |

7.2 Cabling Description

| Name | Connection Start | | Connection Stop | | Length / shielding Info | | Note |
|------|------------------|----------|-----------------|----------|-------------------------|------------|------|
| | From | I/O Port | To | I/O Port | Length (m) | Shielding | |
| USB | EUT | USB | Laptop | USB | 2 | Unshielded | - |
| | | | | | | | |

7.3 Test Software Description

| Test Item | Software | Description |
|------------|----------|--|
| RF Testing | - | Set the EUT to transmit continuously in diferent test modes and channels |
| | | |
| | | |

8 Test Summary

| Test Item | Test standard | | Test Method/Procedure | | Pass / Fail |
|------------------------------|---------------|--------------|-----------------------|---|--|
| Antenna Requirement | FCC | 15.203 | FCC | ANSI C63.10 – 2013 558074 D01 DTS Meas. Guidance v04 | <input checked="" type="checkbox"/> Pass |
| | IC | - | IC | | <input type="checkbox"/> N/A |
| Restricted Band of Operation | FCC | 15.205 | FCC | ANSI C63.10:2013 558074 D01 DTS Meas Guidance v04 | <input checked="" type="checkbox"/> Pass |
| | IC | RSS Gen 8.10 | IC | | <input type="checkbox"/> N/A |
| AC Conducted Emissions | FCC | 15.207(a) | FCC | ANSI C63.10:2013 | <input checked="" type="checkbox"/> Pass |
| | IC | RSS Gen 8.8 | IC | RSS Gen Issue 5: 2018 | <input type="checkbox"/> N/A |

DTS Band Requirement

| Test Item | Test standard | | Test Method/Procedure | | Pass / Fail |
|---|---|----------------|-----------------------|--|--|
| 99% Occupied Bandwidth | - | - | - | - | <input checked="" type="checkbox"/> Pass |
| | IC | RSS Gen 6.6 | IC | RSS Gen Issue 5: 2018 | <input type="checkbox"/> N/A |
| 6dB Bandwidth | FCC | 15.247(a)(2) | FCC | 558074 D01 DTS Meas Guidance v04 | <input checked="" type="checkbox"/> Pass |
| | IC | RSS247 (5.2.1) | IC | | <input type="checkbox"/> N/A |
| Band Edge and Radiated Spurious Emissions | FCC | 15.247(d) | FCC | ANSI C63.10:2013 558074 D01 DTS Meas Guidance v04 | <input checked="" type="checkbox"/> Pass |
| | IC | RSS247 (5.5) | IC | | <input type="checkbox"/> N/A |
| Output Power | FCC | 15.247(b) | FCC | 558074 D01 DTS Meas Guidance v04 | <input checked="" type="checkbox"/> Pass |
| | IC | RSS247 (5.4.4) | IC | | <input type="checkbox"/> N/A |
| Receiver Spurious Emissions | IC | RSS Gen (4.8) | IC | RSS Gen Issue 5: 2018 | <input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A |
| Antenna Gain > 6 dBi | FCC | 15.247(e) | FCC | - | <input type="checkbox"/> Pass |
| | IC | - | IC | - | <input checked="" type="checkbox"/> N/A |
| Power Spectral Density | FCC | 15.247(e) | FCC | 558074 D01 DTS Meas Guidance v04 | <input checked="" type="checkbox"/> Pass |
| | IC | RSS247 (5.2.2) | IC | | <input type="checkbox"/> N/A |
| RF Exposure requirement | FCC | 15.247(i) | FCC | - | <input type="checkbox"/> Pass |
| | IC | RSS Gen(5.5) | IC | RSS Gen Issue 5: 2018 | <input checked="" type="checkbox"/> N/A |
| Remark | 1. All measurement uncertainties do not take into consideration for all presented test results. | | | | |

9 Measurement Uncertainty

9.1 Radiated Emissions (100kHz to 30MHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches

| Source of Uncertainty | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-----------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Receiver Reading | 0.10 | Rectangular | 1.732 | 1 | 0.069284 |
| Cable Insertion Loss | 0.21 | Normal | 2 | 1 | 0.105 |
| Antenna Factor | 0.65 | Normal | 2 | 1 | 0.325 |
| Receiver CW accuracy | 0.45 | Rectangular | 1.732 | 1 | 0.2598152 |
| Mismatch | 0.25 | U-Shape | 1.414 | 1 | 0.1768033 |
| Combined Standard Uncertainty | | | | | 0.935 |
| Expanded Uncertainty (K=2) | | | | | 1.87 |

The total derived measurement uncertainty is +/- 1.87 dB.

9.2 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

| Source of Uncertainty | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-----------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Receiver Reading | 0.12 | Rectangular | 1.732 | 1 | 0.069284 |
| Cable Insertion Loss | 0.21 | Normal | 2 | 1 | 0.105 |
| Filter Insertion Loss | 0.25 | Normal | 2 | 1 | 0.125 |
| Antenna Factor | 0.65 | Normal | 2 | 1 | 0.325 |
| Receiver CW accuracy | 0.5 | Rectangular | 1.732 | 1 | 0.2886836 |
| Pulse Amplitude Response | 1.5 | Rectangular | 1.732 | 1 | 0.86605081 |
| PRF Response | 1.5 | Rectangular | 1.732 | 1 | 0.86605081 |
| Mismatch Filter - Receiver | 0.25 | U-Shape | 1.414 | 1 | 0.1768033 |
| NSA Calibration | 4.0 | U-Shape | 1.414 | 1 | 2.8288543 |
| Combined Standard Uncertainty | | | | | 3.0059131 |
| Expanded Uncertainty (K=2) | | | | | 6.0118262 |

The total derived measurement uncertainty is +/- 6.00 dB.

9.3 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

| Source of Uncertainty | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-----------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Receiver Reading | 0.12 | Rectangular | 1.732 | 1 | 0.0692840 |
| Cable Insertion Loss | 0.21 | Normal | 2 | 1 | 0.1050000 |
| Filter Insertion Loss | 0.25 | Normal | 2 | 1 | 0.1250000 |
| Antenna Factor | 0.65 | Normal | 2 | 1 | 0.3250000 |
| Receiver CW accuracy | 0.5 | Rectangular | 1.732 | 1 | 0.2886836 |
| Pulse Amplitude Response | 1.5 | Rectangular | 1.732 | 1 | 0.8660508 |
| PRF Response | 1.5 | Rectangular | 1.732 | 1 | 0.8660508 |
| Mismatch Filter - Receiver | 0.25 | U-Shape | 1.414 | 1 | 0.1768033 |
| VSWR Calibration | 2.0 | U-Shape | 1.414 | 1 | 1.4144272 |
| Combined Standard Uncertainty | | | | | 4.2363 |
| Expanded Uncertainty (K=2) | | | | | 8.4726 |

The total derived measurement uncertainty is +/- 8.47 dB.

9.4 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches

| Source of Uncertainty | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-----------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Reference Level | 0.12 | Rectangular | 1.732 | 1 | 0.069284 |
| Cable Insertion Loss | 0.21 | Normal | 2 | 1 | 0.105 |
| Attenuator | 0.25 | Normal | 2 | 1 | 0.125 |
| Mismatch | 0.25 | U-Shape | 1.414 | 1 | 0.1768033 |
| Combined Standard Uncertainty | | | | | 0.476087 |
| Expanded Uncertainty (K=2) | | | | | 0.952174 |

The total derived measurement uncertainty is +/- 0.95 dB.

10 Measurements, Examination and Derived Results


10.1 Antenna Requirement

| Spec | Requirement | Applicable |
|---------|--|-------------------------------------|
| §15.203 | <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <p>a) Antenna must be permanently attached to the device. b) The antenna must use a unique type of connector to attach to the device. c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.</p> | <input checked="" type="checkbox"/> |
| Remark | The EUT uses a PCB Trace Antenna (Integrated) which meet the requirement. | |
| Result | <input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL | |

10.2 Conducted Emissions

Conducted Emission Limit

| Frequency ranges (MHz) | Limit (dBuV) | |
|------------------------|--------------|---------|
| | QP | Average |
| 0.15 ~ 0.5 | 66 - 56 | 56 - 46 |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |
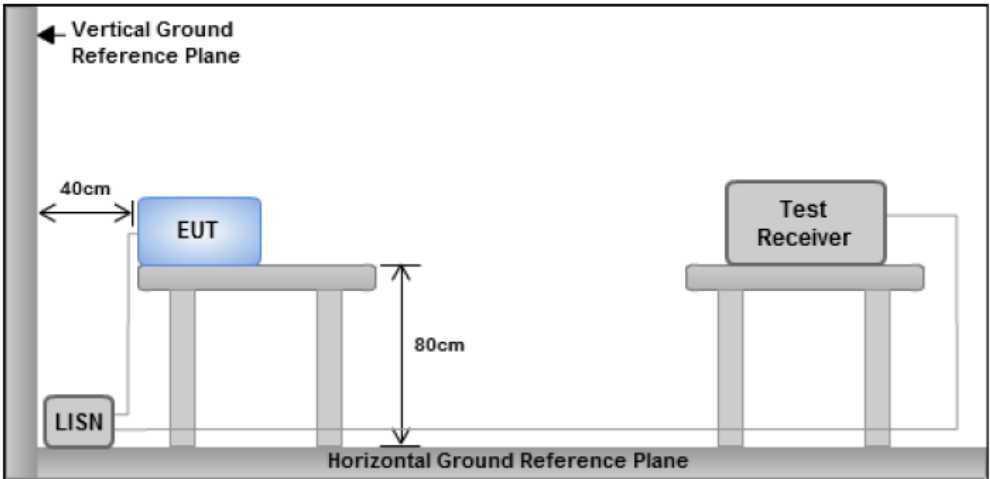
| Spec | Item | Requirement | Applicable |
|----------------------------|---|---|-------------------------------------|
| FCC 15.207 RSS247(A8.1) | a) | For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges. | <input checked="" type="checkbox"/> |
| Test Setup |  <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</p> | | |
| Procedure | <ul style="list-style-type: none"> - The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. - The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment was powered separately from another main supply. | | |
| Remark | EUT was tested at 120VAC, 60Hz | | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail | | |


Test Data Yes N/A

Test Plot Yes (See below) N/A

Test was done by Rachana Khanduri at Conducted Emission test site.

Conducted Emission Test Results

| | | | | |
|---------------------------|---------------------|------|---------|---|
| Test specification: | Conducted Emissions | | | |
| Environmental Conditions: | Temp(°C): | 21 | Result: | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |
| | Humidity (%): | 42 | | |
| | Atmospheric(mbar): | 1021 | | |
| Mains Power: | 120Vac, 60Hz | | | |
| Tested by: | Rachana Khanduri | | | |
| Test Date: | 08/15/2018 | | | |
| Remarks | Conducted @ Live | | | |

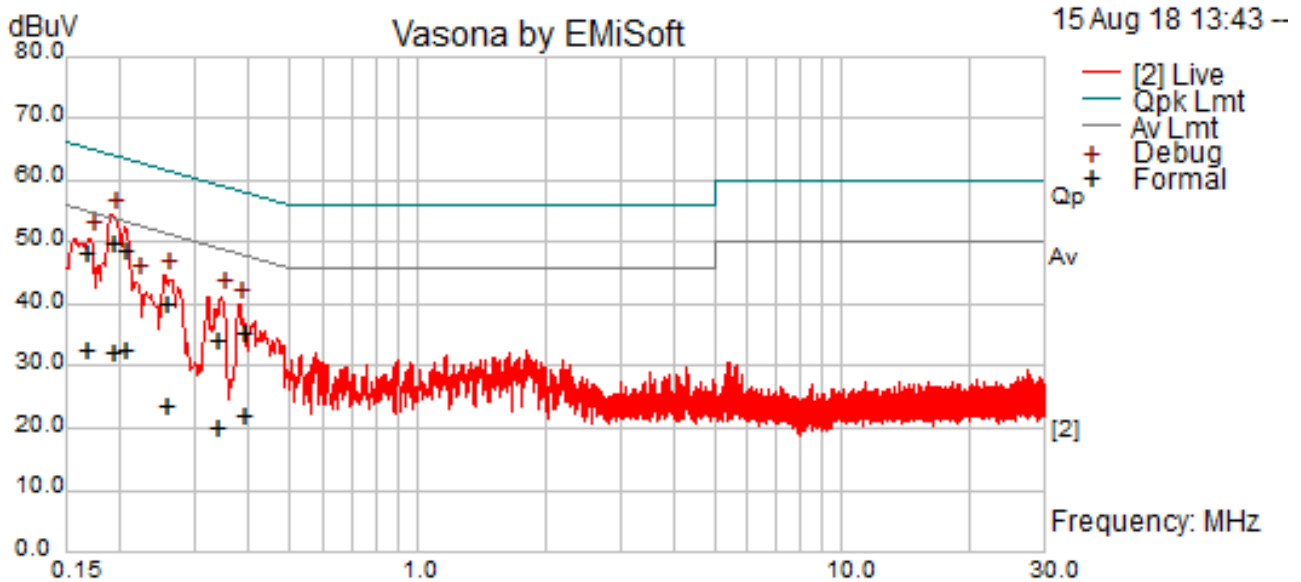


Live Plot at 120VAC, 60Hz

| Frequency (MHz) | Raw (dBuV) | Cable Loss (dB) | Factors (dB) | Level (dBuV) | Measurement Type | Line / Neutral | Limit (dBuV) | Margin (dB) | Pass /Fail |
|-----------------|------------|-----------------|--------------|--------------|------------------|----------------|--------------|-------------|------------|
| 0.190 | 40.43 | 9.32 | 0.04 | 49.79 | Quasi Peak | Live | 64.04 | -14.25 | Pass |
| 0.163 | 38.54 | 9.33 | 0.05 | 47.92 | Quasi Peak | Live | 65.31 | -17.39 | Pass |
| 0.254 | 30.46 | 9.32 | 0.04 | 39.82 | Quasi Peak | Live | 61.63 | -21.82 | Pass |
| 0.334 | 24.72 | 9.33 | 0.04 | 34.09 | Quasi Peak | Live | 59.35 | -25.26 | Pass |
| 0.386 | 25.78 | 9.33 | 0.04 | 35.14 | Quasi Peak | Live | 58.15 | -23.01 | Pass |
| 0.202 | 39.04 | 9.32 | 0.04 | 48.40 | Quasi Peak | Live | 63.52 | -15.12 | Pass |
| 0.190 | 22.71 | 9.32 | 0.04 | 32.08 | Average | Live | 54.04 | -21.96 | Pass |
| 0.163 | 22.90 | 9.33 | 0.05 | 32.27 | Average | Live | 55.31 | -23.03 | Pass |
| 0.254 | 13.99 | 9.32 | 0.04 | 23.35 | Average | Live | 51.63 | -28.28 | Pass |
| 0.334 | 10.71 | 9.33 | 0.04 | 20.07 | Average | Live | 49.35 | -29.28 | Pass |
| 0.386 | 12.59 | 9.33 | 0.04 | 21.96 | Average | Live | 48.15 | -26.19 | Pass |
| 0.202 | 23.03 | 9.32 | 0.04 | 32.39 | Average | Live | 53.52 | -21.13 | Pass |

Conducted Emission Test Results

| | | | | |
|---------------------------|---------------------|------|---------|---|
| Test specification: | Conducted Emissions | | | |
| Environmental Conditions: | Temp(°C): | 21 | Result: | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |
| | Humidity (%): | 42 | | |
| | Atmospheric(mbar): | 1021 | | |
| Mains Power: | 120Vac, 60Hz | | | |
| Tested by: | Rachana Khanduri | | | |
| Test Date: | 08/15/2018 | | | |
| Remarks | Conducted @ Neutral | | | |

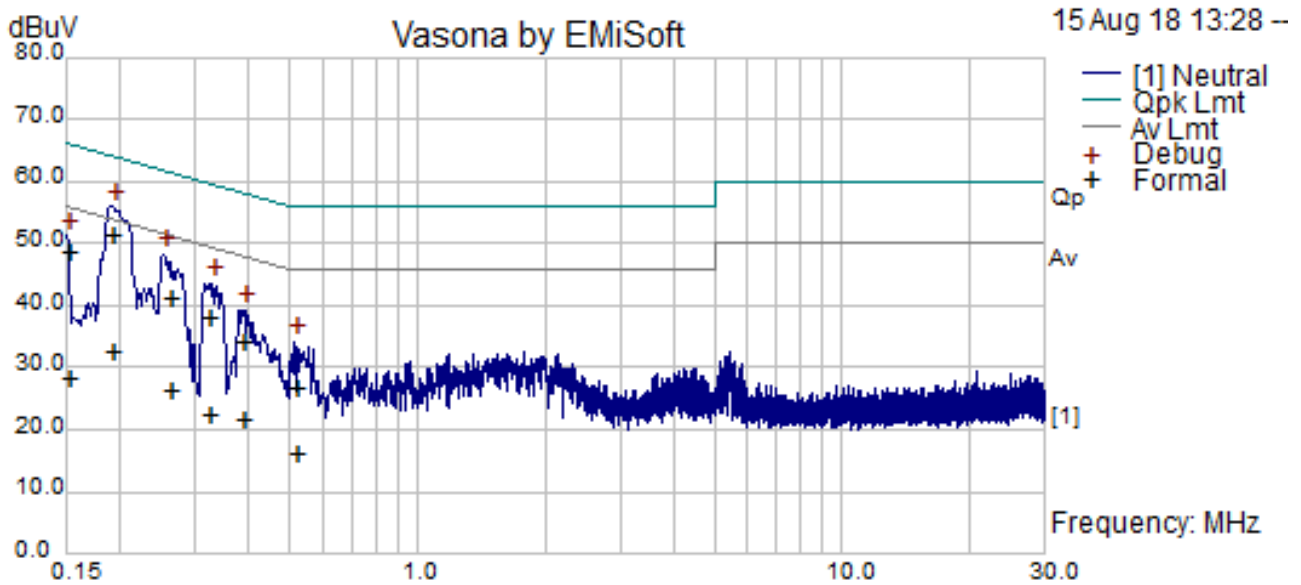


Neutral Plot at 120Vac, 60Hz

| Frequency (MHz) | Raw (dBuV) | Cable Loss (dB) | Factors (dB) | Level (dBuV) | Measurement Type | Line / Neutral | Limit (dBuV) | Margin (dB) | Pass /Fail |
|-----------------|------------|-----------------|--------------|--------------|------------------|----------------|--------------|-------------|------------|
| 0.189 | 41.95 | 9.32 | 0.04 | 51.32 | Quasi Peak | Neutral | 64.06 | -12.74 | Pass |
| 0.260 | 31.86 | 9.32 | 0.04 | 41.22 | Quasi Peak | Neutral | 61.42 | -20.20 | Pass |
| 0.150 | 39.08 | 9.33 | 0.05 | 48.46 | Quasi Peak | Neutral | 66.00 | -17.54 | Pass |
| 0.319 | 28.54 | 9.32 | 0.04 | 37.90 | Quasi Peak | Neutral | 59.73 | -21.83 | Pass |
| 0.385 | 24.82 | 9.33 | 0.04 | 34.18 | Quasi Peak | Neutral | 58.16 | -23.98 | Pass |
| 0.514 | 17.19 | 9.33 | 0.04 | 26.57 | Quasi Peak | Neutral | 56.00 | -29.43 | Pass |
| 0.189 | 22.99 | 9.32 | 0.04 | 32.36 | Average | Neutral | 54.06 | -21.71 | Pass |
| 0.260 | 16.74 | 9.32 | 0.04 | 26.10 | Average | Neutral | 51.42 | -25.32 | Pass |
| 0.150 | 18.87 | 9.33 | 0.05 | 28.25 | Average | Neutral | 56.00 | -27.75 | Pass |
| 0.319 | 12.83 | 9.32 | 0.04 | 22.20 | Average | Neutral | 49.73 | -27.54 | Pass |
| 0.385 | 12.00 | 9.33 | 0.04 | 21.37 | Average | Neutral | 48.16 | -26.79 | Pass |
| 0.514 | 6.60 | 9.33 | 0.04 | 15.97 | Average | Neutral | 46.00 | -30.03 | Pass |

Note: The results above show only the worst case.

10.3 6dB & 99% Bandwidth

Requirement(s):
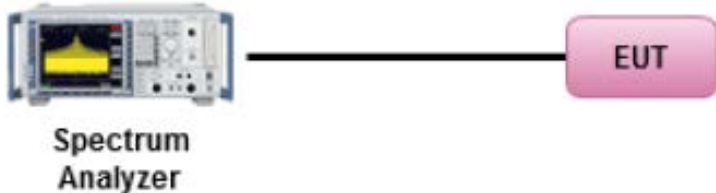
| Spec | Requirement | Applicable |
|----------------------------|--|---|
| § 15.247 RSS247 (5.2.1) | 6dB BW≥500KHz; | <input checked="" type="checkbox"/> |
| RSS Gen 4.6.1 | The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth | <input checked="" type="checkbox"/> |
| Test Setup |  <p style="text-align: center;">Spectrum Analyzer EUT</p> | |
| Test Procedure | 558074 D01 DTS Meas Guidance v04, 8.1 DTS bandwidth <u>6dB Emission bandwidth measurement procedure</u> <ul style="list-style-type: none"> - Set RBW = 100 kHz. - Set the video bandwidth (VBW) ≥ 3 x RBW. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize. - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. | |
| Test Date | 08/15/2018 | Environmental condition Temperature 23°C Relative Humidity 42% Atmospheric Pressure 1021mbar |
| Remark | N/A | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail | |

Test Data Yes N/A

Test Plot Yes N/A


Test was done by Rachana Khanduri at RF test site.


Zigbee:

| Channel | Channel Frequency (MHz) | OBW | |
|---------|-------------------------|-----------|----------|
| | | 99% (MHz) | 6dB(MHz) |
| Low | 2402 | 2.22 | 1.04 |
| Mid | 2440 | 2.20 | 1.08 |
| High | 2480 | 2.23 | 1.28 |

6dB & 99% Bandwidth Test Plots


Zigbee:

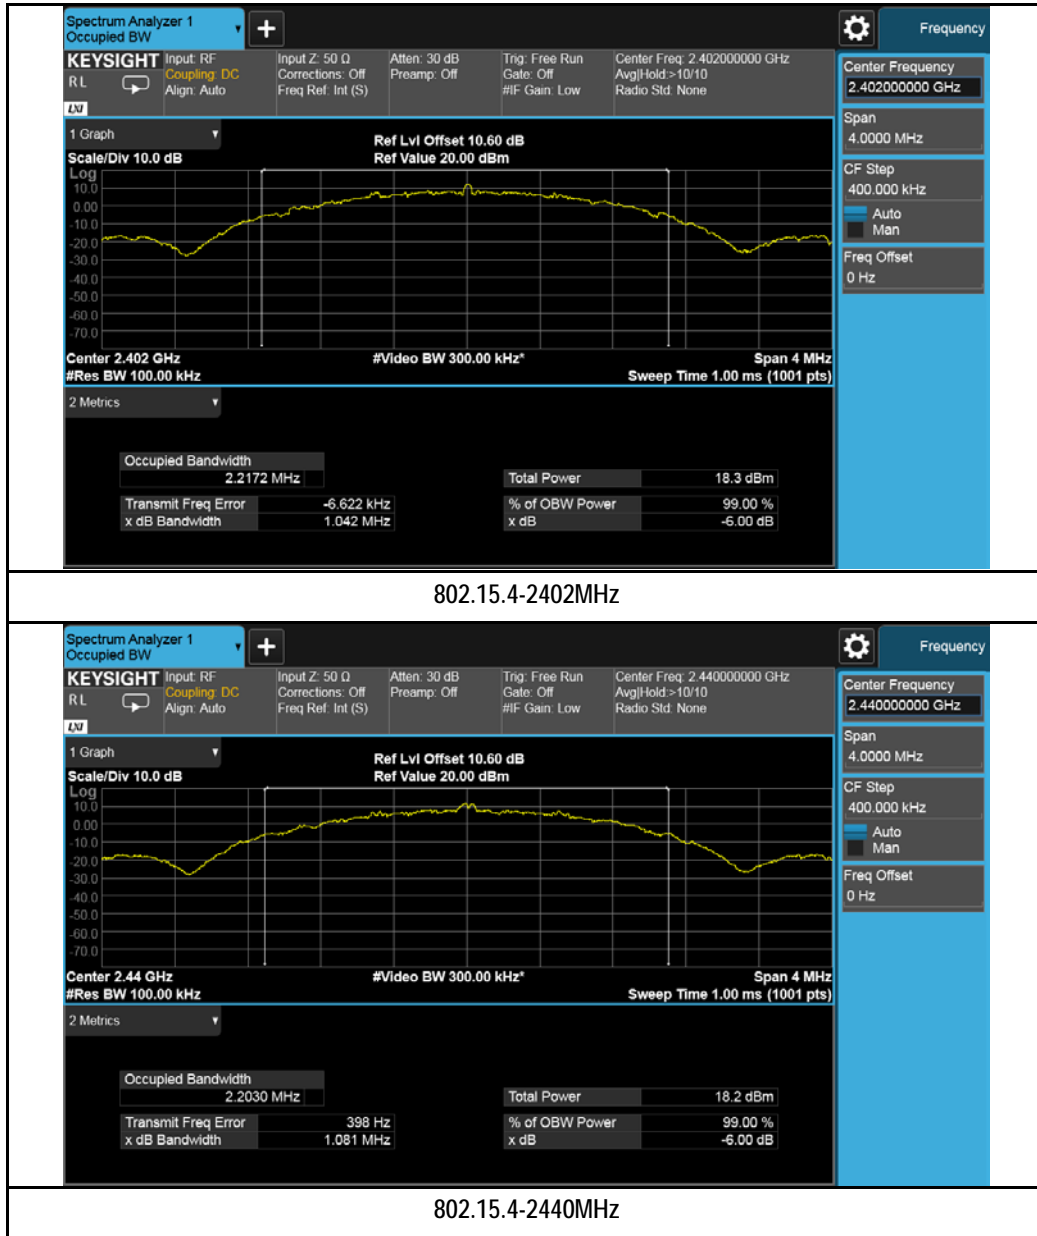

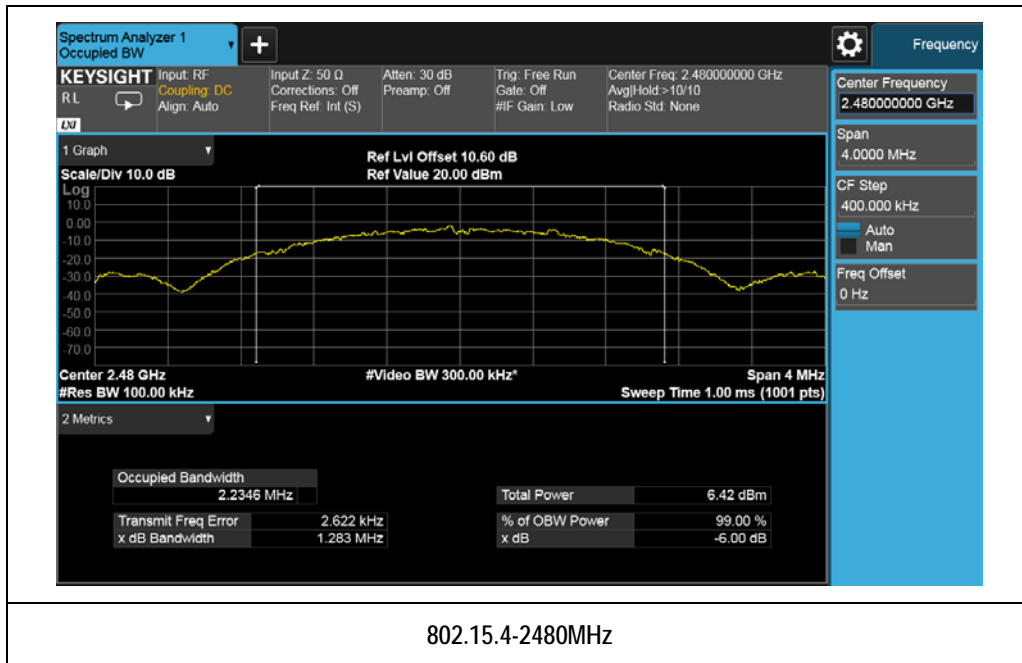

10.4 Output Power

Requirement(s):
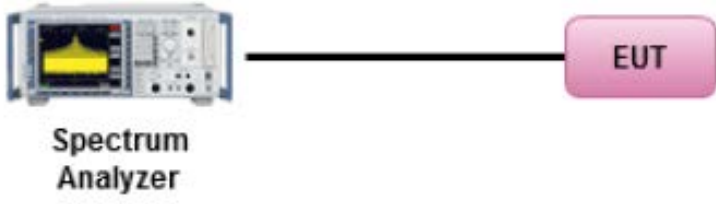
| Spec | Item | Requirement | Applicable |
|----------------------------|--|---|--|
| § 15.247 RSS247 (5.4.4) | a) | FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt | <input type="checkbox"/> |
| | b) | FHSS in 5725-5850MHz: ≤ 1 Watt | <input type="checkbox"/> |
| | c) | For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt. | <input type="checkbox"/> |
| | d) | FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt | <input type="checkbox"/> |
| | e) | FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt | <input type="checkbox"/> |
| | f) | DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤ 1 Watt | <input checked="" type="checkbox"/> |
| Test Setup |  <p style="text-align: center;">Spectrum Analyzer ——— EUT</p> | | |
| Test Procedure | <p>558074 D01 DTS Meas Guidance v04, 9.1.1</p> <p><u>Measurement using a Spectrum Analyzer (SA)</u> This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.</p> <ul style="list-style-type: none"> (a) Set the RBW \geq DTS bandwidth. (b) Set VBW ≥ 3 <input type="checkbox"/> RBW. (c) Set span ≥ 3 <input type="checkbox"/> RBW (d) Sweep time = auto couple. (e) Detector = peak. (f) Trace mode = max hold. (g) Allow trace to fully stabilize (h) Use peak marker function to determine the peak amplitude level. | | |
| Test Date | 08/15/2018 | Environmental condition | Temperature 23°C Relative Humidity 44% Atmospheric Pressure 1021mbar |
| Remark | NONE | | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail | | |

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test was done by Rachana Khanduri at RF test site.


Output Power measurement results :


802.15.4 :

| Type | Freq (MHz) | Test mode | CH | Conducted Power (dBm) | Limit (dBm) | Result |
|--------------|------------|-----------|------|-----------------------|-------------|--------|
| Output power | 2402 | Zigbee | Low | 12.50 | ≤30 | Pass |
| | 2440 | Zigbee | Mid | 11.82 | ≤30 | Pass |
| | 2480 | Zigbee | High | -7.51 | ≤30 | Pass |

Test Plots:


802.15.4 :

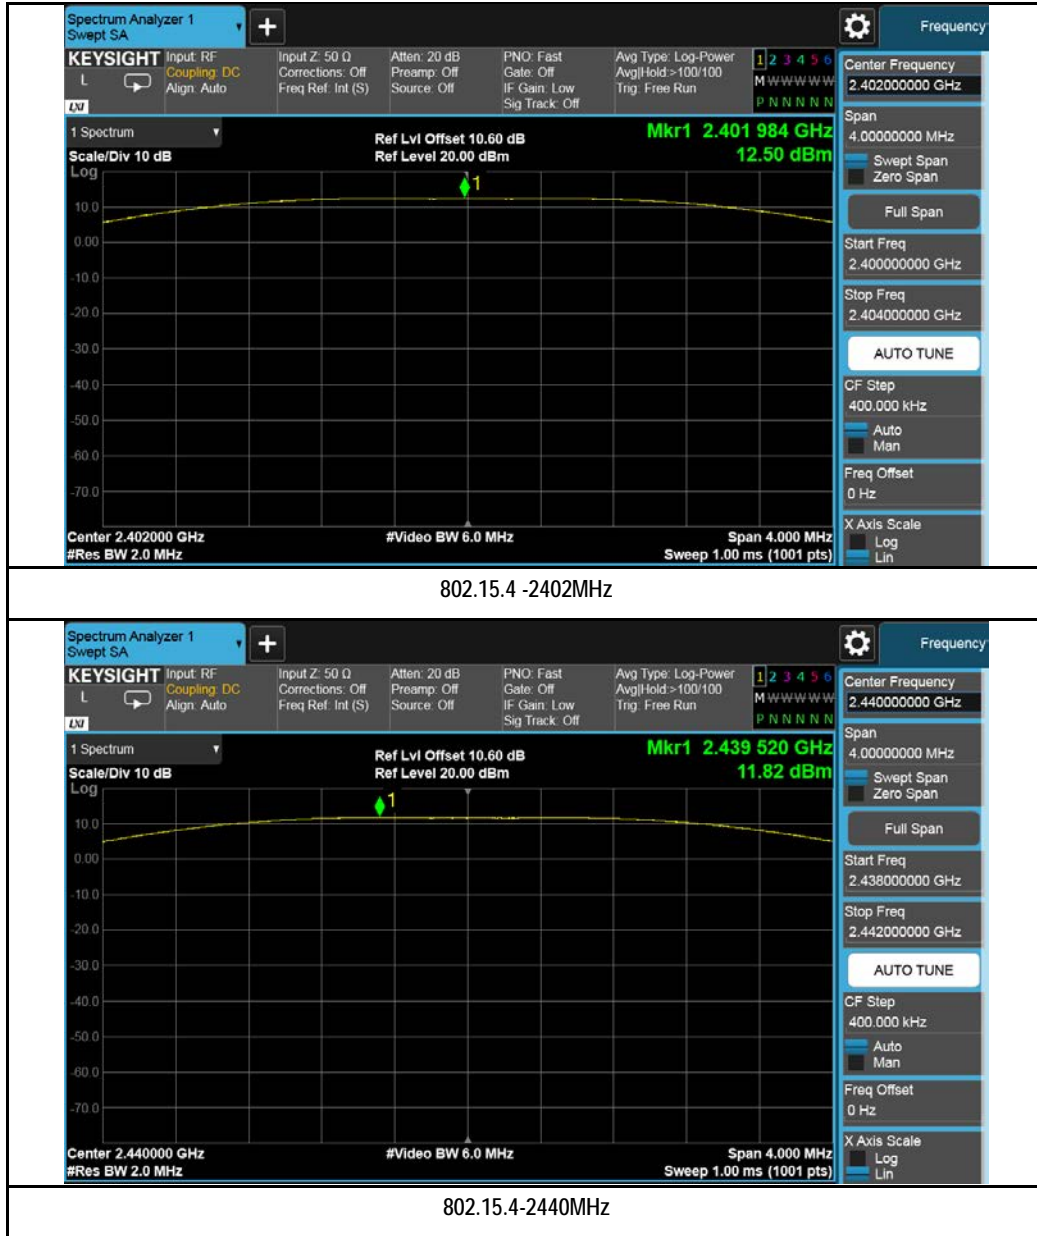

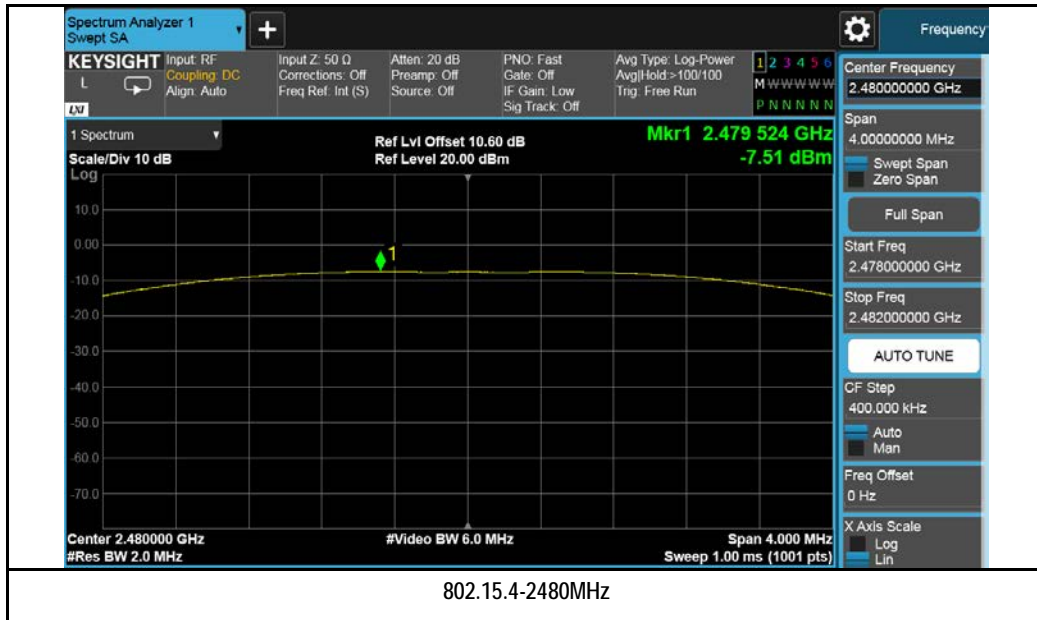

10.5 Band Edge

Requirement(s):
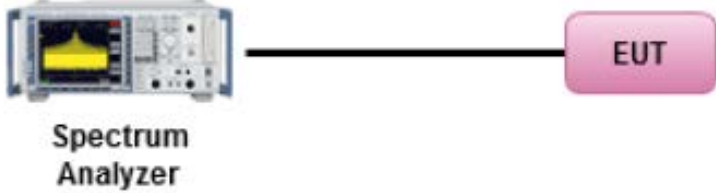
| Spec | Item | Requirement | Applicable |
|-------------------------|---|--|---|
| § 15.247 RSS247(5.5) | d) | For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209 (a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down | ☒ |
| Test Setup |  <p style="text-align: center;">Spectrum Analyzer EUT</p> | | |
| Test Procedure | <p>558074 D01 DTS Meas Guidance v04</p> <p><u>Band Edge measurement procedure</u></p> <ol style="list-style-type: none"> 1. Set the EUT to maximum power setting and enable the EUT transmit continuously. 2. Band edge emissions must be at least 30 dB down from the highest emission level within the authorized band as a measured. The attenuation shall be be 30 dB instead of 20 dB when Peak conducted output power procedure is used. 3. Change modulation and channel bandwidth then repeat step 1 to 2. 4. Measured and record the results in the test report. | | |
| Test Date | 08/15/2018 | Environmental condition | Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar |
| Remark | - | | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail | | |



Test Data Yes N/A

Test Plot Yes (See below) N/A

Test was done by Rachana Khanduri at RF test site.


Test Plots:

802.15.4:

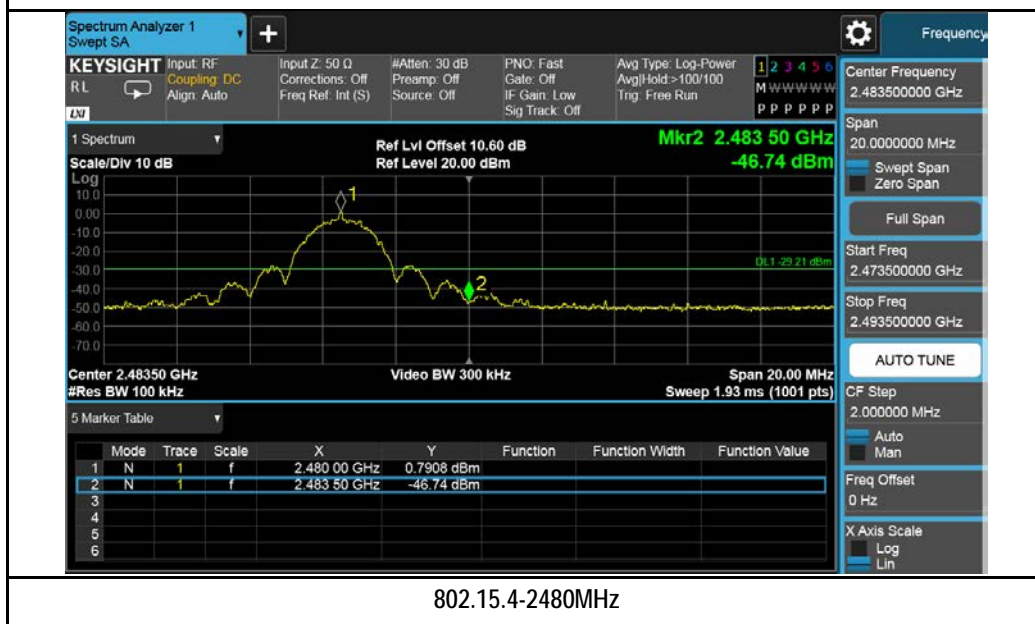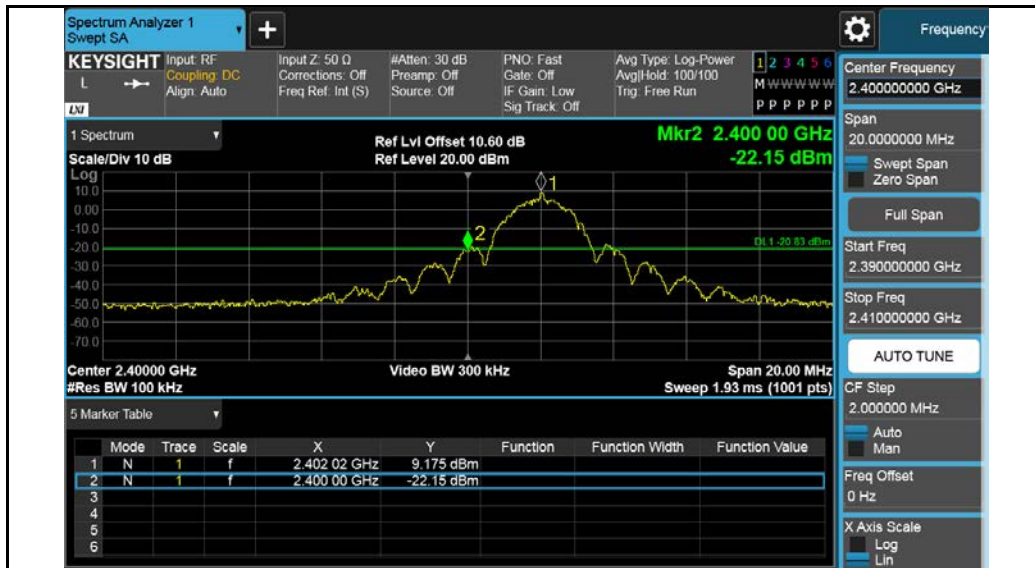

10.6 Peak Spectral Density

Requirement(s):
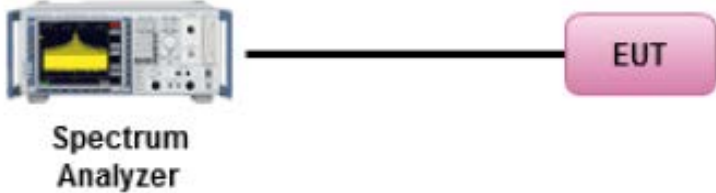
| Spec | Item | Requirement | Applicable |
|-------------------------------|---|---|--|
| § 15.247(e) RSS247 (5.2.2) | e) | DSSS: $\leq 8\text{dBm}/3\text{KHz}$ | <input checked="" type="checkbox"/> |
| | f) | DSSS in hybrid sys with FH turned off: $\leq 8\text{dBm}/3\text{KHz}$ | <input type="checkbox"/> |
| Test Setup |  <p style="text-align: center;">Spectrum Analyzer EUT</p> | | |
| Test Procedure | <p>558074 D01 DTS Meas Guidance v04, 10.2 Method PKPSD (peak PSD)</p> <p><u>Peak spectral density measurement procedure</u></p> <ul style="list-style-type: none"> - Set analyzer center frequency to DTS channel center frequency. - Set the span to 1.5 times the DTS bandwidth. - Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. - Set the VBW $\geq 3 \times \text{RBW}$. - Detector = Peak - Sweep time = auto couple. - Trace mode = Max Hold - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level within the RBW. - If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. | | |
| Test Date | 08/15/2018 | Environmental condition | Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar |
| Remark | N/A | | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail | | |

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test was done by Rachana Khanduri at RF test site.


PSD measurement results:


802.15.4:

| Type | Freq (MHz) | Test mode | CH | Conducted PSD (dBm/3KHz) | Limit (dBm/3KHz) | Result |
|------|------------|-----------|------|--------------------------|------------------|--------|
| PSD | 2402 | Zigbee | Low | 3.39 | 8 | Pass |
| | 2440 | Zigbee | Mid | 2.64 | 8 | Pass |
| | 2480 | Zigbee | High | -16.68 | 8 | Pass |

Test Plots


802.15.4:

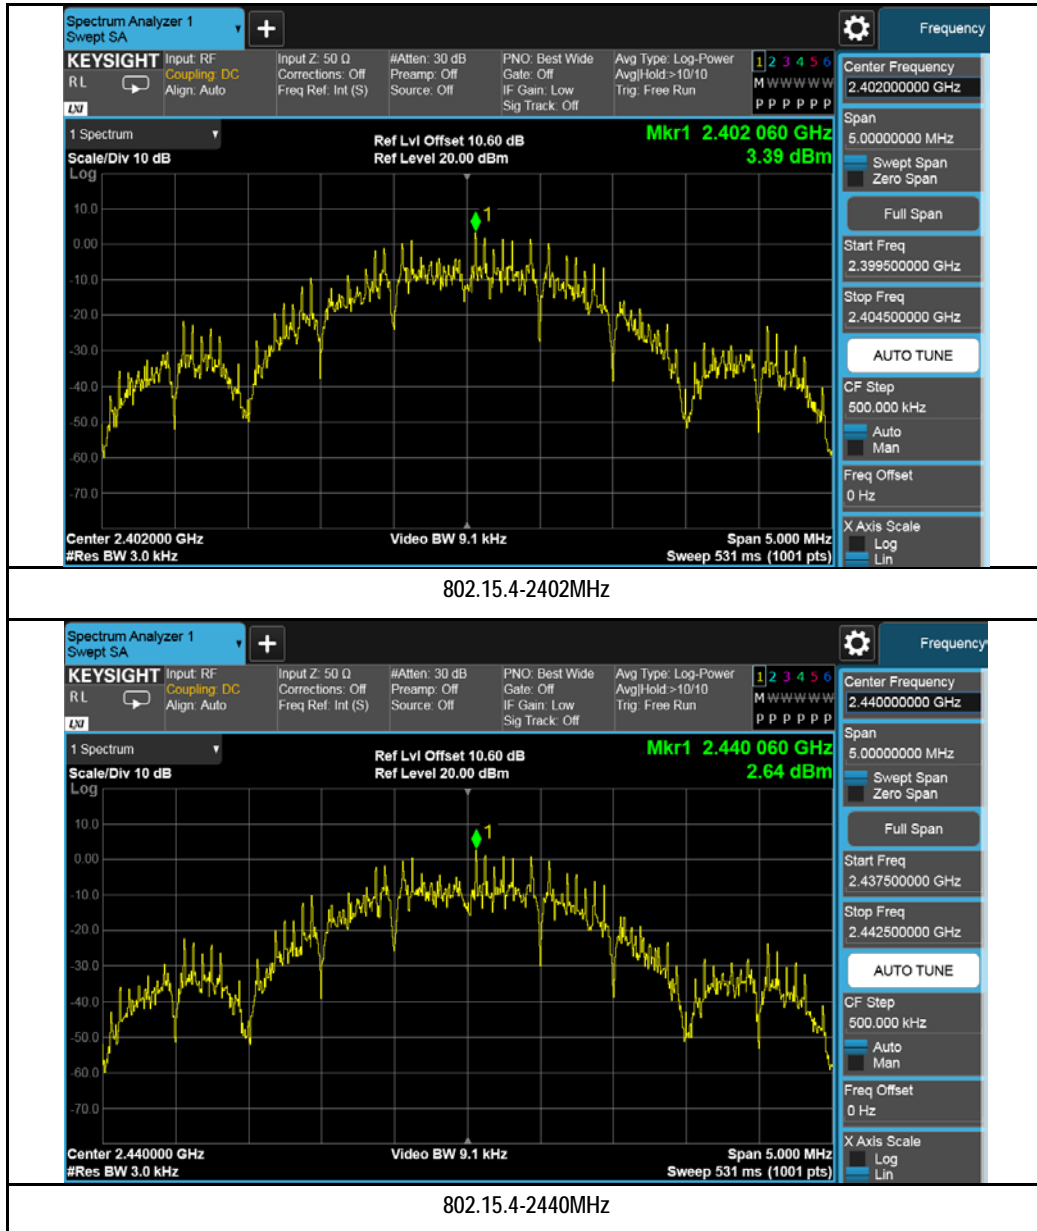

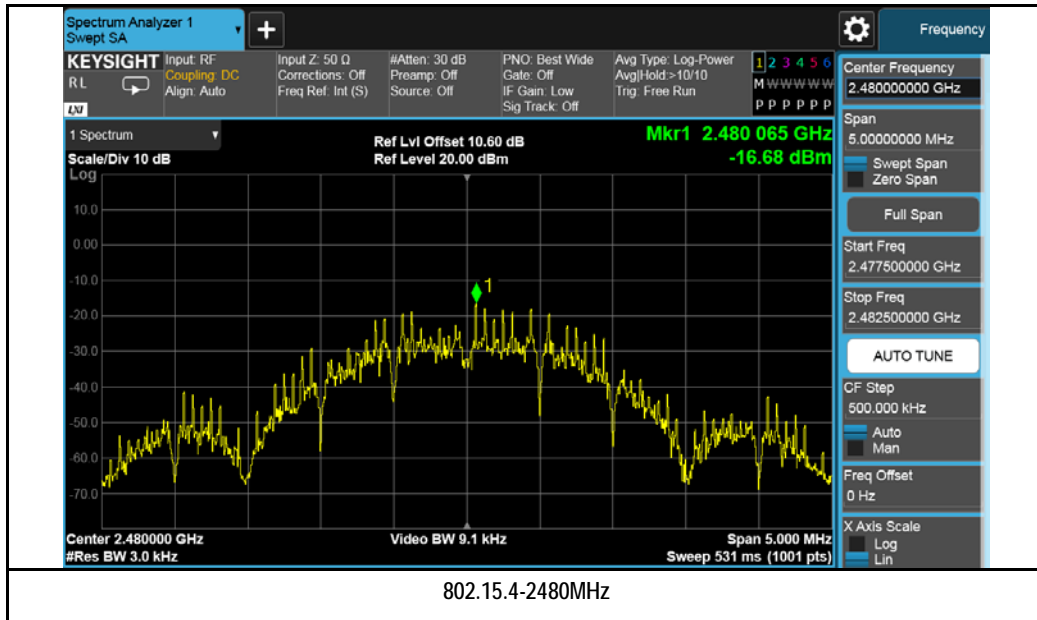

10.7 Radiated Spurious Emissions below 1GHz

Requirement(s):
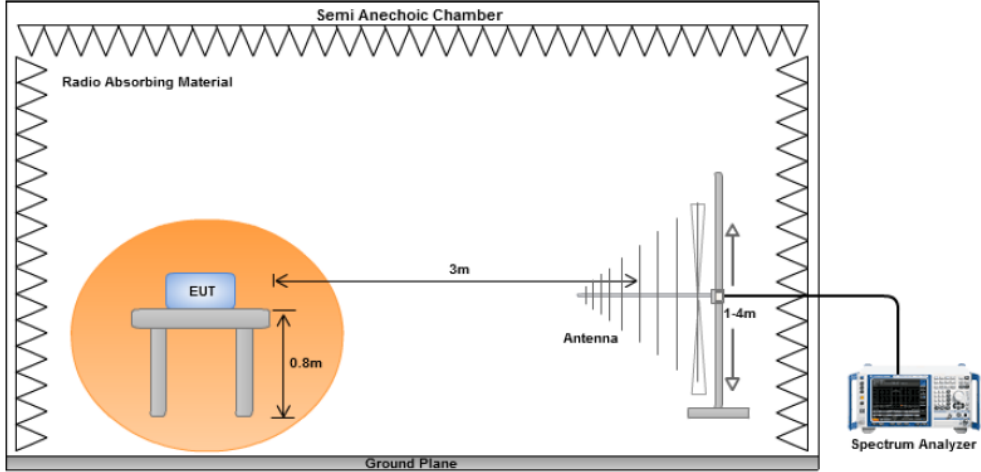
| Spec | Item | Requirement | Applicable | | | | | | | | | | |
|---------------------------------|--|--|-----------------------|-----------------------|---------|-----|----------|-----|---------|-----|-----------|-----|---|
| 47CFR§15.247(d) RSS247 (5.5) | a) | <p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table> | Frequency range (MHz) | Field Strength (uV/m) | 30 – 88 | 100 | 88 – 216 | 150 | 216 960 | 200 | Above 960 | 500 | ☒ |
| Frequency range (MHz) | Field Strength (uV/m) | | | | | | | | | | | | |
| 30 – 88 | 100 | | | | | | | | | | | | |
| 88 – 216 | 150 | | | | | | | | | | | | |
| 216 960 | 200 | | | | | | | | | | | | |
| Above 960 | 500 | | | | | | | | | | | | |
| Test Setup |  | | | | | | | | | | | | |
| Procedure | <ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. A Quasi-peak measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. | | | | | | | | | | | | |
| Remark | The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. | | | | | | | | | | | | |
| Result | ☒ Pass ☐ Fail | | | | | | | | | | | | |


Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by CIPHER at 10m chamber.

Radiated Emission Test Results (Below 1GHz)

| | | | | | |
|---------------------------|---------------------|------|--|--------|------|
| Test specification | Below 1GHz | | | Result | Pass |
| Environmental Conditions: | Temp (°C): | 26.1 | | | |
| | Humidity (%) | 47.5 | | | |
| | Atmospheric (mbar): | 1020 | | | |
| Mains Power: | 110VAC, 60Hz | | | | |
| Tested by: | Cipher | | | | |
| Test Date: | 08/02/2018 | | | | |
| Remarks: | 802.15.4, 2440MHz | | | | |

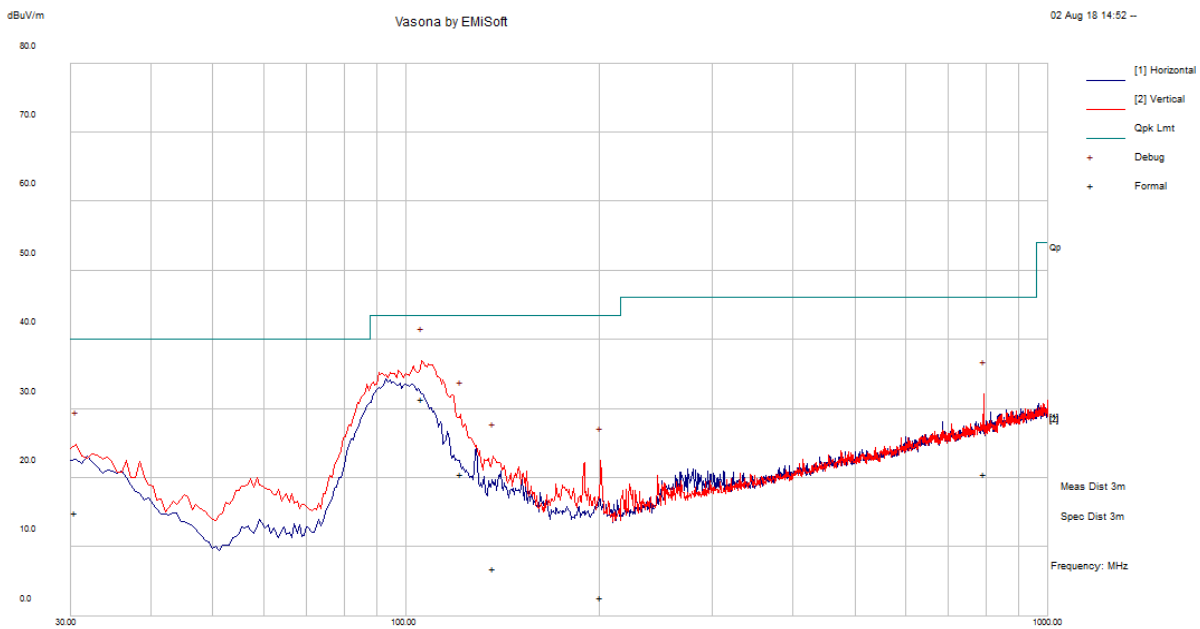


Quasi Max Measurement

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|--------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 105.92 | 43.89 | 11.92 | -24.41 | 31.4 | Quasi Max | V | 104 | 253 | 43.5 | -12.10 | Pass |
| 794.53 | 19.82 | 15.48 | -14.66 | 20.64 | Quasi Max | V | 297 | 303 | 46.0 | -25.36 | Pass |
| 121.56 | 31.36 | 12.08 | -22.89 | 20.56 | Quasi Max | V | 179 | 280 | 43.5 | -22.94 | Pass |
| 30.58 | 17.29 | 11.12 | -13.43 | 14.99 | Quasi Max | V | 201 | 343 | 40.0 | -25.02 | Pass |
| 136.95 | 18.10 | 12.19 | -23.33 | 6.96 | Quasi Max | V | 150 | 254 | 43.5 | -36.54 | Pass |
| 200.92 | 14.41 | 12.63 | -24.37 | 2.67 | Quasi Max | V | 195 | 220 | 43.5 | -40.83 | Pass |

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.8 Radiated Spurious Emissions between 1GHz – 25GHz

Requirement(s):
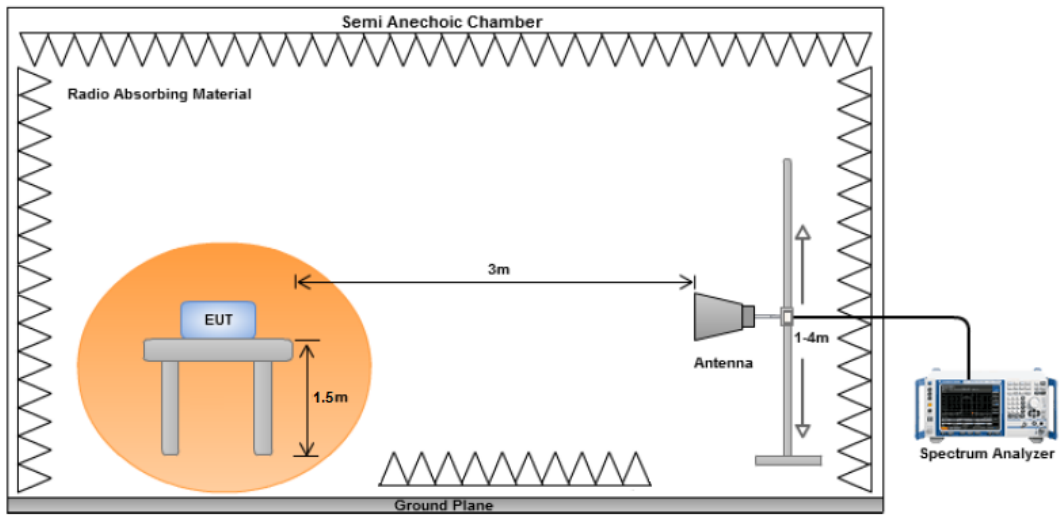
| Spec | Item | Requirement | Applicable |
|----------------------------------|---|---|-------------------------------------|
| 47CFR§15.247(d), RSS247(A8.5) | a) | <p>For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required</p> <p><input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down</p> | <input checked="" type="checkbox"/> |
| Test Setup |  | | |
| Procedure | <ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. An average measurement was then made for that frequency point. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. | | |
| Remark | The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. | | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail | | |


Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A


Test was done by Cipher at 10m chamber.

Restricted Band Measurement Plots:

802.15.4:

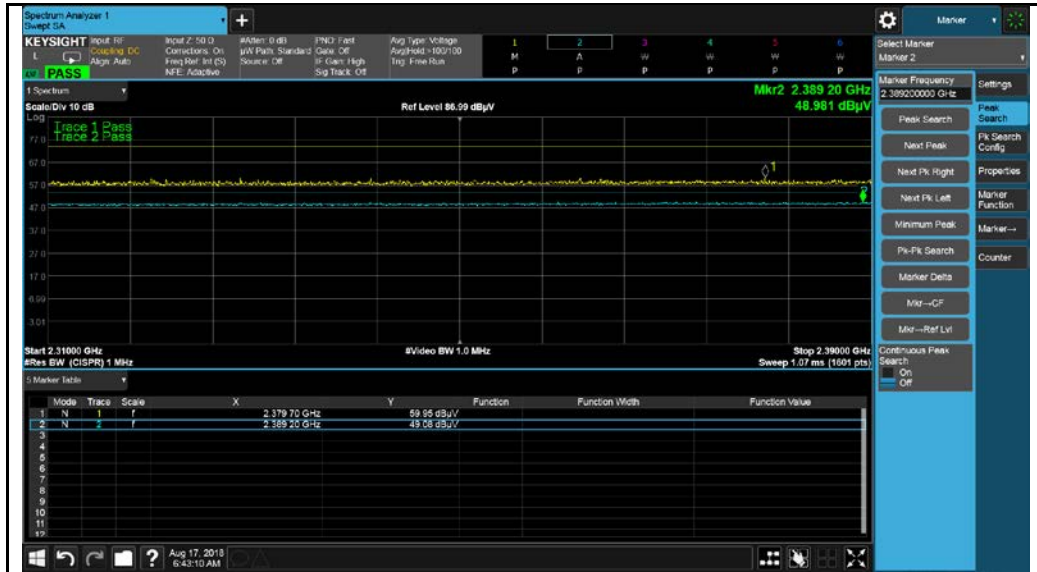

802.15.4-2402MHz

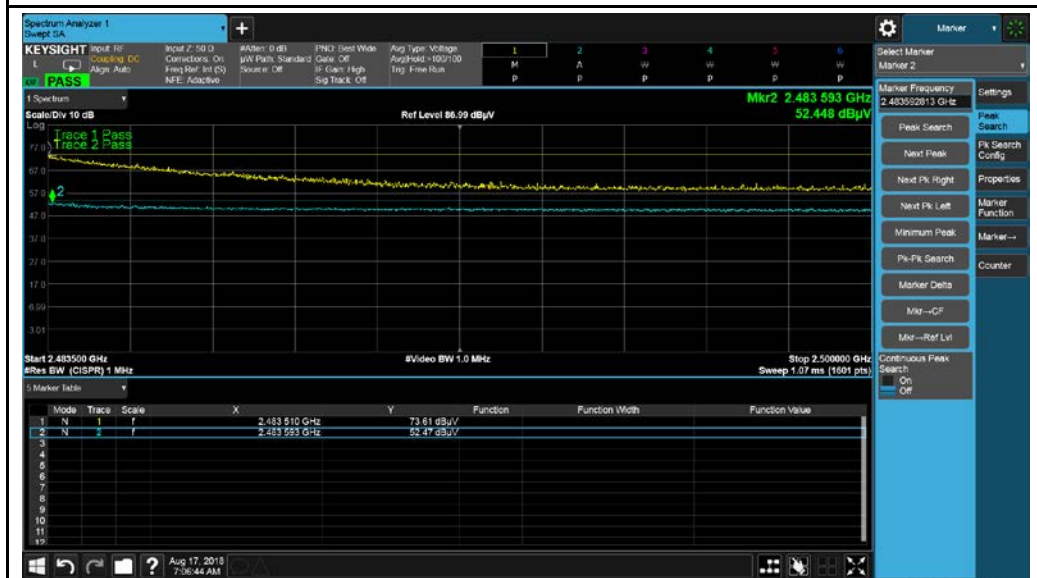

802.15.4-2480MHz

Radiated Emission Test Results (Above 1GHz)

Above 1GHz-25GHz- 802.15.4 - 2402MHz

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|--------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 4804.01 | 67.32 | 4.10 | -10.91 | 60.52 | Peak Max | H | 106 | 92 | 74 | -13.48 | Pass |
| 7204.56 | 63.02 | 5.15 | -7.73 | 60.44 | Peak Max | H | 100 | 160 | 74 | -13.56 | Pass |
| 12007.28 | 44.81 | 6.38 | -2.30 | 48.89 | Peak Max | V | 110 | 204 | 74 | -25.11 | Pass |
| 16128.44 | 39.93 | 7.99 | 0.39 | 48.31 | Peak Max | H | 158 | 64 | 74 | -25.69 | Pass |
| 4804.01 | 50.90 | 4.10 | -10.91 | 44.10 | Average Max | H | 106 | 92 | 54 | -9.90 | Pass |
| 7204.56 | 46.54 | 5.15 | -7.73 | 43.96 | Average Max | H | 100 | 160 | 54 | -10.04 | Pass |
| 12007.28 | 30.04 | 6.38 | -2.30 | 34.12 | Average Max | V | 110 | 204 | 54 | -19.88 | Pass |
| 16128.44 | 28.11 | 7.99 | 0.39 | 36.49 | Average Max | H | 158 | 64 | 54 | -17.51 | Pass |

Above 1GHz-25GHz- 802.15.4 - 2440MHz

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|--------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 4880.04 | 66.05 | 4.18 | -11.03 | 59.19 | Peak Max | H | 101 | 51 | 74 | -14.81 | Pass |
| 7321.55 | 58.12 | 5.15 | -7.66 | 55.61 | Peak Max | H | 103 | 157 | 74 | -18.39 | Pass |
| 12197.28 | 49.12 | 6.48 | -2.12 | 53.49 | Peak Max | H | 100 | 218 | 74 | -20.51 | Pass |
| 14642.96 | 46.00 | 7.34 | -1.13 | 52.21 | Peak Max | H | 101 | 120 | 74 | -21.79 | Pass |
| 4880.04 | 49.67 | 4.18 | -11.03 | 42.81 | Average Max | H | 101 | 51 | 54 | -11.19 | Pass |
| 7321.55 | 40.58 | 5.15 | -7.66 | 38.07 | Average Max | H | 103 | 157 | 54 | -15.93 | Pass |
| 12197.28 | 32.41 | 6.48 | -2.12 | 36.78 | Average Max | H | 100 | 218 | 54 | -17.22 | Pass |
| 14642.96 | 30.33 | 7.34 | -1.13 | 36.54 | Average Max | H | 101 | 120 | 54 | -17.46 | Pass |

















Above 1GHz-25GHz- 802.15.4 - 2480MHz








| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|--------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 4961.20 | 65.81 | 4.25 | -11.16 | 58.9 | Peak Max | H | 102 | 87 | 74 | -15.10 | Pass |
| 7439.99 | 50.37 | 5.14 | -7.58 | 47.93 | Peak Max | H | 113 | 334 | 74 | -26.07 | Pass |
| 12399.86 | 45.43 | 6.53 | -1.65 | 50.31 | Peak Max | V | 153 | 11 | 74 | -23.69 | Pass |
| 16672.22 | 39.68 | 8.06 | 1.77 | 49.52 | Peak Max | H | 101 | 262 | 74 | -24.48 | Pass |
| 4961.20 | 48.54 | 4.25 | -11.16 | 41.63 | Average Max | H | 102 | 87 | 54 | -12.37 | Pass |
| 7439.99 | 34.16 | 5.14 | -7.58 | 31.73 | Average Max | H | 113 | 334 | 54 | -22.28 | Pass |
| 12399.86 | 28.69 | 6.53 | -1.65 | 33.58 | Average Max | V | 153 | 11 | 54 | -20.43 | Pass |
| 16672.22 | 27.85 | 8.06 | 1.77 | 37.69 | Average Max | H | 101 | 262 | 54 | -16.31 | Pass |

Annex A. TEST INSTRUMENT

| Instrument | Model | Serial # | Cal Date | Cal Cycle | Cal Due | In use |
|--------------------------------------|-------------|------------|------------|-----------|------------|-------------------------------------|
| Conducted Emissions | | | | | | |
| R & S Receiver | ESIB 40 | 100179 | 06/08/2018 | 1 Year | 06/08/2019 | <input checked="" type="checkbox"/> |
| CHASE LISN | MN2050B | 1018 | 08/16/2017 | 1 Year | 08/16/2018 | <input checked="" type="checkbox"/> |
| Radiated Emissions | | | | | | |
| Keysight EXA 44GHz Spectrum Analyzer | N9030B(PXA) | MY57140374 | 09/06/2017 | 1 Year | 09/06/2018 | <input checked="" type="checkbox"/> |
| Bi-Log antenna (30MHz~2GHz) | JB1 | A030702 | 03/09/2018 | 2 Year | 03/09/2020 | <input checked="" type="checkbox"/> |
| Horn Antenna (1GHz~26GHz) | 3115 | 100059 | 08/25/2017 | 1 Year | 08/25/2018 | <input checked="" type="checkbox"/> |
| Horn Antenna (26GHz~40GHz) | AH-840 | 101013 | 08/28/2017 | 1 Year | 08/28/2018 | <input checked="" type="checkbox"/> |
| Pre-Amp (30MHz~40GHz) | LPA-6-30 | 11140711 | 02/10/2018 | 1 Year | 02/10/2019 | <input checked="" type="checkbox"/> |
| RF Conducted Measurement | | | | | | |
| Spectrum Analyzer | N9010A | 10SL0180 | 01/18/2018 | 1 Year | 01/18/2019 | <input checked="" type="checkbox"/> |

Annex B. SIEMIC Accreditation

| Accreditations | Document | Scope / Remark |
|---|---|---|
| ISO 17025 (A2LA) |  | Please see the documents for the detailed scope |
| ISO Guide 65 (A2LA) |  | Please see the documents for the detailed scope |
| TCB Designation | | A1, A2, A3, A4, B1, B2, B3, B4, C |
| FCC DoC Accreditation |  | FCC Declaration of Conformity Accreditation |
| FCC Site Registration |  | 3 meter site |
| FCC Site Registration |  | 10 meter site |
| IC Site Registration |  | 3 meter site |
| IC Site Registration |  | 10 meter site |
| EU NB |  | Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025 |
| |  | Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025 |
| Singapore iDA CB(Certification Body) |   | Phase I, Phase II |
| Vietnam MIC CAB Accreditation |  | Please see the document for the detailed scope |
| Hong Kong OFCA |  | (Phase II) OFCA Foreign Certification Body for Radio and Telecom |
| |  | (Phase I) Conformity Assessment Body for Radio and Telecom |
| Industry Canada CAB |  | Radio: Scope A – All Radio Standard Specification in Category I |
| |  | Telecom: CS-03 Part I, II, V, VI, VII, VIII |

| | | |
|---|---|--|
| Japan Recognized Certification Body Designation |  | <p>Radio: A1. Terminal equipment for purpose of calling</p> <p>Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p> |
| Korea CAB Accreditation |  | <p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p>EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p> <p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p> |
| Taiwan NCC CAB Recognition |  | LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08 |
| Taiwan BSMI CAB Recognition |  | CNS 13438 |
| Japan VCCI |  | <p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p> |
| Australia CAB Recognition |  | <p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p> <p>Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p> <p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06, AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p> |
| Australia NATA Recognition |  | AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2 |