



Full

TEST REPORT

No. I15D00090-WLA

For

Client : VSN Technologies Inc. d/b/a VSN Mobil

Production : WCDMA Digital Mobile Phone

Model Name : V.40

Model Number: V1002

FCC ID: 2AA9WV1002

Hardware Version: V01

Software Version: V01

Issued date: 2015-08-26

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn



RF Test Report

Report No.: I15D00090-WLA

Revision Version

Report Number	Revision	Date	Memo
I15D00090-WLA	00	2015-07-30	Initial creation of test report
I15D00090-WLA	01	2015-08-26	Second creation of test report

CONTENTS

1. TEST LABORATORY	5
1.1. TESTING LOCATION	5
1.2. TESTING ENVIRONMENT	5
1.3. PROJECT DATA.....	5
1.4. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
4. REFERENCE DOCUMENTS	8
4.1. REFERENCE DOCUMENTS FOR TESTING	8
5. SUMMARY OF TEST RESULTS	9
5.1. NOTES.....	10
5.2. STATEMENTS.....	10
6. TEST RESULT	11
6.1. MAXIMUM OUTPUT POWER.....	11
6.2. PEAK POWER SPECTRAL DENSITY	13
6.3. OCCUPIED 6DB BANDWIDTH	20
6.4. BAND EDGES COMPLIANCE	27
6.5. TRANSMITTER SPURIOUS EMISSION-CONDUCTED	32
6.6. TRANSMITTER SPURIOUS EMISSION-RADIATED	43
7. TEST EQUIPMENTS AND ANCILLARIES USED FOR TESTS	58



8. TEST ENVIRONMENT.....	59
ANNEX A. DEVIATIONS FROM PRESCRIBED TEST METHODS	60

1. Test Laboratory

1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301

1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	-10/+55°C
Relative Humidity:	20-75%

1.3. Project data


Project Leader:	Wang Yaqiong
Testing Start Date:	2015-06-19
Testing End Date:	2015-07-21

1.4. Signature



Wang Daming

(Prepared this test report)



Liu Jianquan

(Reviewed this test report)



Zheng Zhongbin

Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: VSN Technologies Inc. d/b/a VSN Mobil
Address: 1975 E. Sunrise Blvd. Suite 400, Fort Lauderdale FL
Telephone: 954-609-4912
Postcode: 33304

2.2. Manufacturer Information

Company Name: Mobiwire Mobiles (Ningbo) Co., Ltd
Address: No.999,Dacheng East Road,Fenghua City,Zhejiang
Telephone: +86-0574-59550618
Postcode: 315500

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	WCDMA Digital Mobile Phone
Model name	V.40
WLAN Frequency	2412MHz-2462MHz
WLAN Channel	Channel1-Channel11
WLAN type of modulation	802.11b:DSSS 802.11g/n: OFDM
Extreme Temperature	-10/+55°C
Nominal Voltage	3.8V
Extreme High Voltage	4.2V
Extreme Low Voltage	3.6V

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N08	354044069999967	V01	V01	2015-06-18

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	---	---

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15,Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2014
ANSI 63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz	2013

5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(a)	/	P
Peak Power Spectral Density	15.247(e)	/	P
Occupied 6dB Bandwidth	15.247(d)	/	P
Band Edges Compliance	15.247(b)	/	P
Transmitter Spurious Emission-Conducted	15.247	/	P
Transmitter Spurious Emission-Radiated	15.247,15.209,	/	P
AC Powerline Conducted Emission	15.107,15.207	/	P

Please refer to part 5 for detail.

The measurements are according to Public notice KDB558074 and ANSI C63.4.

Terms used in Verdict column

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

Test Conditions

T _{nom}	Normal temperature
T _{min}	Low Temperature
T _{max}	High Temperature
V _{nom}	Normal Voltage
V _{min}	Low Voltage
V _{max}	High Voltage
H _{nom}	Norm Humidity
A _{nom}	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T _{nom}	22°C
Voltage	V _{nom}	3.8V
Humidity	H _{nom}	32%
Air Pressure	A _{nom}	1010hPa

5.1. Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

The following deviation from, additions to, or exclusions from the test specifications have been made. See section 3.

5.2. Statements

The product name V.40, supporting GSM/GPRS/WCDMA/HSDPA/HSUPA/WLAN/BT/BLE, manufactured by Mobiwire Mobiles (Ningbo) Co., Ltd, is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

6. Test result

6.1. Maximum Output Power

6.1.1 Measurement Limit and method:

Standard	Limit(dBm)
FCC CRF 15.247(b)	< 30

6.1.2 Test procedure

The measurement is according to ANSI C63.10 clause 11.2

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW \geq OBW, VBW \geq 3RBW.
4. Detector : Peak.
5. Trace mode: Max Hold

6.1.3 Measurement Uncertainty:

Measurement Uncertainty	± 0.75 dB
-------------------------	---------------

6.1.4 Maximum Peak Output Power-conducted

Measurement Results:

802.11b/g mode

Mode	Data Rate(Mbps)	Test Result(dBm)		
		2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	1	14.50	15.47	15.17
	2	14.40	/	/
	5.5	14.45	/	/
	11	14.44	/	/
802.11g	6	16.25	/	/
	9	16.25	/	/
	12	16.52	16.33	16.07
	18	15.99	/	/

	24	16.21	/	/
	36	16.44	/	/
	48	16.21	/	/
	54	16.28	/	/

The data rate 5.5Mbps and 12Mbps are selected as worse condition, and the following cases are performed with this condition.

802.11n mode

Mode	Data Rate(Index)	Teat Result(dBm)		
		2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n(20MHz)	MCS0	16.51	/	/
	MCS1	16.60	/	/
	MCS2	16.56	/	/
	MCS3	16.64	/	/
	MCS4	16.60	/	/
	MCS5	16.70	/	/
	MCS6	16.72	/	/
	MCS7	16.93	15.88	15. 29
802.11n(40MHz)	MCS0	15.48	/	/
	MCS1	15.80	/	/
	MCS2	15.83	/	/
	MCS3	15.70	/	/
	MCS4	15.56	/	/
	MCS5	15.94	/	/
	MCS6	16.64	14.98	15.74
	MCS7	16.27	/	/

The data rate MCS6 is selected as worse condition, and the following case are performed with this condition.

**6.1.5 Maximum Average Output Power-conducted
802.11b/g mode**

Mode	Test Result(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	13.09	12.80	13.01
802.11g	10.09	9.61	9.51

802.11n mode

Mode	Test Result(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n(20MHz)	10.88	9.42	9.24
802.11n(40MHz)	10.60	9.95	9.86

Conclusion: PASS**6.2. Peak Power Spectral Density****6.2.1 Measurement Limit:**

Standard	Limit
FCC CFR Part 15.247(e)	< 8dBm/3 KHz

6.2.2 Test procedures

The measurement is according to ANSI C63.10 clause 11.10.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the

RBW.

12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

6.2.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------


6.2.4 Measurement Results:**802.11b/g mode**

Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
802.11b	1	Fig.1	-15.195	P
	6	Fig.2	-15.252	P
	11	Fig.3	-15.392	P
802.11g	1	Fig.4	-15.674	P
	6	Fig.5	-16.627	P
	11	Fig.6	-16.343	P


802.11n mode

Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
802.11n(20MHz)	1	Fig.7	-16.122	P
	6	Fig.8	-16.266	P
	11	Fig.9	-15.771	P
802.11g(40MHz)	3	Fig.10	-14.895	P
	6	Fig.11	-15.234	P
	11	Fig.12	-15.433	P

Conclusion: PASS**Test graphs as below:**

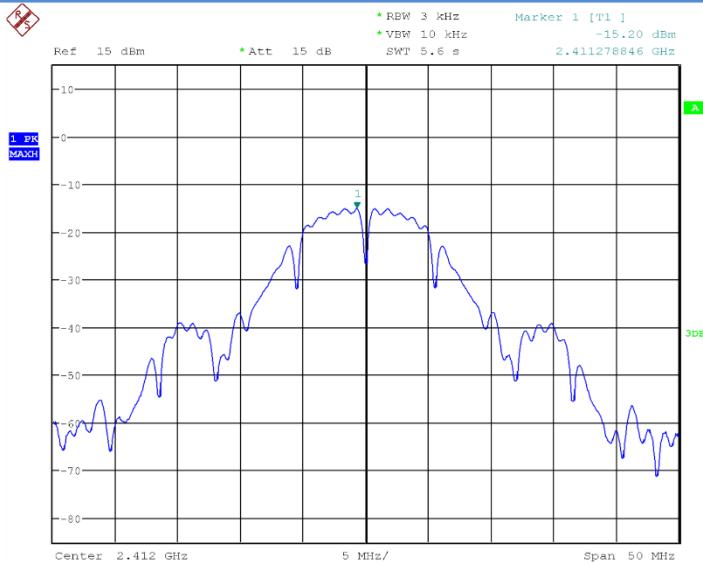


Date: 30.JUN.2015 09:45:40

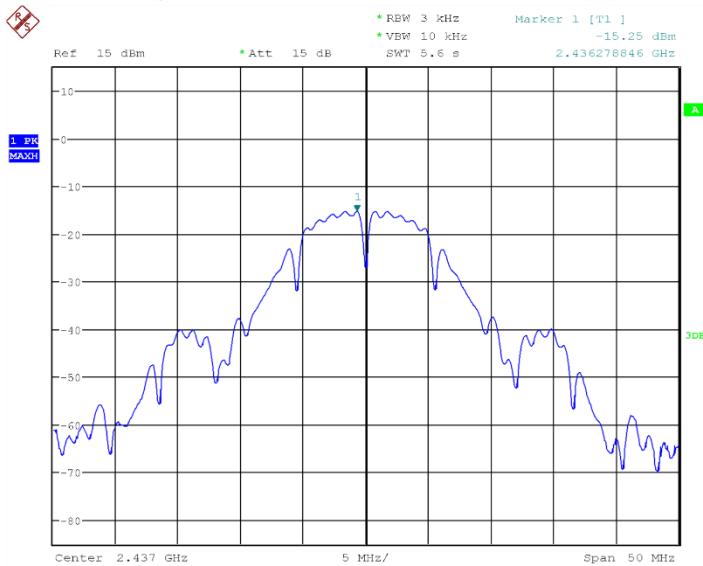
Fig.1 Power Spectral Density (802.1b,Ch1)


Date: 30.JUN.2015 09:46:03

Fig.2 Power Spectral Density (802.1b,Ch6)

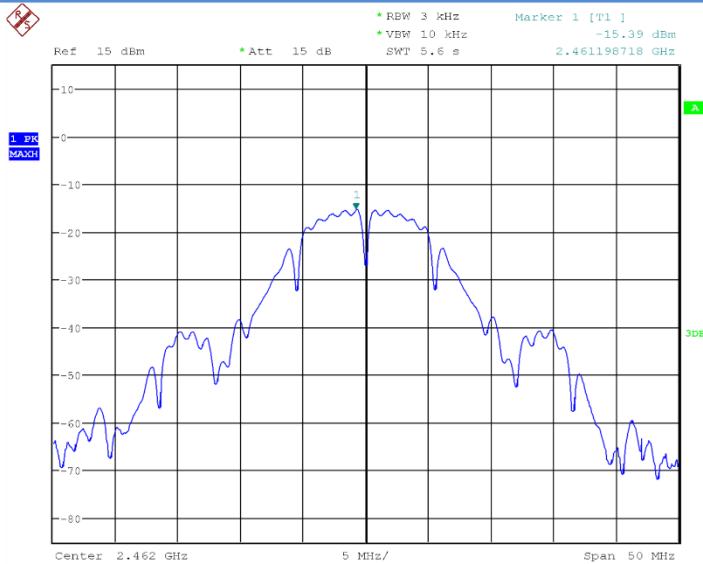


Date: 30.JUN.2015 09:46:28

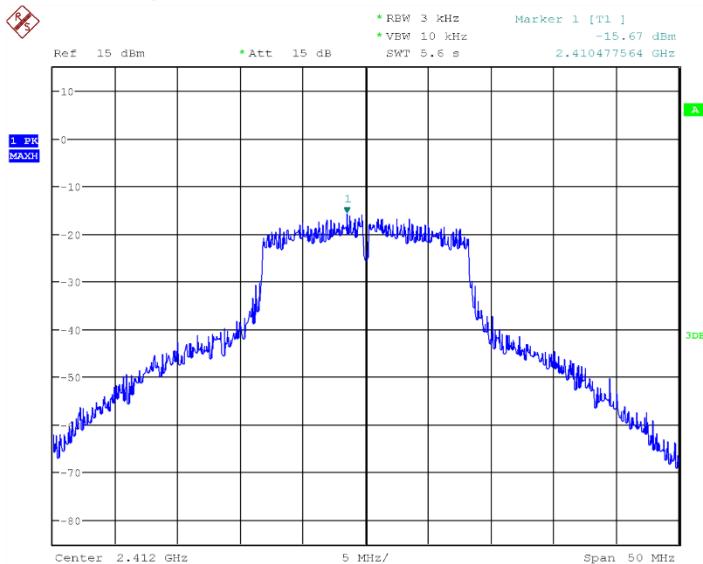
Fig.3 Power Spectral Density (802.1b,Ch11)


Date: 30.JUN.2015 09:47:29

Fig.4 Power Spectral Density (802.1g,Ch1)

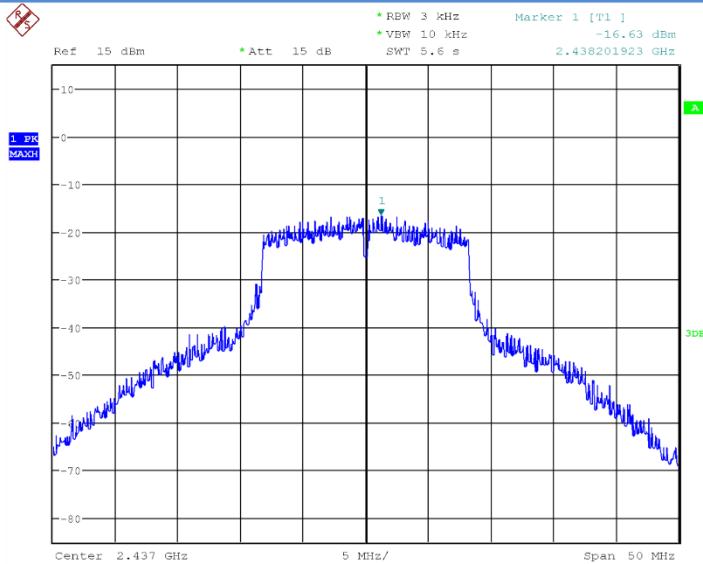


Date: 30.JUN.2015 09:47:51

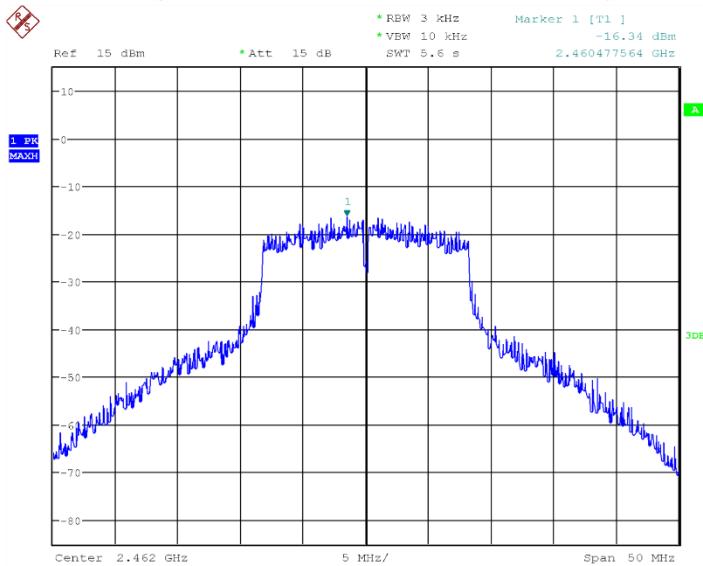
Fig.5 Power Spectral Density (802.1g,Ch6)


Date: 30.JUN.2015 09:48:17

Fig.6 Power Spectral Density (802.1g,Ch11)

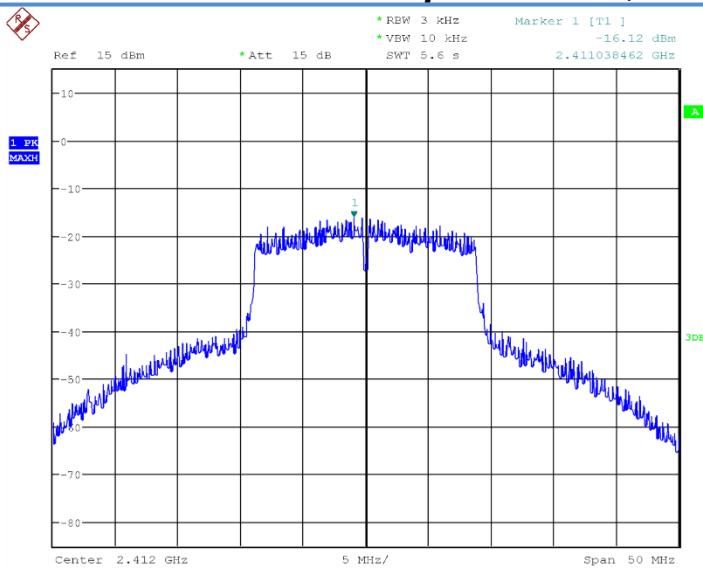


Date: 30.JUN.2015 09:48:56

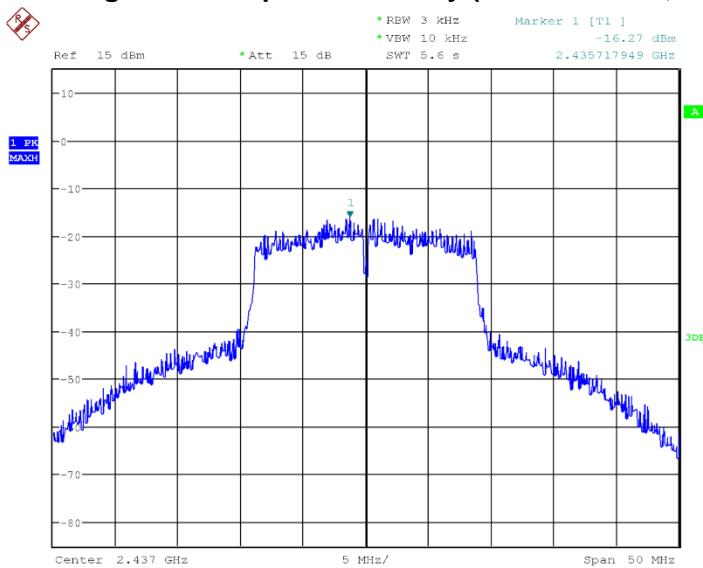
Fig.7 Power Spectral Density (802.1n-20MHz,Ch1)


Date: 30.JUN.2015 09:49:37

Fig.8 Power Spectral Density (802.1n-20MHz,Ch6)

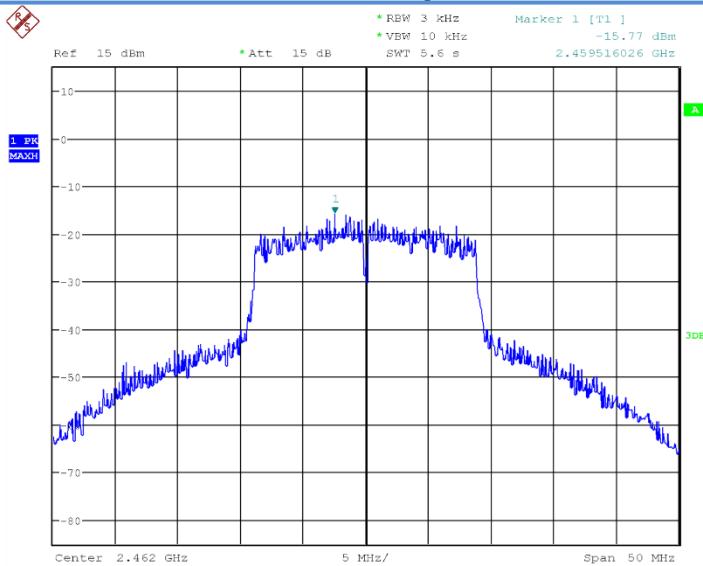


Date: 30.JUN.2015 09:50:20

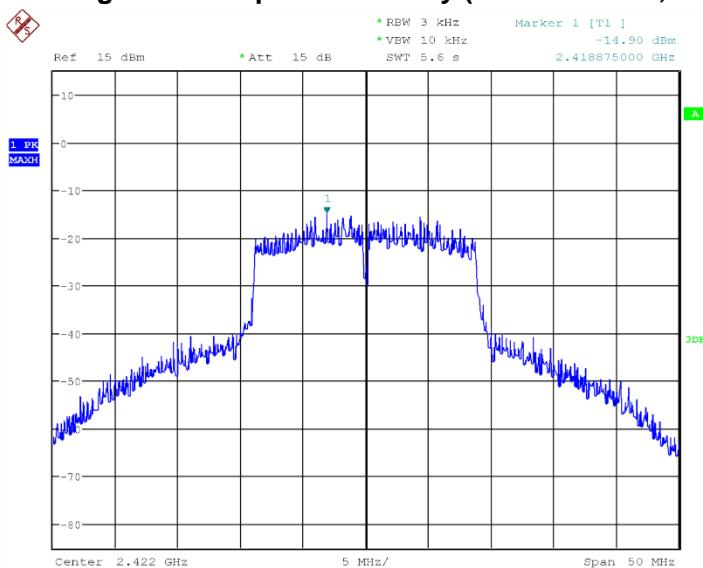
Fig.9 Power Spectral Density (802.1n-20MHz,Ch11)


Date: 30.JUN.2015 09:52:08

Fig.10 Power Spectral Density (802.1n-40MHz,Ch3)

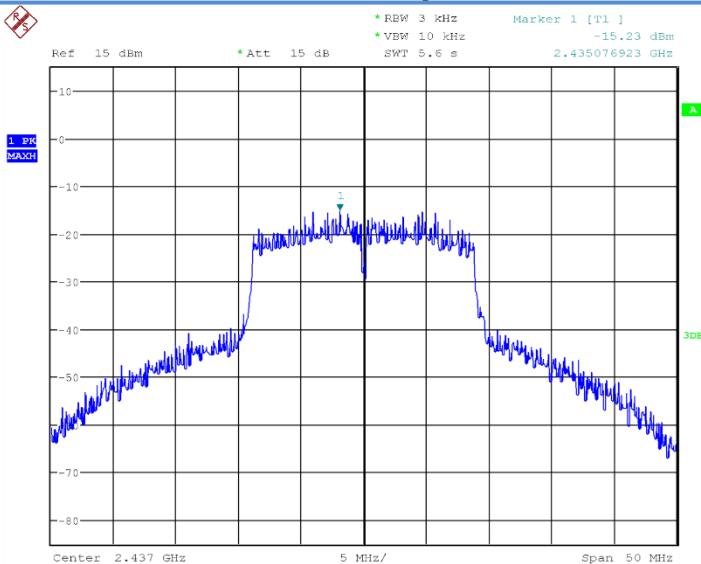

Date: 30.JUN.2015 09:52:32

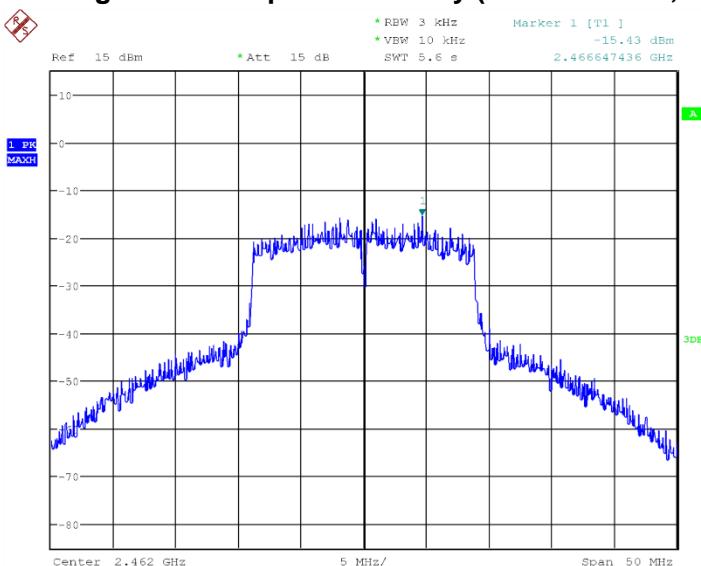Fig.11 Power Spectral Density (802.1n-40MHz,Ch6)


Date: 30.JUN.2015 09:52:59

Fig.12 Power Spectral Density (802.1n-40MHz,Ch11)

6.3. Occupied 6dB Bandwidth

6.3.1 Measurement Limit:

Standard	Limit(KHz)
FCC 47 CFR Part 15.247(a)	≥ 500

6.3.2 Test procedure

The measurement is according to ANSI C63.10 clause 11.8.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4 Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------


6.3.5 Measurement Result:**802.11b/g mode**

Mode	Channel	Occupied 6dB Bandwidth(MHz)		Conclusion
802.11b	1	Fig.13	10.096	P
	6	Fig.14	10.096	P
	11	Fig.15	10.096	P
802.11g	1	Fig.16	16.506	P
	6	Fig.17	16.506	P
	11	Fig.18	16.587	P


802.11n mode

Mode	Channel	Occupied 6dB Bandwidth(MHz)		Conclusion
802.11n(20MHz)	1	Fig.19	17.788	P
	6	Fig.20	17.788	P
	11	Fig.21	17.788	P
802.11n(40MHz)	3	Fig.22	35.256	P

	6	Fig.23	35.256	P
	11	Fig.24	35.256	P

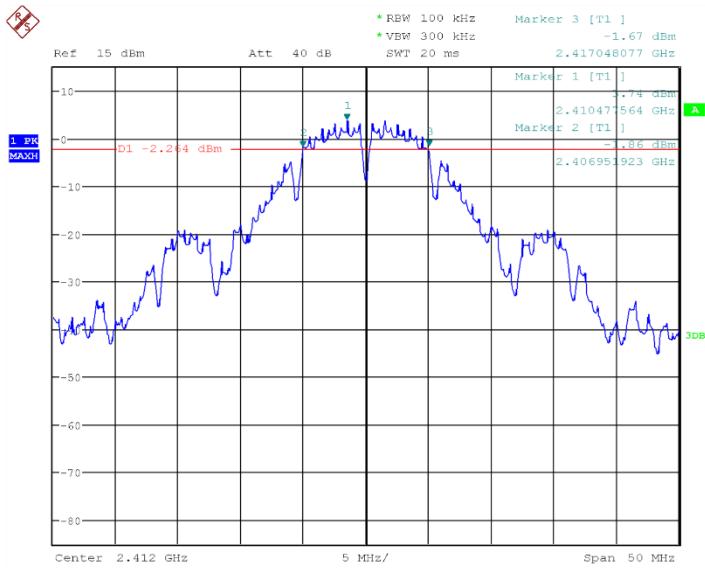
Conclusion: PASS
Test graphs as below:


Date: 30.JUN.2015 09:54:48

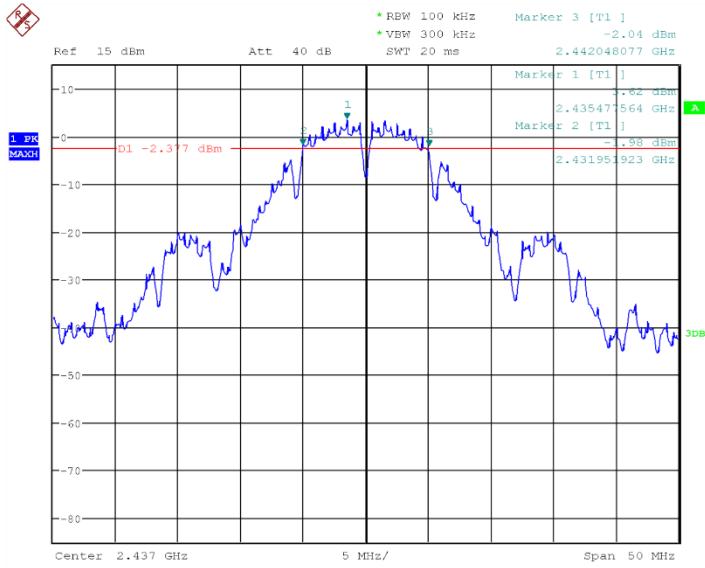
Fig.13 Occupied 6dB Bandwidth (802.11b, Ch1)


Date: 30.JUN.2015 09:56:04

Fig.14 Occupied 6dB Bandwidth (802.11b, Ch6)

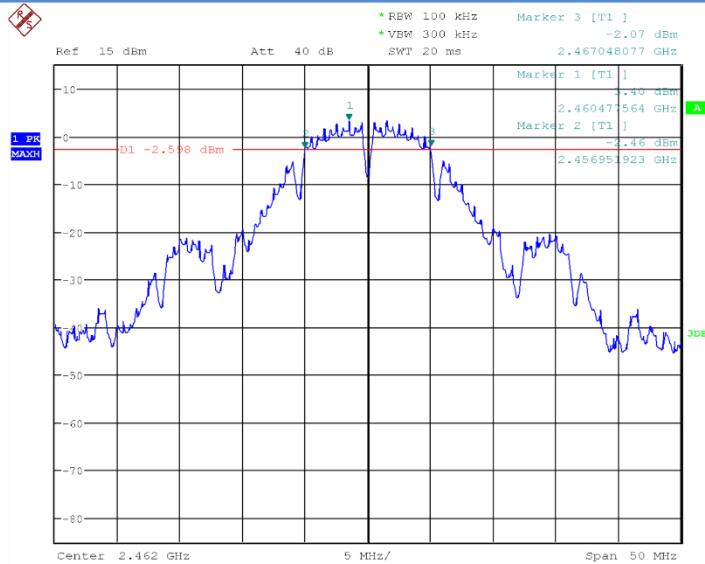


Date: 30.JUN.2015 09:56:54

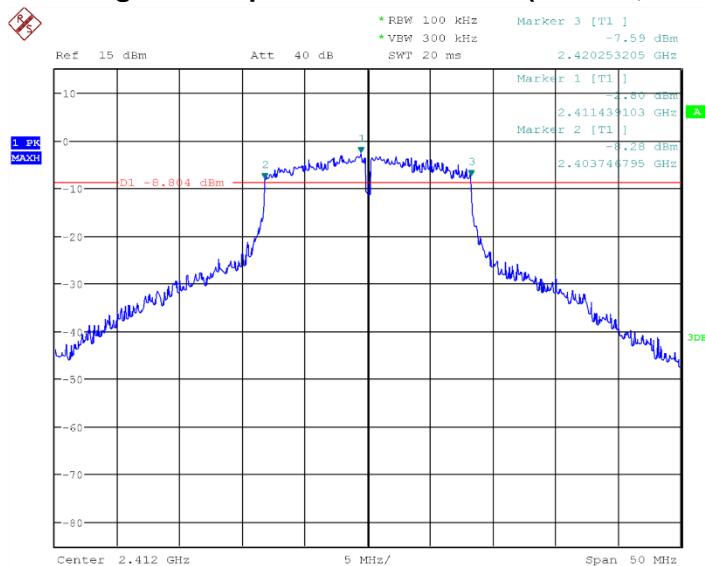
Fig.15 Occupied 6dB Bandwidth (802.11b, Ch11)


Date: 30.JUN.2015 09:57:47

Fig.16 Occupied 6dB Bandwidth (802.11g, Ch1)

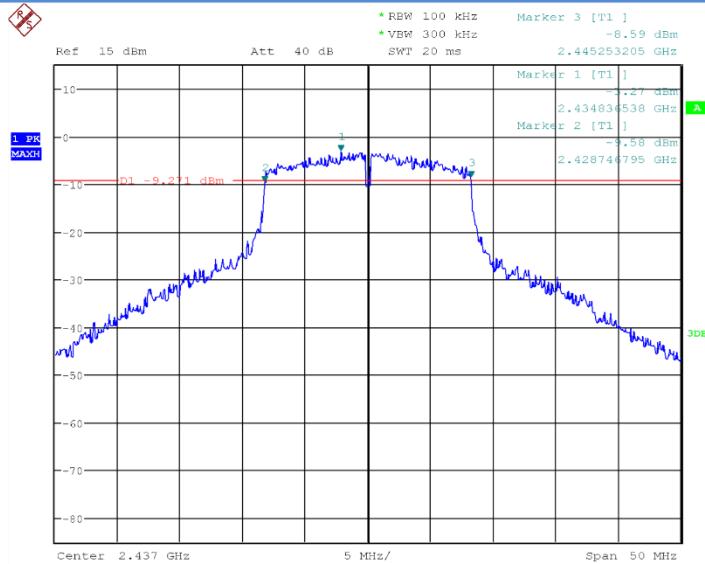


Date: 30.JUN.2015 09:58:50

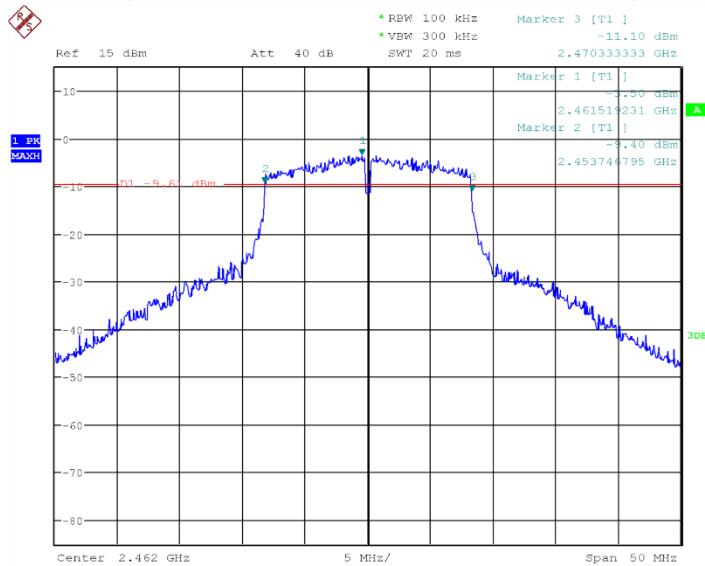
Fig.17 Occupied 6dB Bandwidth (802.11g, Ch6)


Date: 30.JUN.2015 09:59:27

Fig.18 Occupied 6dB Bandwidth (802.11g, Ch11)

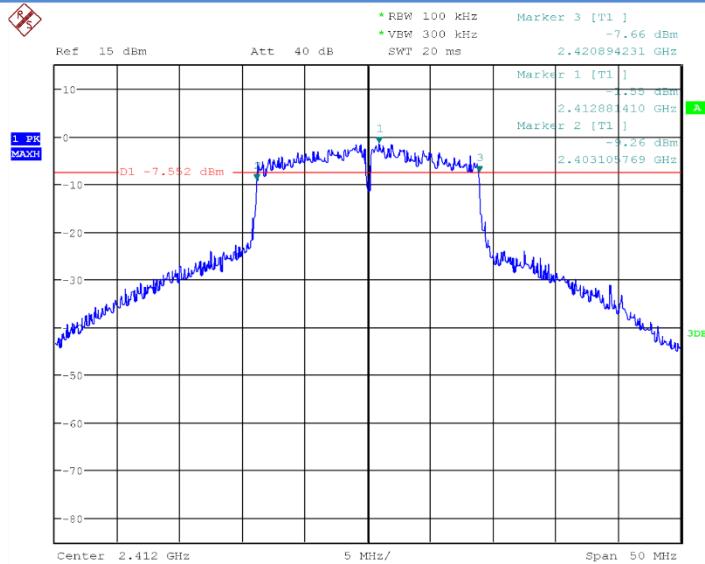


Date: 30.JUN.2015 10:19:29

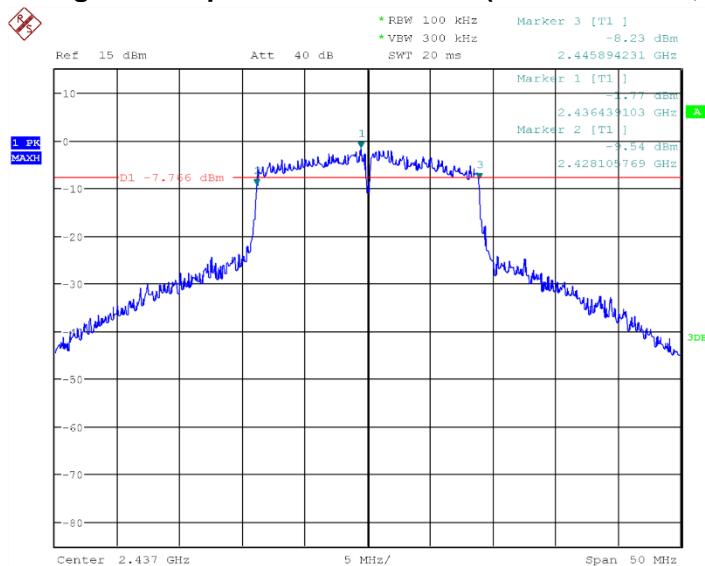
Fig.19 Occupied 6dB Bandwidth (802.11n-20MHz, Ch1)


Date: 30.JUN.2015 10:19:51

Fig.20 Occupied 6dB Bandwidth (802.11n-20MHz, Ch6)

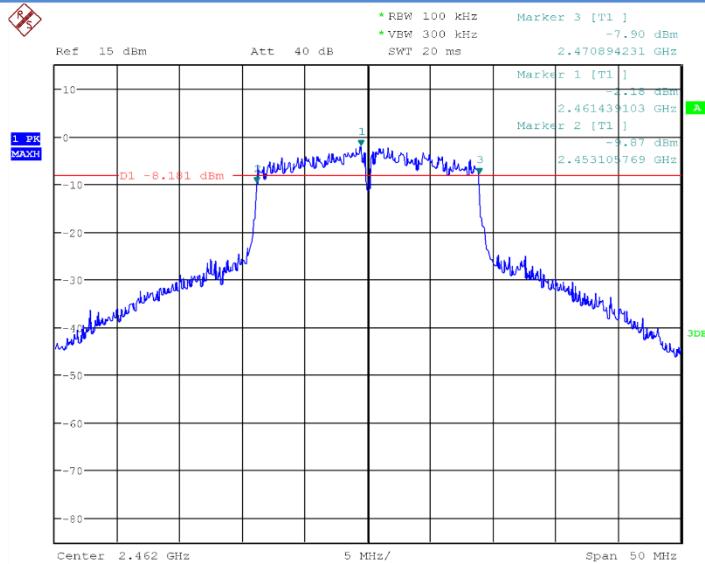


Date: 30.JUN.2015 10:20:50

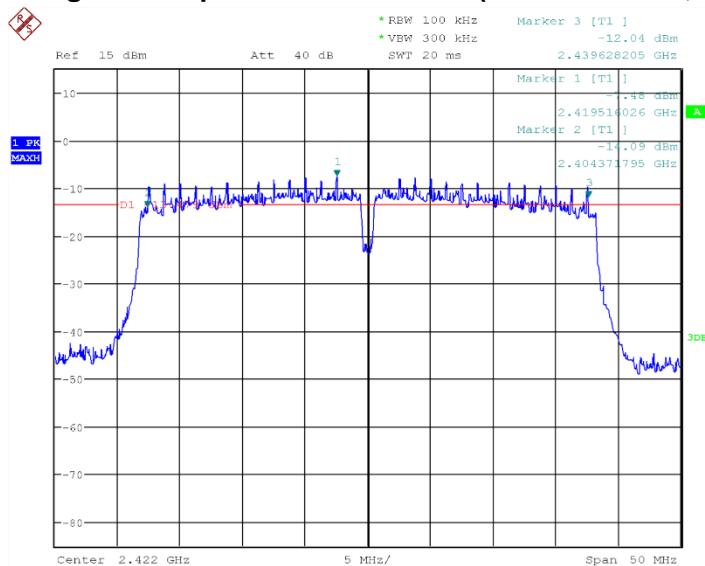
Fig.21 Occupied 6dB Bandwidth (802.11n-20MHz, Ch11)


Date: 30.JUN.2015 10:30:14

Fig.22 Occupied 6dB Bandwidth (802.11n-40MHz, Ch3)

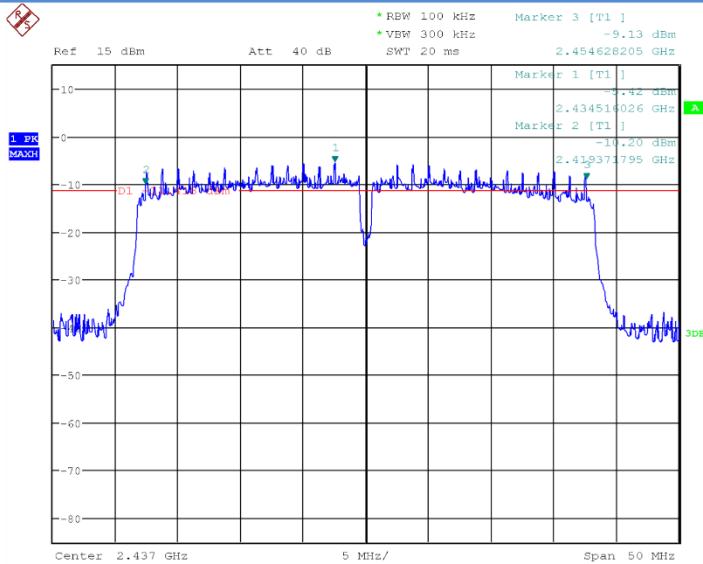

Date: 30.JUN.2015 10:30:38

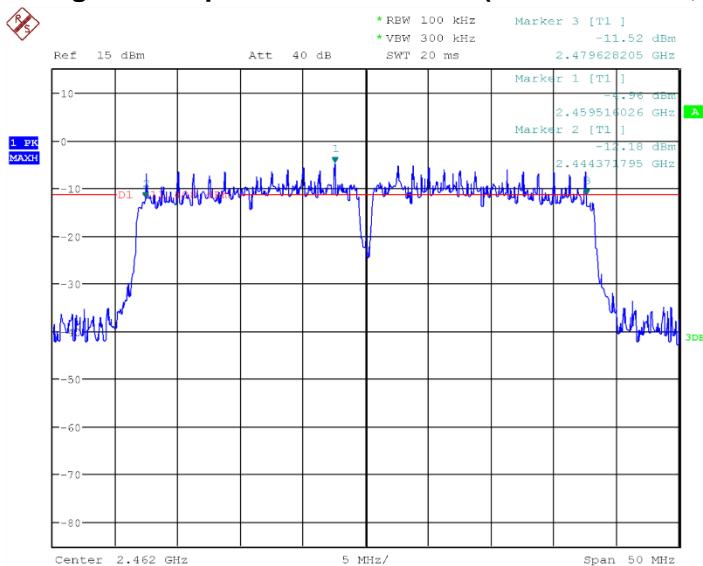Fig.23 Occupied 6dB Bandwidth (802.11n-40MHz, Ch6)


Date: 30.JUN.2015 10:31:11

Fig.24 Occupied 6dB Bandwidth (802.11n-40MHz, Ch11)

6.4. Band Edges Compliance

6.4.1 Measurement Limit:

Standard	Limited(dBc)
FCC 47 CFR Part 15.247(d)	>20

6.4.2 Test procedures

The measurement is according to ANSI C63.10 clause11.13.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set instrument center frequency to the frequency of the emission to be measured (must be within 2MHz of the authorized band edge).
4. Set span to 2 MHz.
5. RBW = 100 kHz.
6. VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto.
9. Trace mode = max hold.
10. Allow sweep to continue until the trace stabilizes

6.4.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

6.4.4 Measurement results

802.11b/g mode


Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.25	P
	11	Fig.26	P
802.11g	1	Fig.27	P
	11	Fig.28	P

802.11n mode


Mode	Channel	Test Results	Conclusion
802.11n(20MHz)	1	Fig.29	P
	11	Fig.30	P
802.11(40MHz)	3	Fig.31	P
	11	Fig.32	P

Conclusion: PASS

Test graphs as blew:

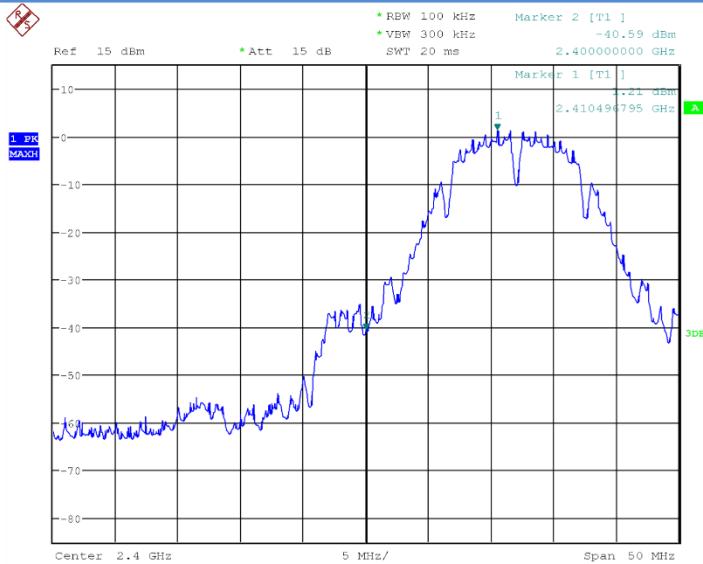


Date: 30.JUN.2015 13:00:53

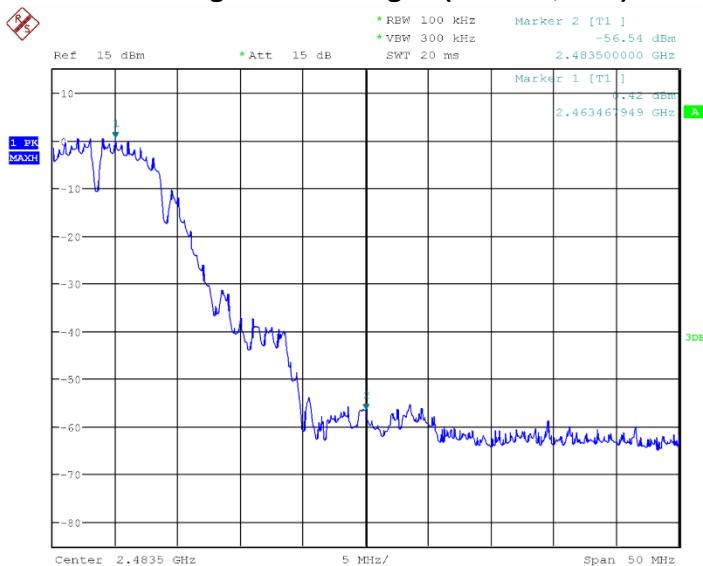
Fig.25 Band Edges (802.11b, Ch1)


Date: 30.JUN.2015 13:02:17

Fig.26 Band Edges (802.11b, Ch11)

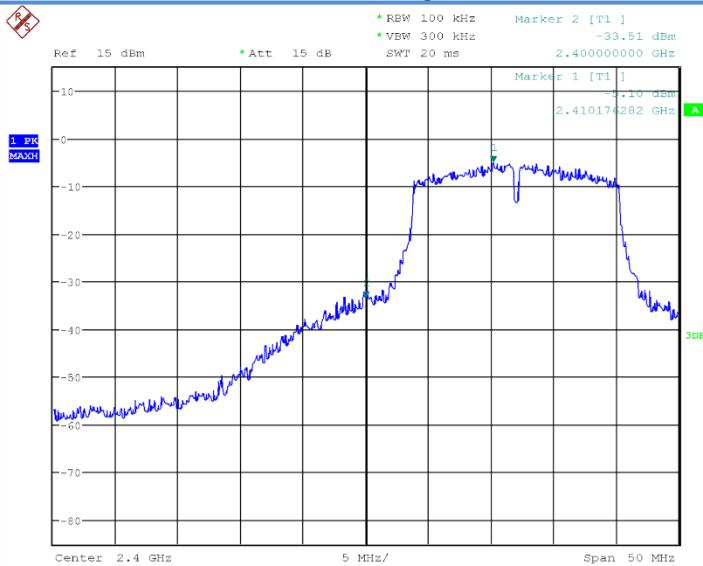


Date: 30.JUN.2015 13:02:45

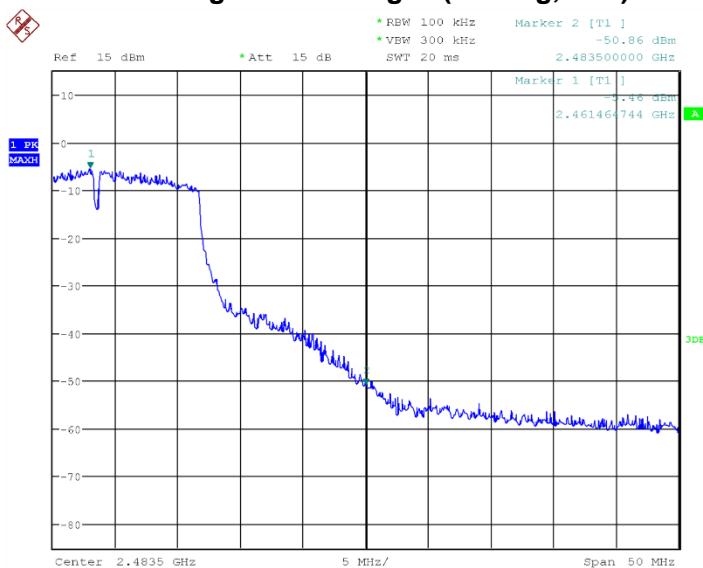
Fig.27 Band Edges (802.11g, Ch1)


Date: 30.JUN.2015 13:03:25

Fig.28 Band Edges (802.11g, Ch11)

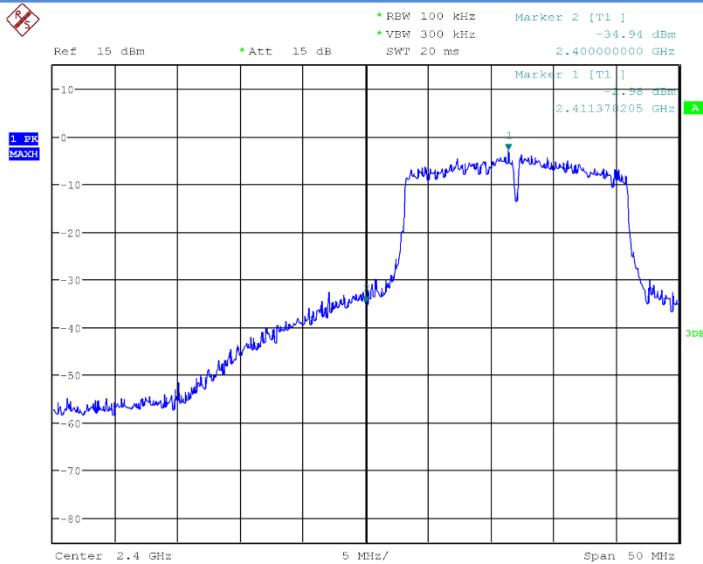


Date: 30.JUN.2015 13:03:51

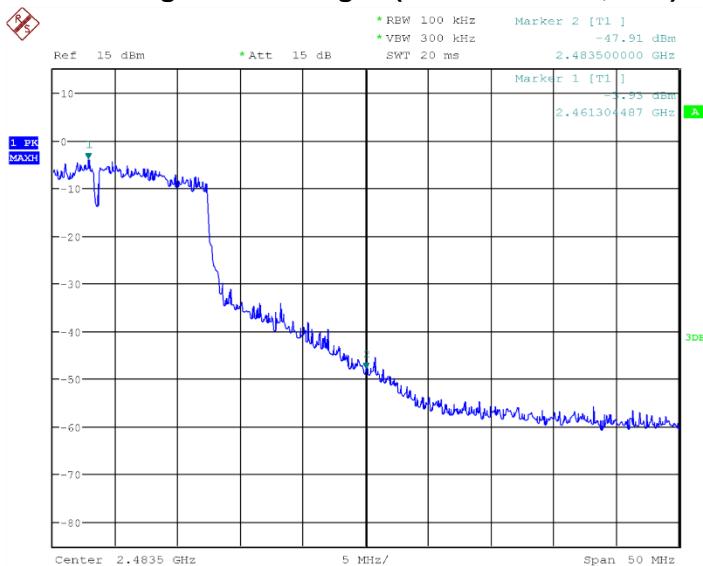
Fig.29 Band Edges (802.11n-20MHz, Ch1)


Date: 30.JUN.2015 13:04:26

Fig.30 Band Edges (802.11n-20MHz, Ch11)

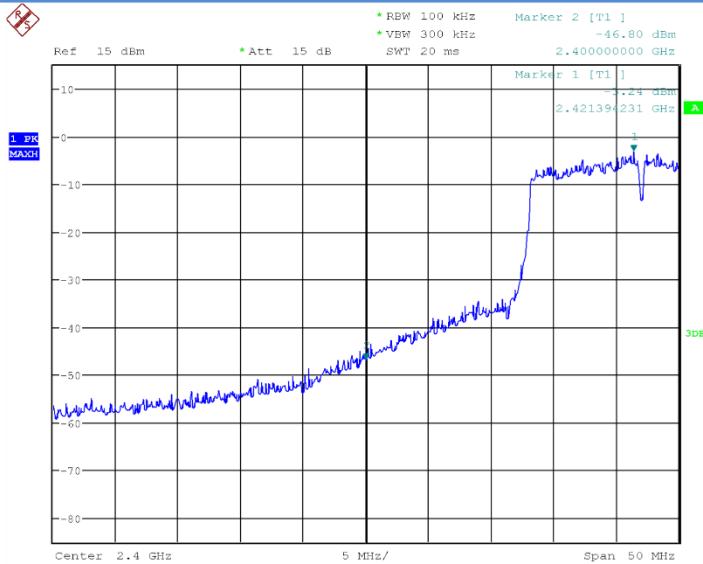

Date: 30.JUN.2015 14:18:12

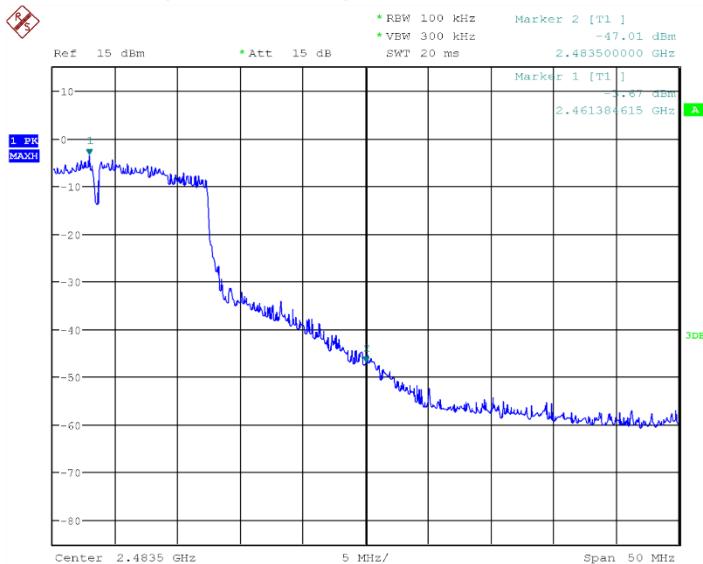Fig.31 Band Edges (802.11n-40MHz, Ch3)


Date: 30.JUN.2015 14:18:38

Fig.32 Band Edges (802.11n-40MHz, Ch11)

6.5. Transmitter Spurious Emission-conducted

6.5.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(d)	20dB below peak output power in 100KHz bandwidth

6.5.2 Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.

Reference level measurement

3. Set instrument center frequency to DTS channel center frequency.
4. Set the span to ≥ 1.5 times the DTS bandwidth.
5. Set the RBW = 100 kHz.
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.

11. Use the peak marker function to determine the maximum PSD level.

Emission level measurement

12. Set the center frequency and span to encompass frequency range to be measured.
13. Set the RBW = 100 kHz.
14. Set the VBW $\geq [3 \times \text{RBW}]$.
15. Detector = peak.
16. Sweep time = auto couple.
17. Trace mode = max hold.
18. Allow trace to fully stabilize.
19. Use the peak marker function to determine the maximum amplitude level.

6.5.3 Measurement Uncertainty:

Frequency Range	Uncertainty
30MHz $\leq f \leq$ 2GHz	0.63
2GHz $\leq f \leq$ 3.6GHz	0.82
3.6GHz $\leq f \leq$ 8GHz	1.55
8GHz $\leq f \leq$ 20GHz	1.86
20GHz $\leq f \leq$ 22GHz	1.90
22GHz $\leq f \leq$ 26GHz	2.20

6.5.4 Measurement Result:

802.11b/g mode


Mode	Channel	Frequency Range	Test Results	Conclusion

802.11b	1	2.412GHz	Fig.33	P
		30MHz~26GHz	Fig.34	P
	6	2.437GHz	Fig.35	P
		30MHz~26GHz	Fig.36	P
	11	2.472GHz	Fig.37	P
		30MHz~26GHz	Fig.38	P
	1	2.412GHz	Fig.39	P
		30MHz~26GHz	Fig.40	P
802.11g	6	2.437GHz	Fig.41	P
		30MHz~26GHz	Fig.42	P
	11	2.472GHz	Fig.43	P
		30MHz~26GHz	Fig.44	P


802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	1	2.412GHz	Fig.45	P
		30MHz~26GHz	Fig.46	P
	6	2.437GHz	Fig.47	P
		30MHz~26GHz	Fig.48	P
	11	2.472GHz	Fig.49	P
		30MHz~26GHz	Fig.50	P

Conclusion: PASS
Test graphs as below:

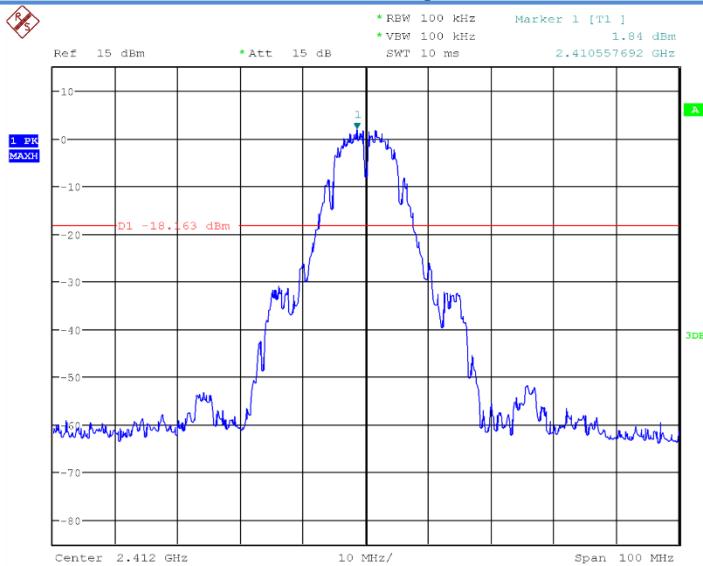


Date: 30.JUN.2015 13:07:23

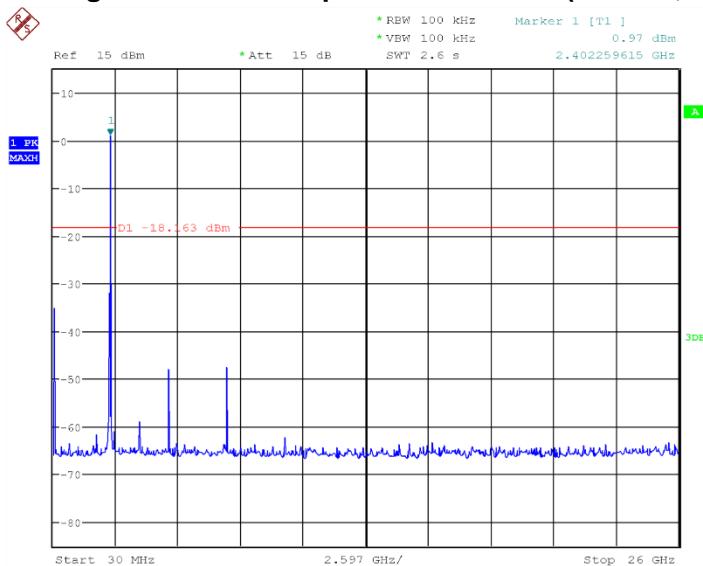
Fig.51 Conducted Spurious Emission (802.11b, Ch1)


Date: 30.JUN.2015 13:07:44

Fig.52 Conducted Spurious Emission (802.11b, Ch1, 30MHz~26GHz)

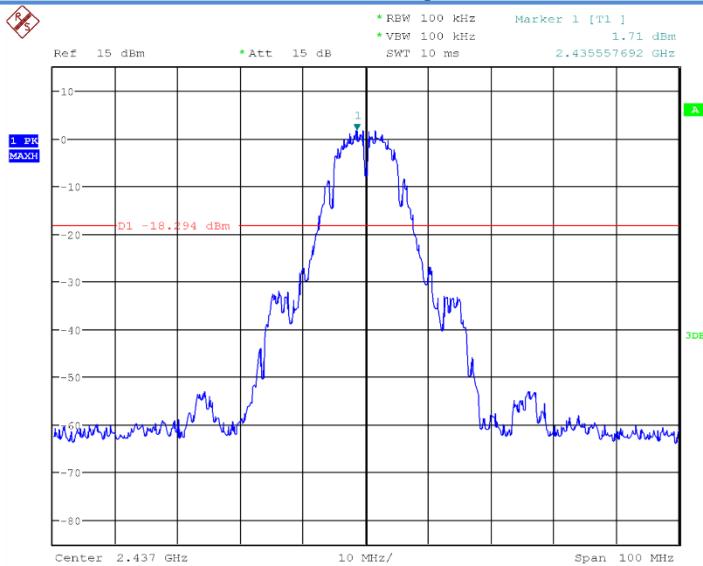


Date: 30.JUN.2015 13:08:36

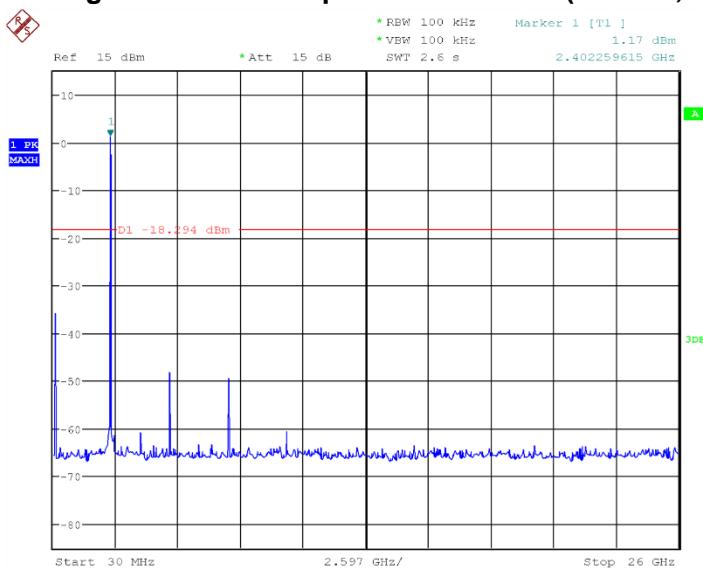
Fig.53 Conducted Spurious Emission (802.11b, Ch6)


Date: 30.JUN.2015 13:08:57

Fig.54 Conducted Spurious Emission (802.11b, Ch6, 30MHz~26GHz)

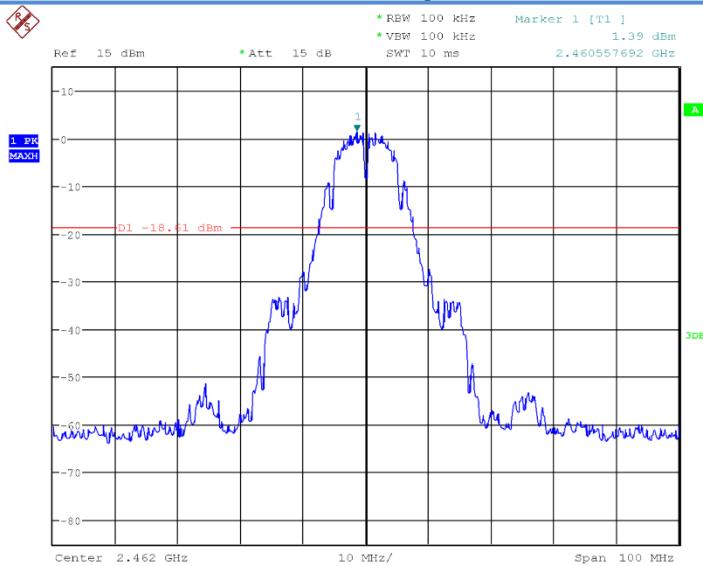


Date: 30.JUN.2015 13:09:50

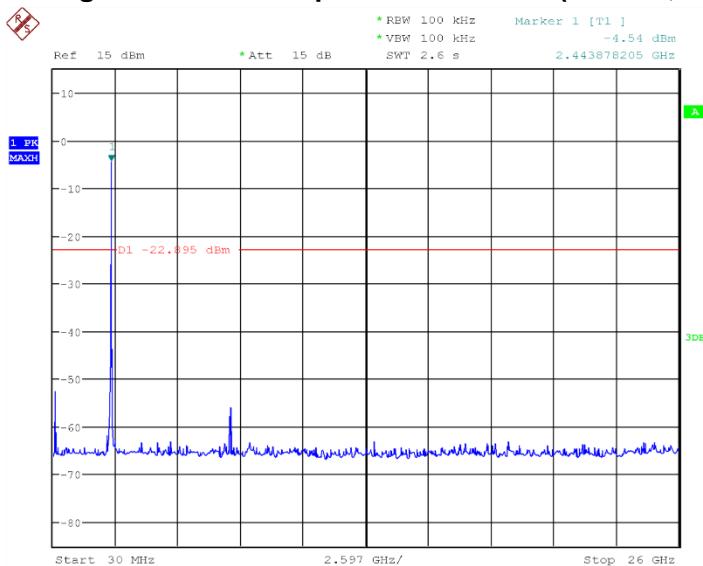
Fig.55 Conducted Spurious Emission (802.11b, Ch11)


Date: 30.JUN.2015 13:21:35

Fig.56 Conducted Spurious Emission (802.11b, Ch11, 30MHz~26GHz)

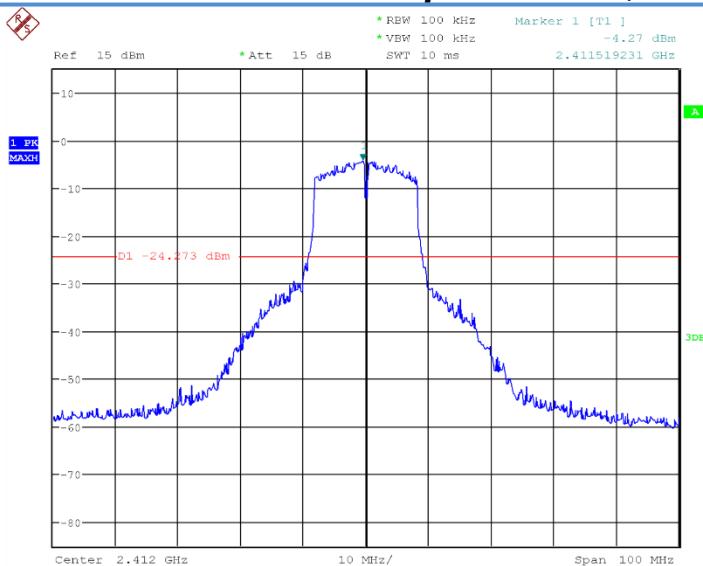


Date: 30.JUN.2015 13:12:45

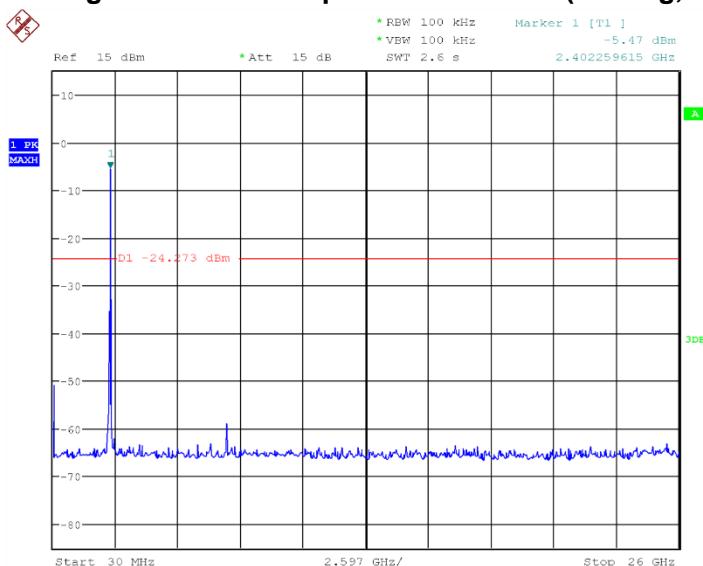
Fig.57 Conducted Spurious Emission (802.11g, Ch1)


Date: 30.JUN.2015 13:13:05

Fig.58 Conducted Spurious Emission (802.11g, Ch1, 30MHz~26GHz)

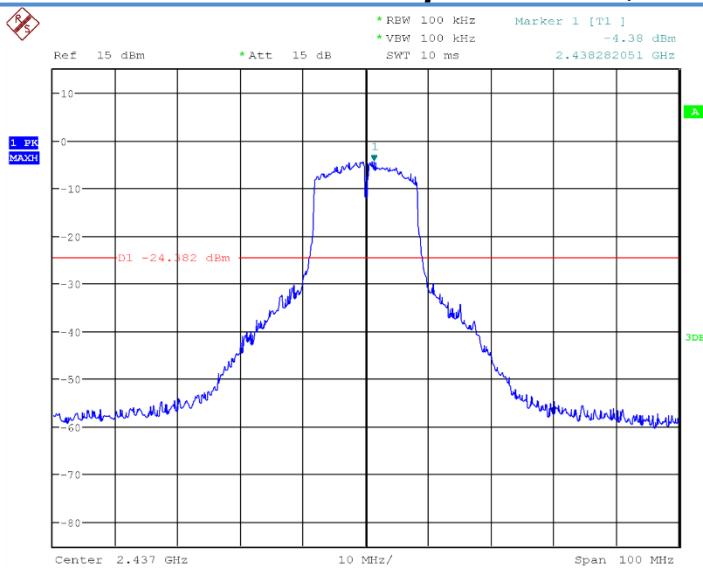


Date: 30.JUN.2015 13:15:09

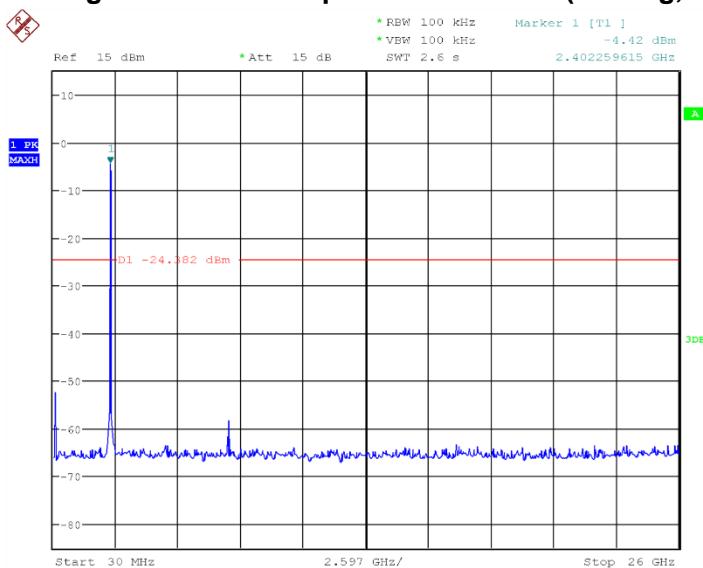Fig.59 Conducted Spurious Emission (802.11g, Ch6)


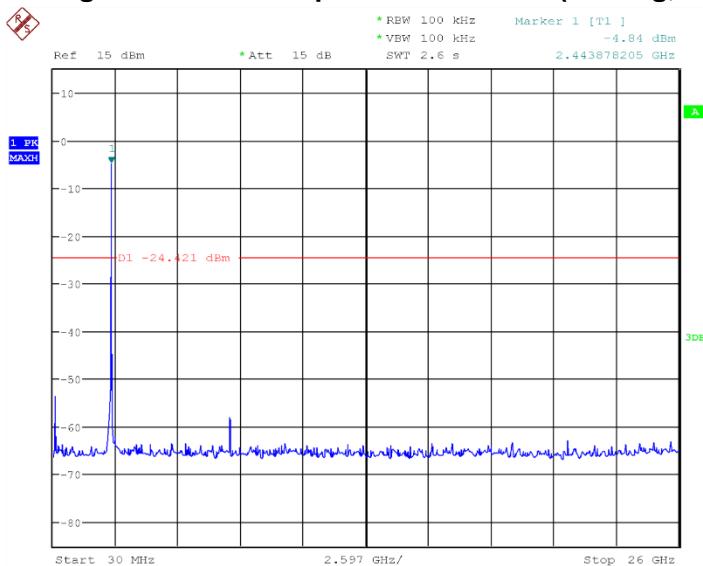
Date: 30.JUN.2015 13:15:30

Fig.60 Conducted Spurious Emission (802.11g, Ch6, 30MHz~26GHz)

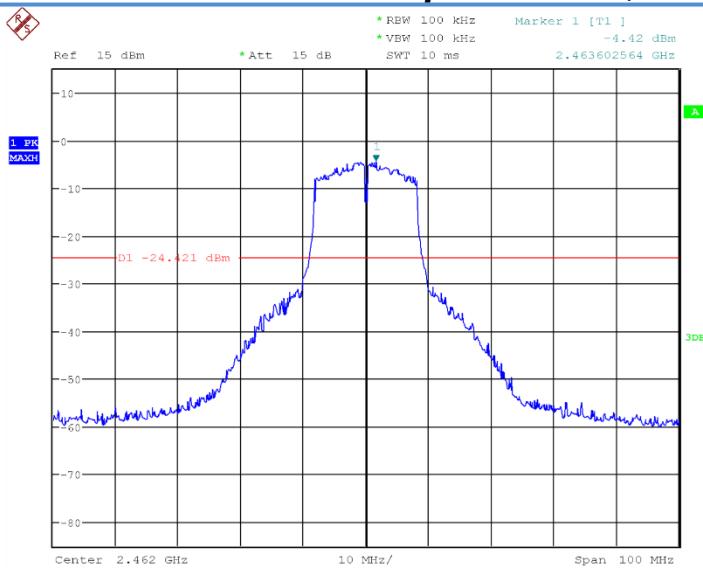


Date: 30.JUN.2015 13:16:23

Fig.61 Conducted Spurious Emission (802.11g, Ch11)




Date: 30.JUN.2015 13:16:44

Fig.62 Conducted Spurious Emission (802.11g, Ch11, 30MHz~26GHz)

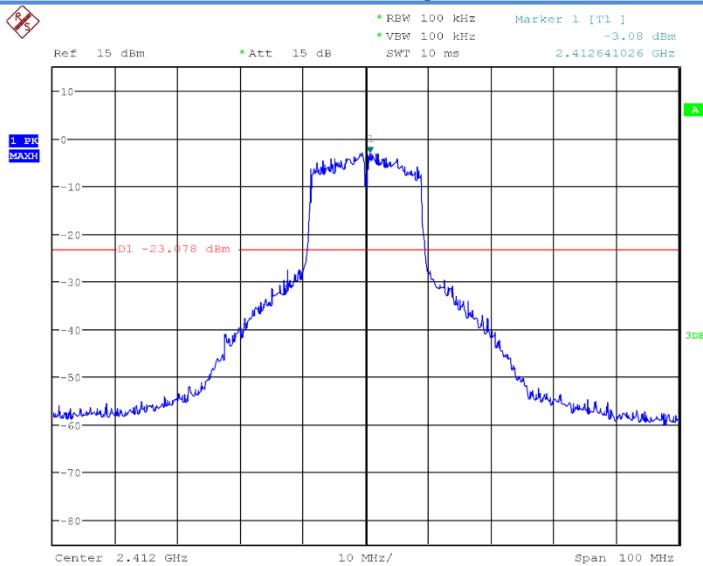


Date: 30.JUN.2015 13:18:55

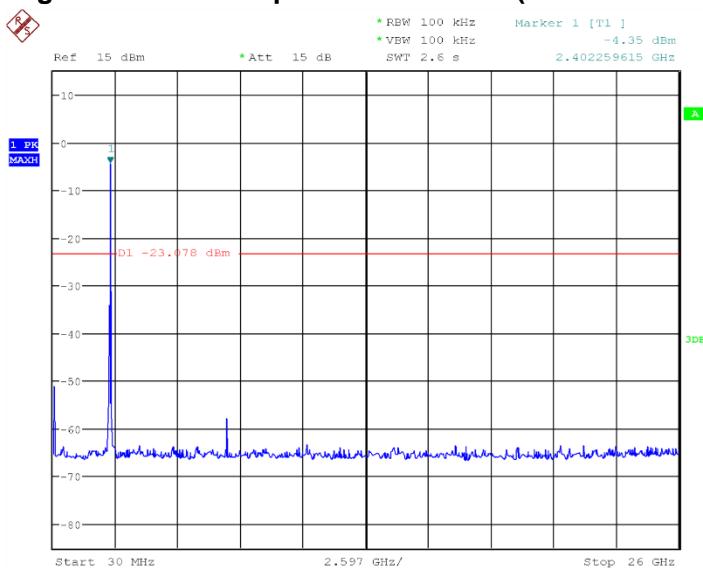
Fig.63 Conducted Spurious Emission (802.11n-20MHz, Ch1)


Date: 30.JUN.2015 13:19:16

Fig.64 Conducted Spurious Emission (802.11n-20MHz, Ch1, 30MHz~26GHz)

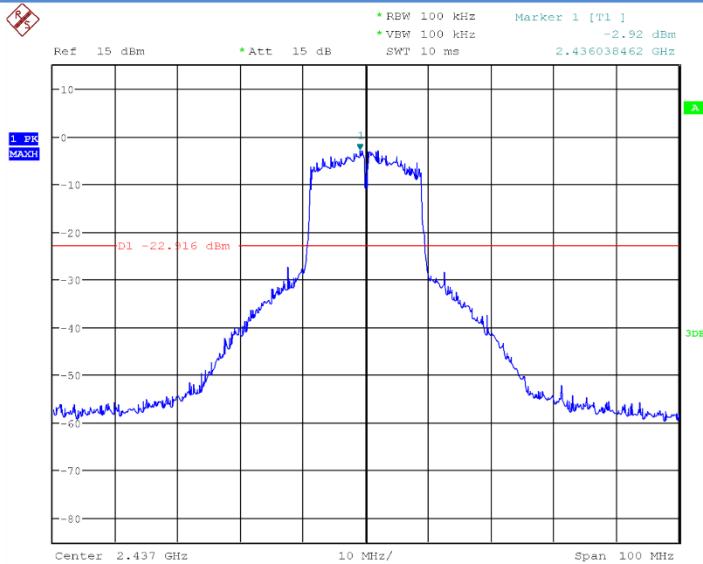


Date: 30.JUN.2015 13:24:29

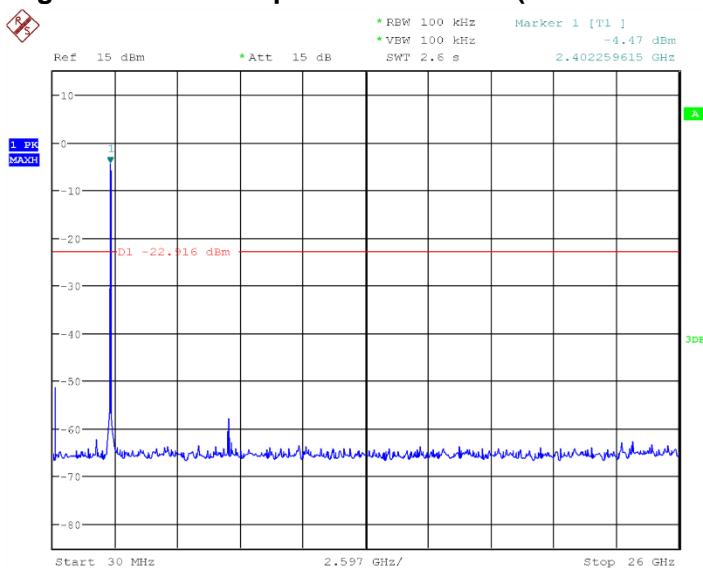Fig.65 Conducted Spurious Emission (802.11n-20MHz, Ch6)


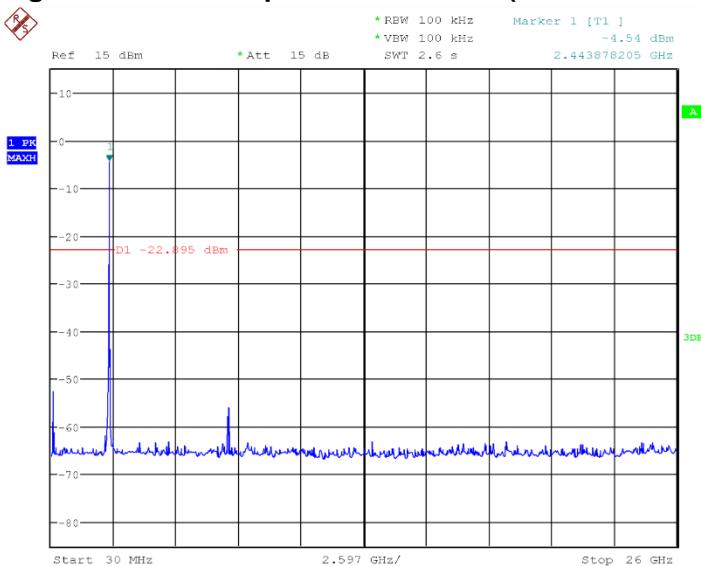
Date: 30.JUN.2015 13:24:50

Fig.66 Conducted Spurious Emission (802.11n-20MHz, Ch6, 30MHz~26GHz)

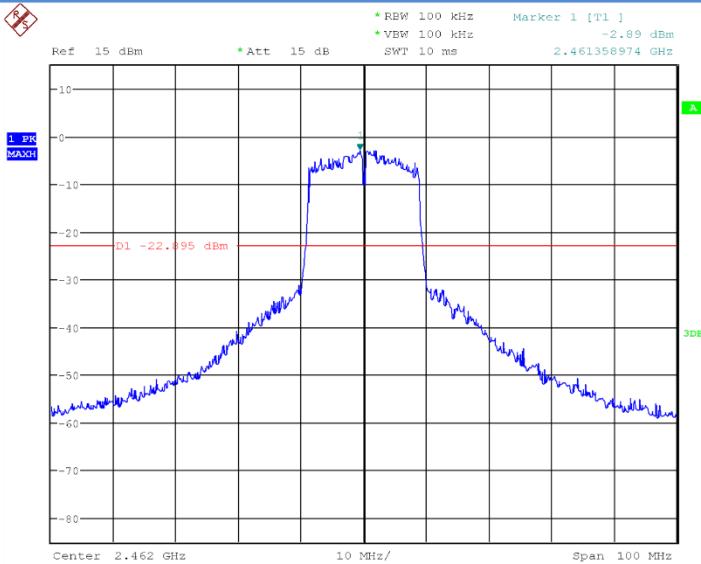

Date: 30.JUN.2015 13:21:15

Fig.67 Conducted Spurious Emission (802.11n-20MHz, Ch11)



Date: 30.JUN.2015 13:21:35

Fig.68 Conducted Spurious Emission (802.11n-20MHz, Ch11, 30MHz~26GHz)

6.6. Transmitter Spurious Emission-Radiated

6.6.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247,15.205,15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 25.205(a),



must also comply with the radiated emission limits specified in 15.209(a)(see 15.205(c)).

The measurement is according to ANSI C63.10 clause 11.11 and 11.12.

6.6.2 Limit in restricted band:

Frequency of emission(MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

6.6.3 Test procedures

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a nonconducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.4-2009 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During testing, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emission from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Times (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/1MHz	15
4000~18000	1MHz/1MHz	40
18000~26500	1MHz/1MHz	20

802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion



RF Test Report

Report No.: I15D00090-WLA

802.11b	Power	2.38GHz~2.45GHz	Fig.44	P
	Power	2.45GHz~2.5GHz	Fig.45	P
	1	30MHz~1GHz	Fig.46	P
		1GHz~3GHz	Fig.47	P
		3GHz~18GHz	Fig.48	P
802.11g	Power	2.38GHz~2.45GHz	Fig.49	P
	Power	2.45GHz~2.5GHz	Fig.50	P
	11	30MHz~1GHz	Fig.51	P
		1GHz~3GHz	Fig.52	P
		3GHz~18GHz	Fig.53	P

802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	Power	2.38GHz~2.45GHz	Fig.54	P
	Power	2.45GHz~2.5GHz	Fig.55	P
	1	30MHz~1GHz	Fig.56	P
		1GHz~3GHz	Fig.57	P
		3GHz~18GHz	Fig.58	P
/	All channels	18GHz~26.5GHz	Fig.59	P

Conclusion: PASS

Note:

A "reference path loss" is established and A_{Rpi} is the attenuation of "reference path loss", and including the gain of receive antenna , the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$ARpi = \text{Cable loss} + \text{Antenna Gain-Preamplifier gain}$

$\text{Result} = P_{Mea} + \text{Cable loss} + \text{Antenna Gain-Preamplifier gain} = P_{Mea} + ARpi$.

802.11b mode

Ch1 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpi (dB)	PMea(dBuV/m)	Polarity



RF Test Report

Report No.: I15D00090-WLA

34.525200	10.66	-25.9	36.56	V
48.489820	17.57	-25.0	42.57	V
81.125096	12.03	-28.0	40.03	V
173.867300	4.61	-25.8	30.41	H
413.803844	12.41	-16.8	29.21	H
625.161480	17.26	-11.9	29.16	V

Ch1 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2599.549808	52.01	9.6	42.41	V
2678.602692	53.08	10.0	43.08	V
2748.869231	53.25	10.8	42.45	H
2802.147115	54.37	11.2	43.17	V
2933.727308	54.63	12.2	42.43	V
2993.916539	57.59	12.7	44.89	H

Ch1 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
7236.030933	52.97	5.3	47.67	V
10992.590867	51.11	14.5	36.61	V
14350.663667	54.45	20.2	34.25	H
14907.143467	56.36	22.2	34.16	H
16093.728667	58.74	24.7	34.04	H
17598.522600	63.17	29.6	33.57	V

802.11g

Ch1 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
31.855148	7.58	-26.0	33.58	V



RF Test Report

Report No.: I15D00090-WLA

34.934576	11.51	-25.9	37.41	V
51.792804	8.68	-25.0	33.68	V
82.930800	13.46	-27.4	40.86	V
247.822912	9.80	-22.3	32.1	H
759.551960	18.22	-10.7	28.92	V

Ch1 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2669.877692	53.22	9.6	43.62	H
2747.155961	53.33	10.0	43.33	V
2820.677307	54.36	10.8	43.56	V
2855.746346	54.31	11.2	43.11	V
2944.237692	55.51	12.2	43.31	H
2966.801730	55.26	12.7	42.56	H

Ch1 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
12393.645800	51.58	15.4	36.18	H
13404.454533	53.84	17.7	36.14	H
14300.823467	55.41	20.8	34.61	V
15439.274533	56.92	23.3	33.62	H
16513.965467	60.20	26.8	33.4	H
17580.787067	62.78	29.5	33.28	H

802.11n-20MHz

Ch11 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.839564	11.95	-25.9	37.85	V
48.376188	16.58	-25.0	41.58	V
54.226068	13.44	-25.0	38.44	V



RF Test Report

Report No.: I15D00090-WLA

83.603744	11.54	-27.2	38.74	H
257.080260	7.65	-21.8	29.45	V
605.352772	16.95	-12.3	29.25	V

Ch11 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2592.649424	53.02	8.8	44.22	H
2703.918847	53.59	9.7	43.89	V
2775.720384	53.07	10.3	42.77	H
2875.946154	54.98	11.4	43.58	V
2937.577308	54.76	12.1	42.66	V
2994.688077	57.32	13.5	43.82	V

Ch11 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
12793.198533	52.49	16.7	35.79	H
14487.443200	54.18	19.6	34.58	H
15337.051533	55.73	22.3	33.43	H
16487.124067	59.49	26.8	32.69	V
17026.805800	60.22	27.1	33.12	H
17602.031867	62.42	29.5	32.92	V

All Ch 18GHz~26.5GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
21179.000000	45.48	6.97	38.51	V
22748.950000	41.63	3.05	38.58	H
23684.800000	41.59	3.05	38.54	H
24633.400000	40.05	3.05	37.00	V

25567.550000	43.01	2.90	40.11	H
26066.500000	42.06	2.90	39.16	V

Test graphs as below:

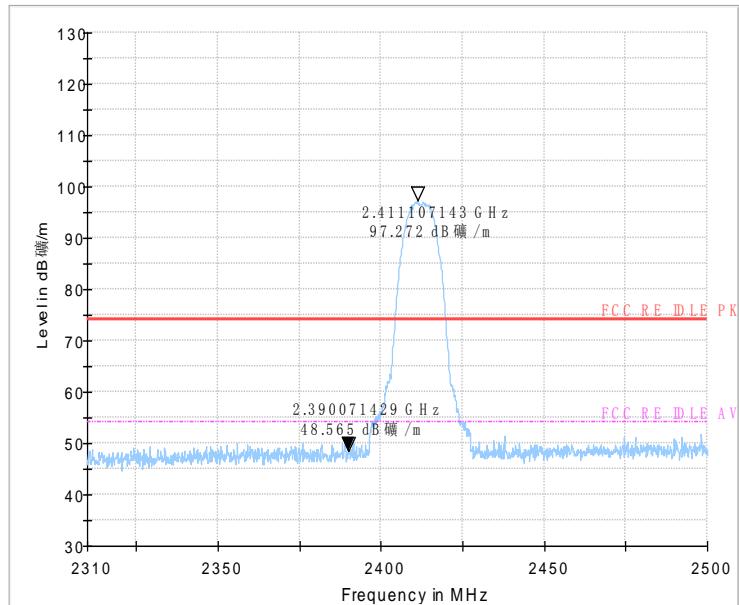


Fig.44 Radiated emission (Power): 802.11b, low channel

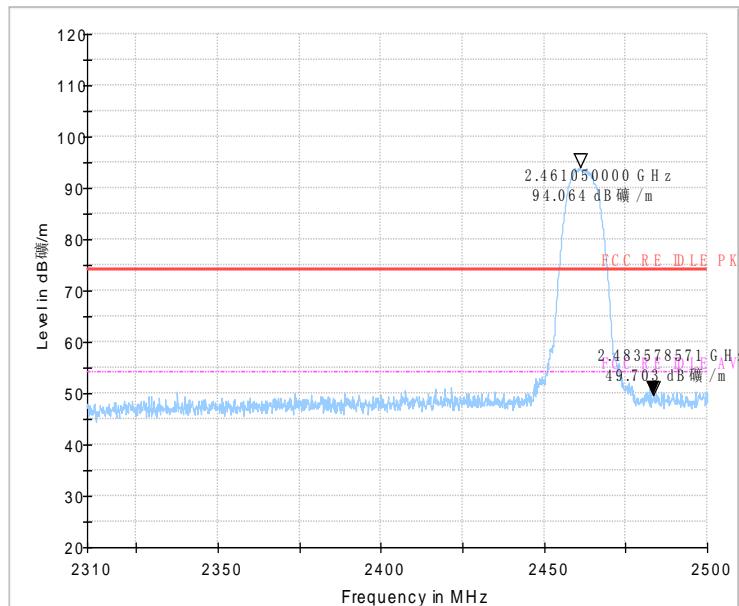
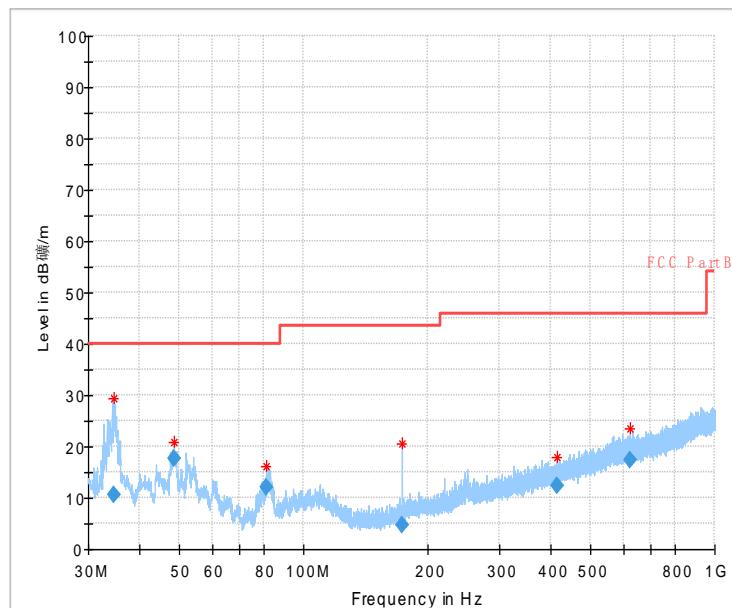
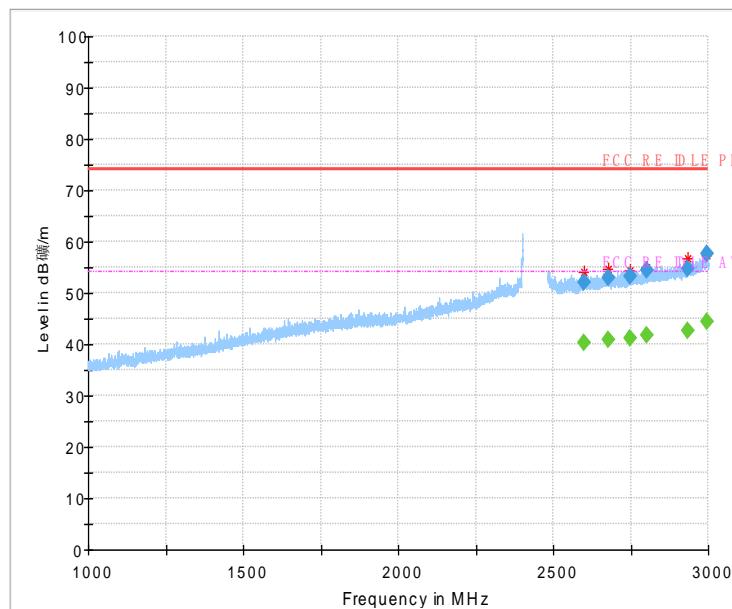


Fig.45 Radiated emission (Power): 802.11b, high channel

**Fig.46 Radiated Spurious Emission (802.11b, Ch1, 30MHz~1GHz)****Fig.47 Radiated Spurious Emission (802.11b, Ch1, 1GHz~3GHz)**






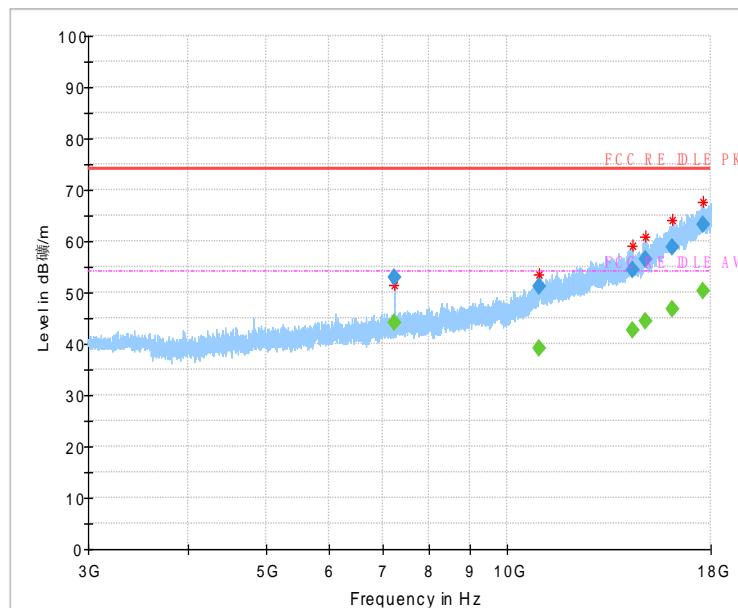


Fig.48 Radiated Spurious Emission (802.11b, Ch1, 3GHz~18GHz)

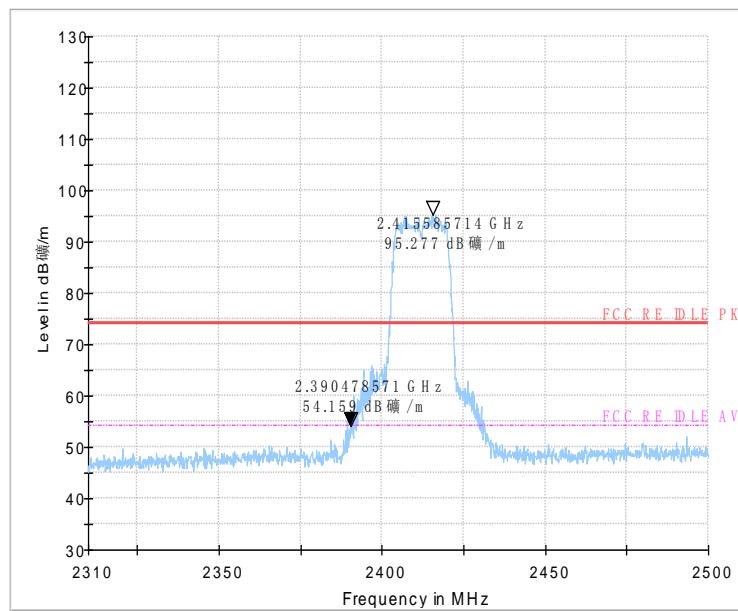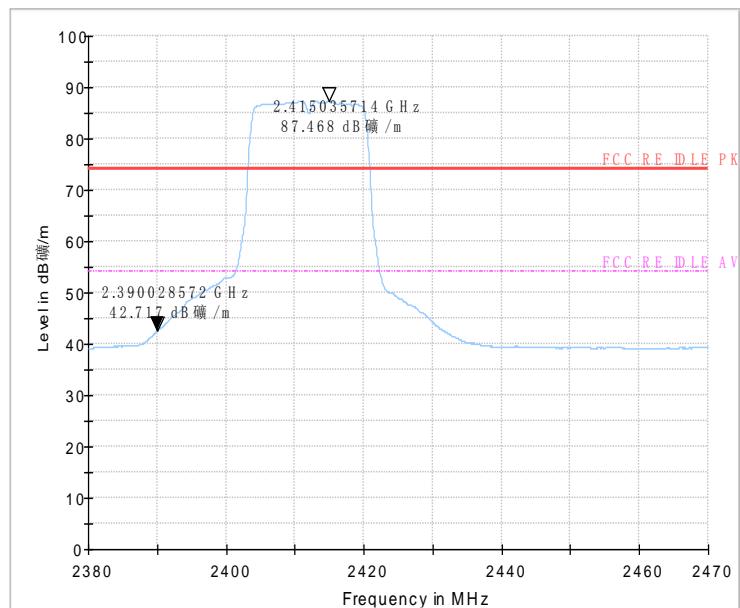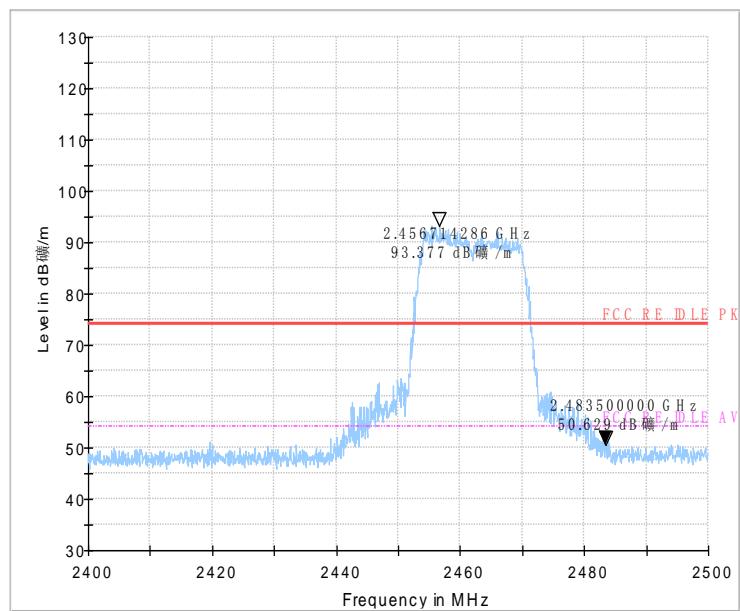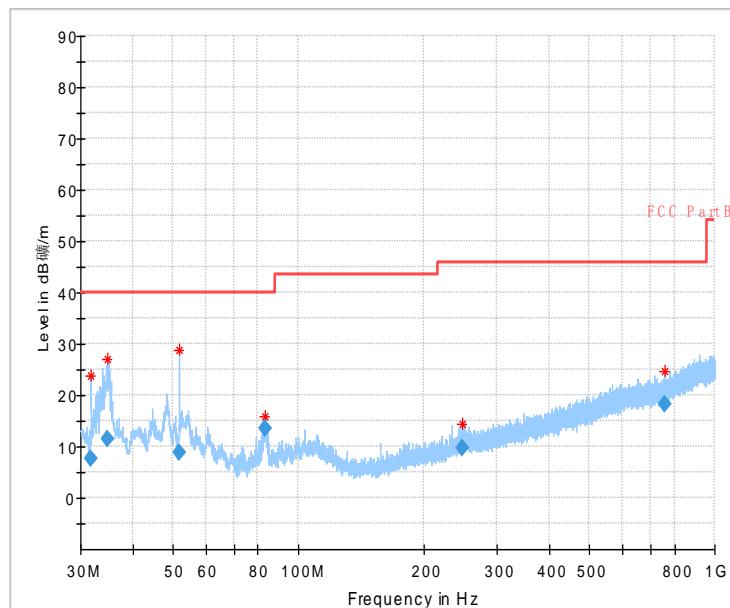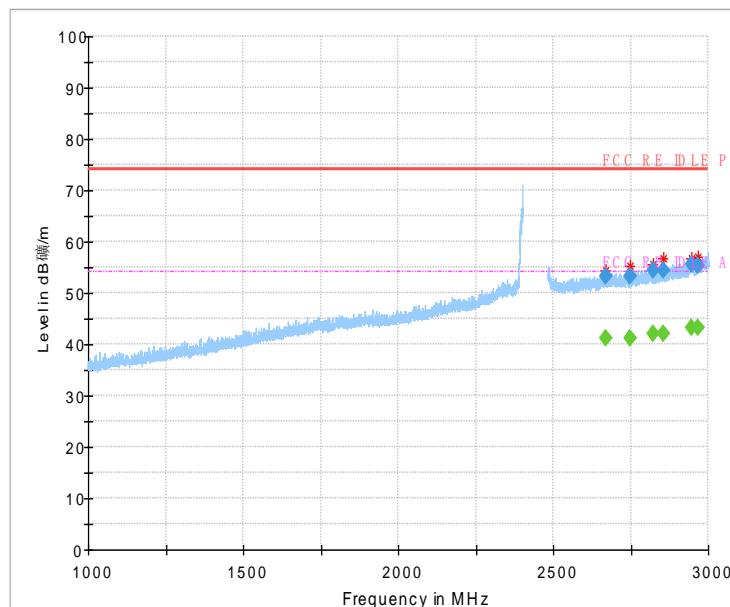

Peak


(AV)
Fig.49 Radiated emission (Power): 802.11g, low channel

Peak
Fig.50 Radiated emission (Power): 802.11g, high channel

**Fig.51 Radiated Spurious Emission (802.11g,Ch11,30MHz~1GHz)****Fig.52 Radiated Spurious Emission (802.11g,Ch11,1GHz~3GHz)**




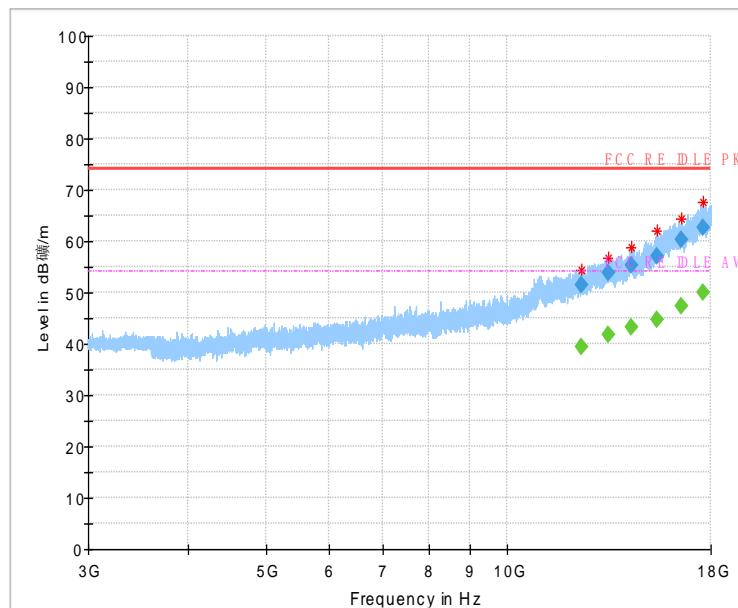


Fig.53 Radiated Spurious Emission (802.11g, Ch11, 3GHz~18GHz)

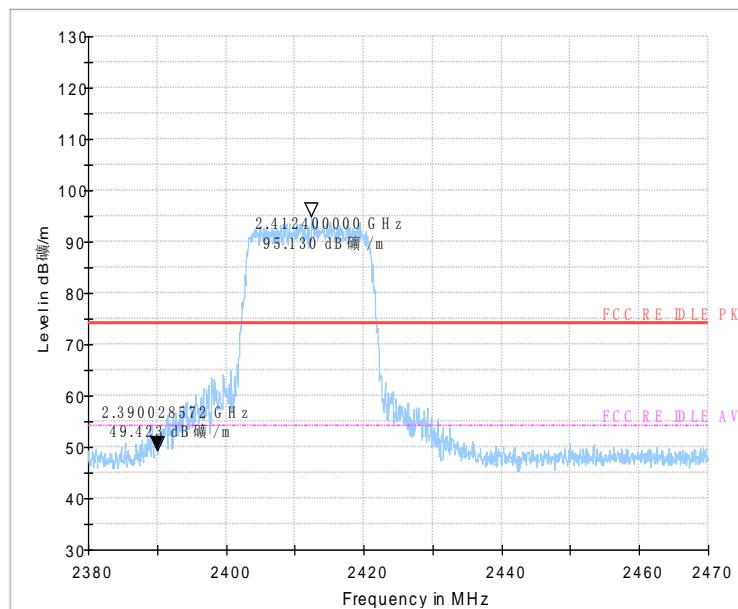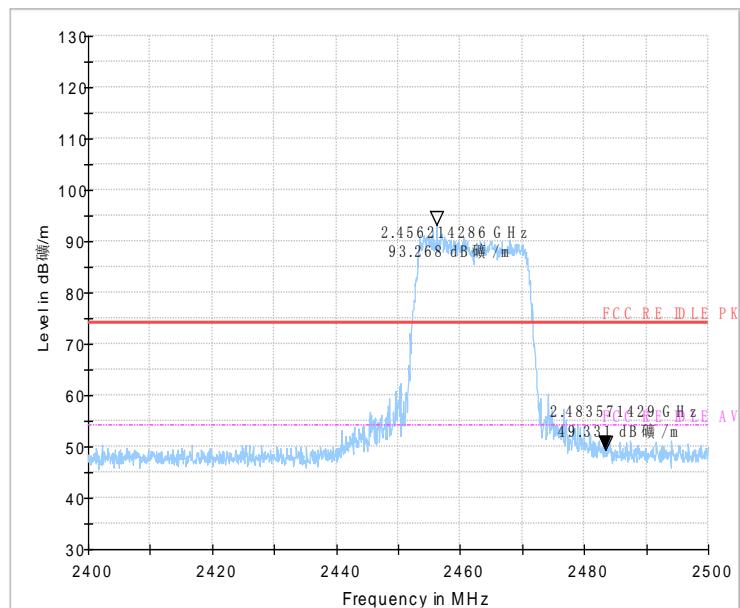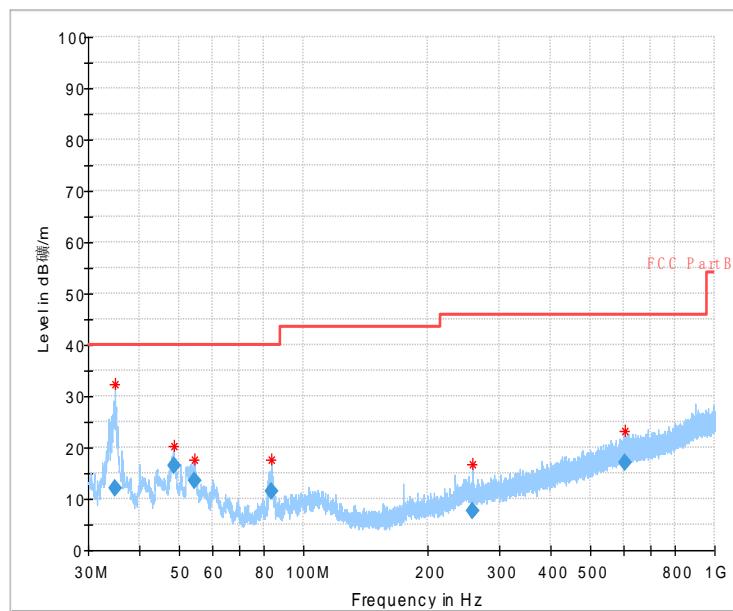

Peak

Fig.54 Radiated emission (Power): 802.11n, low channel

**Peak****Fig.55 Radiated emission (Power): 802.11n, high channel****Fig.56 Radiated Spurious Emission (802.11 n-20MHz,Ch1,30MHz~1GHz)**

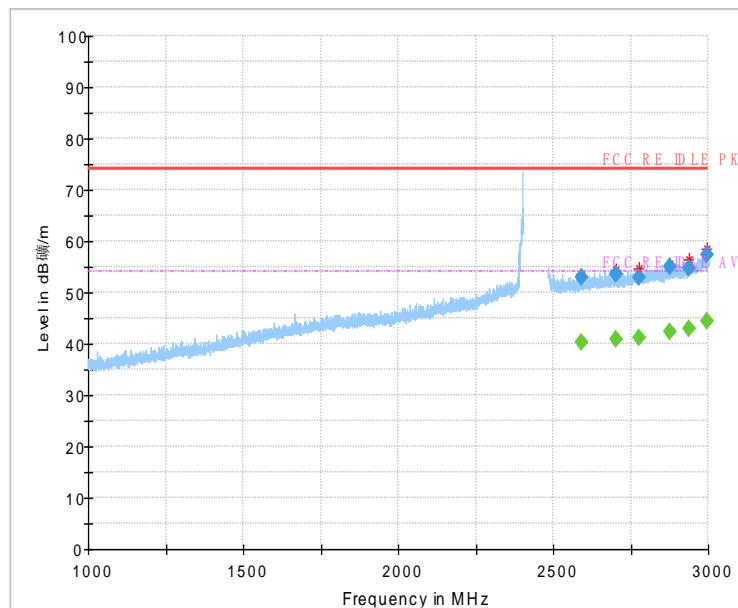


Fig.57 Radiated Spurious Emission (802.11 n-20MHz, Ch1, 1GHz~3GHz)

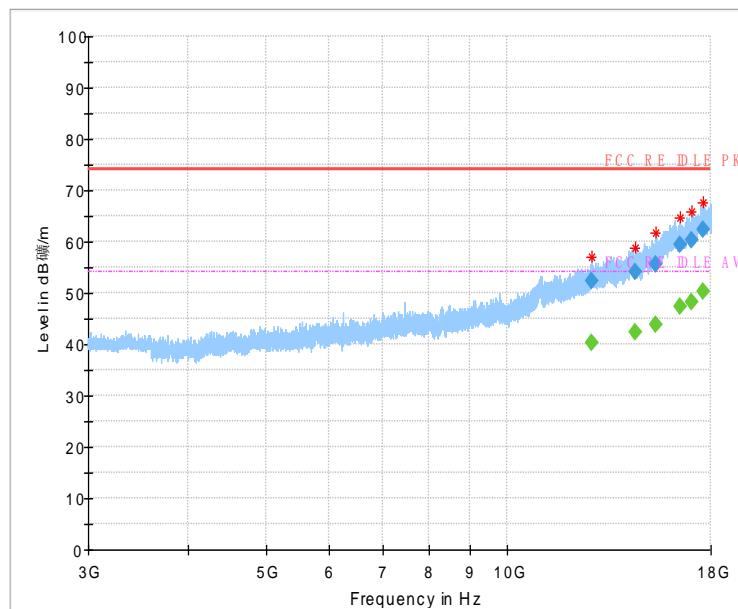


Fig.58 Radiated Spurious Emission (802.11 n-20MHz, Ch1, 3GHz~18GHz)

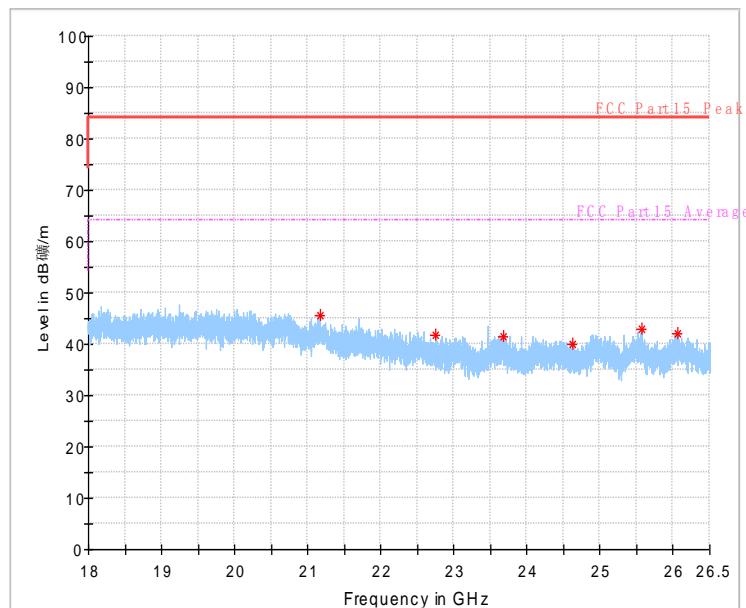


Fig.59 Radiated emission: GFSK, 18 GHz – 26.5 GHz

7. Test Equipments and Ancillaries Used For Tests

The test equipments and ancillaries used are as follows.

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSQ26	101096	R&S	2016-05-12
2	DC Power Supply	ZUP60-14	LOC-220Z006	TDL-Lambda	2016-01-18

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Universal Radio Communication Tester	CMU200	123101	R&S	2016-05-12
3	Test Receiver	ESU40	100307	R&S	2016-05-12
4	Trilog Antenna	VULB9163	19-162515	Schwarzbeck	2017-11-04
5	Double Ridged Guide Antenna	ETS-3117	135885	ETS	2017-05-05
6	2-Line V-Network	ENV216	101380	R&S	2016-05-12

Anechoic chamber

Fully anechoic chamber by Frankonia German.

8. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Fully-anechoic chamber2 (Tapered Section: 8.75 meters×3.66 meters×3.66 meters, Rectangular Section: 7.32 meters×3.97 meters×3.66 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %



RF Test Report

Report No.: I15D00090-WLA

Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 30MHz to 40000MHz

ANNEX A. Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

*****End The Report*****