



# TEST REPORT

No. I14Z45243-EMC01

for

**VSN Technologies Inc.**

**Dual GSM/Dual WCDMA Smart Phone**

**Model Name: V2001**

**Marketing Name: R.45**

**FCC ID: 2AA9WV2001**

**IC No.: 11665A-V2001**

**with**

**Hardware Version: P3**

**Software Version: TBW972323\_898B\_V007253**

**Issued Date: Mar. 10<sup>th</sup>, 2014**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

*DAKks accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01*

*FCC 2.948 Listed: No.733176*

*IC O.A.T.S listed: No.6629A-1*

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0) 10-62304633-2561, Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

## **CONTENTS**

1. TEST LABORATORY.....	3
1.1. TESTING LOCATION.....	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE .....	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....	5
3.1. ABOUT EUT .....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. EUT SET-UPS .....	5
4. REFERENCE DOCUMENTS .....	6
4.1. REFERENCE DOCUMENTS FOR TESTING.....	6
5. LABORATORY ENVIRONMENT .....	7
6. SUMMARY OF TEST RESULTS.....	8
7. TEST EQUIPMENTS UTILIZED.....	9
ANNEX A: MEASUREMENT RESULTS .....	10

## **1. Test Laboratory**

### **1.1. Testing Location**

#### **Location D**

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No.18A, Kangding Street, Beijing Economic-Technological  
Development Area, Beijing, China  
Postal Code: 100176

### **1.2. Testing Environment**

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### **1.3. Project data**


Testing Start Date: Feb. 26<sup>th</sup>, 2014  
Testing End Date: Feb. 28<sup>th</sup>, 2014

### **1.4. Signature**



---

Qu Pengfei  
(Prepared this test report)



---

Sun Xiangqian  
(Reviewed this test report)



---

Lu Bingsong  
Deputy Director of the laboratory  
(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: VSN Technologies Inc.  
Address /Post: 1975 E. Sunrise Blvd., #400 Fort Lauderdale, FL  
City: fort lauderdale  
Postal Code: 33323  
Country: United States  
Contact Person: Donghailun  
Contact Email: amit.verma@vsnmobil.com  
Telephone: 9546094912  
Fax: 9543068450

### **2.2. Manufacturer Information**

Company Name: Beijing Benywave Technology Co. Ltd.  
Address /Post: NO.55 Jiachang 2 Road, OPTO-Mechatronics  
Industrial Park, Tongzhou District  
City: Beijing  
Postal Code: 100111  
Country: China  
Telephone: +86-10-58928917  
Fax: -----

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Dual GSM/Dual WCDMA Smart Phone
Model Name	V2001
Marketing Name	R.45
FCC ID	2AA9WV2001
IC No.	11665A-V2001
Extreme vol. Limits	3.6VDC to 4.2VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	354694028010710	P3	TBW972323_898B_V007253
EUT2	354694028010611	P3	TBW972323_898B_V007253

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	描述	序列号	备注
AE1	Battery	/	1445243BA004
AE2	Battery	/	1445243BA005
AE3	Travel charger	/	1445243CH002
AE4	USB cable	/	1445243DC001
AE1, AE2			
Model		TBT9608	
Manufacturer		REVEL	
Capacitance		1700mAh	
Nominal voltage		3.7V	
AE3			
Model	/		
Manufacturer	REVEL		
Length of cable	/		
AE4			
Model	/		
Manufacturer	REVEL		
Length of cable	98cm		

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. EUT set-ups**

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1+ AE3 + AE4	Charging mode
Set.3	EUT1+ AE1+ AE4	USB mode

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	10-1-13
ICES-003	Information Technology Equipment (ITE) – Limits and methods of measurement	Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	Issue 5
		2009

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Fully-anechoic chamber FAC-3** (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz -1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

## 6. SUMMARY OF TEST RESULTS

<b>Abbreviations used in this clause:</b>		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

Items	Test Name	Clause in FCC rules	Clause in IC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	6.2	B.1	P	A
2	Conducted Emission	15.107(a)	6.1	B.2	P	A

## **7. Test Equipments Utilized**

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	LISN	ESH2-Z5	829991/012	R&S	2014-04-14
2	Universal Radio Communication Tester	CMU200	109914	R&S	2014-04-21
3	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A
4	Monitor	E178FPc	CN-OWR979-6 4180-7AJ-D2M S	DELL	N/A
5	Printer	P1606dn	VNC3L52122	HP	N/A
6	Keyboard	L100	CN0RH659658 907ATOI40	DELL	N/A
7	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A
8	Test Receiver	ESCI	100344	R&S	2014-03-28
9	Test Receiver	ESCI 7	100948	R&S	2014-07-18
10	EMI Antenna	VULB 9163	9163-234	Schwarzbeck	2016-09-15
11	EMI Antenna	3115	6914	ETS-Lindgren	2014-12-15
12	Test Receiver	FSV	101047	R&S	2014-06-30

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission**

#### **Reference**

FCC: CFR Part 15.109(a)

IC: ICES-003 section 6.2

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters (above 1GHz) and 10 meters (below 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters (above 1GHz) and 10 meters (below 1GHz) from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode:**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu$ V/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

**A.1.5 Measurement Results**

A "reference path loss" is established and the  $A_{RPL}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{RPL} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{PL}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case):  $U = 4.3 \text{ dB}$ ,  $k=2$ .

**Measurement result for Set.1:****Charging Mode/Average detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity
5900.313	30.6	-34.1	35.1	29.600	V
5658.125	30.6	-34.2	35.1	29.700	H
5893.594	30.5	-34.1	35.1	29.500	H
5856.250	30.5	-33.8	35.1	29.200	V
5655.000	30.5	-34.2	35.1	29.600	H
5659.531	30.5	-34.2	35.1	29.600	V

**Charging Mode/Peak detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity
5838.438	42.6	-33.8	35.1	41.300	V
5374.063	42.6	-34.8	34.6	42.800	V
5384.531	42.5	-34.3	34.6	42.200	H
5097.656	42.5	-34.9	34.6	42.800	V
5378.438	42.4	-34.3	34.6	42.100	H
5900.781	42.3	-34.1	35.1	41.300	V

**Measurement result for Set.3:****USB Mode/Average detector**

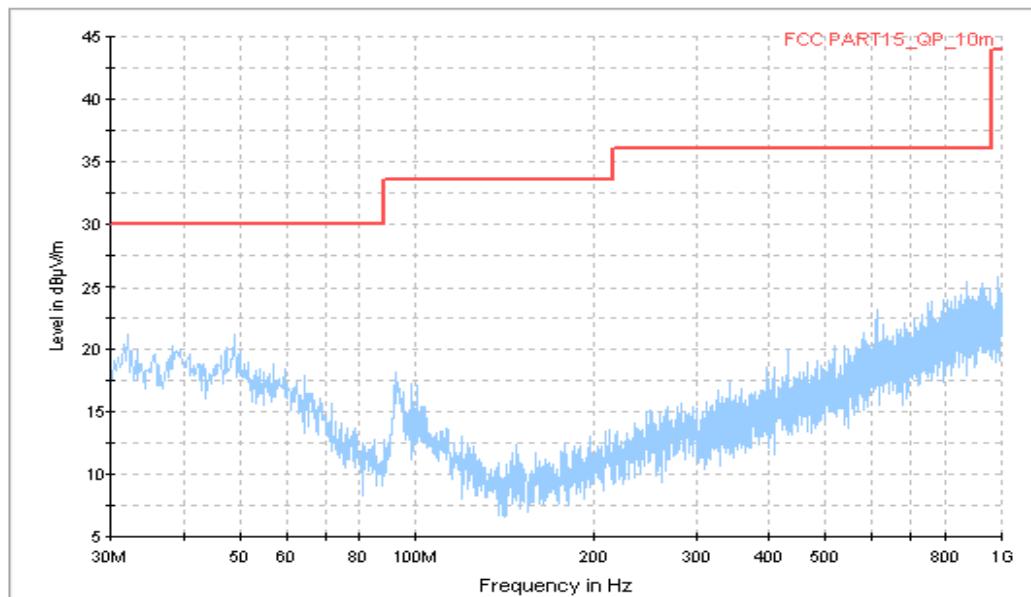
Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>mea</sub> (dB $\mu$ V)	Polarity
1875.000	40.4	-35.6	25.3	50.700	V
1874.844	40.3	-35.6	25.3	50.600	V
1875.156	39.9	-35.6	25.3	50.200	H
1874.688	39.5	-35.6	25.3	49.800	V
1875.313	38.7	-35.6	25.3	49.000	V
1874.531	38.4	-35.6	25.3	48.700	H

**USB Mode/ Peak detector**

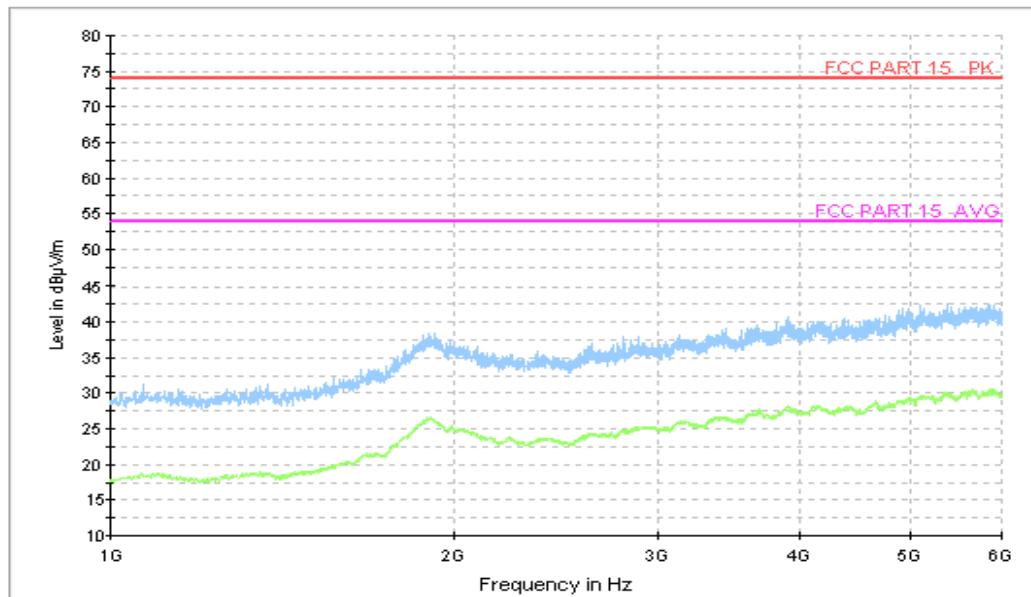
Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>mea</sub> (dB $\mu$ V)	Polarity
1869.375	46.8	-35.9	25.3	57.400	H
1891.094	46.1	-35.0	25.3	55.800	H
5973.125	45.8	-33.5	35.1	44.200	V
5971.719	45.6	-33.5	35.1	44.000	H
5998.750	45.4	-33.6	35.1	43.900	V
1498.438	45.4	-40.3	24.1	61.600	V

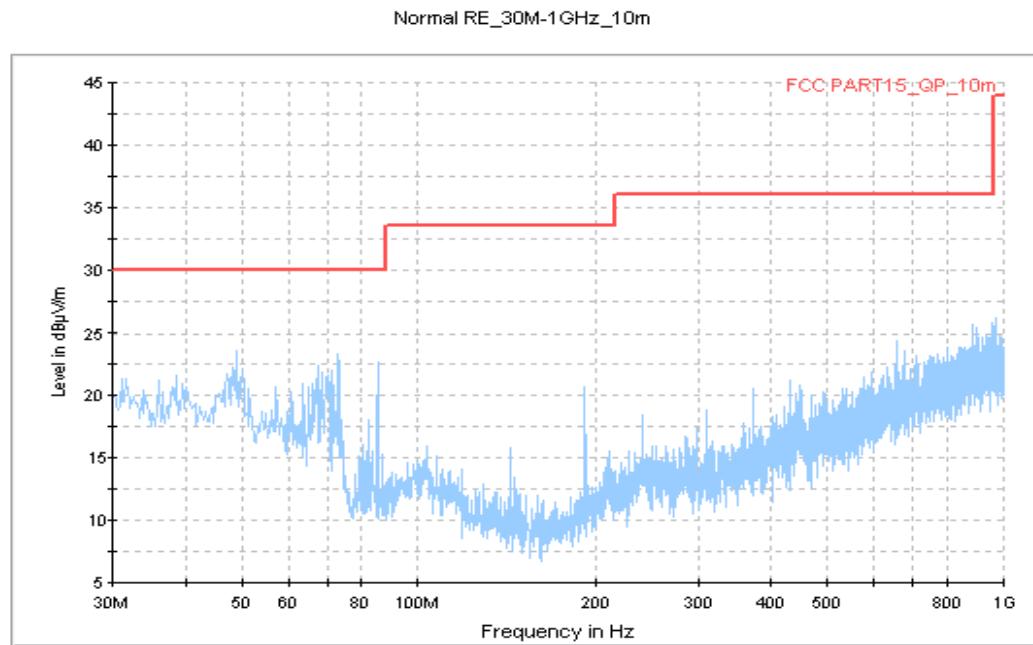
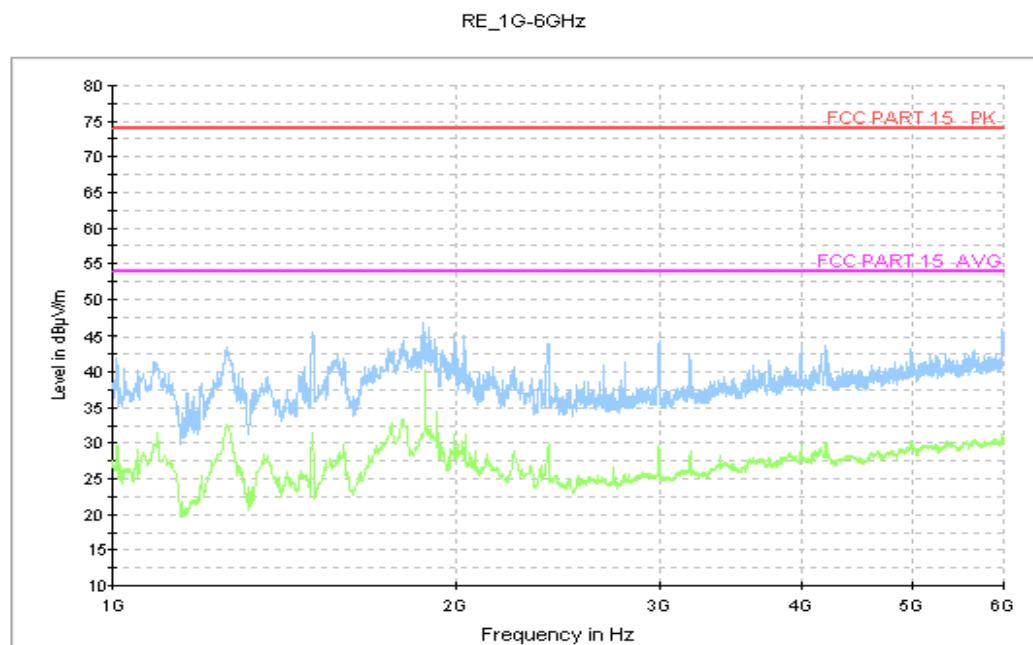
**Charging Mode, Set.1**

Normal RE\_30M-1GHz\_10m

**Figure A.1 Radiated Emission from 30MHz to 1GHz**

RE\_1G-6GHz

**Figure A.2 Radiated Emission from 1GHz to 6GHz**

**USB Mode, Set.3****Figure A.3 Radiated Emission from 30MHz to 1GHz****Figure A.4 Radiated Emission from 1GHz to 6GHz**

**A.2 Conducted Emission****Reference**

FCC: CFR Part 15.107(a)

IC: ICES-003 section 6.1

**A.2.1 Method of measurement**

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 7.3.

**A.2.2 EUT Operating Mode:**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

**A.2.3 Measurement Limit**

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

**A.2.4 Test Condition in charging mode**

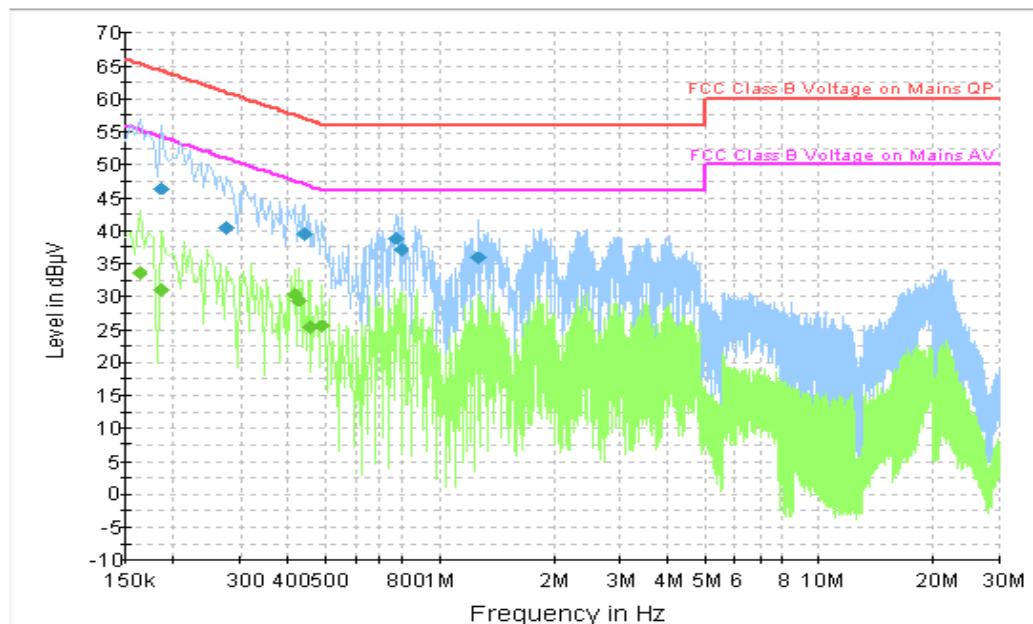
Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U = 2.9 \text{ dB}$ ,  $k=2$ .

#### Charging Mode, Set.1



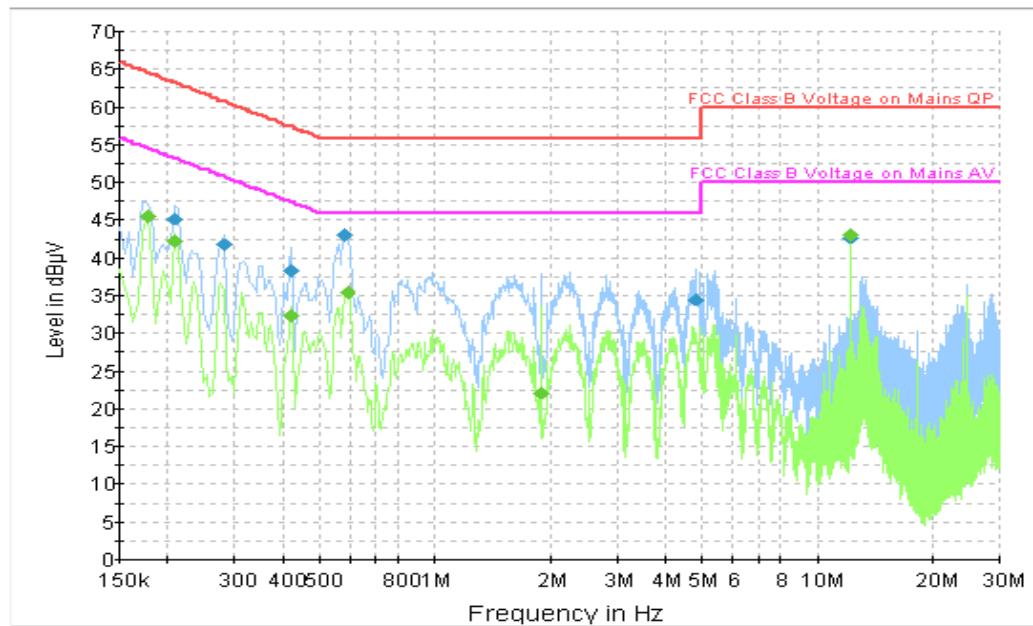
**Figure A.5 Conducted Emission**

#### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	46.4	GND	L1	9.8	17.8	64.2
0.276000	40.4	GND	L1	9.8	20.5	60.9
0.442500	39.4	GND	L1	9.8	17.6	57.0
0.775500	38.9	GND	L1	9.8	17.1	56.0
0.798000	37.2	GND	L1	9.8	18.8	56.0
1.275000	35.9	GND	L1	9.7	20.1	56.0

#### Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.163500	33.7	GND	L1	9.8	21.6	55.3
0.186000	30.9	GND	L1	9.8	23.3	54.2
0.415500	30.5	GND	L1	9.8	17.1	47.5
0.429000	29.4	GND	L1	9.8	17.9	47.3
0.460500	25.3	GND	L1	9.8	21.3	46.7
0.492000	25.4	GND	L1	9.8	20.8	46.1

**USB Mode, Set.3**

**Figure A.6 Conducted Emission**
**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.208500	45.2	GND	N	9.8	18.1	63.3
0.280500	41.7	GND	N	9.8	19.1	60.8
0.420000	38.3	GND	N	9.8	19.1	57.4
0.582000	43.1	GND	L1	9.8	12.9	56.0
4.812000	34.5	GND	L1	9.8	21.5	56.0
12.201000	42.8	GND	L1	9.5	17.2	60.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.177000	45.6	GND	N	9.8	9.0	54.6
0.208500	42.3	GND	N	9.8	11.0	53.3
0.420000	32.4	GND	N	9.8	15.0	47.4
0.591000	35.6	GND	L1	9.8	10.4	46.0
1.896000	22.1	GND	N	9.7	23.9	46.0
12.201000	43.1	GND	N	9.6	6.9	50.0

**\*\*\*END OF REPORT\*\*\***