



*Full*

# TEST REPORT

**No. I15D00109-RFA**

*For*

**Client : VSN Technologies Inc. d/b/a**

**VSN Mobil**

**Production : WCDMA Digital Mobile Phone**

**Model Name : V.45s**

**Model Number: V2003**

**FCC ID: 2AA9WV2003**

**Hardware Version: V01**

**Software Version: V04\_20150629\_UP39\_H456\_**

**NEXTEL\_SINGLE\_MP**

**Issued date: 2015-11-25**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

**Test Laboratory:**

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: [welcome@ecit.org.cn](mailto:welcome@ecit.org.cn)

**Revision Version**

Report Number	Revision	Date	Memo
I15D00109-RFA	00	2015-08-25	Initial creation of test report
I15D00109-RFA	01	2015-11-25	Second creation of test report

## CONTENTS

<b>1. TEST LABORATORY .....</b>	<b>5</b>
<b>1.1. TESTING LOCATION .....</b>	<b>5</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>5</b>
<b>1.3. PROJECT DATA .....</b>	<b>5</b>
<b>1.4. SIGNATURE .....</b>	<b>5</b>
<b>2. CLIENT INFORMATION .....</b>	<b>6</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>6</b>
<b>2.2. MANUFACTURER INFORMATION .....</b>	<b>6</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
<b>3.1. ABOUT EUT .....</b>	<b>7</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>7</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>7</b>
<b>3.4. STATEMENTS.....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>8</b>
<b>5. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>6. TEST EQUIPMENTS UTILIZED.....</b>	<b>10</b>
<b>7. TEST ENVIRONMENT .....</b>	<b>12</b>
<b>ANNEX A. MEASUREMENT RESULTS.....</b>	<b>14</b>
<b>ANNEX A.1. OUTPUT POWER .....</b>	<b>14</b>
<b>ANNEX A.2. PEAK-TO-AVERAGE POWER RATIO .....</b>	<b>17</b>
<b>ANNEX A.3. OCCUPIED BANDWIDTH .....</b>	<b>19</b>
<b>ANNEX A.4. -26DB EMISSION BANDWIDTH .....</b>	<b>32</b>
<b>ANNEX A.5. BAND EDGE AT ANTENNA TERMINALS .....</b>	<b>46</b>

<b>ANNEX A.6. FREQUENCY STABILITY.....</b>	<b>54</b>
<b>ANNEX A.7. CONDUCTED SPURIOUS EMISSION.....</b>	<b>60</b>
<b>ANNEX A.8. RADIATED.....</b>	<b>78</b>
<b>ANNEX B. DEVIATIONS FROM PRESCRIBED TEST METHODS.....</b>	<b>93</b>

## 1. Test Laboratory

### 1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301
FCC Registration NO.:	489729


### 1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	-10/+55°C
Relative Humidity:	20-75%

### 1.3. Project data

Project Leader:	Wang Yaqiong
Testing Start Date:	2015-07-28
Testing End Date:	2015-08-21


### 1.4. Signature



Shi Hongqi  
(Prepared this test report)



Liu Jianquan  
(Reviewed this test report)



Zheng Zhongbin  
Director of the laboratory  
(Approved this test report)

## 2. Client Information

### 2.1. Applicant Information

Company Name: VSN Technologies Inc. d/b/a VSN Mobil  
Address: 1975 E. Sunrise Blvd. Suite 400, Fort Lauderdale FL  
Telephone: 954-609-4912  
Postcode: 33304

### 2.2. Manufacturer Information

Company Name: Mobiwire Mobiles (Ningbo) Co., Ltd  
Address: No.999,Dacheng East Road,Fenghua City,Zhejiang  
Telephone: +86-0574-59550618  
Postcode: 315500

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

EUT Description	WCDMA Digital Mobile Phone	
Model name	V.45s	
FCC ID	2AA9WV2003	
Frequency	GSM850/900/1800/1900 WCDMA Band 850/1900/1700	
Extreme Temperature	-10/+55°C	
Nominal Voltage	3.8V	
Extreme High Voltage	4.2V	
Extreme Low Voltage	3.6V	
Multi slot class	GPRS: 12	
Power class	GSM850 :4;	PCS1900:1.
	4	1

Note: Photographs of EUT are shown in ANNEX A of this test report.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N02	867091021972493	V01	V04_20150629_UP39_H456_NEXTEL_SINGL_E_MP	2015-07-27

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	Dummy Battery	---

\*AE ID: is used to identify the test sample in the lab internally.

#### 3.4. Statements

The product name V.45s, supporting GSM/GPRS/WCDMA/HSDPA/HSUPA/WLAN/BT/BLE/GPS, manufactured by Mobiwire Mobiles (Ningbo) Co., Ltd, is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	2014
FCC Part 22	PUBLIC MOBILE SERVICES	2014
ANSI-TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009

**5. SUMMARY OF TEST RESULTS**

Item	Test items	FCC rules	result
1	Output Power	2.1046/22.913(a)/24.232(c)	Pass
2	Peak-to-Average Ratio	24.232(d)	Pass
3	99%Occupied Bandwidth	2.1049(h)(i)/ 22.917(b)	Pass
4	-26dB Emission Bandwidth	22.917(b)/§24.238(b)	Pass
5	Band Edge at antenna terminals	22.917(a)/24.238(a)	Pass
6	Frequency stability	2.1055/24.235	Pass
7	Conducted Spurious mission	2.1053/22.917(a)/24.238(a)	Pass
8	Emission Limit	2.1051/22.917/24.238/22.913/24.232	Pass

## 6. Test Equipments Utilized

### Climate chamber

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Cal.interv al
1	Climate chamber	SH-641	92012011	ESPEC	2015-01-07	1

### Radiated emission test system

The test equipments and ancillaries used are as follows.

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Date	Cal.interv al
1	Universal Radio Communicati	CMU200	123126	R&S	2015-05-13	1
2	Test Receiver	ESU40	100307	R&S	2015-05-13	1
3	Trilog Antenna	VULB9163	VULB9163-515	Schwarzbeck	2014-11-05	3
4	Double Ridged Guide Antenna	ETS-3117	00135885	ETS	2014-05-06	3
5	2-Line V-Network	ENV216	101380	R&S	2015-05-13	1

**Conducted test system**

No.	Name	Type	SN	Manufacture	Cal. Due Date	Cal.interv al
1	Spectrum Analyzer	FSQ26	101096	R&S	2016-05-13	1
2	Universal Radio Communication Tester	CMU200	123102	R&S	2016-05-13	1
3	DC Power Supply	ZUP60-14	LOC-220Z0 06 -0007	TDL-Lambda	2015-05-12	1
4	Weinschel power spliter	1870A	10264	Weinschel	2015-07-06	1

## 7. Test Environment

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1** (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

**Fully-anechoic chamber2** (Tapered Section: 8.75 meters×3.66 meters×3.66 meters, Rectangular Section: 7.32 meters×3.97 meters×3.66 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 30MHz to 40000MHz

## ANNEX A. MEASUREMENT RESULTS

### ANNEX A.1. OUTPUT POWER

#### A.1.1. Summary

During the process of testing, the EUT was controlled Rhode & Schwarz Digital Radio. Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

#### A.1.2. Conducted

##### A.1.2.1. Method of Measurements

Method of measurements please refer to KDB971168 v02r01 clause 5.  
The EUT was set up for the max output power with pseudo random data modulation.  
The power was measured with Rhode & Schwarz Spectrum Analyzer FSQ(peak).  
These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).  
These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II; 826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V. (bottom, middle and top of operational frequency range).

##### A1.2.2 Test procedures:

1. The transmitter output port was connected to base station.
2. Set the EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### A.1.2.3 GSM Limit:

GSM850	Power control level	Nominal Peak output power (dBm)
GSM	5	33
GPRS	3	33
EDGE	6	27

GSM1900	Power control level	Nominal Peak output power (dBm)
GSM	0	30
GPRS	3	30
EDGE	5	26

**A.1.2.4 WCDMA Limit:**

22.913(a) Mobile stations are limited to 7watts.

24.232(c) Mobile and portable stations are limited to 2 watts.

**A.1.2.5 Test Procedure:**

The transmitter output power was connected to calibrated attenuator, the other end of which was connected to signal analyzer. Transmitter output power was read off the power in dBm. The power outputs at the transmitter antenna port was determined by adding the value of attenuator to the signal analyzer reading.

**A.1.2.6 GSM Test Condition:**

RBW	VBW	Sweep time	Span
1MHz	1MHz	300ms	10MHz

**A.1.2.7 WCDMA Test Condition:**

RBW	VBW	Sweep time	Span
10MHz	10MHz	800ms	50MHz

**A.1.2.8 Measurement results:**

GSM 850 (GMSK)	
Channel/fc(MHz)	Peak power (dBm)
Mid 189/836.4	32.783
Low 128/824.2	32.502
High 251/848.8	33.005
GPRS 850 (GMSK 1 Slot)	
Channel/fc(MHz)	Peak power (dBm)
Mid 189/836.4	32.783

Low 128/824.2	32.517
High 251/848.8	33.018

GSM 1900(GMSK)	
Channel/fc(MHz)	Peak power (dBm)
Mid 661/1880	29.424
Low 512/1850.2	29.402
High 810/1909.8	29.230

GPRS 1900 (GMSK 1 Slot)	
Channel/fc(MHz)	Peak power (dBm)
Mid 661/1880	29.459
Low 512/1850.2	29.440
High 810/1909.8	29.275

WCDMA II	
Channel/fc(MHz)	Peak power (dBm)
Mid 9400 /1880	25.896
Low 9262/1852.4	25.048
High 9538/1907.6	25.414

WCDMA BAND IV	
Channel/fc(MHz)	Peak power (dBm)
Mid 1413/1732.6	25.12
Low 1312/1712.4	25.65
High 1513/1752.6	25.22

WCDMA BAND V	
Channel/fc(MHz)	Peak power (dBm)
Mid 4183/836.6	26.671

Low 4132/826.4	26.705
High 4233/846.6	26.608

**Conclusion: PASS****ANNEX A.2. Peak-to-Average Power Ratio**

Method of test measurements please refer to KDB971168 v02r01 clause 5.7.

**A.2.1 PAPR Limit**

The peak-to-average power ratio (PAPR) of the transmission may not exceed 13dB

**A.2.2 Test procedures**

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. For GSM1900/WCDMA Band II:
  - 1) Select the spectrum analyzer CCDF function.
  - 2) Set RBW  $\geq$  signal's occupied bandwidth.
  - 3) Set the number of counts to a value that stabilizes the measured CCDF curve;
  - 4) Sweep time  $\geq$  1s.
3. Record the maximum PAPR level associated with a probability of 0.1%.

**A.2.3 Test results:**

<b>GSM850</b>			
Modes	GSM850		
Channel	189	128	251
Frequency (MHz)	836.4	824.2	848.8
PAPR(dB)	10.01	8.91	10.35

<b>GPRS850</b>			
Modes	GPRS850		
Channel	189	128	251
Frequency (MHz)	836.4	824.2	848.8
PAPR(dB)	10.06	8.91	10.67

**GSM1900**

Modes	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
PAPR(dB)	8.30	8.40	8.49

**GPRS1900**

Modes	GPRS1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
PAPR(dB)	8.33	8.42	8.46

**WCDMA Band II**

Modes	WCDMA Band II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6
PAPR(dB)	8.33	8.40	8.43

**WCDMA Band IV**

Modes	WCDMA Band IV		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
PAPR(dB)	2.48	2.56	2.79

**WCDMA Band V**

Modes	WCDMA Band V		
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.4	846.6
PAPR(dB)	8.33	8.46	8.53

**Conclusion: PASS****ANNEX A.3. Occupied Bandwidth**

Method of test please refer to KDB971168 r02v01 clause 4.0.

**A.3.1. Occupied Bandwidth**

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of GSM850, PCS1900, WCDMA BANDII and WCDMA BANDV.

**A.3.2 Test Procedure:**

1. The EUT output RF connector was connected with a short cable to the signal analyzer.
2. RBW was set to about 1% of emission BW, VBW  $\geq$  3 times RBW.,
3. 99% bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.


**A.3.3 Test result:**

GSM850		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 189	836.4	245.192
Low 128	824.2	248.397
High 251	848.8	243.590


GPRS850		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 189	836.4	246.795
Low 128	824.2	246.795
High 251	848.8	241.987

**Conclusion: PASS****GSM 850**

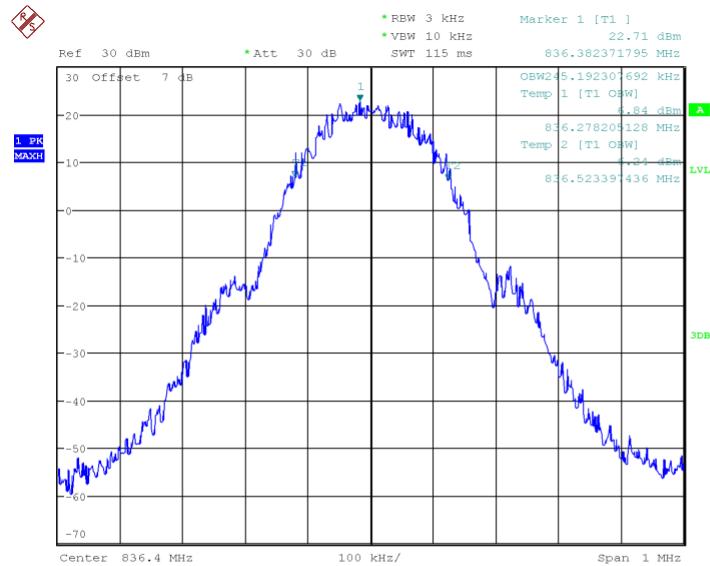


Date: 6.AUG.2015 15:41:50

### Channel 189-Occupied Bandwidth (99%)

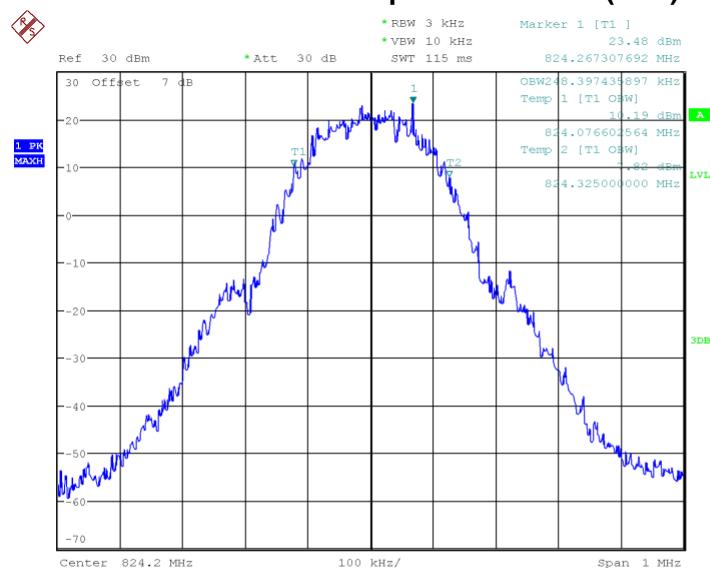


Date: 6.AUG.2015 15:42:26

### Channel 128-Occupied Bandwidth (99%)

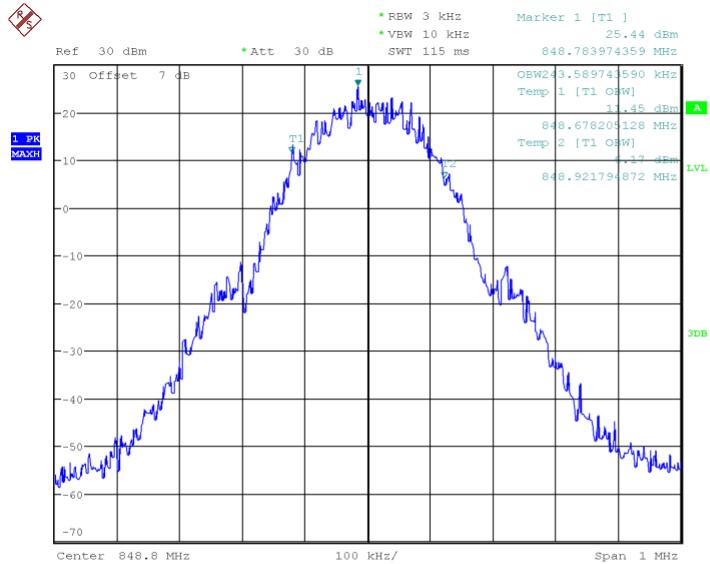


Date: 6.AUG.2015 15:43:02

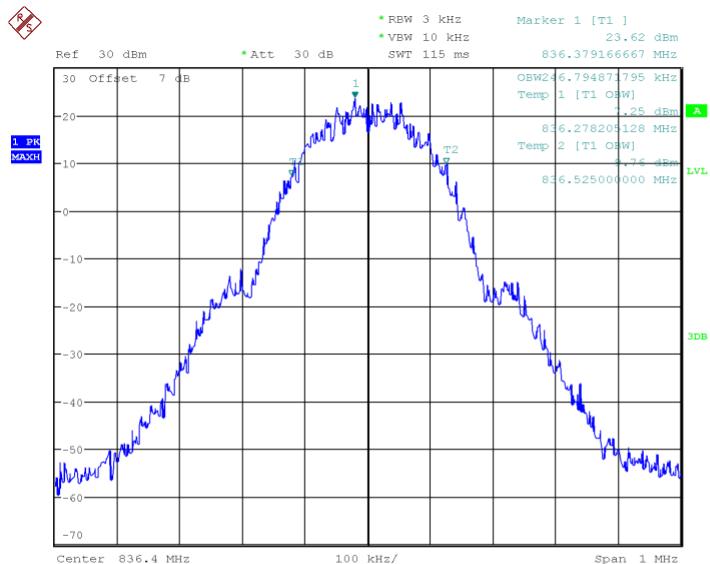**Channel 251-Occupied Bandwidth (99%)****GPRS 850**


Date: 6.AUG.2015 15:45:04

**Channel 189-Occupied Bandwidth (99%)**

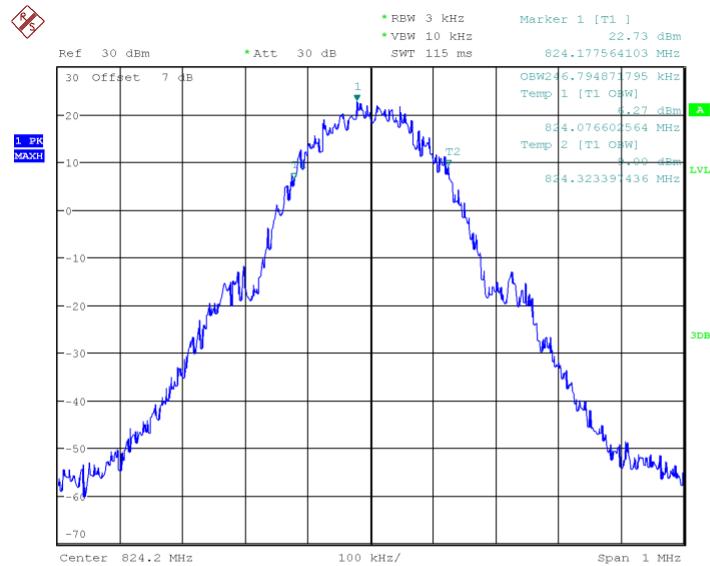

Date: 6.AUG.2015 15:45:37

### Channel 128-Occupied Bandwidth (99%)

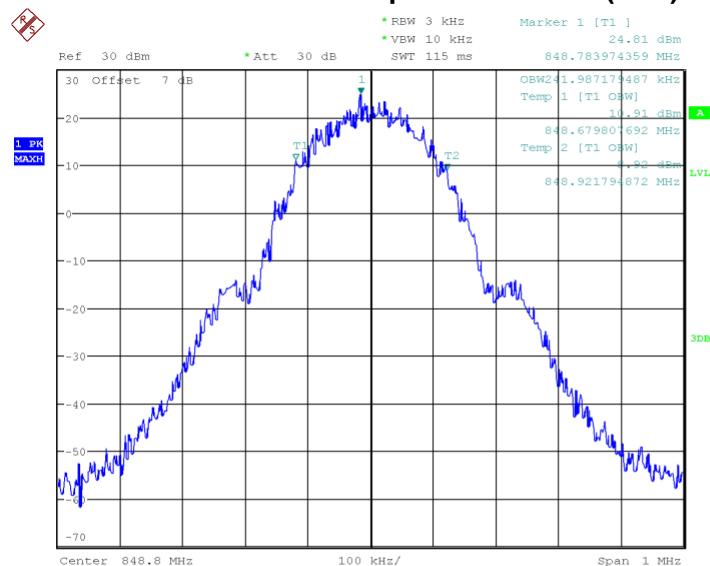


Date: 6.AUG.2015 15:46:10

### Channel 251-Occupied Bandwidth (99%)


GSM 1900		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 661	1880	246.794
Low 512	1850.2	243.589
High 810	1909.8	248.397

GPRS1900		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 661	1880	245.192
Low 512	1850.2	240.384
High 810	1909.8	243.589

**Conclusion: PASS**

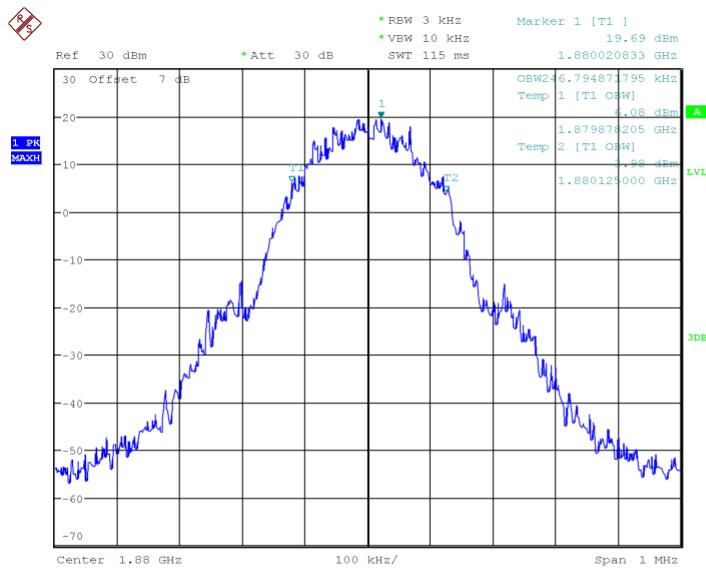
**GSM 1900**


Date: 6.AUG.2015 16:48:06

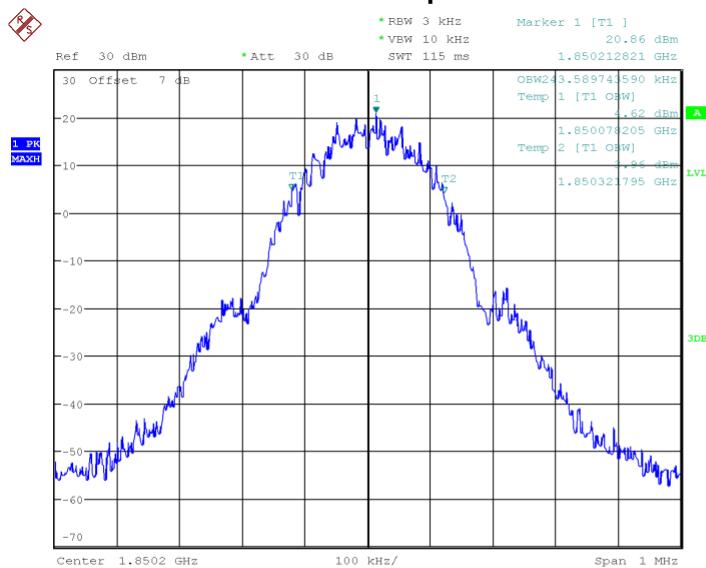**Channel 661-Occupied Bandwidth**


Date: 6.AUG.2015 16:48:42


**Channel 512-Occupied Bandwidth**

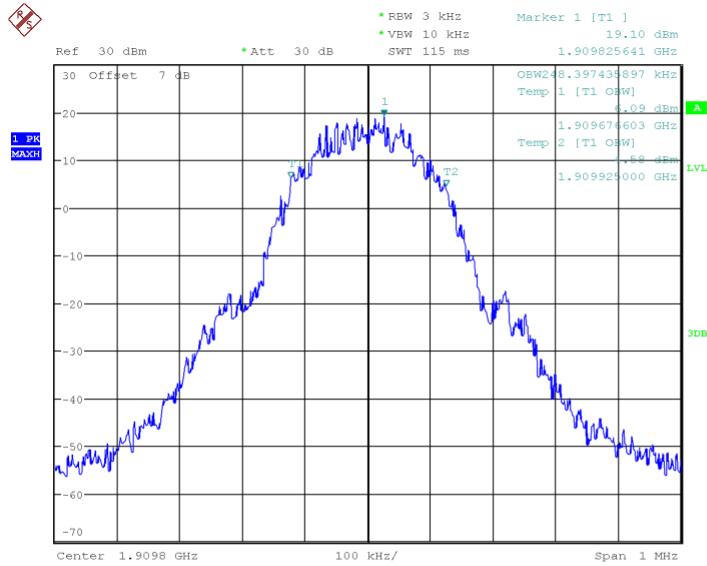

Date: 6.AUG.2015 16:49:17


### Channel 810-Occupied Bandwidth

#### GPRS 1900

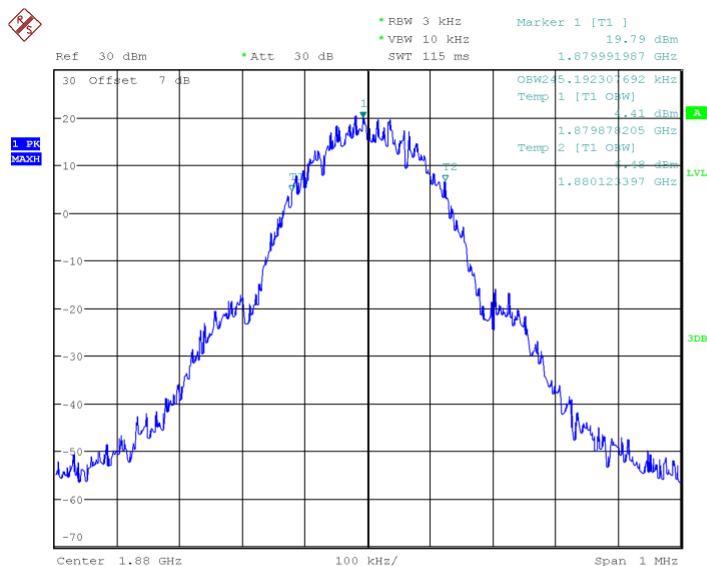


Date: 6.AUG.2015 16:51:34

### Channel 661-Occupied Bandwidth

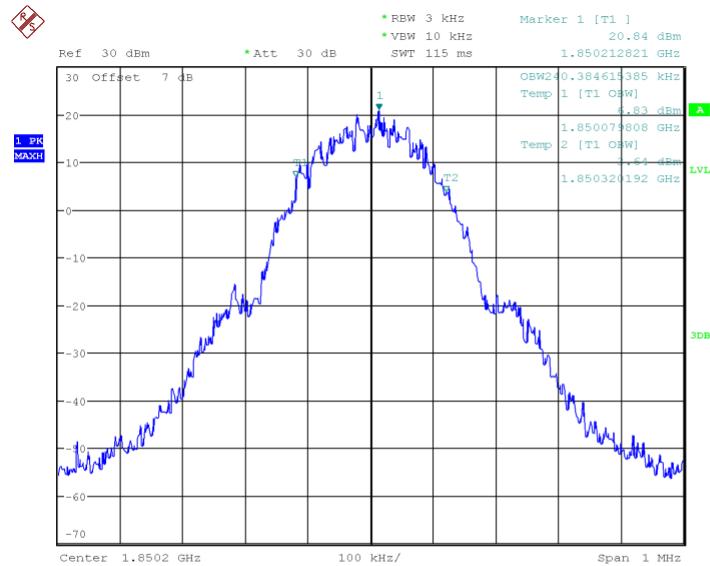

Date: 6.AUG.2015 16:52:08

### Channel 512-Occupied Bandwidth

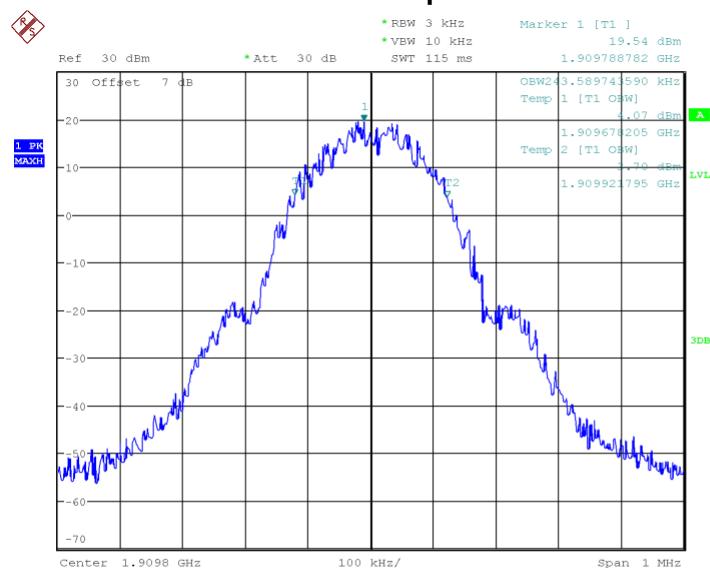


Date: 6.AUG.2015 16:52:41

### Channel 810-Occupied Bandwidth


WCDMA BAND II		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)
Mid 9400	1880	4.183
Low 9262	1852.4	4.183
High 9538	1907.6	4.167

WCDMA BAND IV		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)
Mid 1413	1732.6	4.198
Low 1312	1712.4	4.215
High 1513	1752.6	4.214

WCDMA BAND V		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)
Mid 4183	836.6	4.167
Low 4132	826.4	4.167
High 4233	846.6	4.151

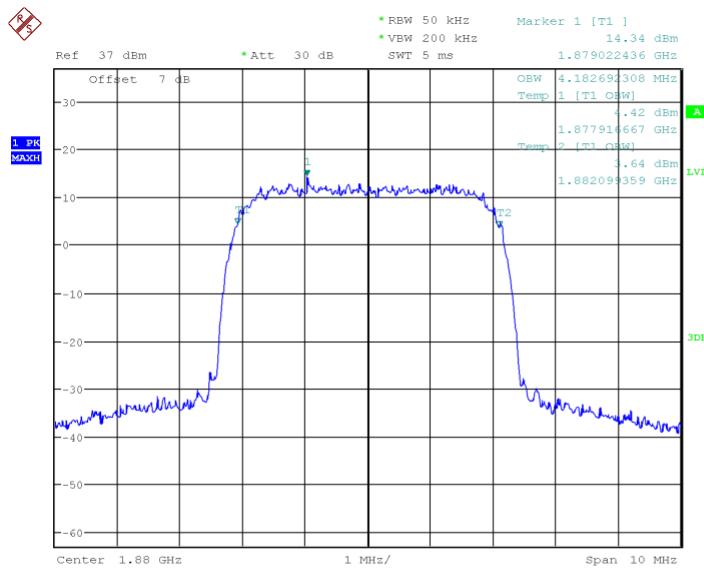
**WCDMA BAND II**


Date: 6.AUG.2015 19:21:46

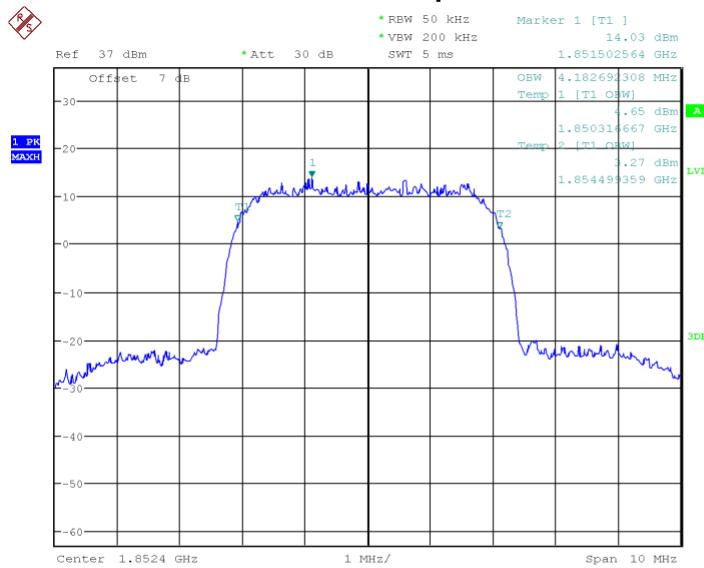**Channel 9400-Occupied Bandwidth**


Date: 6.AUG.2015 19:22:22


**Channel 9262-Occupied Bandwidth**

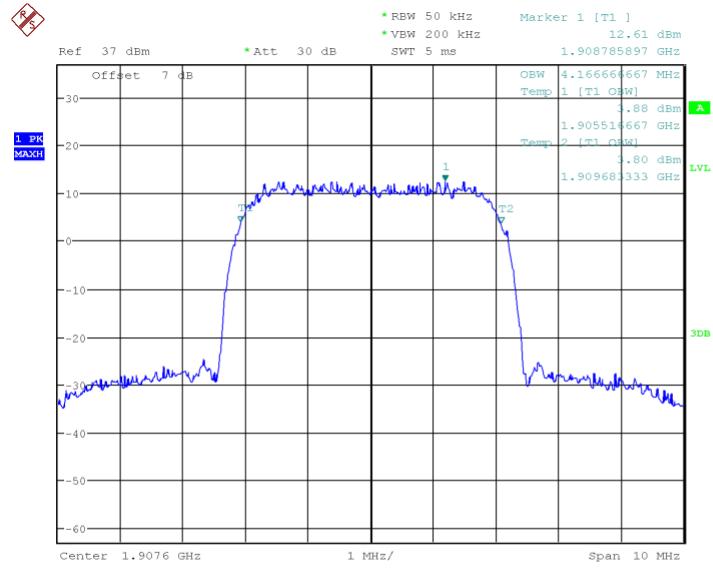

Date: 6.AUG.2015 19:22:58


## Channel 9538-Occupied Bandwidth

## WCDMA BAND IV

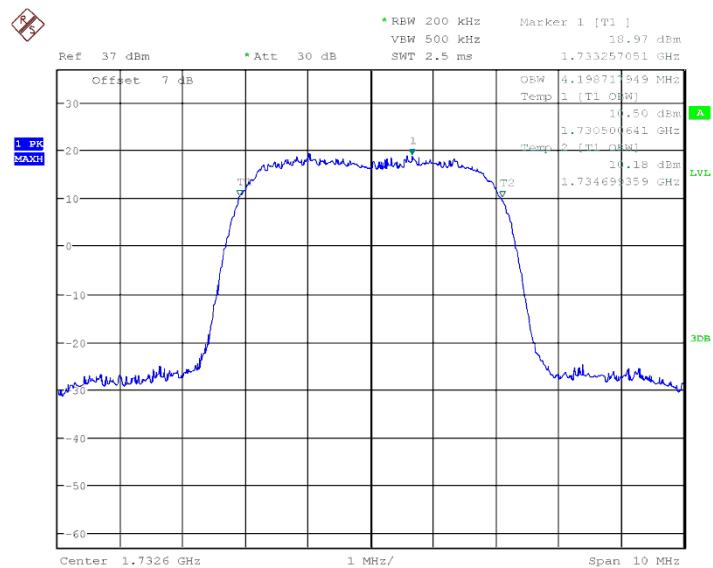


Date: 21.AUG.2015 13:35:20

## Channel 1413-Occupied Bandwidth

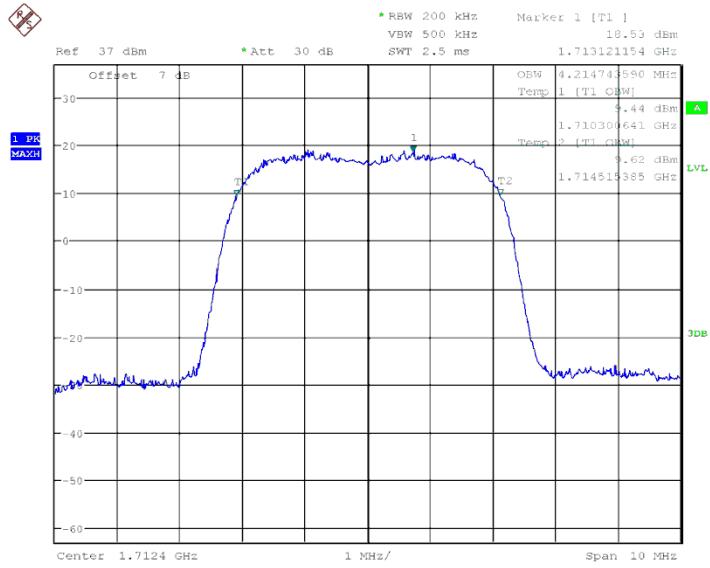

Date: 21.AUG.2015 13:34:10


### Channel 1312-Occupied Bandwidth

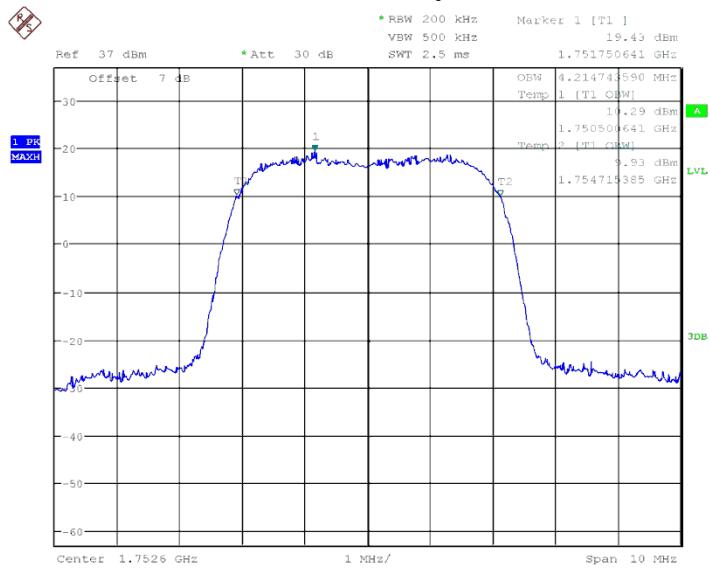

Date: 21.AUG.2015 13:36:42


### Channel 1513-Occupied Bandwidth

**WCDMA BAND V**

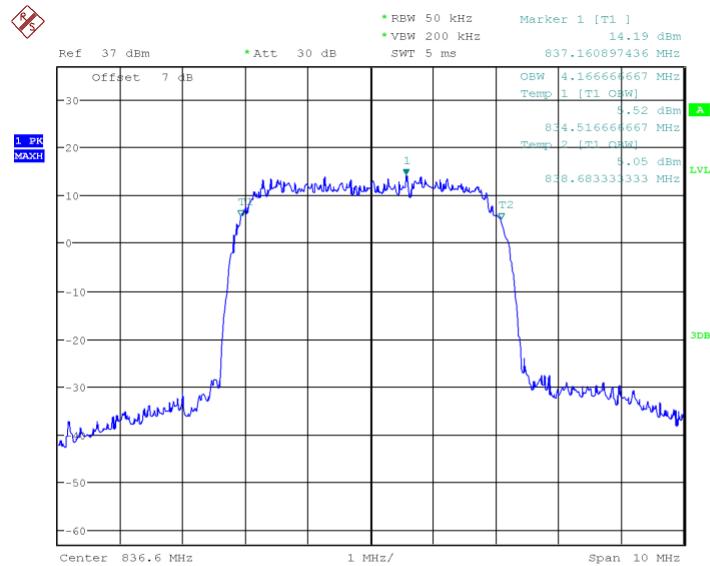


Date: 6.AUG.2015 19:23:55

### Channel 4183-Occupied Bandwidth

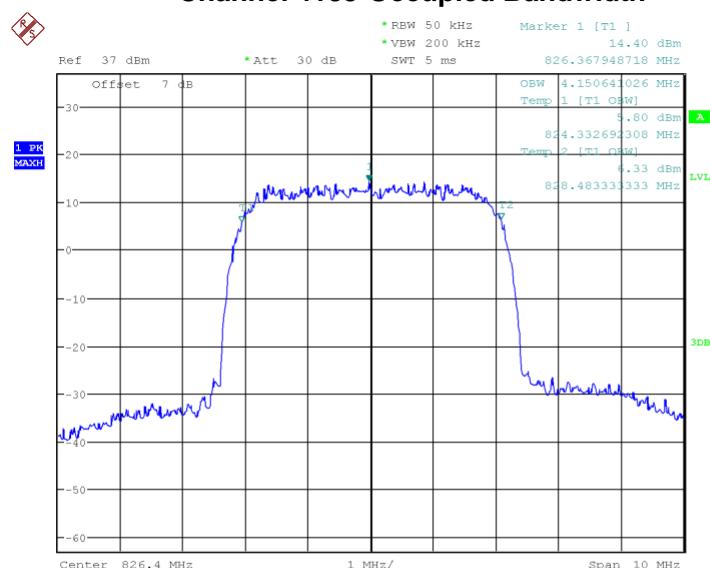

Date: 6.AUG.2015 19:24:30

### Channel 4132-Occupied Bandwidth

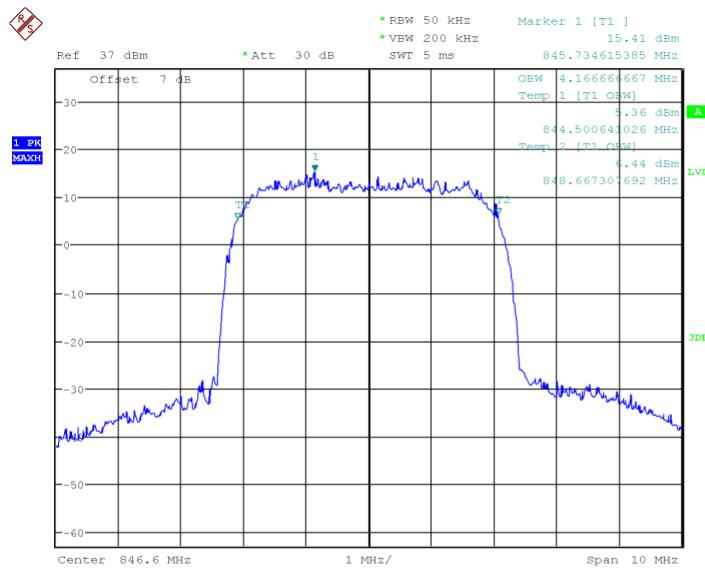

Date: 6.AUG.2015 19:25:05

### Channel 4233-Occupied Bandwidth

#### ANNEX A.4. -26dB Emission Bandwidth

Method of test please refer to KDB971168 v02r01 clause 4.0.

##### A.4.1. -26dB Emission Bandwidth

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of GSM850, PCS1900, WCDMA BANDII and WCDMA BANDV.

##### A.4.2 Test Procedure:

1. The EUT output RF connector was connected with a short cable to the signal analyzer.
2. RBW was set to about 1% of emission BW, VBW  $\geq$  3 times RBW.,
3. 26dB bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.

##### A.4.3 Measurement methods:


For GSM: signal analyzer setting as: RBW=3KHz;VBW=10KHz;Span=1MHz.

For WCDMA: signal analyzer setting as: RBW=50KHZ;VBW=20KHZ;Span=10MHz.

##### A.4.4 Test results:


GSM850		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(KHz)

Mid 189	836.4	307.692
Low 128	824.2	306.090
High 251	848.8	314.103
GPRS850		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(KHz)
Mid 189	836.4	314.013
Low 128	824.2	318.910
High 251	848.8	310.897

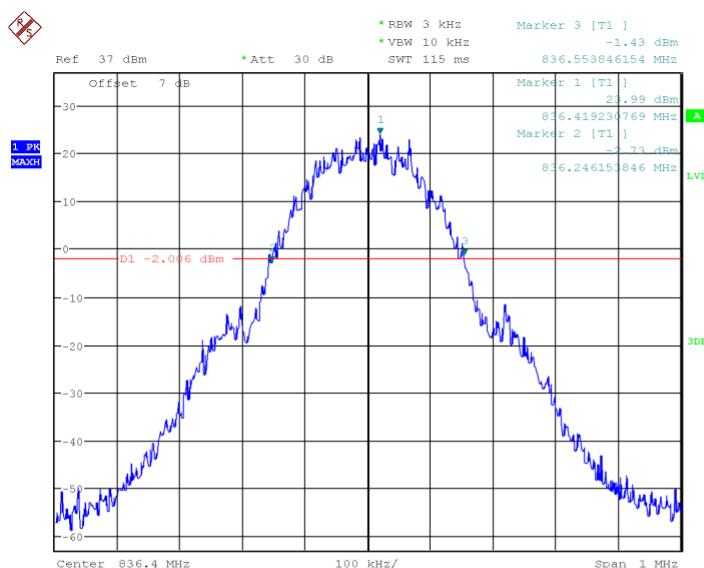**Conclusion: PASS**
**GSM 850**


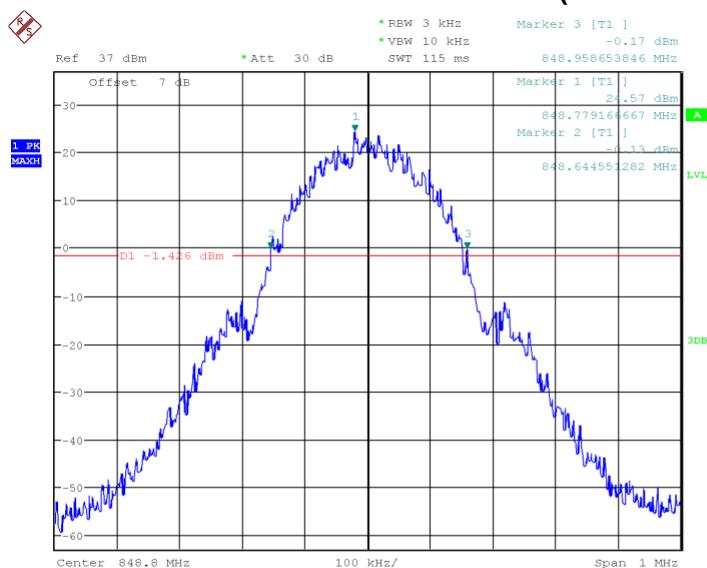
Date: 6.AUG.2015 15:49:35

**Channel 189-Emission Bandwidth (-26dBc BW)**

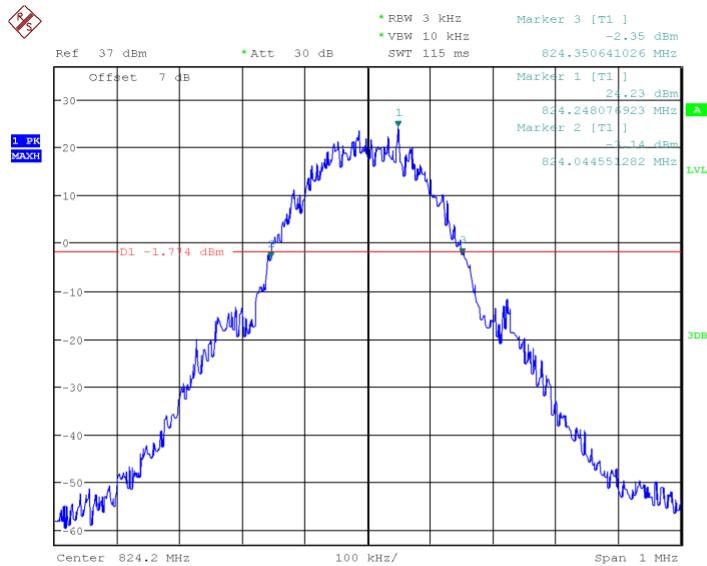

Date: 6.AUG.2015 15:50:03


### Channel 128- Emission Bandwidth (-26dBc BW)



Date: 6.AUG.2015 15:50:29


### Channel 251- Emission Bandwidth (-26dBc BW)

**GPRS 850**

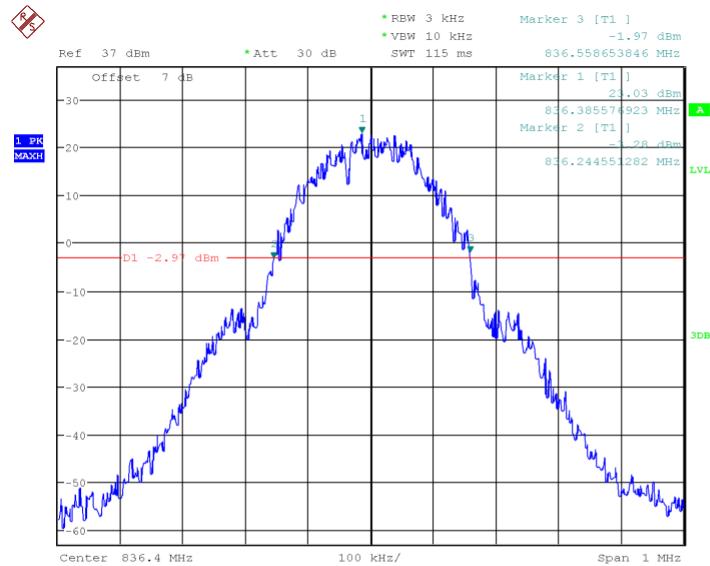


Date: 6.AUG.2015 15:52:30

### Channel 189- Emission Bandwidth (-26dBc BW)

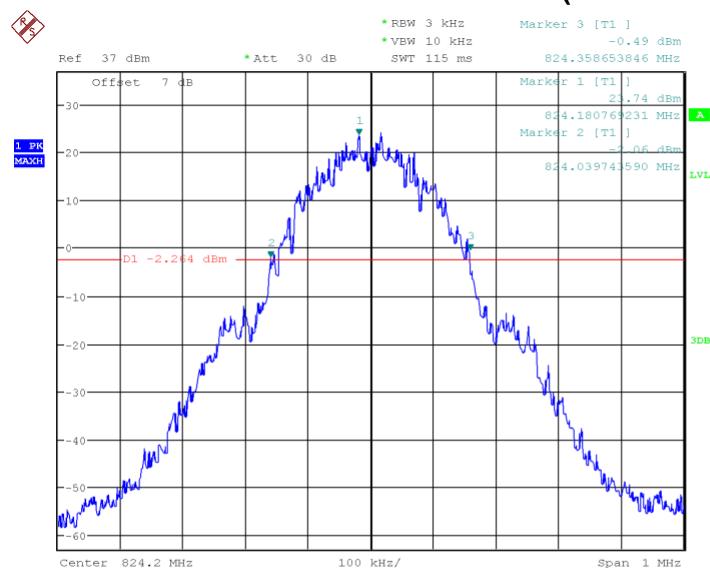

Date: 6.AUG.2015 15:52:55

### Channel 128- Emission Bandwidth (-26dBc BW)

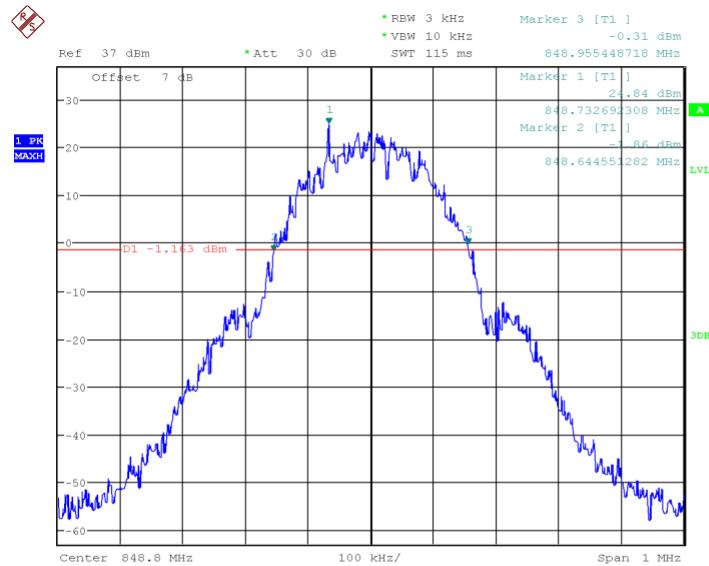


Date: 6.AUG.2015 15:53:19

**Channel 251- Emission Bandwidth (-26dBc BW)**


GSM 1900		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(KHz)
Mid 661	1880	309.295
Low 512	1850.2	307.692
High 810	1909.8	312.500

GPRS1900		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(KHz)
Mid 661	1880	307.692
Low 512	1850.2	309.295
High 810	1909.8	312.500

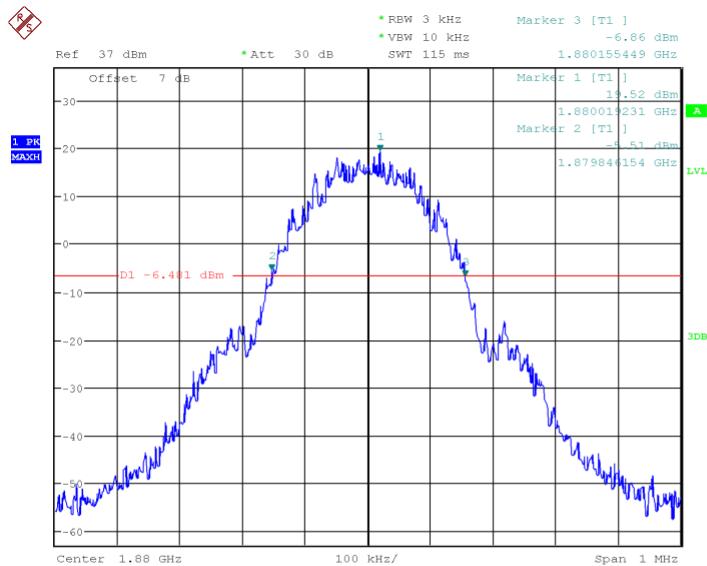**Conclusion: PASS****GSM 1900**


Date: 6.AUG.2015 16:59:44

**Channel 661- Emission Bandwidth (-26dBc BW)**

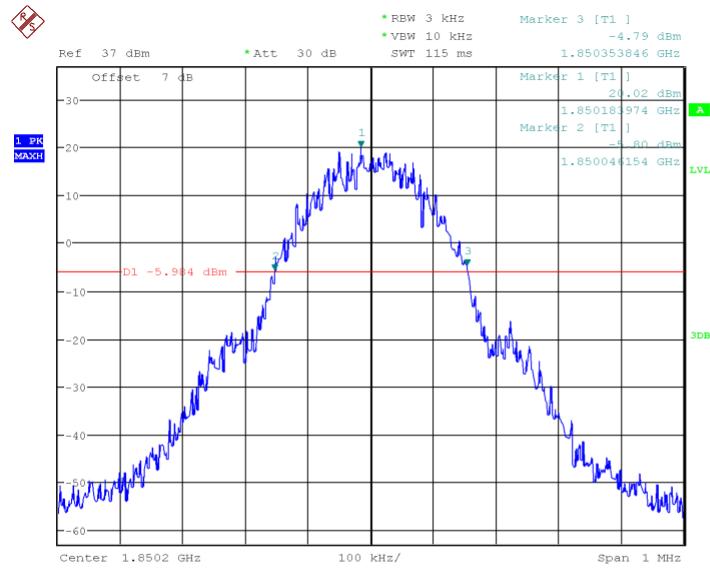

Date: 6.AUG.2015 17:00:09


### Channel512- Emission Bandwidth (-26dBc BW)

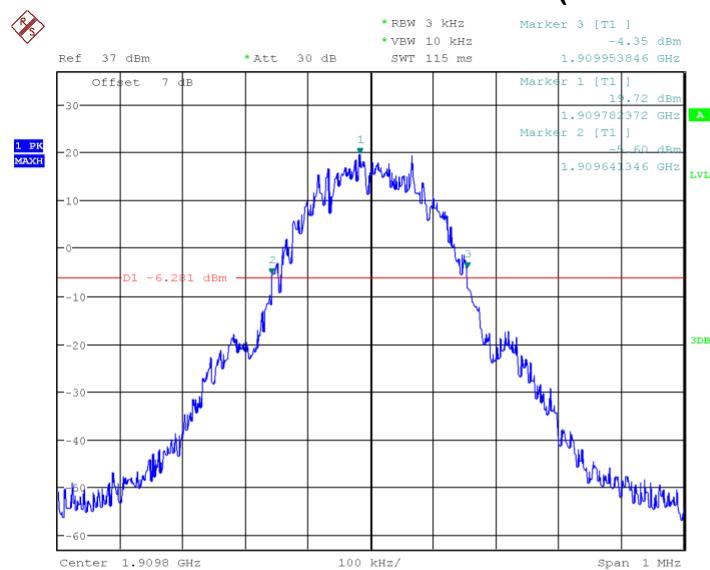

Date: 6.AUG.2015 17:00:36


### Channel 810- Emission Bandwidth (-26dBc BW)

**GPRS 1900**

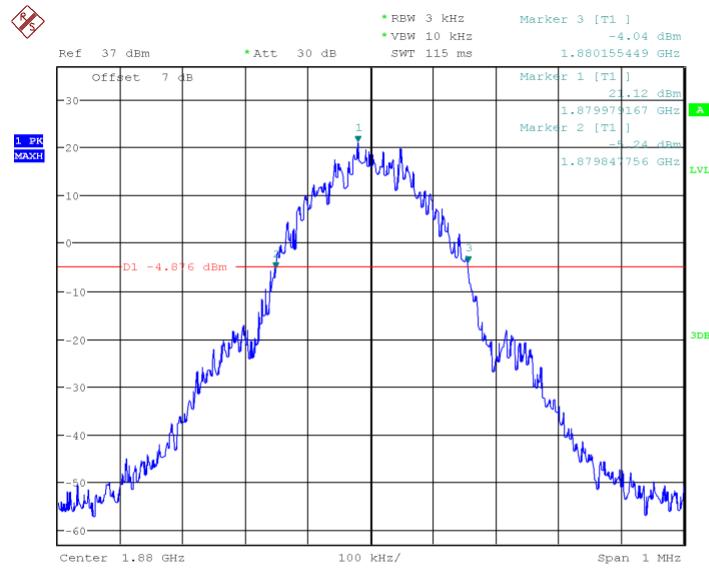


Date: 6.AUG.2015 17:02:41

### Channel 661- Emission Bandwidth (-26dBc BW)

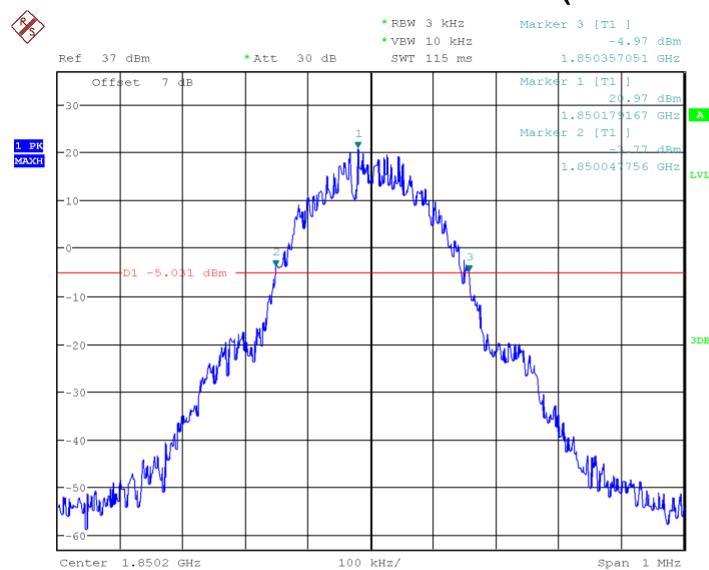

Date: 6.AUG.2015 17:03:04

### Channel512- Emission Bandwidth (-26dBc BW)

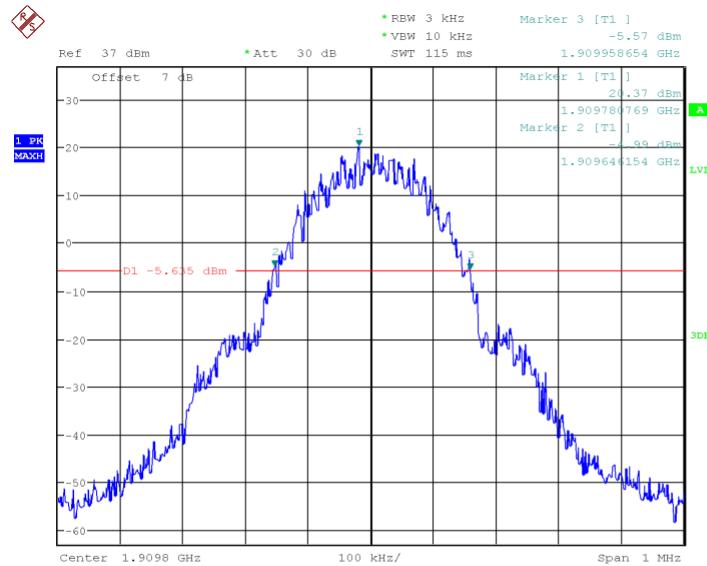


Date: 6.AUG.2015 17:03:29


**Channel 810- Emission Bandwidth (-26dBc BW)**

WCDMA BAND II		
Test channel	Frequency (MHz)	–26dBc Emission Bandwidth(MHz)
Mid 9400	1880	4.663
Low 9262	1852.4	4.727
High 9538	1907.6	4.679
WCDMA BAND IV		
Test channel	Frequency (MHz)	–26dBc Emission Bandwidth(MHz)
Mid 1413	1732.6	4.875
Low 1312	1712.4	4.843
High 1513	1752.6	4.881
WCDMA BAND V		
Test channel	Frequency (MHz)	–26dBc Emission Bandwidth(MHz)
Mid 4183	836.6	4.647
Low 4132	826.4	4.679
High 4233	846.6	4.663

**Conclusion: PASS**

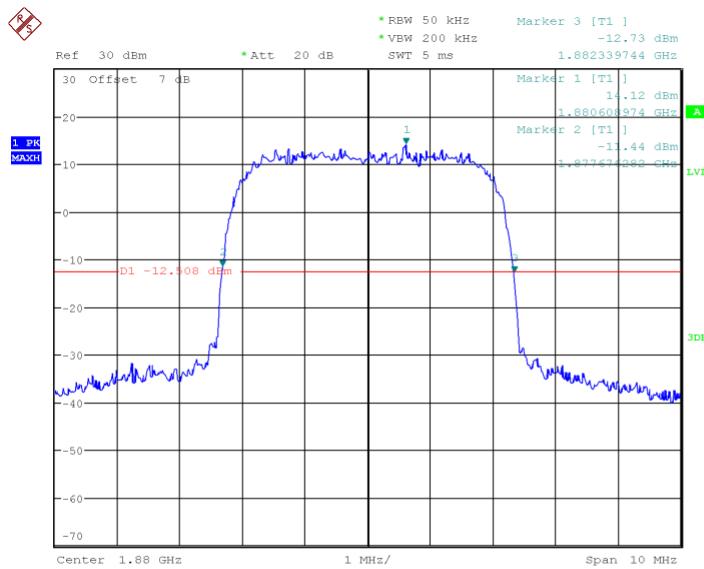
**WCDMA BAND II**


Date: 6.AUG.2015 19:28:45

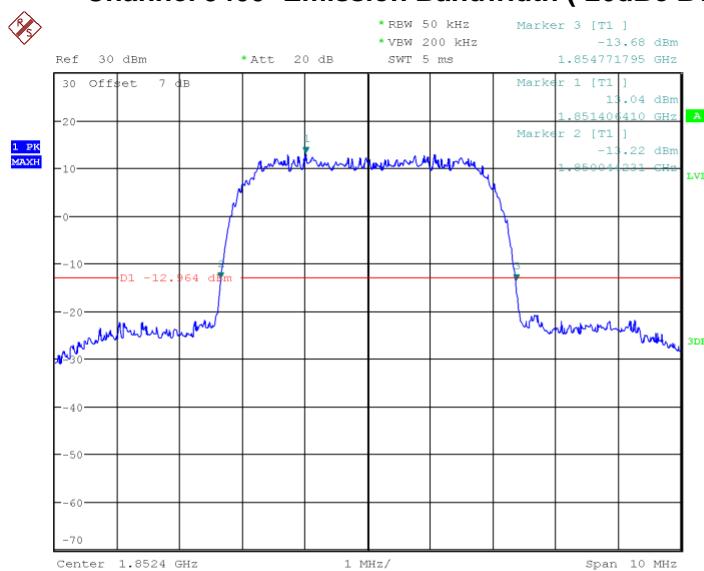**Channel 9400- Emission Bandwidth (-26dBc BW)**


Date: 6.AUG.2015 19:29:10


**Channel9262- Emission Bandwidth (-26dBc BW)**

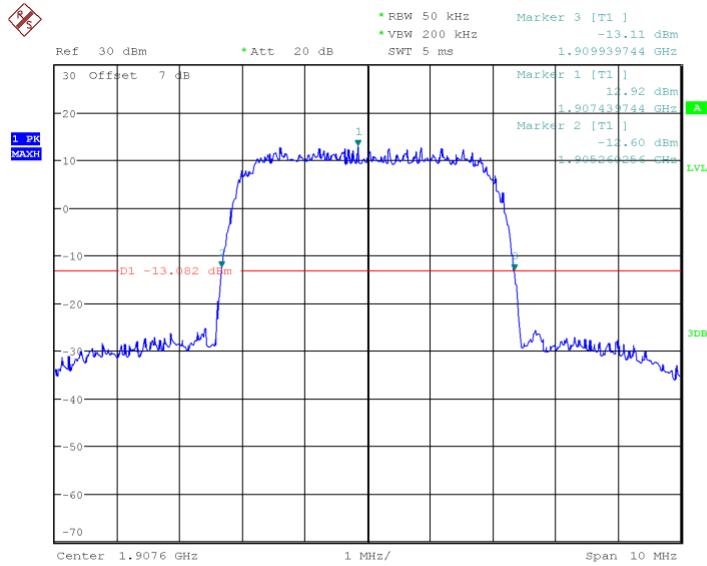

Date: 6.AUG.2015 19:29:36


### Channel 9538- Emission Bandwidth (-26dBc BW)

#### WCDMA BAND IV

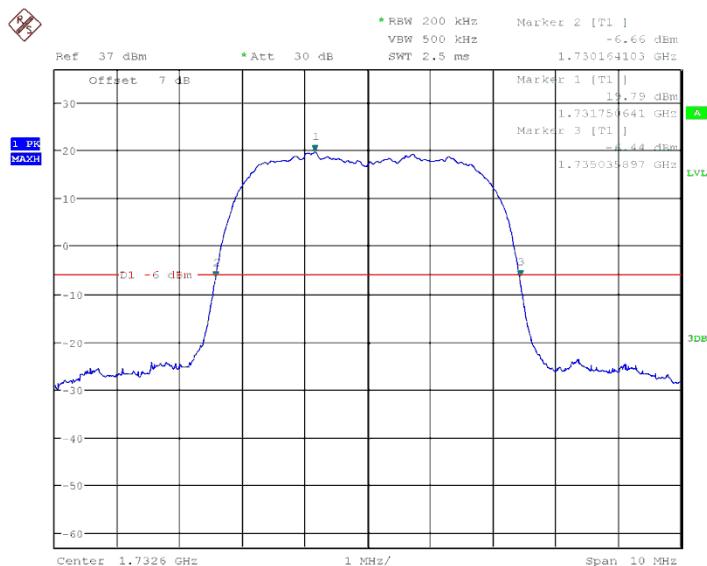


Date: 21.AUG.2015 13:49:35

### Channel 1413- Emission Bandwidth (-26dBc BW)

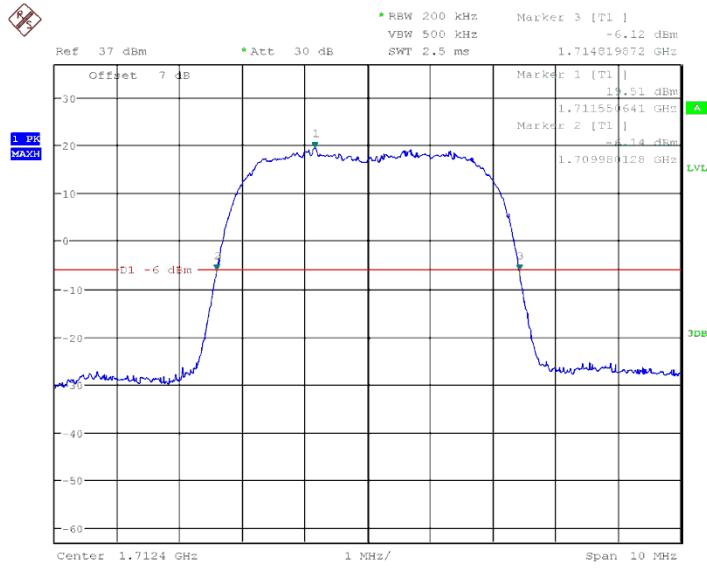

Date: 21.AUG.2015 13:52:27


### Channel 1312- Emission Bandwidth (-26dBc BW)

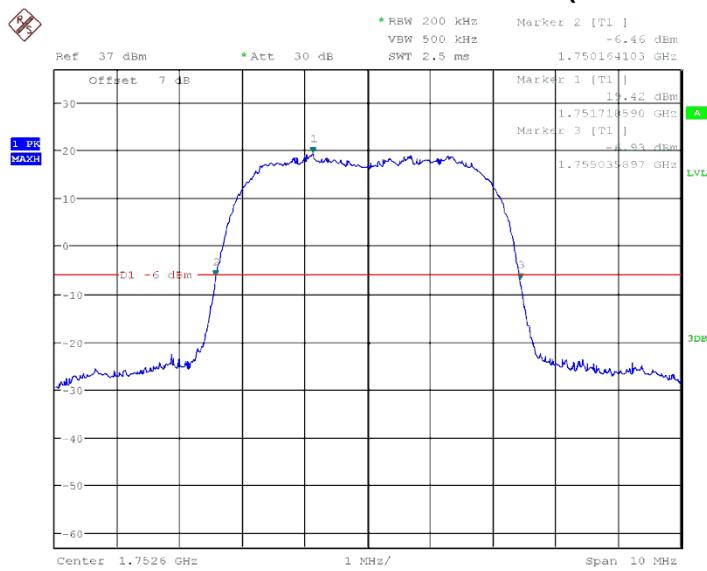

Date: 21.AUG.2015 13:53:42


### Channel 1513- Emission Bandwidth (-26dBc BW)

**WCDMA BAND V**

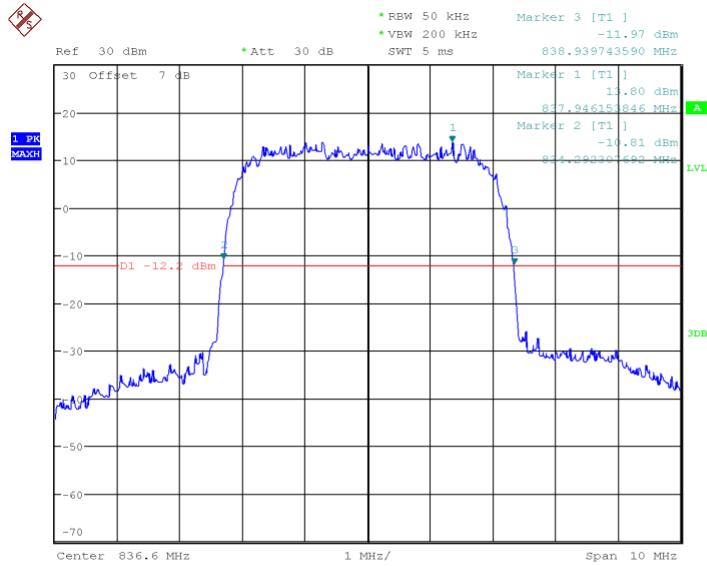


Date: 6.AUG.2015 19:30:24

### Channel 4183- Emission Bandwidth (-26dBc BW)

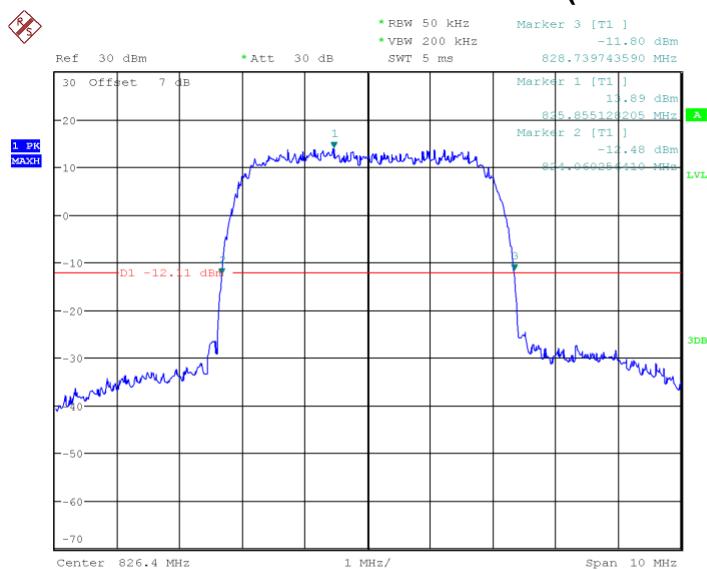

Date: 6.AUG.2015 19:30:49

### Channel4132- Emission Bandwidth (-26dBc BW)

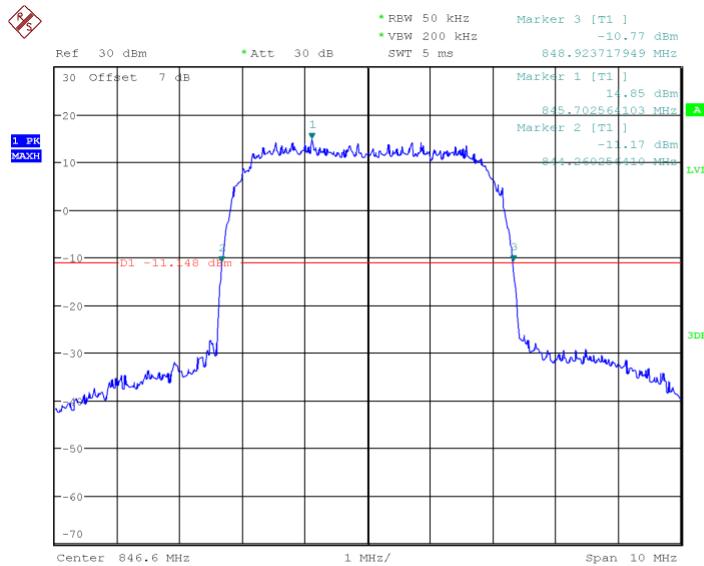

Date: 6.AUG.2015 19:31:15

### Channel 4233- Emission Bandwidth (-26dBc BW)

## ANNEX A.5. Band Edge at antenna terminals

Method of test measurements please refer to KDB971168 v02r01 clause 3.5


### A.5.1 Limit:

The magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specification in the instruction manual and/or alignment procedure, shall not be less than  $43+10\log(P)$  (Mean power in watts) dBc below the mean power output outside a license's frequency block(-13dBm).

### A.5.2 Test procedure:


1. The RF output of the transceiver was connected to a signal analyzer through appropriate attenuation.
2. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band
4. The limit line is derived from  $43+10\log(P)$  Db below the transmitter power  $P$ (Watts)  
 $=P(W)-[43+10\log(P)](Db)$   
 $=[30+10\log(P)](dBm)-[43+10\log(P)](Db)$   
 $=-13dBm$

## GSM 850

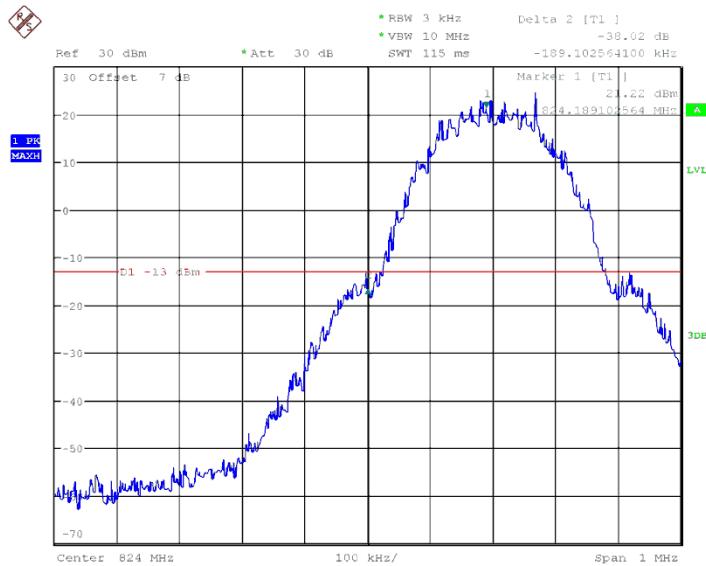

Date: 21.AUG.2015 14:21:24


### Channel 128- LOW BAND EDGE BLOCK

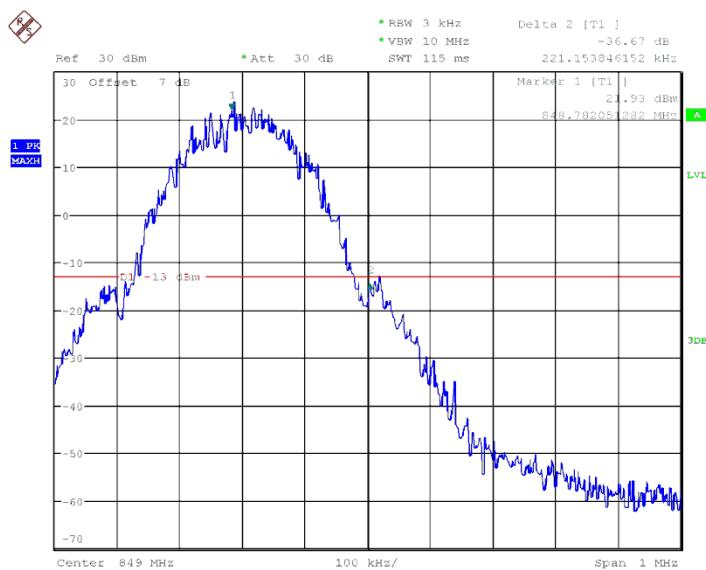

Date: 21.AUG.2015 14:25:03


### Channel 251- HIGH BAND EDGE BLOCK

## GPRS 850

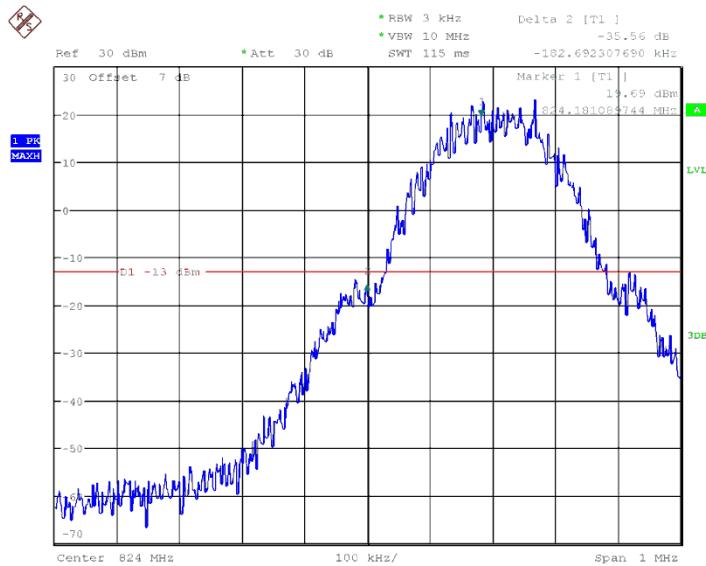

Date: 21.AUG.2015 14:30:40


### Channel 128- LOW BAND EDGE BLOCK

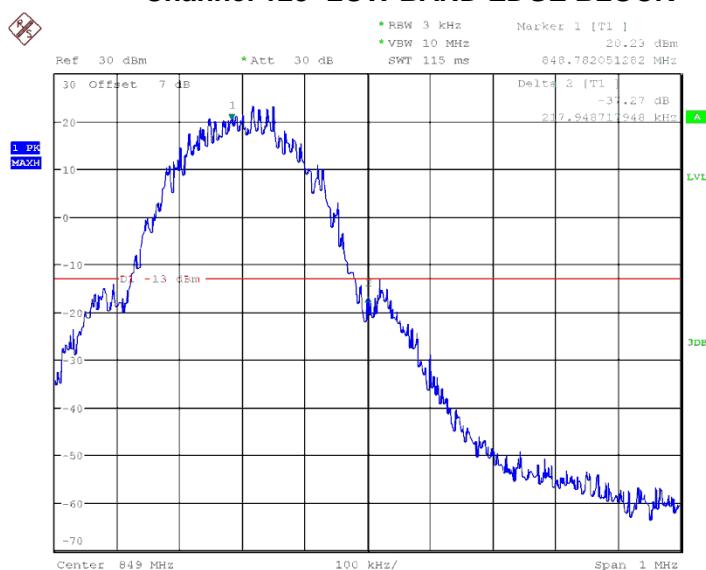

Date: 21.AUG.2015 14:31:53


### Channel 251- HIGH BAND EDGE BLOCK

## GSM 1900

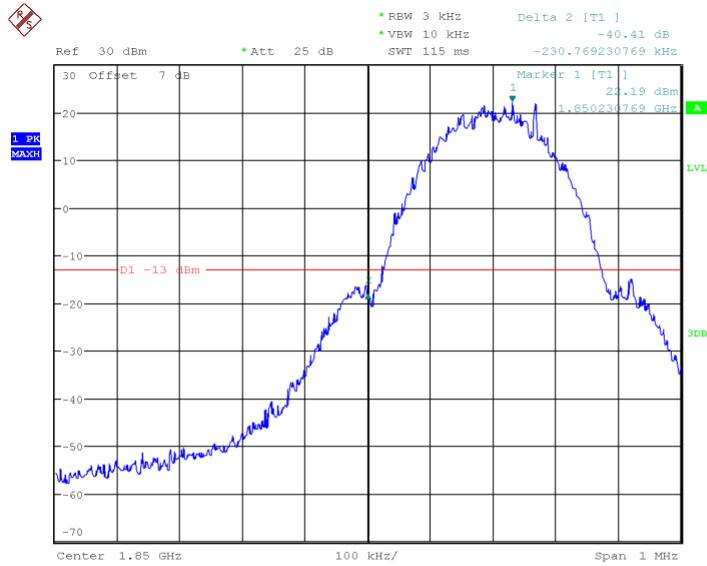

Date: 6.AUG.2015 17:44:26


### Channel 512- LOW BAND EDGE BLOCK

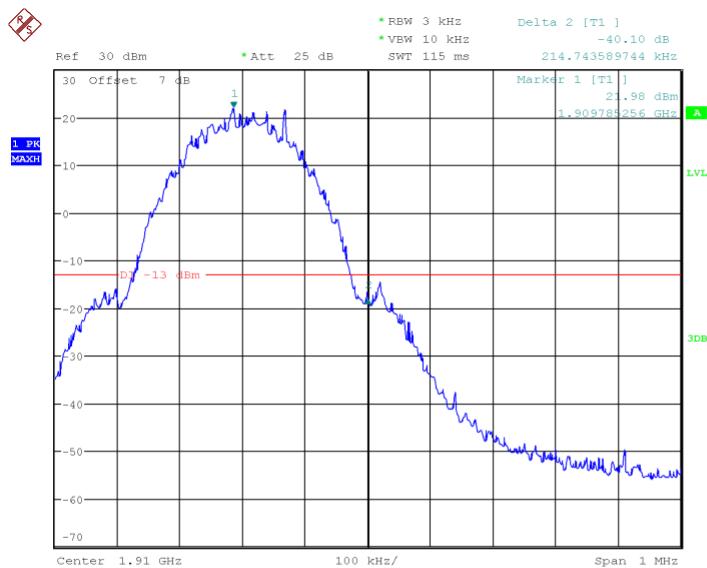

Date: 6.AUG.2015 17:46:47


### Channel 810- HIGH BAND EDGE BLOCK

## GPRS 1900

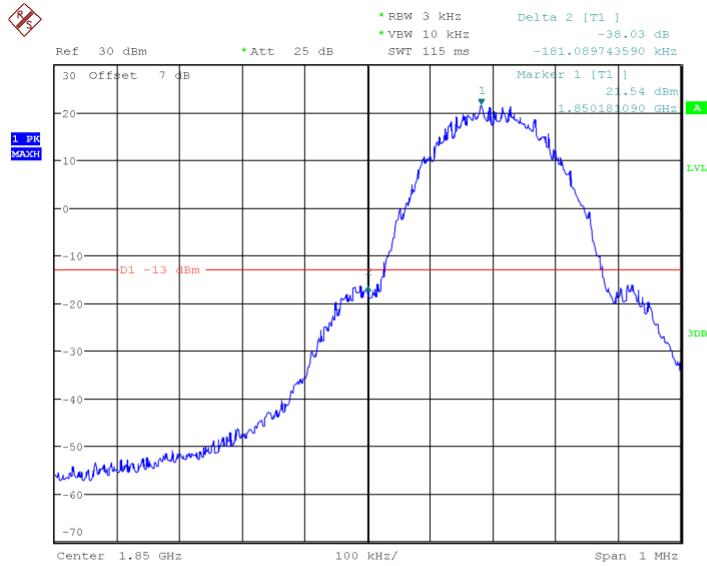

Date: 6.AUG.2015 17:50:34


### Channel 512- LOW BAND EDGE BLOCK

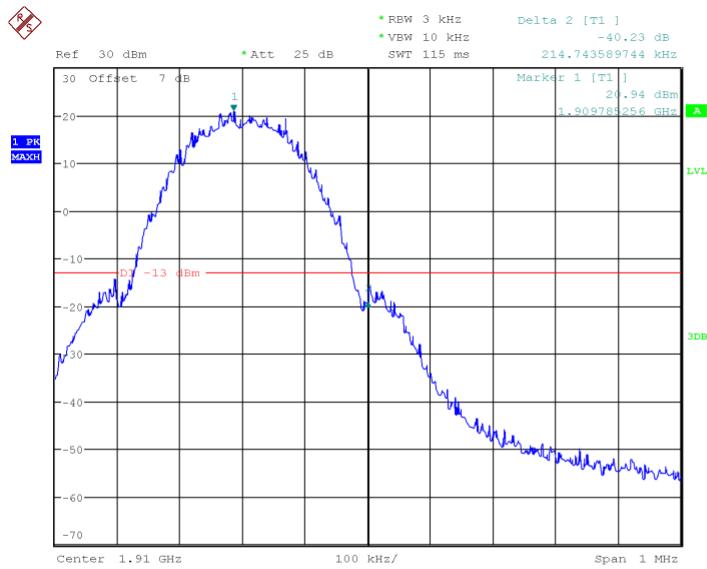

Date: 6.AUG.2015 17:52:52


### Channel 810- HIGH BAND EDGE BLOCK

## WCDMA BAND II

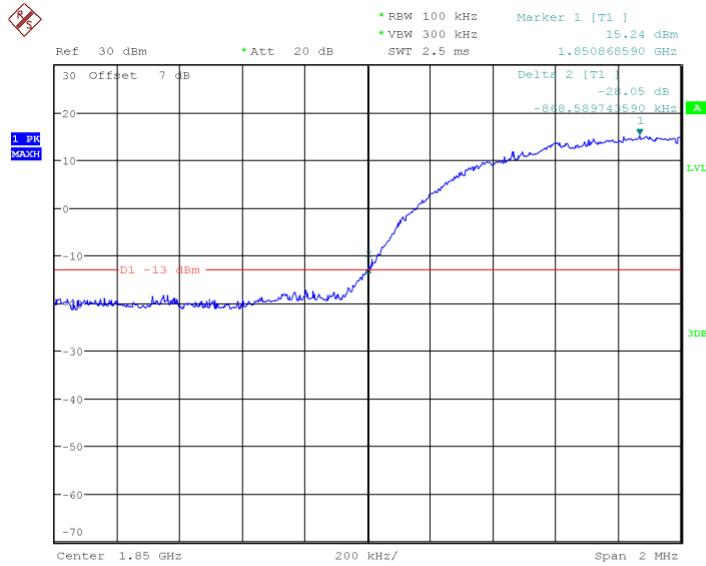

Date: 6.AUG.2015 19:34:10


### Channel 9262- LOW BAND EDGE BLOCK

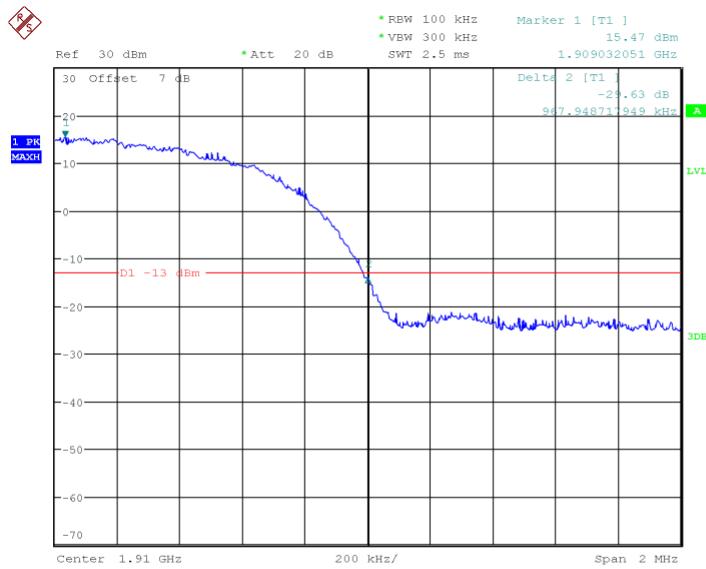

Date: 6.AUG.2015 19:35:01


### Channel 9538- HIGH BAND EDGE BLOCK

#### WCDMA BAND IV

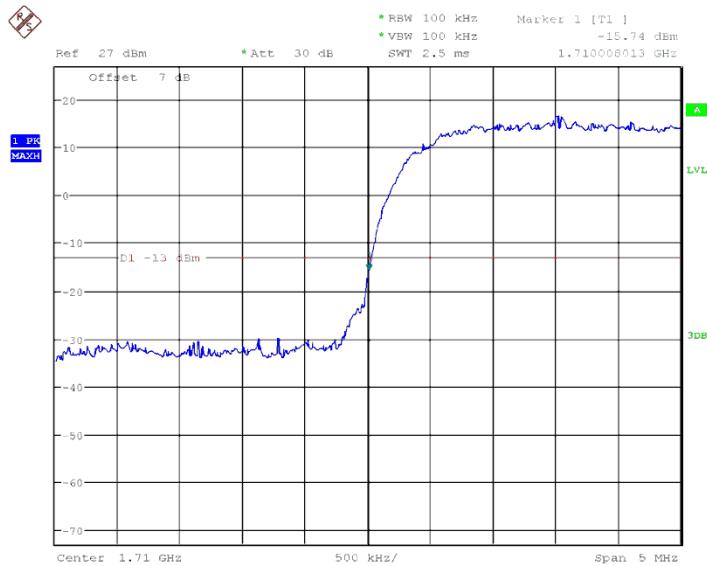


Date: 21.AUG.2015 13:57:10

### Channel 1312- LOW BAND EDGE BLOCK

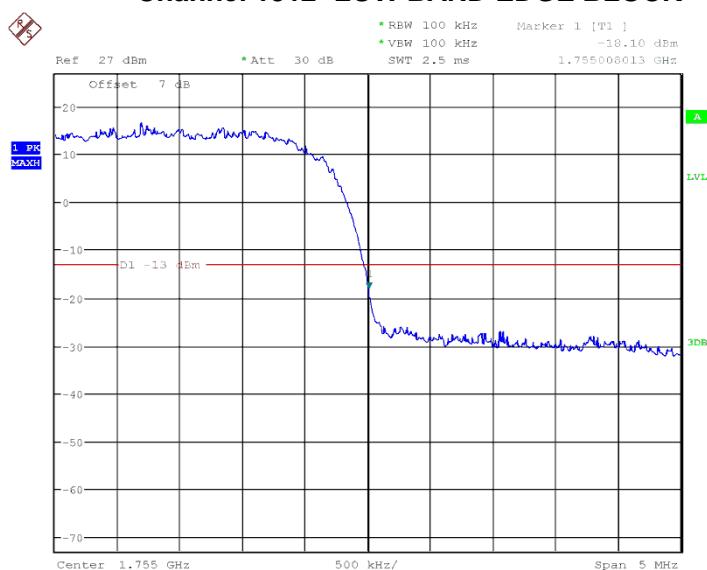


Date: 21.AUG.2015 13:58:21

### Channel 1513- HIGH BAND EDGE BLOCK

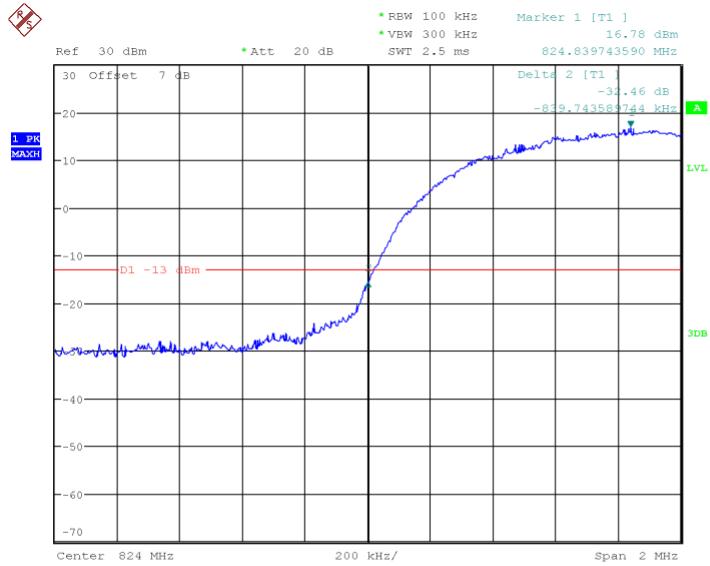

Date: 6.AUG.2015 19:36:14

### Channel4132- LOW BAND EDGE BLOCK

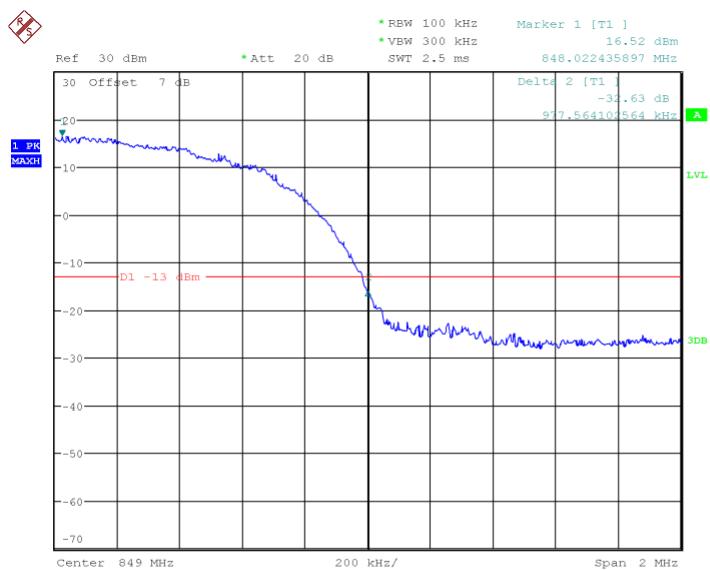

Date: 6.AUG.2015 19:37:05

### Channel 4233- HIGH BAND EDGE BLOCK

**Conclusion: PASS**

## ANNEX A.6. FREQUENCY STABILITY

Method of test measurements please refer to KDB971168 v02r01 clause 3.8

### **A.5.1. Method of Measurement and test procedures**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of GSM850, PCS1900, WCDMA BANDII and WCDMA BANDV, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### **A.5.2. Measurement Limit**

#### **A.5.2.1. For Hand carried battery powered equipment**

According to the JTC standard the GSM frequency stability of the carrier shall be accurate to within 2.5ppm of the received frequency from the base station. And the WCDMA is 2.5ppm. This accuracy is sufficient to meet Sec.24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.35VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages was varied from 85% to 115%.

**A.5.2.2. For equipment powered by primary supply voltage**

According to the JTC standard the GSM frequency stability of the carrier shall be accurate to within 0.1ppm of the received frequency from the base station. And the WCDMA is 2.5ppm. This accuracy is sufficient to meet Sec.24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

**A.5.3 Test results****GSM850Mid Channel/fc(MHz) 189/836.4****Frequency Error VS Temperature**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	23	2091
3.8	-20	22	2091
3.8	-10	25	2091
3.8	0	24	2091
3.8	10	25	2091
3.8	20	24	2091
3.8	30	25	2091
3.8	40	25	2091
3.8	50	26	2091

**Frequency Error VS Voltage**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.6	25	24	2091
3.8	25	25	2091
4.2	25	23	2091

**PCS1900 Mid Channel/fc(MHz) 661/1880****Frequency Error VS Temperature**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	53	4700
3.8	-20	52	4700
3.8	-10	51	4700
3.8	0	53	4700
3.8	10	52	4700
3.8	20	51	4700
3.8	30	52	4700
3.8	40	53	4700
3.8	50	52	4700

**Frequency Error VS Voltage**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.6	25	53	4700
3.8	25	52	4700
4.2	25	51	4700

**WCDMA BAND II Mid Channel/fc(MHz) 9400 /1880****Frequency Error VS Temperature**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	-14	4700
3.8	-20	-12	4700
3.8	-10	-13	4700
3.8	0	-14	4700
3.8	10	-13	4700
3.8	20	-14	4700
3.8	30	-14	4700
3.8	40	-14	4700
3.8	50	-15	4700

**Frequency Error VS Voltage**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.6	25	-13	4700
3.8	25	-14	4700
4.2	25	-13	4700

**WCDMA BAND IV Mid Channel/fc(MHz) 1413/1732.6****Frequency Error VS Temperature**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	0	4331.5
3.8	-20	-1	4331.5
3.8	-10	-3	4331.5
3.8	0	-3	4331.5
3.8	10	-2	4331.5
3.8	20	-1	4331.5
3.8	30	-2	4331.5

3.8	40	-1	4331.5
3.8	50	-3	4331.5

**Frequency Error VS Voltage**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.6	25	-2	4331.5
3.8	25	-1	4331.5
4.2	25	-3	4331.5

**WCDMA BAND V Mid Channel/fc(MHz) 4183/836.6****Frequency Error VS Temperature**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	-10	2091.5
3.8	-20	-11	2091.5
3.8	-10	-10	2091.5
3.8	0	-12	2091.5
3.8	10	-11	2091.5
3.8	20	-11	2091.5
3.8	30	-12	2091.5
3.8	40	-11	2091.5
3.8	50	-11	2091.5

**Frequency Error VS Voltage**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.6	25	-11	2091.5
3.8	25	-11	2091.5
4.2	25	-10	2091.5

**Conclusion: PASS**

## ANNEX A.7. CONDUCTED SPURIOUS EMISSION

### A.7.1. GSM Measurement Method and test procedures

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 10 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:  
The trace mode is set to MaxHold to get the highest signal at each frequency;  
Wait 25 seconds;Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

#### **GSM 850 Transmitter**

Channel	Frequency(MHz)
128	824.2
190	836.6
251	848.8

#### **PCS1900 Transmitter**

Channel	Frequency(MHz)
512	1850.2
661	1880.0
810	1909.8

#### A.7.1.1. Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### A7.1.2. Measurement result

**Spurious emission limit -13dBm.**


**Note: peak above the limit line is the carrier frequency.**

#### A7.1.2.1. GSM850

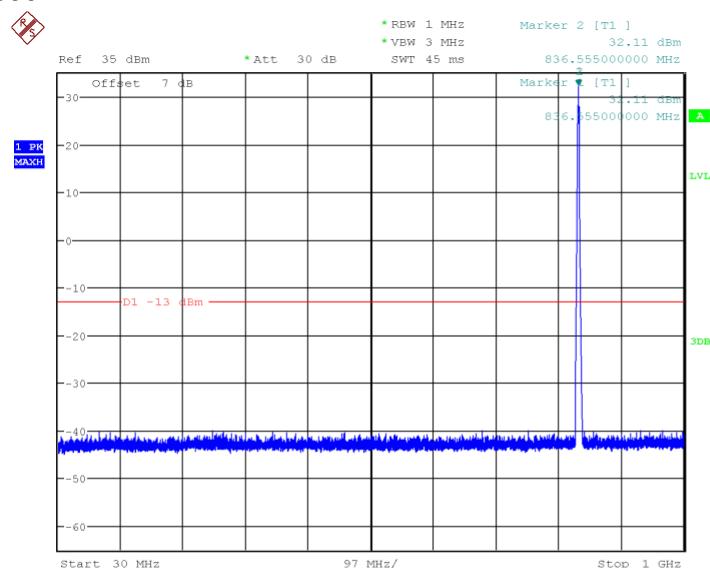


Date: 6.AUG.2015 16:11:04

**Channel 128: 30MHz~1GHz**

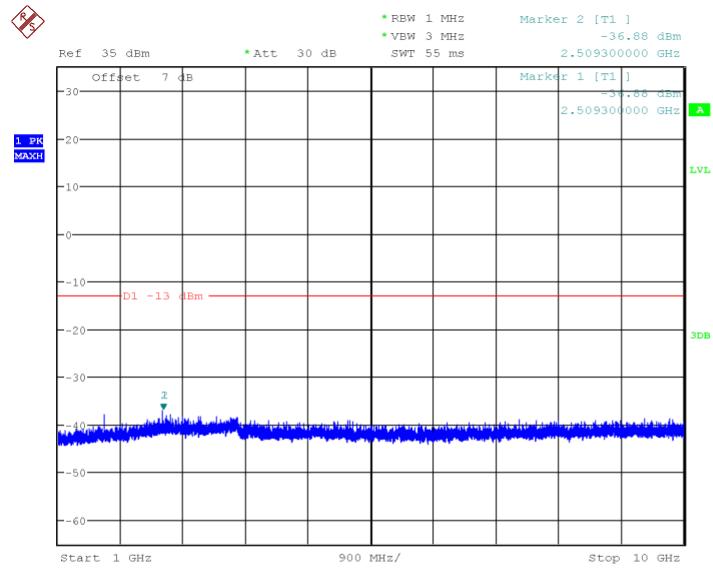


Date: 6.AUG.2015 16:20:18

### Channel 128: 1GHz~10GHz

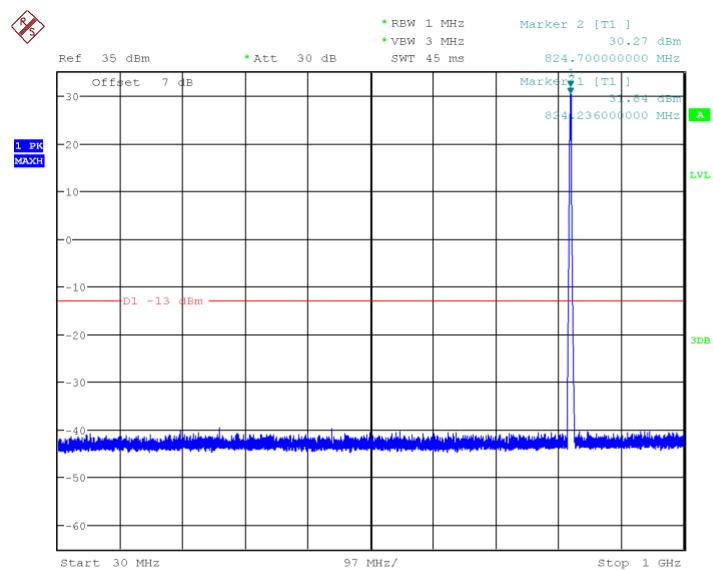


Date: 6.AUG.2015 16:11:41

### Channel 190: 30MHz~1GHz

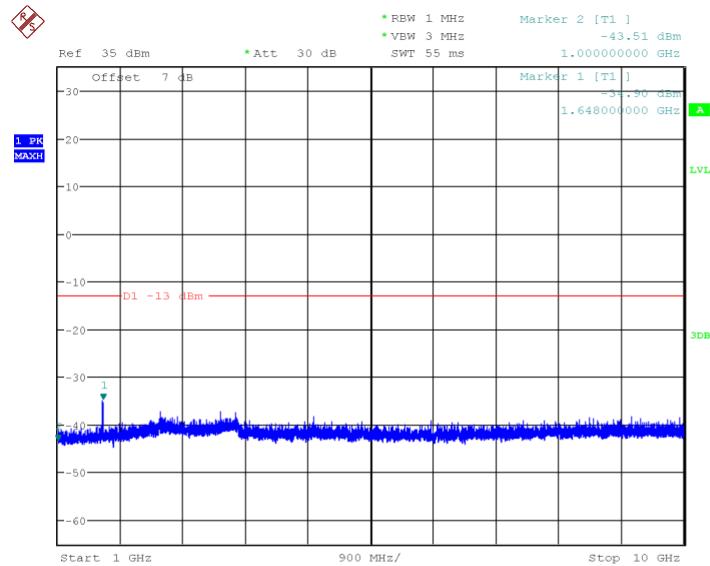


Date: 6.AUG.2015 16:20:55

### Channel 190: 1GHz~10GHz

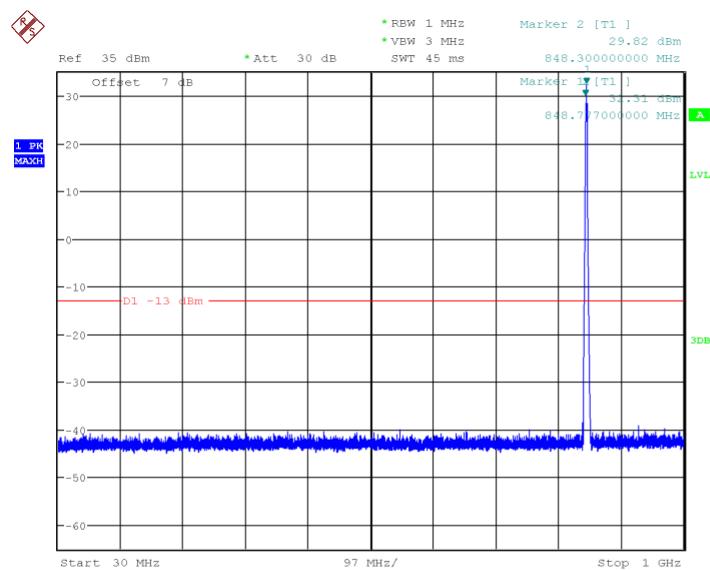

Date: 6.AUG.2015 16:12:19


### Channel 251: 30MHz~1GHz

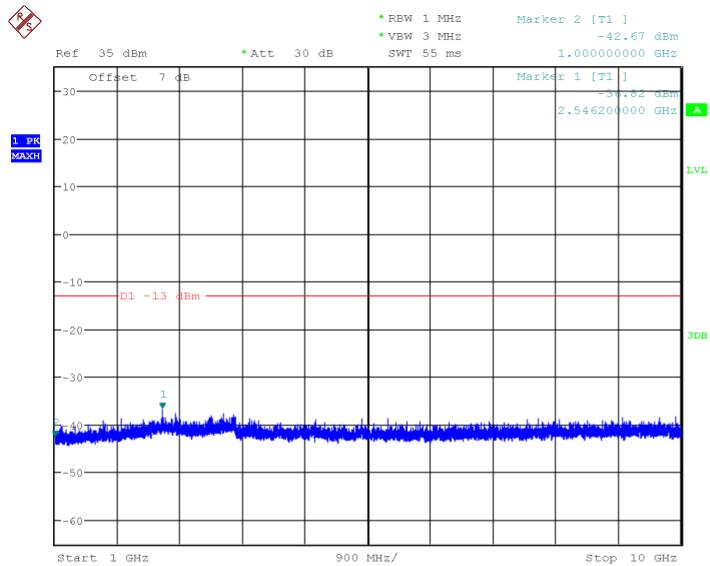

Date: 6.AUG.2015 16:21:33


### Channel 251: 1GHz~10GHz

**GSM1900**

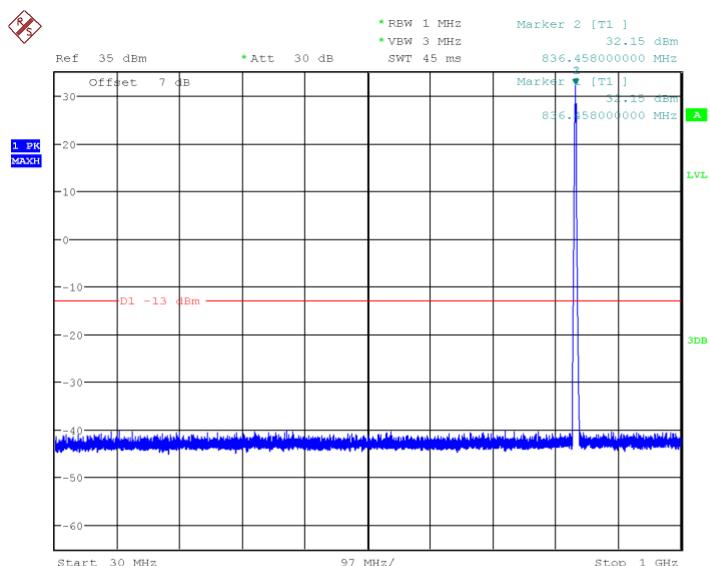


Date: 6.AUG.2015 16:14:13

### Channel 512: 30MHz~1GHz

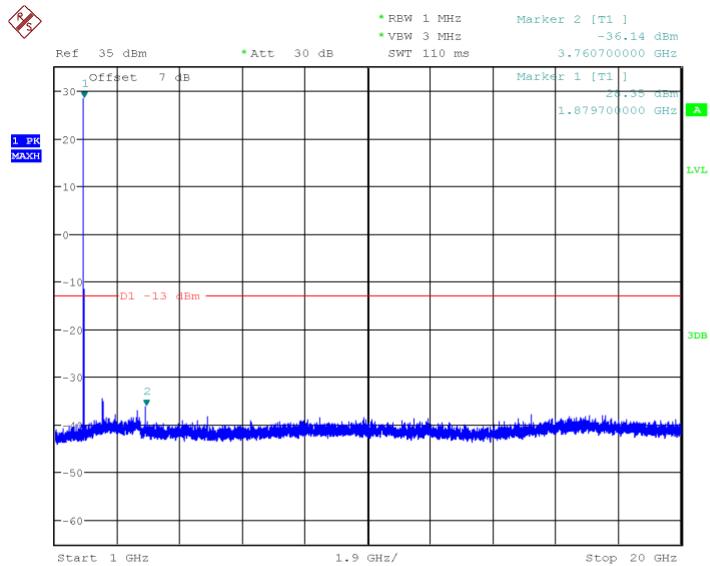


Date: 6.AUG.2015 18:38:53

### Channel 512: 1GHz~20GHz

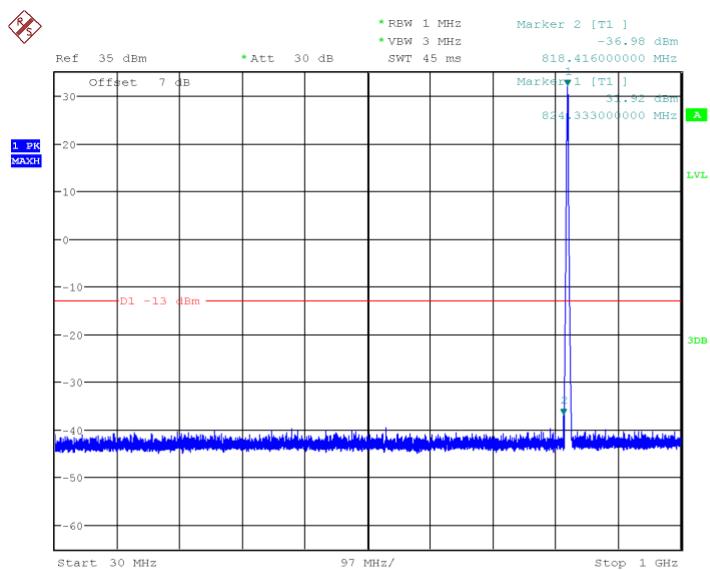


Date: 6.AUG.2015 16:14:48

### Channel 661: 30MHz~1GHz

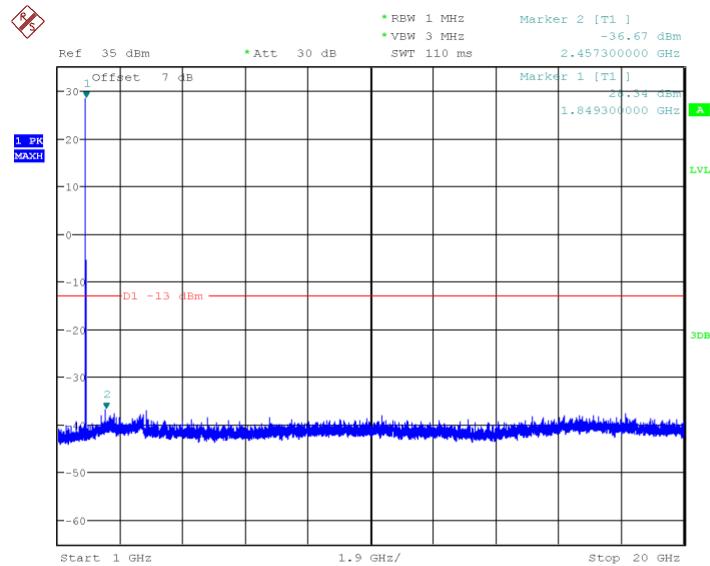


Date: 6.AUG.2015 18:39:30

### Channel 661: 1GHz~20GHz

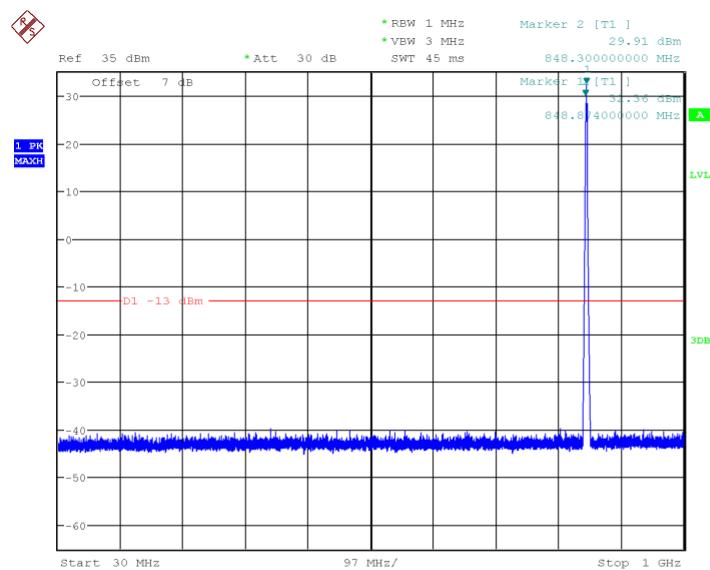

Date: 6.AUG.2015 16:15:22

### Channel 810: 30MHz~1GHz

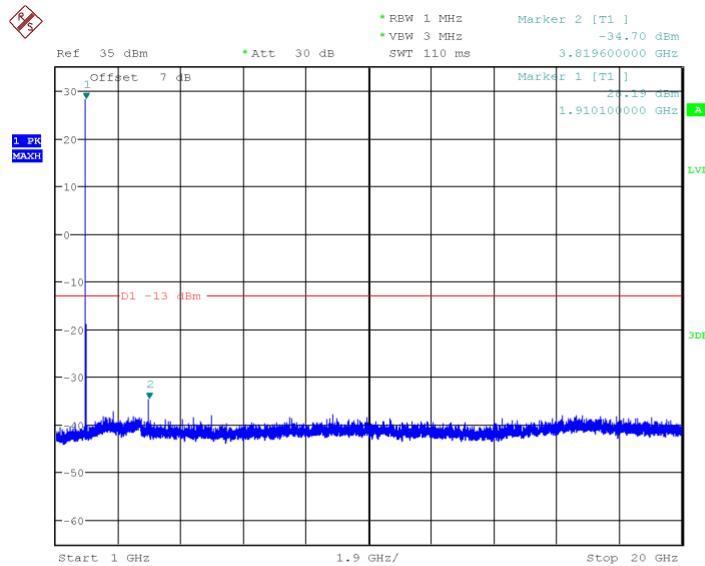

Date: 6.AUG.2015 18:40:08

**Channel 810: 1GHz~20GHz****Conclusion: PASS****A7.2. WCDMA Measurement Method and test procedures**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band V, data taken from 30 MHz to 10GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:  
The trace mode is set to MaxHold to get the highest signal at each frequency;  
Wait 25 seconds;  
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

**WCDMA Band II Transmitter**

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00

9538	1907.60
------	---------

**WCDMA Band IV Transmitter**

Channel	Frequency (MHz)
1312	1712.4
1413	1732.6
1513	1752.6

**WCDMA Band V Transmitter**

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

**A 7.2.1. Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**A 7.2.2. Measurement result**

**Spurious emission limit -13dBm.**


**Note: peak above the limit line is the carrier frequency.**

**A 7.2.2.1. WCDMA Band II**

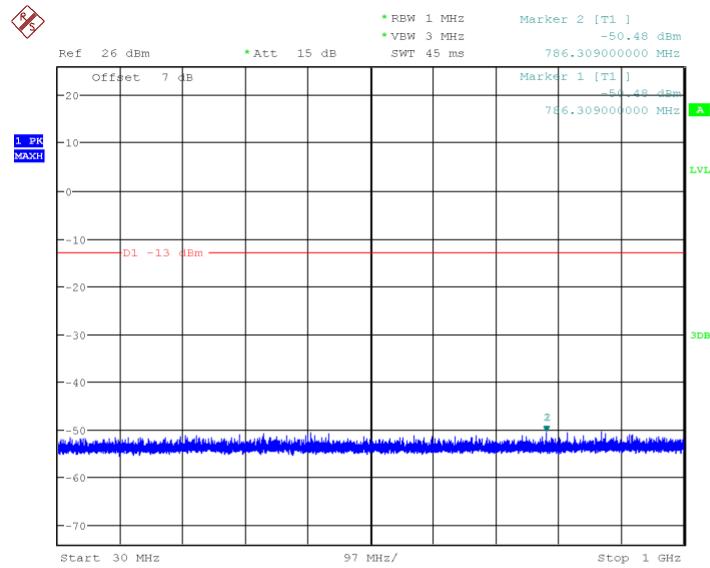


Date: 6.AUG.2015 19:44:25

### Channel 9262: 30MHz~1GHz

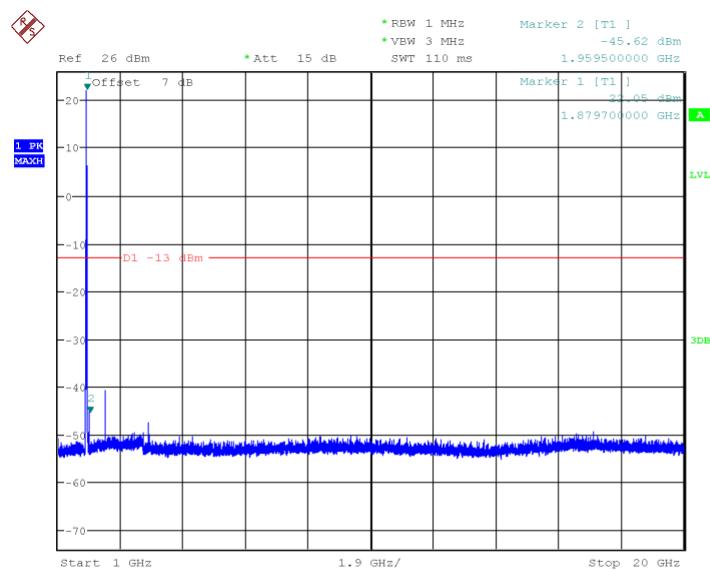


Date: 6.AUG.2015 20:03:27

### Channel 9262:1GHz~20GHz

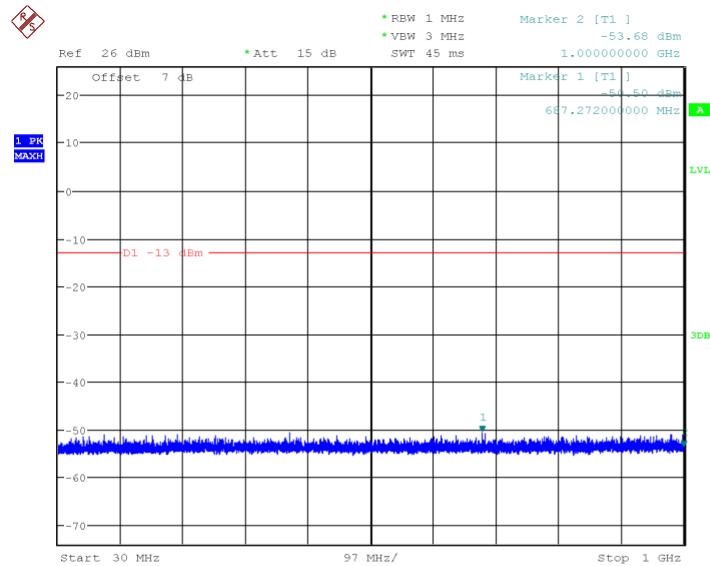


Date: 6.AUG.2015 19:45:02

### Channel 9400: 30MHz~1GHz

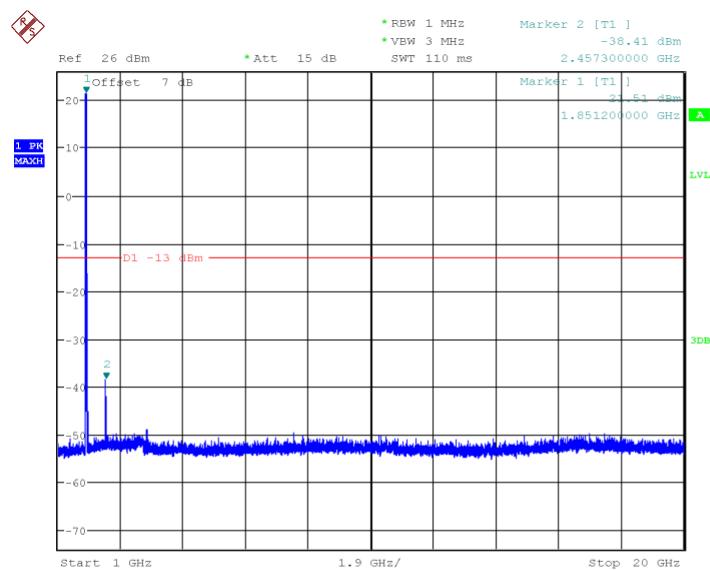


Date: 6.AUG.2015 20:04:04

### Channel 9400:1GHz~20GHz

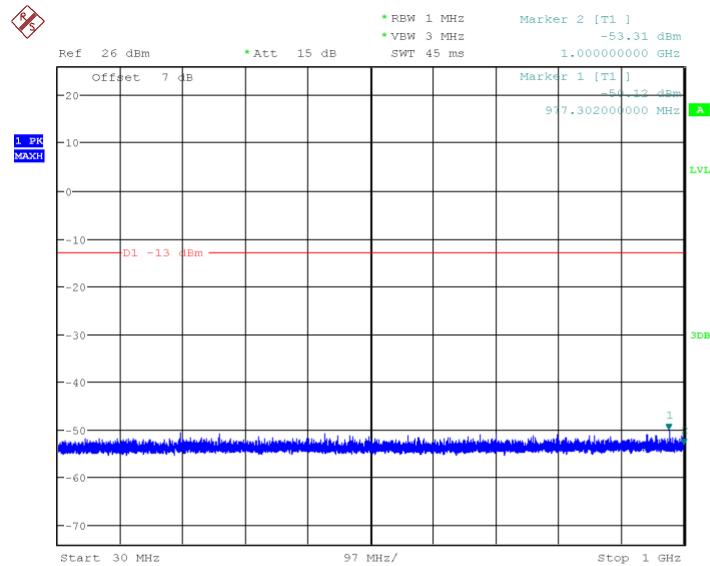

Date: 6.AUG.2015 19:45:40


### Channel 9538: 30MHz~1GHz

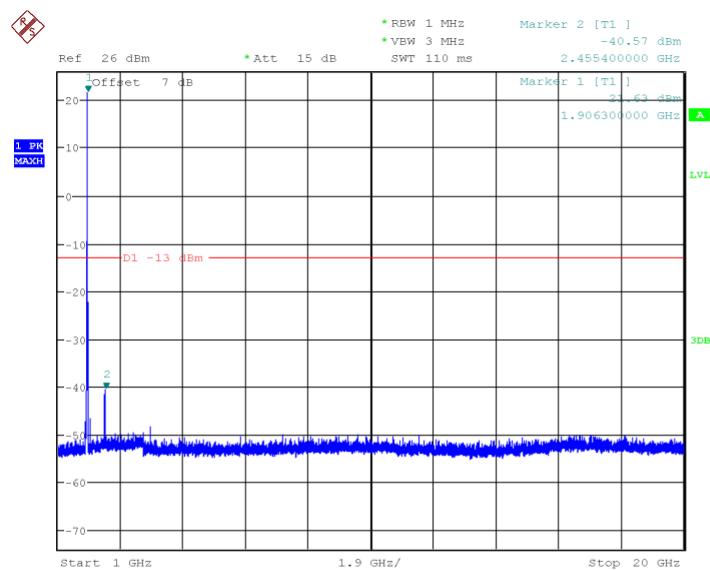

Date: 6.AUG.2015 20:04:41


### Channel 9538:1GHz~20GHz

#### A 7.2.2.2. WCDMA Band IV

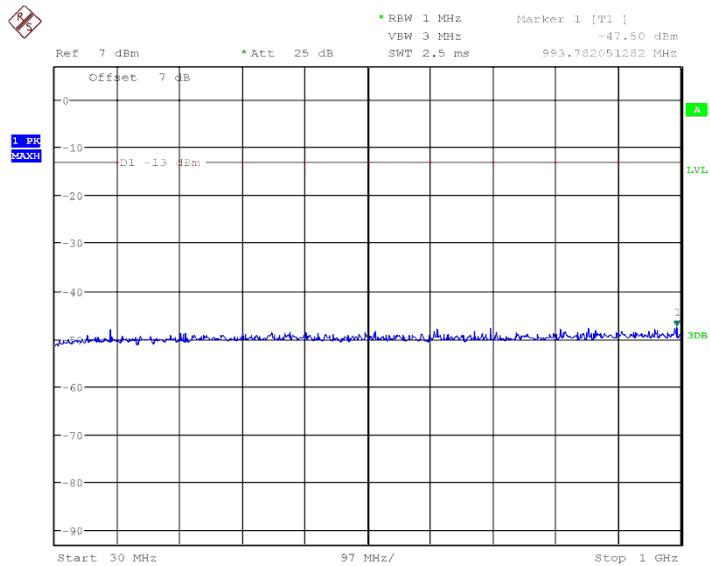


Date: 9.JUL.2015 14:06:32

### Channel 1312: 30MHz~1GHz

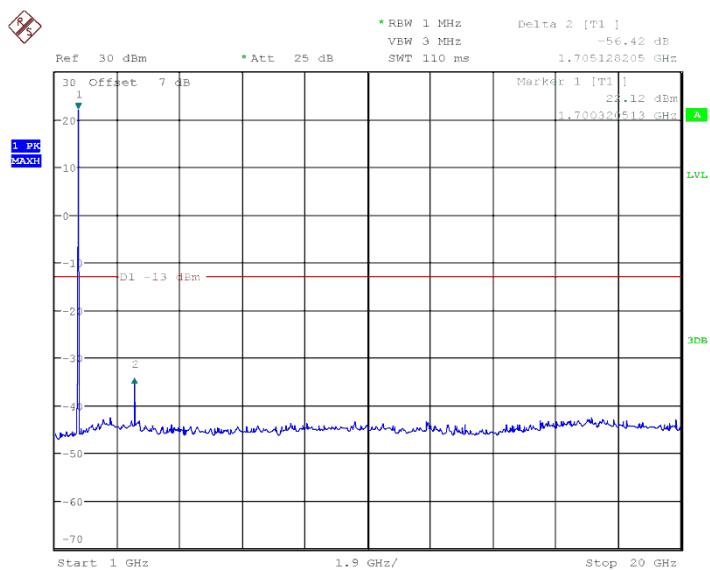


Date: 9.JUL.2015 14:07:48

### Channel 1312:1GHz~20GHz

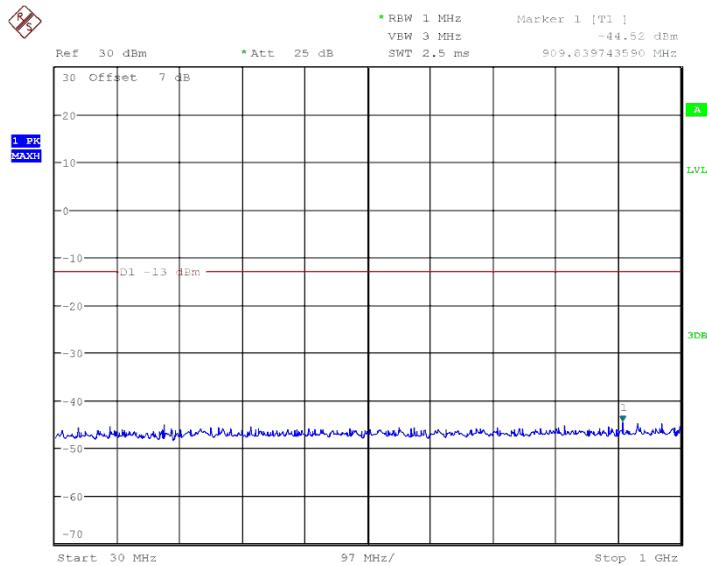


Date: 9.JUL.2015 14:08:43

### Channel 1413: 30MHz~1GHz

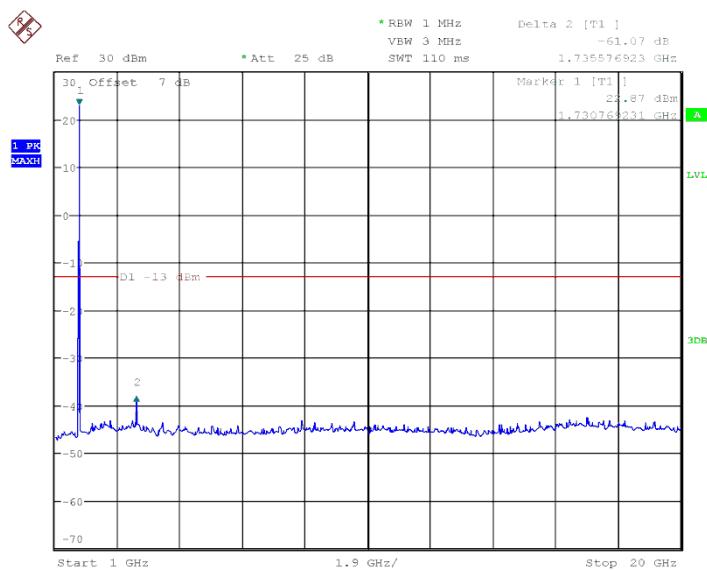


Date: 9.JUL.2015 14:09:11

### Channel 1413:1GHz~20GHz

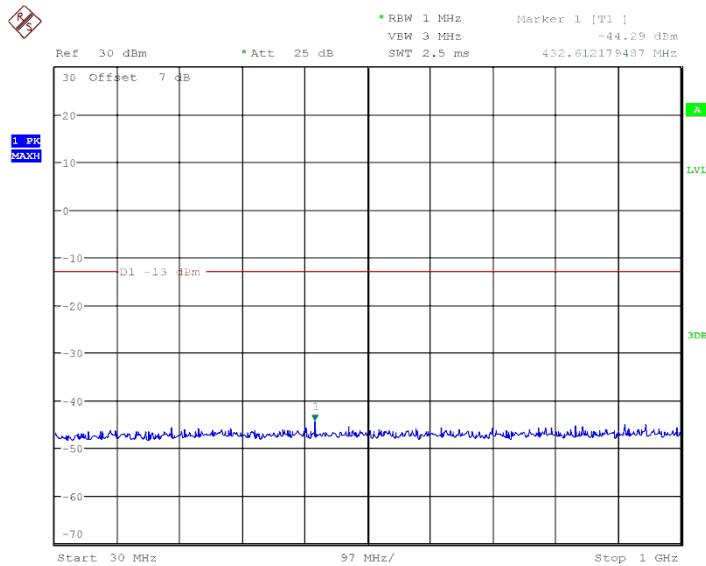

Date: 9.JUL.2015 14:09:46


## Channel 1513: 30MHz~1GHz

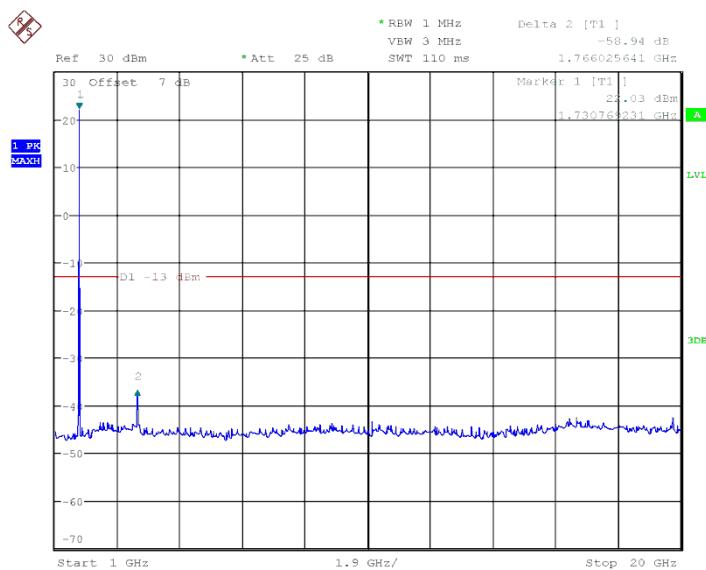

Date: 9.JUL.2015 14:10:09


## Channel 1513:1GHz~20GHz

### A 7.2.2.2. WCDMA Band V

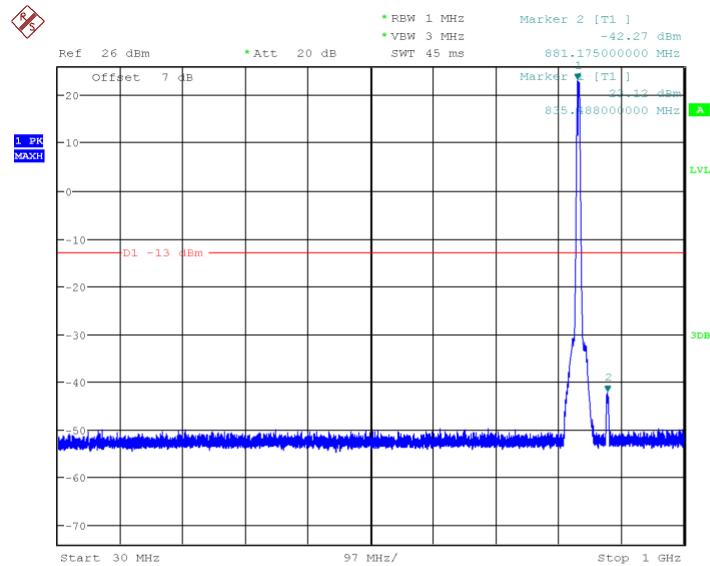


Date: 6.AUG.2015 19:46:43

### Channel 4132: 30MHz~1GHz

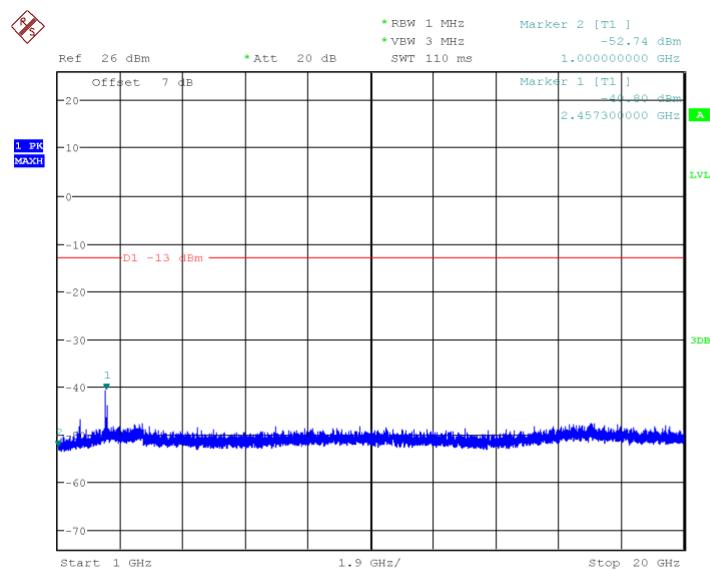


Date: 6.AUG.2015 20:05:44

### Channel 4132:1GHz~20GHz

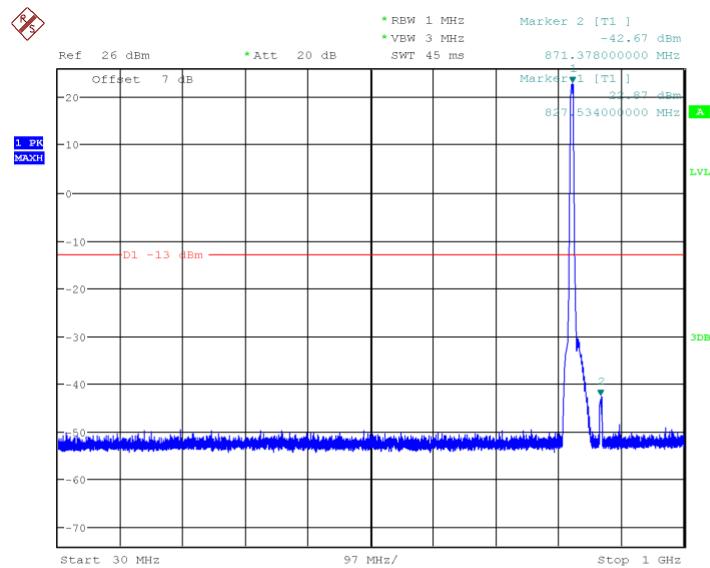


Date: 6.AUG.2015 19:47:20

### Channel 4183: 30MHz~1GHz

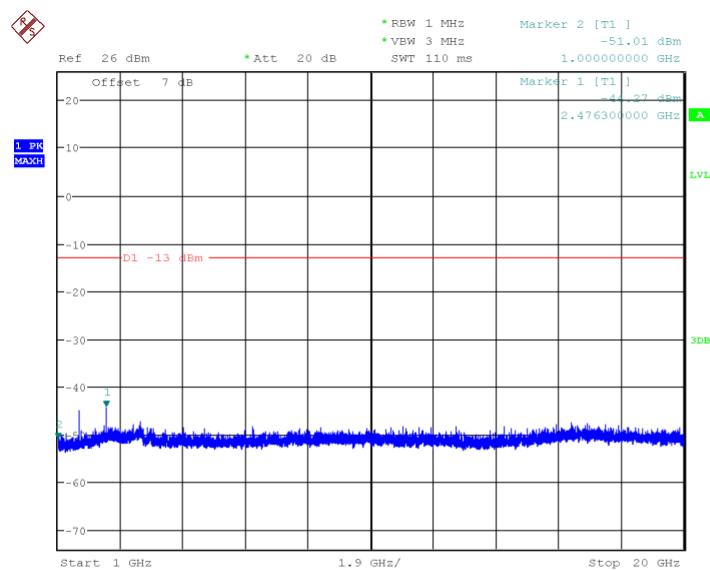


Date: 6.AUG.2015 20:06:21

### Channel 4183:1GHz~20GHz

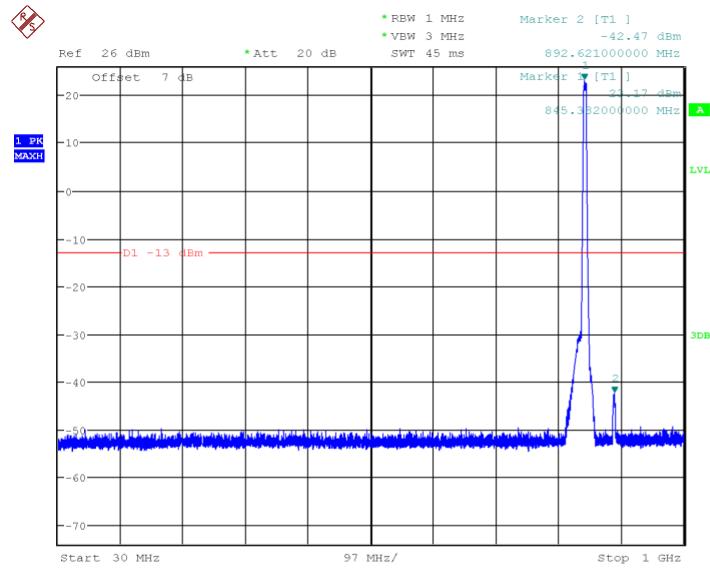

Date: 6.AUG.2015 19:47:58

### Channel 4233: 30MHz~1GHz

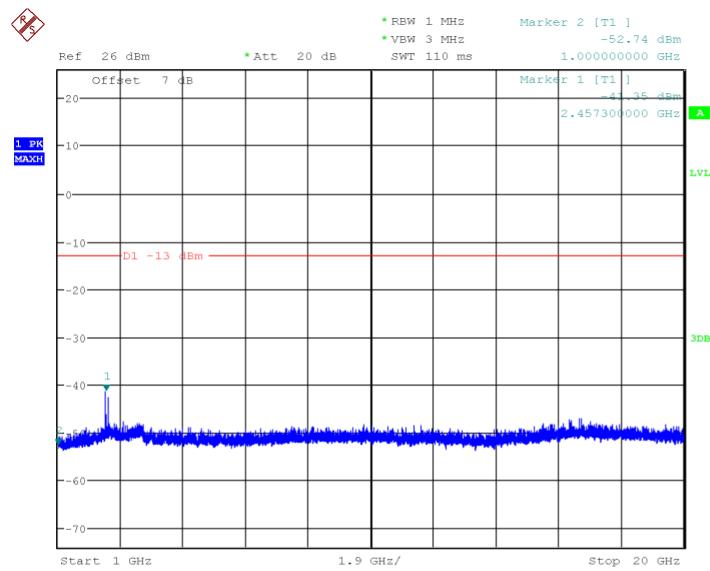

Date: 6.AUG.2015 20:06:58

### Channel 4233:1GHz~20GHz

**Conclusion: PASS**

## ANNEX A.8. RADIATED

### A.8.1. ERP

#### A.8.1.1. GSM ERP

##### A.8.1.1.1. Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


##### A.8.1.1.2. Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

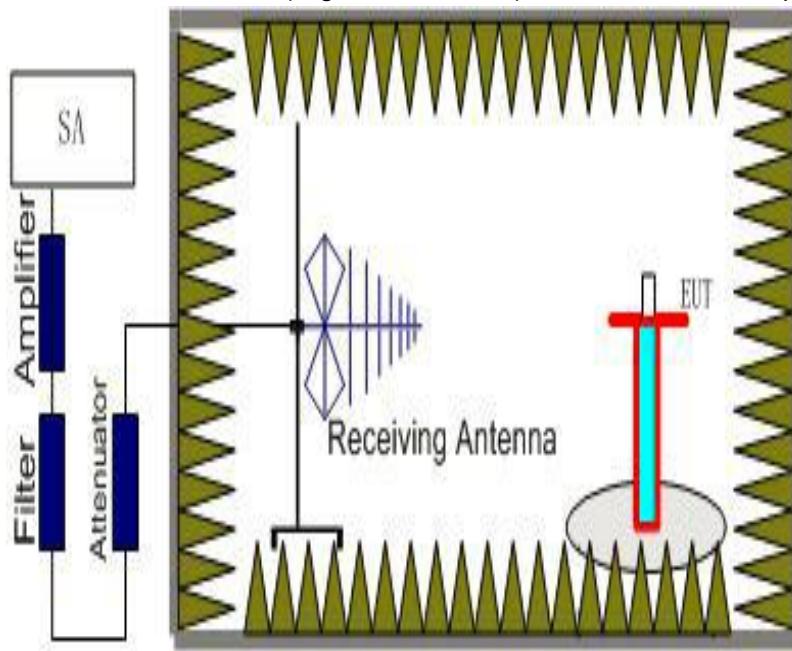

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

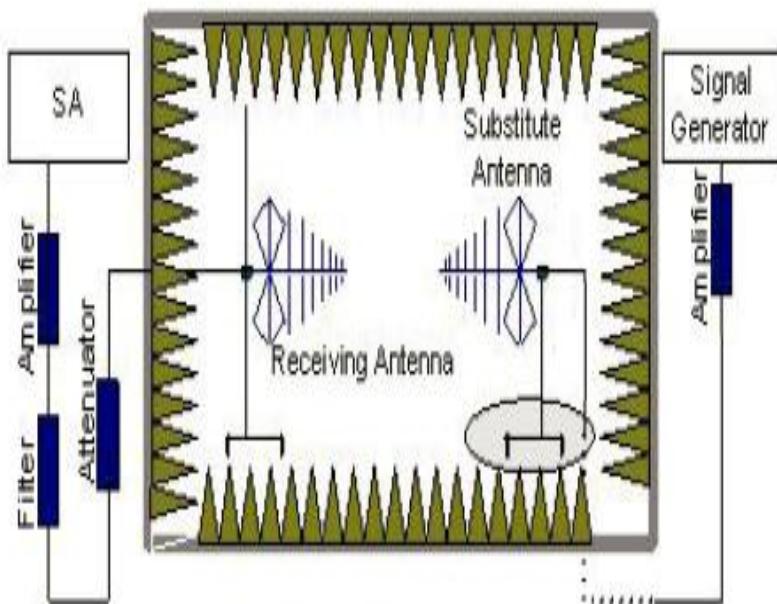

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

#### A.8.1.1.3 GSM 850-ERP 22.913(a)

##### A.8.1.1.3.1 Limits

	Power Step	Burst Peak ERP (dBm)
GSM	5	$\leq 38.45\text{dBm}$ (7W)
GPRS	3	$\leq 38.45\text{dBm}$ (7W)
EDGE	6	$\leq 38.45\text{dBm}$ (7W)

##### A.8.1.1.3.2 Measurement result

**GSM(GMSK)**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain (dBd)	PeakERP (dBm)	Polarization
824.2	-7.468	3.1	37	3.11	29.542	H
836.6	-9.403	3.1	37	3.11	27.507	H
848.8	-7.577	3.1	37	3.11	29.333	H

**GPRS(GMSK)**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dBd)	PeakERP(dBm)	Polarization
824.2	-7.587	3.1	37	3.11	29.423	H
836.6	-7.48	3.1	37	3.11	29.43	H
848.8	-6.547	3.1	37	3.11	30.363	H

**Frequency: 824.2MHz**

$$\text{Peak ERP(dBm)} = \text{PMea}(-7.468\text{dBm}) - \text{Pcl}(3.1\text{dB}) + \text{PAG}(37\text{dB}) + \text{Ga}(3.11\text{dBd}) \\ = 29.542\text{dBm}$$

**Note: ANALYZER SETTINGS: RBW = VBW = 3MHz**
**A.8.1.1.4 PCS 1900-EIRP 24.232(c)**
**A.8.1.1.4.1 Limits**

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
EDGE	5	≤33dBm (2W)
GPRS	3	≤33dBm (2W)

**A.8.1.1.4.2 Measurement result**
**GSM(GMSK)**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1850.2	-14.04	4.6	36.8	4.7	25.01	H
1880.0	-10.113	4.6	35.6	4.7	25.587	H
1909.8	-12.771	4.7	35.9	4.5	25.079	V

**GPRS(GMSK)**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1850.2	-14.446	4.6	36.8	4.7	24.604	H
1880.0	-10.426	4.6	35.6	4.7	25.274	H
1909.8	-12.771	4.7	35.9	4.5	25.079	H

**Frequency: 1850.2MHz**

**Peak EIRP(dBm)= PMea(-14.04dBm) - Pcl(4.6dB)+ PAg(36.8dB)**

**+Ga4.7dB)+2.15dBi=25.01dBm**

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

#### A.8.1.2. WCDMA EIRP

##### A.8.1.2.1. Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

##### A.8.1.2.2. Method of Measurement


The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

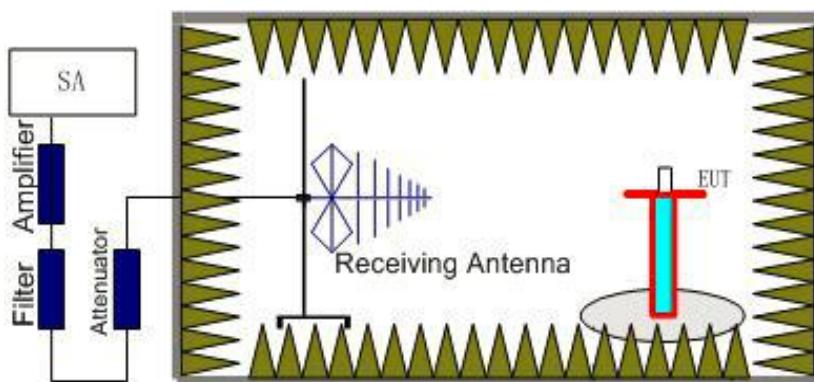

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).

3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

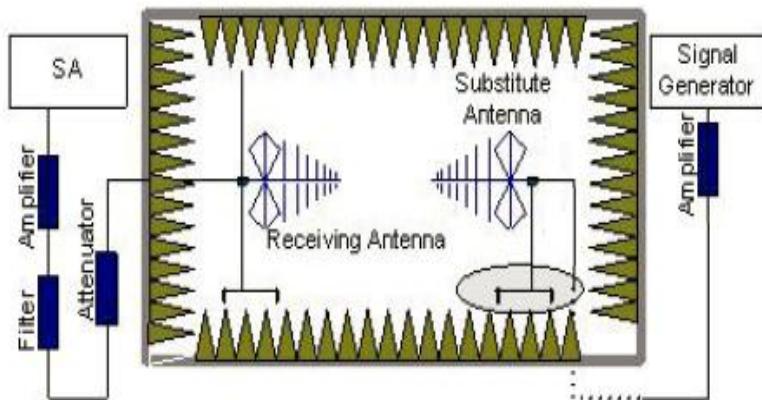

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

#### A.8.1.2.3 WCDMA Band II-EIRP

##### A.8.1.2.3.1 Limit

		Burst Peak EIRP (dBm)
WCDMA Band II		$\leq 33\text{dBm (2W)}$

##### A.8.1.2.3.2 Measurement result

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$P_{Ag}$ (dB)	$G_a$ Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1852.4	-12.418	4.6	36.0	4.7	23.682	V
1880.0	-11.482	4.6	35.6	4.7	24.218	H

1907.6	-12.649	4.7	35.9	4.5	23.051	H
--------	---------	-----	------	-----	--------	---

**Frequency: 1852.40MHz**
**Peak EIRP(dBm)= P<sub>Mea</sub>(-12.418dBm)- P<sub>cl</sub>(4.6dB)+ P<sub>Ag</sub>(36.0dB)+G<sub>a</sub>(4.7dBi) =23.682dBm**
**ANALYZER SETTINGS: RBW = VBW = 5MHz**

#### A.8.1.2.4 WCDMA Band IV-ERP

##### A.8.1.2.4.1 Limits

	Burst Peak EIRP (dBm)
WCDMA Band IV	≤38.45dBm (7W)

##### A.8.1.2.4.2 Measurement result

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dBi)	PeakEIRP(dBm)	Polarizati on
1712.4	-14.656	4.4	36.25	4.7	21.894	H
1732.6	-14.843	4.4	36.25	4.7	21.707	H
1752.6	-14.743	4.5	36.25	4.7	21.707	H

**Frequency: 1712.4 MHz**
**Peak ERP(dBm)= P<sub>Mea</sub>(-14.656dBm)- P<sub>cl</sub>(4.4dB)+P<sub>Ag</sub>(36.25dB)+G<sub>a</sub>(4.7dB)=21.894dBm**
**ANALYZER SETTINGS: RBW = VBW = 5MHz**

#### A.8.1.2.5 WCDMA Band V-ERP

##### A.8.1.2.5.1 Limits

	Burst Peak ERP (dBm)
WCDMA Band V	≤38.45dBm (7W)

##### A.8.1.2.5.2 Measurement result

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dBd)	PeakERP(dBm)	Polarizati on
826.4	-16.206	3.1	37	3.11	20.804	V
836.6	-15.568	3.1	37	3.11	21.442	V
846.6	-14.095	3.1	37	3.11	22.915	H

**Frequency: 846.60 MHz**
**Peak ERP(dBm)= P<sub>Mea</sub>(-16.206dBm)- P<sub>cl</sub>(3.1dB)+P<sub>Ag</sub>(37dB)+G<sub>a</sub>(3.11dBd)= 20.804dBm**
**ANALYZER SETTINGS: RBW = VBW = 5MHz**

**Note: the EUT was displayed in several different direction, the worst cases were shown.**

### A.8.2 EMISSION LIMIT (§2.1051/§22.917§24.238)


#### A.8.2.1 GSM Measurement Method

The measurement procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

#### A.8.2.2 The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10<sup>th</sup> harmonic were measured with peak detector.

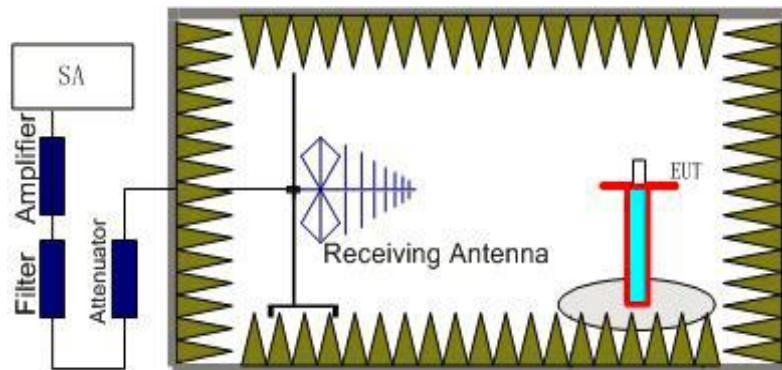

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

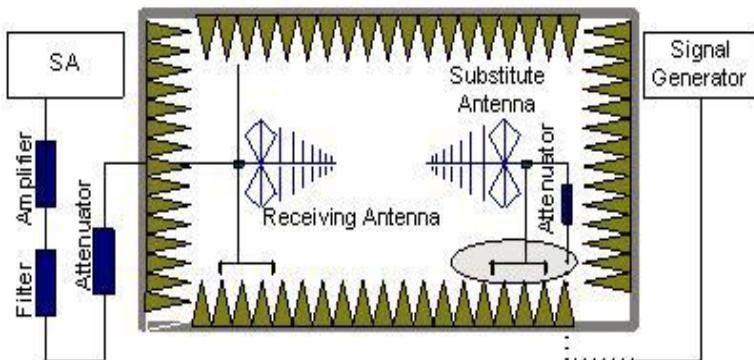

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss .

The measurement results are obtained as described below:

Power(EIRP)= $P_{Mea}$ -  $P_{pl}$ +  $G_a$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$

#### **A.8.2.3 Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power ( $P$ ) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### **A.8.2.4 Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### **A.8.2.5 Measurement Results**

**Measurements results:**

Frequency	Channel	Frequency Range	Result
<b>GSM850</b>	Low	30MHz~10GHz	P

	Middle	30MHz~10GHz	P
	High	30MHz~10GHz	P
GSM1900	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P

**GSM Mode Channel 128**
**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1647.857143	-46.03	4.4	5	-45.43	-13	V
2867.142857	-39.52	5.8	8.3	-37.02	-13	V
3690	-51.51	6.6	8.6	-49.51	-13	V
5033.076923	-50.39	7.8	9.8	-48.39	-13	H
7416.923077	-46.85	9.7	11.8	-44.75	-13	H
9066.153846	-43.96	10.5	12.8	-41.66	-13	H

**Note:**
**GSM850, CH128**
**Power(ERP)= Pmea-Pcl+Ga=-40.03-4.4+5.0=-45.43dbm**
**This method Applicable to the following table.**
**GSM Mode Channel 190**
**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1673.571429	-47.36	4.4	5	-46.76	-13	H
2681.785714	-38.84	5.6	5.6	-38.84	-13	H
3346.153846	-49.23	6.2	7.2	-48.23	-13	V
5289.230769	-49.89	8	9.4	-48.49	-13	V
7529.230769	-45.74	9.7	11.6	-43.84	-13	H
9201.538462	-46.63	10.5	12.7	-44.43	-13	H

**GSM Mode Channel 251**

**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1697.142857	-47.59	4.4	5	-46.99	-13	V
2692.5	-38.77	5.6	5.6	-38.77	-13	V
3578.076923	-50.51	6.5	7.8	-49.21	-13	V
5241.923077	-50.26	8	9.4	-48.86	-13	V
5942.307692	-49.74	8.5	10.2	-48.04	-13	V
7724.615385	-48.35	9.8	11.8	-46.35	-13	V

**GSM Mode Channel 512****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3700.8	-44.13	6.6	7.9	-42.83	-13	H
5550.6	-37.38	8.2	9.8	-35.78	-13	V
7400.4	-42.66	9.7	11.6	-40.76	-13	H
9250.8	-39.3	10.6	12.7	-37.2	-13	H
11102.4	-39.83	12.1	12.7	-39.23	-13	V
12951.6	-37.66	13	13.1	-37.56	-13	H

**GSM Mode Channel 661****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3759.6	-42.4	6.6	7.9	-41.1	-13	H
5640	-39.55	8.3	10	-37.85	-13	H

7520.4	-39.54	9.6	11.6	-37.54	-13	H
9399.6	-42.93	10.7	12.7	-40.93	-13	V
13160.4	-31.02	13	13.1	-30.92	-13	V
15040.8	-28.83	14.4	13.9	-29.33	-13	H

**GSM Mode Channel 810****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3819.6	-40.11	6.7	8.2	-38.61	-13	H
5729.4	-42.16	8.5	10.2	-40.46	-13	H
7638	-43.14	9.7	11.7	-41.14	-13	V
11457.6	-39.66	10.7	12.7	-37.66	-13	H
13369.2	-27.04	13.7	13.9	-26.84	-13	V
15278.4	-25.39	14.5	14	-25.89	-13	V

**Conclusion: PASS**

**Note: the EUT was displayed in several different direction, the worst cases were shown.**

**A.7.2.2. WCDMA Measurement Method**

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 24.917.

The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II and WCDMA Band V.

**The procedure of radiated spurious emissions is the same like GSM.**

**A.7.2.2.1. Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried

out.

#### **A.7.2.2.2. Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz) and WCDMA Band

V (826.4MHz, 836.6MHz and 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II and WCDMA Band V into any of the other blocks.

The

equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### **A.7.2.2.3. Measurement Results Table**

Frequency	Channel	Frequency Range	Result
WCDMA Band II	Low	30MHz~10GHz	P
	Middle	30MHz~10GHz	P
	High	30MHz~10GHz	P
WCDMA Band IV	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P
WCDMA Band V	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P

#### **WCDMA BAND II Mode Channel 9262**

**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3706.4	-57.78	6.6	7.9	-56.48	-13	H
4557.2	-61.81	7.4	9.8	-59.41	-13	H
5797.2	-61.32	8.4	11.6	-58.12	-13	H

**WCDMA BAND II Mode Channel 9400****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3762.4	-55.43	6.7	7.9	-54.23	-13	V
5258.4	-60.22	8	9.4	-58.82	-13	V
7517.6	-57.95	9.7	11.6	-56.05	-13	H

**WCDMA BAND II Mode Channel 9538****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3813.2	-55.15	6.6	7.9	-53.85	-13	H
5722.8	-58.44	8.4	10.1	-56.74	-13	H
6922	-59.27	9.3	11.1	-57.47	-13	H

**WCDMA BAND IV Mode Channel 1312****Final result:**

Frequency(MHz)	PMea(dBm)	Pcl (dBm)	AntennaGain	Peak EIRP(dBm)	Limit (dBm)	Polarization
3426.4	-49.19	6.4	7.8	-47.79	-13	H
4224.4	-60.37	7.1	8.9	-58.57	-13	V
5134	-50	7.9	9.8	-48.1	-13	H

**WCDMA BAND IV Mode Channel 1413****Final result:**

Frequency(MHz)	PMea(dBm)	Pcl (dBm)	AntennaGain	Peak EIRP(dBm)	Limit (dBm)	Polarization
3466.8	-47.36	6.4	7.8	-45.96	-13	H
4265.6	-59.9	7.1	8.9	-58.1	-13	V

5200.4	-48.98	8	9.4	-47.58	-13	H
--------	--------	---	-----	--------	-----	---

**WCDMA BAND IV Mode Channel 1513****Final result:**

Frequency(MHz)	PMea(dBm)	Pcl (dBm)	AntennaGain	Peak EIRP(dBm)	Limit (dBm)	Polarization
3506.4	-47.36	6.4	7.8	-45.96	-13	H
4305.2	-59.9	7.1	8.9	-58.1	-13	V
5261.2	-48.98	8	9.4	-47.58	-13	V

**WCDMA BAND V Mode Channel 4132****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1653.928571	-61.19	4.3	5.1	-61.99	-13	V
2378.461539	-54.73	5.4	5.6	-54.93	-13	V
3305.2	-61.34	6.4	7.8	-62.74	-13	V

**WCDMA BAND V Mode Channel 4183****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1675.357143	-61.23	4.3	4.7	-61.63	-13	V
2400	-55.03	5.3	5.6	-55.33	-13	V
3346.4	-59.61	6.2	7.8	-61.21	-13	V

**WCDMA BAND V Mode Channel 4233****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
-----------------	------------	-----------	----------	-----------------	-------------	--------------

1694.642857	-59.09	4.4	4.7	-58.79	-13	V
2413.846154	-52.33	5.3	5.6	-52.03	-13	H
3386.4	-62.81	6.3	7.8	-61.31	-13	V

**Conclusion: PASS**

Note: the EUT was displayed in several different direction, the worst cases were shown.

**ANNEX B. Deviations from Prescribed Test Methods**

No deviation from Prescribed Test Methods.

\*\*\*\*\*End The Report\*\*\*\*\*