






LTE Band 7-5MHz-QPSK

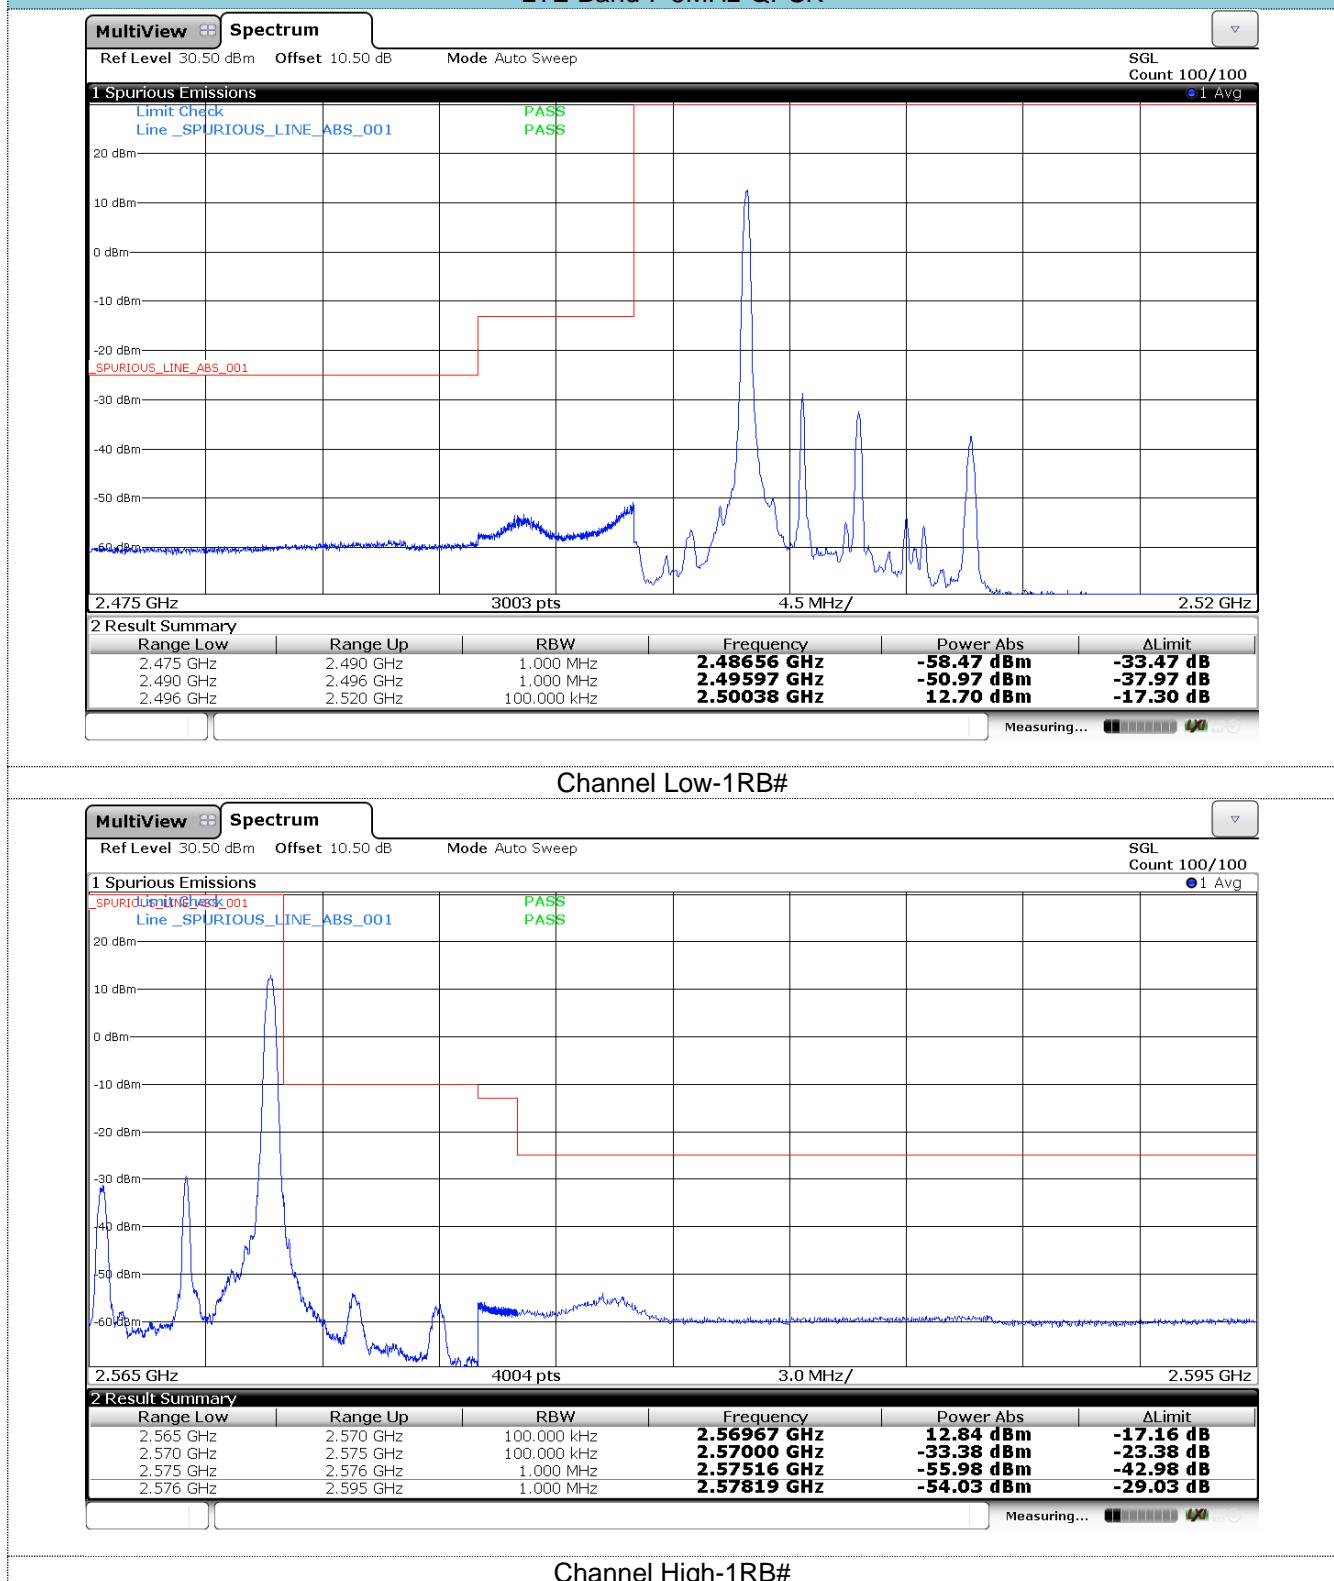


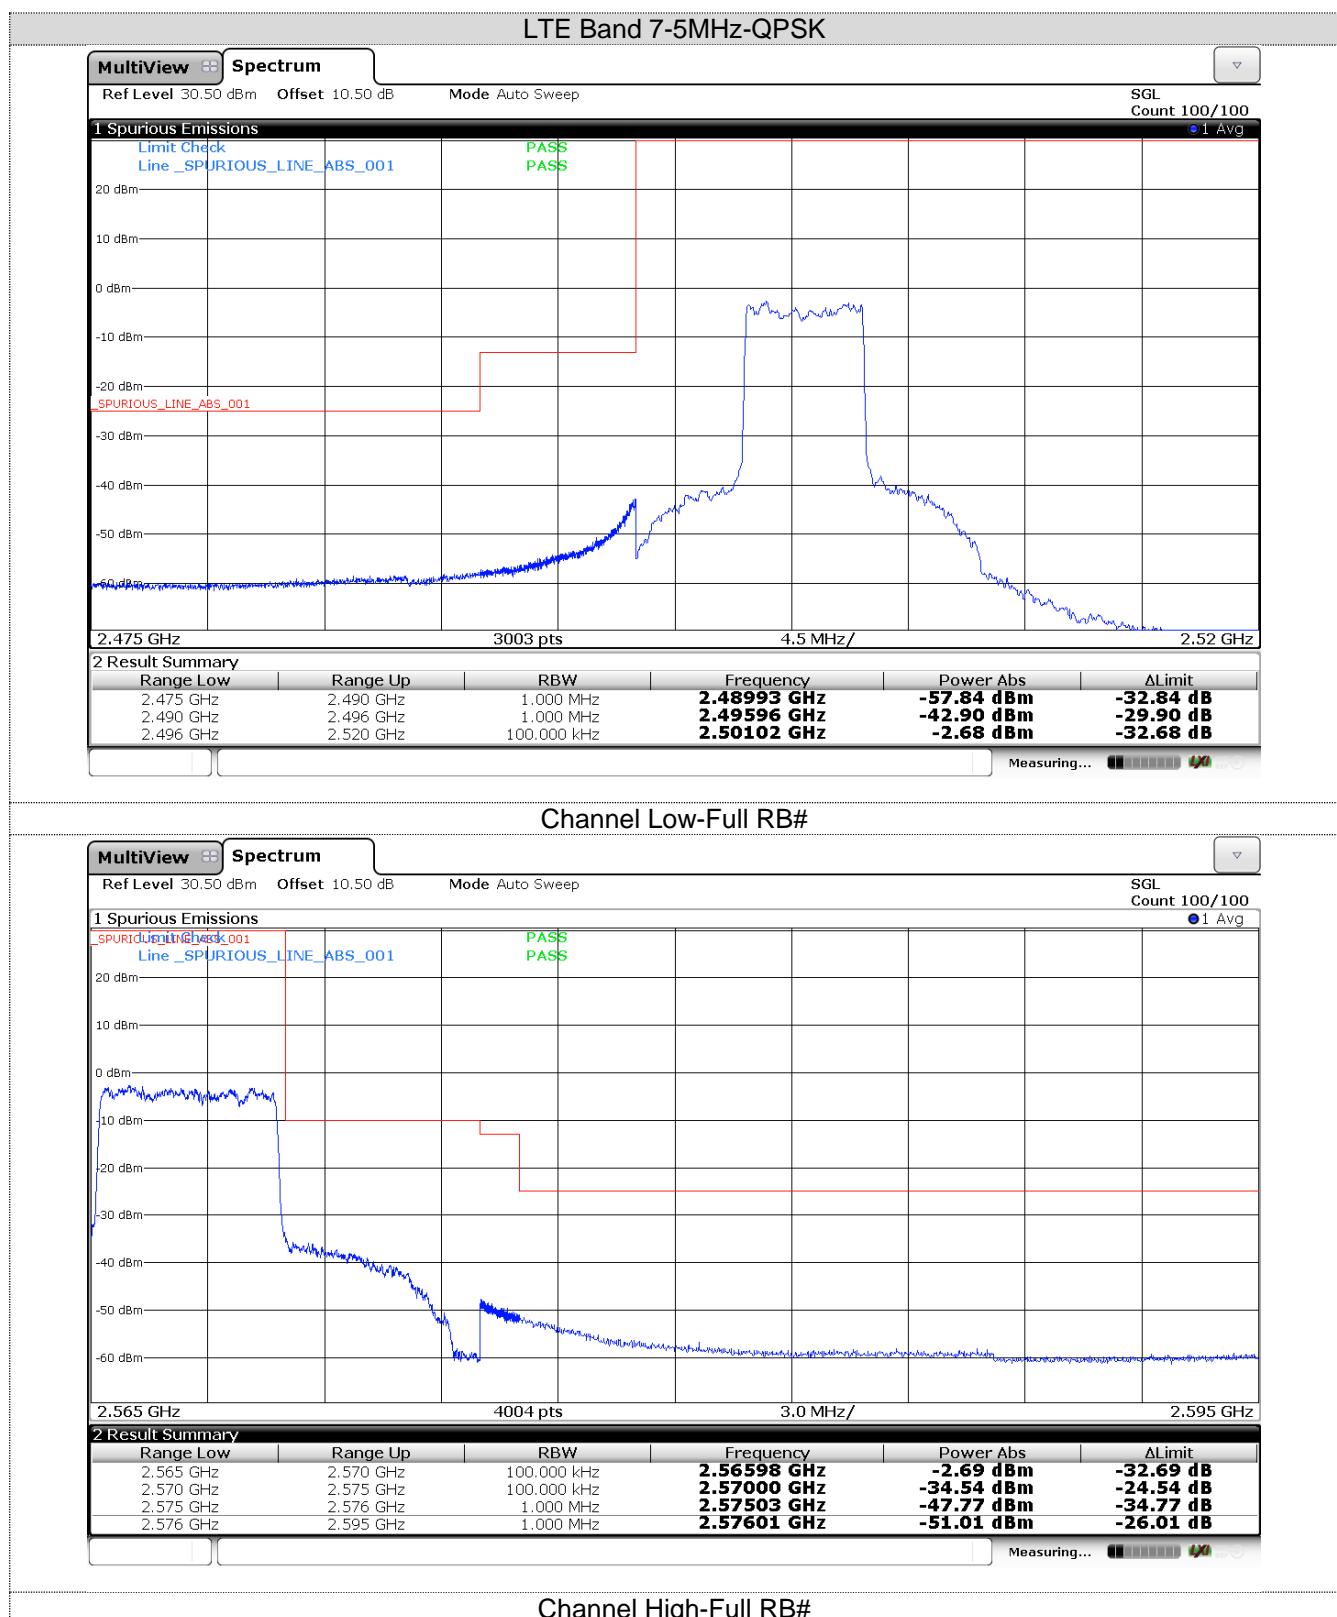

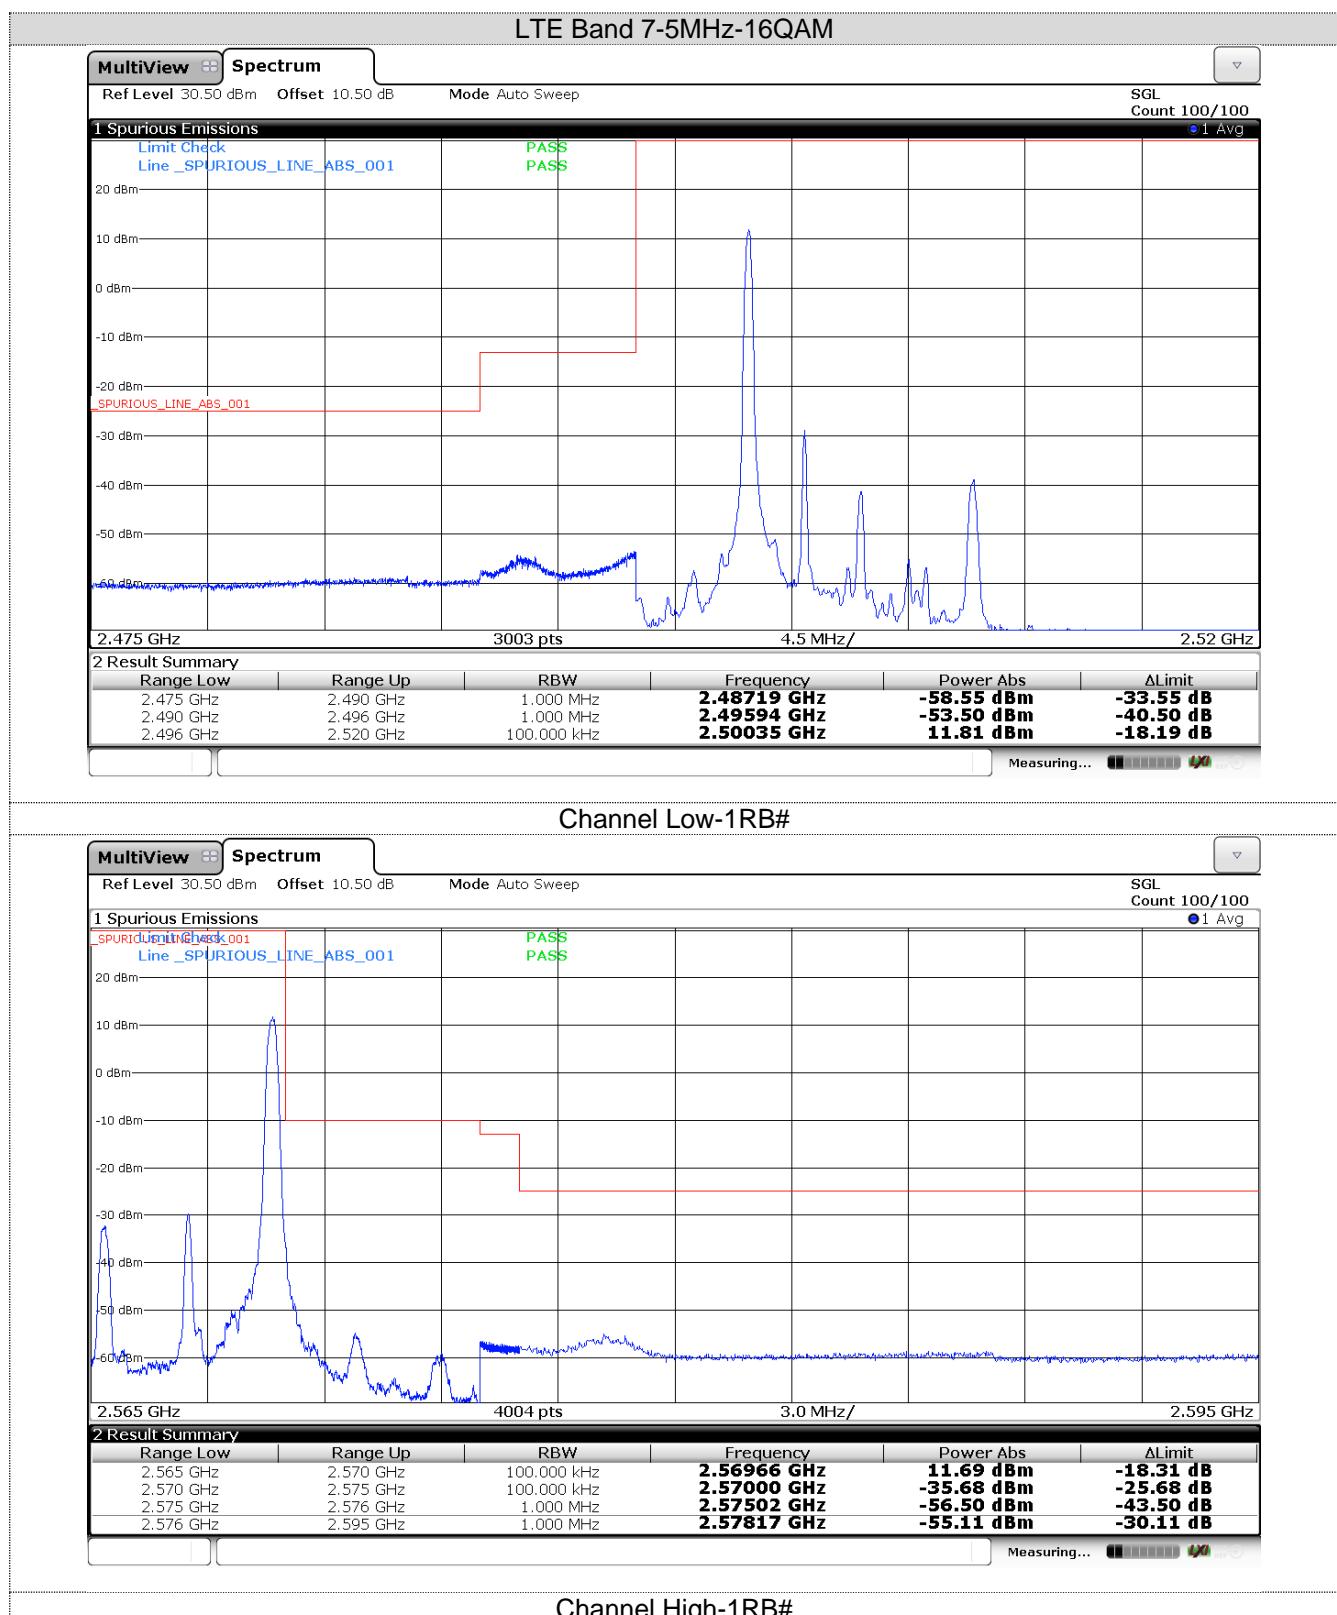


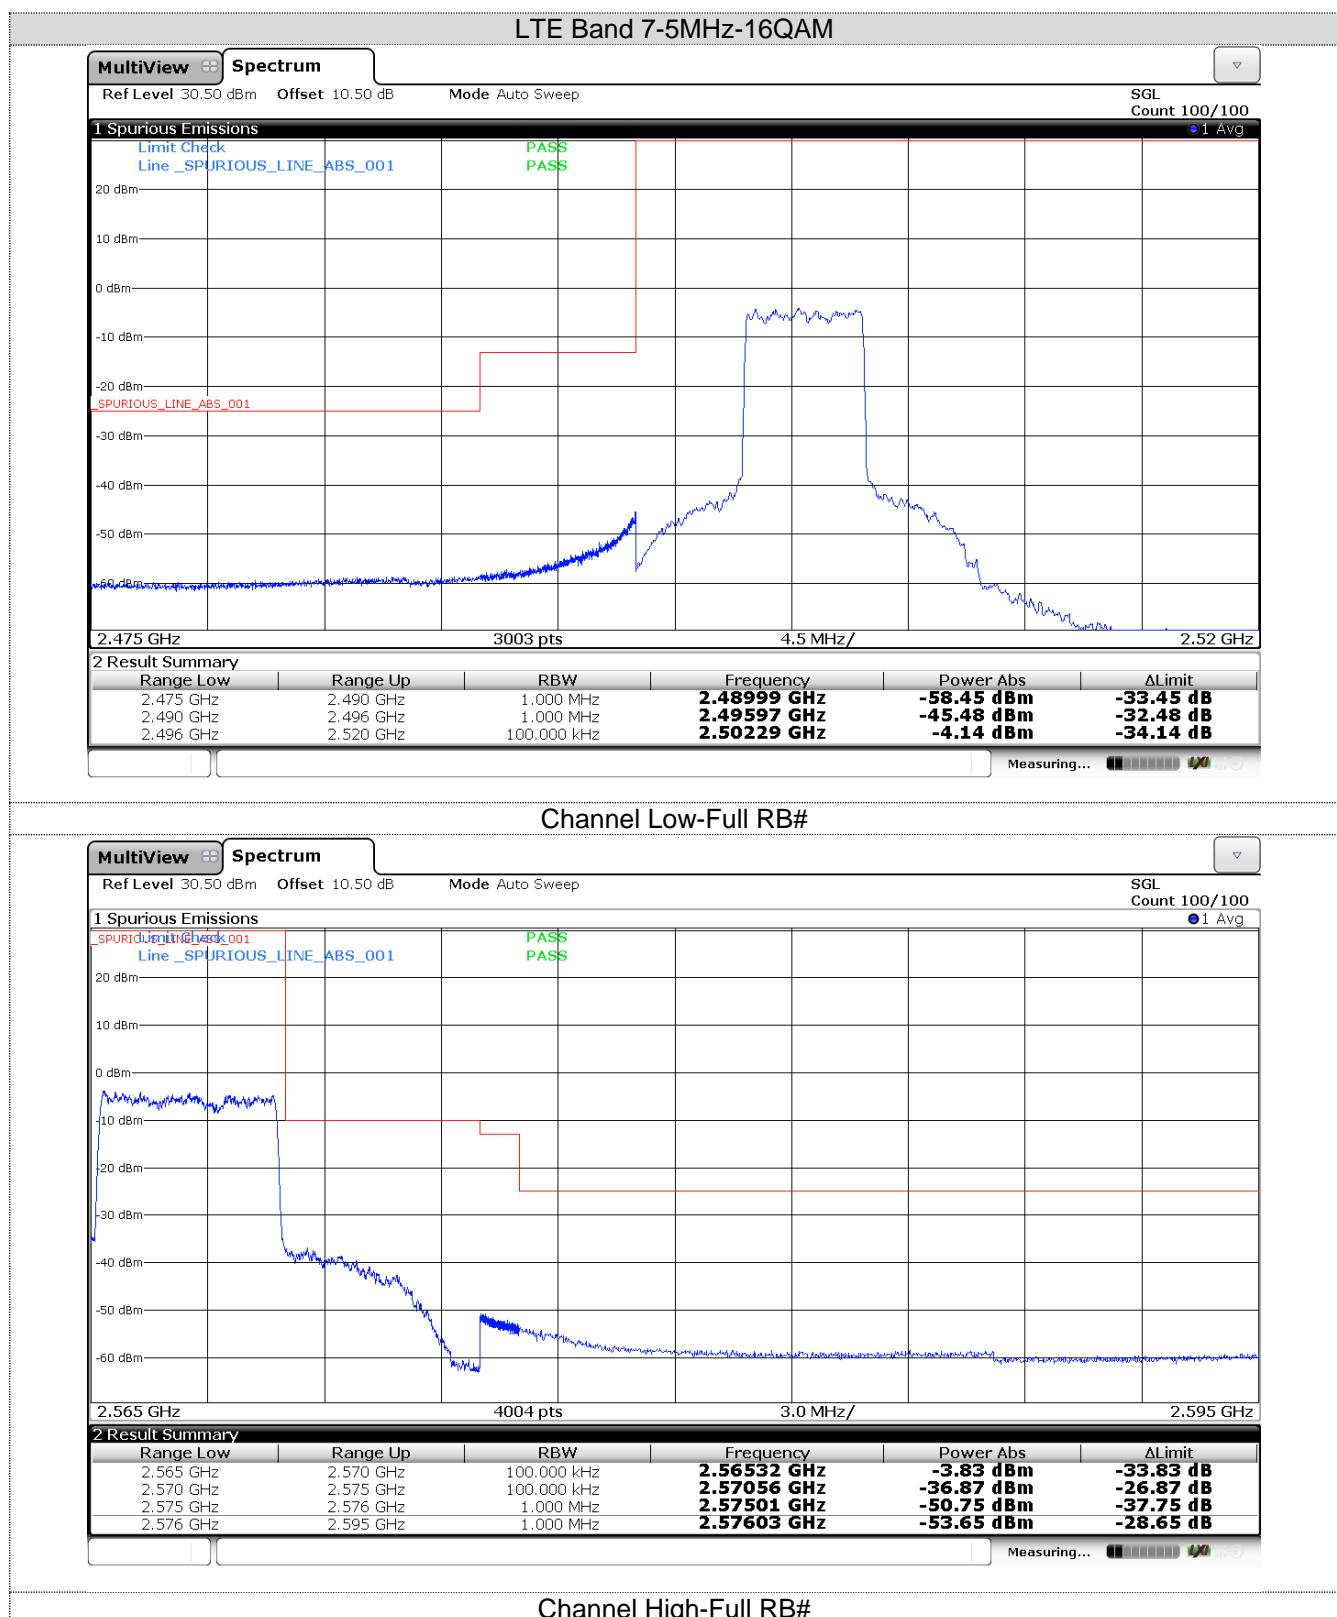

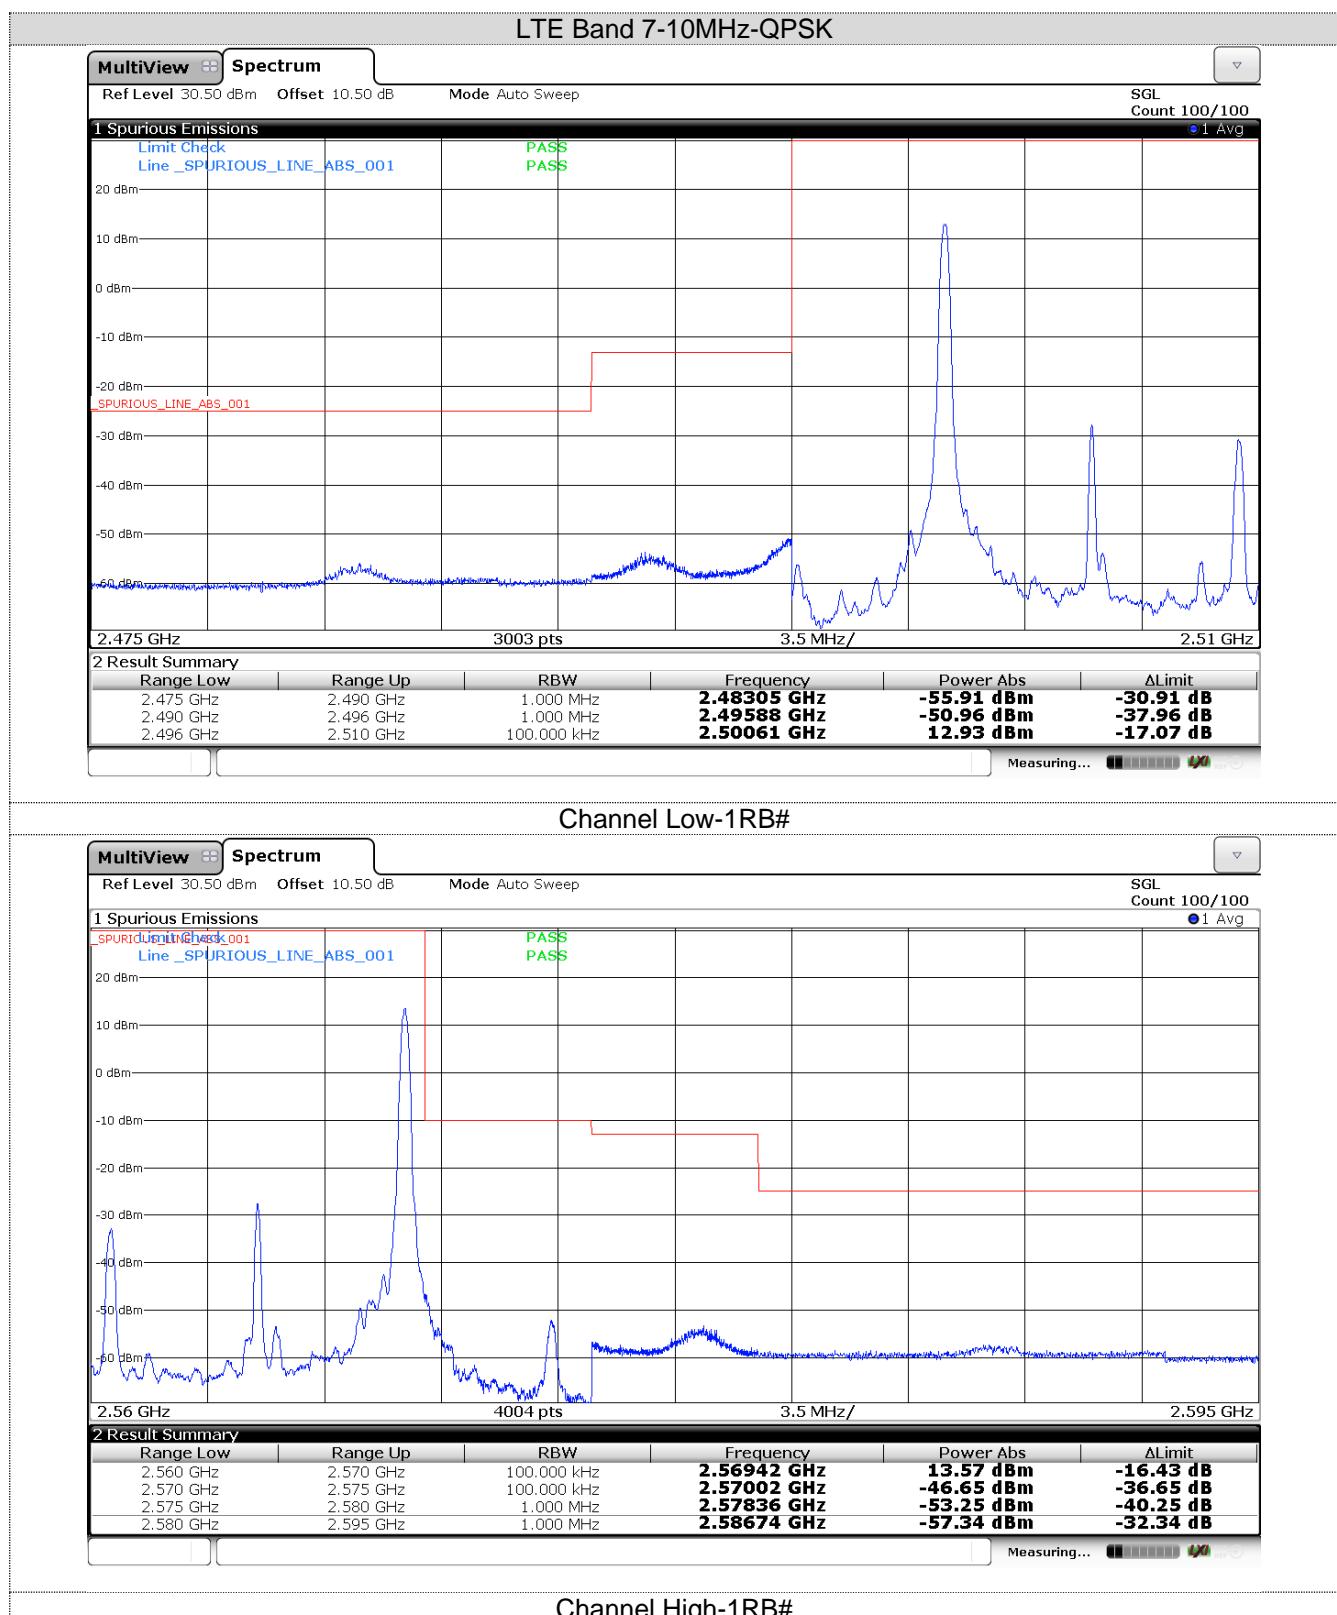


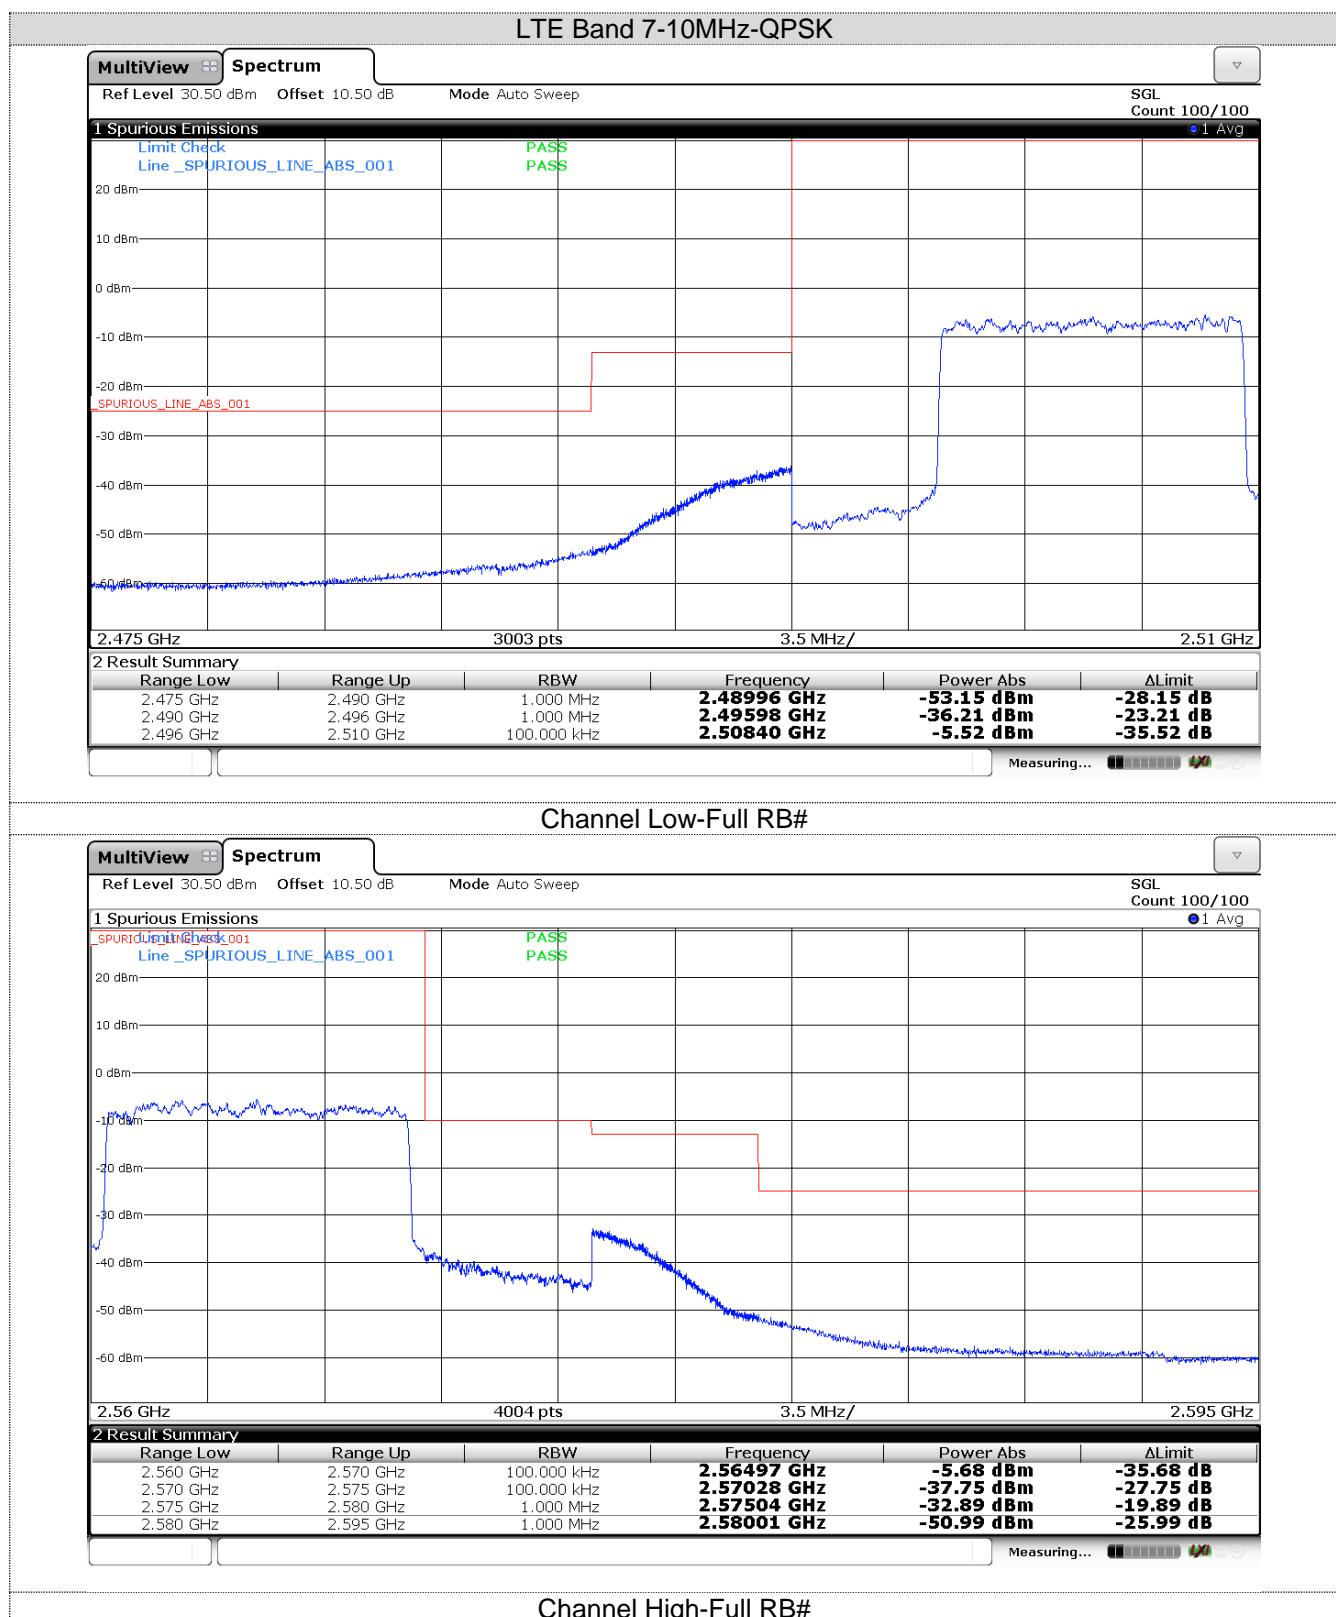


LTE Band 7-10MHz-16QAM

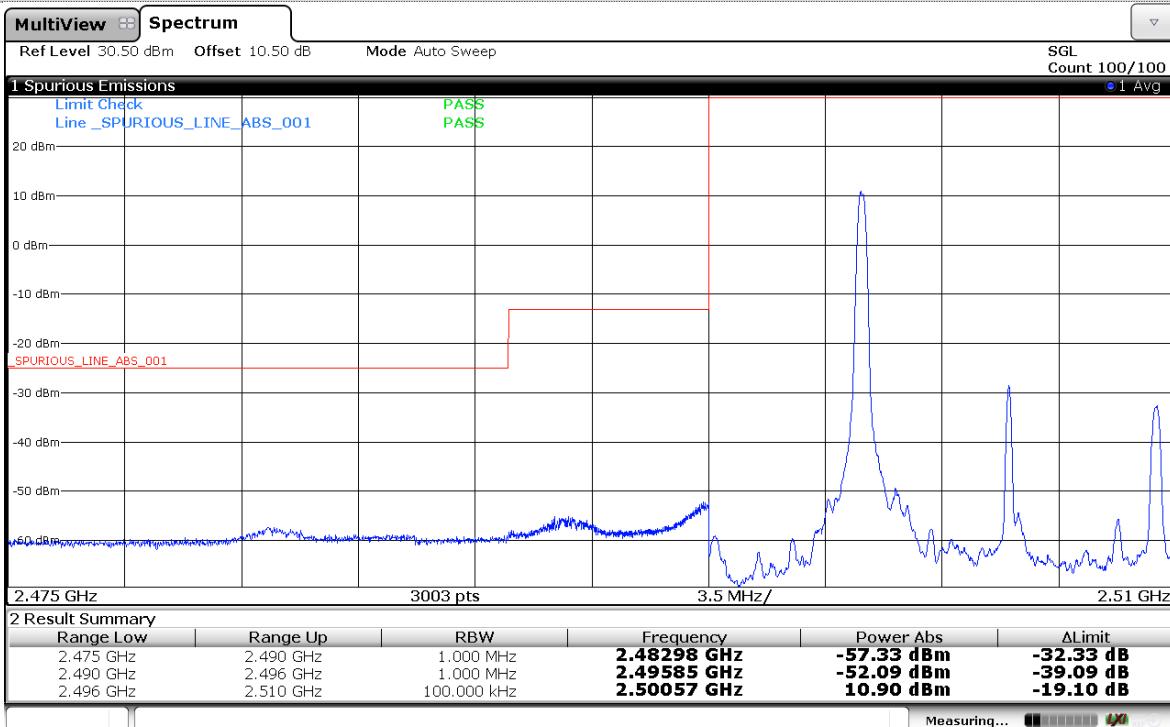



Channel Low-1RB#

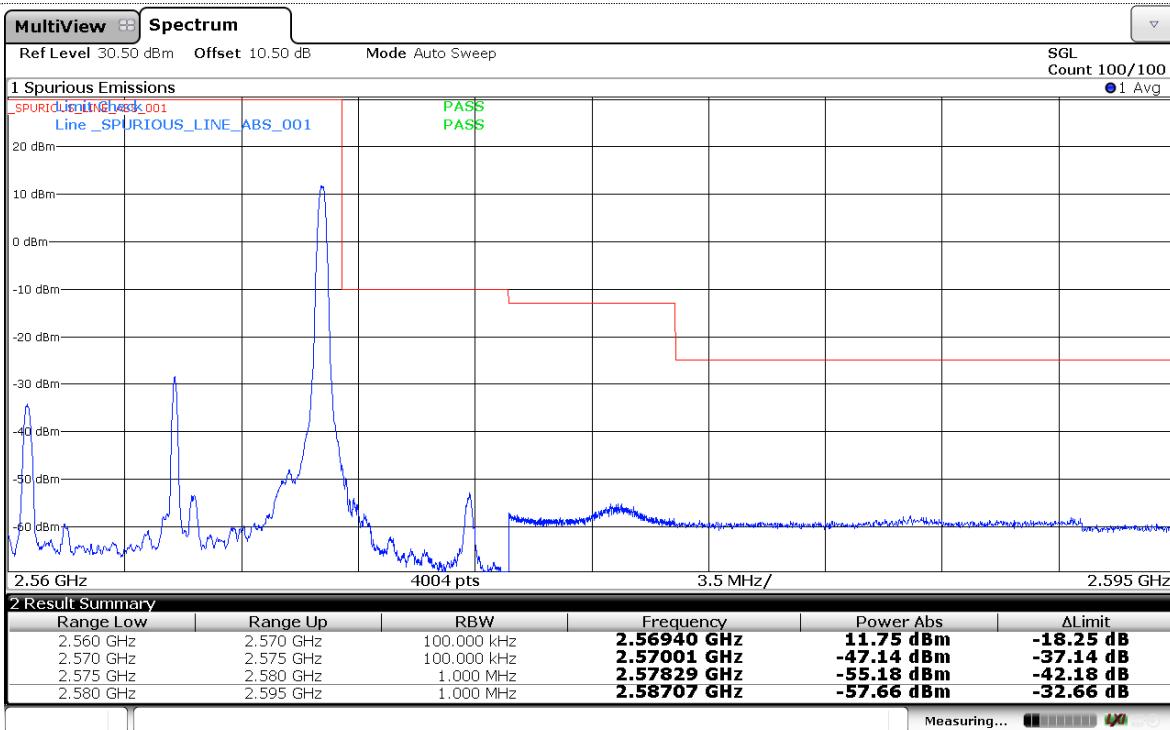



Channel High-1RB#

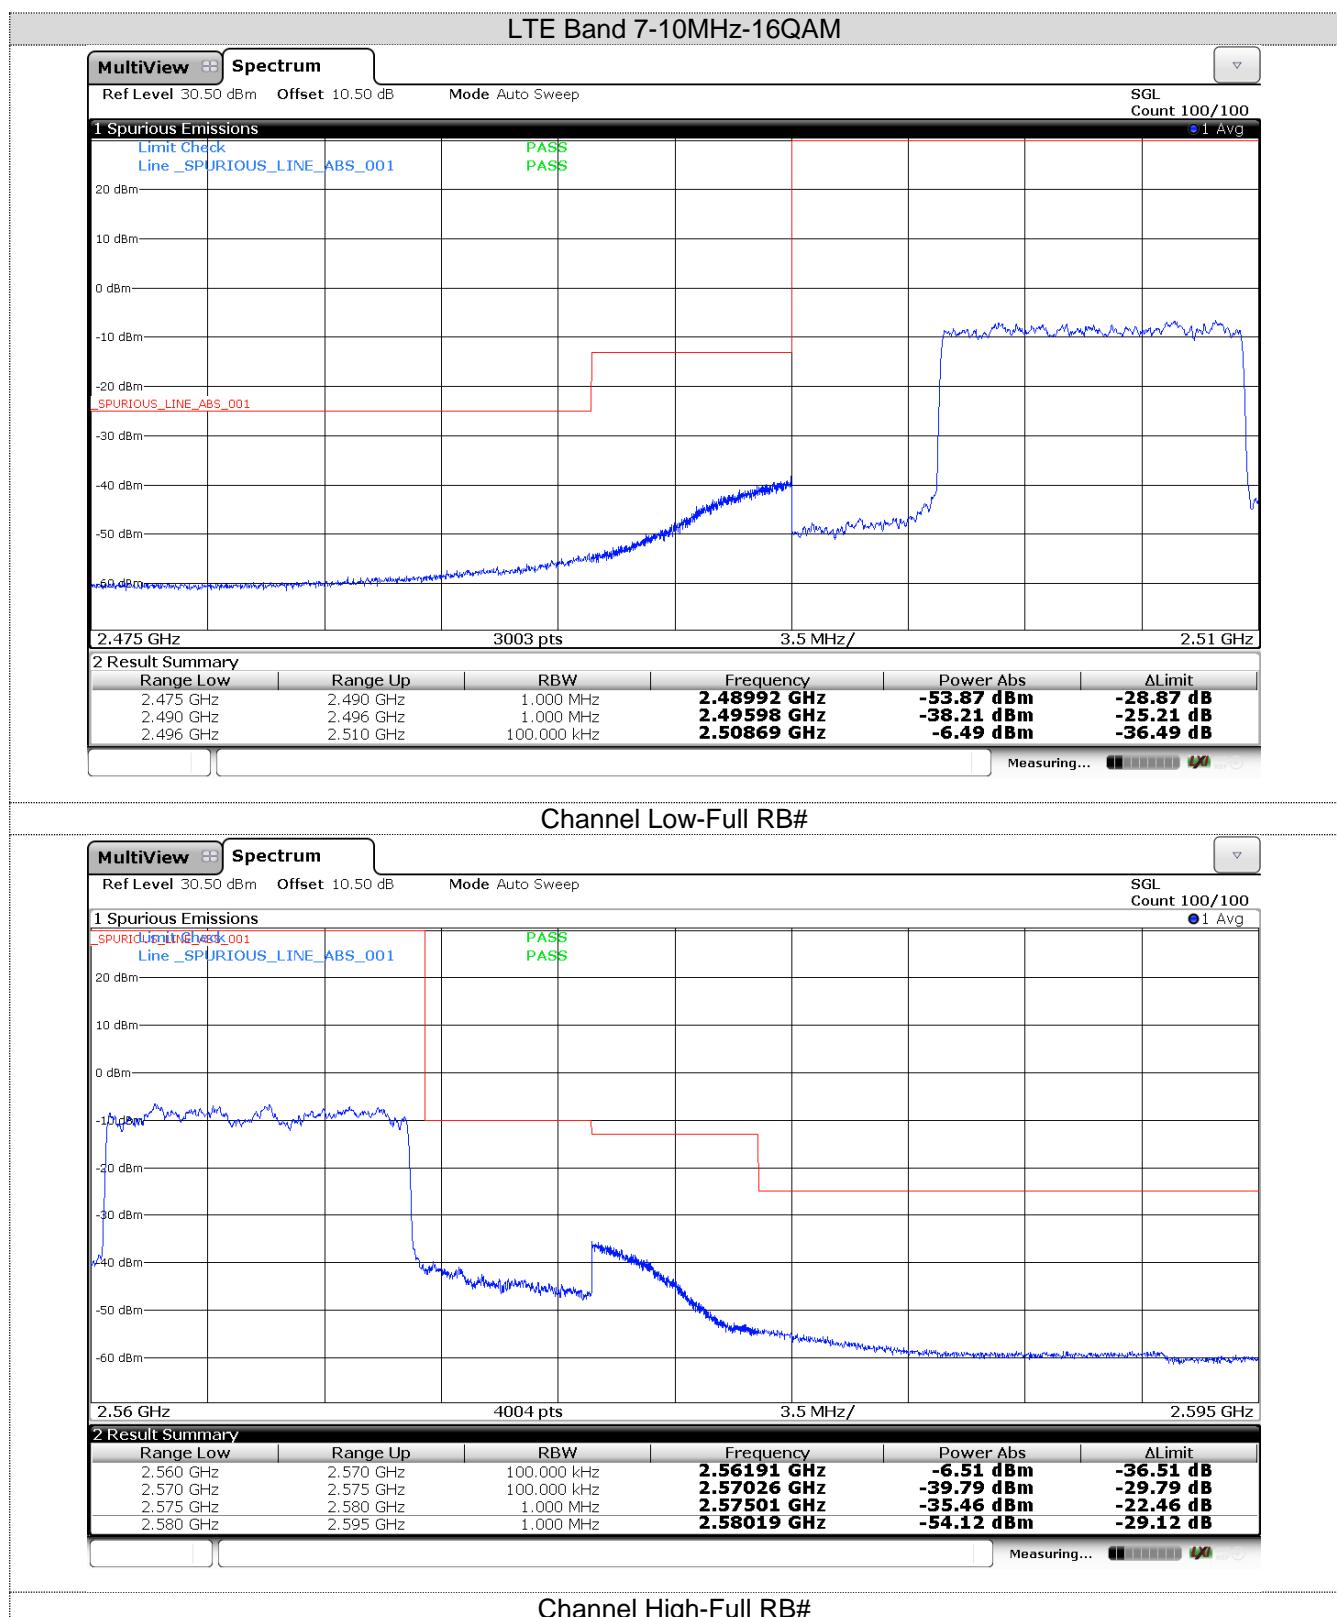


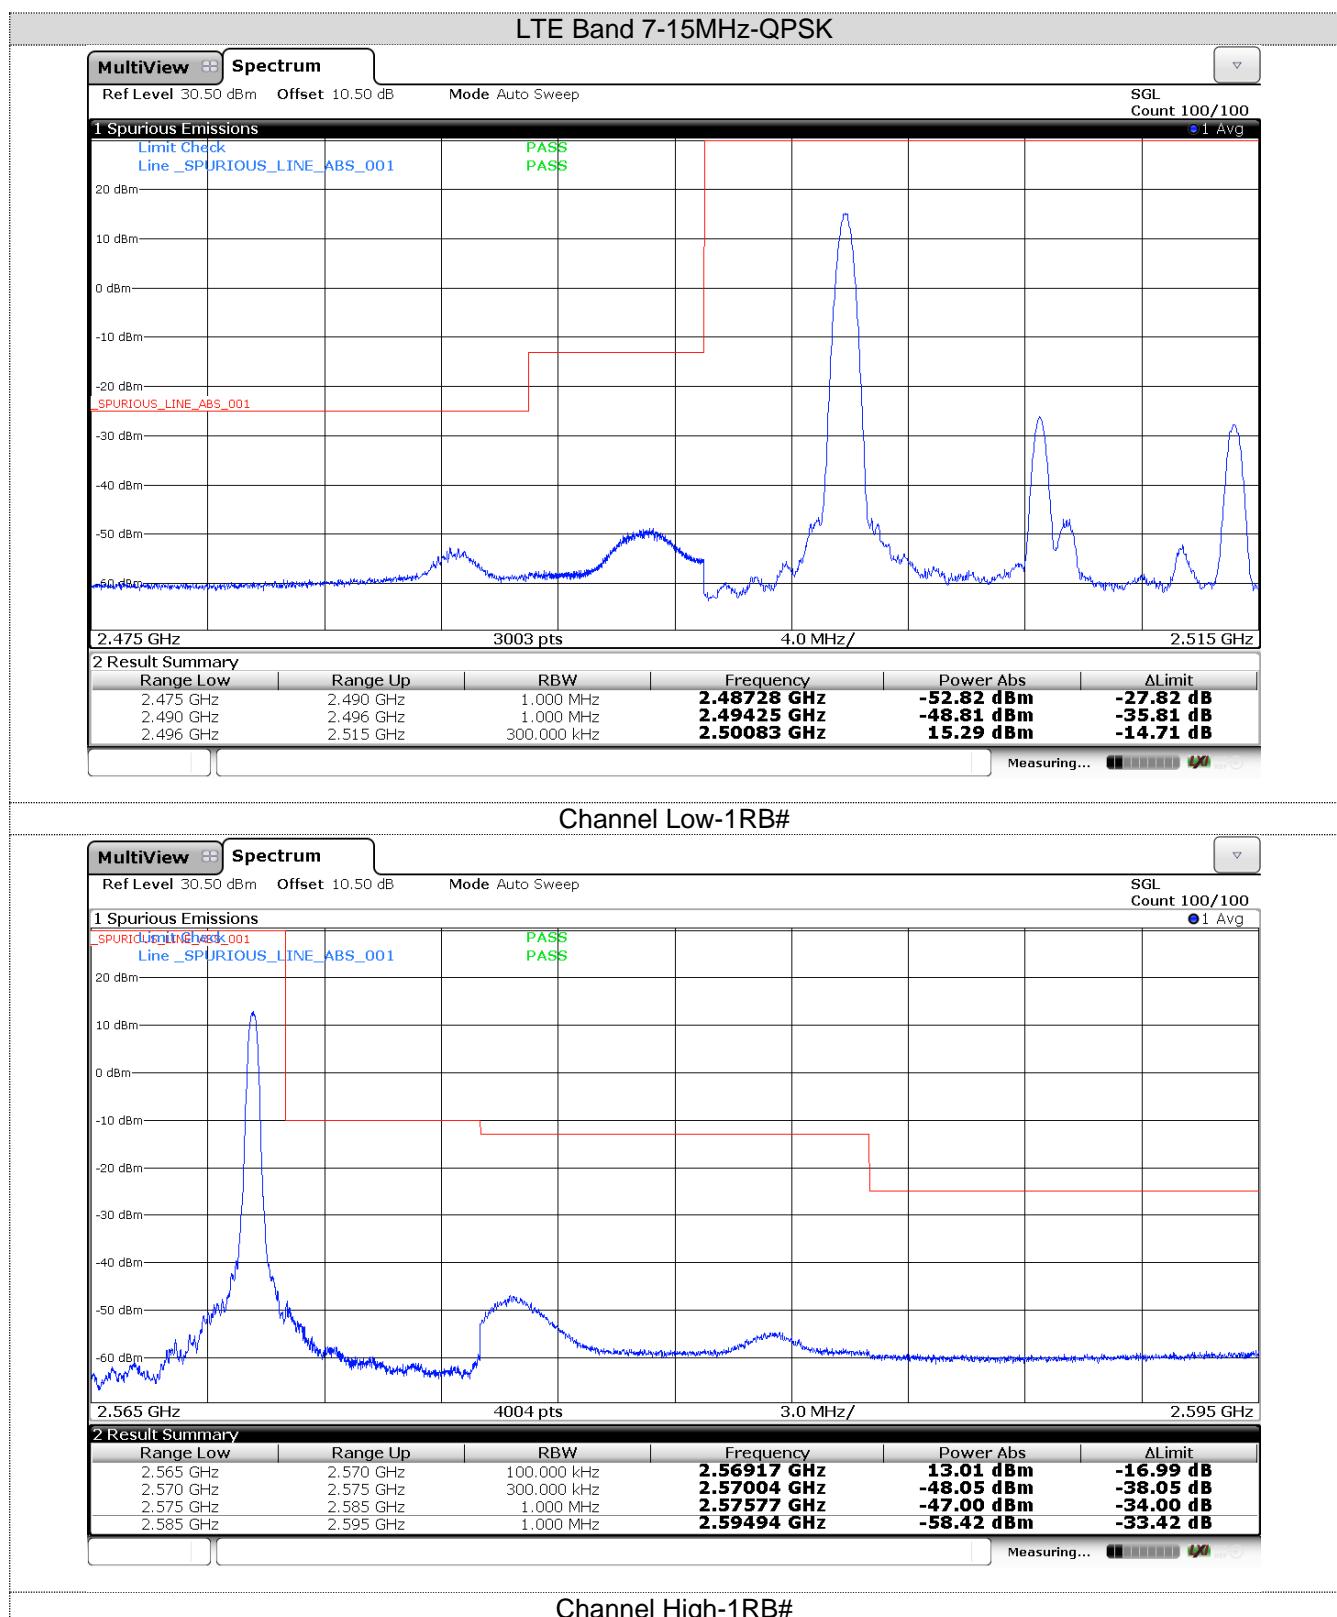


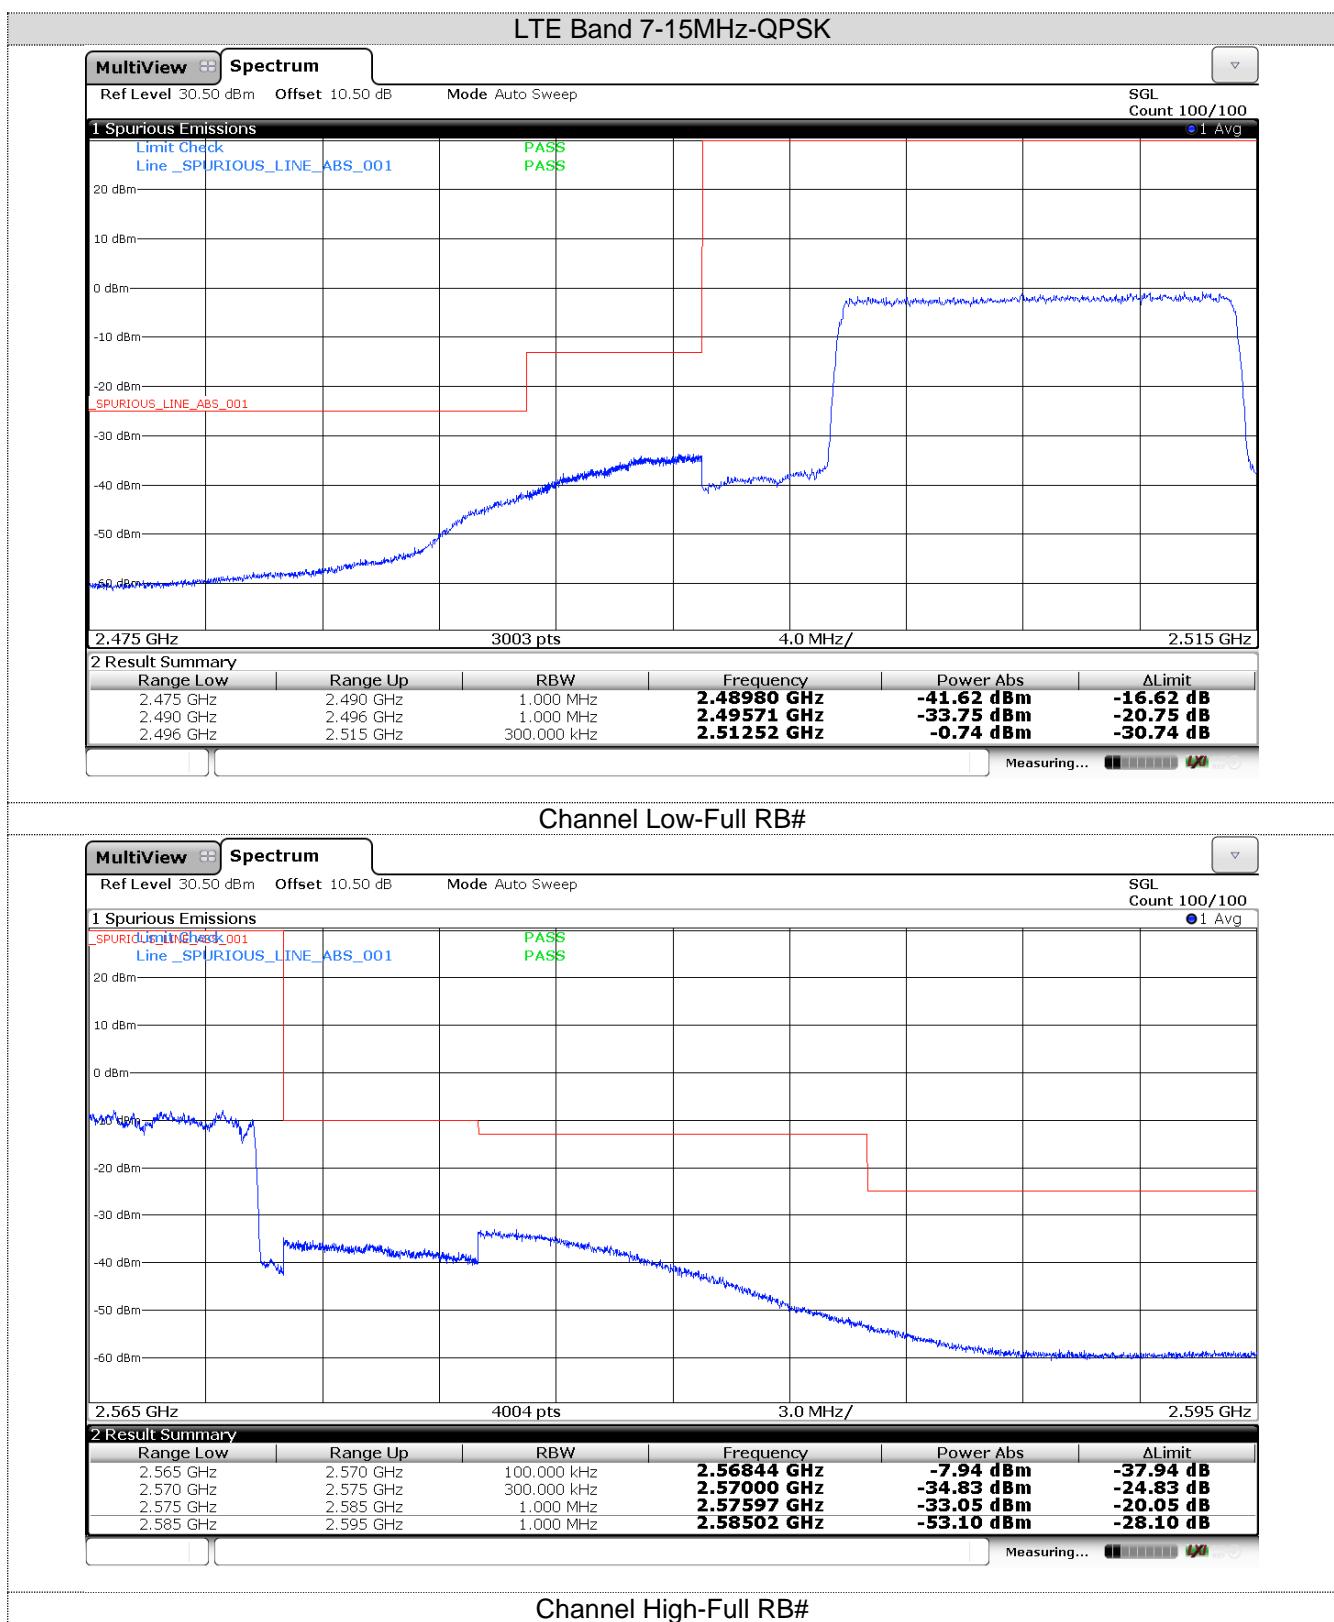


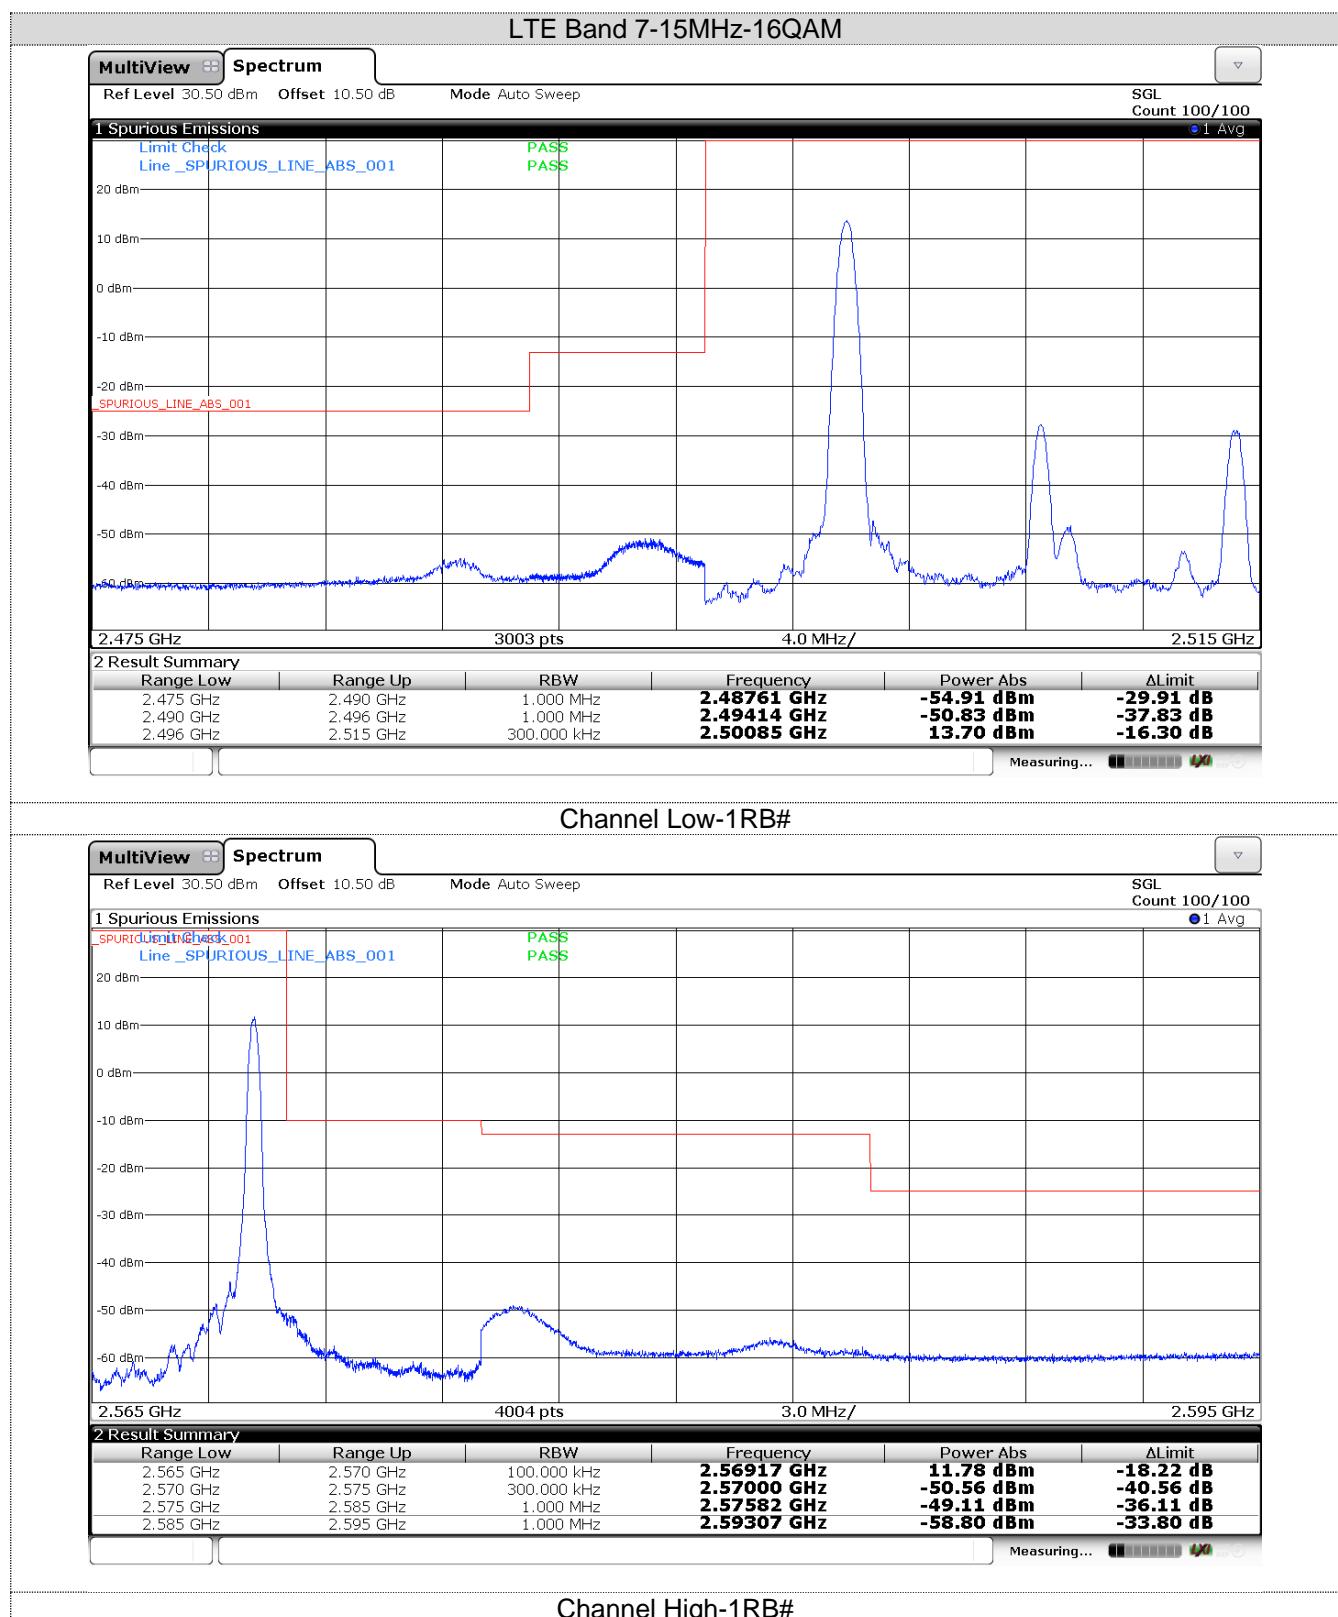


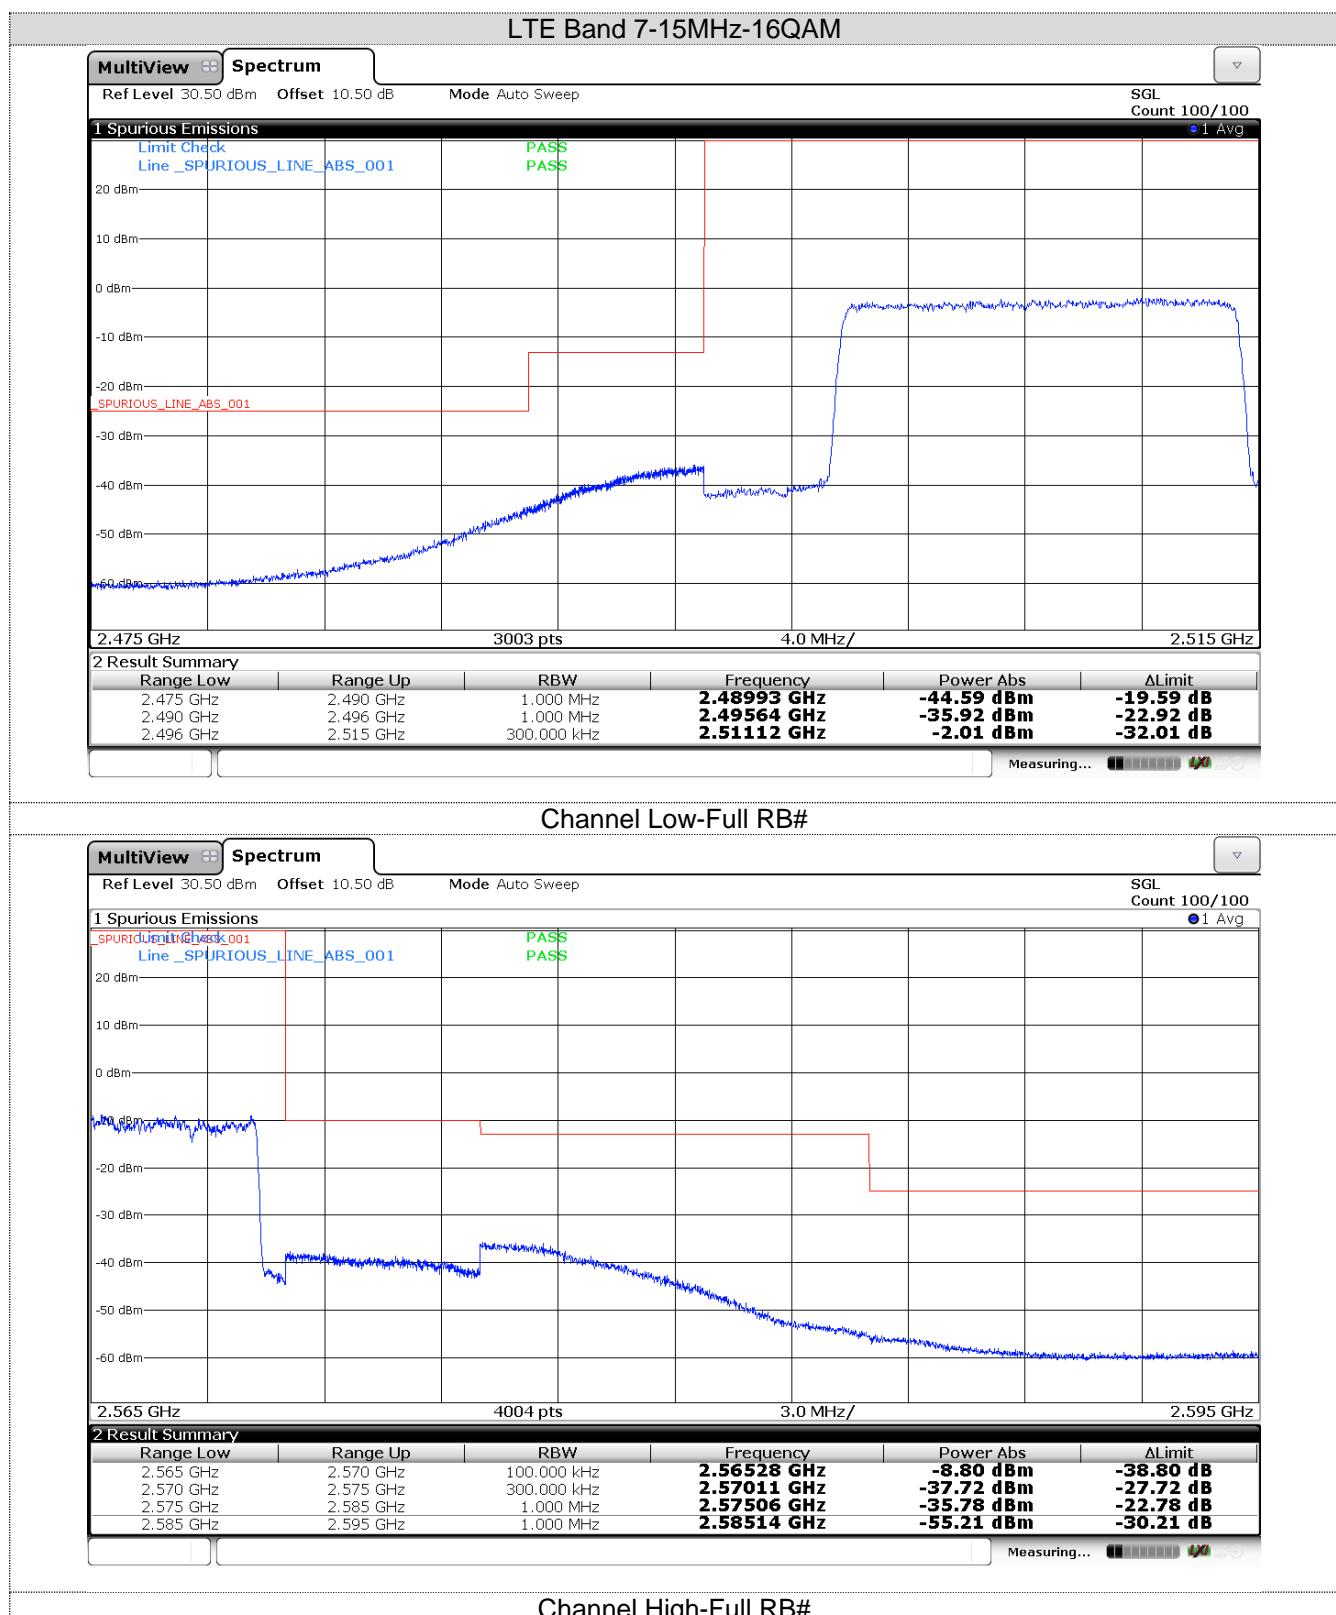

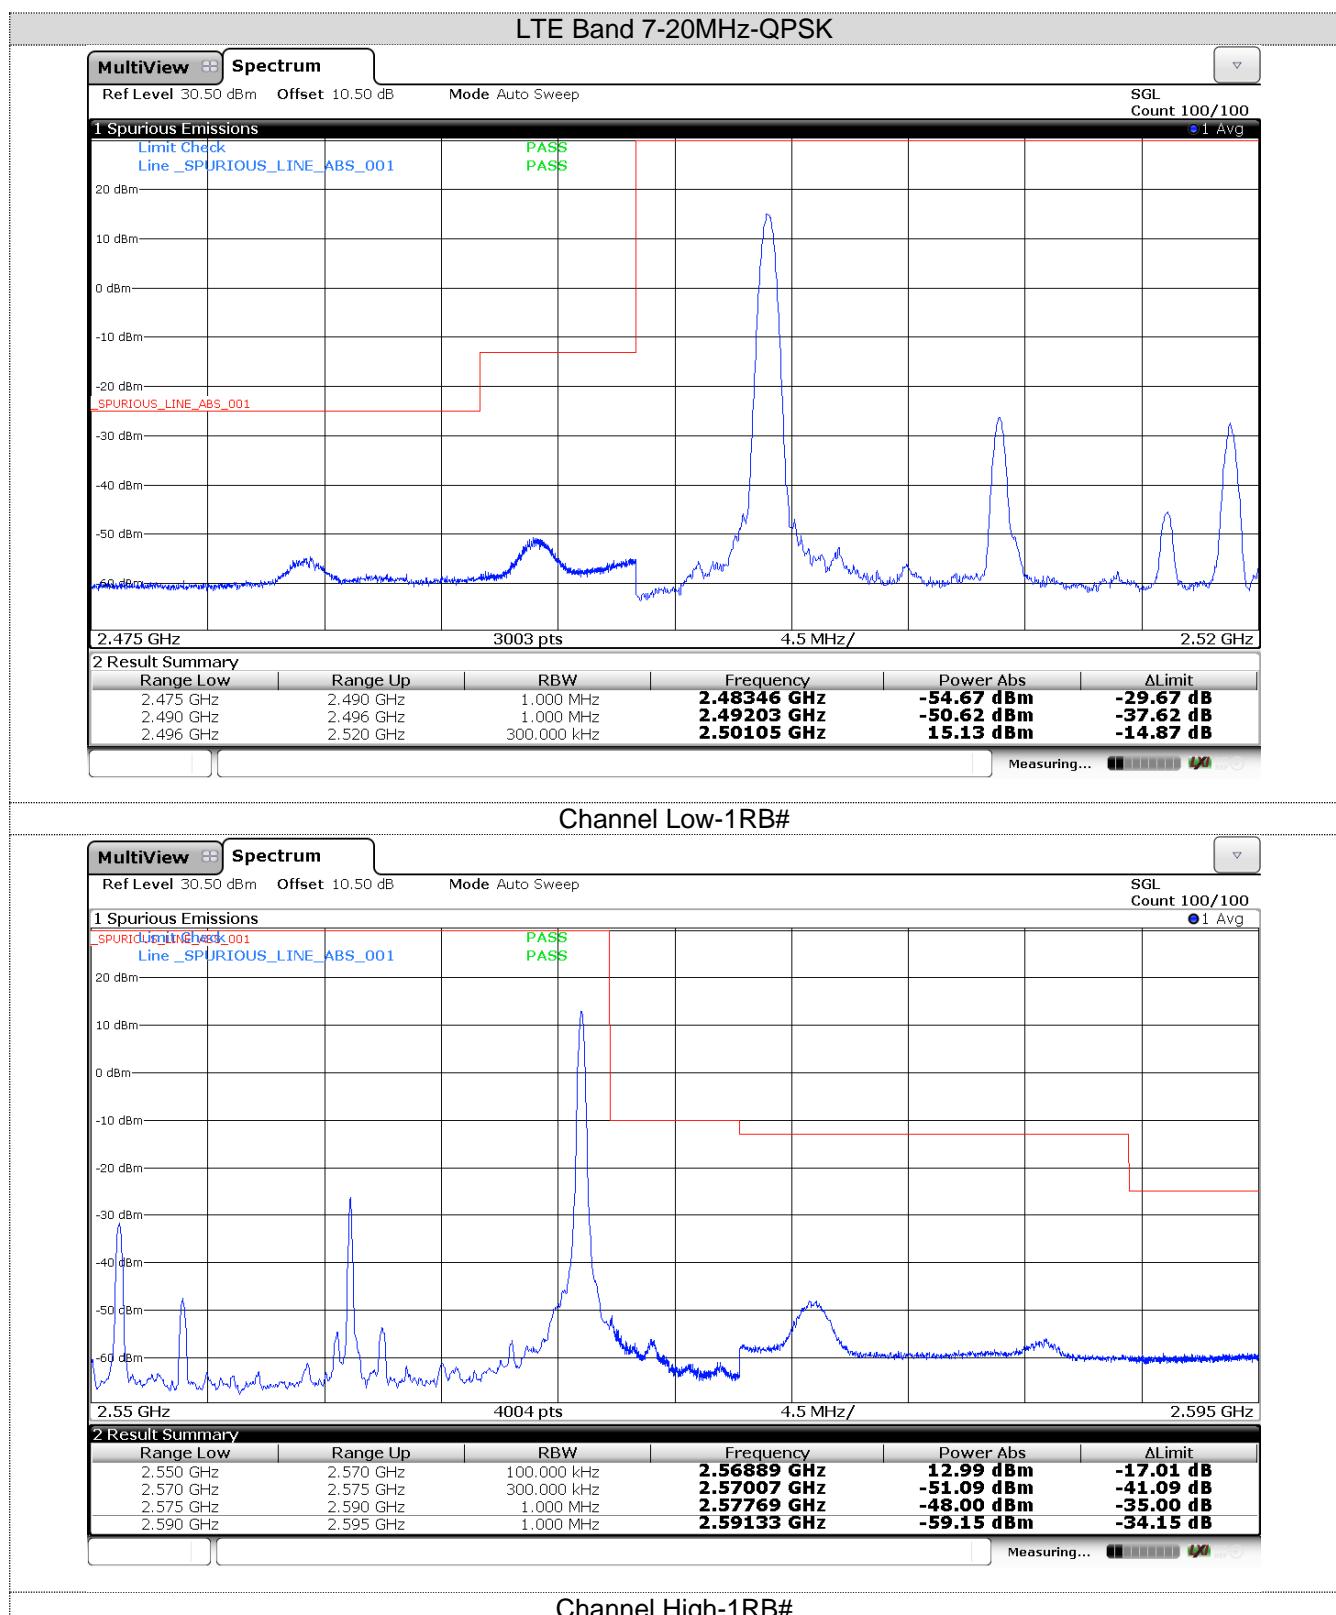


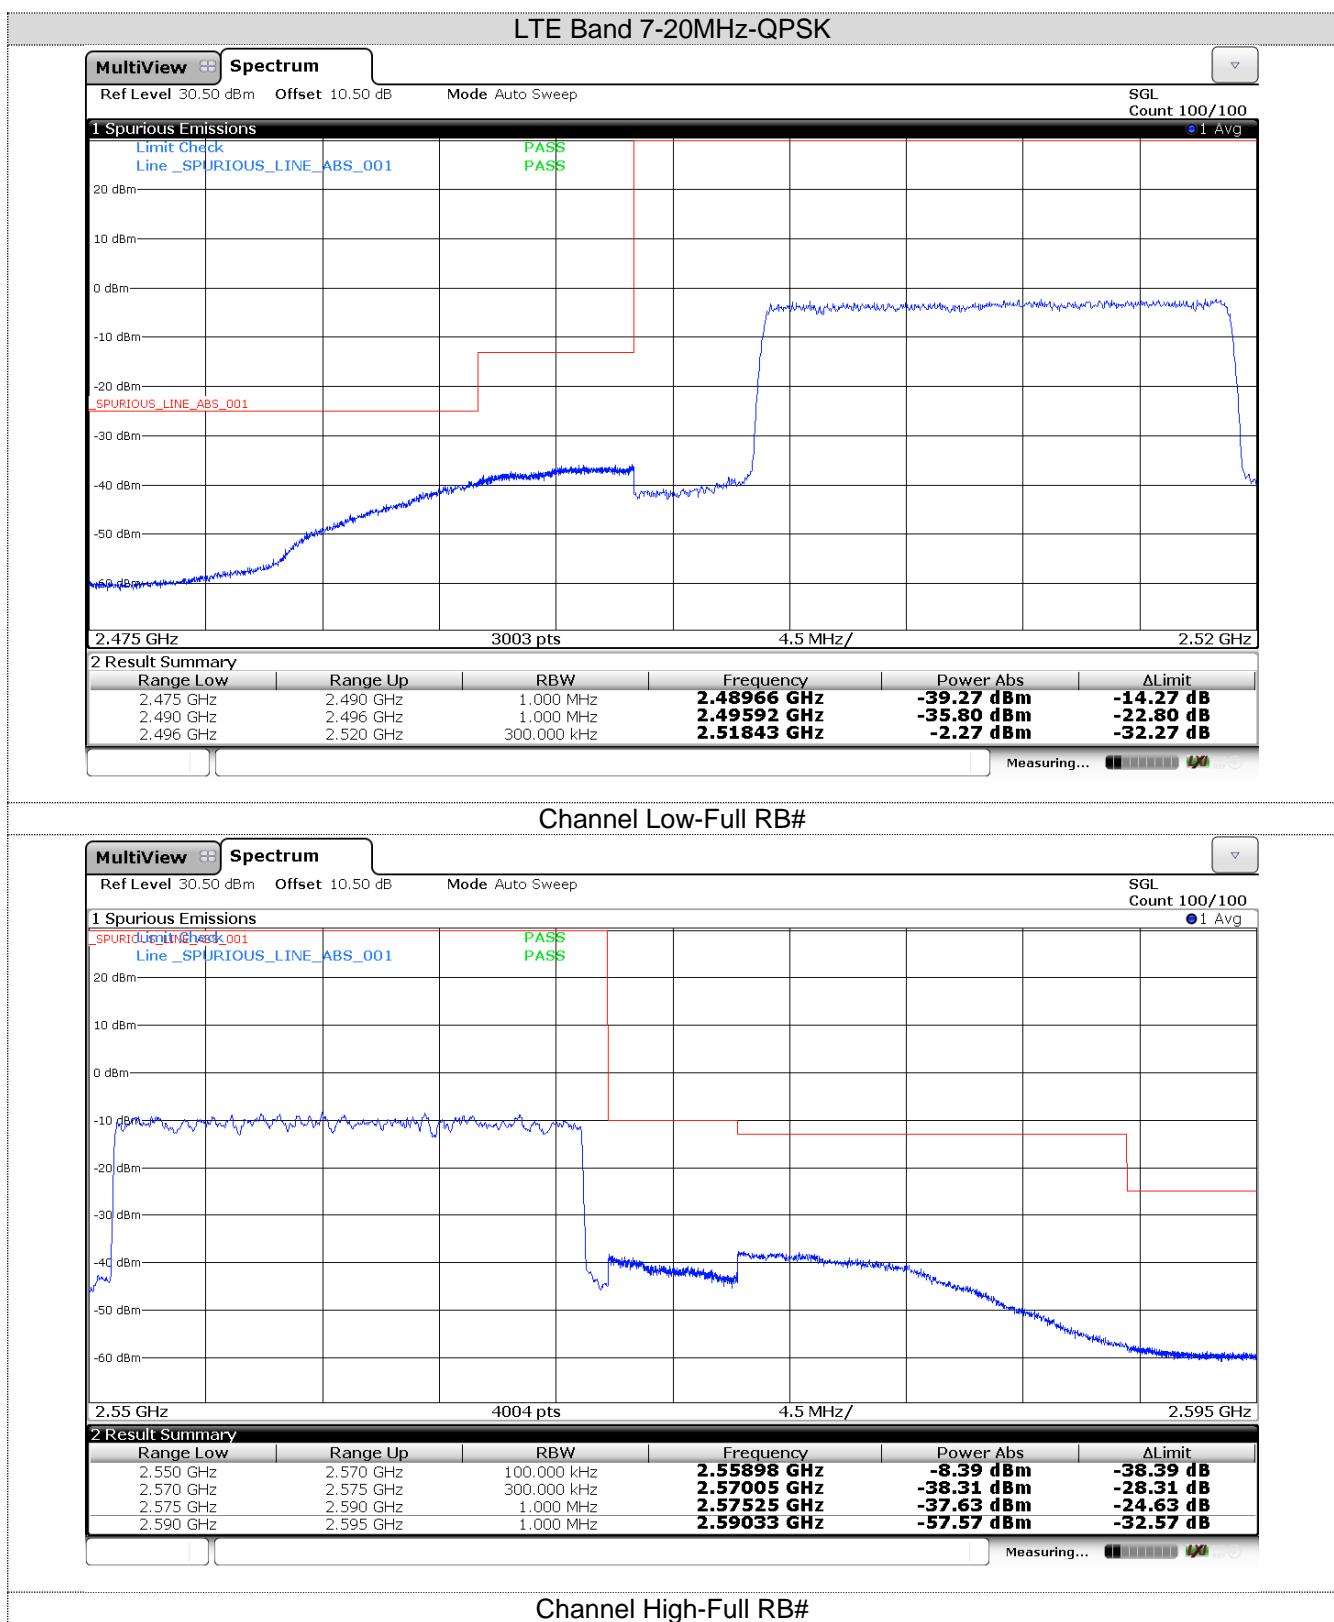

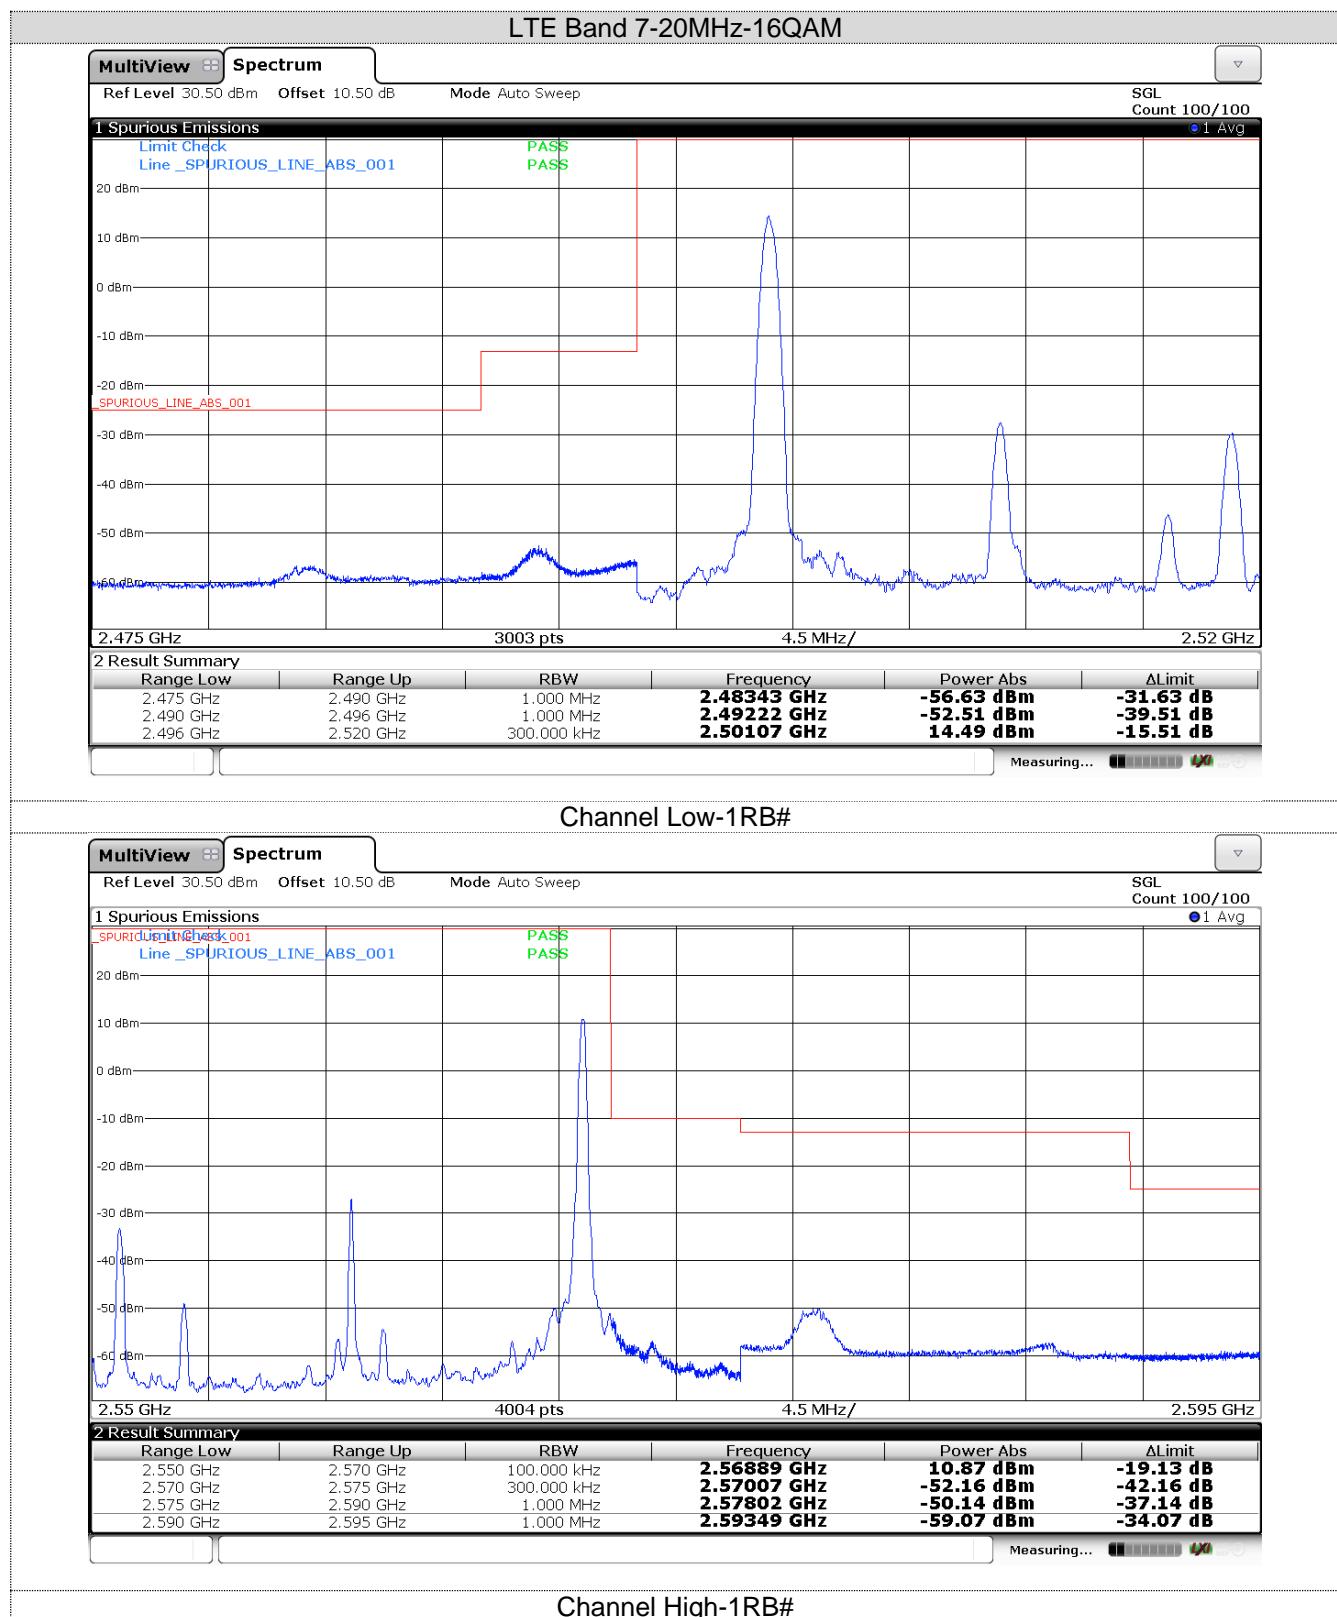


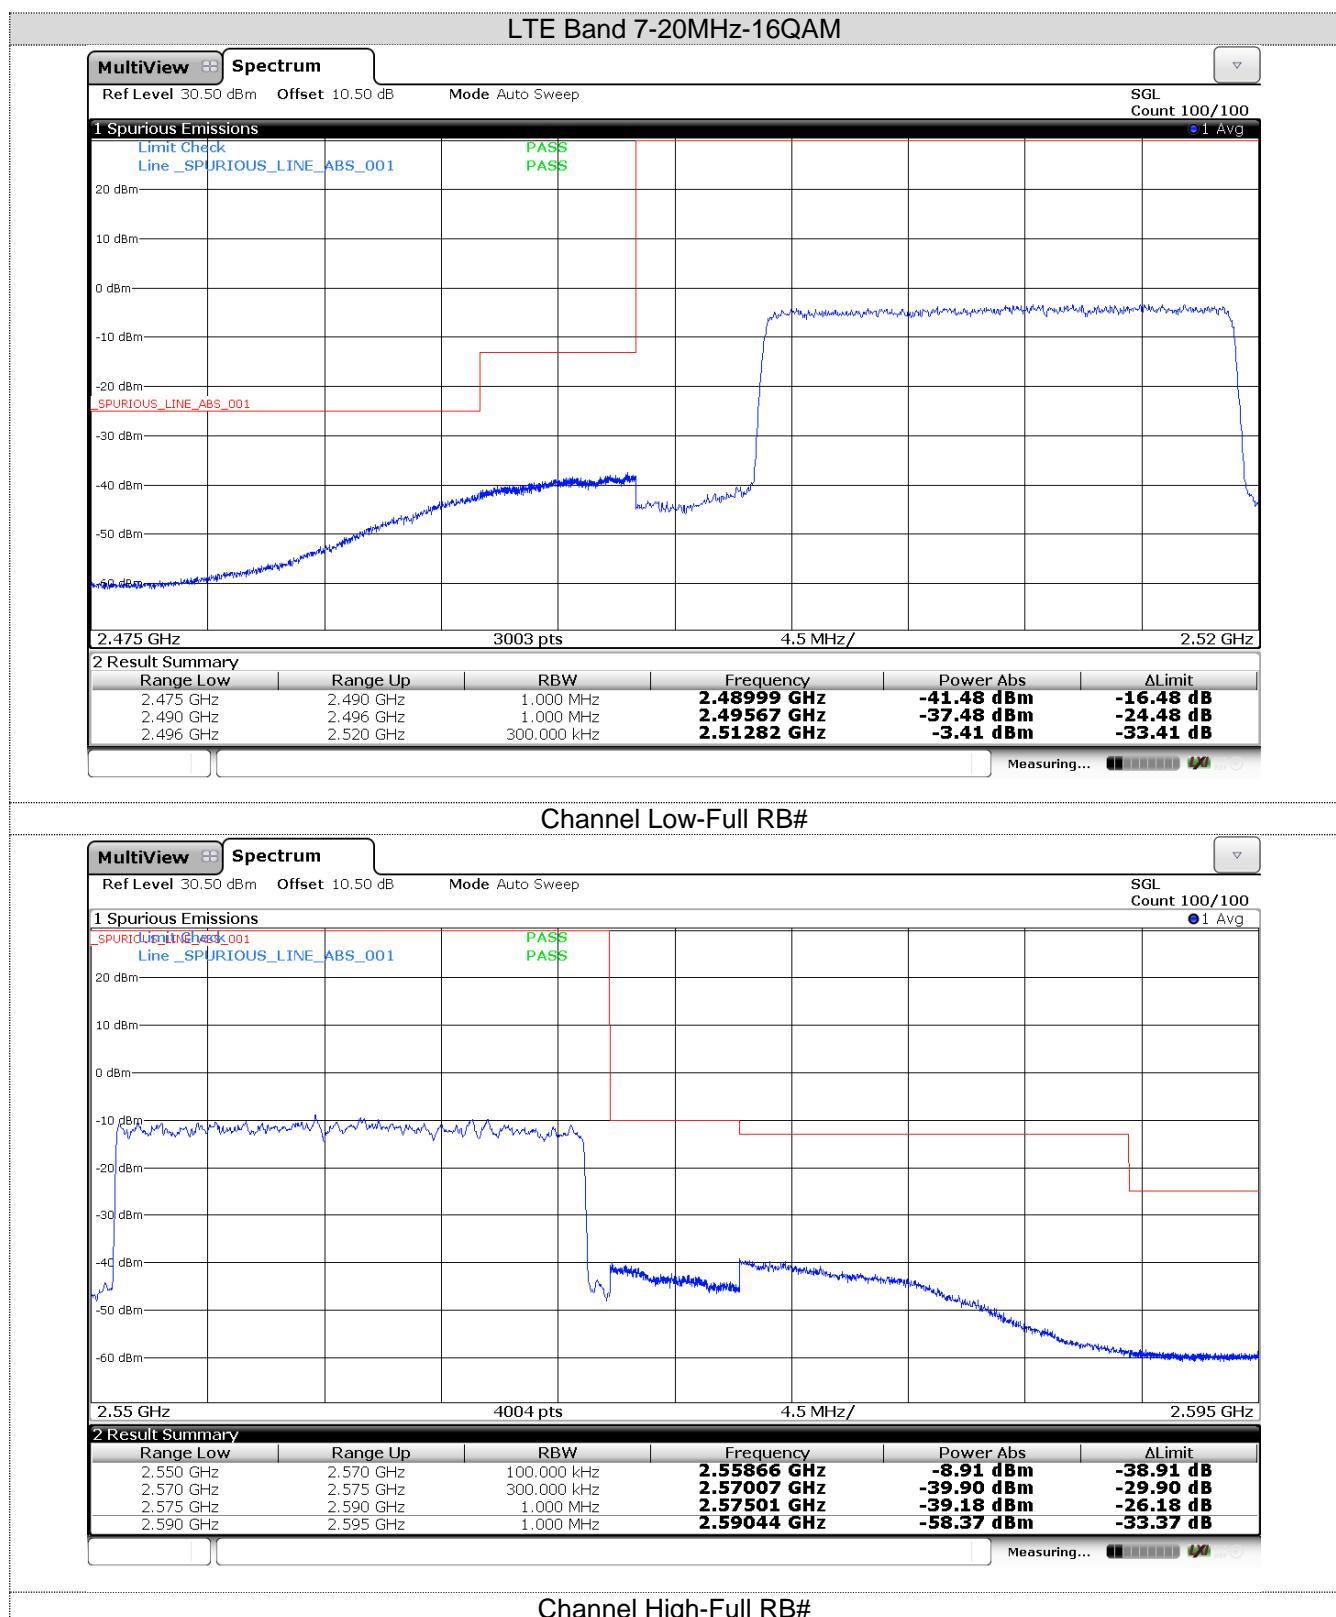

LTE Band 17-5MHz-QPSK

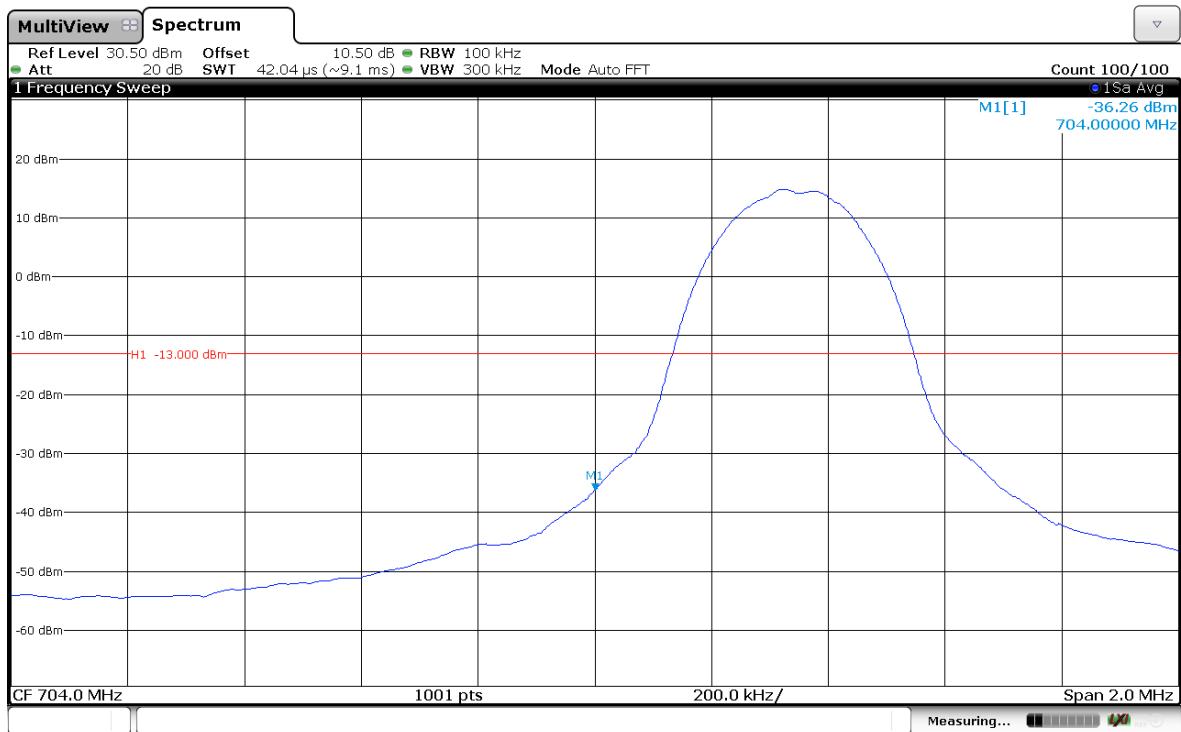

Channel Low-1RB#

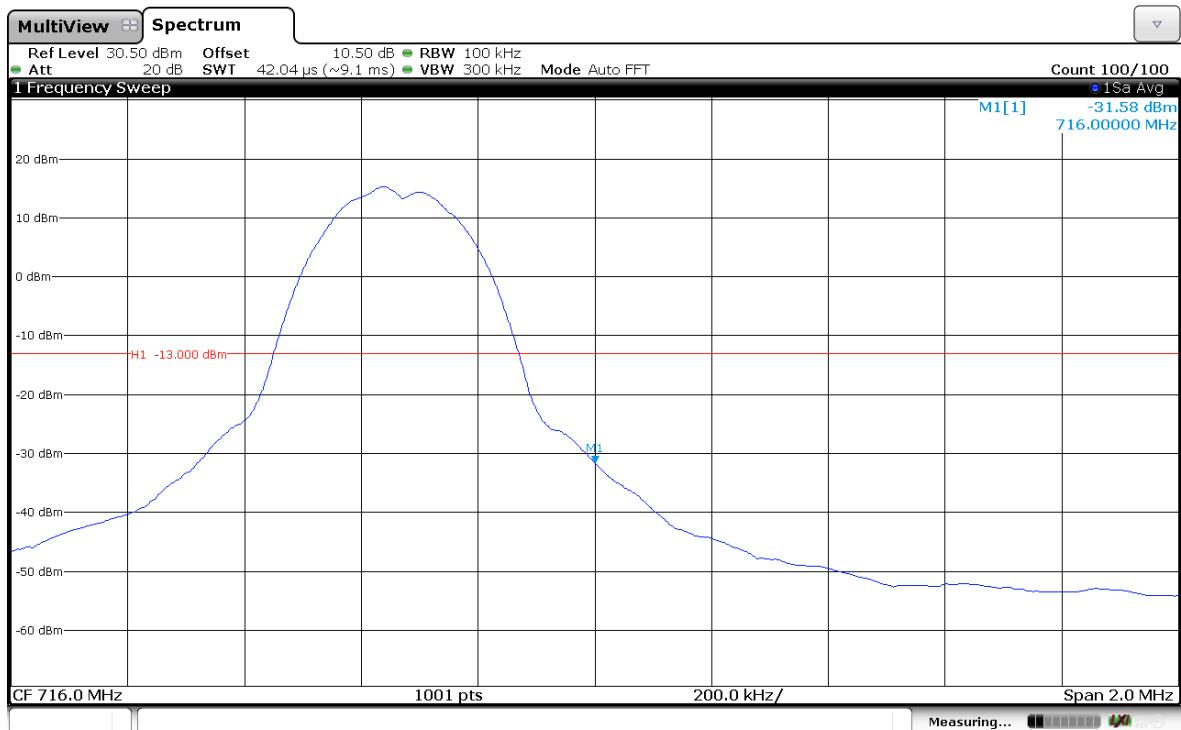


Channel High-1RB#


LTE Band 17-5MHz-QPSK





Channel Low-Full RB#

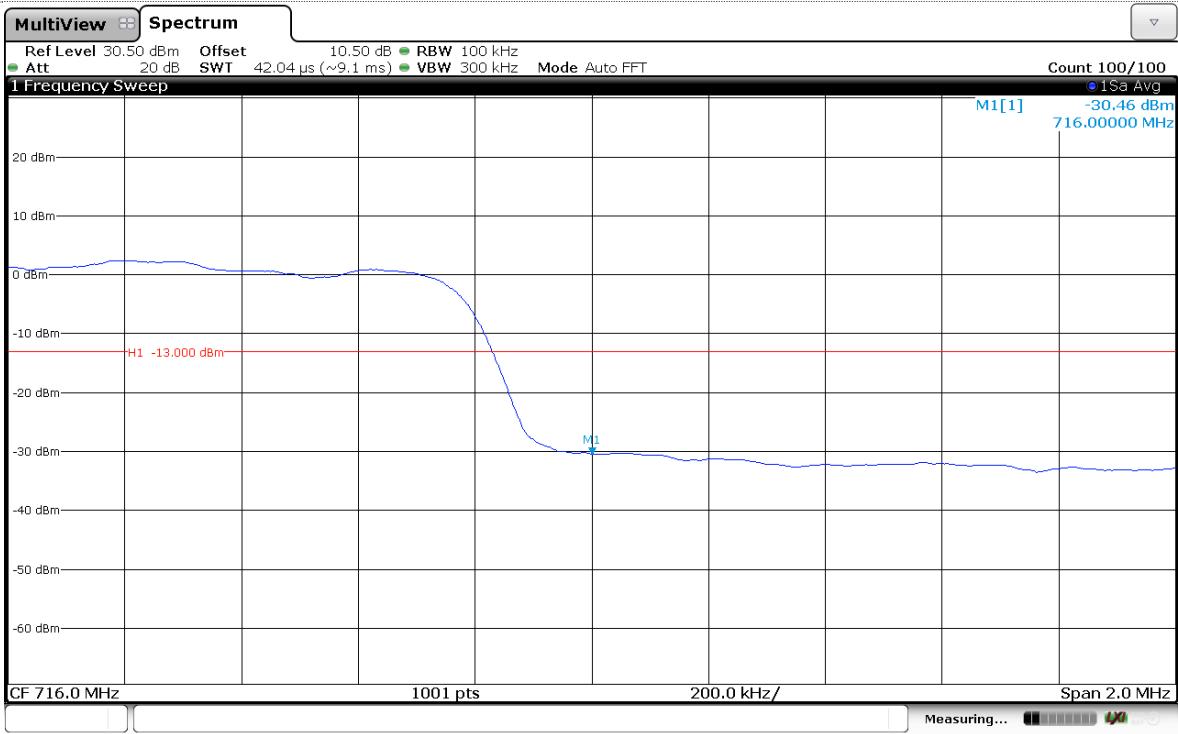



Channel High-Full RB#

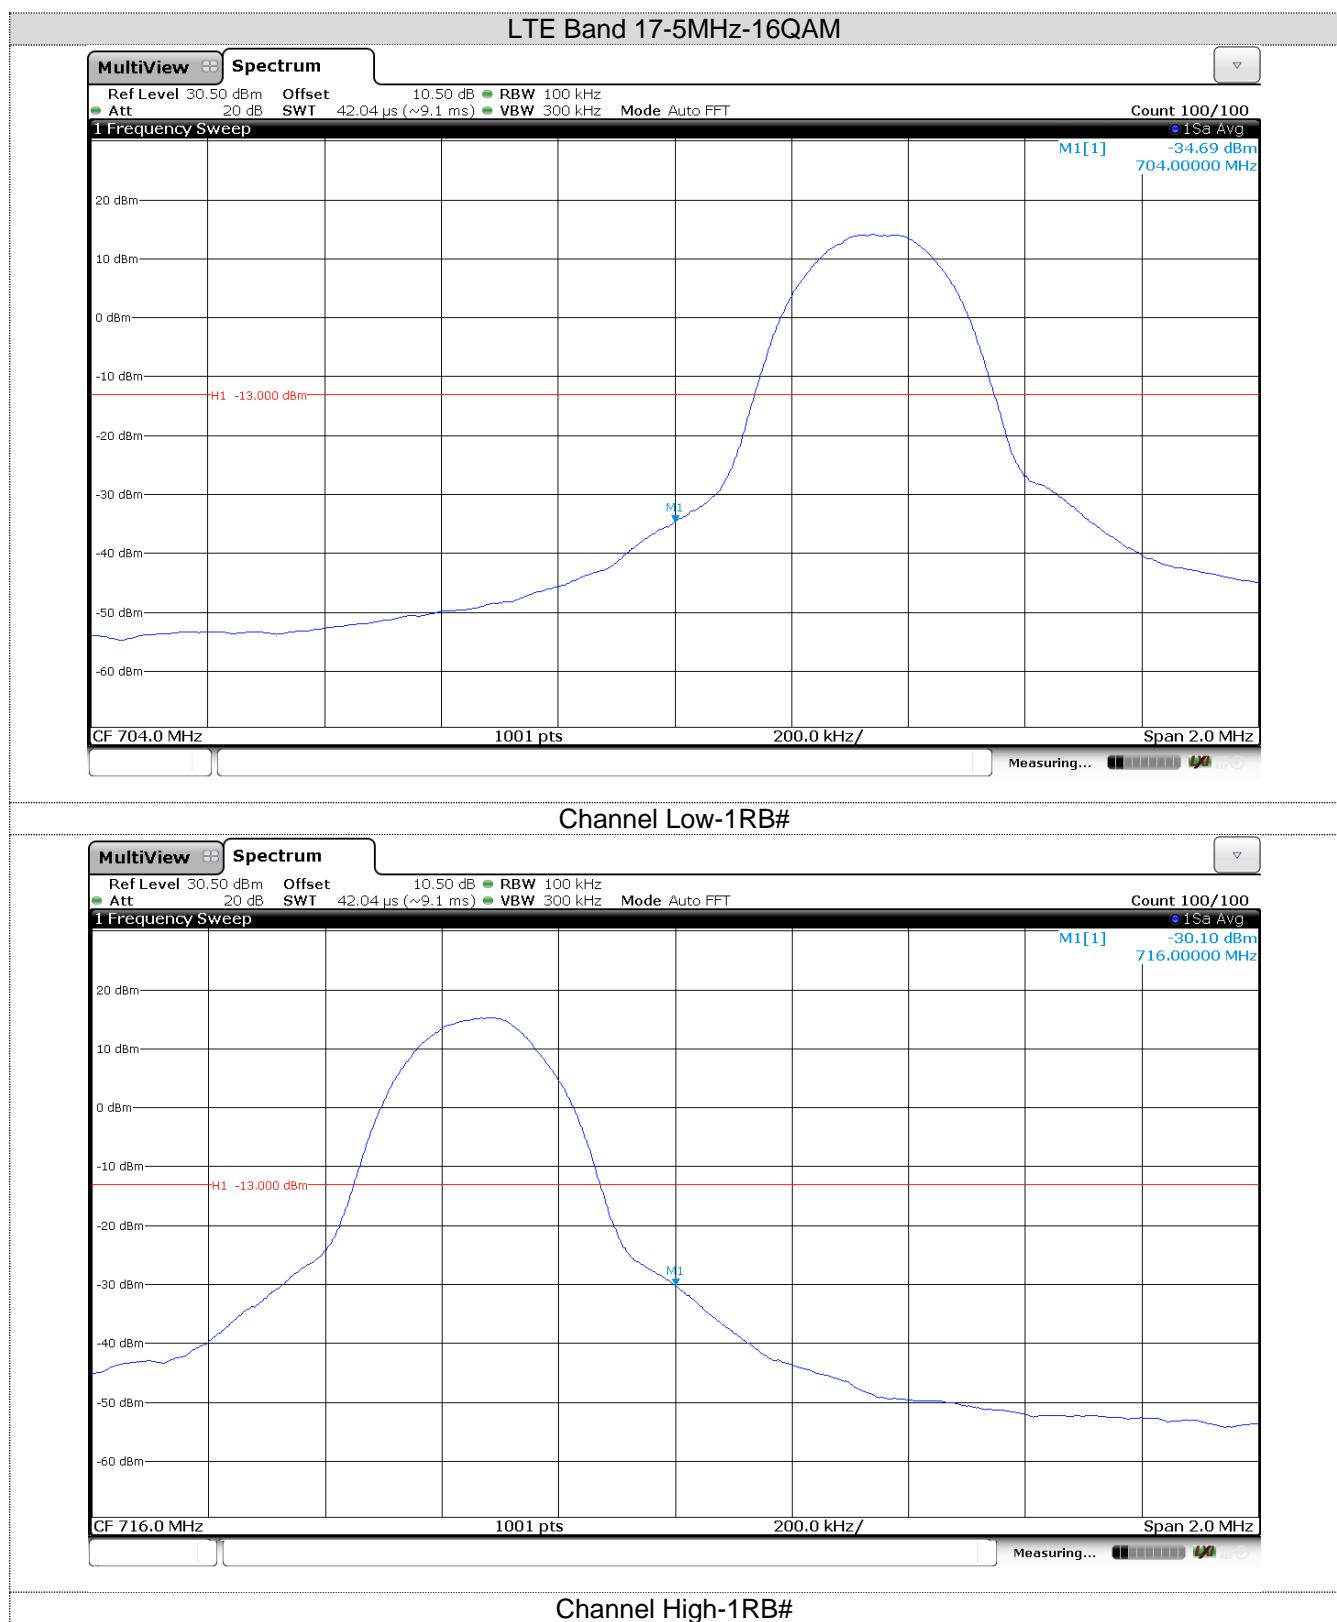


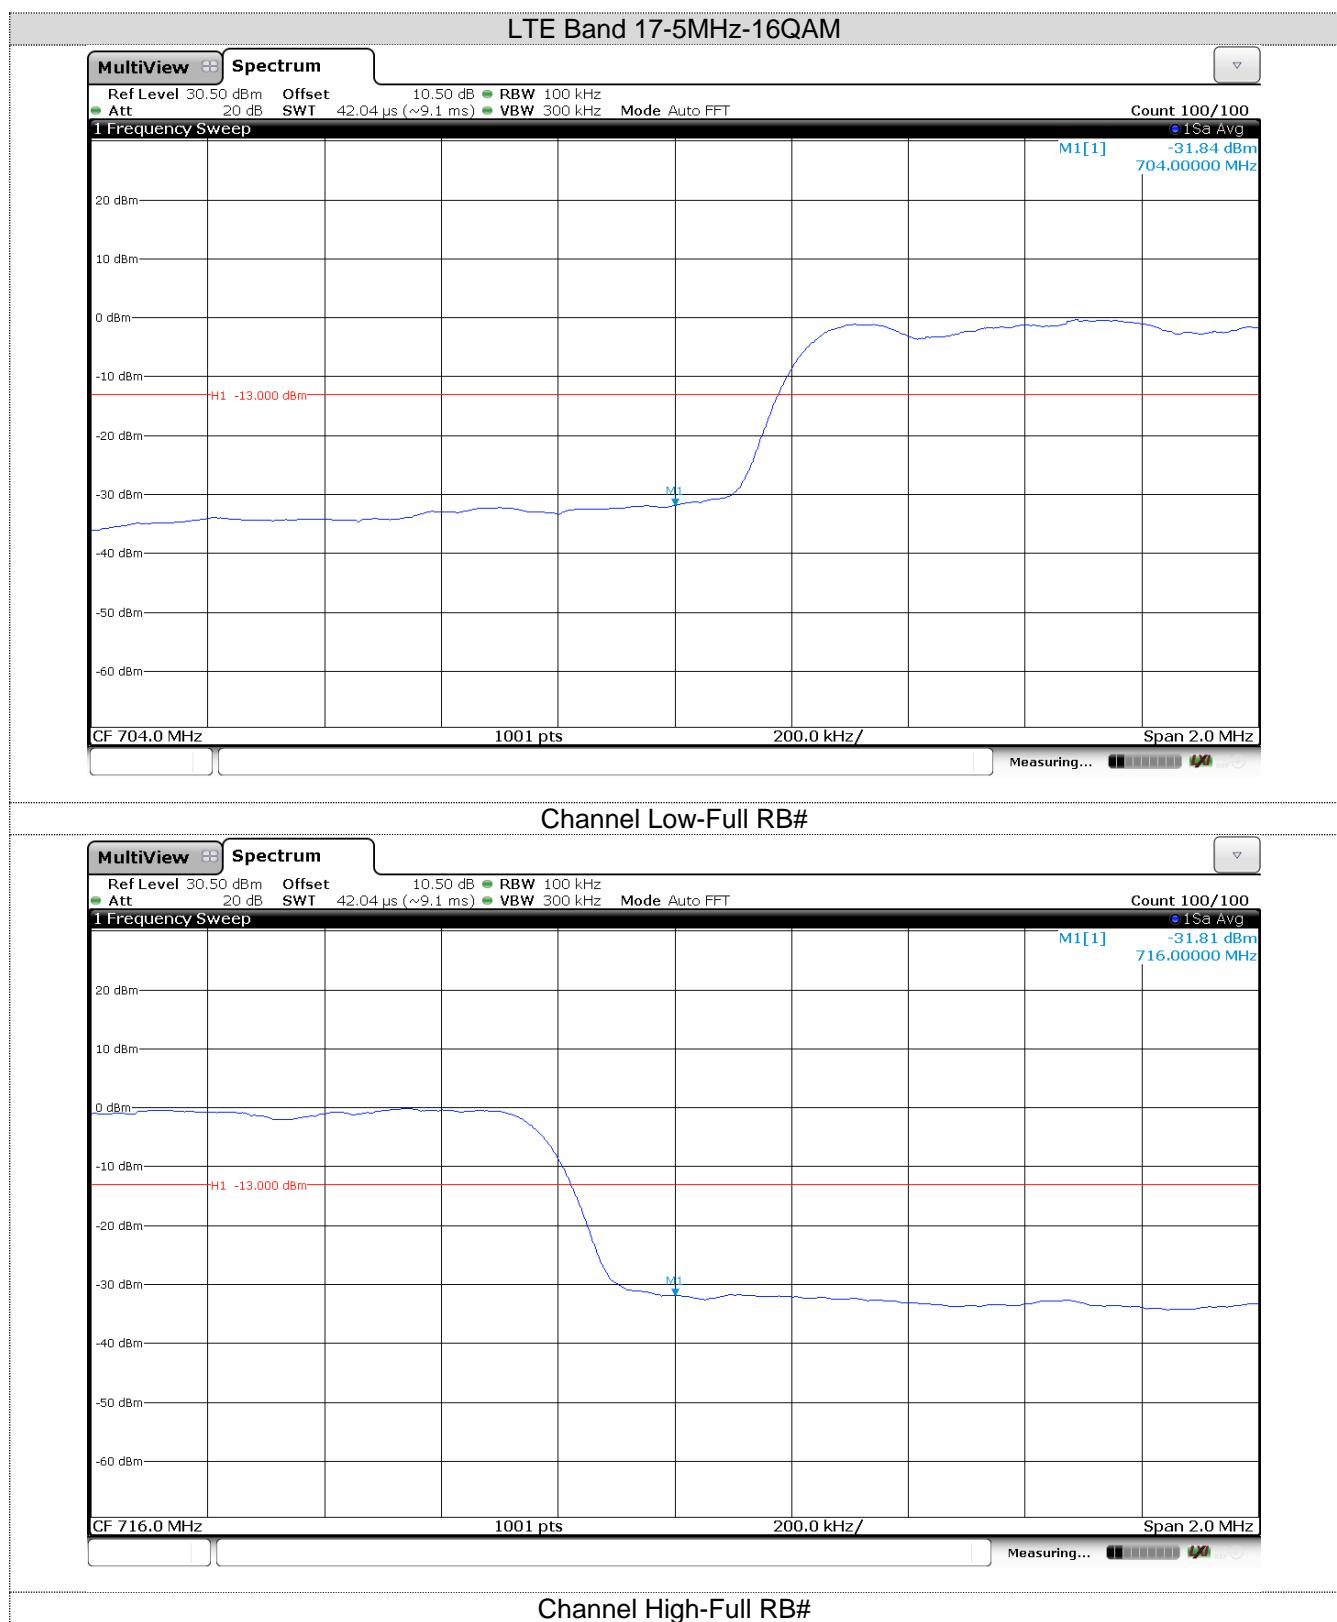

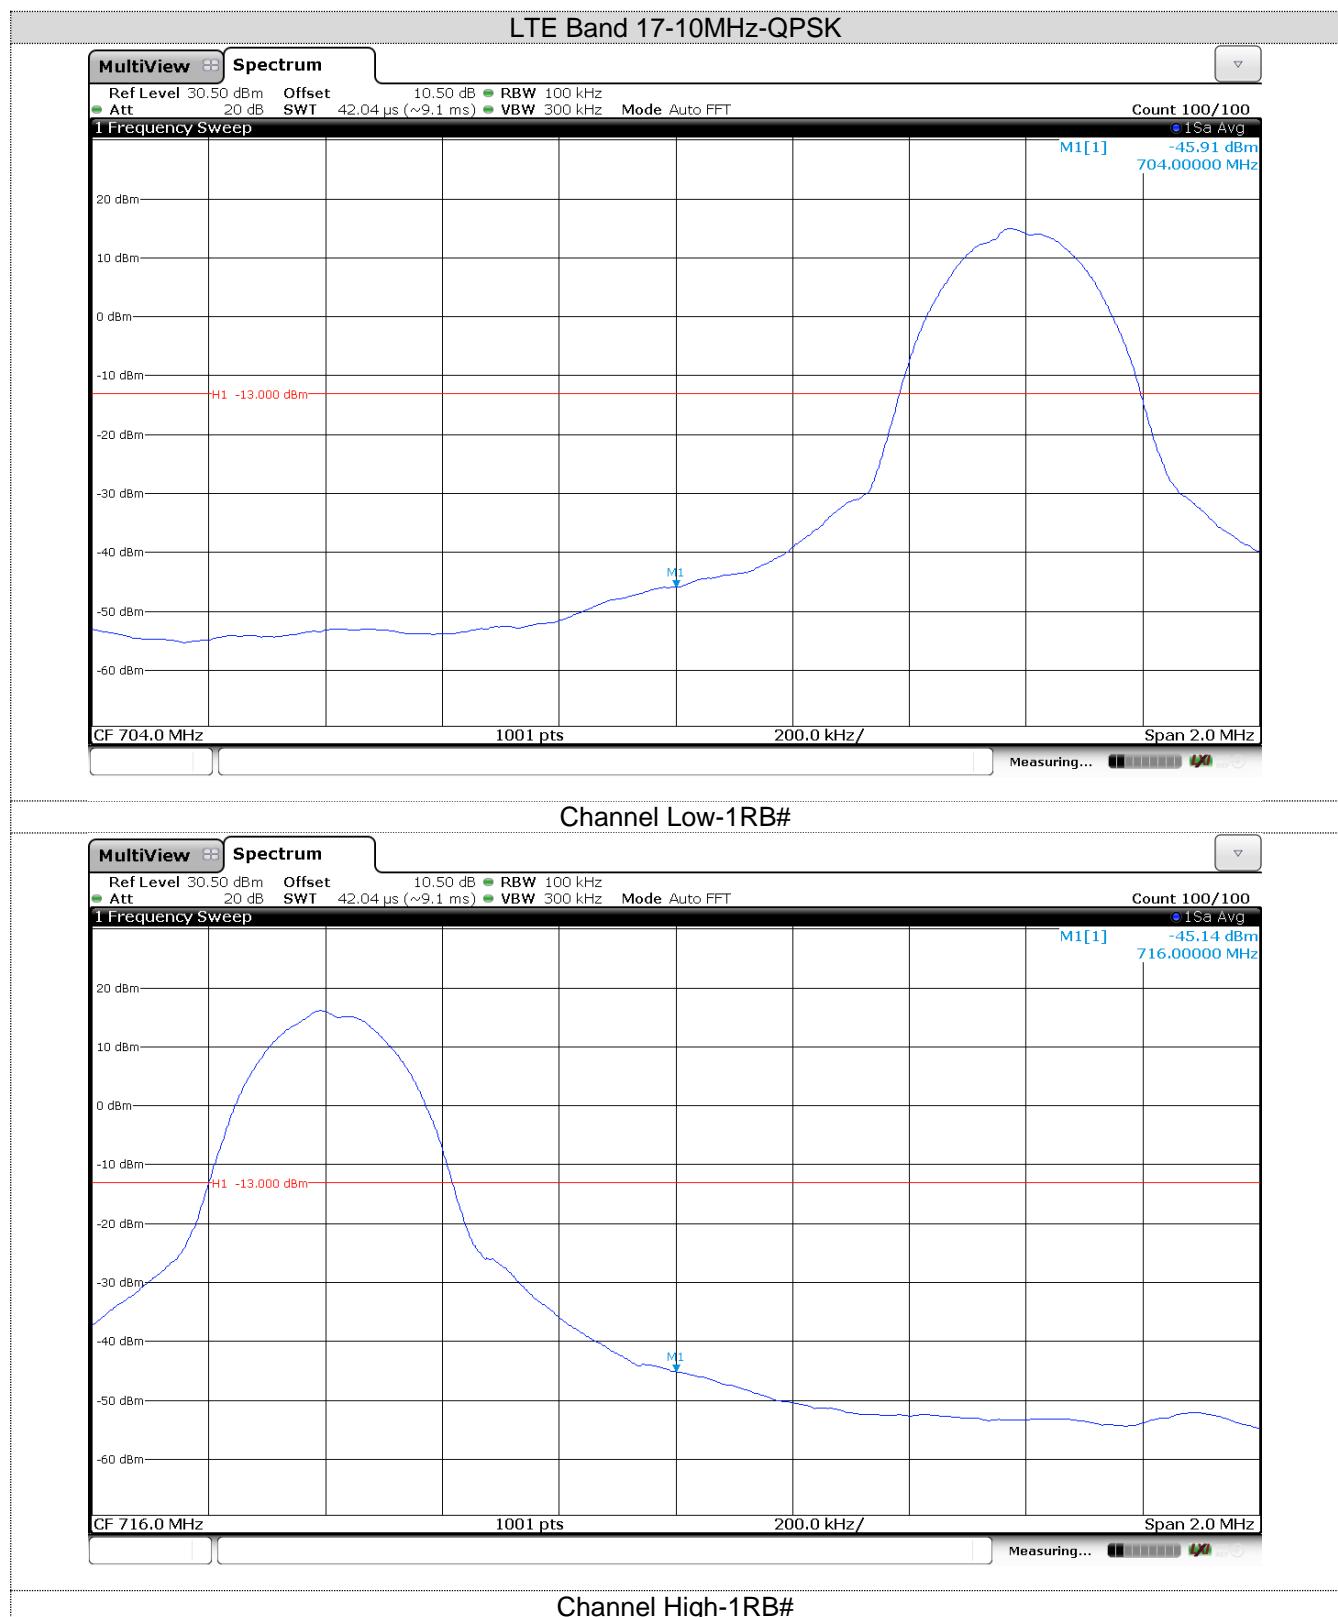

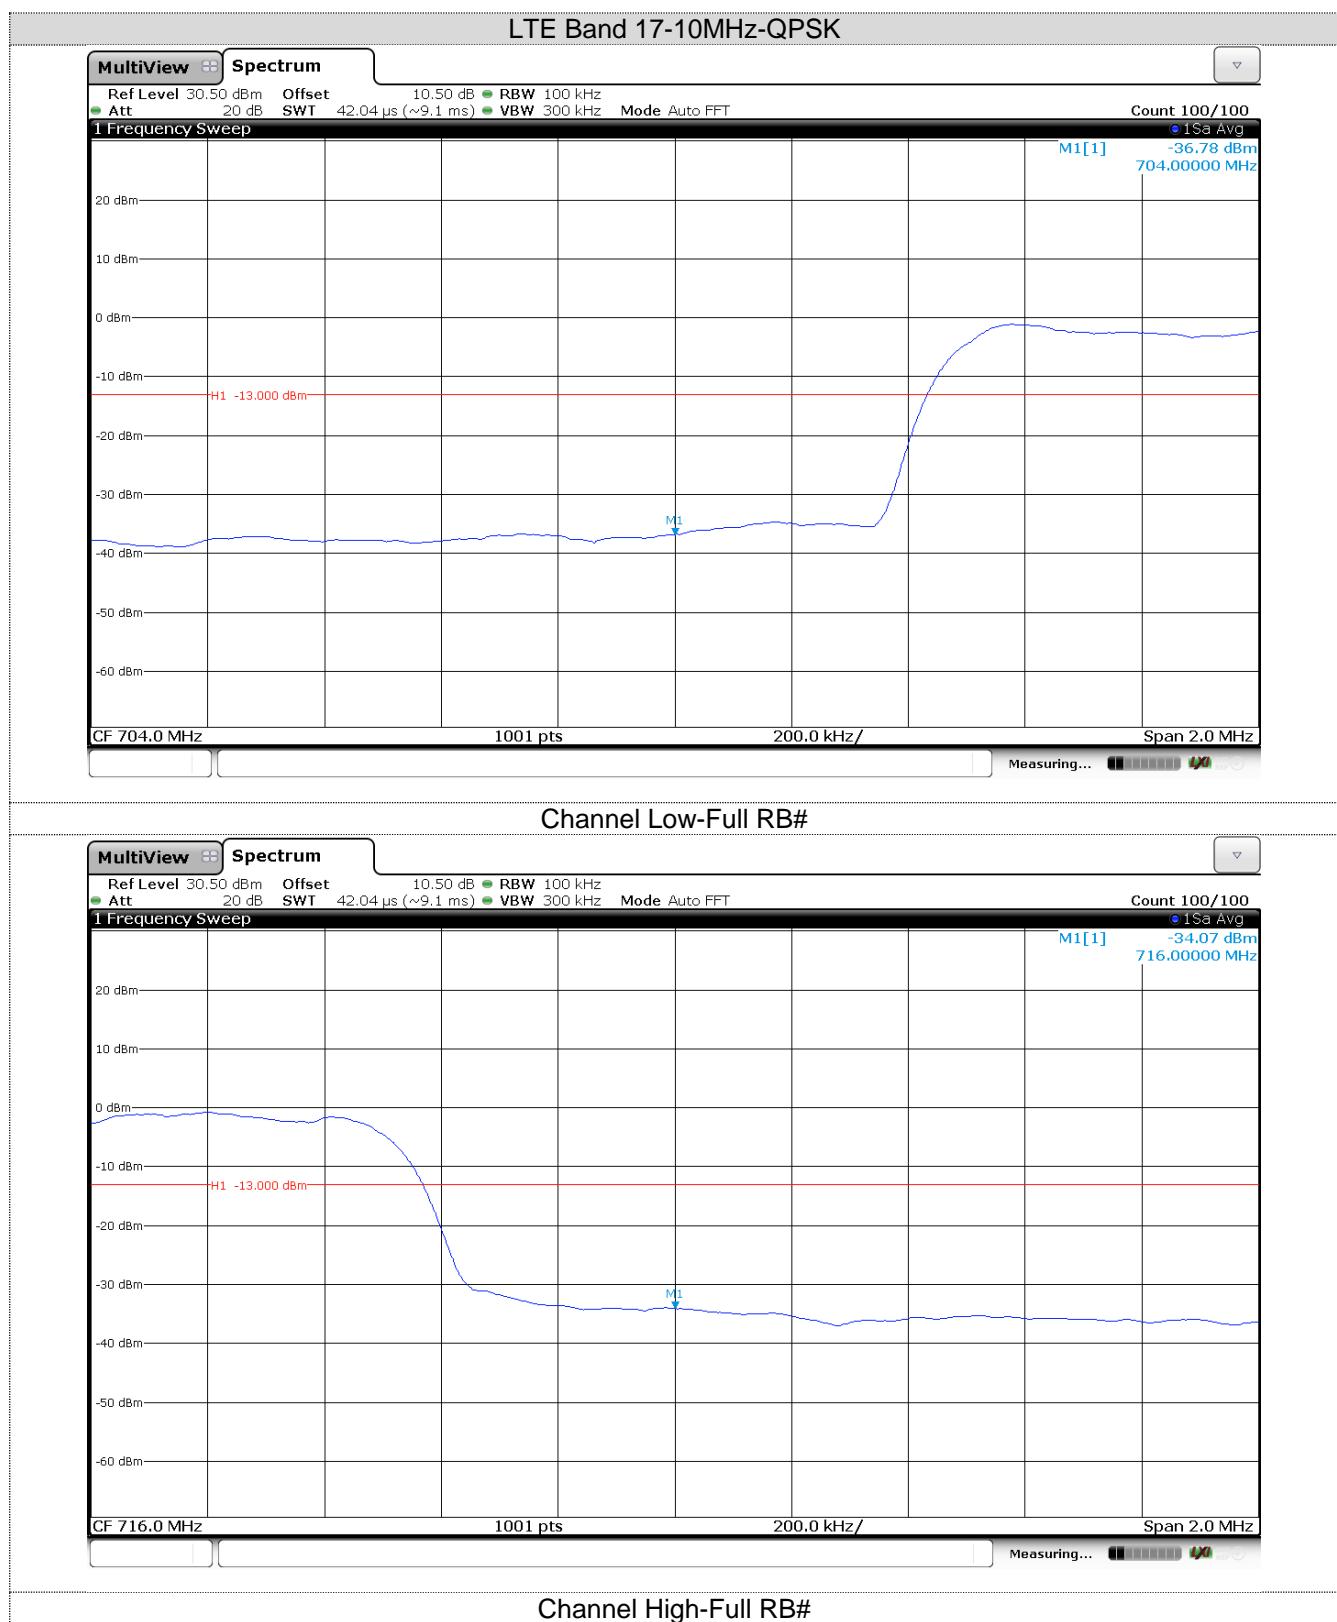

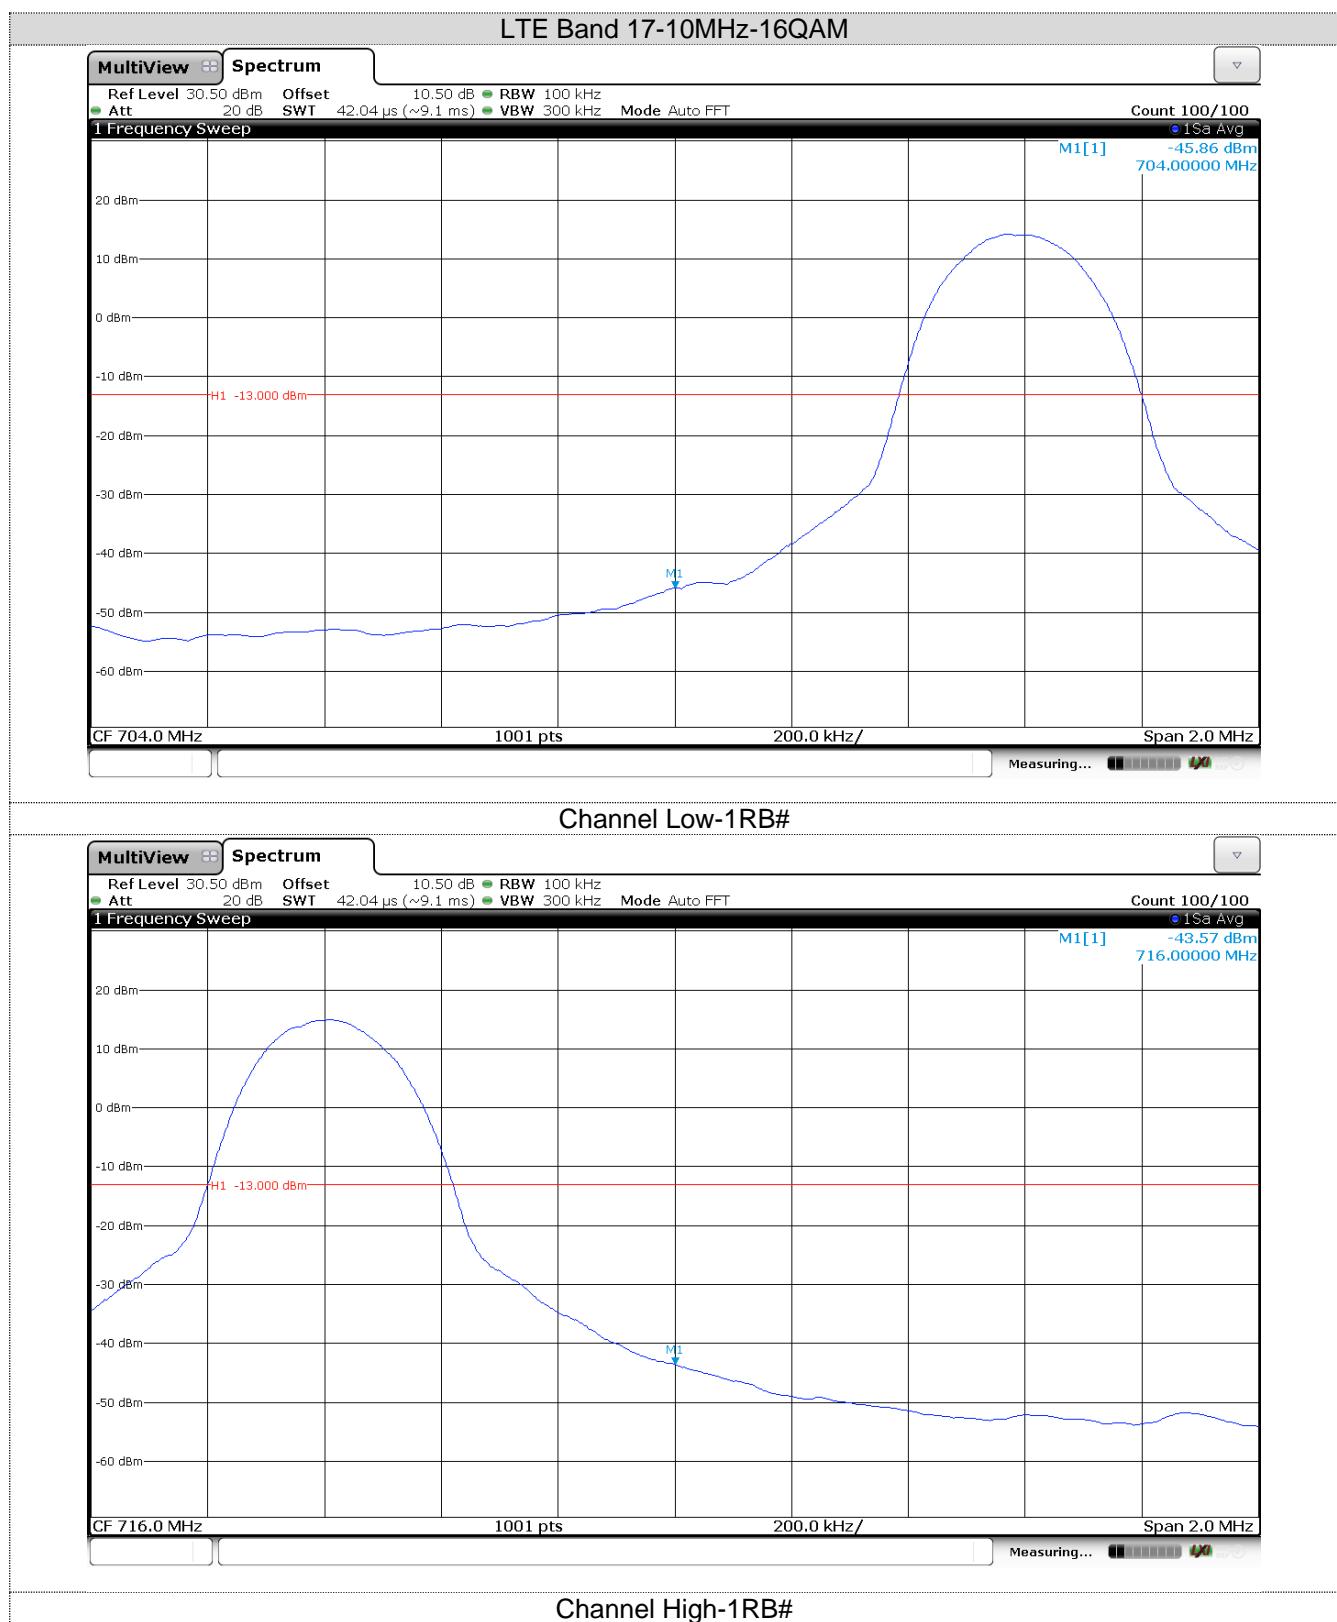

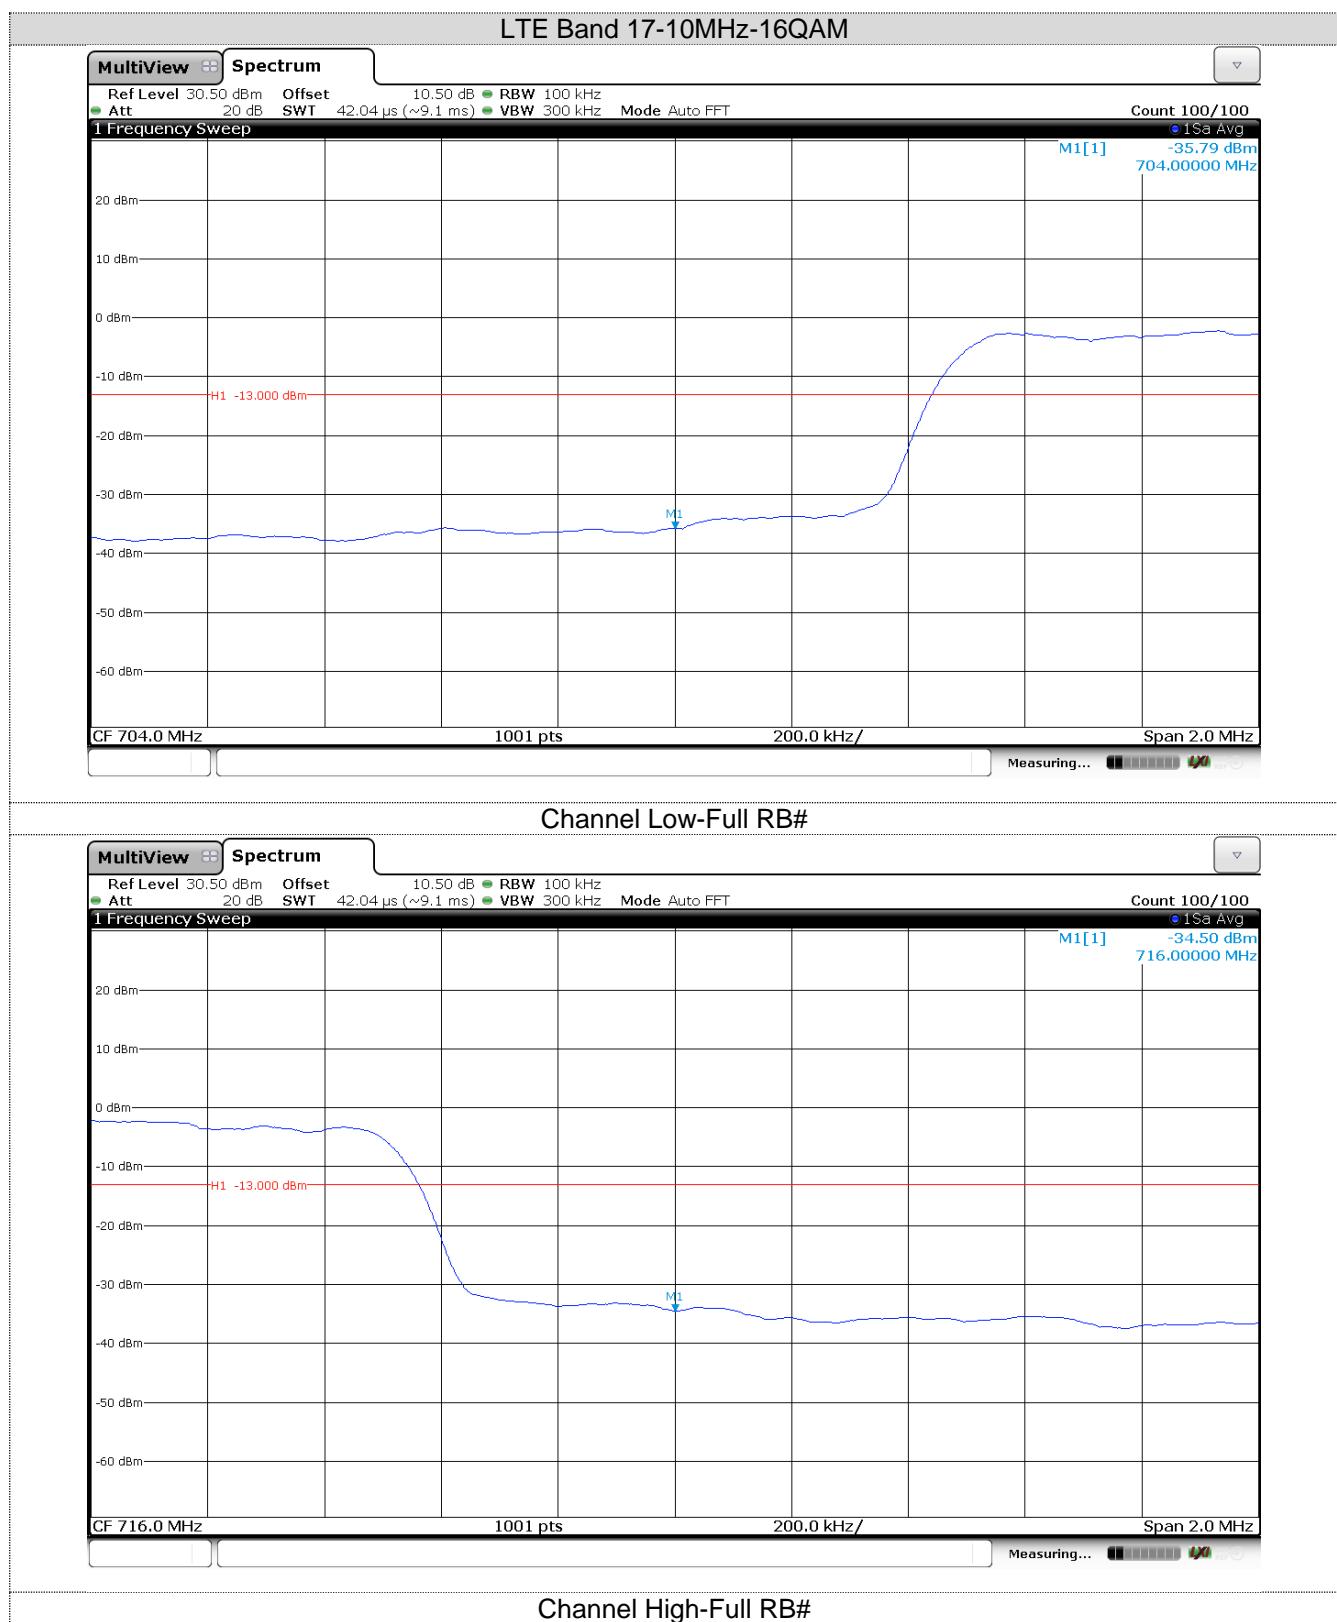


5.5. ERP AND EIRP

LIMIT

LTE Band 2: EIRP<2W ,LTE Band 4:EIRP<1W, LTE Band 7:EIPR<2W, LTE Band 17:ERP<3W,

TEST CONFIGURATION

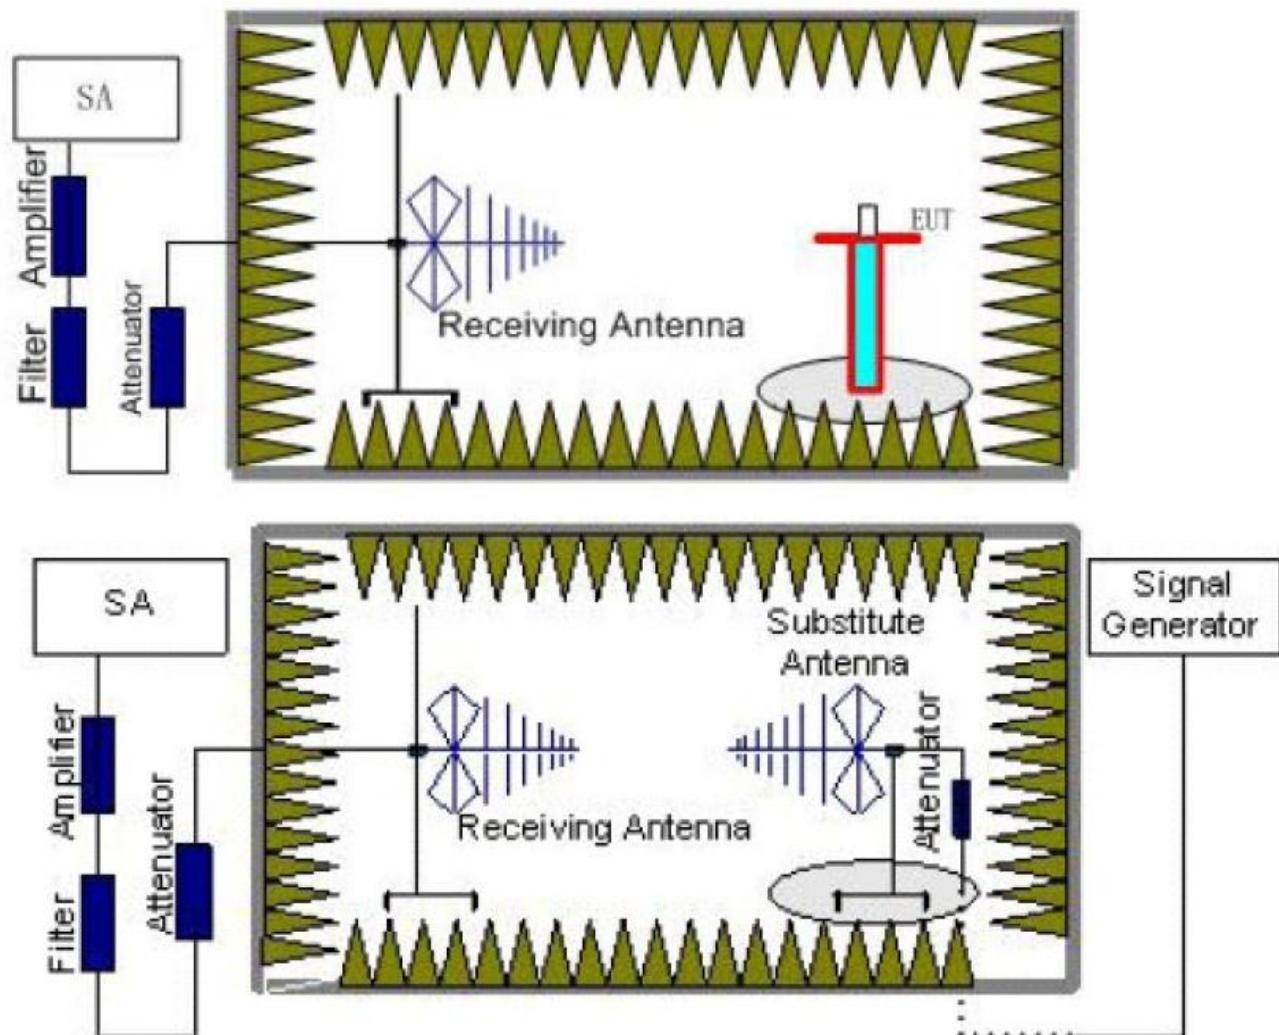

TEST PROCEDURE

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed **Not Applicable**

LTE Band 2-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.45	19.55	33.00	PASS
	Mid	21.45	18.25		
	High	21.43	18.79		
16QAM	Low	22.05	19.42	33.00	PASS
	Mid	22.01	18.37		
	High	21.49	18.91		

LTE Band 2-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.52	19.36	33.00	PASS
	Mid	21.08	18.52		
	High	21.43	19.52		
16QAM	Low	22.08	19.48	33.00	PASS
	Mid	21.91	18.73		
	High	21.53	19.54		

LTE Band 2-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.52	18.32	33.00	PASS
	Mid	21.88	18.43		
	High	21.31	18.52		
16QAM	Low	20.93	18.32	33.00	PASS
	Mid	21.29	18.43		
	High	21.78	18.62		

LTE Band 2-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.15	17.52	33.00	PASS
	Mid	20.52	17.63		
	High	20.36	17.52		
16QAM	Low	20.08	17.06	33.00	PASS
	Mid	20.70	17.73		
	High	20.21	17.34		

LTE Band 2-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.32	17.36	33.00	PASS
	Mid	20.43	17.52		
	High	20.52	17.43		
16QAM	Low	20.60	17.36	33.00	PASS
	Mid	20.43	17.52		
	High	20.59	17.43		

LTE Band 2-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.25	17.85	33.00	PASS
	Mid	20.15	17.65		
	High	20.52	17.52		
16QAM	Low	20.51	17.91	33.00	PASS
	Mid	20.54	17.75		
	High	20.54	17.52		

LTE Band 4-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.08	19.52	30.00	PASS
	Mid	21.52	19.52		
	High	21.33	18.52		
16QAM	Low	21.27	19.57	30.00	PASS
	Mid	21.29	19.47		
	High	21.51	18.47		

LTE Band 4-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.52	18.52	30.00	PASS
	Mid	20.65	18.52		
	High	20.45	18.50		
16QAM	Low	20.29	18.47	30.00	PASS
	Mid	20.31	18.43		
	High	20.47	18.50		

LTE Band 4-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.52	19.52	30.00	PASS
	Mid	20.65	19.52		
	High	20.43	19.35		
16QAM	Low	21.11	19.43	30.00	PASS
	Mid	21.06	19.60		
	High	20.11	19.28		

LTE Band 4-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.52	19.43	30.00	PASS
	Mid	20.65	19.52		
	High	20.35	19.36		
16QAM	Low	20.62	19.44	30.00	PASS
	Mid	20.64	19.51		
	High	20.65	19.35		

LTE Band 4-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.43	18.52	30.00	PASS
	Mid	20.35	18.47		
	High	20.48	18.52		
16QAM	Low	20.10	18.52	30.00	PASS
	Mid	20.35	18.47		
	High	20.39	18.52		

LTE Band 4-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.78	18.52	30.00	PASS
	Mid	20.52	17.66		
	High	19.63	17.52		
16QAM	Low	20.47	18.46	30.00	PASS
	Mid	20.06	17.54		
	High	20.06	17.62		

LTE Band 7-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.52	17.52	33.00	PASS
	Mid	20.65	17.65		
	High	20.43	17.43		
16QAM	Low	20.66	17.41	33.00	PASS
	Mid	20.55	17.75		
	High	20.90	17.33		

LTE Band 7-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.52	17.66	33.00	PASS
	Mid	20.66	17.48		
	High	20.43	17.55		
16QAM	Low	20.98	17.76	33.00	PASS
	Mid	21.35	17.66		
	High	20.50	17.56		

LTE Band 7-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	19.85	16.98	33.00	PASS
	Mid	19.43	16.43		
	High	19.52	16.52		
16QAM	Low	20.08	16.93	33.00	PASS
	Mid	19.25	16.47		
	High	19.35	16.48		

LTE Band 7-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	19.45	16.44	33.00	PASS
	Mid	19.52	16.75		
	High	19.65	16.85		
16QAM	Low	19.19	16.87	33.00	PASS
	Mid	19.34	16.51		
	High	19.38	16.44		

LTE Band 17-5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.35	18.43	34.8	PASS
	Mid	21.66	18.43		
	High	21.54	18.37		
16QAM	Low	21.24	18.52	34.8	PASS
	Mid	21.74	18.35		
	High	21.17	18.45		


LTE Band 17-10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.02	18.47	34.8	PASS
	Mid	21.36	18.52		
	High	21.33	18.43		
16QAM	Low	20.65	18.39	34.8	PASS
	Mid	20.81	18.38		
	High	21.37	18.44		

5.6. Radiated Spurious Emission

LIMIT

LTE Band 2/4/17:<-13dBm;LTE Band 7<-25dBm

TEST CONFIGURATION

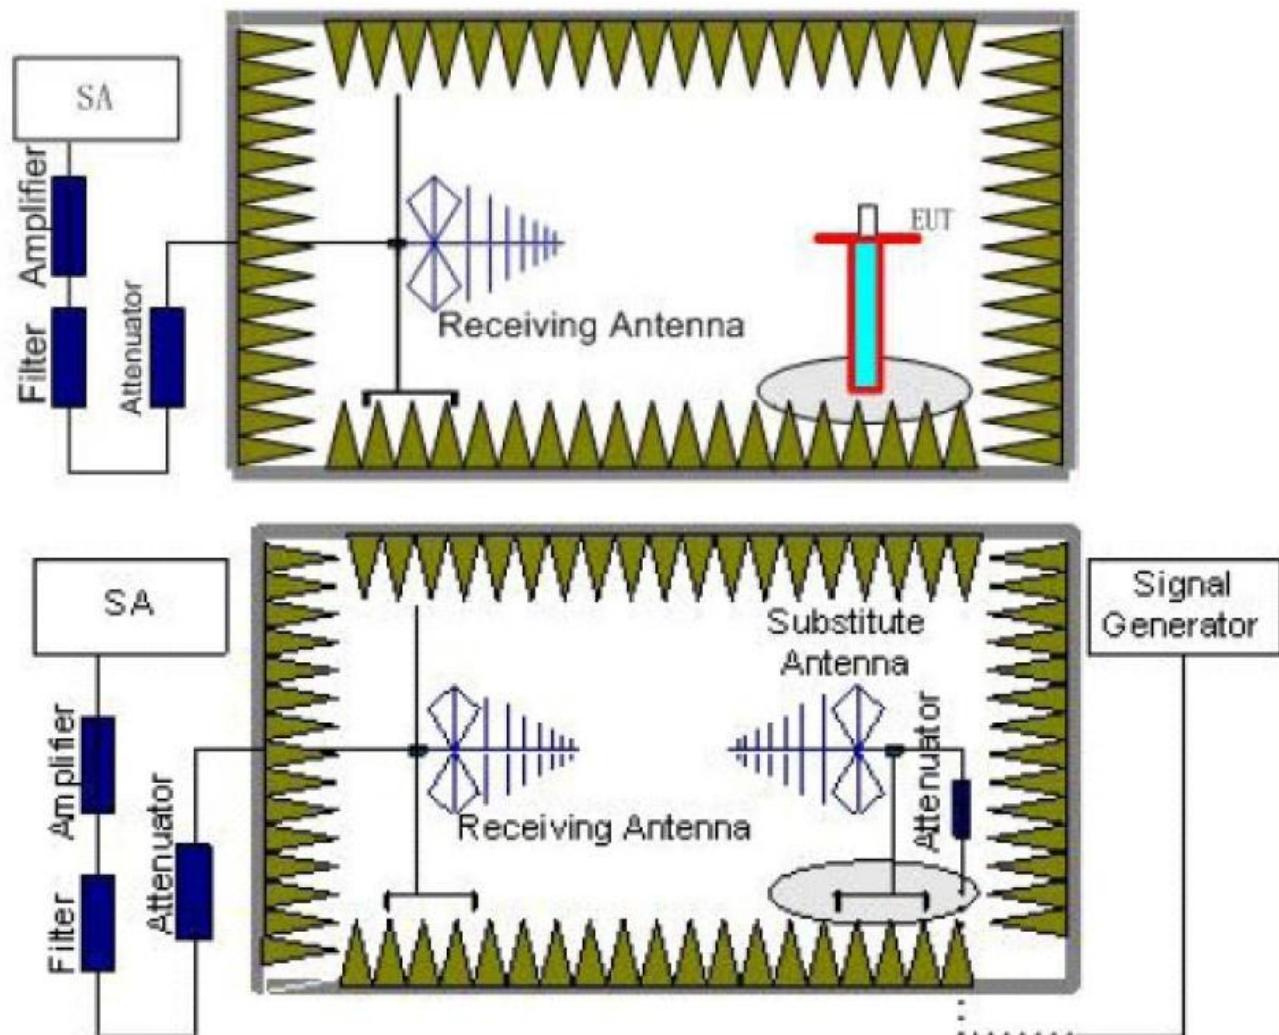

TEST RESULTS

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed **Not Applicable**

LTE Band 2-1.4MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3701.40	Vertical	-40.52	-13.00	Pass
	5552.10	V	-41.65		
	7402.80	V	---		
	3701.40	Horizontal	-44.37	-13.00	Pass
	5552.10	H	-45.74		
	7402.80	H	---		
Mid	3760.00	Vertical	-40.06	-13.00	Pass
	5640.00	V	-41.75		
	7520.00	V	---		
	3760.00	Horizontal	-44.27	-13.00	Pass
	5640.00	H	-45.64		
	7520.00	H	---		
High	3818.60	Vertical	-40.23	-13.00	Pass
	5727.90	V	-41.90		
	7637.20	V	---		
	3818.60	Horizontal	-44.28	-13.00	Pass
	5727.90	H	-45.63		
	7637.20	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-3MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3703.00	Vertical	-40.95	-13.00	Pass
	5554.50	V	-41.52		
	7406.00	V	---		
	3703.00	Horizontal	-41.53	-13.00	Pass
	5554.50	H	-41.40		
	7406.00	H	---		
Mid	3760.00	Vertical	-41.44	-13.00	Pass
	5640.00	V	-41.02		
	7520.00	V	---		
	3760.00	Horizontal	-41.27	-13.00	Pass
	5640.00	H	-40.41		
	7520.00	H	---		
High	3817.00	Vertical	-42.32	-13.00	Pass
	5725.50	V	-40.61		
	7634.00	V	---		
	3817.00	Horizontal	-41.73	-13.00	Pass
	5725.50	H	-40.49		
	7634.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3705.00	Vertical	-41.36	-13.00	Pass
	5557.50	V	-41.70		
	7410.00	V	---		
	3705.00	Horizontal	-40.57	-13.00	Pass
	5557.50	H	-41.86		
	7410.00	H	---		
Mid	3760.00	Vertical	-40.70	-13.00	Pass
	5640.00	V	-42.38		
	7520.00	V	---		
	3760.00	Horizontal	-40.18	-13.00	Pass
	5640.00	H	-43.33		
	7520.00	H	---		
High	3815.00	Vertical	-38.54	-13.00	Pass
	5722.50	V	-43.02		
	7630.00	V	---		
	3815.00	Horizontal	-39.10	-13.00	Pass
	5722.50	H	-43.14		
	7630.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3710.00	Vertical	-40.80	-13.00	Pass
	5565.00	V	-41.99		
	7420.00	V	---		
	3710.00	Horizontal	-39.45	-13.00	Pass
	5565.00	H	-42.27		
	7420.00	H	---		
Mid	3760.00	Vertical	-39.68	-13.00	Pass
	5640.00	V	-43.17		
	7520.00	V	---		
	3760.00	Horizontal	-38.78	-13.00	Pass
	5640.00	H	-44.25		
	7520.00	H	---		
High	3810.00	Vertical	-36.91	-13.00	Pass
	5715.00	V	-43.90		
	7620.00	V	---		
	3810.00	Horizontal	-36.15	-13.00	Pass
	5715.00	H	-43.74		
	7620.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3705.00	Vertical	-39.85	-13.00	Pass
	5557.50	V	-42.39		
	7410.00	V	---		
	3705.00	Horizontal	-38.07	-13.00	Pass
	5557.50	H	-42.75		
	7410.00	H	---		
Mid	3760.00	Vertical	-38.37	-13.00	Pass
	5640.00	V	-43.93		
	7520.00	V	---		
	3760.00	Horizontal	-37.18	-13.00	Pass
	5640.00	H	-43.68		
	7520.00	H	---		
High	3815.00	Vertical	-37.63	-13.00	Pass
	5722.50	V	-43.76		
	7630.00	V	---		
	3815.00	Horizontal	-37.88	-13.00	Pass
	5722.50	H	-43.81		
	7630.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3720.00	Vertical	-38.59	-13.00	Pass
	5580.00	V	-42.83		
	7440.00	V	---		
	3720.00	Horizontal	-36.58	-13.00	Pass
	5580.00	H	-43.24		
	7440.00	H	---		
Mid	3760.00	Vertical	-36.92	-13.00	Pass
	5640.00	V	-44.58		
	7520.00	V	---		
	3760.00	Horizontal	-35.58	-13.00	Pass
	5640.00	H	-45.47		
	7520.00	H	---		
High	3800.00	Vertical	-34.05	-13.00	Pass
	5700.00	V	-45.18		
	7600.00	V	---		
	3800.00	Horizontal	-35.46	-13.00	Pass
	5700.00	H	-45.47		
	7600.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-1.4MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3421.40	Vertical	-37.85	-13.00	Pass
	5132.10	V	35.43		
	6842.80	V	---		
	3421.40	Horizontal	-40.25	-13.00	Pass
	5132.10	H	-37.67		
	6842.80	H	---		
Mid	3465.00	Vertical	-37.94	-13.00	Pass
	5197.50	V	35.51		
	6930.00	V	---		
	3465.00	Horizontal	-40.14	-13.00	Pass
	5197.50	H	-37.58		
	6930.00	H	---		
High	3508.60	Vertical	-38.07	-13.00	Pass
	5262.90	V	35.38		
	7017.20	V	---		
	3508.60	Horizontal	-40.15	-13.00	Pass
	5262.90	H	-37.59		
	7017.20	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-3MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3423.00	Vertical	-38.22	-13.00	Pass
	5134.50	V	35.55		
	6846.00	V	---		
	3423.00	Horizontal	-40.02	-13.00	Pass
	5134.50	H	-37.56		
	6846.00	H	---		
Mid	3465.00	Vertical	-38.31	-13.00	Pass
	5197.50	V	35.47		
	6930.00	V	---		
	3465.00	Horizontal	-39.84	-13.00	Pass
	5197.50	H	-37.70		
	6930.00	H	---		
High	3507.00	Vertical	-38.57	-13.00	Pass
	5260.50	V	35.70		
	7014.00	V	---		
	3423.00	Horizontal	-39.71	-13.00	Pass
	5134.50	H	-37.83		
	6846.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3425.00	Vertical	-38.62	-13.00	Pass
	5137.50	V	35.38		
	6850.00	V	---		
	3425.00	Horizontal	-39.88	-13.00	Pass
	5137.50	H	-37.99		
	6850.00	H	---		
Mid	3465.00	Vertical	-38.48	-13.00	Pass
	5197.50	V	35.50		
	6930.00	V	-		
	3465.00	Horizontal	-39.71	-13.00	Pass
	5197.50	H	-37.85		
	6930.00	H	---		
High	3505.00	Vertical	-38.72	-13.00	Pass
	5257.50	V	35.28		
	7010.00	V	-		
	3505.00	Horizontal	-39.83	-13.00	Pass
	5257.50	H	-37.97		
	7010.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3430.00	Vertical	-38.06	-13.00	Pass
	5145.00	V	35.08		
	6860.00	V	---		
	3430.00	Horizontal	-39.41	-13.00	Pass
	5145.00	H	-37.61		
	6860.00	H	---		
Mid	3465.00	Vertical	-38.28	-13.00	Pass
	5197.50	V	34.87		
	6930.00	V	---		
	3465.00	Horizontal	-39.51	-13.00	Pass
	5197.50	H	-37.70		
	6930.00	H	-		
High	3500.00	Vertical	-38.14	-13.00	Pass
	5250.00	V	35.00		
	7000.00	V	-		
	3500.00	Horizontal	-39.35	-13.00	Pass
	5250.00	H	-37.54		
	7000.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3435.00	Vertical	-37.10	-13.00	Pass
	5152.50	V	34.69		
	6870.00	V	---		
	3435.00	Horizontal	-39.74	-13.00	Pass
	5152.50	H	-37.17		
	6870.00	H	---		
Mid	3465.00	Vertical	-37.40	-13.00	Pass
	5197.50	V	34.41		
	6930.00	V	---		
	3465.00	Horizontal	-39.64	-13.00	Pass
	5197.50	H	-37.09		
	6930.00	H	---		
High	3490.00	Vertical	-37.54	-13.00	Pass
	5235.00	V	34.29		
	6980.00	V	---		
	3490.00	Horizontal	-39.58	-13.00	Pass
	5235.00	H	-37.04		
	6980.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3440.00	Vertical	-35.85	-13.00	Pass
	5160.00	V	33.84		
	6880.00	V	---		
	3440.00	Horizontal	-39.17	-13.00	Pass
	5160.00	H	-37.39		
	6880.00	H	---		
Mid	3465.00	Vertical	-35.54	-13.00	Pass
	5197.50	V	33.68		
	6930.00	V	---		
	3465.00	Horizontal	-39.33	-13.00	Pass
	5197.50	H	-37.26		
	6930.00	H	---		
High	3490.00	Vertical	-35.31	-13.00	Pass
	5235.00	V	-37.18		
	6980.00	V	---		
	3490.00	Horizontal	-38.86	-13.00	Pass
	5235.00	H	-37.10		
	6980.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5005.00	Vertical	-41.32	-25.00	Pass
	7507.50	V	-44.58		
	10010.00	V	---		
	5005.00	Horizontal	-44.75	-25.00	Pass
	7507.50	H	-46.84		
	10010.00	H	---		
Mid	5070.00	Vertical	-40.49	-25.00	Pass
	7605.00	V	-43.85		
	10140.00	V	---		
	5070.00	Horizontal	-43.90	-25.00	Pass
	7605.00	H	-44.51		
	10140.00	H	---		
High	5135.00	Vertical	-41.15	-25.00	Pass
	7702.50	V	-44.94		
	10270.00	V	---		
	5135.00	Horizontal	-43.63	-25.00	Pass
	7702.50	H	-44.99		
	10270.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5010.00	Vertical	-41.37	-25.00	Pass
	7515.00	V	-44.53		
	10020.00	V	---		
	5010.00	Horizontal	-44.95	-25.00	Pass
	7515.00	H	-46.88		
	10020.00	H	---		
Mid	5070.00	Vertical	-41.53	-25.00	Pass
	7605.00	V	-44.67		
	10140.00	V	---		
	5070.00	Horizontal	-44.09	-25.00	Pass
	7605.00	H	-45.34		
	10140.00	H	---		
High	5130.00	Vertical	-42.19	-25.00	Pass
	7695.00	V	-45.77		
	10260.00	V	---		
	5130.00	Horizontal	-43.81	-25.00	Pass
	7695.00	H	-45.83		
	10260.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5015.00	Vertical	-41.31	-25.00	Pass
	7522.50	V	-44.59		
	10030.00	V	---		
	5015.00	Horizontal	-44.69	-25.00	Pass
	7522.50	H	-46.83		
	10030.00	H	---		
Mid	5070.00	Vertical	-41.10	-25.00	Pass
	7605.00	V	-44.41		
	10140.00	V	---		
	5070.00	Horizontal	-45.79	-25.00	Pass
	7605.00	H	-43.56		
	10140.00	H	---		
High	5125.00	Vertical	-40.25	-25.00	Pass
	7687.50	V	-43.01		
	10250.00	V	---		
	5125.00	Horizontal	-45.34	-25.00	Pass
	7687.50	H	-43.10		
	10250.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5015.00	Vertical	-41.24	-25.00	Pass
	7522.50	V	-44.66		
	10030.00	V	---		
	5015.00	Horizontal	-44.40	-25.00	Pass
	7522.50	H	-46.76		
	10030.00	H	---		
Mid	5070.00	Vertical	-41.01	-25.00	Pass
	7605.00	V	-44.46		
	10140.00	V	---		
	5070.00	Horizontal	-45.15	-25.00	Pass
	7605.00	H	-43.88		
	10140.00	H	---		
High	5125.00	Vertical	-40.43	-25.00	Pass
	7687.50	V	-43.51		
	10250.00	V	---		
	5125.00	Horizontal	-44.94	-25.00	Pass
	7687.50	H	-43.55		
	10250.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 17-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1413.00	Vertical	-28.45	-13.00	Pass
	2119.50	V	-30.64		
	2826.00	V	---		
	1413.00	Horizontal	-34.75	-13.00	Pass
	2119.50	H	-35.88		
	2826.00	H	---		
Mid	1420.00	Vertical	-28.33	-13.00	Pass
	2130.00	V	-30.53		
	2840.00	V	---		
	1420.00	Horizontal	-34.62	-13.00	Pass
	2130.00	H	-35.78		
	2840.00	H	---		
High	1427.00	Vertical	-28.50	-13.00	Pass
	2140.50	V	-30.69		
	2854.00	V	-		
	1427.00	Horizontal	-34.65	-13.00	Pass
	2140.50	H	-35.80		
	2854.00	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 17-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1418.00	Vertical	-28.48	-13.00	Pass
	2127.00	V	-30.61		
	2836.00	V	---		
	1418.00	Horizontal	-34.87	-13.00	Pass
	2127.00	H	-35.91		
	2836.00	H	---		
Mid	1420.00	Vertical	-28.57	-13.00	Pass
	2130.00	V	-30.70		
	2840.00	V	---		
	1420.00	Horizontal	-34.61	-13.00	Pass
	2130.00	H	-36.11		
	2840.00	H	---		
High	1422.00	Vertical	-29.47	-13.00	Pass
	2133.00	V	-32.17		
	2844.00	V	---		
	1422.00	Horizontal	-36.09	-13.00	Pass
	2133.00	H	-37.52		
	2844.00	H	---		

Remark:


1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

5.7. Frequency stability V.S. Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

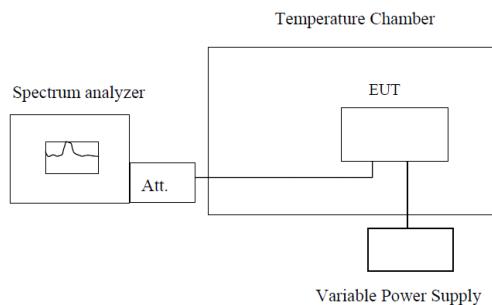

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

Reference Frequency: LTE Band 2 Middle channel=1880MHz,20MHz Bandwidth									
Power supplied (Vdc)	Temperature (°C)	Frequency error				Limit (ppm)	Result		
		QPSK		16QAM					
		Hz	ppm	Hz	ppm				
3.80	-30	15	0.0080	25	0.0133	2.50	Pass		
	-20	16	0.0085	24	0.0128				
	-10	17	0.0090	21	0.0112				
	0	15	0.0080	26	0.0138				
	10	14	0.0074	23	0.0122				
	20	13	0.0069	24	0.0128				
	30	18	0.0096	28	0.0149				
	40	16	0.0085	26	0.0138				
	50	17	0.0090	27	0.0144				
Reference Frequency: LTE Band 4 Middle channel=1732.5MHz,20MHz Bandwidth									
Power supplied (Vdc)	Temperature (°C)	Frequency error				Limit (ppm)	Result		
		QPSK		16QAM					
		Hz	ppm	Hz	ppm				
3.80	-30	16	0.0092	22	0.0127	2.50	Pass		
	-20	17	0.0098	21	0.0121				
	-10	18	0.0104	20	0.0115				
	0	16	0.0092	25	0.0144				
	10	18	0.0104	24	0.0139				
	20	15	0.0087	23	0.0133				
	30	19	0.0110	25	0.0144				
	40	14	0.0081	26	0.0150				
	50	18	0.0104	24	0.0139				
Reference Frequency: LTE Band 7 Middle channel=2535MHz,20MHz Bandwidth									
Power supplied (Vdc)	Temperature (°C)	Frequency error				Limit (ppm)	Result		
		QPSK		16QAM					
		Hz	ppm	Hz	ppm				
3.80	-30	19	0.0075	25	0.0099	2.50	Pass		
	-20	20	0.0079	23	0.0091				
	-10	21	0.0083	23	0.0091				
	0	22	0.0087	25	0.0099				
	10	19	0.0075	26	0.0103				
	20	18	0.0071	25	0.0099				
	30	19	0.0075	24	0.0095				
	40	20	0.0079	23	0.0091				
	50	23	0.0091	25	0.0099				


Reference Frequency: LTE Band 17 Middle channel=710MHz,10MHz Bandwidth									
Power supplied (Vdc)	Temperature (°C)	Frequency error				Limit (ppm)	Result		
		QPSK		16QAM					
		Hz	ppm	Hz	ppm				
3.80	-30	18	0.0254	26	0.0366	2.50	Pass		
	-20	19	0.0268	25	0.0352				
	-10	13	0.0183	29	0.0408				
	0	15	0.0211	28	0.0394				
	10	14	0.0197	27	0.0380				
	20	16	0.0225	26	0.0366				
	30	17	0.0239	28	0.0394				
	40	18	0.0254	26	0.0366				
	50	19	0.0268	25	0.0352				

5.8. Frequency stability V.S. Voltagemeasurement

LIMIT

2.5ppm

TEST CONFIGURATION

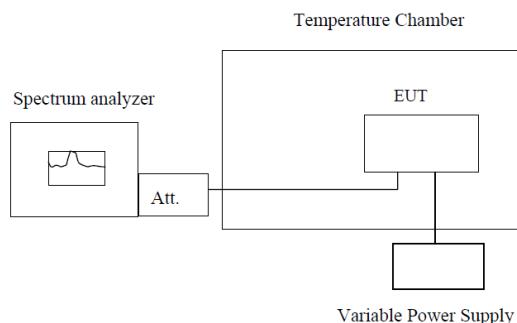

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage.
2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and record the frequency.
3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable


Reference Frequency: LTE Band 2 Middle channel=1880MHz,20MHz Bandwidth									
Temperature (°C)	Power supplied (Vdc)	Frequency error				Limit (ppm)	Result		
		QPSK		16QAM					
		Hz	ppm	Hz	ppm				
25	4.35	16	0.0085	18	0.0096	2.50	Pass		
	3.80	19	0.0101	20	0.0106				
	3.60	18	0.0096	19	0.0101				
Reference Frequency: LTE Band 4 Middle channel=1732.5MHz,20MHz Bandwidth									
Temperature (°C)	Power supplied (Vdc)	Frequency error				Limit (ppm)	Result		
		QPSK		16QAM					
		Hz	ppm	Hz	ppm				
25	4.35	15	0.0087	14	0.0081	2.50	Pass		
	3.80	17	0.0098	16	0.0092				
	3.60	18	0.0104	18	0.0104				
Reference Frequency: LTE Band 7 Middle channel=2535MHz,20MHz Bandwidth									
Temperature (°C)	Power supplied (Vdc)	Frequency error				Limit (ppm)	Result		
		QPSK		16QAM					
		Hz	ppm	Hz	ppm				
25	4.35	15	0.0059	19	0.0075	2.50	Pass		
	3.80	16	0.0063	18	0.0071				
	3.60	17	0.0067	19	0.0075				
Reference Frequency: LTE Band 17 Middle channel=710MHz,10MHz Bandwidth									
Temperature (°C)	Power supplied (Vdc)	Frequency error				Limit (ppm)	Result		
		QPSK		16QAM					
		Hz	ppm	Hz	ppm				
25	4.35	15	0.0211	20	0.0282	2.50	Pass		
	3.80	14	0.0197	22	0.0310				
	3.60	19	0.0268	23	0.0324				

5.9. Peak-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

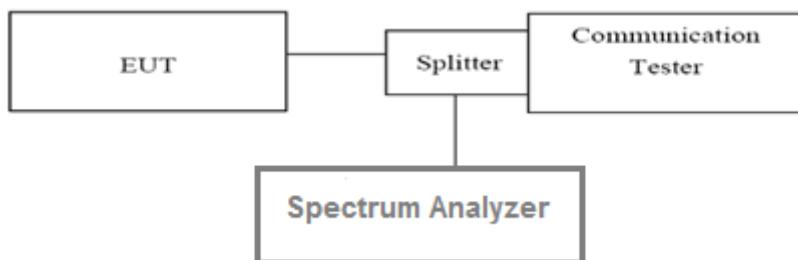

TEST PROCEDURE

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

LTE Band 2-20MHz						
Modulation	QPSK		16QAM		Limit(dB)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#		
Low	4.68	5.40	4.86	6.02	13.00	Pass
Mid	4.68	5.66	5.04	6.34	13.00	Pass
High	4.80	5.34	5.12	5.98	13.00	Pass


LTE Band 4-20MHz						
Modulation	QPSK		16QAM		Limit(dB)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#		
Low	4.50	5.62	4.96	6.24	13.00	Pass
Mid	4.76	5.32	4.86	5.96	13.00	Pass
High	4.88	5.68	5.00	6.28	13.00	Pass

LTE Band 7-20MHz						
Modulation	QPSK		16QAM		Limit(dB)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#		
Low	4.28	5.66	4.66	6.40	13.00	Pass
Mid	4.94	5.52	5.26	6.16	13.00	Pass
High	4.32	5.26	4.64	6.10	13.00	Pass

LTE Band 17-10MHz						
Modulation	QPSK		16QAM		Limit(dB)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#		
Low	3.26	5.32	3.52	5.78	13.00	Pass
Mid	2.84	5.26	3.44	5.74	13.00	Pass
High	2.30	5.18	2.98	5.66	13.00	Pass

6. Test Setup Photos of the EUT

Radiated emission:

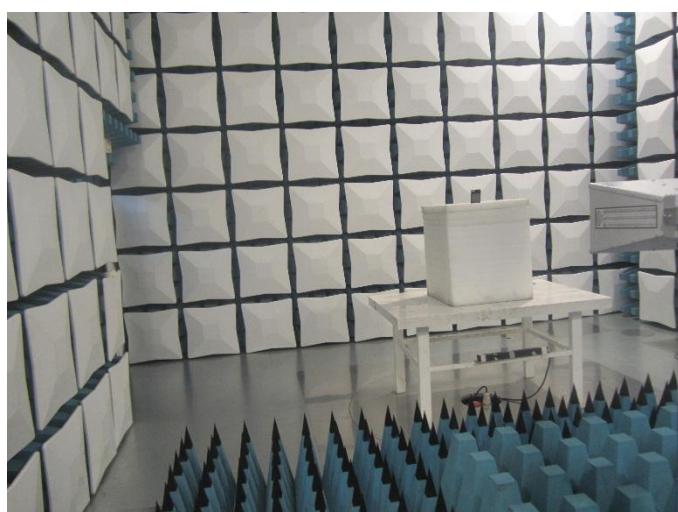

7. External and Internal Photos of the EUT

Reference to the test report No.: TRE1705022601.

.....**End of Report**.....