

FCC PART 15.247

TEST REPORT

For

SENWA MEXICO,S.A.DE C.V

CARRETERA MEXICO-TOLUCA No. 5324, INT. PLANTA BAJA COL. EL YAQUI,
CUAJIMALPA DE MORELOS, CIUDAD DE MEXICO, Mexico

FCC ID: 2AAA6-S305V20

Report Type: Original Report	Product Type: Mobile Phone
Report Number: <u>RSZ200909001-00B</u>	
Report Date: <u>2020-09-23</u>	
Reviewed By: <u>RF Engineer</u> <i>Jimmy Xiao</i>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE	10
APPLICABLE STANDARD	10
FCC §15.203 – ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED FACTOR & MARGIN CALCULATION	13
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST DATA	17
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST DATA	56
FCC §15.247(d) - BAND EDGES TESTING	62
APPLICABLE STANDARD	62
TEST PROCEDURE	62
TEST DATA	62

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Mobile Phone
Tested Model	S305
Frequency Range	Bluetooth: 2402~2480MHz
Maximum conducted Peak output power	Bluetooth: 9.62dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification	-1.4dBi
Voltage Range	DC 3.7 V from battery or DC5.0V from adapter
Date of Test	2020-09-11 to 2020-09-23
Sample number	RSZ200909001-RF-S1 for AC Line Conducted Emission test and Above 1G of Radiation Emission test RSZ200909001-RF-S2 for RF Conducted test RSZ200909001-RF-S3 for Below 1G of Radiation Emission test (Assigned by BACL, Shenzhen)
Received date	2020-09-09
Sample/EUT Status	Good condition
Adapter Information	Modelo:S305 Entrada:100-240Vca, 50/60Hz,0.15A Salida:5.0Vcc,500mA

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		$\pm 5\%$
RF Output Power with Power meter		$\pm 0.73\text{dB}$
RF conducted test with spectrum		$\pm 1.6\text{dB}$
AC Power Lines Conducted Emissions		$\pm 1.95\text{dB}$
Emissions, Radiated	Below 1GHz	$\pm 4.75\text{dB}$
	Above 1GHz	$\pm 4.88\text{dB}$
Temperature		$\pm 1^\circ\text{C}$
Humidity		$\pm 6\%$
Supply voltages		$\pm 0.4\%$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

No exercise software was made to the EUT tested.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable DC Cable	0.8	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

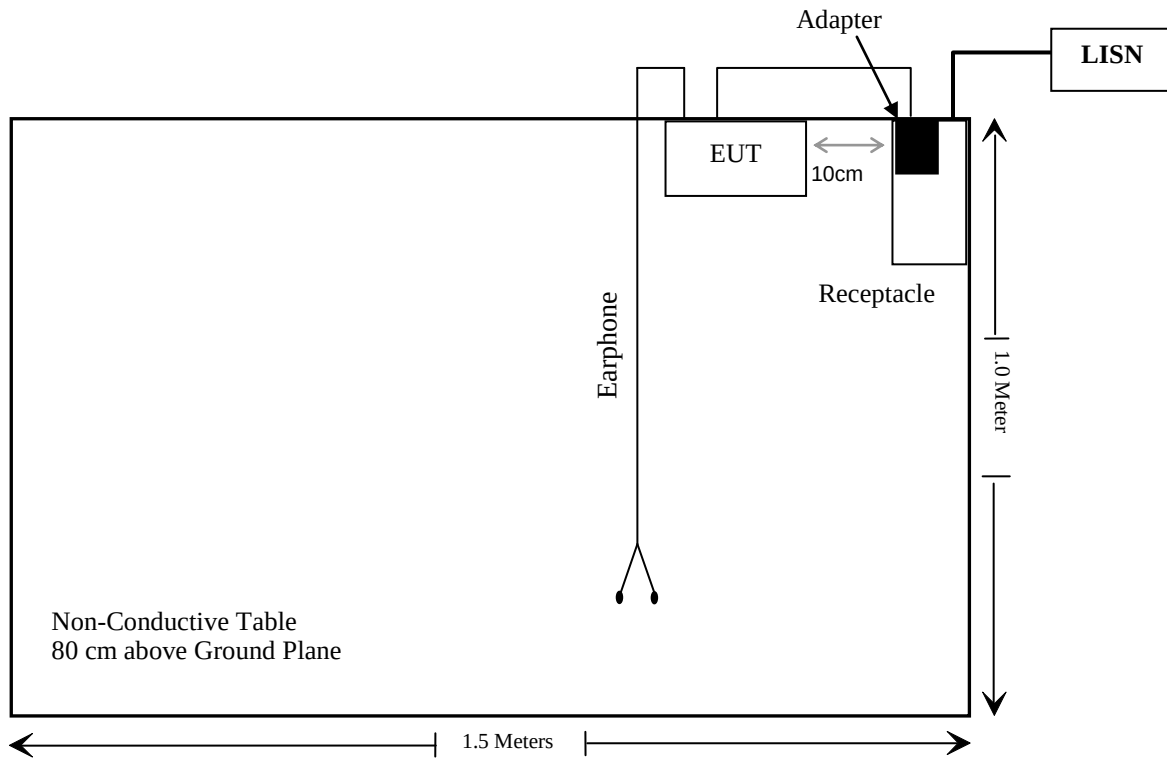

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2019/11/29	2020/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2019/11/29	2020/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28
SNSD	Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2020/04/20	2021/04/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02 1304	2017/12/06	2020/12/05
RF Conducted Test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2020/04/03	2021/04/02
WEINSCHL	6dB Attenuator	50-6	R4376	NCR	NCR
Unknown	RF Cable	Unknown	2301 276	2019/11/29	2020/11/28

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
2480	9.7	9.33	5	2.9	3.0	Yes

Result: No Standalone SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is -1.4 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

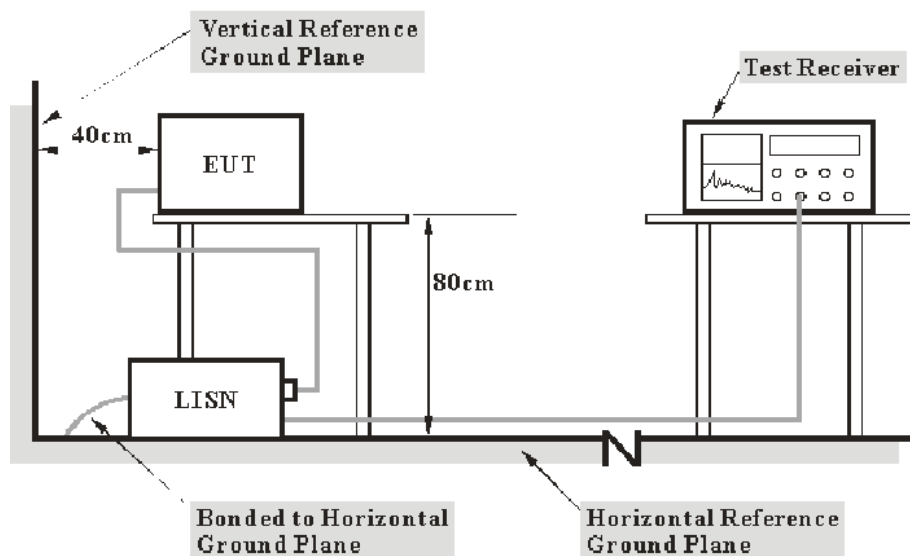

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the device was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$


The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Line

Project No: RSZ200909001-RF
 Company Name: SENWA MEXICO,S.A.DE C.V
 Model Number: S305 EUT Number: RSZ200909001-RF-S1
 Test Standard: FCC 15.247
 Climatic: 25°C 65%RH 101kPa
 Test Date: 2020.09.15 Test Engineer:Haiguo Li
 Power Source: AC 120V 60Hz Port: L
 Test Mode: Transmitting & Charging

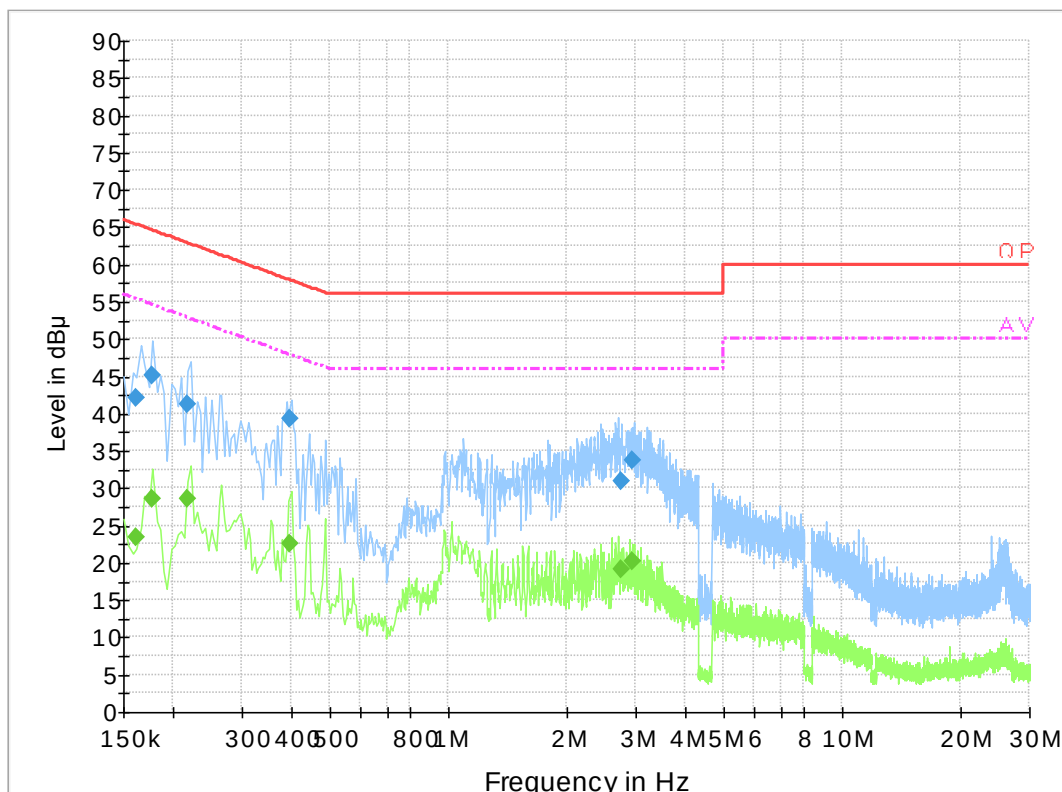**Final Result 1**


Frequency (MHz)	QuasiPeak (dBμ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)
0.161500	42.2	9.000	L1	19.9	23.2	65.4
0.177500	45.1	9.000	L1	19.9	19.5	64.6
0.217500	41.2	9.000	L1	19.8	21.7	62.9
0.395970	39.3	9.000	L1	19.9	18.6	57.9
2.749350	31.0	9.000	L1	19.9	25.0	56.0
2.953390	33.6	9.000	L1	19.9	22.4	56.0

Final Result 2

Frequency (MHz)	Average (dBμ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)
0.161500	23.3	9.000	L1	19.9	32.1	55.4
0.177500	28.6	9.000	L1	19.9	26.0	54.6
0.217500	28.6	9.000	L1	19.8	24.3	52.9
0.395970	22.5	9.000	L1	19.9	25.4	47.9
2.749350	19.2	9.000	L1	19.9	26.8	46.0
2.953390	20.2	9.000	L1	19.9	25.8	46.0

Neutral

Project No: RSZ200909001-RF
 Company Name: SENWA MEXICO,S.A.DE C.V
 Model Number: S305 EUT Number: RSZ200909001-RF-S1
 Test Standard: FCC 15.247
 Climatic: 25°C 65%RH 101kPa
 Test Date: 2020.09.15 Test Engineer:Haiguo Li
 Power Source: AC 120V 60Hz Port: N
 Test Mode: Transmitting & Charging

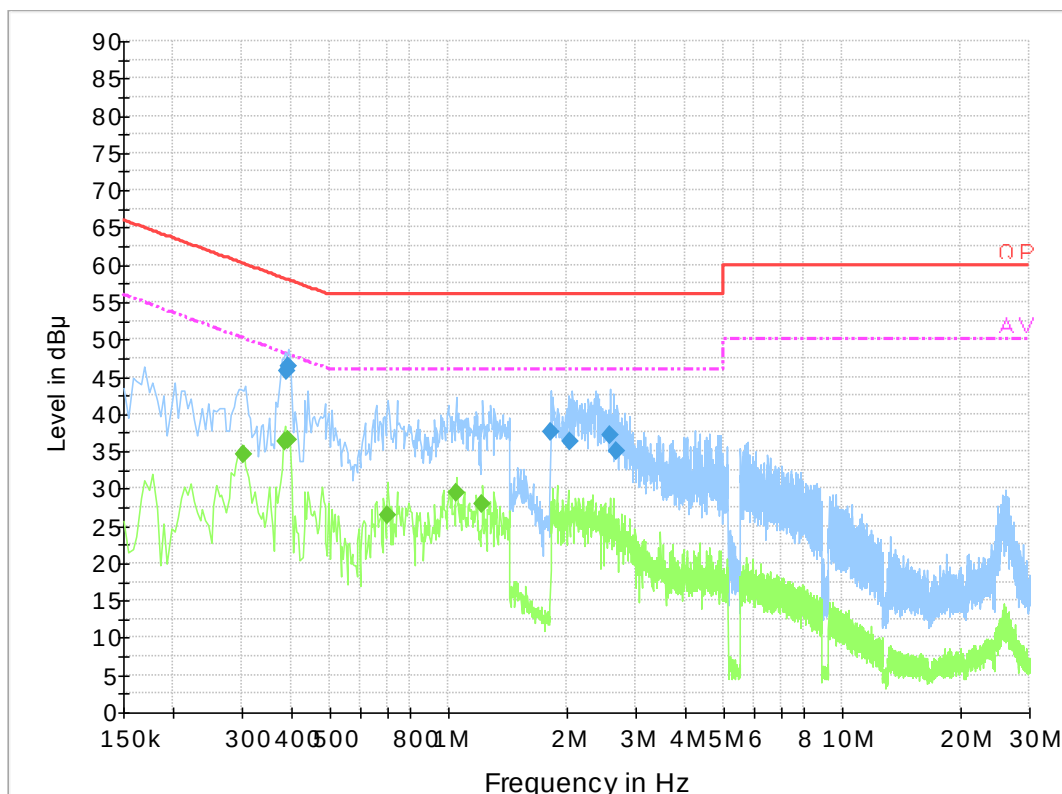**Final Result 1**



Frequency (MHz)	QuasiPeak (dBμ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)
0.388090	45.7	9.000	N	19.8	12.4	58.1
0.391790	46.5	9.000	N	19.8	11.5	58.0
1.830610	37.6	9.000	N	19.8	18.4	56.0
2.042950	36.2	9.000	N	19.9	19.8	56.0
2.579150	37.2	9.000	N	19.8	18.8	56.0
2.674430	34.9	9.000	N	19.8	21.1	56.0

Final Result 2

Frequency (MHz)	Average (dBμ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)
0.302000	34.5	9.000	N	19.7	15.7	50.2
0.386000	36.3	9.000	N	19.8	11.8	48.1
0.394000	36.5	9.000	N	19.8	11.5	48.0
0.702000	26.4	9.000	N	19.8	19.6	46.0
1.050000	29.5	9.000	N	19.8	16.5	46.0
1.226000	27.9	9.000	N	19.8	18.1	46.0

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

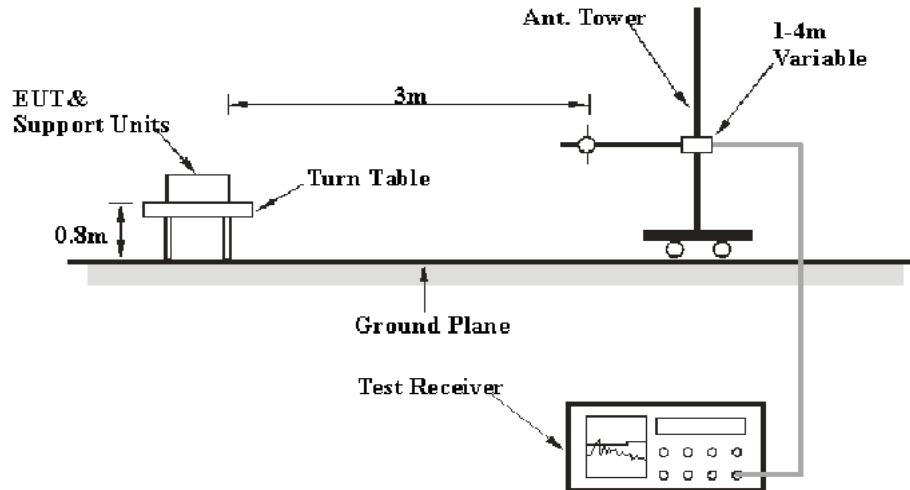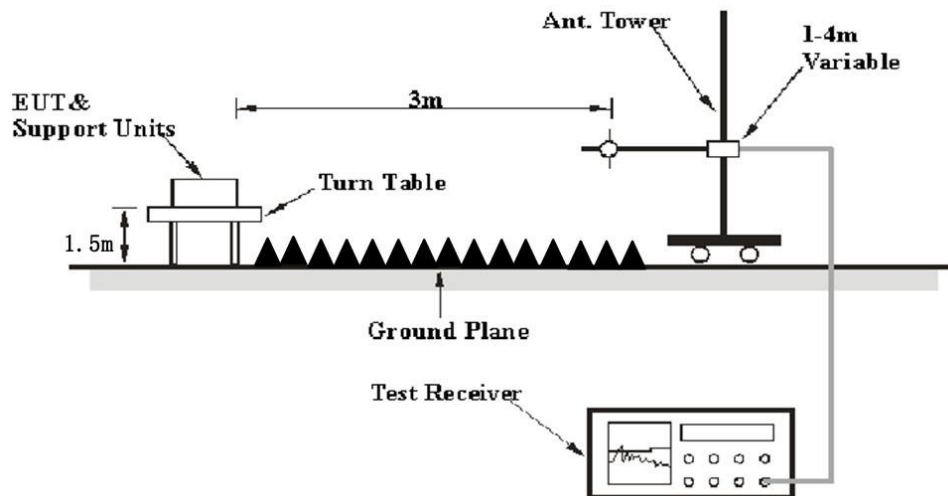EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$


The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

30 MHz~1 GHz: (the worst case is 8DPSK Mode, Low channel)

Project No.: RSZ200909001-RF
 Company: SENWA MEXICO,S.A.DE C.V
 EUT Description: Mobile Phone
 EUT Model: S305
 EUT Number: RSZ200909001-RF-S3
 Climatic: 31°C 63%RH 101kPa
 Test Engineer: Holland Yang Test Date:2020.09.14
 Operating Mode: Transmitting & Charging
 Voltage/Frequency: AC 120V 60Hz

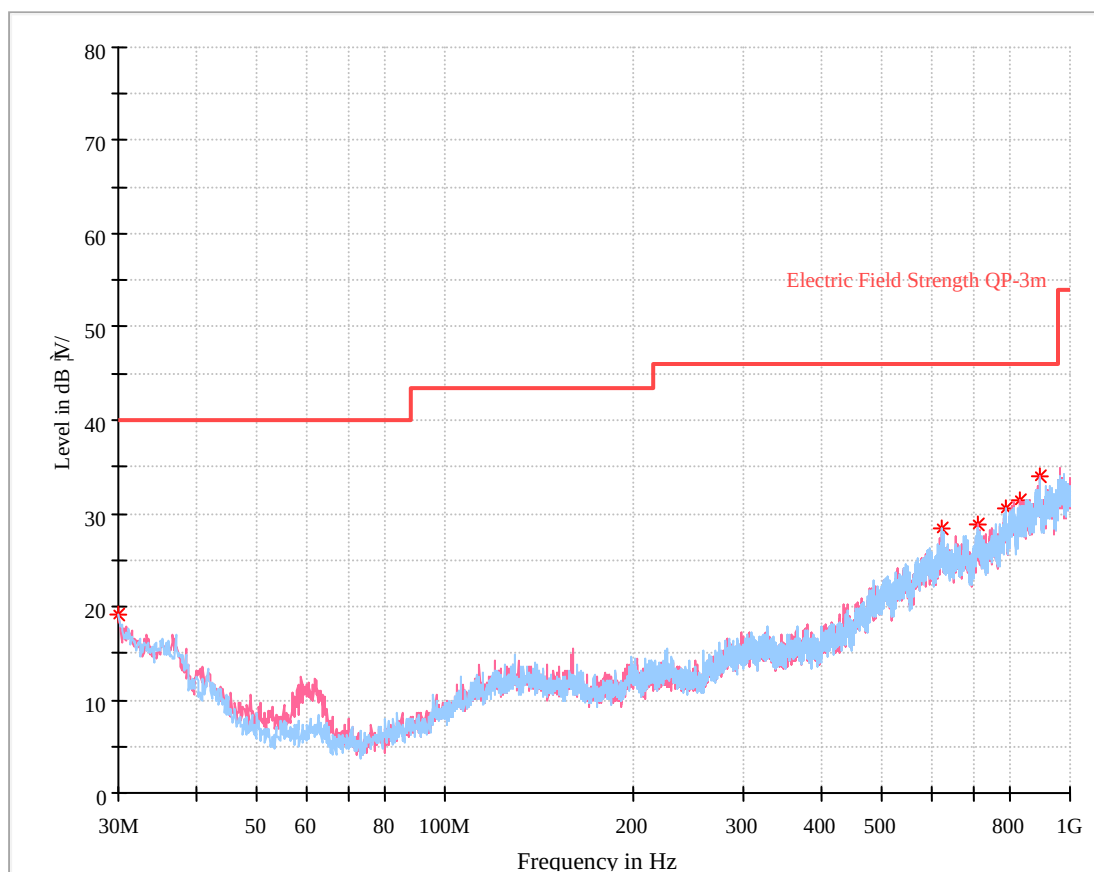

Critical_Freqs



Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.000000	19.16	40.00	20.84	300.0	H	305.0	-7.6
624.003750	28.49	46.00	17.51	300.0	H	158.0	-1.6
712.637500	28.79	46.00	17.21	200.0	V	114.0	-1.0
790.358750	30.54	46.00	15.46	200.0	H	85.0	1.4
828.916250	31.42	46.00	14.58	300.0	V	345.0	2.5
895.118750	33.92	46.00	12.08	200.0	V	345.0	4.1

1 GHz - 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode, the worst case is 8DPSK Mode)



Project No.:	RSZ200909001-RF		
Company:	SENGWA MEXICO,S.A.DE C.V		
EUT model	S305		
EUT Number:	RSZ200909001-RF-S1		
Operating Mode:	Transmitting		
Test Conditions:	Temperature: 30.1°C; Relative Humidity: 50%; ATM Pressure: 101.1kPa		
Test Engineer:	Leven Gan	Test Date:	2020-09-11

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Correcte d Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.247	
	Reading (dBμV)	Detector (PK/QP/A ve.)	Angle Degree	Heigh t (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
Low Channel(2402MHz)									
2388.74	28.42	PK	330	1.7	V	31.87	60.29	74	13.71
2388.74	14.28	Ave.	330	1.7	V	31.87	46.15	54	7.85
2484.53	28.22	PK	172	1.0	V	32.13	60.35	74	13.65
2484.53	14.26	Ave.	172	1.0	V	32.13	46.39	54	7.61
4804.00	50.57	PK	261	1.4	V	6.28	56.85	74	17.15
4804.00	39.78	Ave.	261	1.4	V	6.28	46.06	54	7.94
7206.00	50.09	PK	156	1.1	V	11.93	62.02	74	11.98
7206.00	34.60	Ave.	156	1.1	V	11.93	46.53	54	7.47
Middle Channel(2441MHz)									
4882.00	52.69	PK	240	2.1	V	6.76	59.45	74	14.55
4882.00	41.87	Ave.	240	2.1	V	6.76	48.63	54	5.37
7323.00	52.29	PK	349	2.0	V	11.66	63.95	74	10.05
7323.00	36.59	Ave.	349	2.0	V	11.66	48.25	54	5.75
High Channel(2480 MHz)									
2387.79	28.37	PK	124	1.3	V	31.87	60.24	74	13.76
2387.79	14.30	Ave.	124	1.3	V	31.87	46.17	54	7.83
2483.63	28.59	PK	173	1.7	V	32.13	60.72	74	13.28
2483.63	14.34	Ave.	173	1.7	V	32.13	46.47	54	7.53
4960.00	56.71	PK	330	1.9	V	6.80	63.51	74	10.49
4960.00	41.91	Ave.	330	1.9	V	6.80	48.71	54	5.29
7440.00	51.40	PK	247	1.9	V	12.39	63.79	74	10.21
7440.00	36.25	Ave.	247	1.9	V	12.39	48.64	54	5.36



Pre-scan with high channel Peak Horizontal

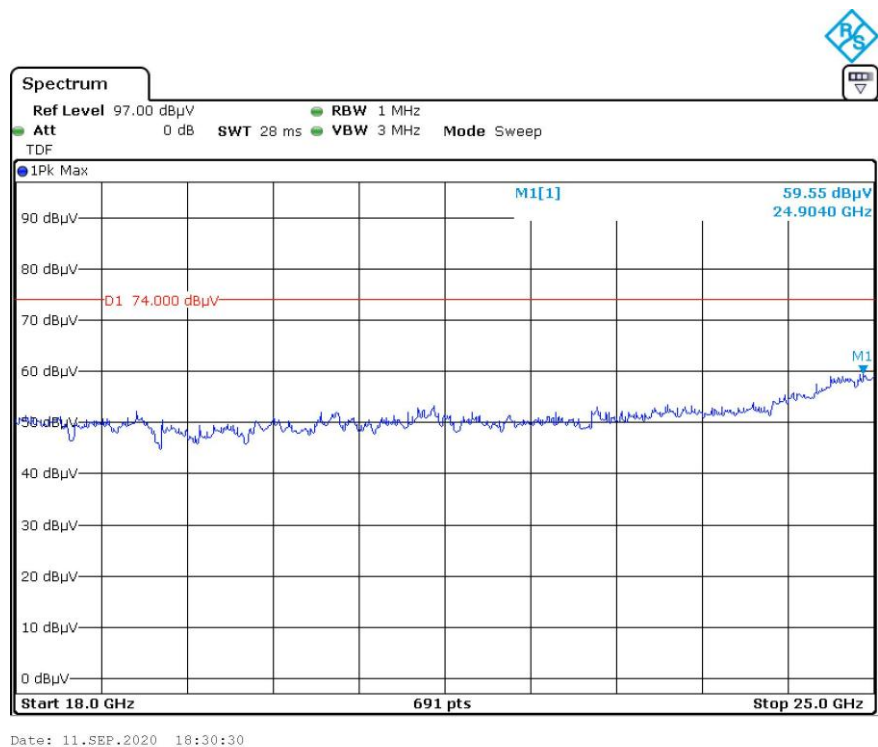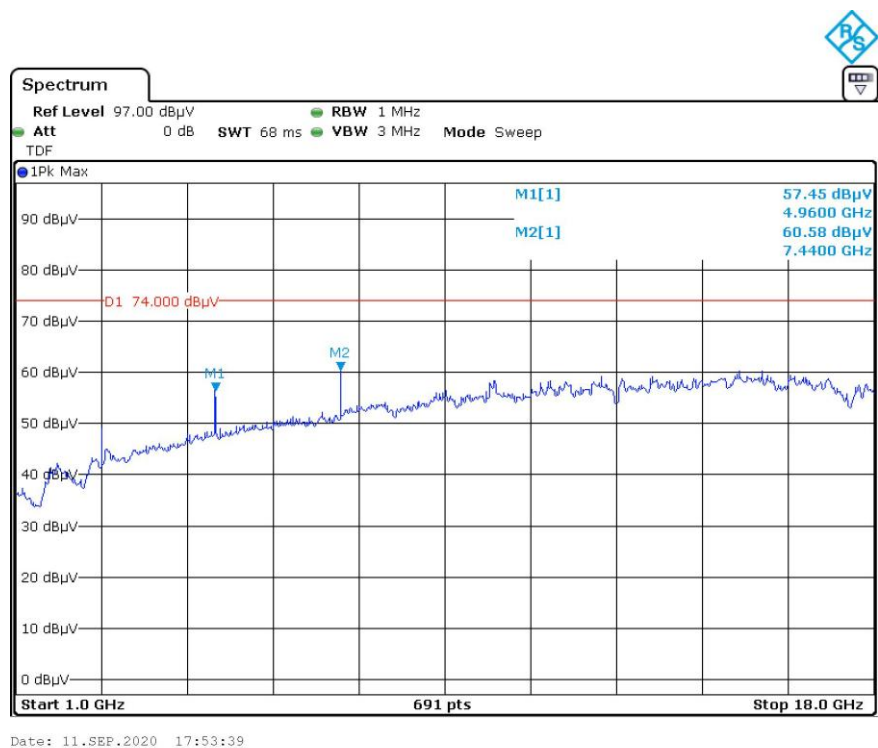



Vertical

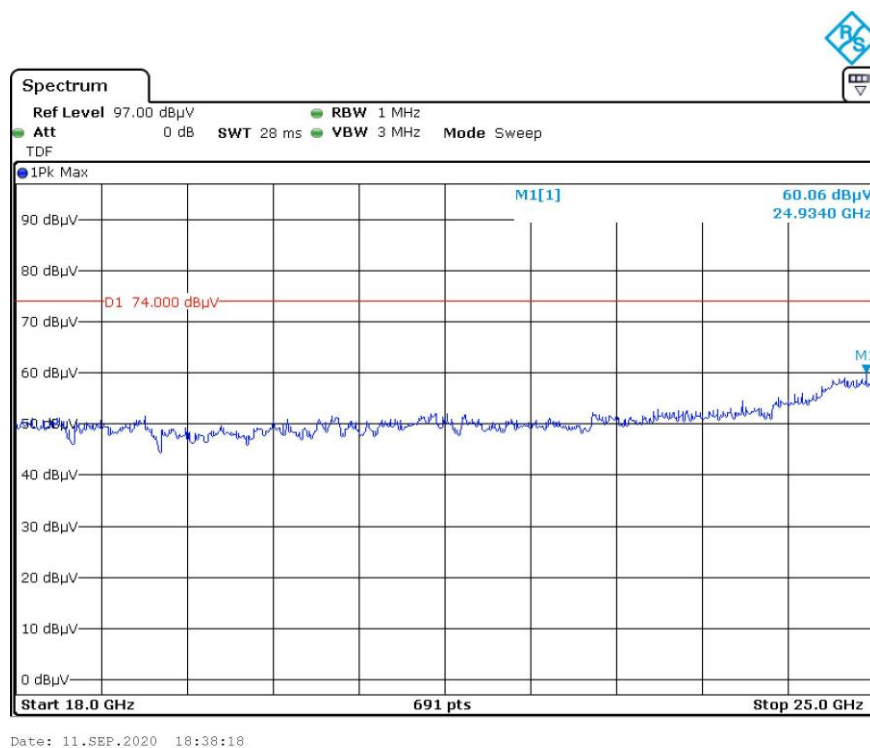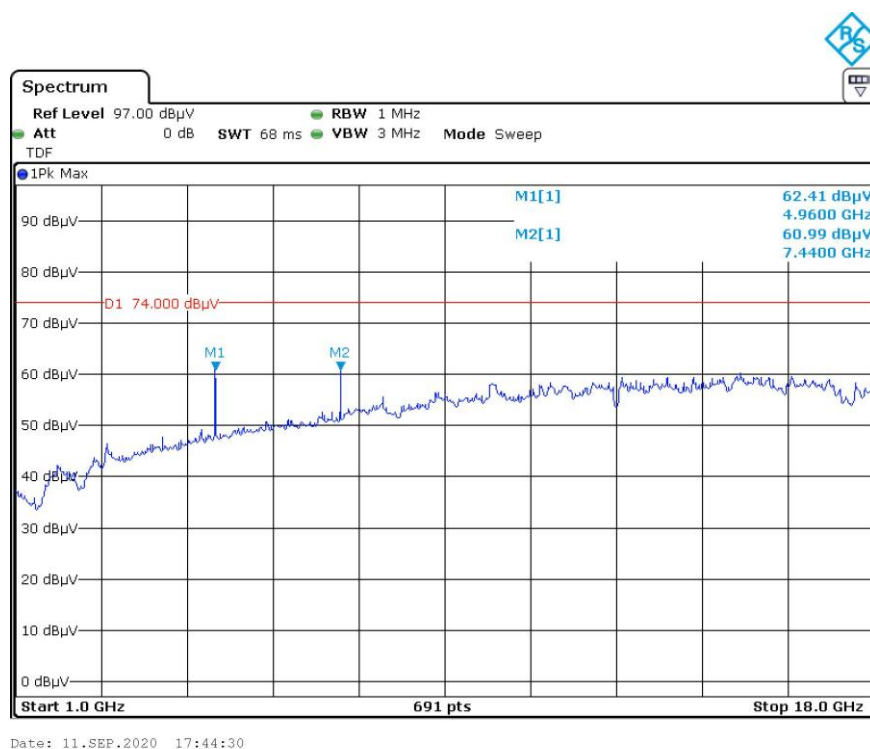

Pre-scan for Average Horizontal

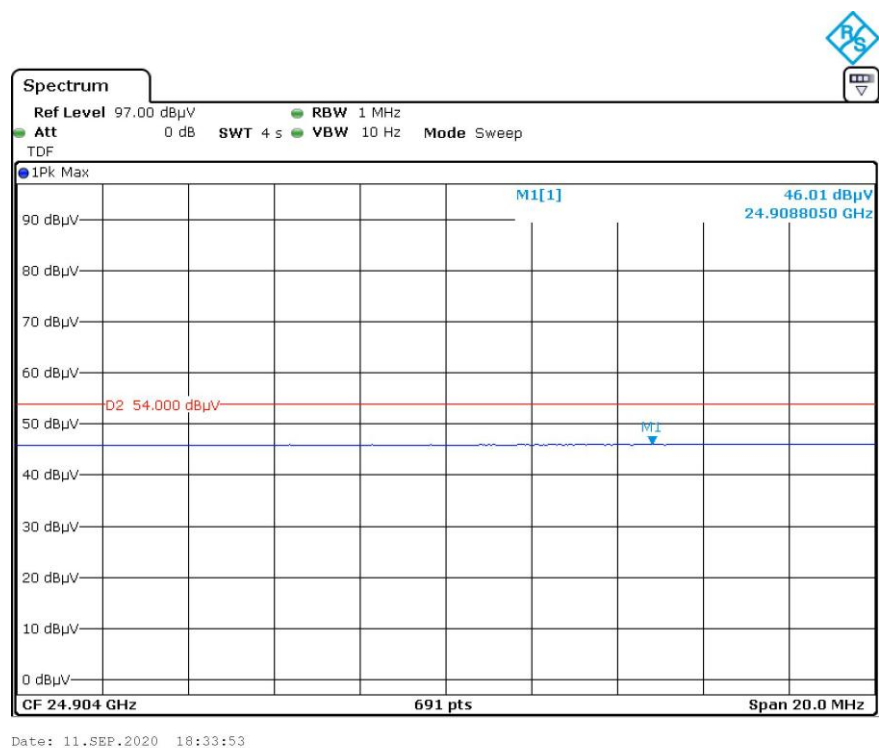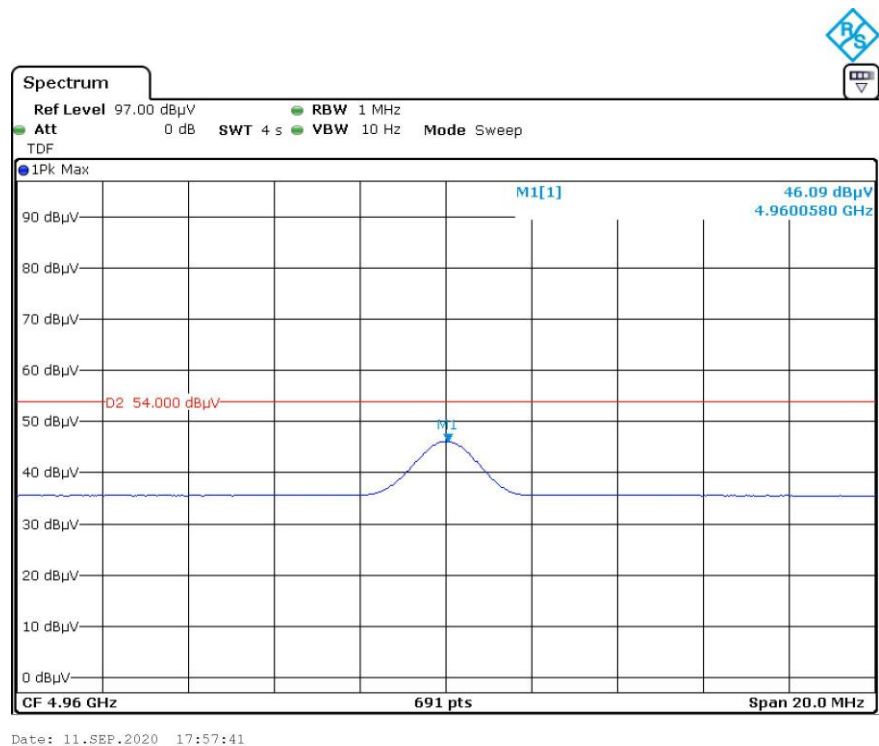

Vertical

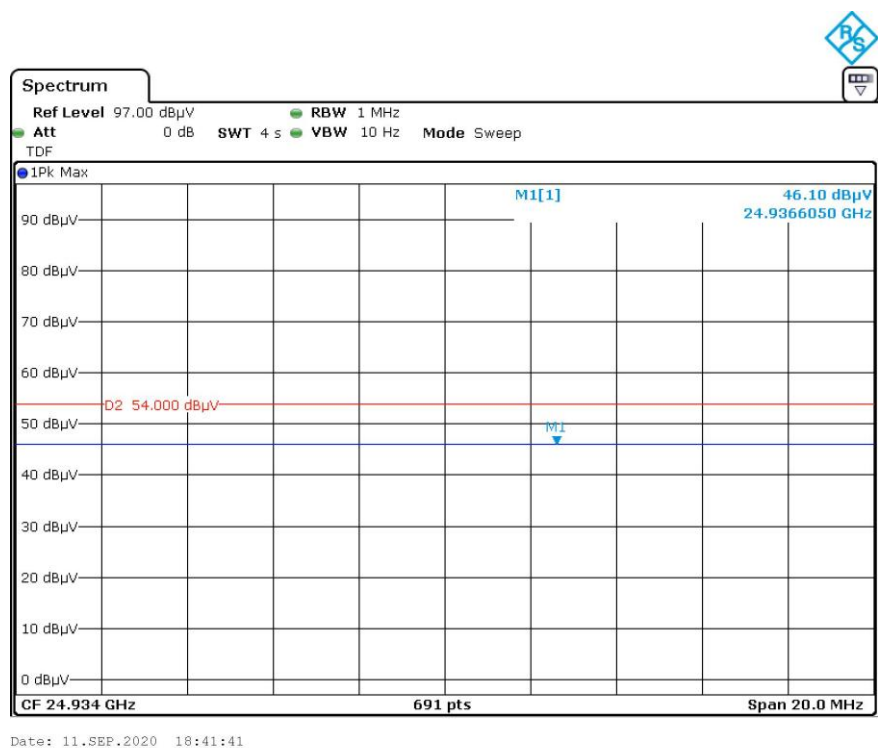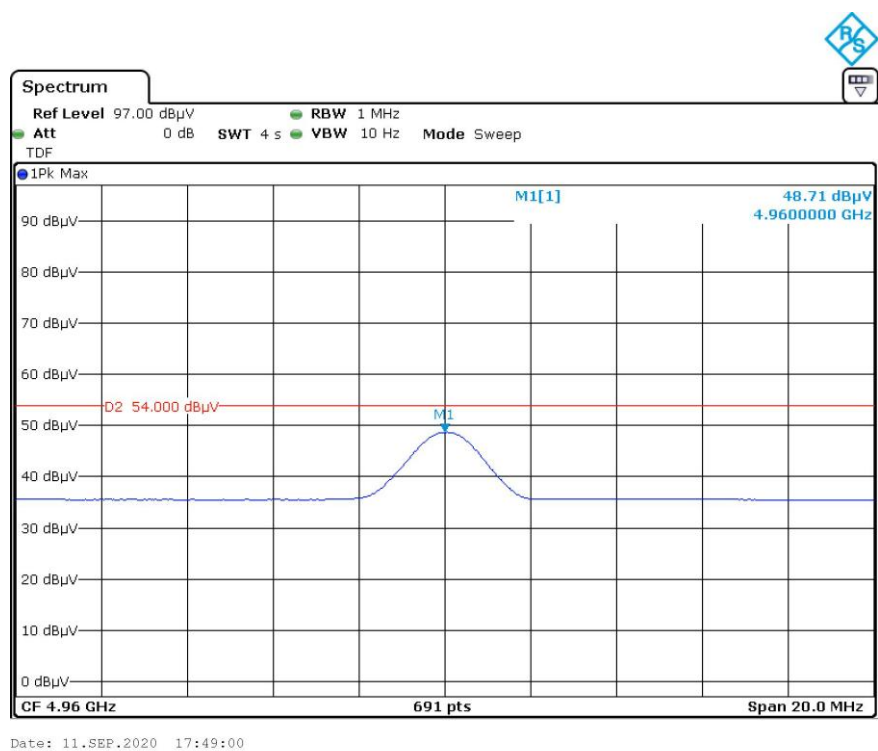

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa


The testing was performed by Thea Xiao on 2020-09-15.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Channel	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
BDR(GFSK)					
Low	1.000	0.940	0.627	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.000	0.943	0.629	> two-thirds of the 20 dB bandwidth	Compliance
High	1.003	0.946	0.631	> two-thirds of the 20 dB bandwidth	Compliance
EDR($\pi/4$-DQPSK)					
Low	1.003	1.311	0.874	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.000	1.306	0.871	> two-thirds of the 20 dB bandwidth	Compliance
High	1.001	1.315	0.877	> two-thirds of the 20 dB bandwidth	Compliance
EDR(8DPSK)					
Low	1.000	1.287	0.858	> two-thirds of the 20 dB bandwidth	Compliance
Middle	0.997	1.280	0.853	> two-thirds of the 20 dB bandwidth	Compliance
High	1.003	1.282	0.855	> two-thirds of the 20 dB bandwidth	Compliance

Please refer to the following plots.

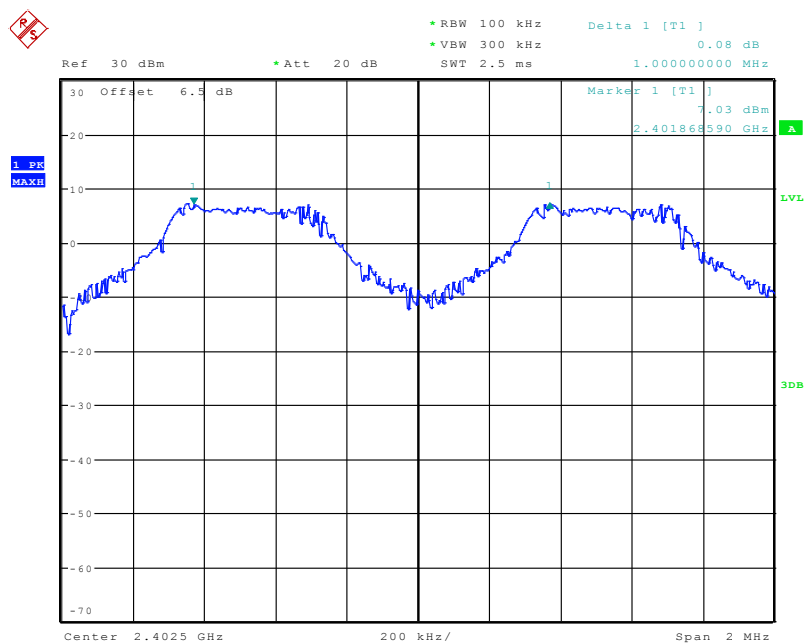
BDR (GFSK): Low Channel

Date: 15.SEP.2020 16:25:43

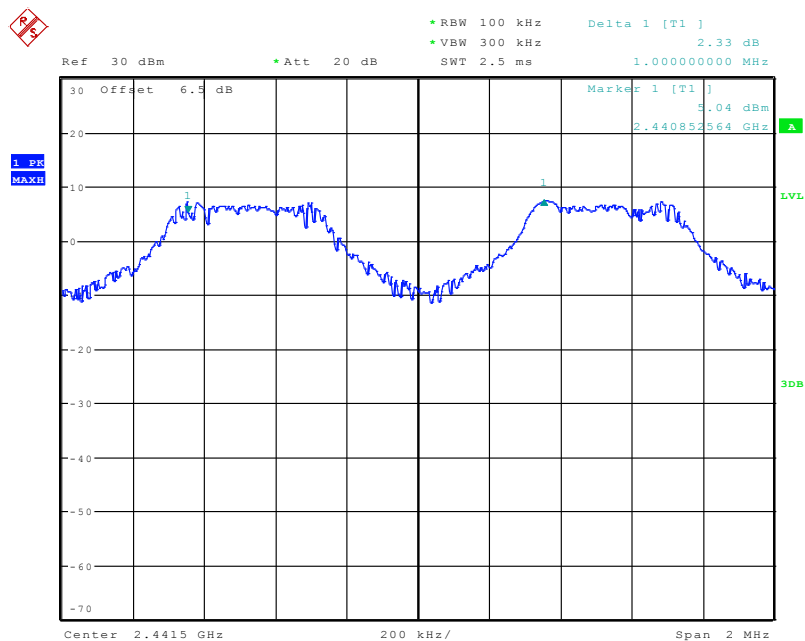BDR (GFSK): Middle Channel


Date: 15.SEP.2020 16:27:19

BDR (GFSK): High Channel

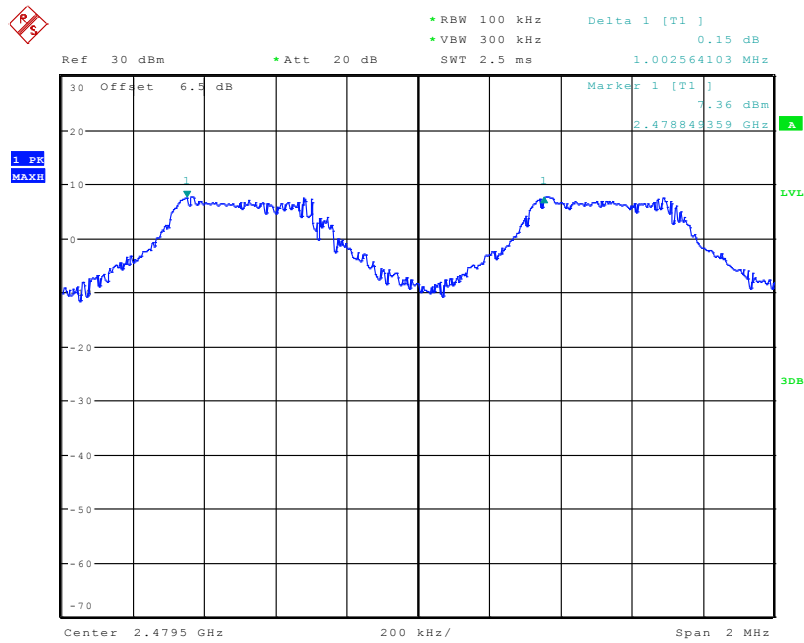


Date: 15.SEP.2020 16:29:05

EDR ($\pi/4$ -DQPSK): Low Channel

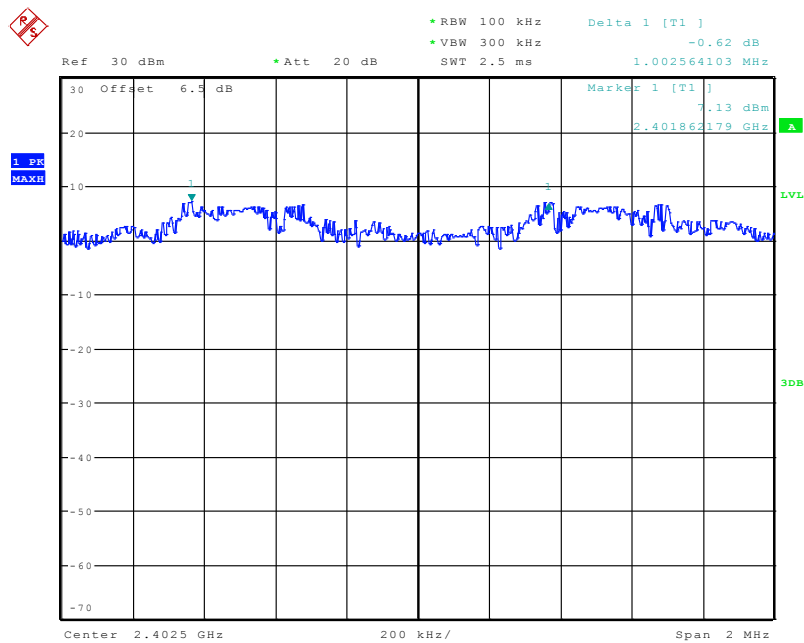


Date: 15.SEP.2020 16:24:12

EDR ($\pi/4$ -DQPSK): Middle Channel

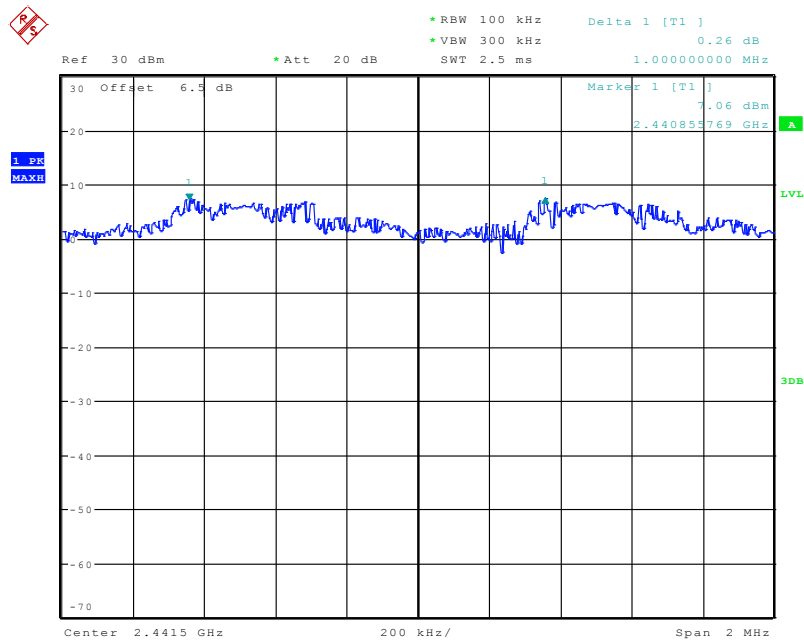


Date: 15.SEP.2020 16:22:36

EDR ($\pi/4$ -DQPSK): High Channel

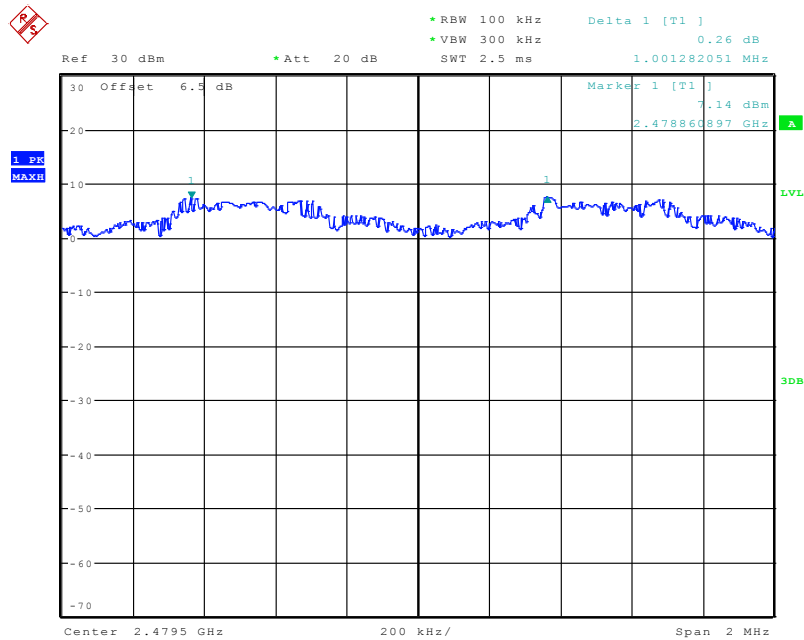


Date: 15.SEP.2020 16:20:57

EDR (8DPSK): Low Channel

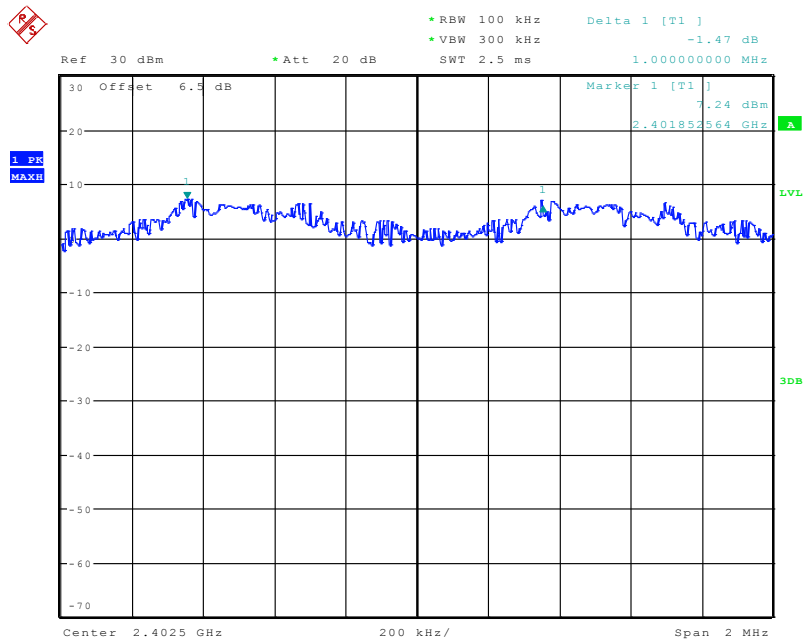


Date: 15.SEP.2020 16:12:00

EDR (8DPSK): Middle Channel

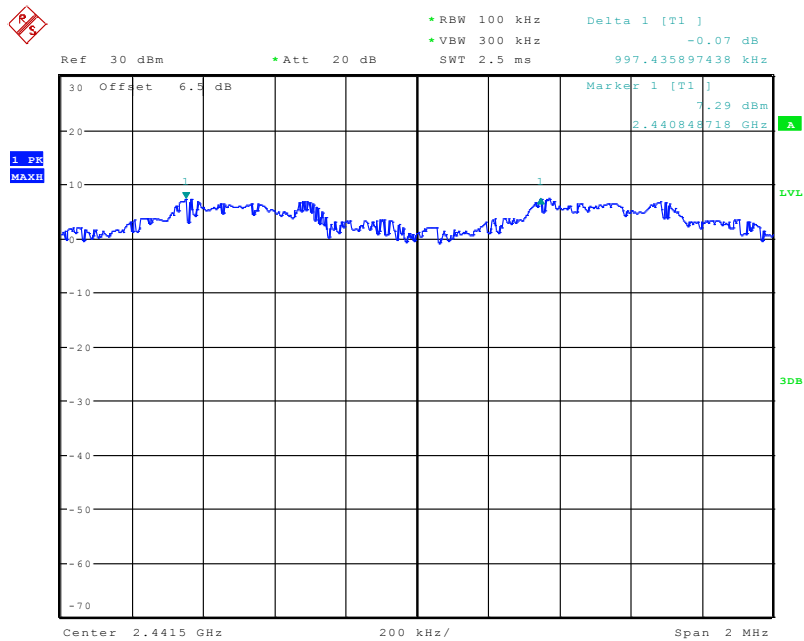

Date: 15.SEP.2020 16:15:48

EDR (8DPSK): High Channel

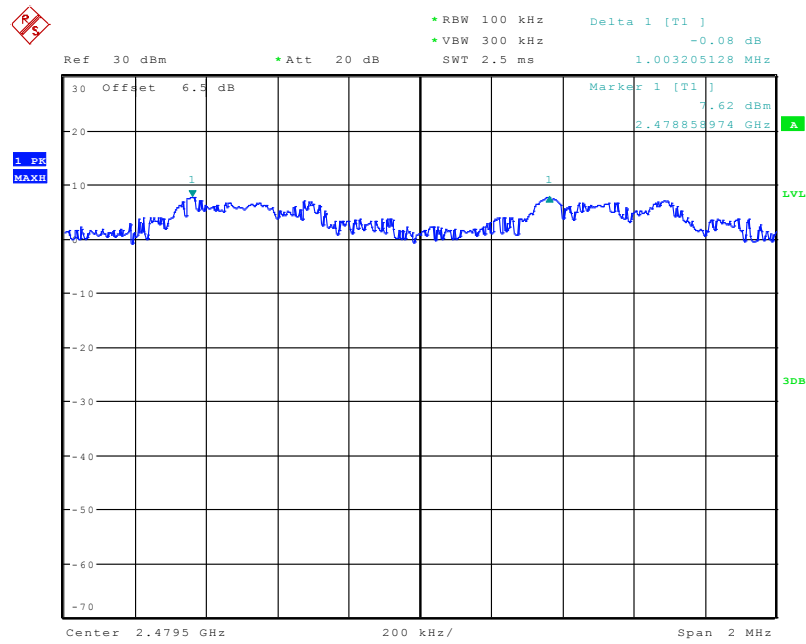

Date: 15.SEP.2020 16:18:13

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions


Temperature:	24 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Thea Xiao on 2020-09-15.

EUT operation mode: Transmitting


Test Result: Compliant.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.940
	Middle	2441	0.943
	High	2480	0.946
EDR ($\pi/4$-DQPSK)	Low	2402	1.311
	Middle	2441	1.306
	High	2480	1.315
EDR (8DPSK)	Low	2402	1.287
	Middle	2441	1.280
	High	2480	1.282

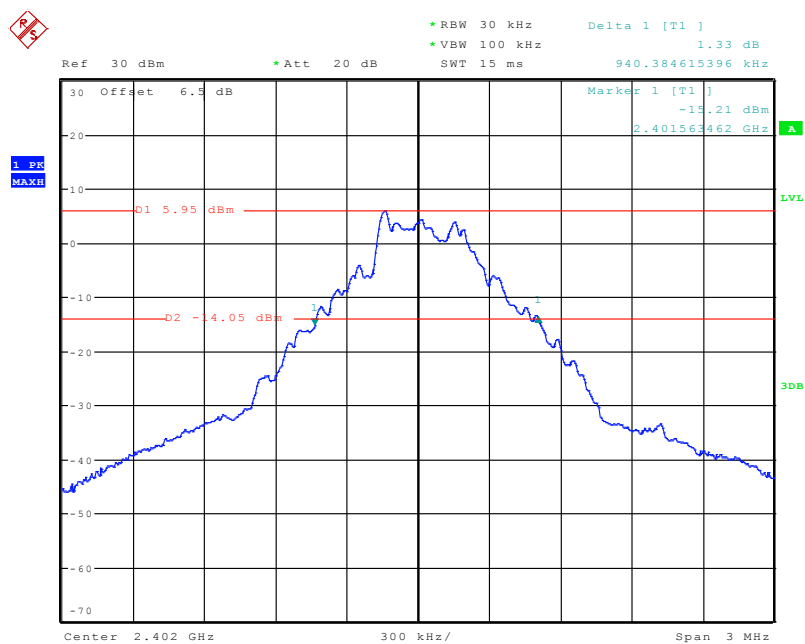BDR (GFSK): Low Channel


Date: 15.SEP.2020 15:47:12

BDR (GFSK): Middle Channel

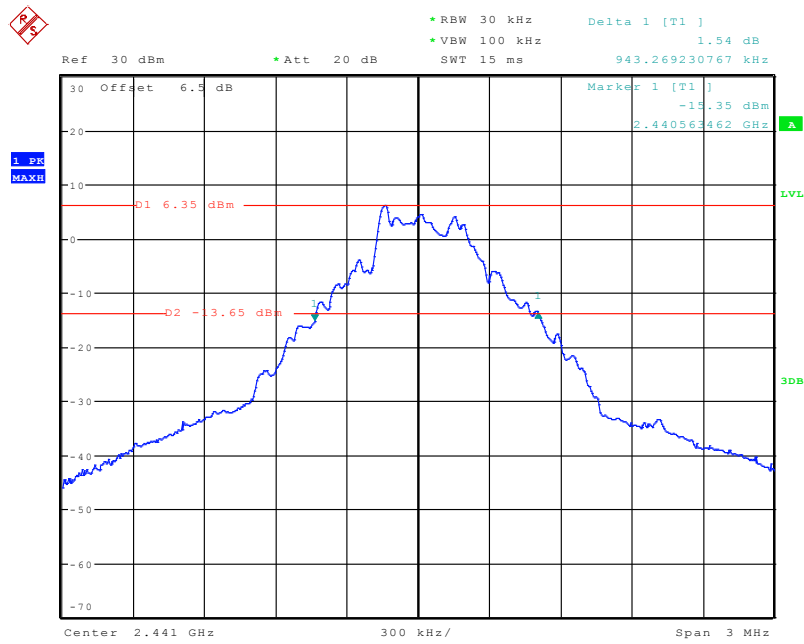


Date: 15.SEP.2020 15:46:19


BDR (GFSK): High Channel

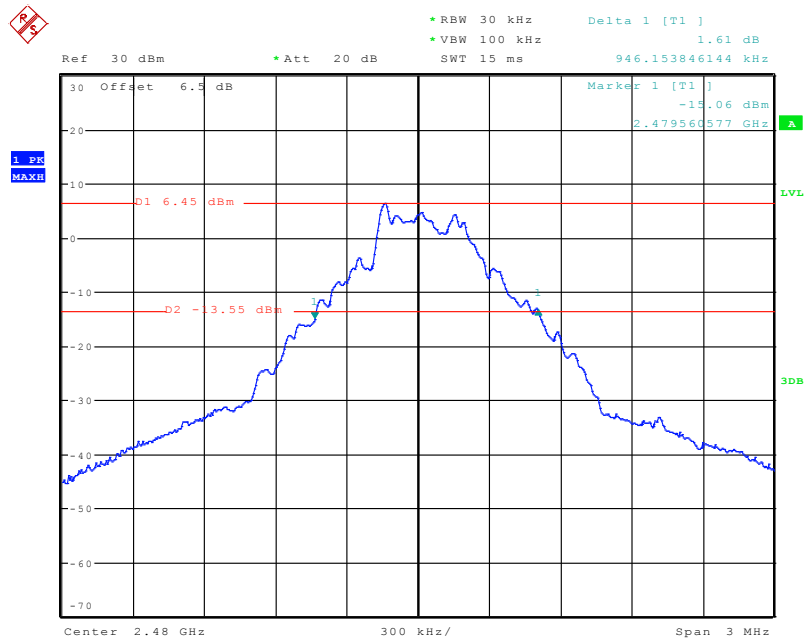

Date: 15.SEP.2020 15:45:25

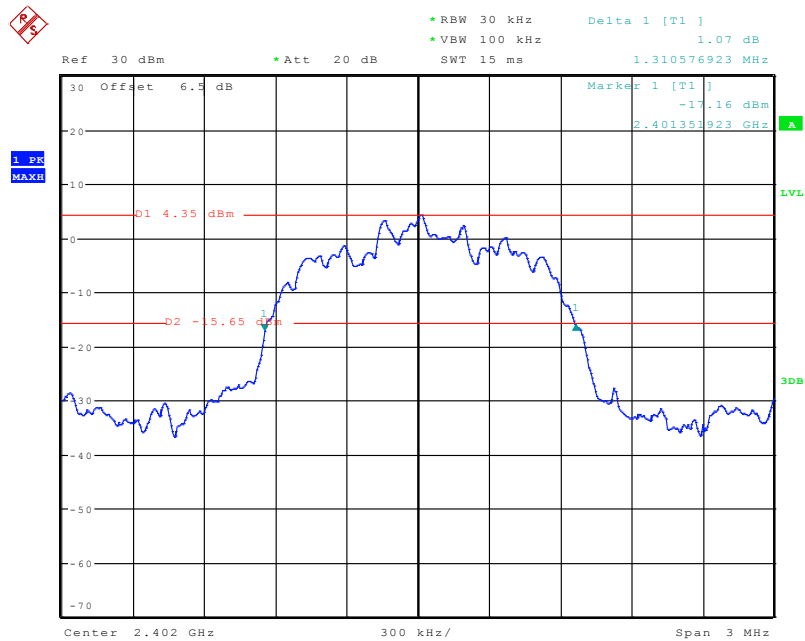
EDR ($\pi/4$ -DQPSK): Low Channel

Date: 15.SEP.2020 15:42:57

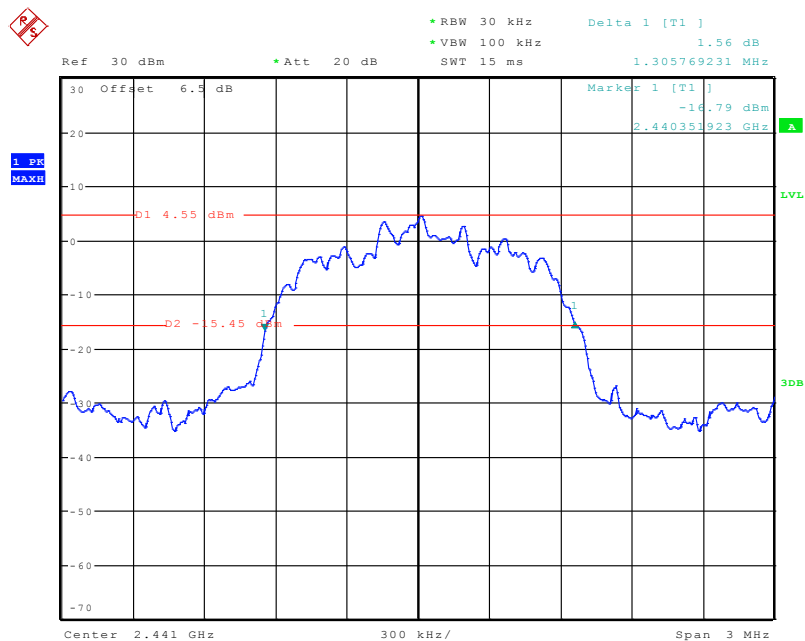EDR ($\pi/4$ -DQPSK): Middle Channel


Date: 15.SEP.2020 15:43:48

EDR ($\pi/4$ -DQPSK): High Channel

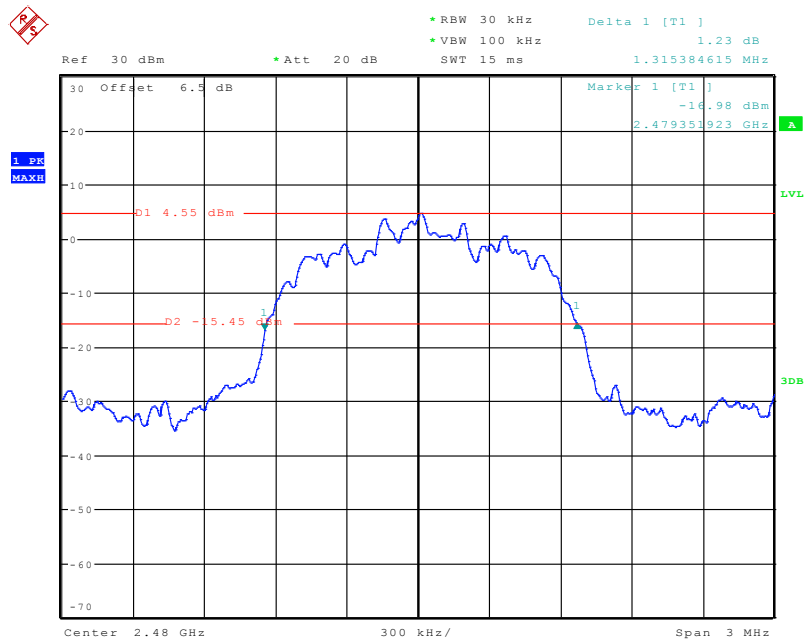


Date: 15.SEP.2020 15:44:35

EDR (8DPSK): Low Channel

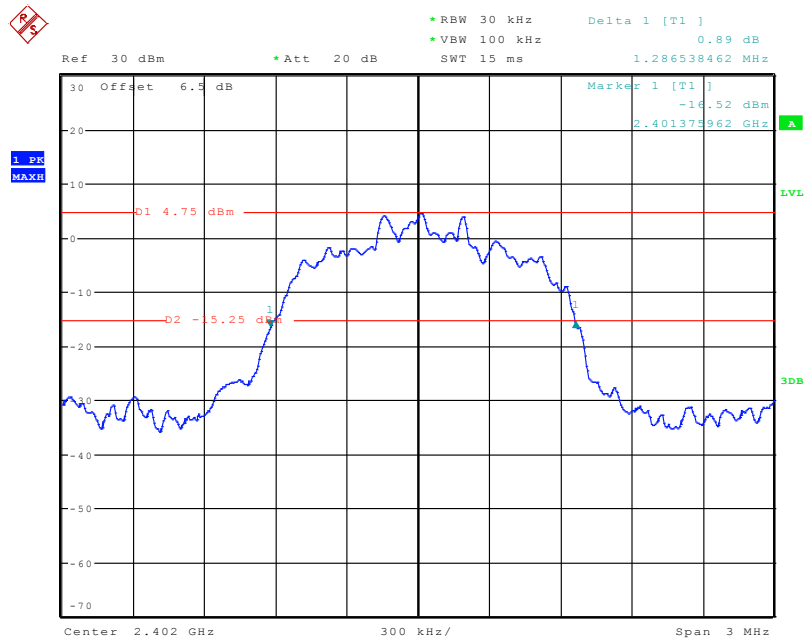


Date: 15.SEP.2020 15:37:07

EDR (8DPSK): Middle Channel

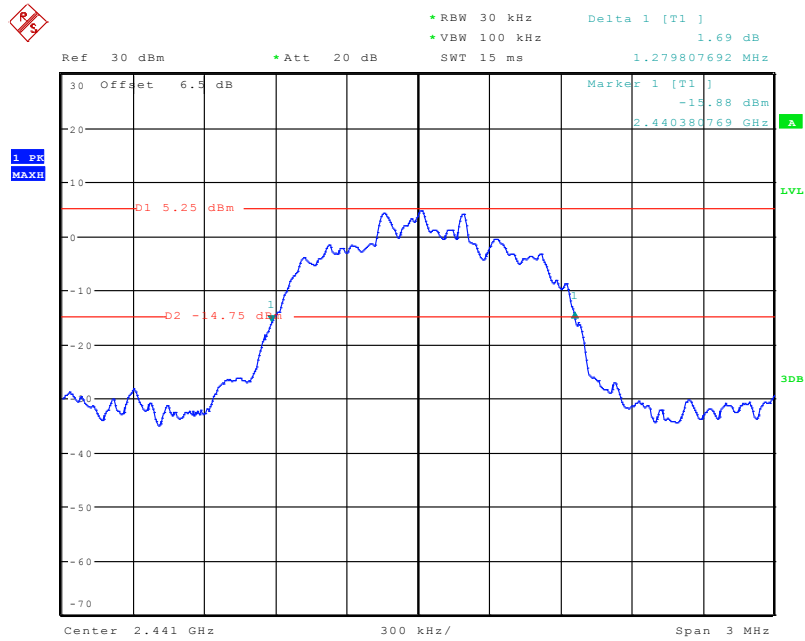

Date: 15.SEP.2020 15:35:49

EDR (8DPSK): High Channel

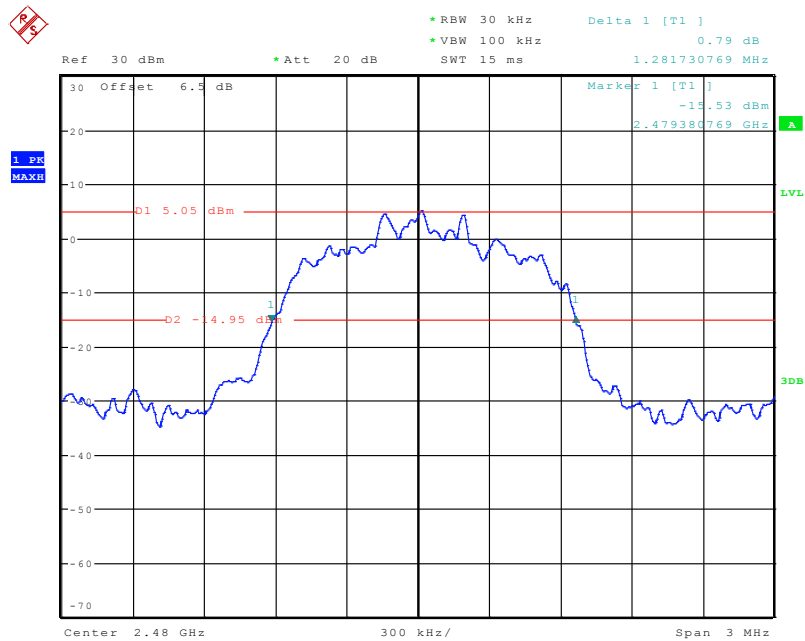

Date: 15.SEP.2020 15:34:03

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions


Temperature:	24 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Thea Xiao on 2020-09-15.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

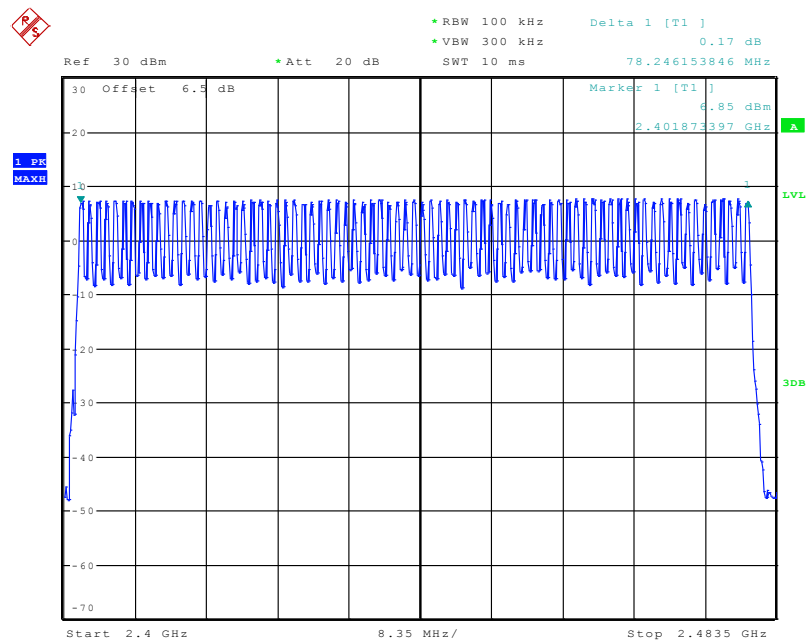BDR (GFSK): Number of Hopping Channels

Date: 15.SEP.2020 16:32:41

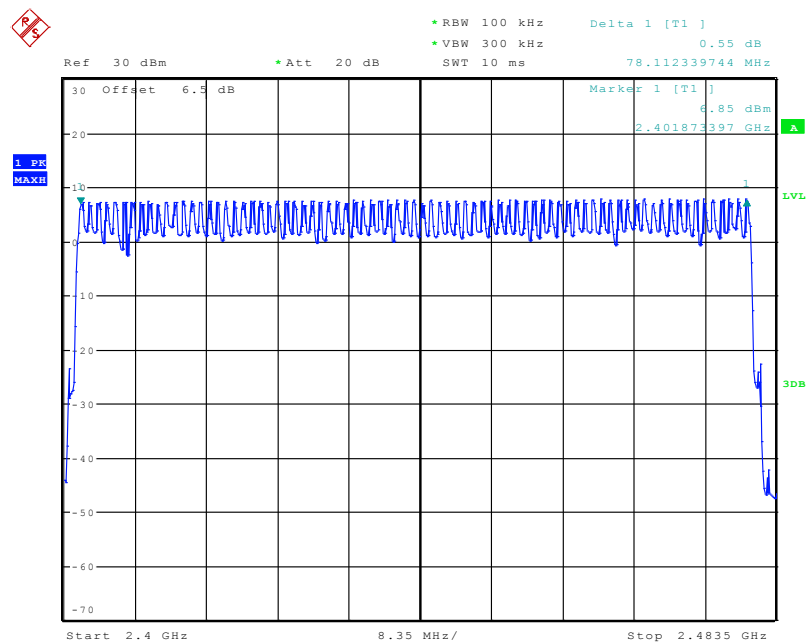EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

Date: 15.SEP.2020 16:35:32

Ref 30 dBm Att 20 dB RBW 100 kHz VBW 300 kHz Marker 1 [T1] 7.09 dBm
SWT 10 ms 2.401739583 GHz

30 Offset 6.5 dB Delta 1 [T1] 0.31 dB
78.246153846 MHz

1 PR
MAXR

1 LVL
3DB

Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz

Date: 15.SEP.2020 16:41:29

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa


The testing was performed by Thea Xiao on 2020-09-15.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.425	0.136	0.4	Pass
		Middle	0.419	0.134	0.4	Pass
		High	0.419	0.134	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.702	0.272	0.4	Pass
		Middle	1.702	0.272	0.4	Pass
		High	1.702	0.272	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.954	0.315	0.4	Pass
		Middle	2.954	0.315	0.4	Pass
		High	2.954	0.315	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH 1	Low	0.412	0.132	0.4	Pass
		Middle	0.412	0.132	0.4	Pass
		High	0.419	0.134	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH 3	Low	1.702	0.272	0.4	Pass
		Middle	1.702	0.272	0.4	Pass
		High	1.702	0.272	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	2.954	0.315	0.4	Pass
		Middle	2.954	0.315	0.4	Pass
		High	2.954	0.315	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH 1	Low	0.412	0.132	0.4	Pass
		Middle	0.412	0.132	0.4	Pass
		High	0.419	0.134	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.702	0.272	0.4	Pass
		Middle	1.702	0.272	0.4	Pass
		High	1.702	0.272	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	2.954	0.315	0.4	Pass
		Middle	2.954	0.315	0.4	Pass
		High	2.954	0.315	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

BDR (GFSK):
Pulse time, Low Channel, DH1

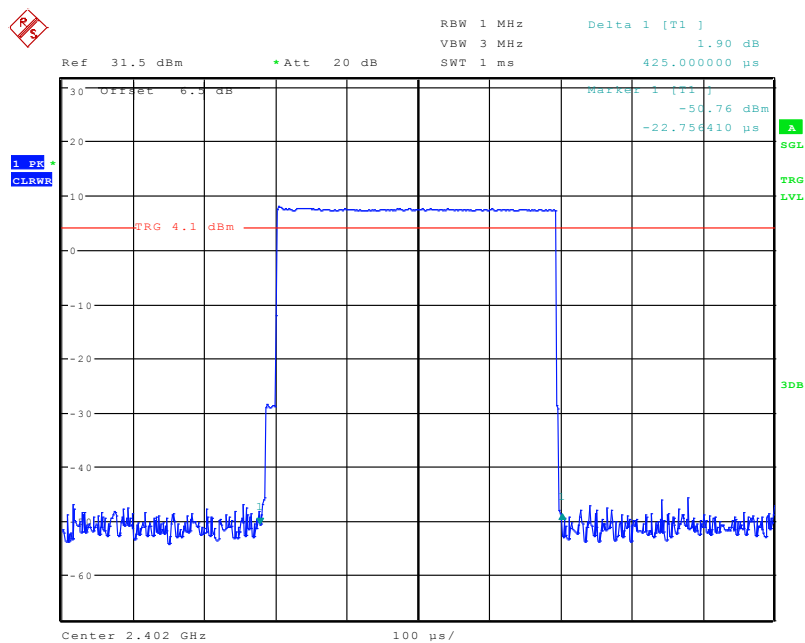


Date: 15.SEP.2020 16:49:08

Pulse time, Middle Channel, DH1

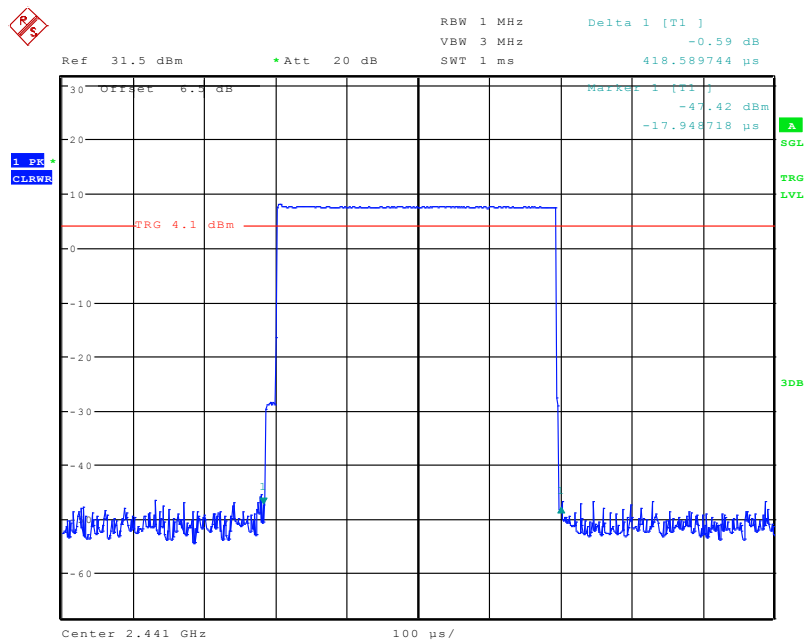


Date: 15.SEP.2020 16:51:46

Pulse time, High Channel, DH1

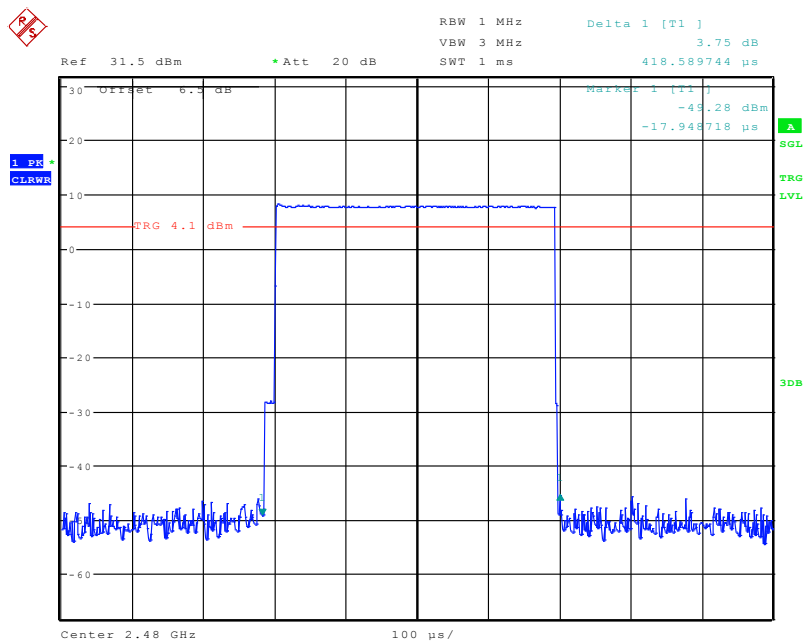


Date: 15.SEP.2020 16:52:07

Pulse time, Low Channel, DH3

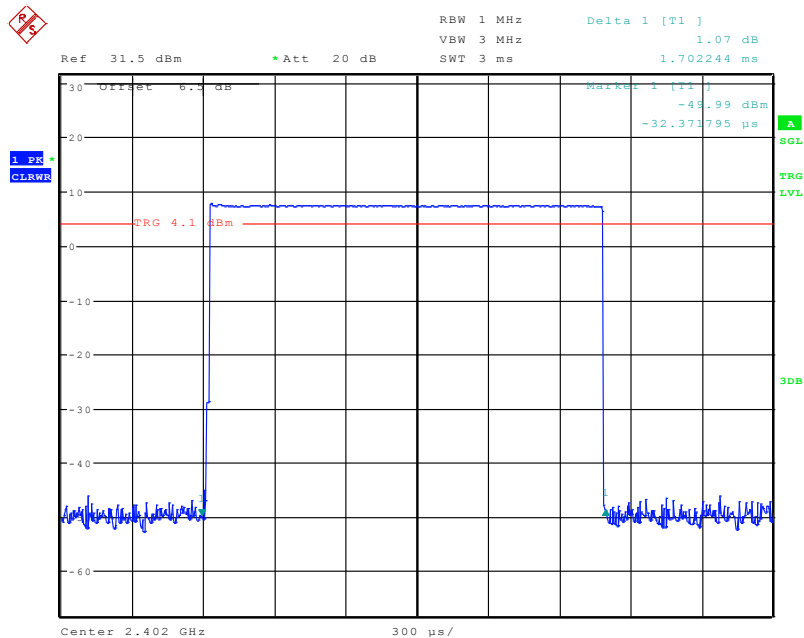


Date: 15.SEP.2020 16:57:53

Pulse time, Middle Channel, DH3

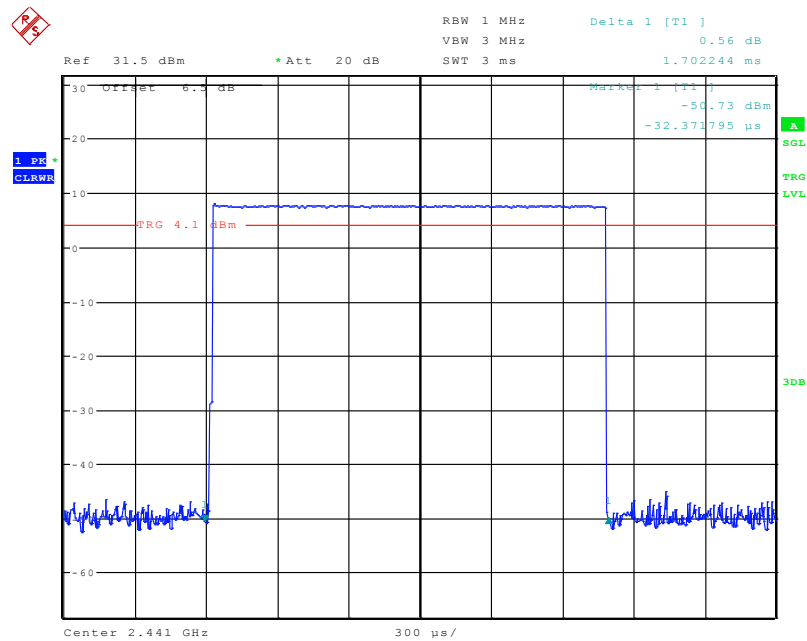


Date: 15.SEP.2020 16:57:39

Pulse time, High Channel, DH3

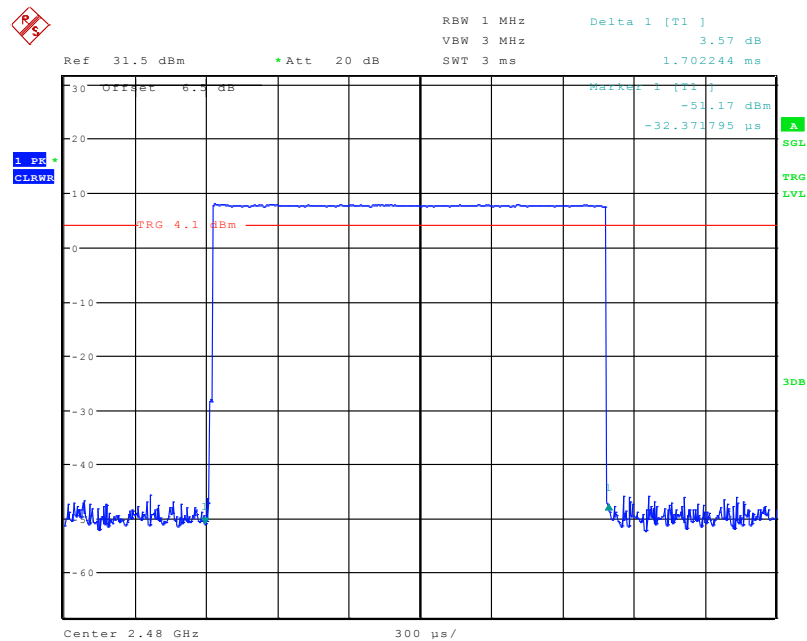


Date: 15.SEP.2020 16:57:10

Pulse time, Low Channel, DH5

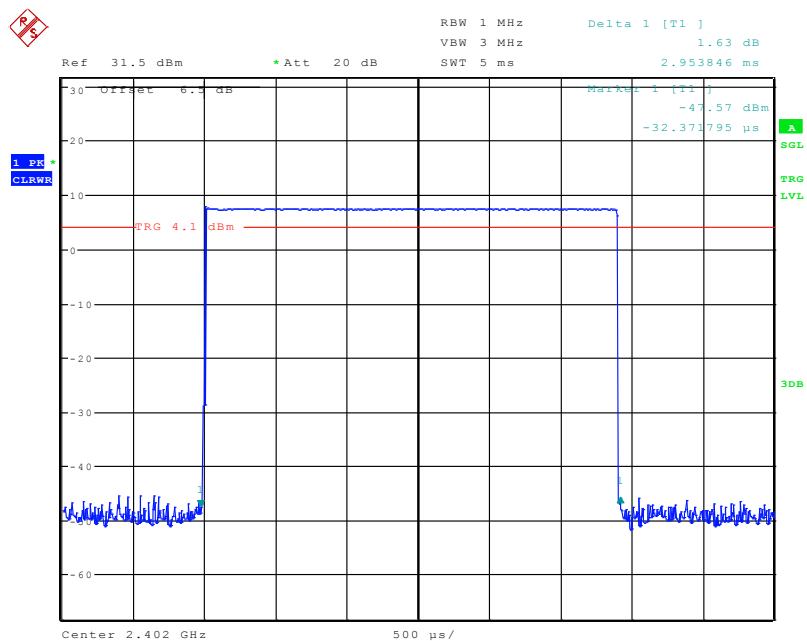


Date: 15.SEP.2020 17:00:44


Pulse time, Middle Channel, DH5

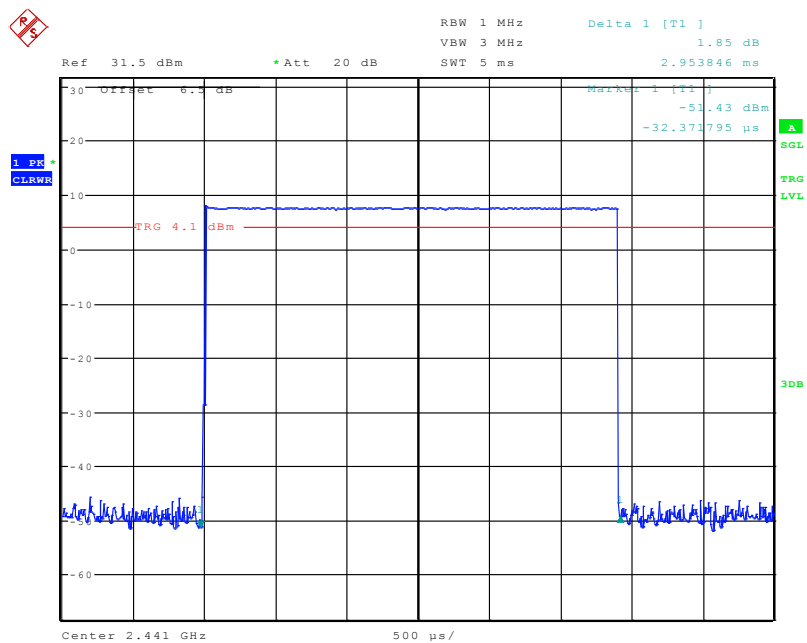

Date: 15.SEP.2020 17:01:03

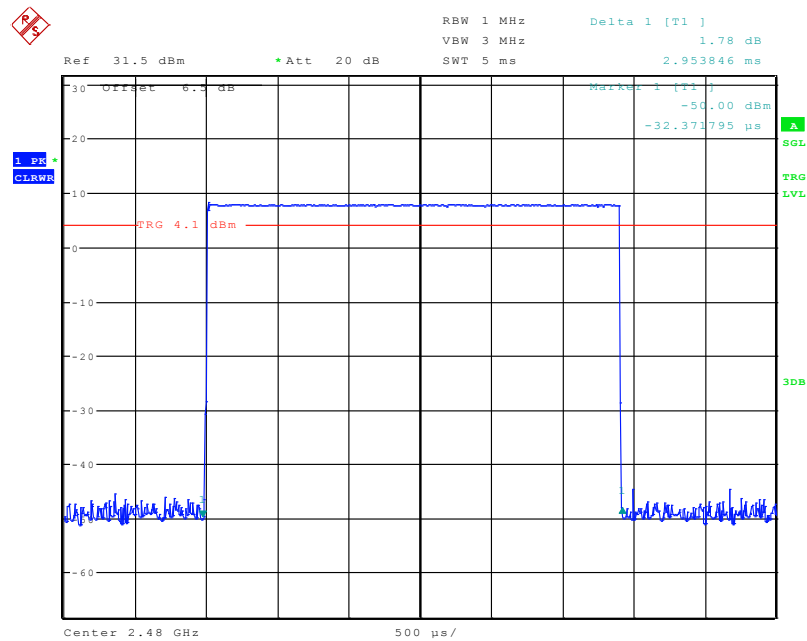
Pulse time, High Channel, DH5

Date: 15.SEP.2020 17:01:15

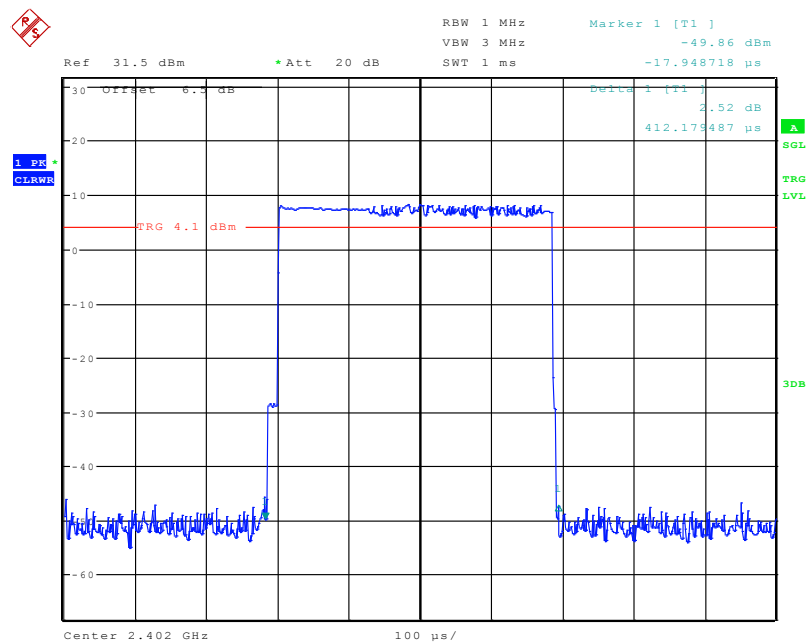EDR ($\pi/4$ -DQPSK):**Pulse time, Low Channel, 2DH1**


Date: 15.SEP.2020 16:50:20

Pulse time, Middle Channel, 2DH1

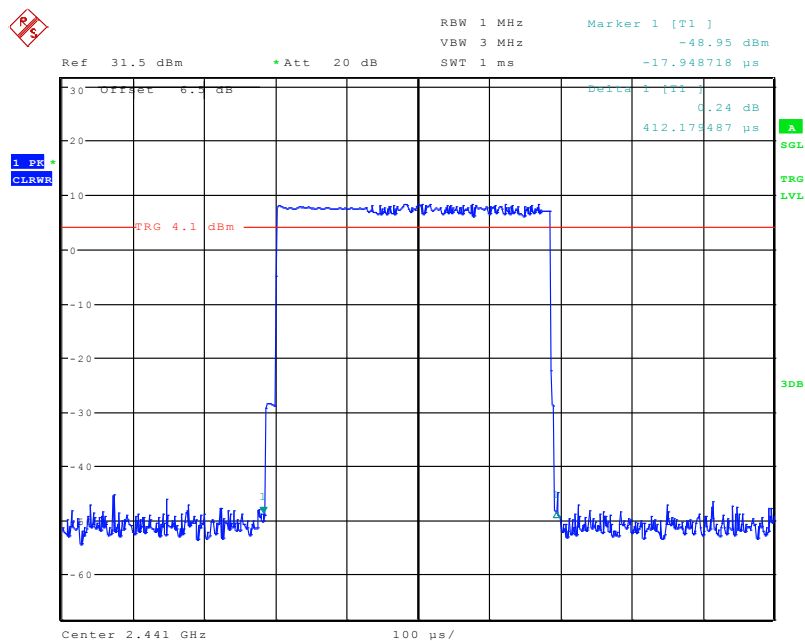


Date: 15.SEP.2020 16:51:21

Pulse time, High Channel, 2DH1

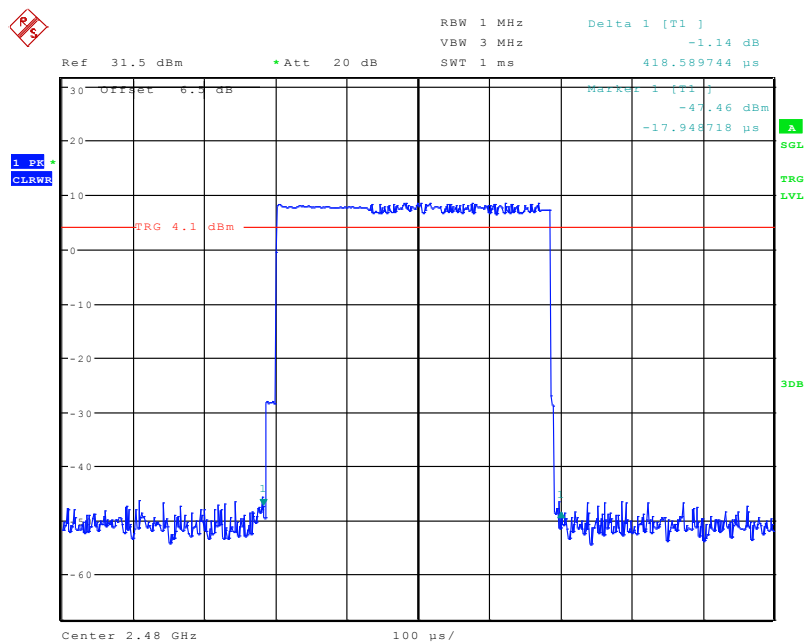


Date: 15.SEP.2020 16:55:21

Pulse time, Low Channel, 2DH3

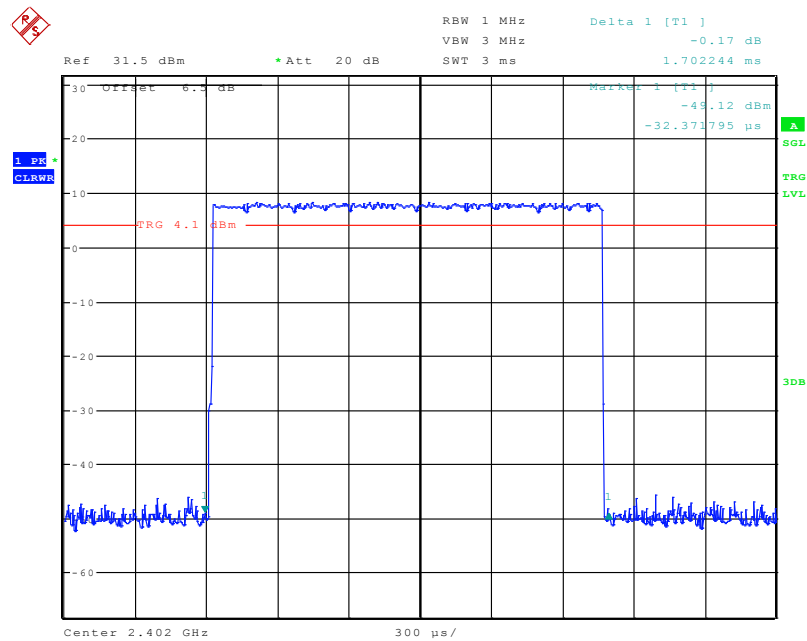


Date: 15.SEP.2020 16:58:17

Pulse time, Middle Channel, 2DH3

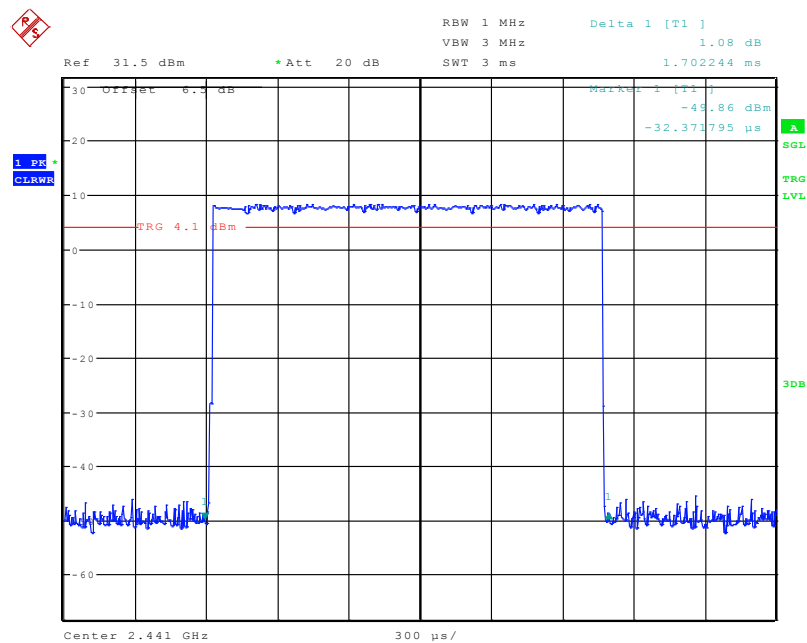


Date: 15.SEP.2020 16:58:29

Pulse time, High Channel, 2DH3

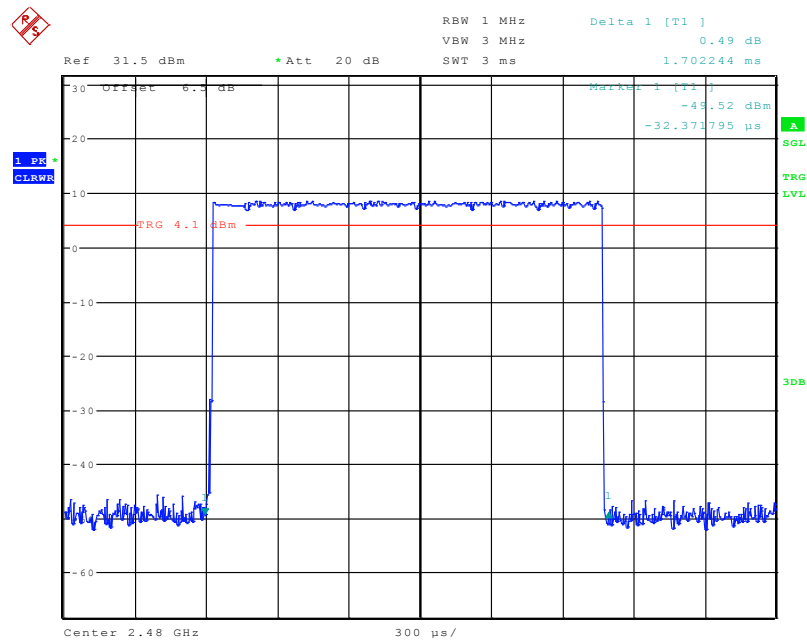


Date: 15.SEP.2020 16:58:46

Pulse time, Low Channel, 2DH5

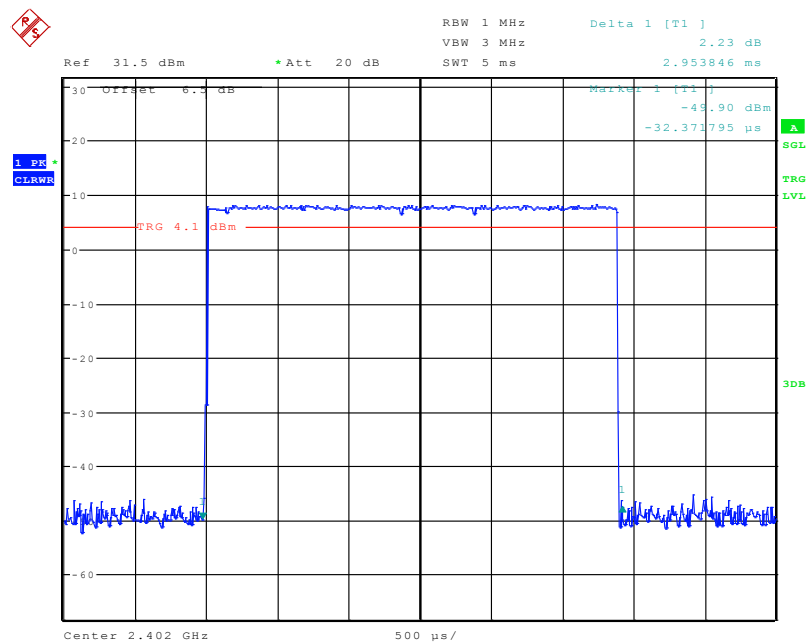


Date: 15.SEP.2020 17:02:50

Pulse time, Middle Channel, 2DH5

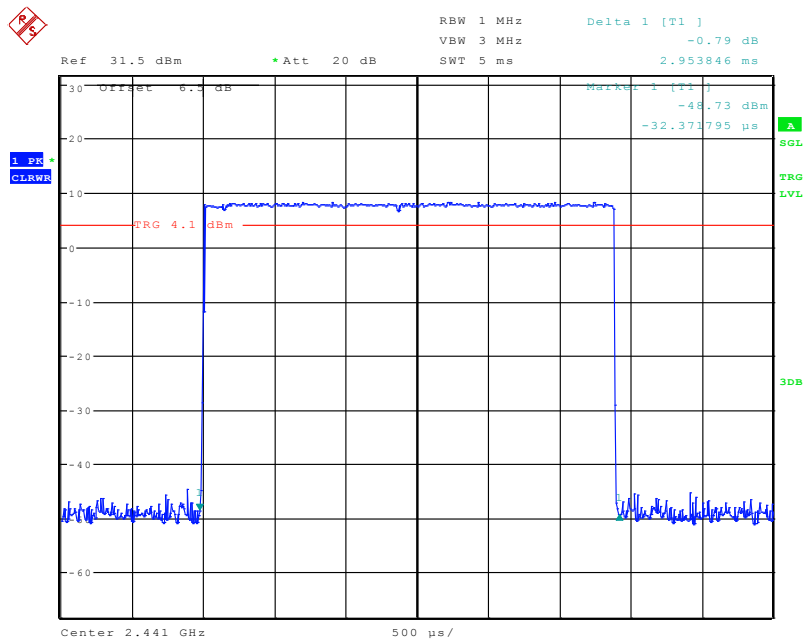


Date: 15.SEP.2020 17:02:39

Pulse time, High Channel, 2DH5

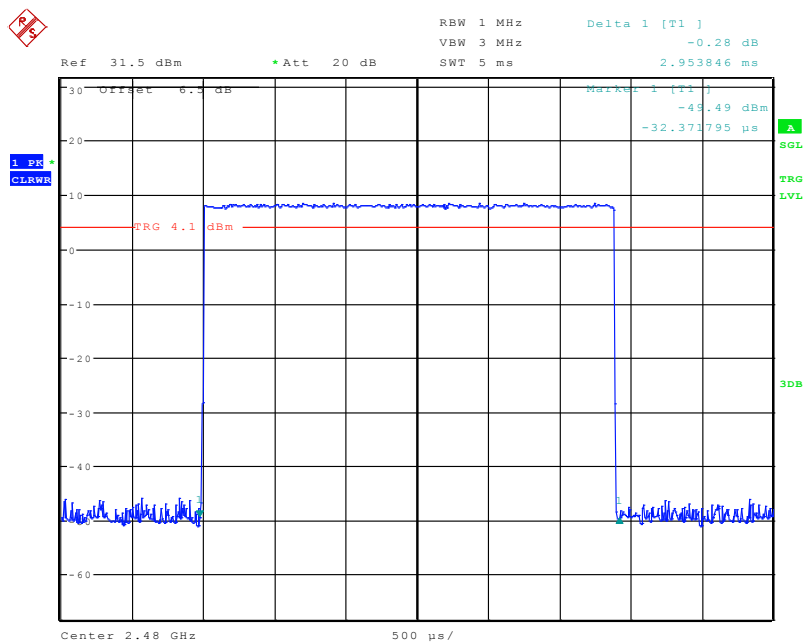


Date: 15.SEP.2020 17:02:07

EDR (8DPSK): Pulse time, Low Channel, 3DH1

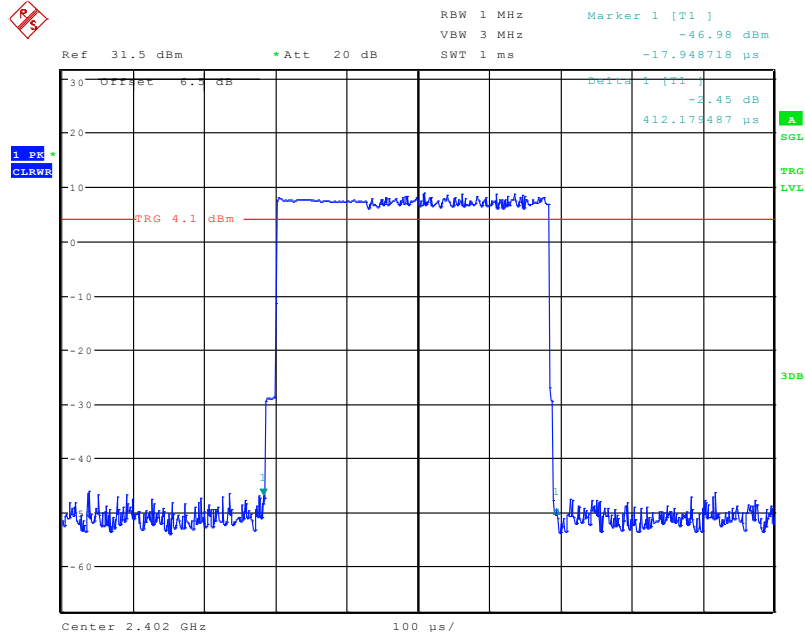


Date: 15.SEP.2020 16:50:42

Pulse time, Middle Channel, 3DH1

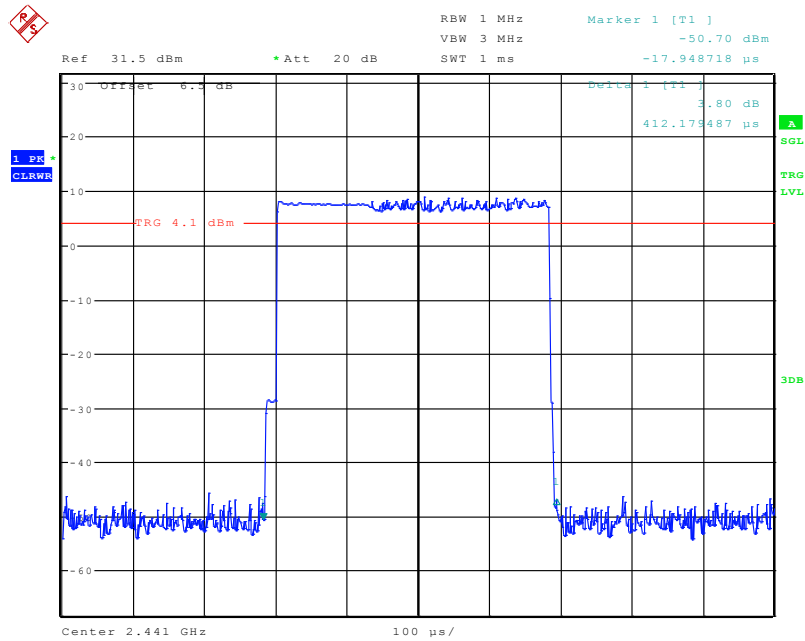


Date: 15.SEP.2020 16:51:03

Pulse time, High Channel, 3DH1

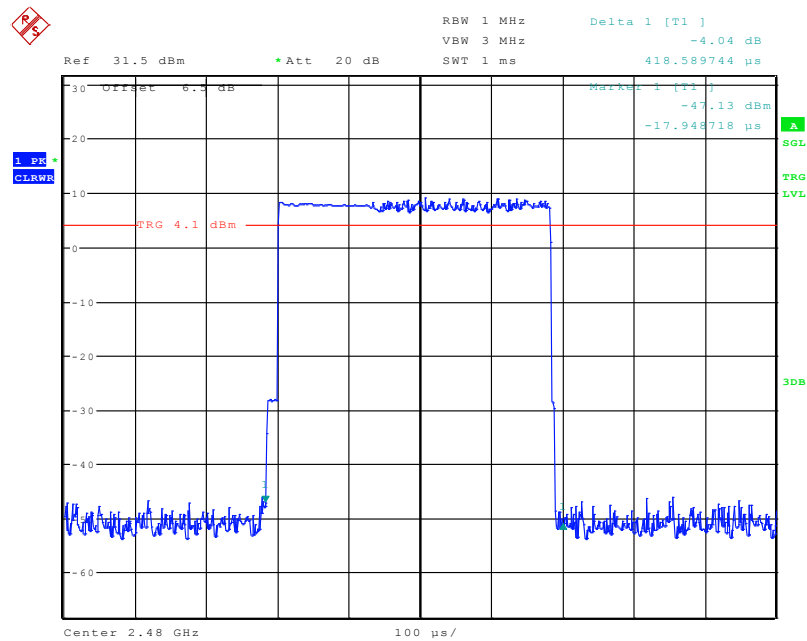


Date: 15.SEP.2020 16:55:40

Pulse time, Low Channel, 3DH3

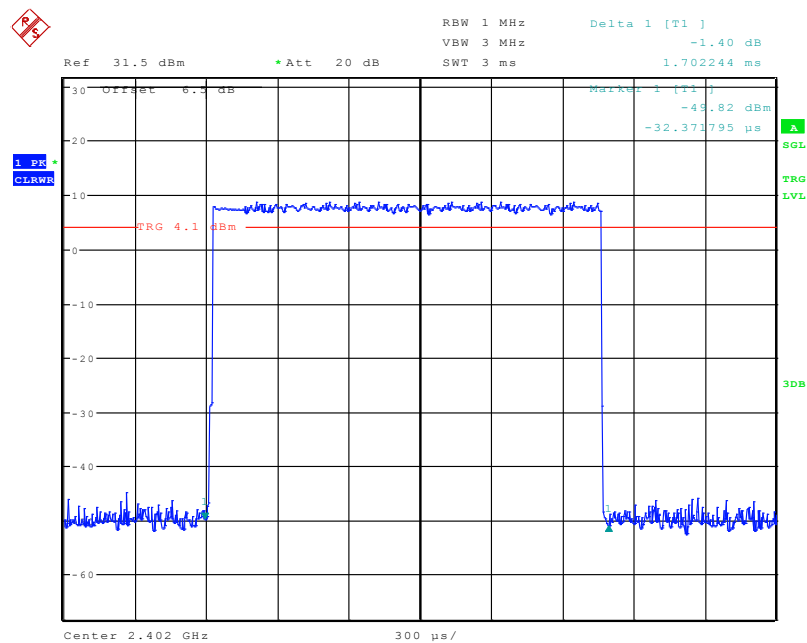


Date: 15.SEP.2020 16:59:30

Pulse time, Middle Channel, 3DH3

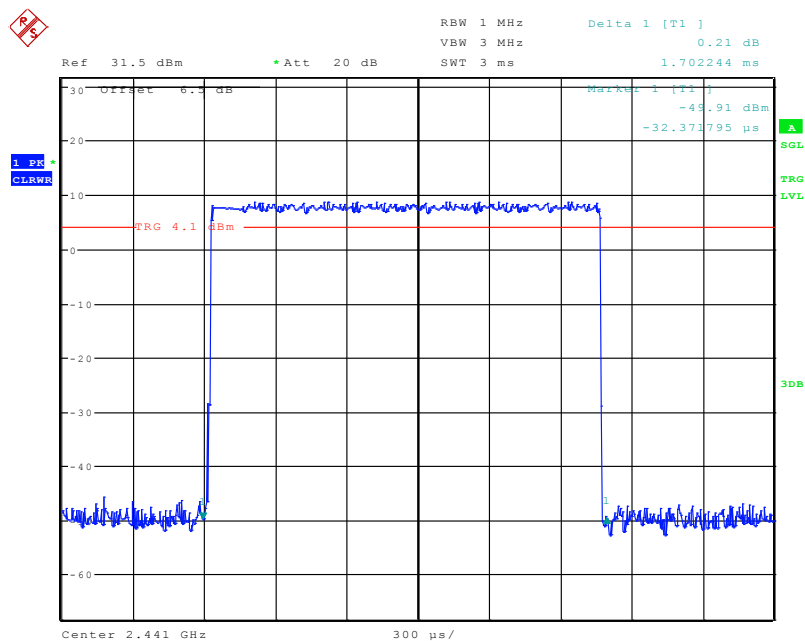

Date: 15.SEP.2020 16:59:14

Pulse time, High Channel, 3DH3

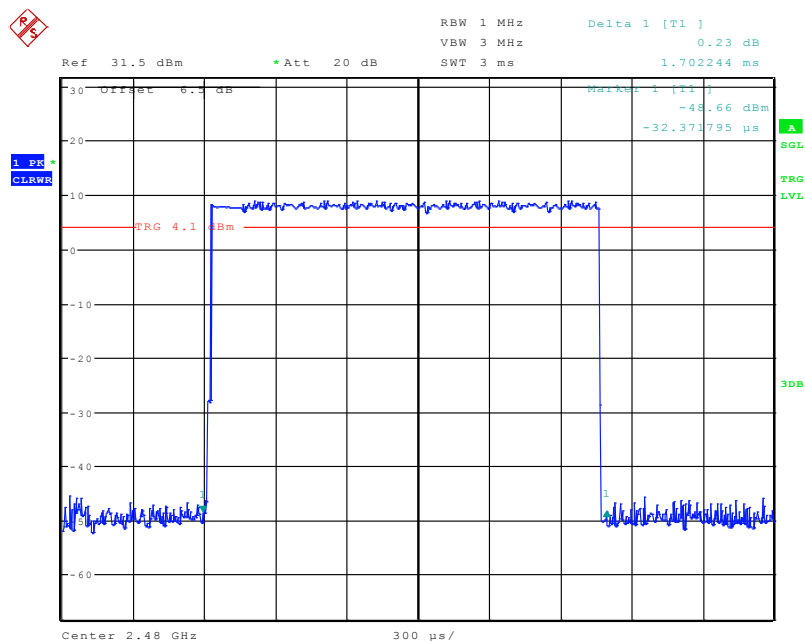

Date: 15.SEP.2020 16:59:01

Ref 31.5 dBm *Att 20 dB RBW 1 MHz Delta 1 [T1] 0.64 dB
VBW 3 MHz SWT 5 ms 2.953846 ms

30 Offset 6.5 dB Marker 1 [T1] -51.09 dBm
-32.371795 dBm

1. dB *
CLAW

TRG 4.1 dBm

Center 2.402 GHz 500 ps/

Date: 15.SEP.2020 17:03:13

Ref 31.5 dBm RBW 1 MHz Delta 1 [T1]
 *Att 20 dB VBW 3 MHz -0.82 dB
 SWT 5 ms 2.953846 ms

Offset 6.0 dB

Marker 1 [11]
 -48.34 dBm
 -32.371795 ps


TRG 4.1 dBm

1 PR *
 CLAW

Center 2.441 GHz 500 ps/

Date: 15.SEP.2020 17:03:25

Pulse time, High Channel, 3DH5

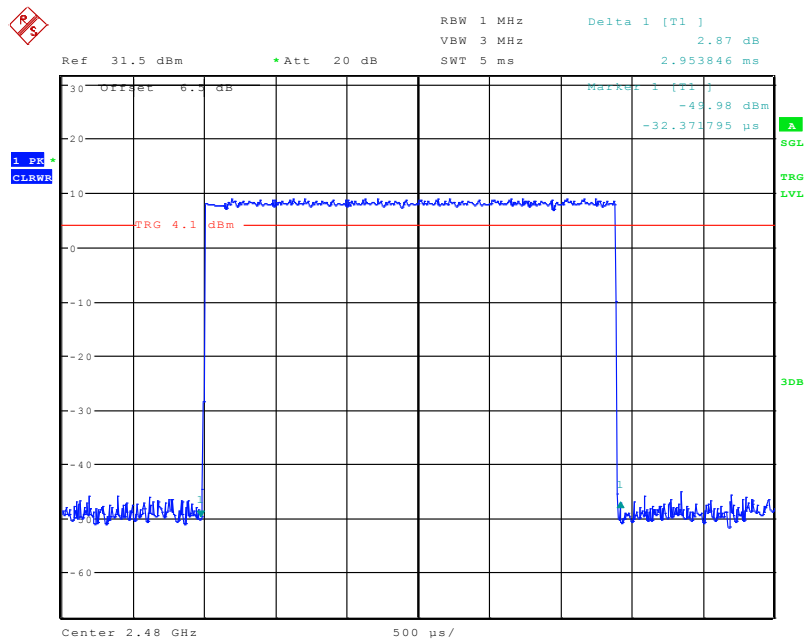

Date: 15.SEP.2020 17:03:40

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa


The testing was performed by Thea Xiao from 2020-09-15 to 2020-09-23.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.


Mode	Channel	Frequency (MHz)	Peak Conducted Output Power	Limit (dBm)
			(dBm)	
BDR (GFSK)	Low	2402	8.40	20.97
	Middle	2441	8.56	20.97
	High	2480	8.80	20.97
EDR ($\pi/4$-DQPSK)	Low	2402	9.14	20.97
	Middle	2441	9.23	20.97
	High	2480	9.49	20.97
EDR (8DPSK)	Low	2402	9.62	20.97
	Middle	2441	8.53	20.97
	High	2480	8.67	20.97

BDR (GFSK): Low Channel

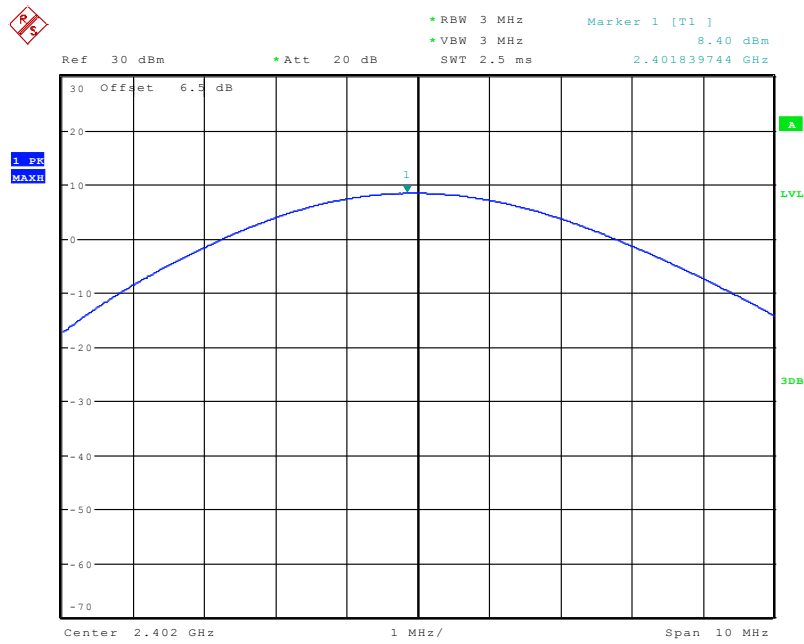


Date: 15.SEP.2020 15:28:11

BDR (GFSK): Middle Channel

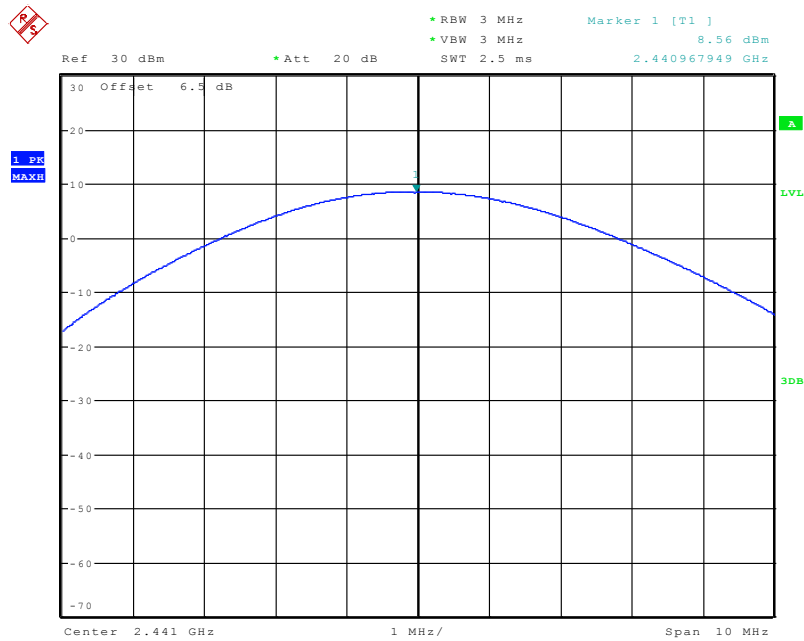


Date: 15.SEP.2020 15:29:22

BDR (GFSK): High Channel

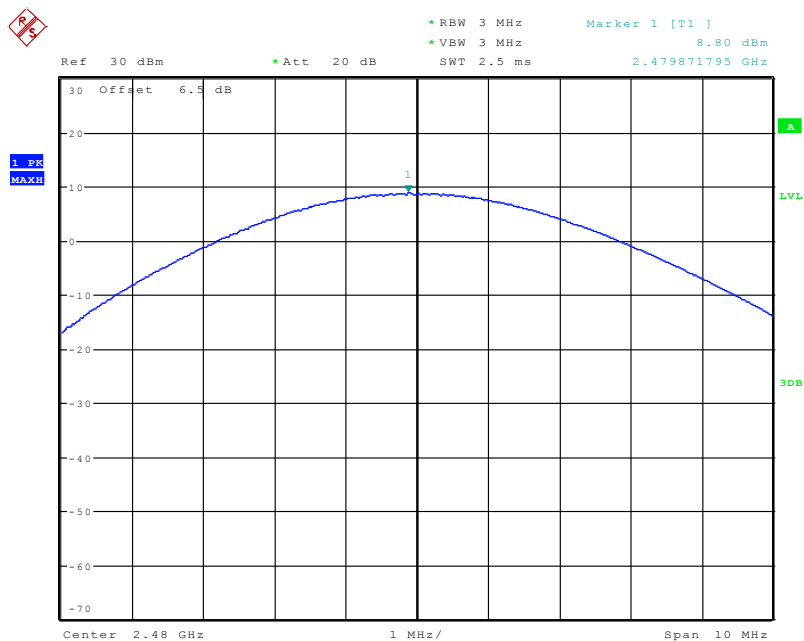


Date: 15.SEP.2020 15:29:40

EDR ($\pi/4$ -DQPSK): Low Channel

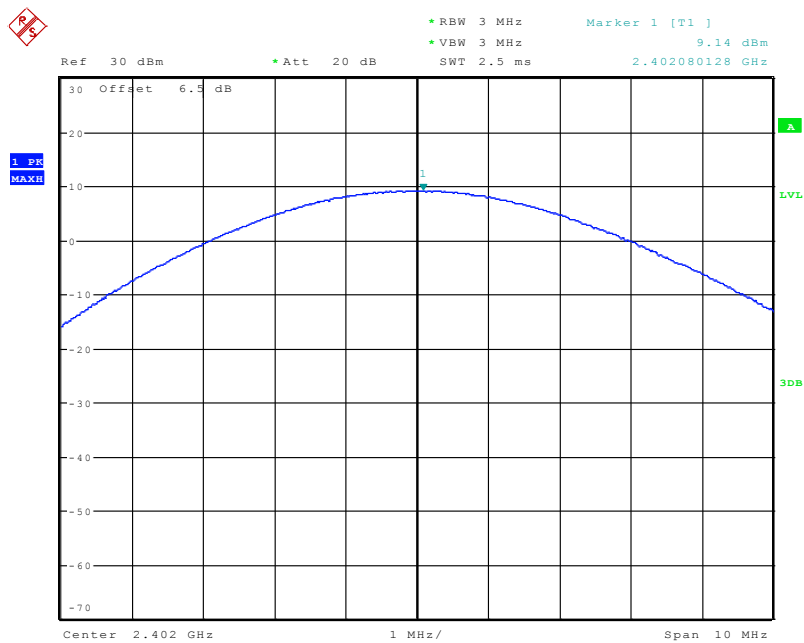


Date: 15.SEP.2020 15:30:03

EDR ($\pi/4$ -DQPSK): Middle Channel

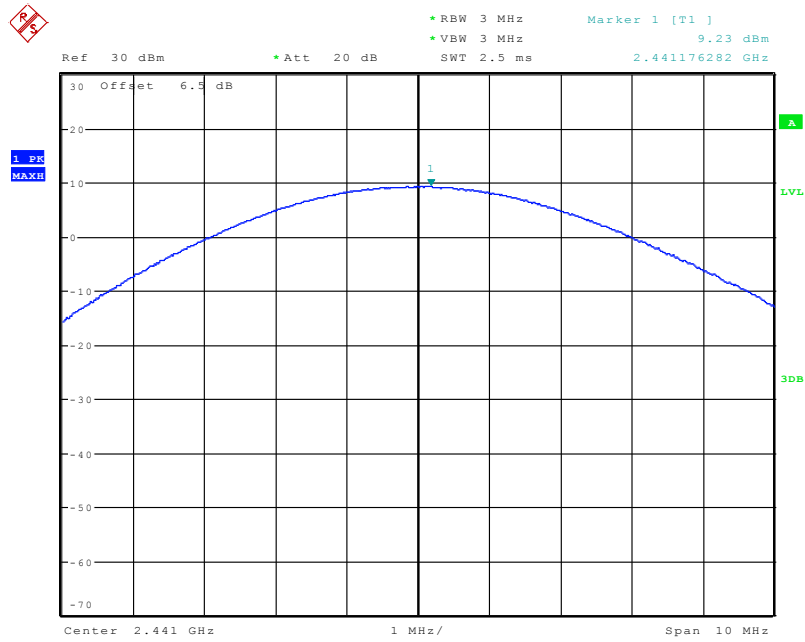


Date: 15.SEP.2020 15:30:25

EDR ($\pi/4$ -DQPSK): High Channel

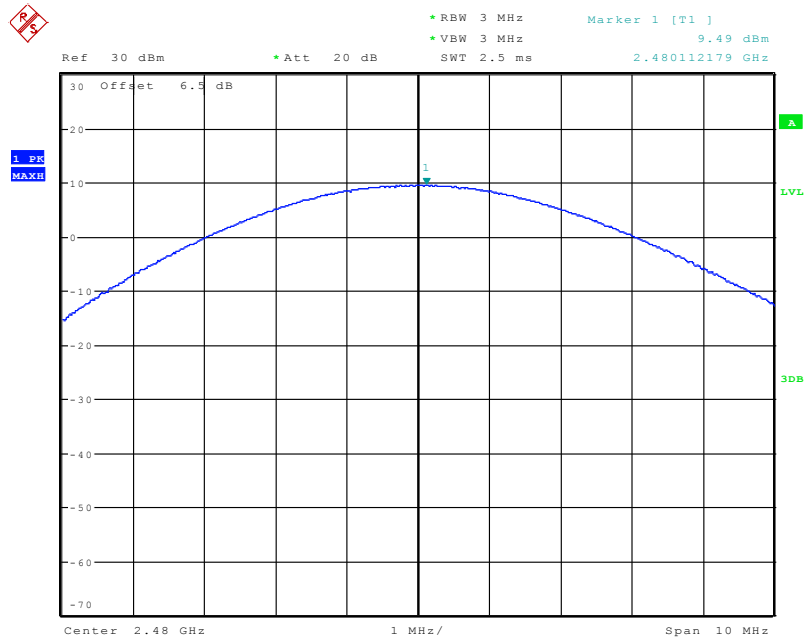


Date: 15.SEP.2020 15:30:38

EDR (8DPSK): Low Channel

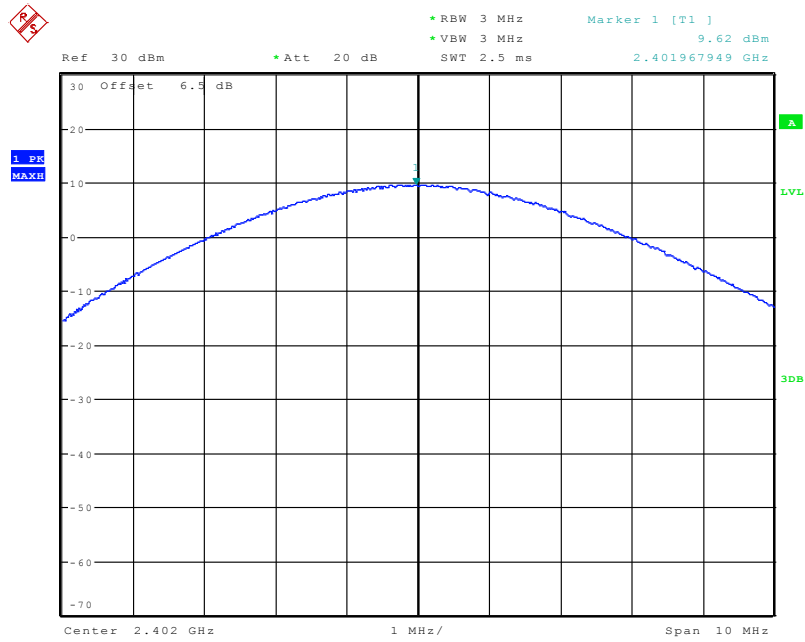


Date: 15.SEP.2020 15:31:00

EDR (8DPSK): Middle Channel

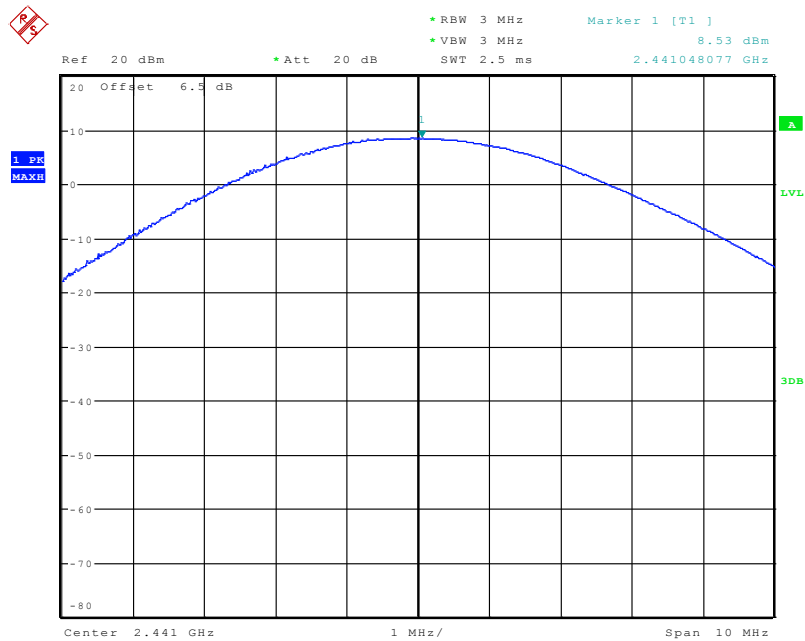

Date: 23.SEP.2020 14:29:16

EDR (8DPSK): High Channel

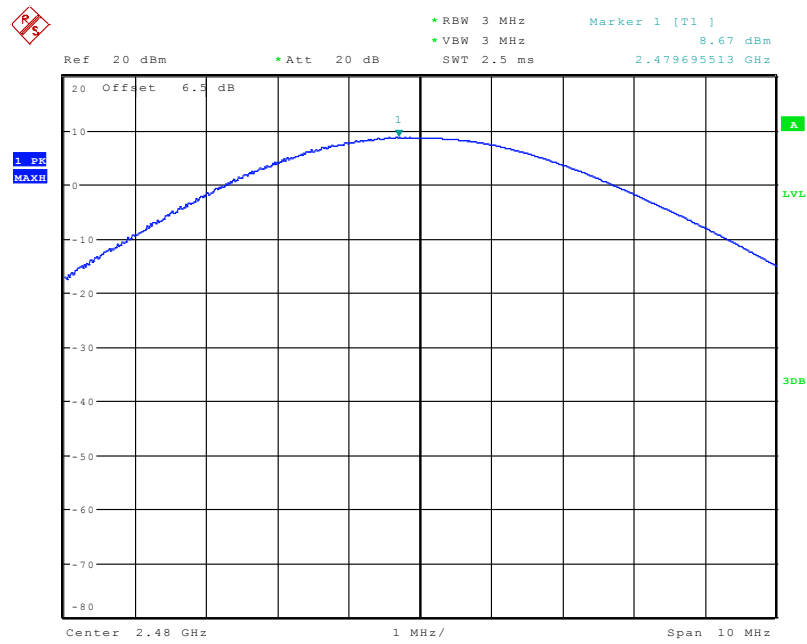

Date: 23.SEP.2020 14:30:18

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa


The testing was performed by Thea Xiao on 2020-09-15.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


BDR (GFSK): Band Edge-Left Side

Hopping

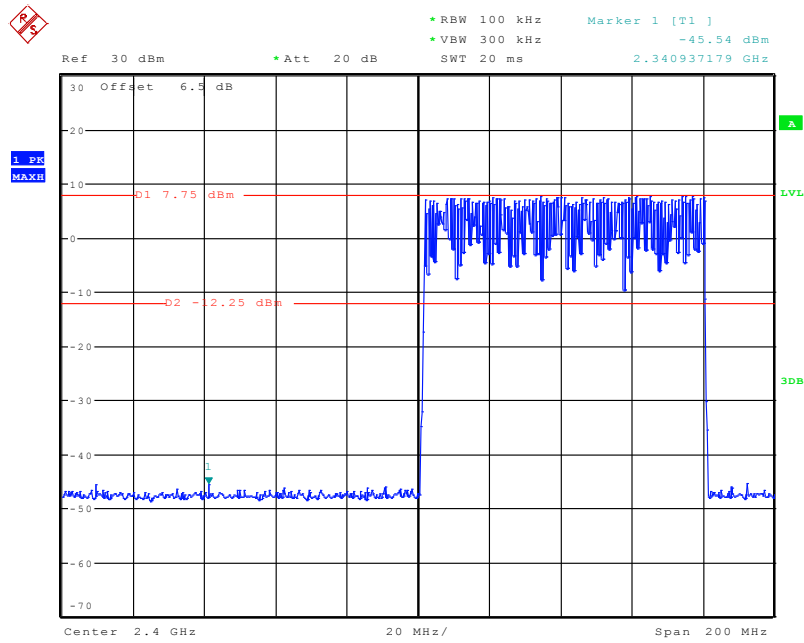


Date: 15.SEP.2020 15:55:49


Single

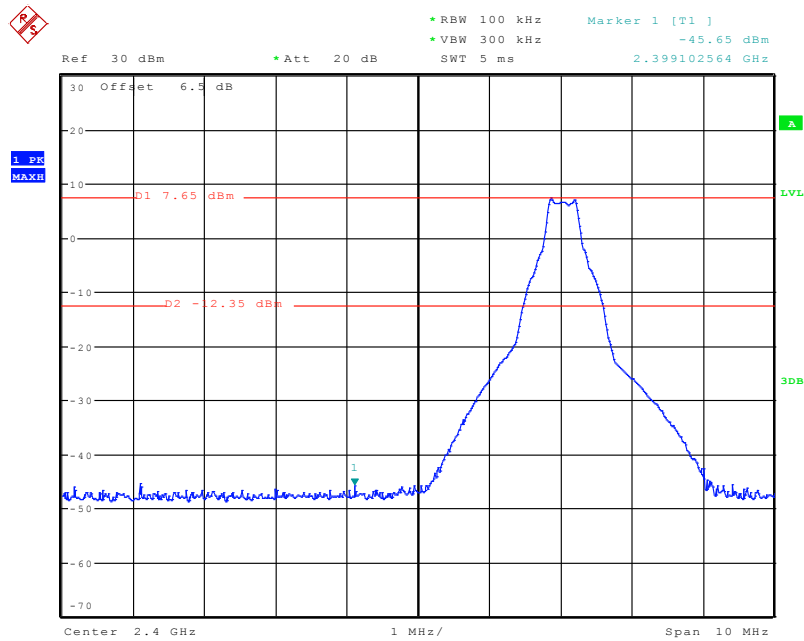

Date: 15.SEP.2020 15:50:41

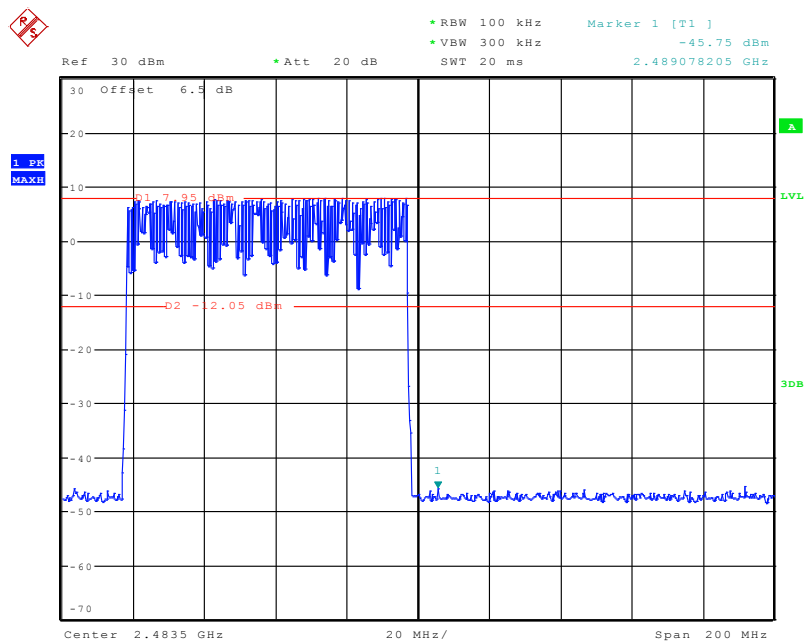
BDR (GFSK): Band Edge-Right Side**Hopping**

Date: 15.SEP.2020 15:54:36

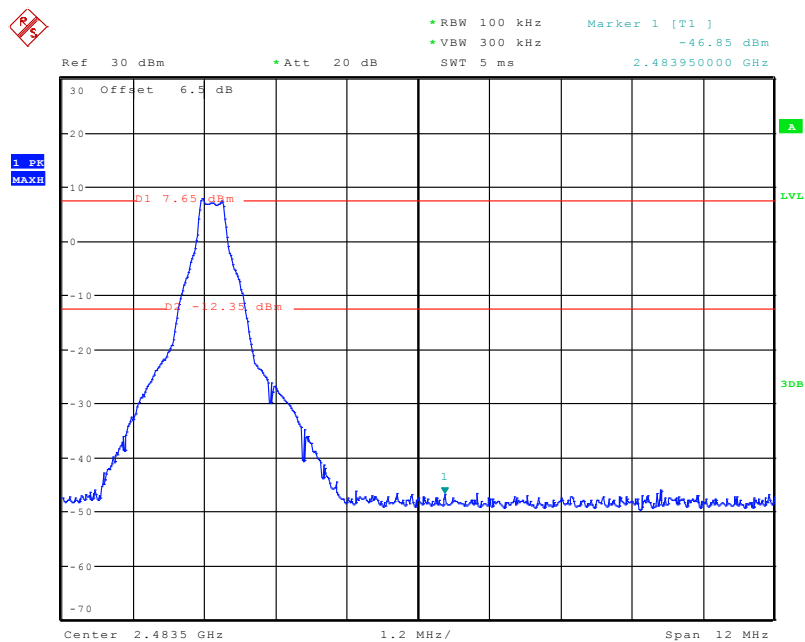Single


Date: 15.SEP.2020 15:52:44

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side Hopping

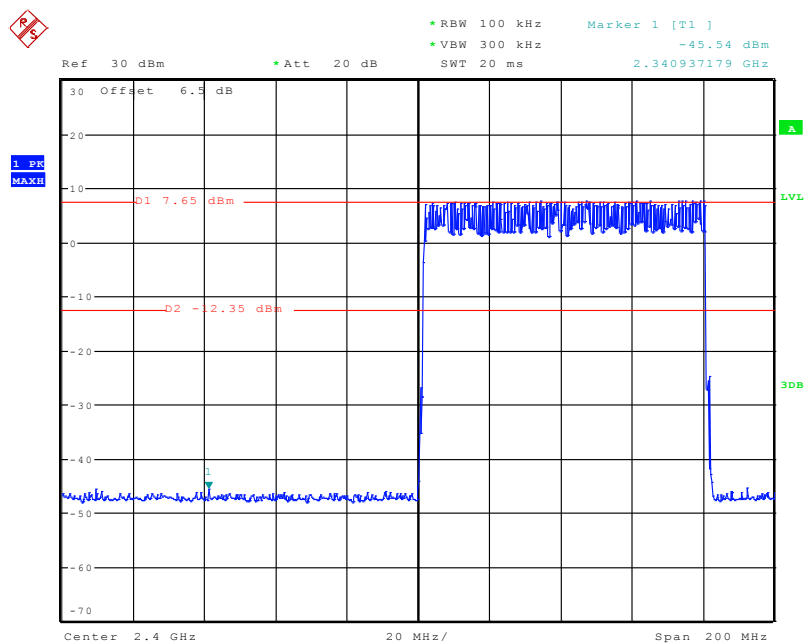


Date: 15.SEP.2020 15:57:30

Single

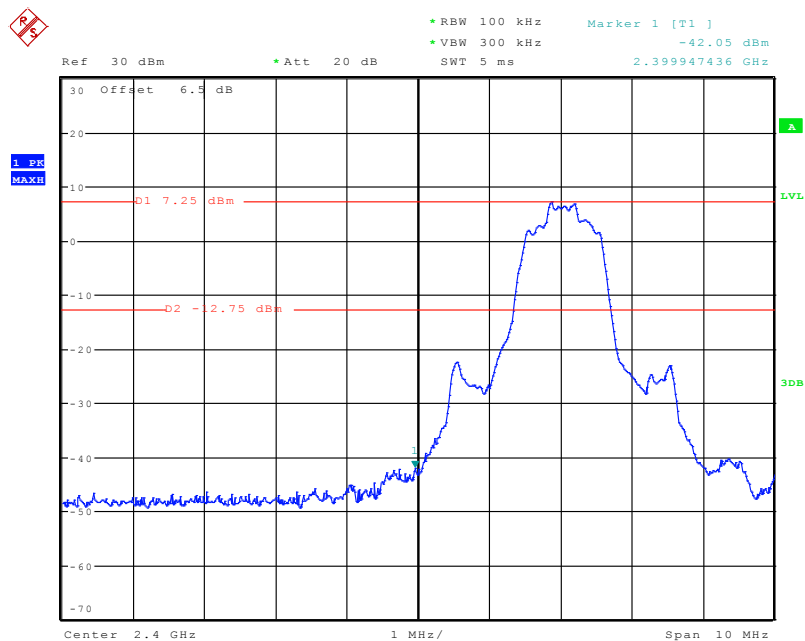


Date: 15.SEP.2020 16:02:13

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side Hopping

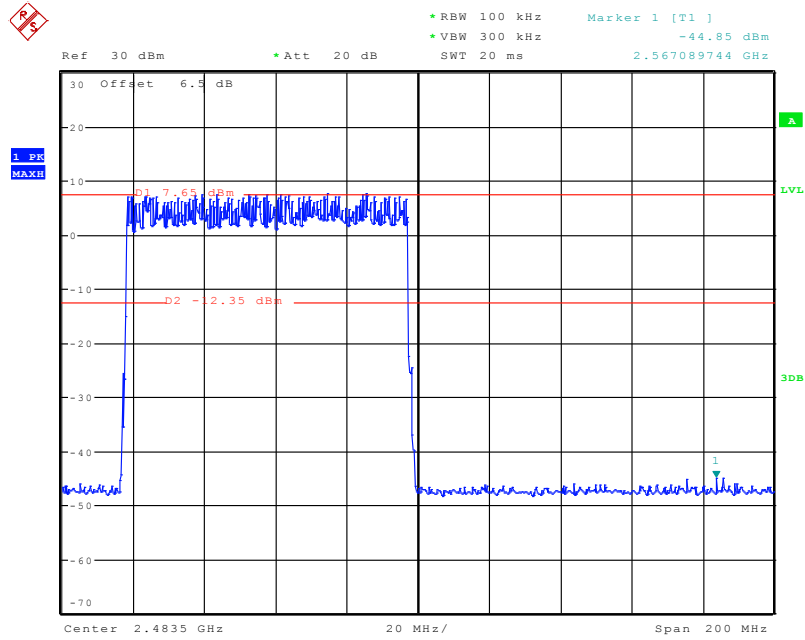


Date: 15.SEP.2020 15:59:36

Single

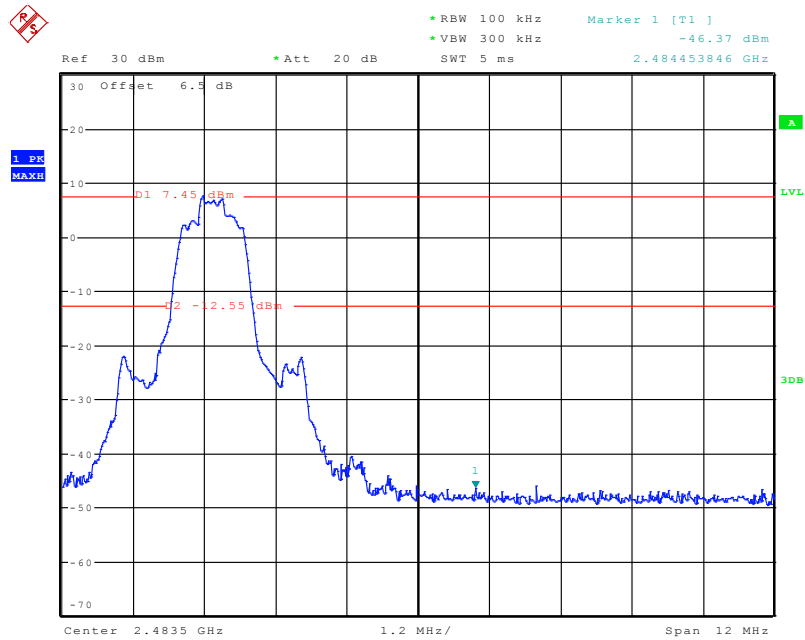


Date: 15.SEP.2020 16:00:44

EDR (8DPSK): Band Edge-Left Side Hopping

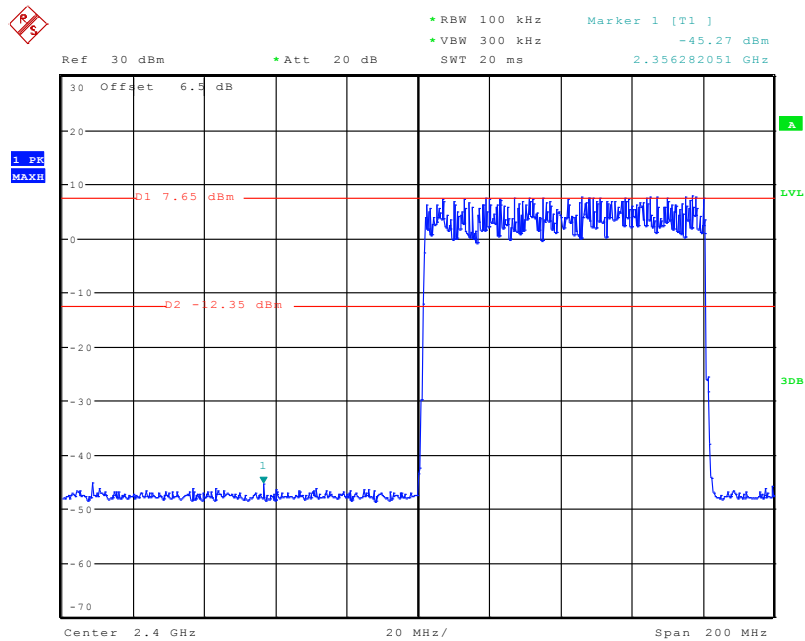


Date: 15.SEP.2020 16:07:38


Single

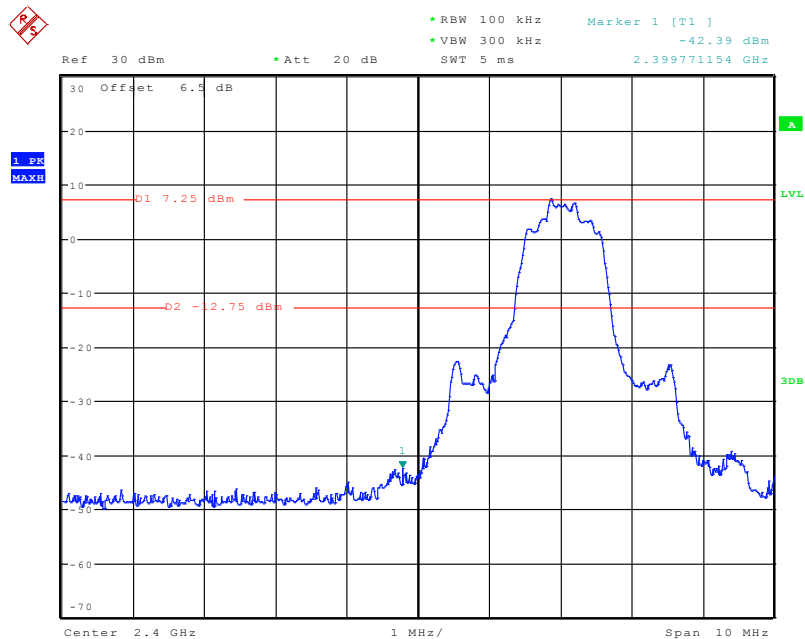

Date: 15.SEP.2020 16:03:01

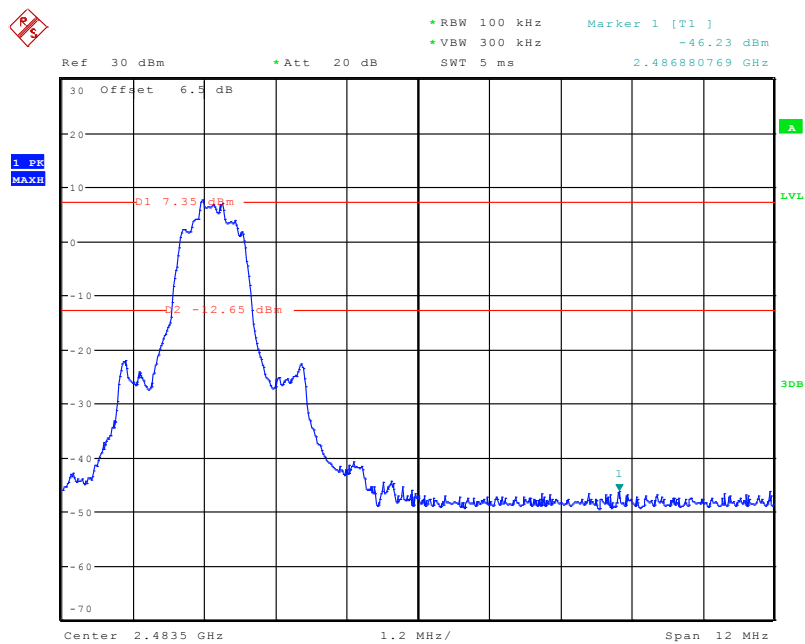EDR (8DPSK): Band Edge-Right Side**Hopping**

Date: 15.SEP.2020 16:04:02

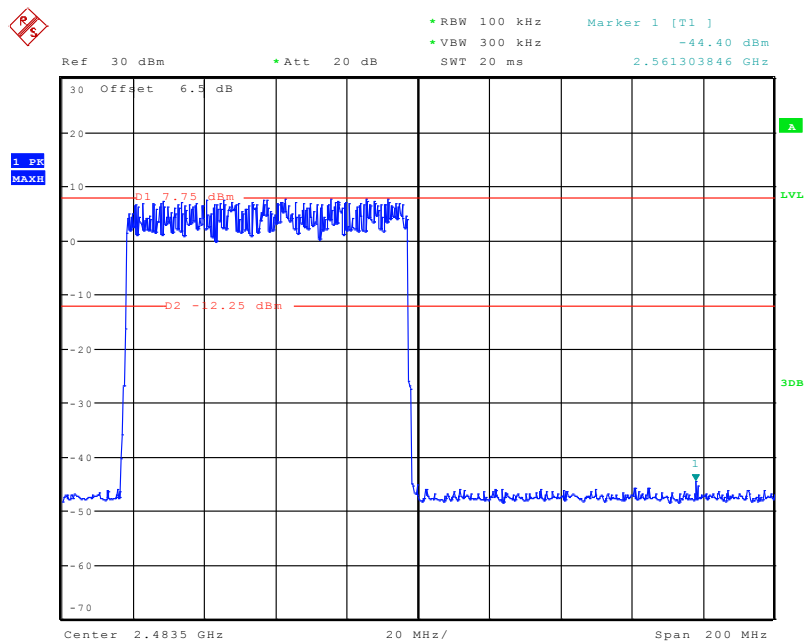Single

Date: 15.SEP.2020 16:05:52

******* END OF REPORT *******