

Relay2, Inc.

Wireless Router

Main Model: R2-CAP-ND-900N

Serial Model: N/A

November 13, 2013

Report No.: 13070456-FCC-R1

(This report supersedes none)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

Herith Shi Compliance Engineer	Alex Liu Technical Manager	

**This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.**

RF Test Report

SIEMIC, INC.
Accessing global markets

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 2 of 224
www.siemic.com.cn

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management through out a project. Our extensive experience with China, Asia Pacific, North America, European, and international compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

SIEMIC (Shenzhen-China) Laboratories Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC , RF/Wireless , Telecom
Canada	EMC, RF/Wireless , Telecom
Taiwan	EMC, RF, Telecom , Safety
Hong Kong	RF/Wireless ,Telecom
Australia	EMC, RF, Telecom , Safety
Korea	EMI, EMS, RF , Telecom, Safety
Japan	EMI, RF/Wireless, Telecom
Singapore	EMC , RF , Telecom
Europe	EMC, RF, Telecom , Safety



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 3 of 224
www.siemic.com.cn

This page has been left blank intentionally.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 4 of 224
www.siemic.com.cn

CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION	5
2	TECHNICAL DETAILS	6
3	MODIFICATION	7
4	TEST SUMMARY	8
5	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	12
ANNEX A. TEST INSTRUMENT & METHOD		199
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS		204
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT		219
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST		223
ANNEX E. DECLARATION OF SIMILARITY		224

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 5 of 224
www.siemic.com.cn

1 EXECUTIVE SUMMARY & EUT INFORMATION

The purpose of this test programme was to demonstrate compliance of the Relay2, Inc., Wireless Router and model: R2-CAP-ND-900N against the current Stipulated Standards. The Wireless Router has demonstrated compliance with the FCC Part 15.247: 2013, ANSI C63.4: 2009.

EUT Information

EUT Description : Wireless Router

Main Model : R2-CAP-ND-900N

Serial Model : N/A

Antenna Gain : WIFI 2.4GHz: 3 dBi
WIFI 5GHz: 5 dBi

Input Power : Adapter:
Model:FSP025-1AD207A
Input: AC 100-240V 50/60Hz 0.7A
Output: DC 48V 0.52A

Classification
Per Stipulated Test Standard : FCC Part 15.247: 2013, ANSI C63.4: 2009

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 6 of 224
www.siemic.com.cn

2 TECHNICAL DETAILS

Purpose	Compliance testing of Wireless Router with stipulated standard
Applicant / Client	Relay2, Inc. 1525 McCarthy Blvd., Suite 209, Milpitas, CA 95035, USA
Manufacturer	Relay2, Inc. 1525 McCarthy Blvd., Suite 209, Milpitas, CA 95035, USA
Laboratory performing the tests	SIEMIC(Shenzhen-China) Laboratories Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong, China Tel: +86-0755-2601 4629 / 2601 4953 Fax: +86-0755-2601 4953-810 Email: China@siemic.com.cn
Test report reference number	13070456-FCC-R1
Date EUT received	October 10, 2013
Standard applied	FCC Part 15.247: 2013, ANSI C63.4: 2009
Dates of test (from – to)	October 10 to November 12, 2013
No of Units :	#1
Equipment Category :	Spread Spectrum System/Device
Trade Name :	N/A
RF Operating Frequency (ies)	WIFI(802.11a/b/g/n20): 2412-2462 MHz; 5180-5240 MHz; 5745-5825MHz WIFI (802.11n40): 2422-2452 MHz; 5190-5230 MHz; 5755-5795 MHz
Number of Channels	WIFI 2.4G(802.11a/b/g/n-20): 11CH WIFI 5.18-5.24G(802.11a/ n-20): 8CH WIFI 5.745-5.825G(802.11a/ n-20): 5CH WIFI 2.4G(n-40): 7CH WIFI 5.19-5.23G(n-40):2CH WIFI 5.755-5.795G(n-40): 2CH
Modulation	WIFI(802.11a/b/g/n): DSSS/OFDM
FCC ID	2AAA9-R2CAPND900N



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 7 of 224
www.siemic.com.cn

3 MODIFICATION

NONE

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 8 of 224
www.siemic.com.cn

4 TEST SUMMARY

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

Test Results Summary

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB&26 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

Table for RF Out Put

The RF board has three RF out port: CH0; CH1; CH2



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 10 of 224
www.siemic.com.cn

Table for frequency list

For 2.4G band

802.11b\g\n-20		802.11n-40	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447		
9	2452		
10	2457		
11	2462		


For 5.18-5.24G band

802.11a\n-20		802.11n-40	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		

For 5.755-5.795G band

802.11a\n-20		802.11n-40	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

Table for antenna list

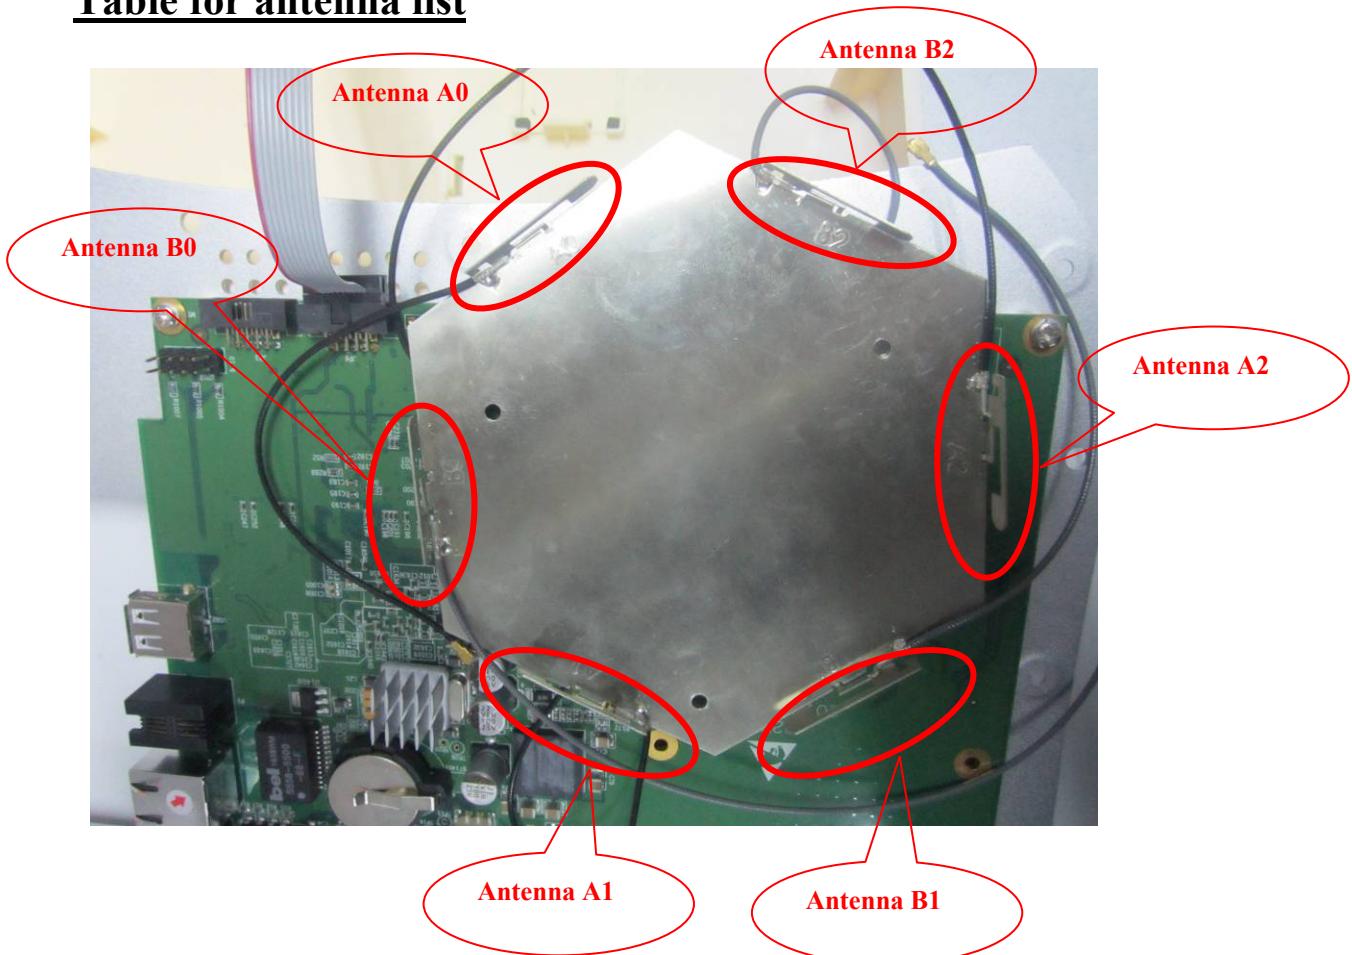

For 2.4GHz MIMO mode: the three IFA (Antenna A0; A1; A2, is for 2.4GHz) antennas is fixed on a metal plate. The antenna is a Sectorized antenna; the gain is 3 dBi is including all of the antennas.

For 5GHz MIMO mode: the three IFA (Antenna B0; B1; B2, is for 5GHz) antennas is fixed on a metal plate. The antenna is a Sectorized antenna; the gain is 5 dBi is including all of the antennas.

MIMO antenna requirement according with KDB 662911 section F

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 12 of 224
www.siemic.com.cn

5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

5.1 §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Connector Construction

The EUT has antennas: .a Sectorized antenna for 2.4GHz the gain is 3dBi;
a Sectorized antenna for 5GHz, the gain is 5dBi

Result: PASS

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 13 of 224
www.siemic.com.cn

5.2 §15.247(a) (2) –DTS (6 dB&20 dB) CHANNEL BANDWIDTH (For 2.4GHz Band)

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions

Temperature	26°C
Relative Humidity	58%
Atmospheric Pressure	1001mbar

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.

4. Test date : October 26, 2013

Tested By : Herith Shi

Requirement(s): The minimum 6 dB bandwidth of a DTS transmission shall be at least 500 kHz. Within this document, this bandwidth is referred to as the DTS bandwidth. The procedures provided herein for measuring the maximum peak conducted output power assume the use of the DTS bandwidth.

Procedures:

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Result: Pass.

Please refer to the following tables and plots.

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 14 of 224
www.siemic.com.cn


RF Port CH0**6dB bandwidth:**

Channel	Channel Frequency (MHz)	Data Rate (Mbps)	Measured 6dB Bandwidth (MHz)	FCC Part 15.247 Limit (kHz)
802.11b mode				
Low	2412	1	10.152	>500
Middle	2437	1	10.133	>500
High	2462	1	10.120	>500
802.11g mode				
Low	2412	6	16.419	>500
Middle	2437	6	16.378	>500
High	2462	6	16.427	>500
802.11n(20M) mode				
Low	2412	MCS0	17.599	>500
Middle	2437	MCS0	17.591	>500
High	2462	MCS0	17.366	>500
802.11n(40M) mode				
Low	2422	MCS0	36.424	>500
Middle	2437	MCS0	36.471	>500
High	2452	MCS0	36.427	>500

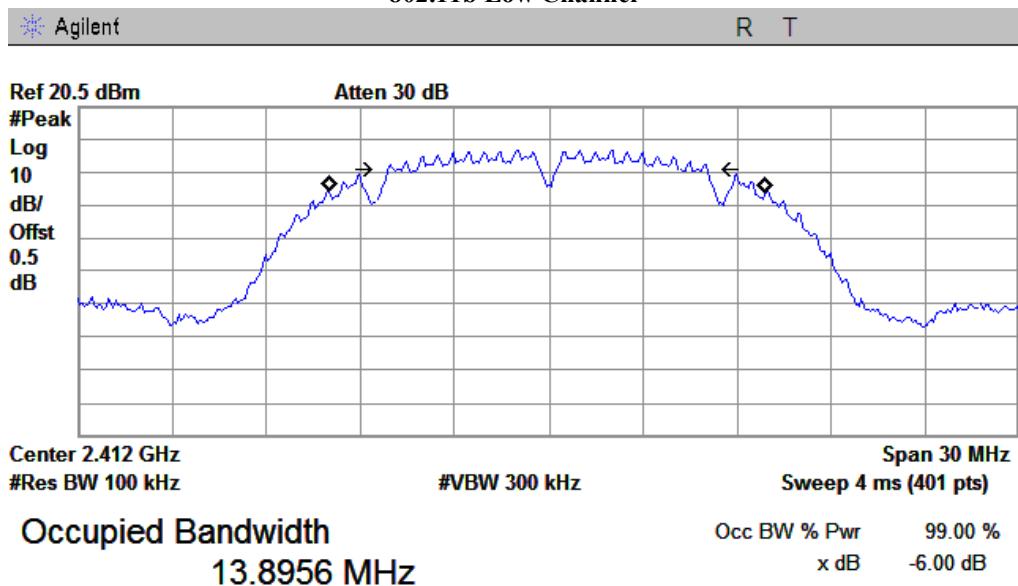
802.11b Low Channel

Transmit Freq Error -16.354 kHz
x dB Bandwidth 10.152 MHz

802.11b Middle Channel

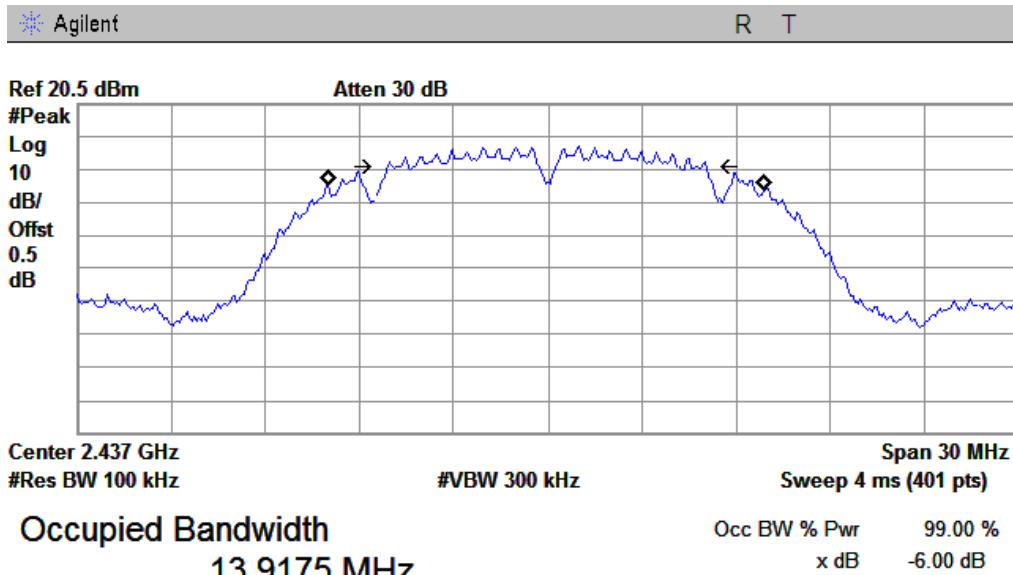


Transmit Freq Error -23.583 kHz
 x dB Bandwidth 10.133 MHz

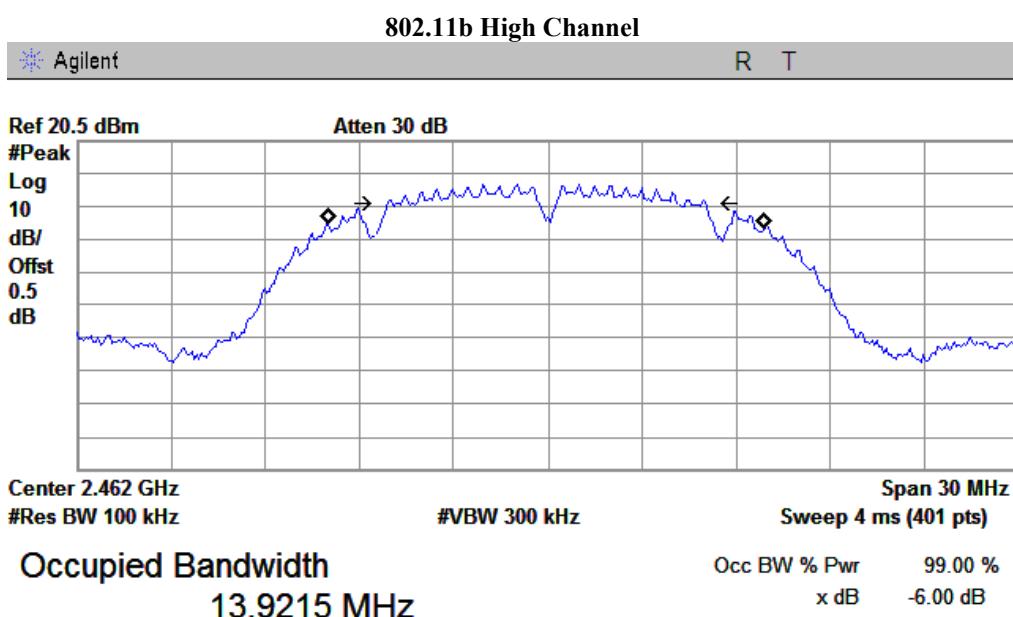


Transmit Freq Error -34.714 kHz
 x dB Bandwidth 10.120 MHz

802.11g Low Channel

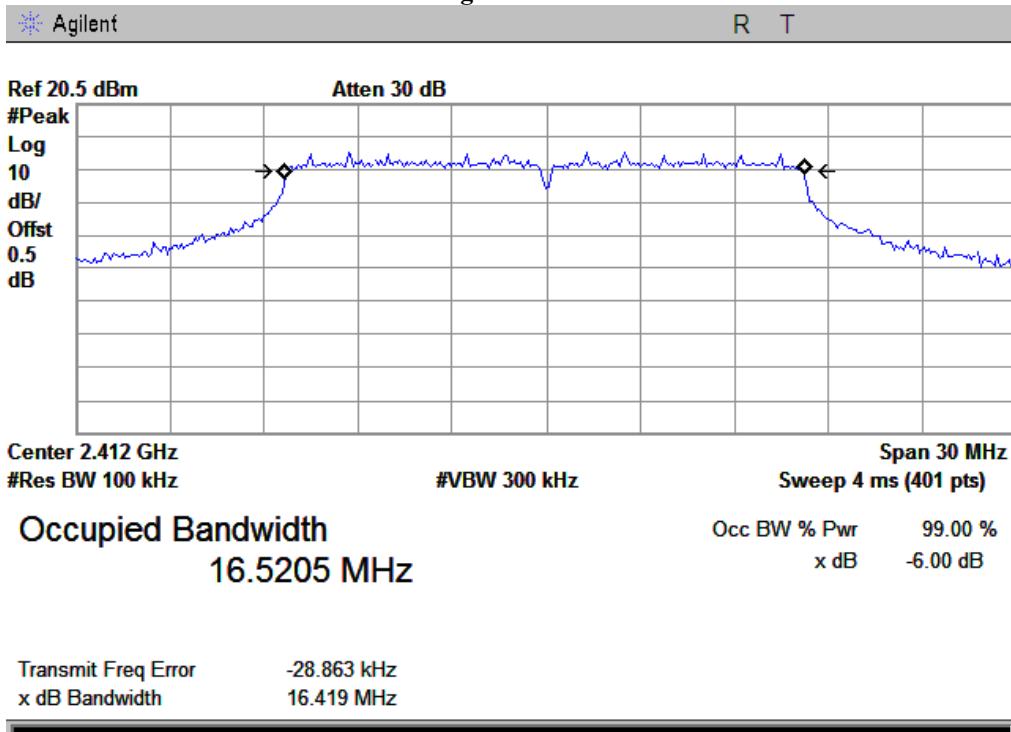


802.11g Middle Channel

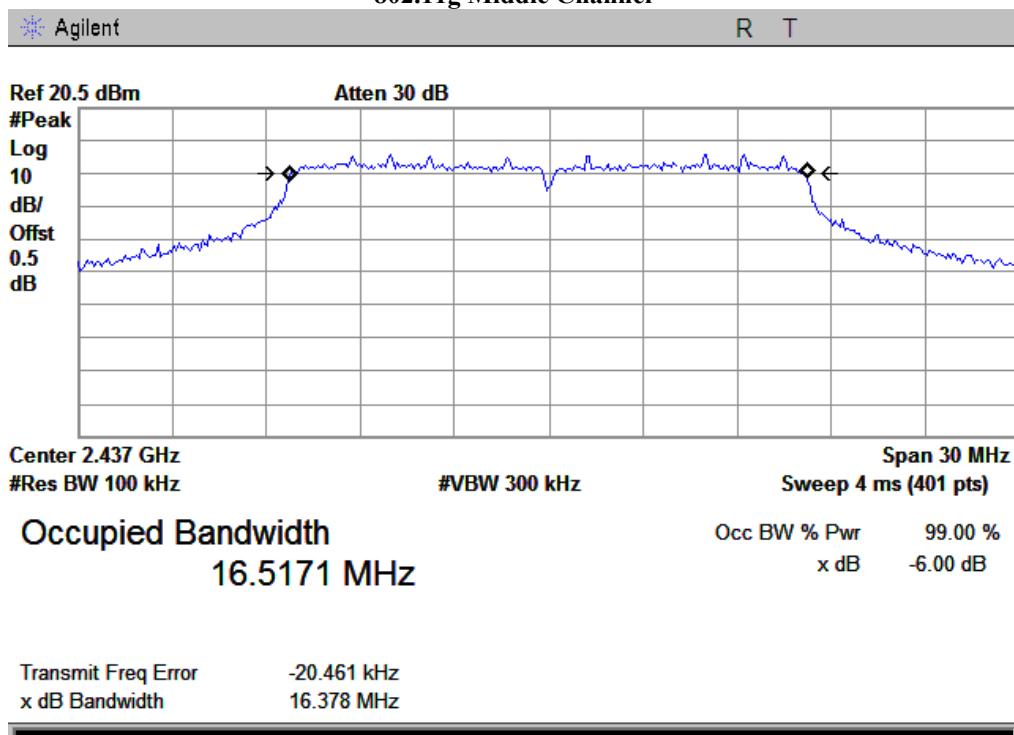

802.11g High Channel

Agilent

R T

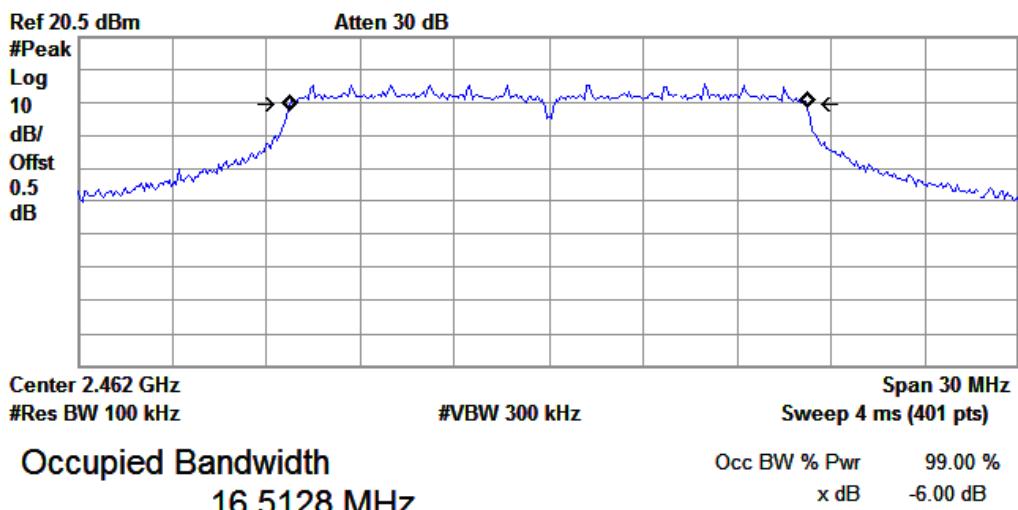


Transmit Freq Error -24.667 kHz
 x dB Bandwidth 16.427 MHz

802.11n20 Low Channel

Agilent


R T

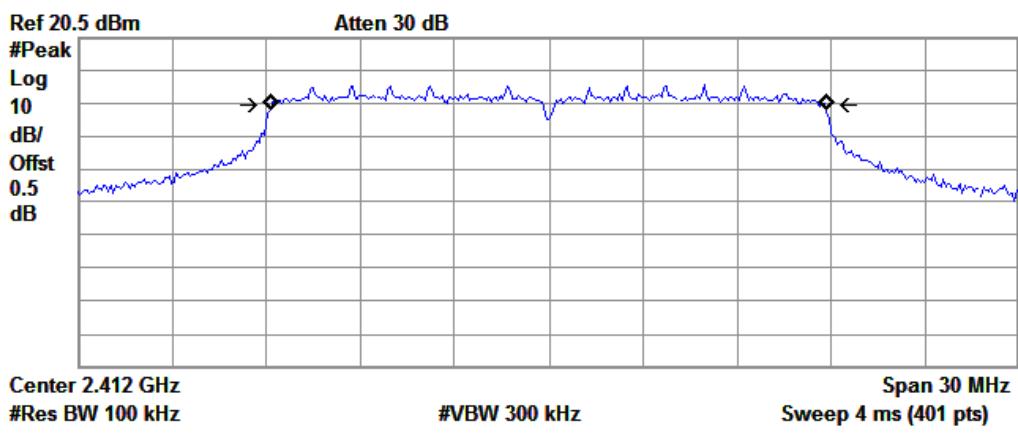


Occupied Bandwidth 17.6839 MHz Occ BW % Pwr 99.00 %
 x dB -6.00 dB

Transmit Freq Error -22.674 kHz
 x dB Bandwidth 17.599 MHz

802.11n20 Middle Channel

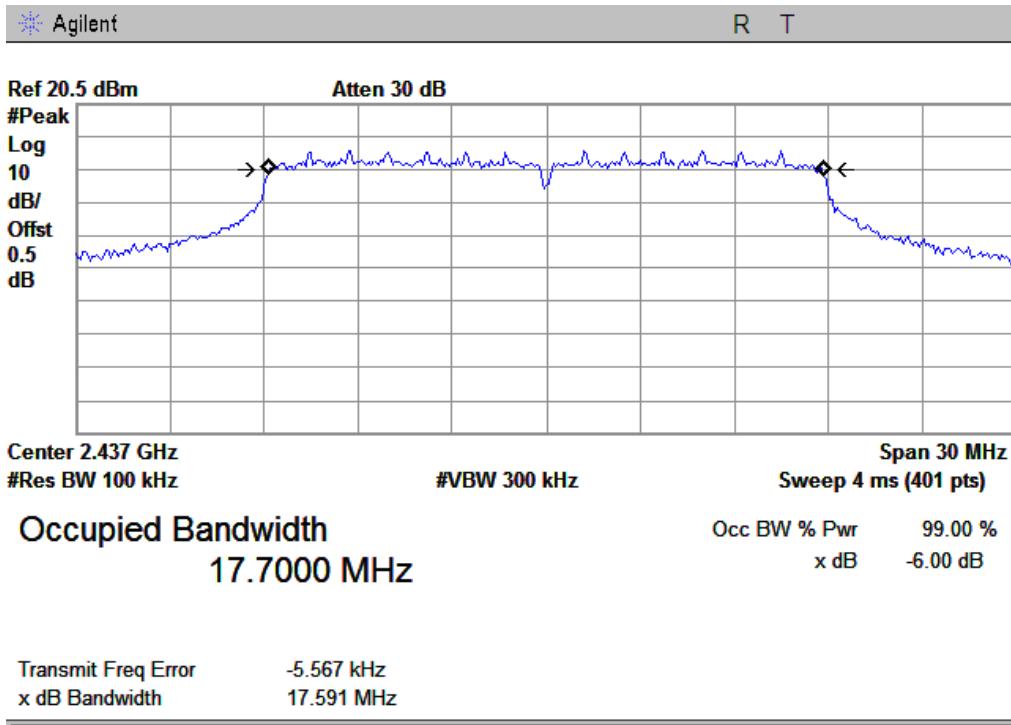


802.11n20 High Channel

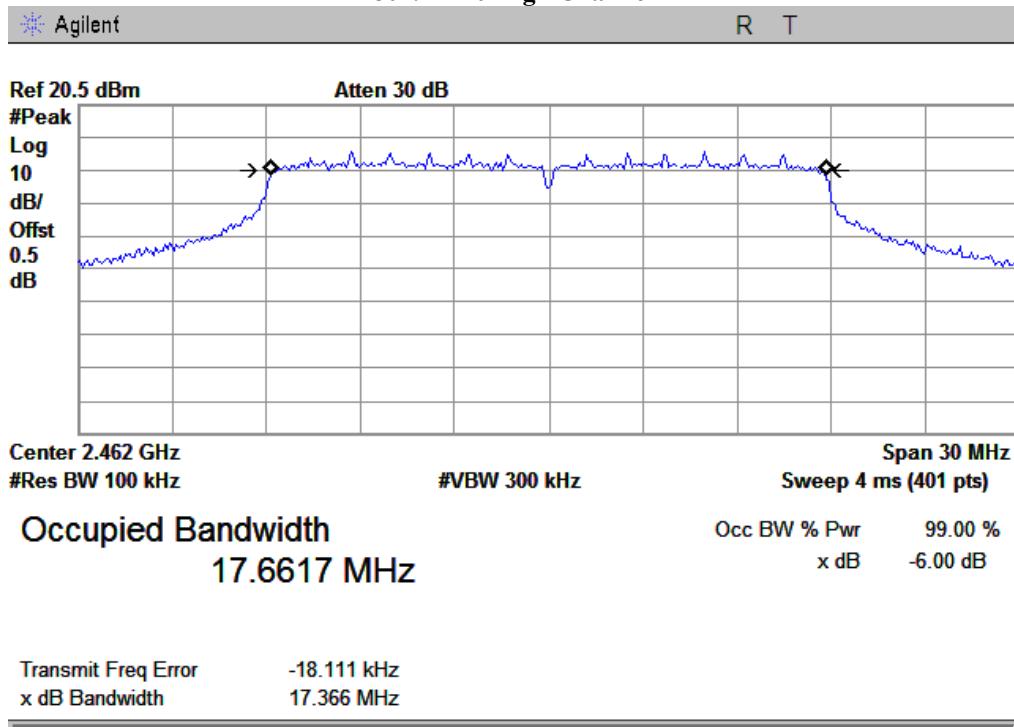

802.11n40 Low Channel

Agilent

R T

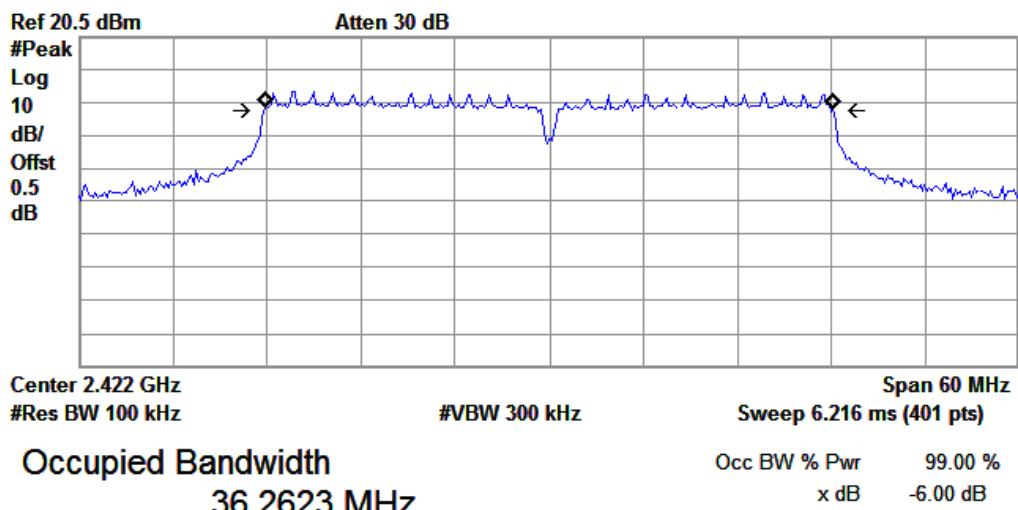


Transmit Freq Error -23.567 kHz
x dB Bandwidth 36.424 MHz

802.11n40 Middle Channel

Agilent

R T

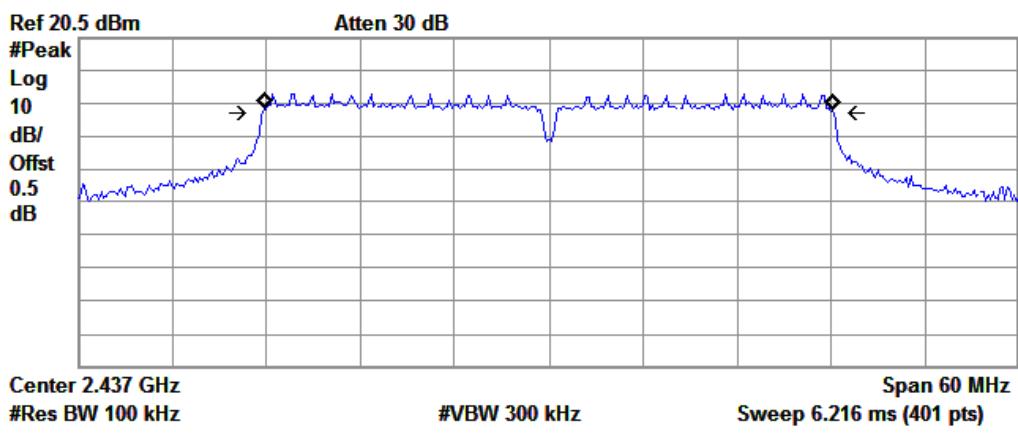



Transmit Freq Error -23.316 kHz
x dB Bandwidth 36.471 MHz

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 20 of 224
www.siemic.com.cn

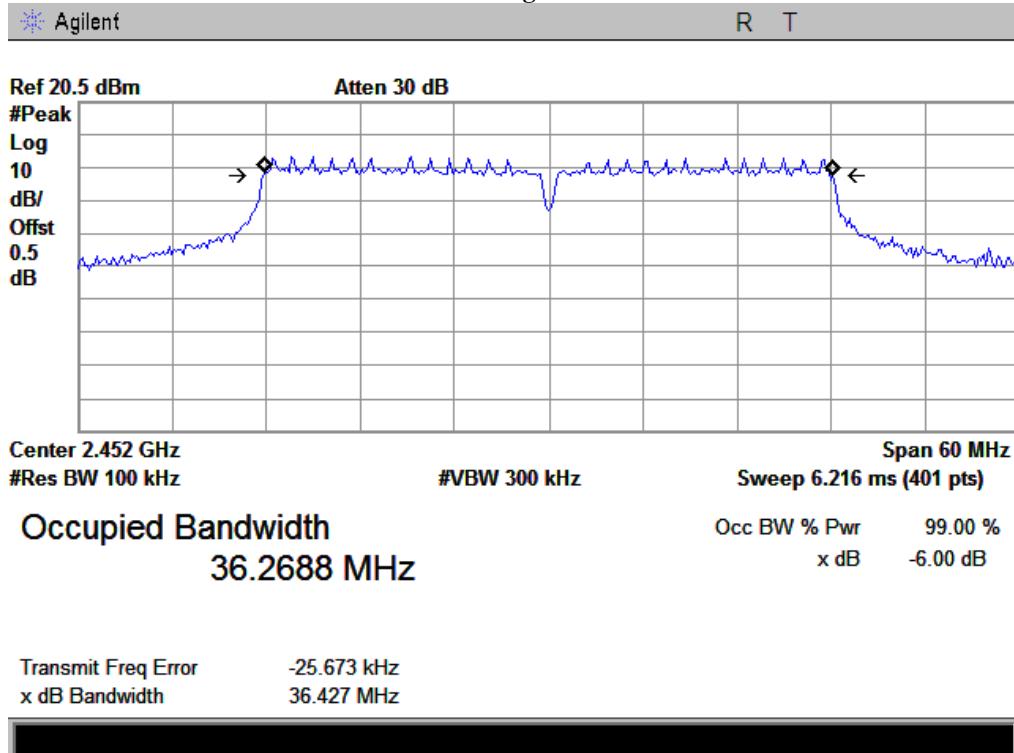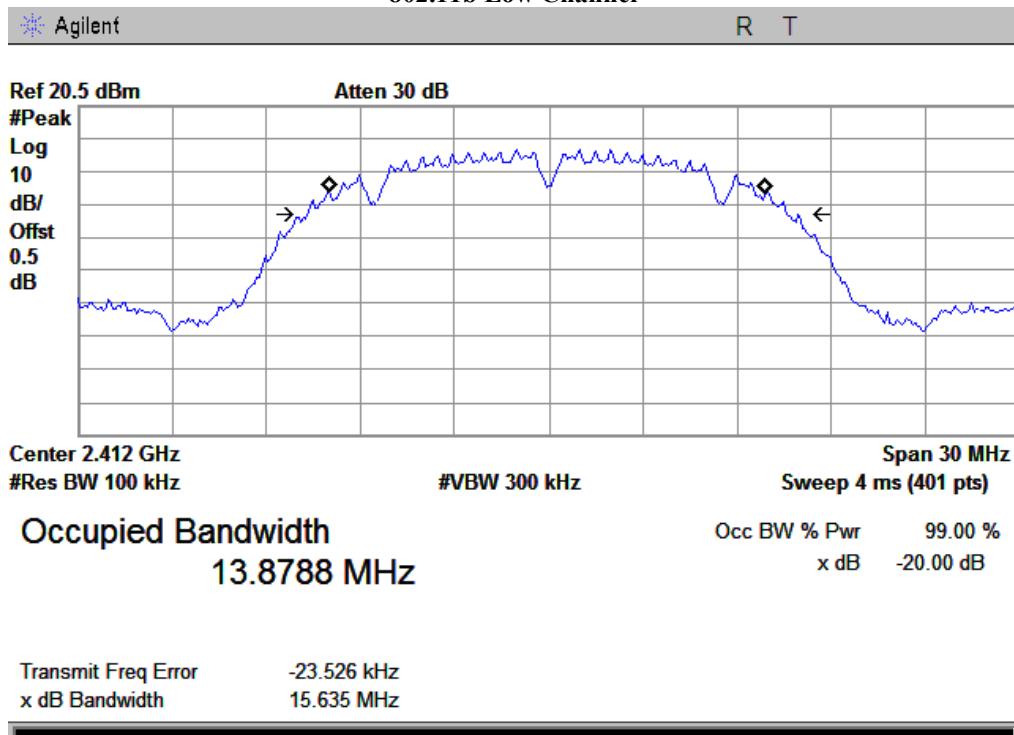802.11n40 High Channel**The 20dB bandwidth:****802.11b Low Channel**


802.11b Middle Channel

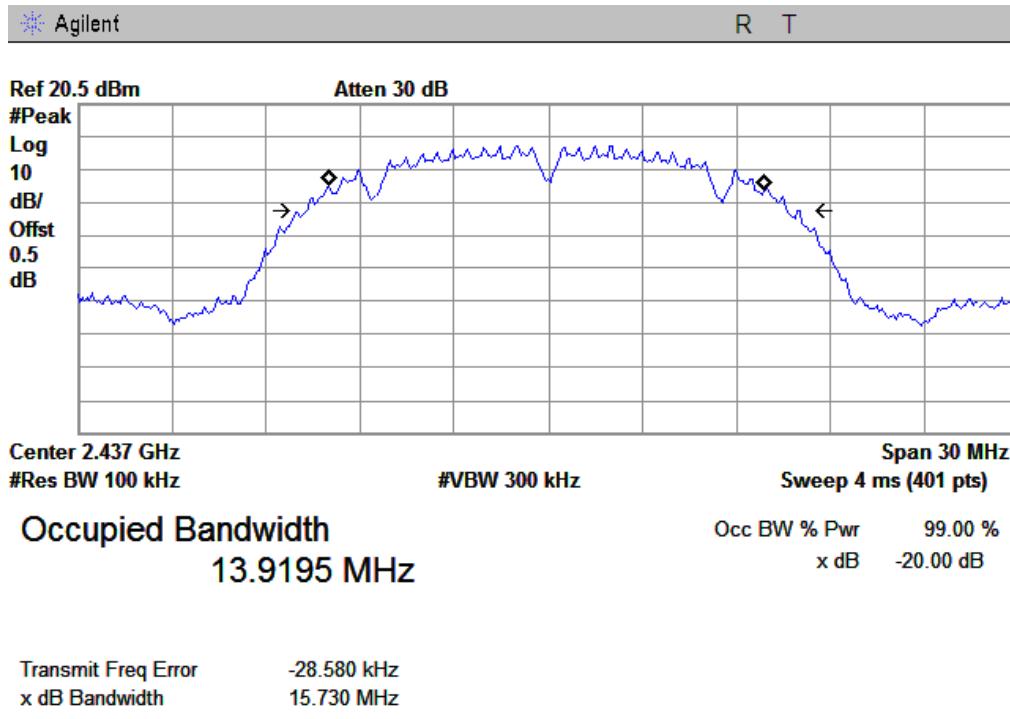


802.11b High Channel

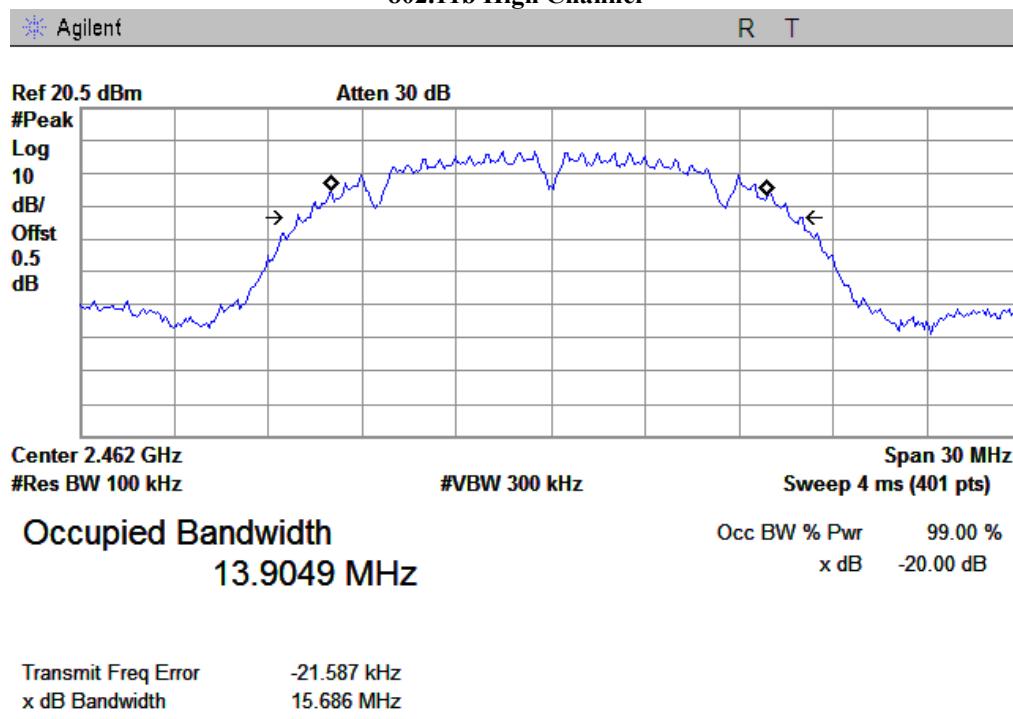

802.11g Low Channel

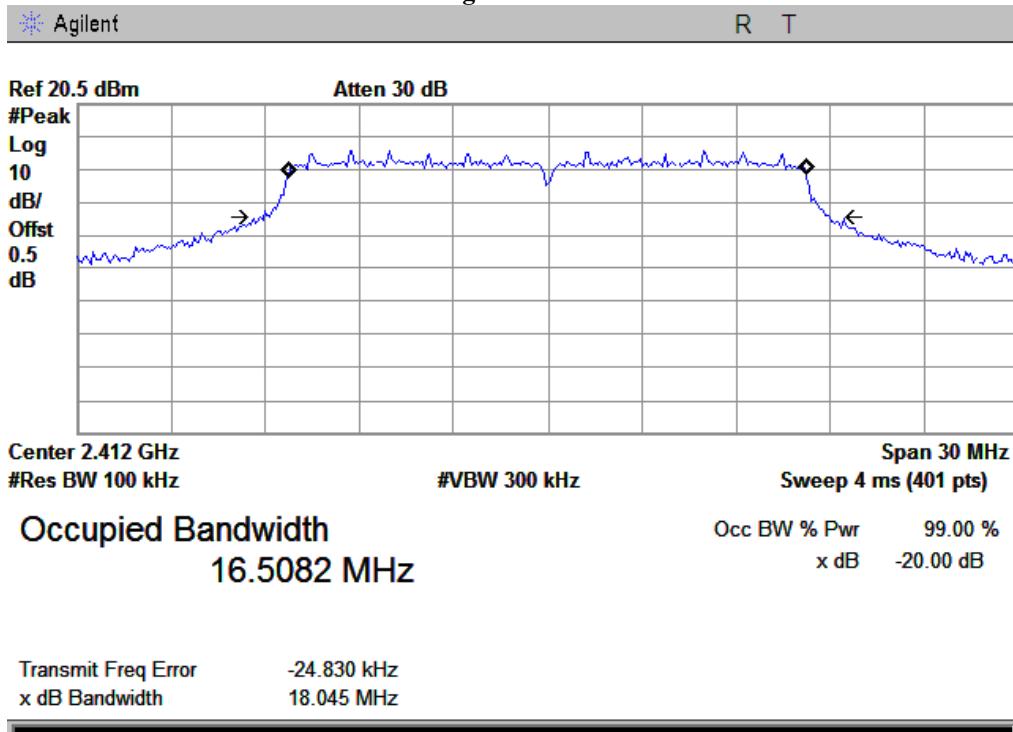


802.11g Middle Channel

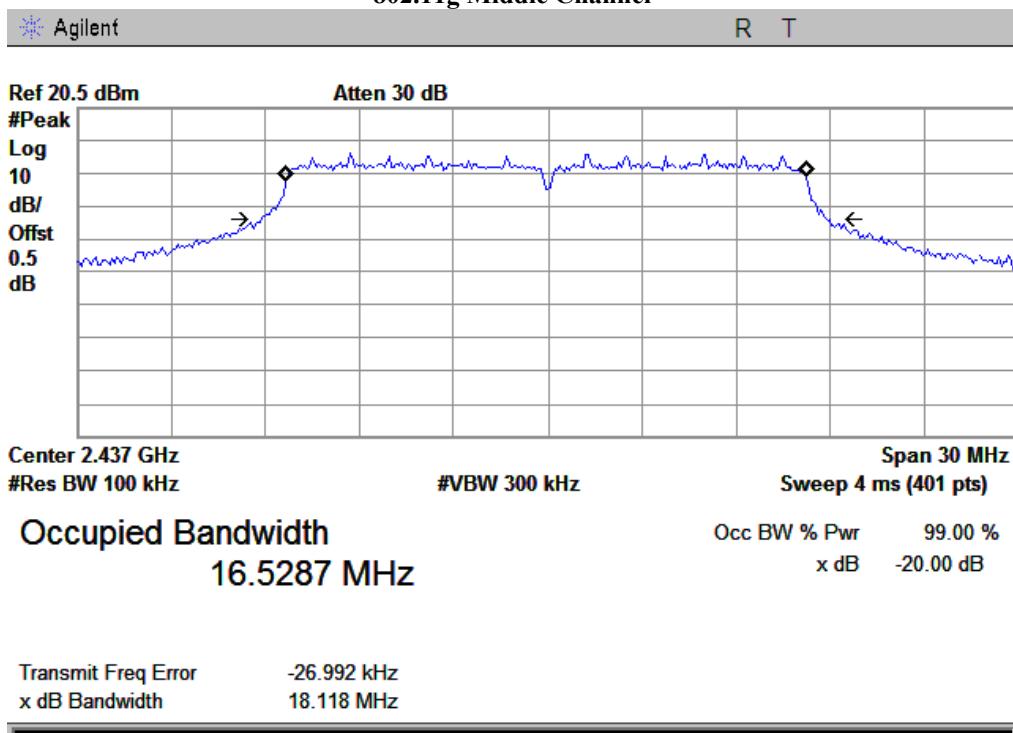

802.11g High Channel

Agilent


R T

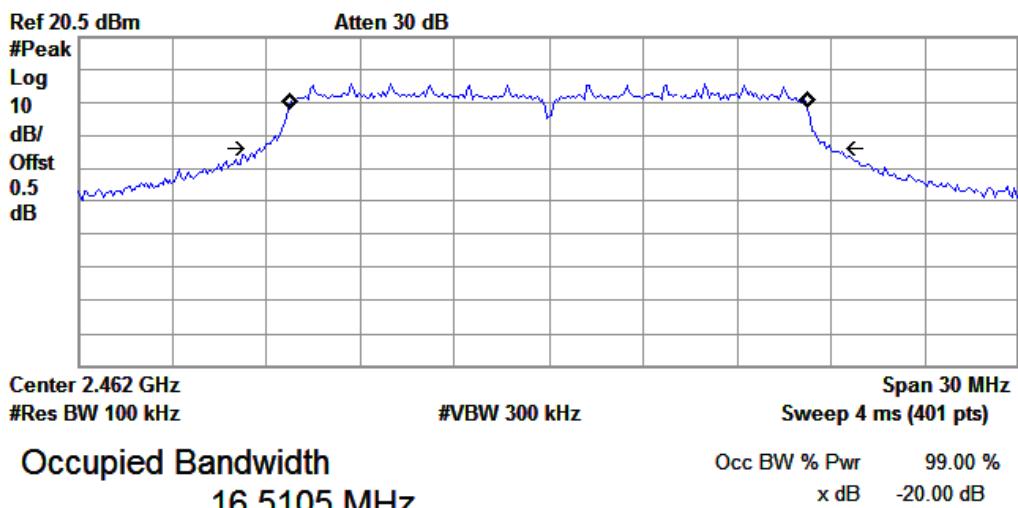

Transmit Freq Error -24.608 kHz
 x dB Bandwidth 18.118 MHz


Agilent

R T

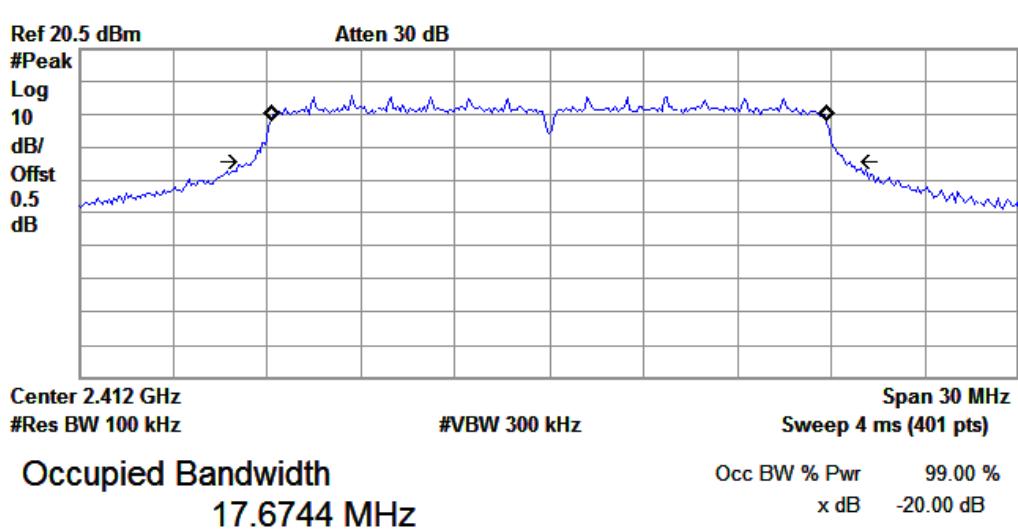


Transmit Freq Error -14.614 kHz
 x dB Bandwidth 18.886 MHz

802.11n20 Middle Channel

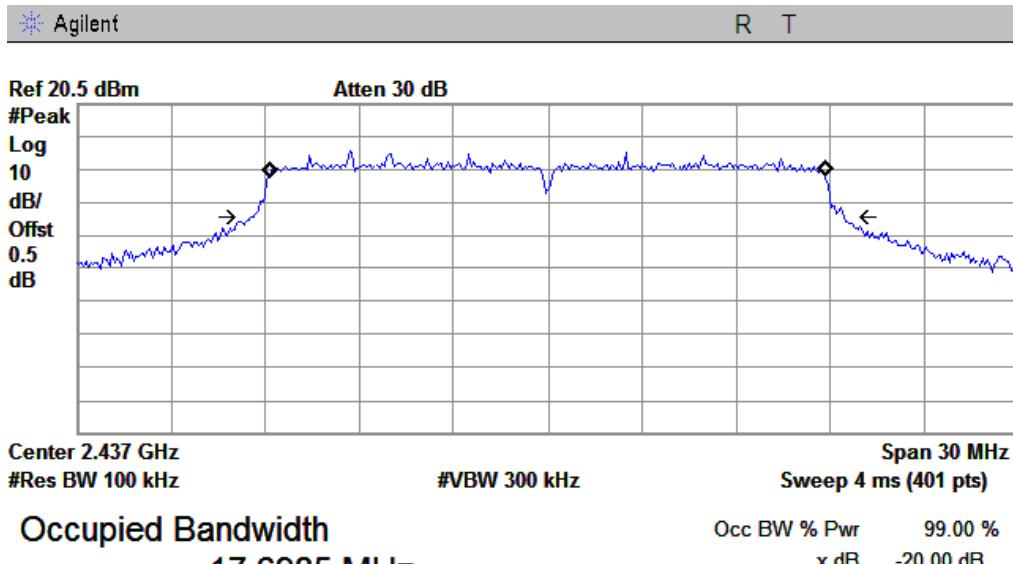

Transmit Freq Error -16.636 kHz
 x dB Bandwidth 18.909 MHz

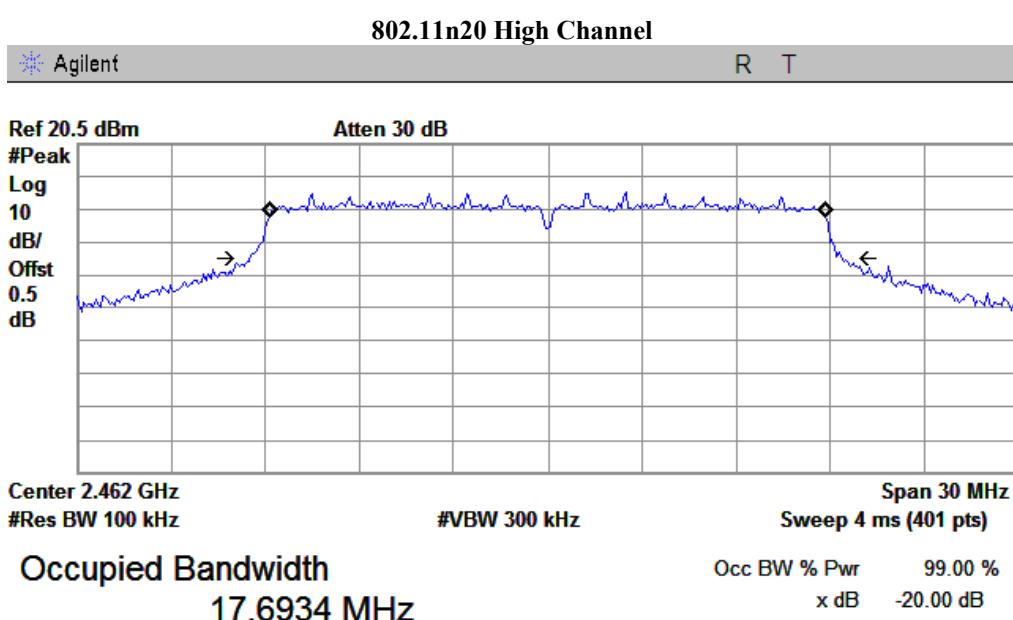


Transmit Freq Error -12.710 kHz
 x dB Bandwidth 18.921 MHz

802.11n40 Low Channel

Agilent


R T

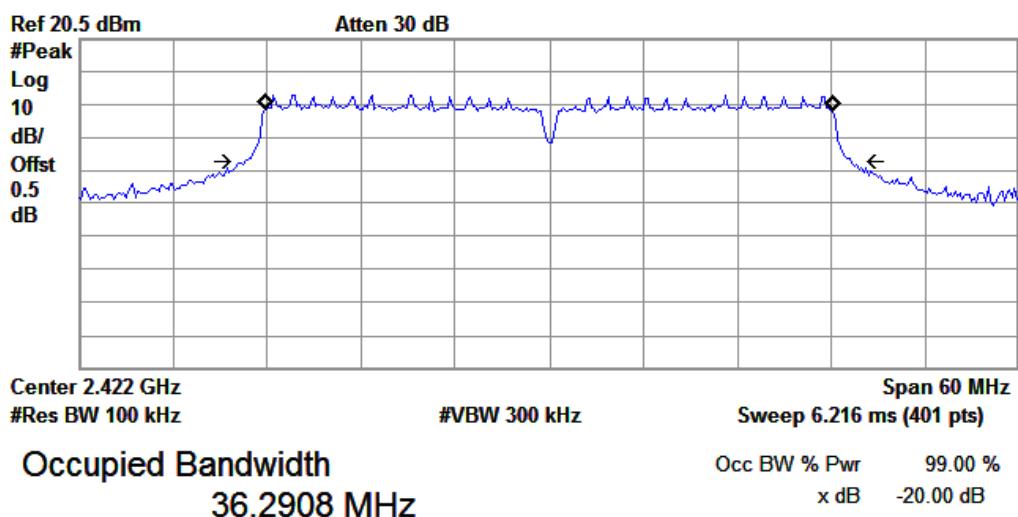

Transmit Freq Error -26.124 kHz
x dB Bandwidth 38.656 MHz


Agilent

R T

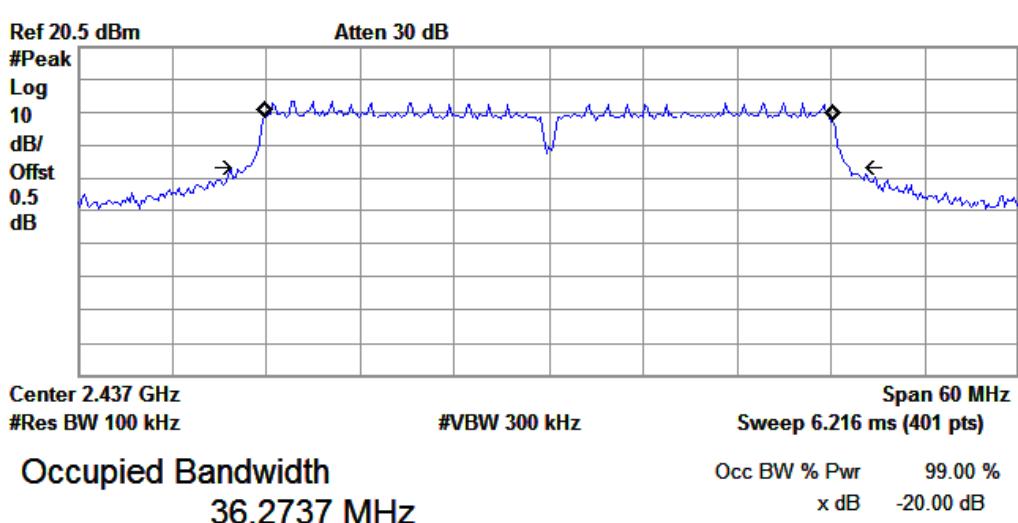

Transmit Freq Error -17.764 kHz
x dB Bandwidth 38.450 MHz

802.11n40 High Channel

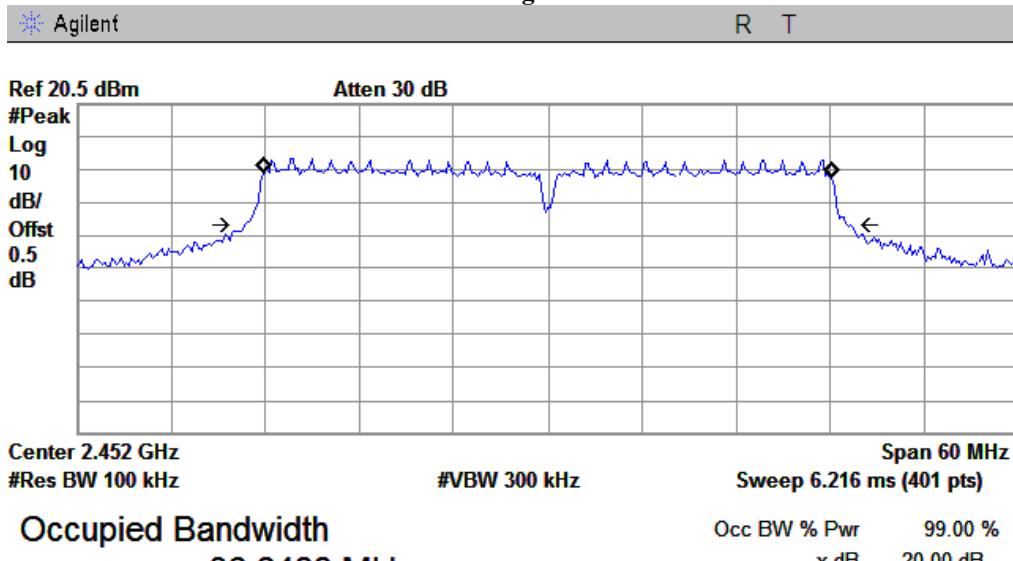


Transmit Freq Error -28.769 kHz
 x dB Bandwidth 38.384 MHz

RF Port CH1
 6dB bandwidth:


Channel	Channel Frequency (MHz)	Data Rate (Mbps)	Measured 6dB Bandwidth (MHz)	FCC Part 15.247 Limit (kHz)
802.11b mode				
Low	2412	1	10.145	>500
Middle	2437	1	10.148	>500
High	2462	1	10.120	>500
802.11g mode				
Low	2412	6	16.386	>500
Middle	2437	6	16.397	>500
High	2462	6	16.370	>500
802.11n(20M) mode				
Low	2412	MCS0	17.607	>500
Middle	2437	MCS0	17.586	>500
High	2462	MCS0	17.595	>500
802.11n(40M) mode				
Low	2422	MCS0	36.481	>500
Middle	2437	MCS0	36.432	>500
High	2452	MCS0	36.407	>500

802.11b Low Channel

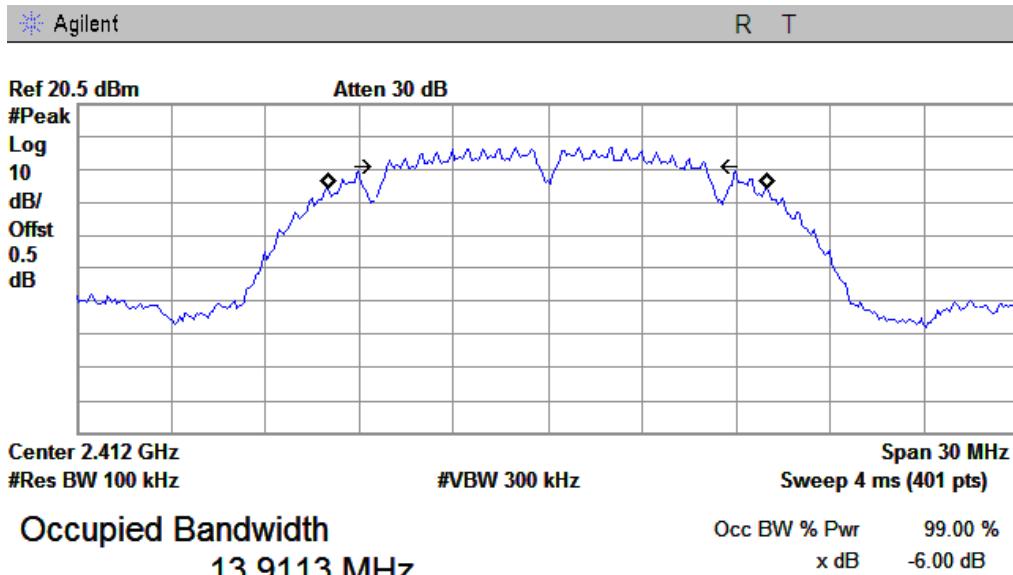


Transmit Freq Error -17.151 kHz
x dB Bandwidth 10.145 MHz

802.11b Middle Channel

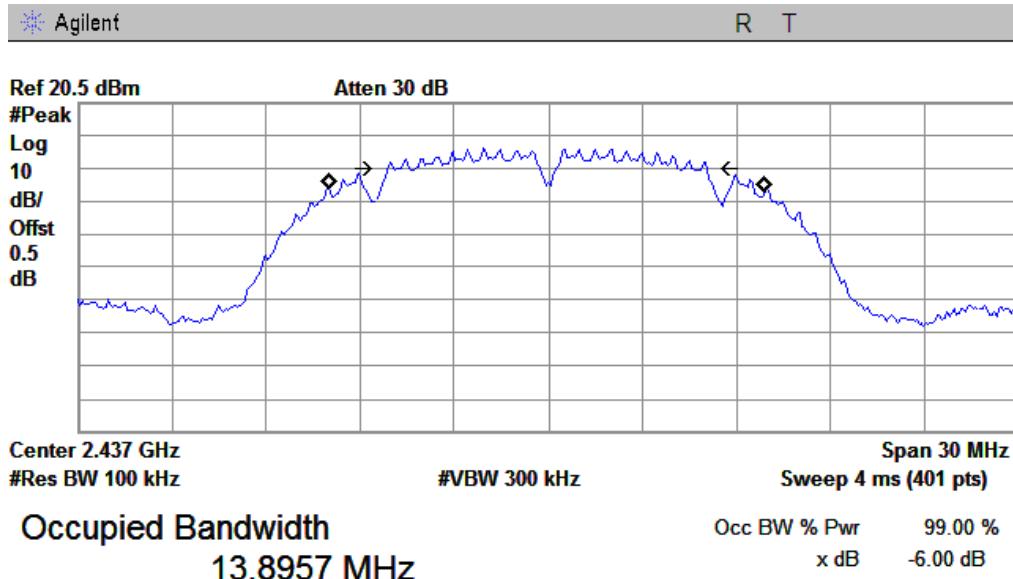


Transmit Freq Error -15.833 kHz
x dB Bandwidth 10.148 MHz

802.11b High Channel

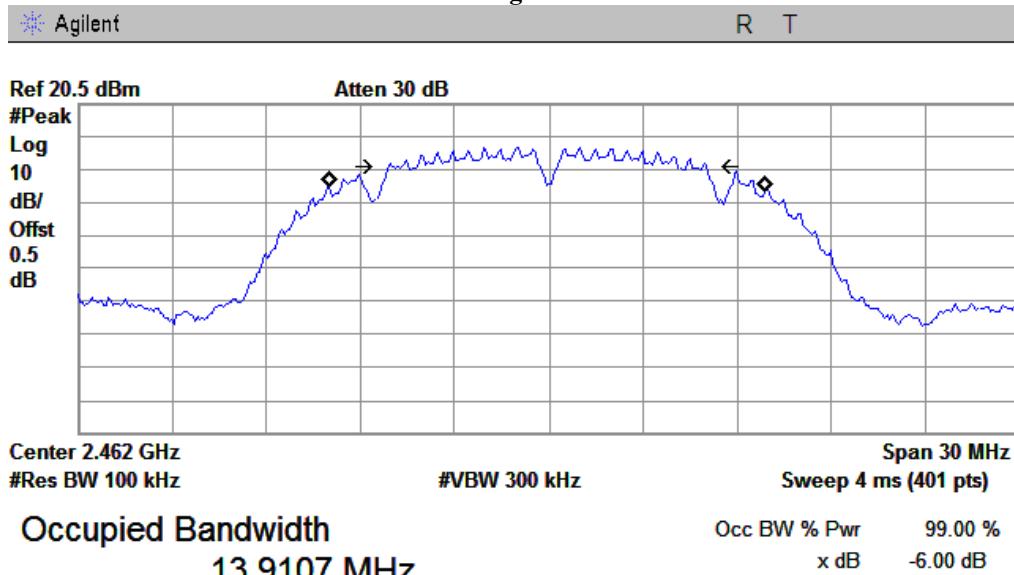


Transmit Freq Error -39.365 kHz
x dB Bandwidth 10.120 MHz

802.11g Low Channel

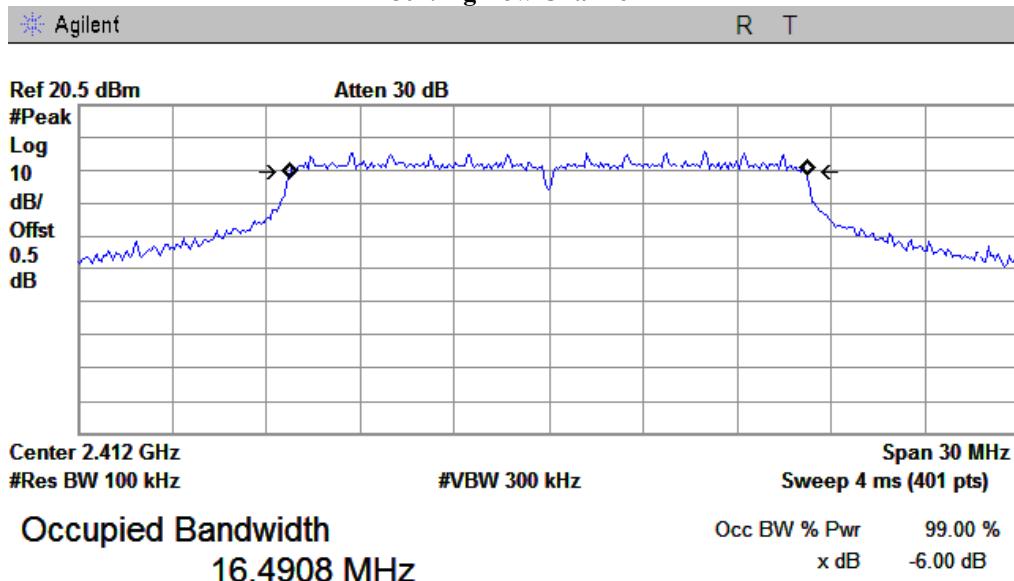


Transmit Freq Error -25.429 kHz
x dB Bandwidth 16.386 MHz

802.11g Middle Channel

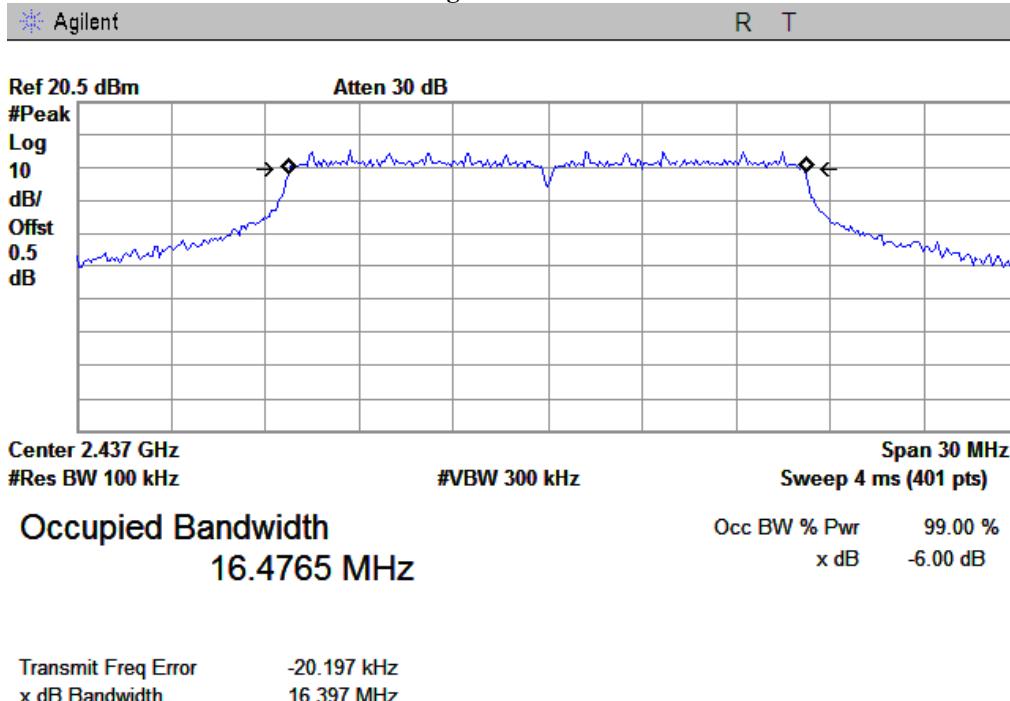


802.11g High Channel

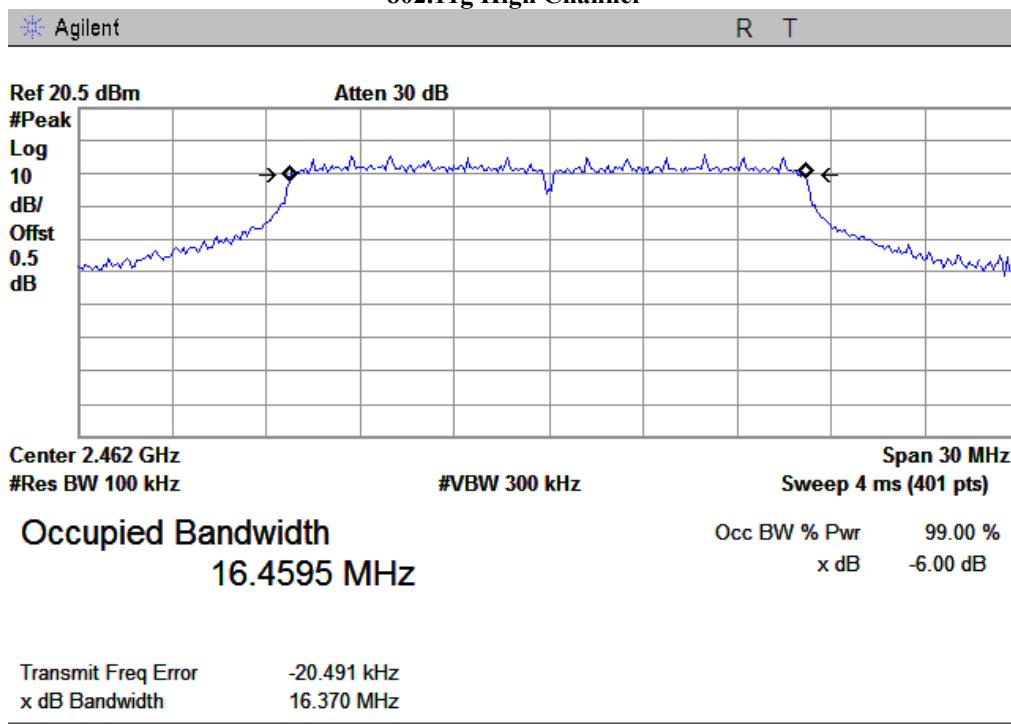

802.11n20 Low Channel

Agilent

R T

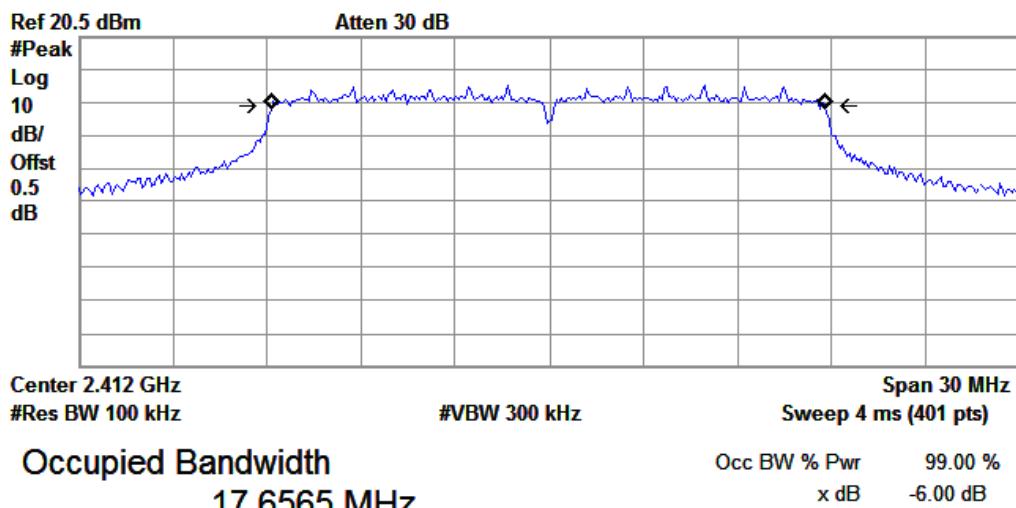


Transmit Freq Error -19.409 kHz
 x dB Bandwidth 17.607 MHz

802.11n20 Middle Channel


Agilent

R T

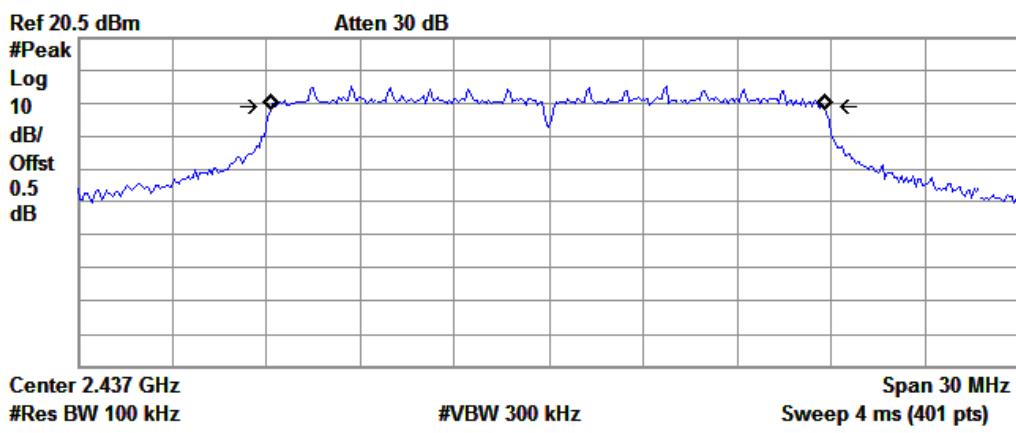


Transmit Freq Error -16.704 kHz
 x dB Bandwidth 17.586 MHz


802.11n20 High Channel

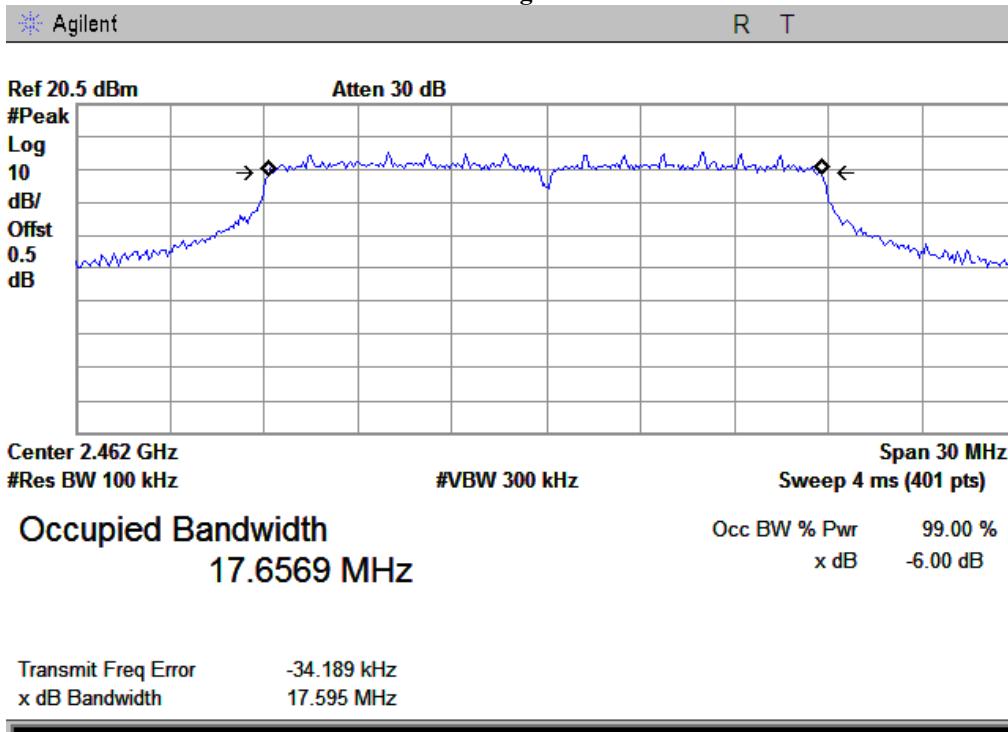

802.11n40 Low Channel

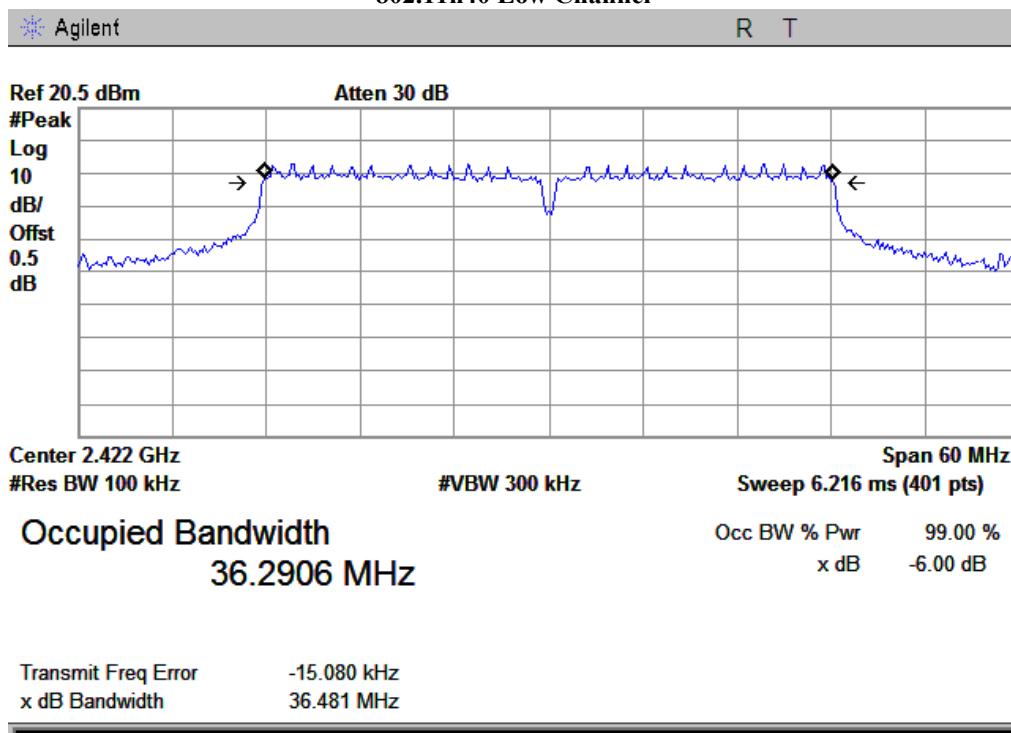


802.11n40 Middle Channel

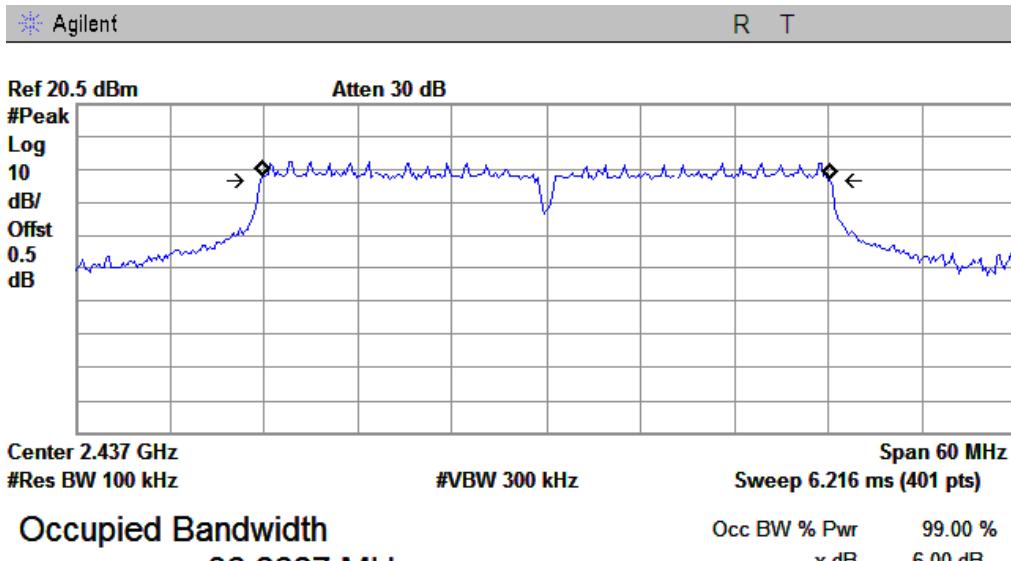

Transmit Freq Error -20.272 kHz
 x dB Bandwidth 36.432 MHz

802.11n40 High Channel

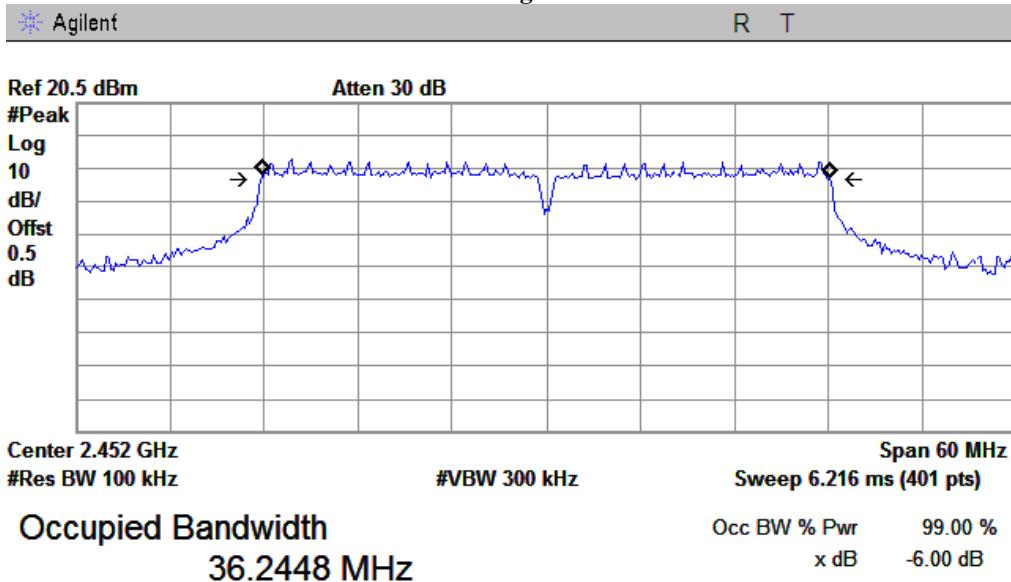



Transmit Freq Error -23.167 kHz
 x dB Bandwidth 36.407 MHz

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 33 of 224
www.siemic.com.cn

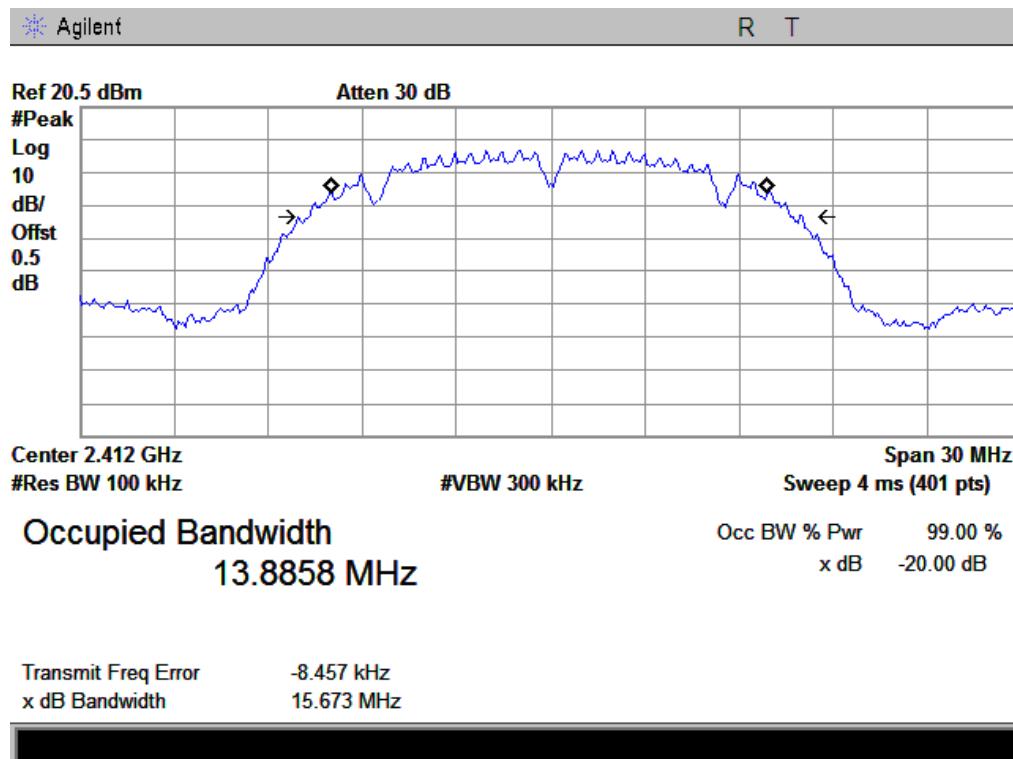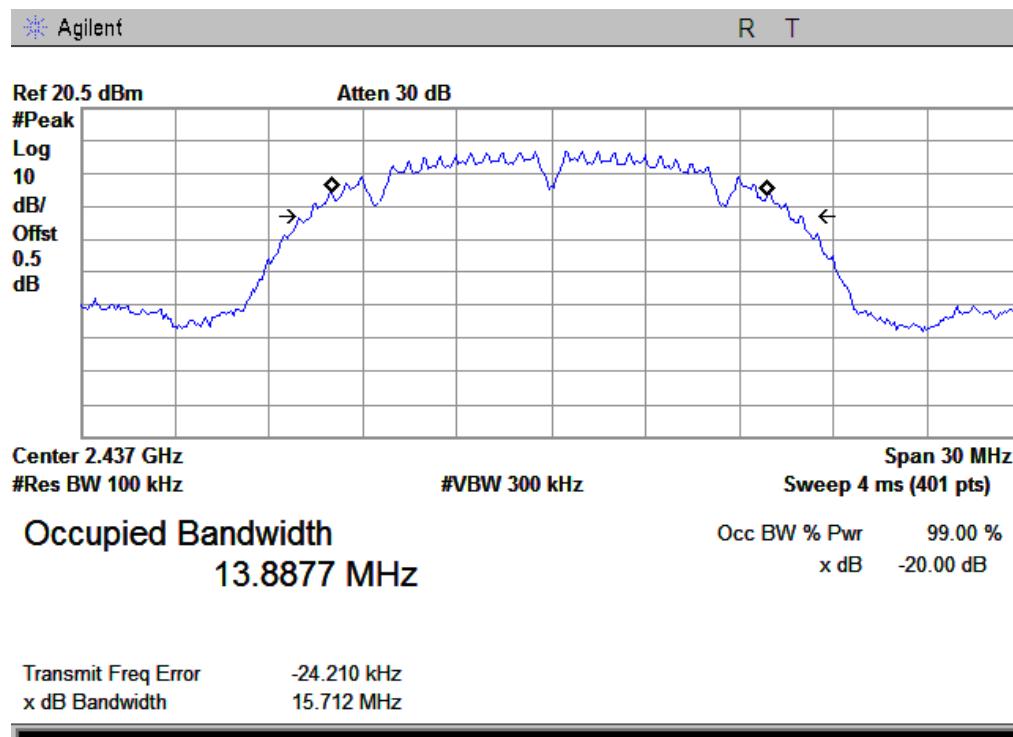
The 20dB bandwidth:**802.11b Low Channel****802.11b Middle Channel**

802.11b High Channel

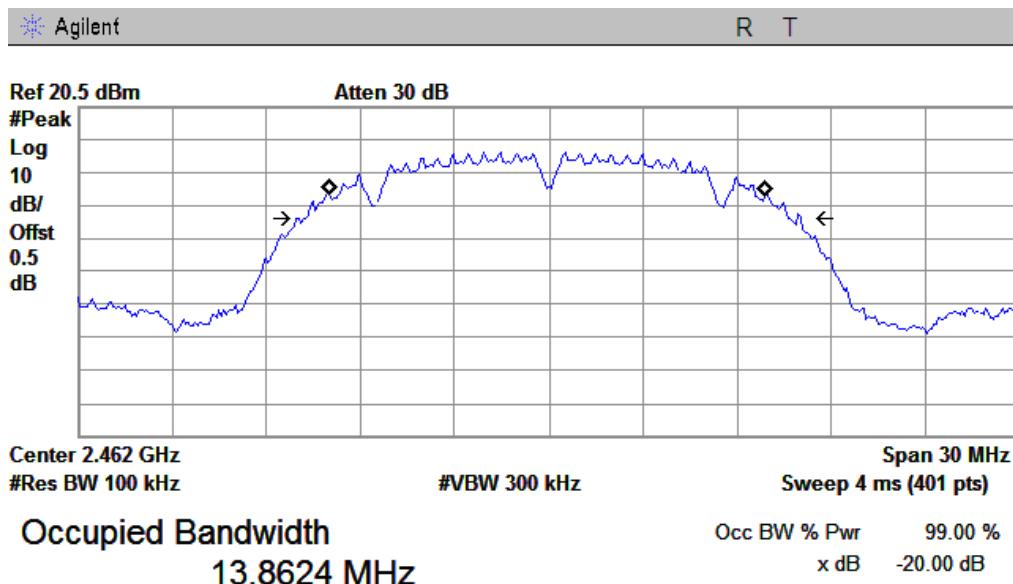


Transmit Freq Error -39.841 kHz
 x dB Bandwidth 15.741 MHz

802.11g Low Channel

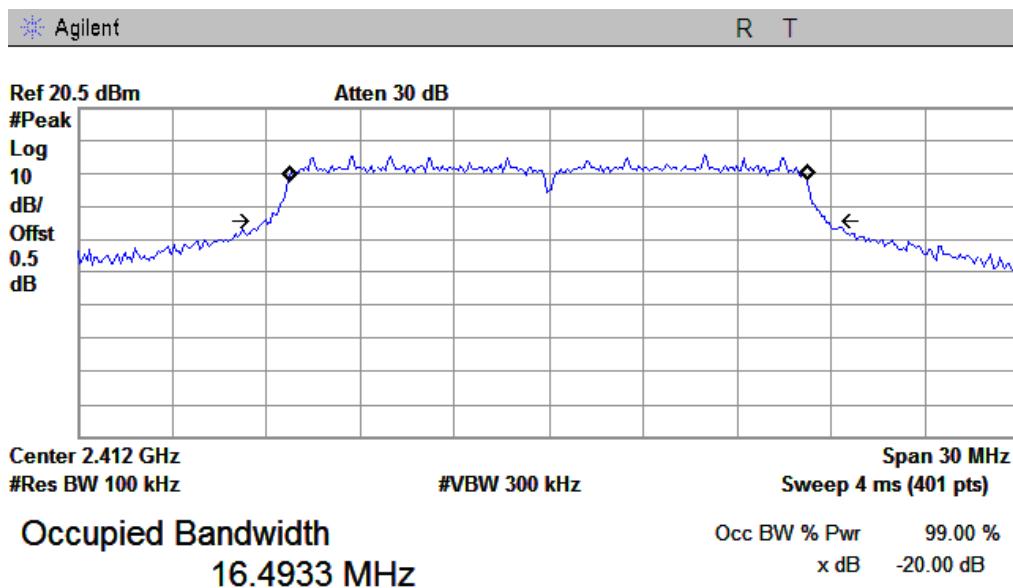


Transmit Freq Error -27.064 kHz
 x dB Bandwidth 17.890 MHz

802.11g Middle Channel

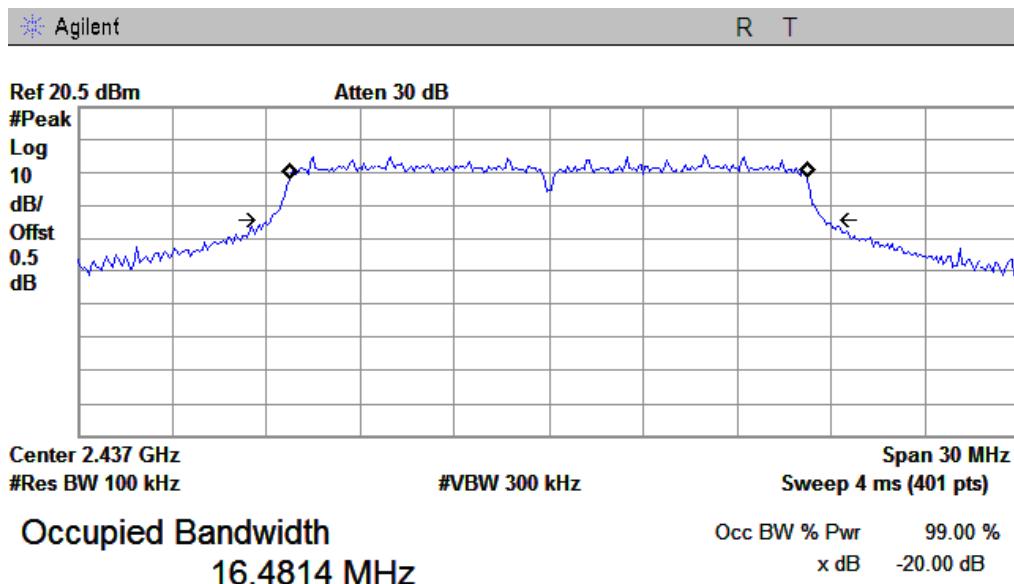

Transmit Freq Error -17.860 kHz
 x dB Bandwidth 17.637 MHz

802.11g High Channel

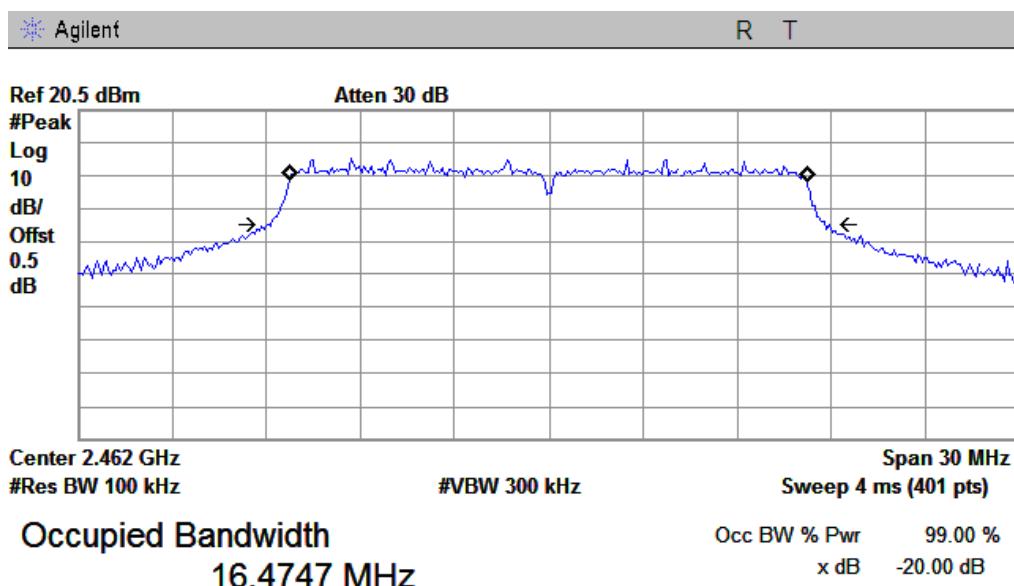

Transmit Freq Error -22.356 kHz
 x dB Bandwidth 17.626 MHz


**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 36 of 224
www.siemic.com.cn

802.11n20 Low Channel

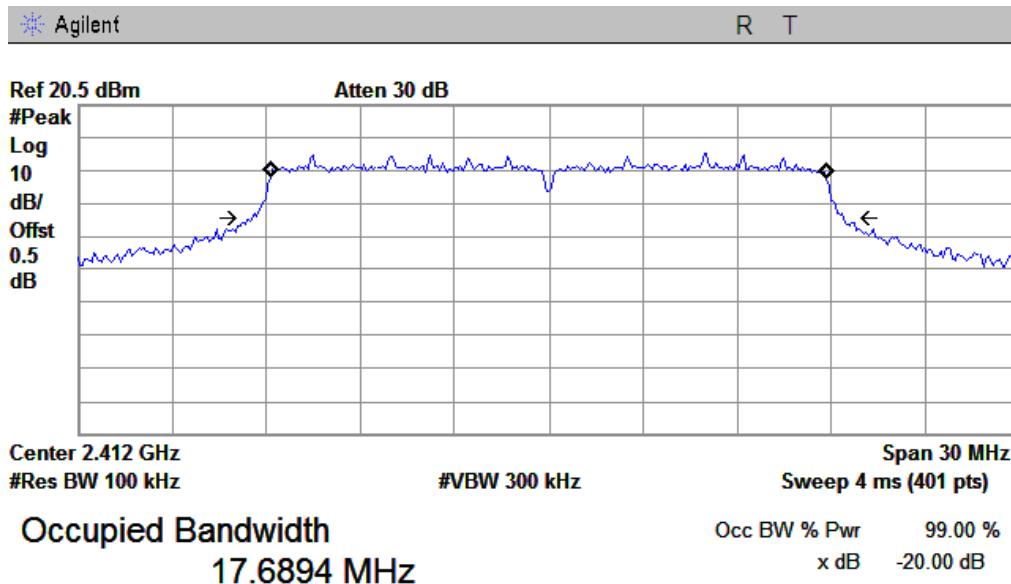


Transmit Freq Error -6.856 kHz
x dB Bandwidth 18.867 MHz

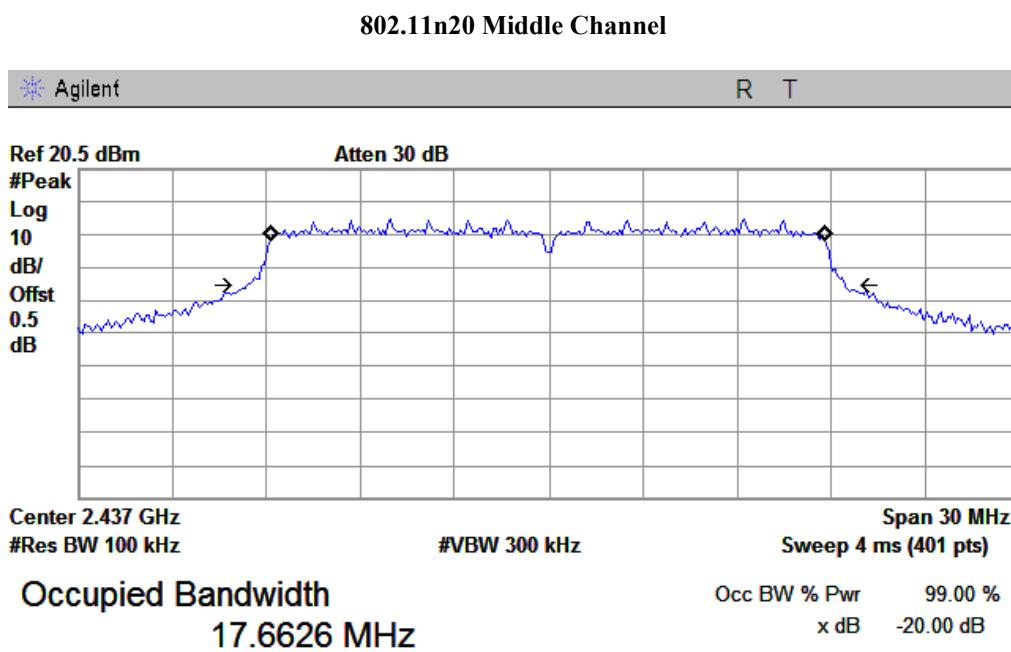


Transmit Freq Error -28.014 kHz
x dB Bandwidth 19.032 MHz

802.11n20 High Channel

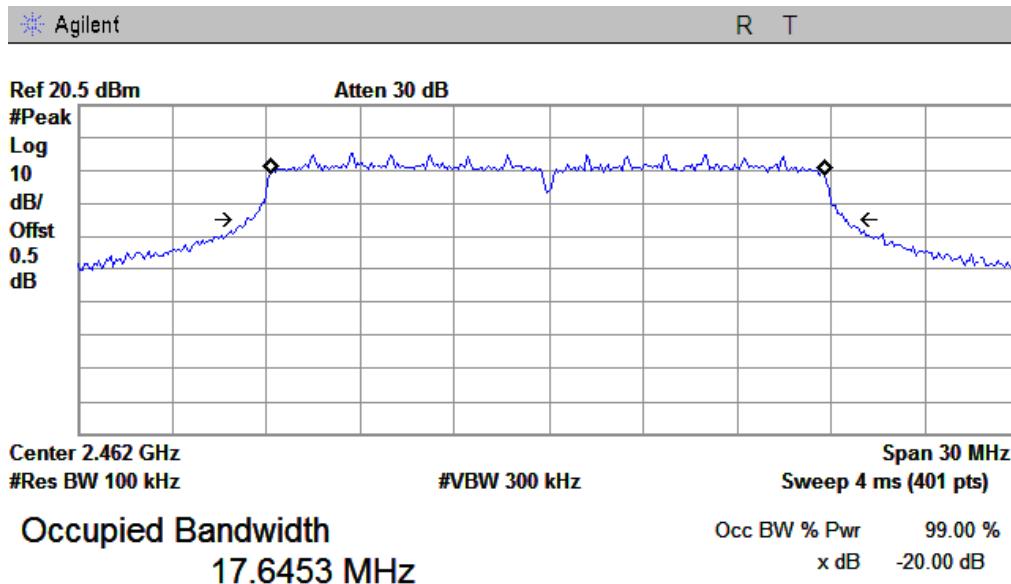


Transmit Freq Error -31.099 kHz
 x dB Bandwidth 19.054 MHz

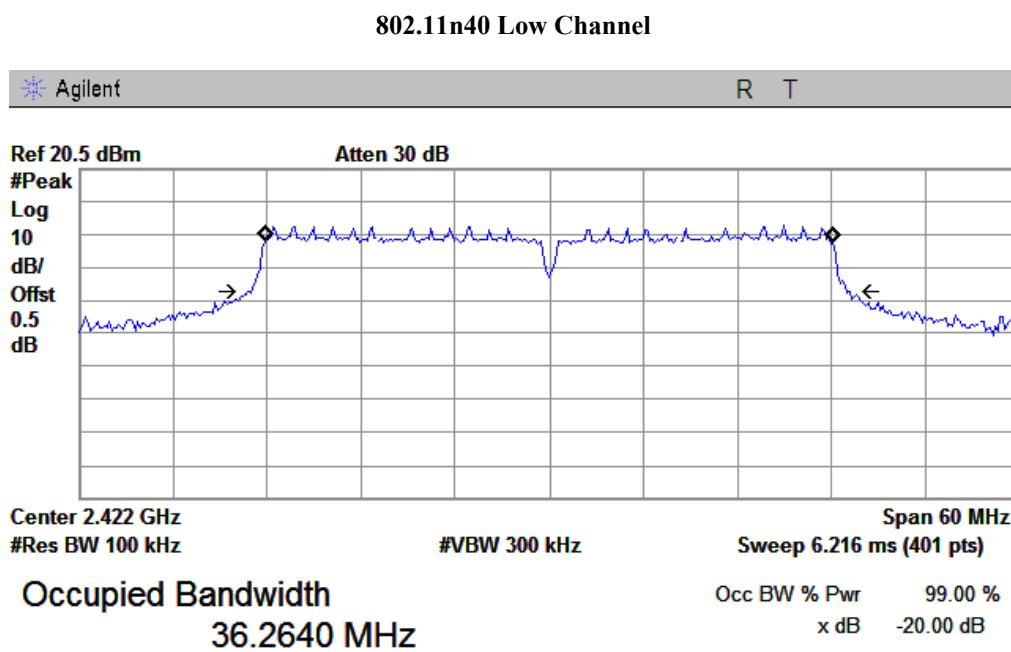


Transmit Freq Error -21.642 kHz
 x dB Bandwidth 38.017 MHz

802.11n40 Middle Channel

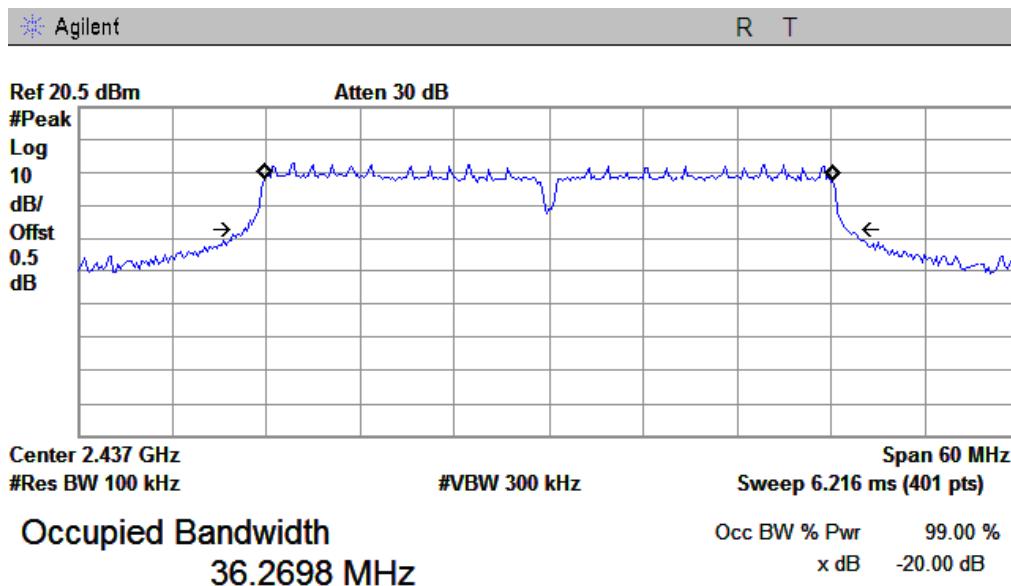

Transmit Freq Error -19.441 kHz
 x dB Bandwidth 38.445 MHz

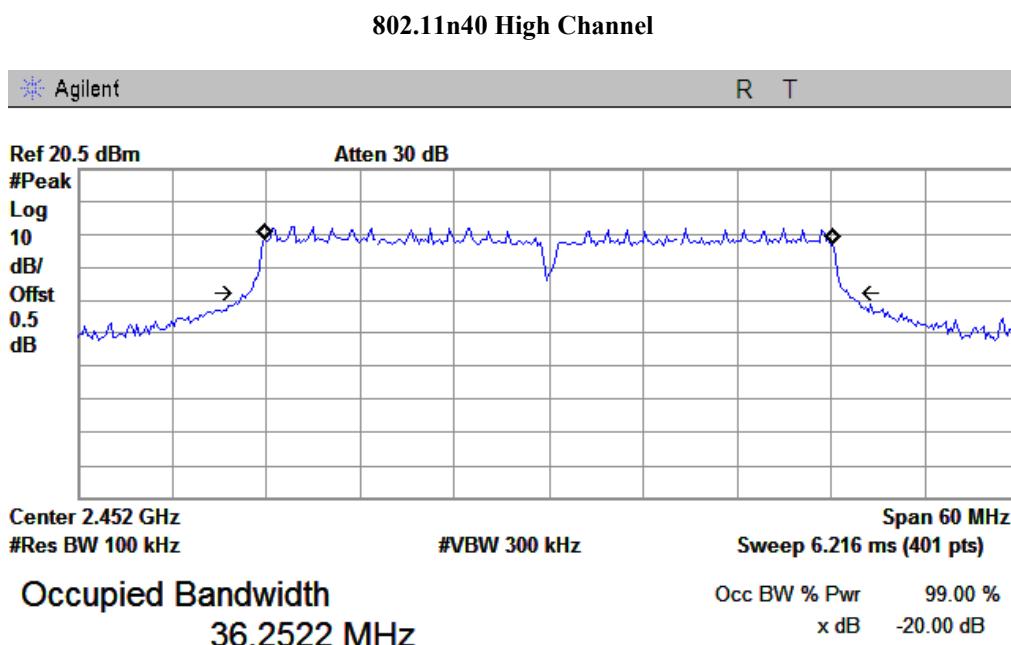

Transmit Freq Error -30.549 kHz
 x dB Bandwidth 38.246 MHz

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 39 of 224
www.siemic.com.cn

RF Port CH2**6dB bandwidth:**


Channel	Channel Frequency (MHz)	Data Rate (Mbps)	Measured 6dB Bandwidth (MHz)	FCC Part 15.247 Limit (kHz)
802.11b mode				
Low	2412	1	10.134	>500
Middle	2437	1	10.141	>500
High	2462	1	10.159	>500
802.11g mode				
Low	2412	6	16.378	>500
Middle	2437	6	16.385	>500
High	2462	6	16.417	>500
802.11n(20M) mode				
Low	2412	MCS0	17.346	>500
Middle	2437	MCS0	17.604	>500
High	2462	MCS0	17.596	>500
802.11n(40M) mode				
Low	2422	MCS0	36.377	>500
Middle	2437	MCS0	36.449	>500
High	2452	MCS0	36.409	>500

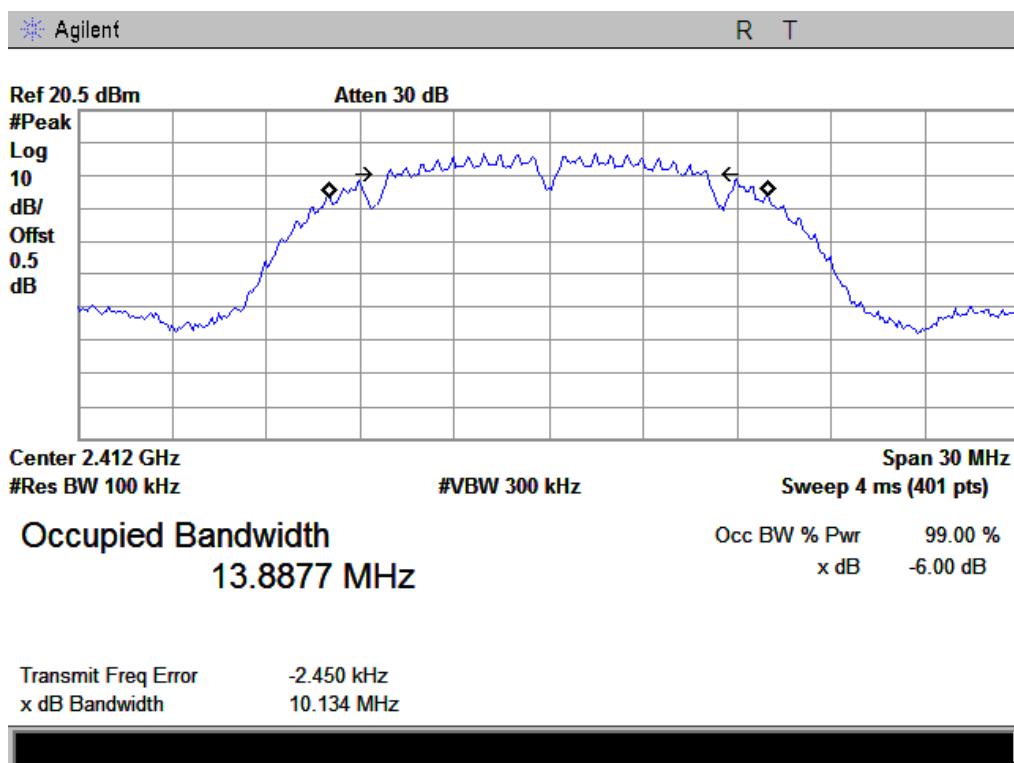802.11b Low Channel

802.11b Middle Channel

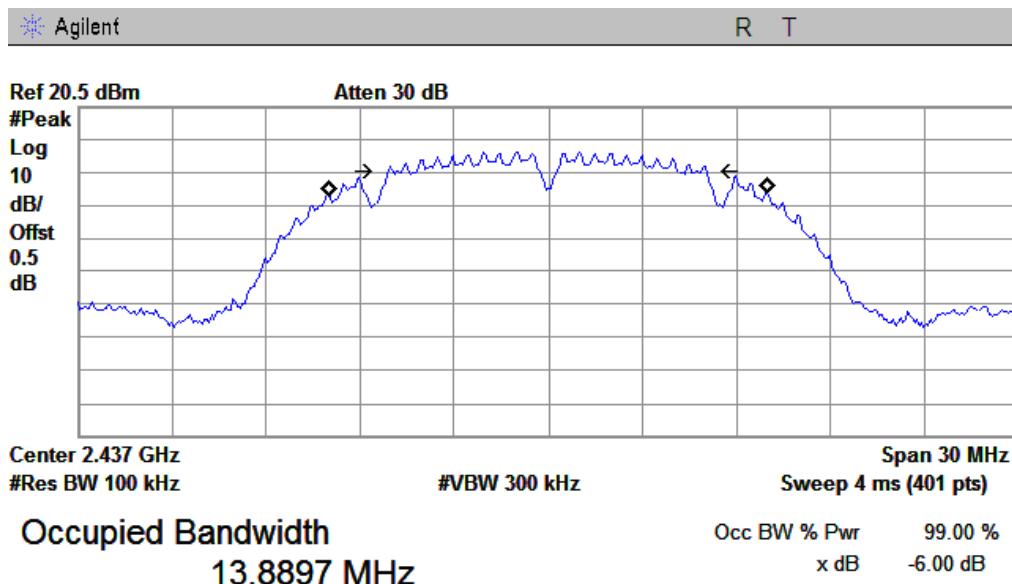


Transmit Freq Error 300.206 Hz
 x dB Bandwidth 10.141 MHz

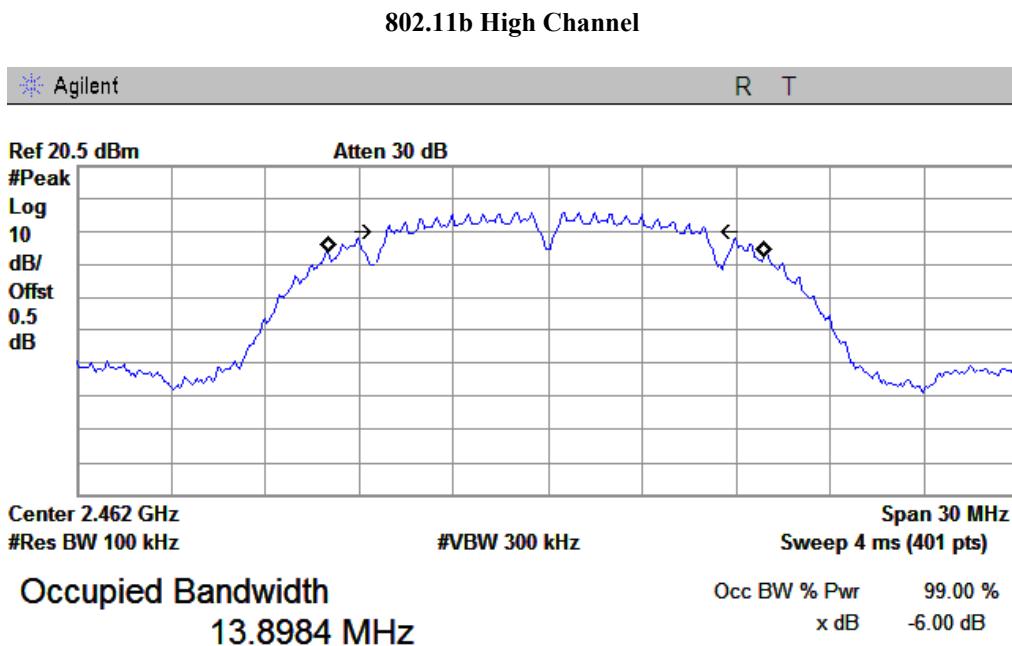


Transmit Freq Error -32.149 kHz
 x dB Bandwidth 10.159 MHz

802.11g Low Channel

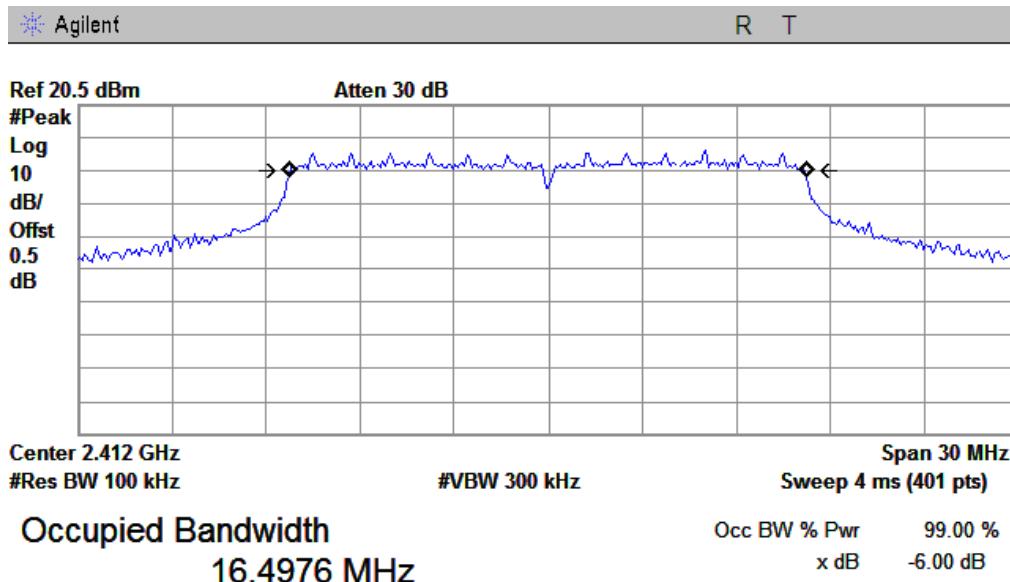


Transmit Freq Error -5.229 kHz
x dB Bandwidth 16.378 MHz

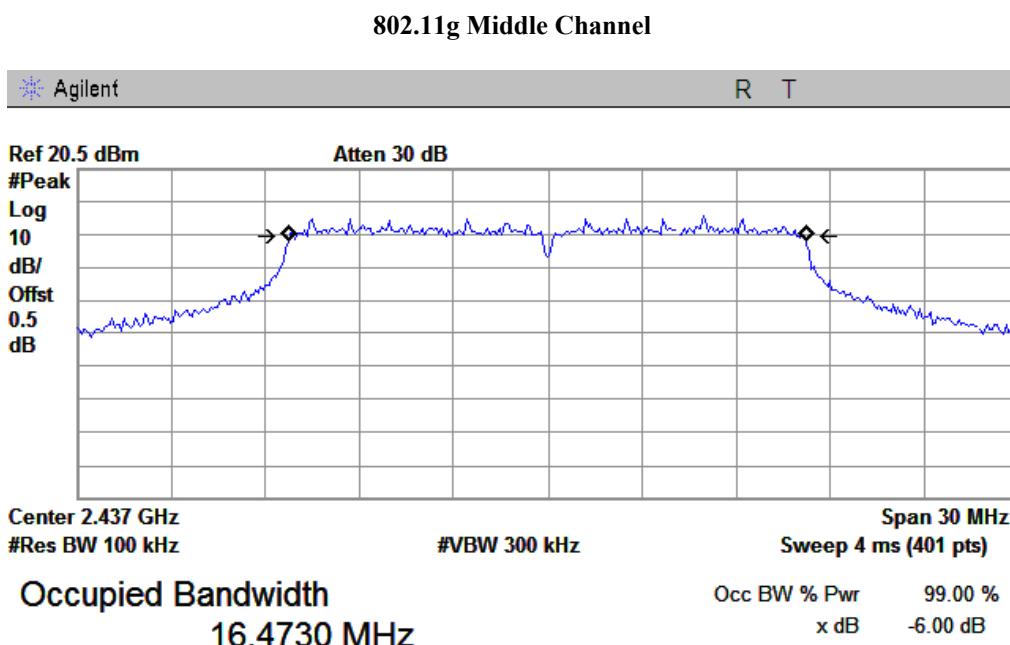


Transmit Freq Error -8.738 kHz
x dB Bandwidth 16.385 MHz

802.11g High Channel

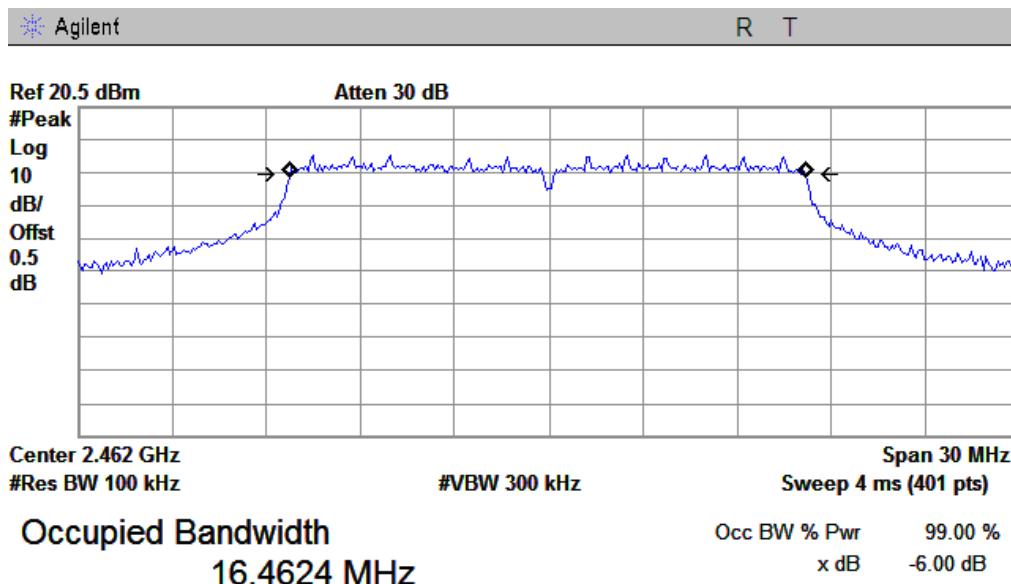


Transmit Freq Error -22.864 kHz
 x dB Bandwidth 16.417 MHz

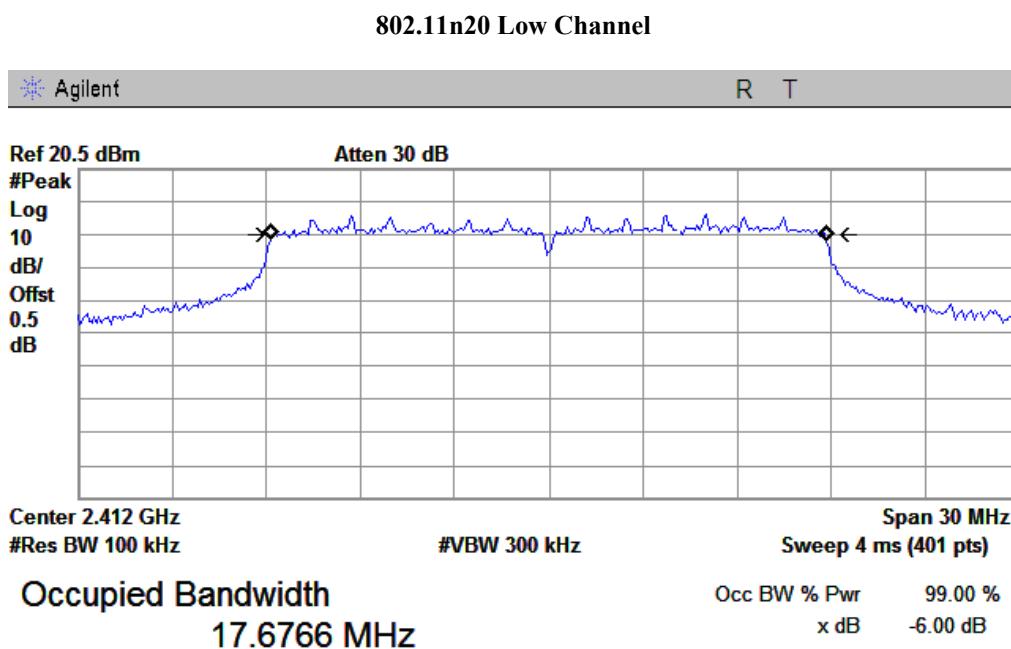


Transmit Freq Error -126.852 Hz
 x dB Bandwidth 17.346 MHz

802.11n20 Middle Channel

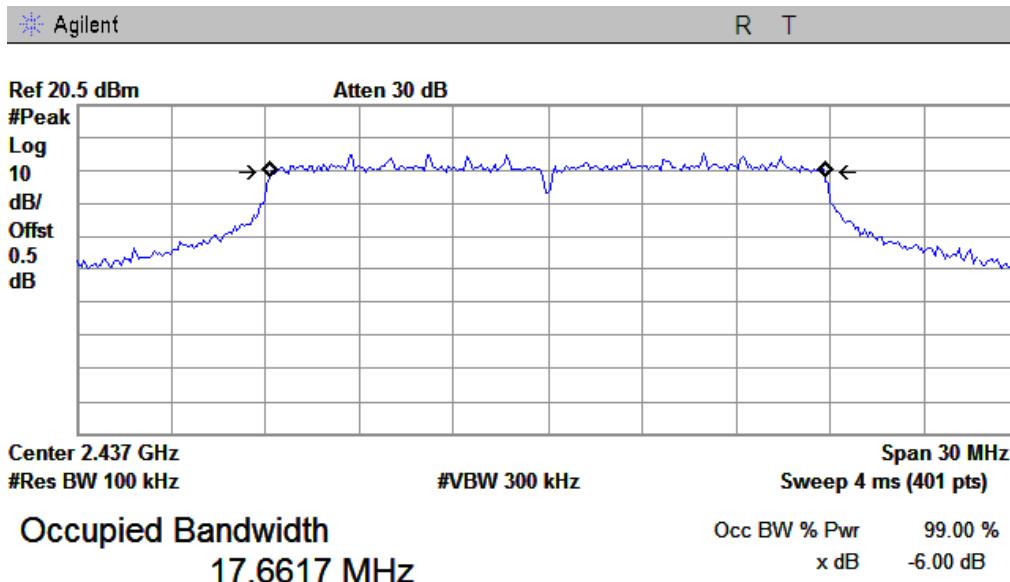

Transmit Freq Error -3.882 kHz
x dB Bandwidth 17.604 MHz

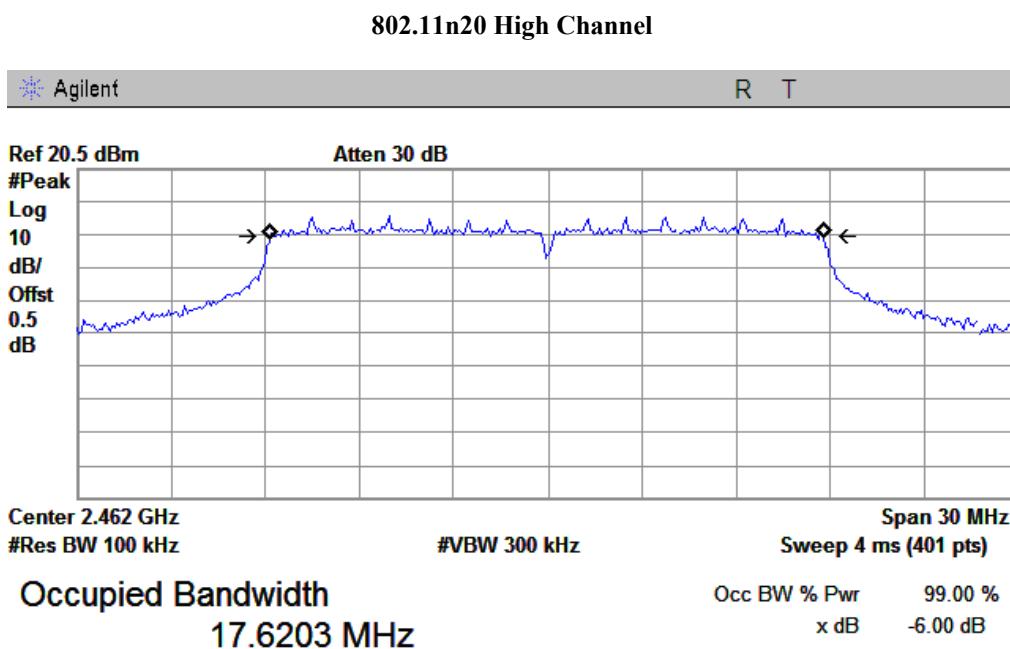


Transmit Freq Error -19.786 kHz
x dB Bandwidth 17.596 MHz

802.11n40 Low Channel

Agilent

R T

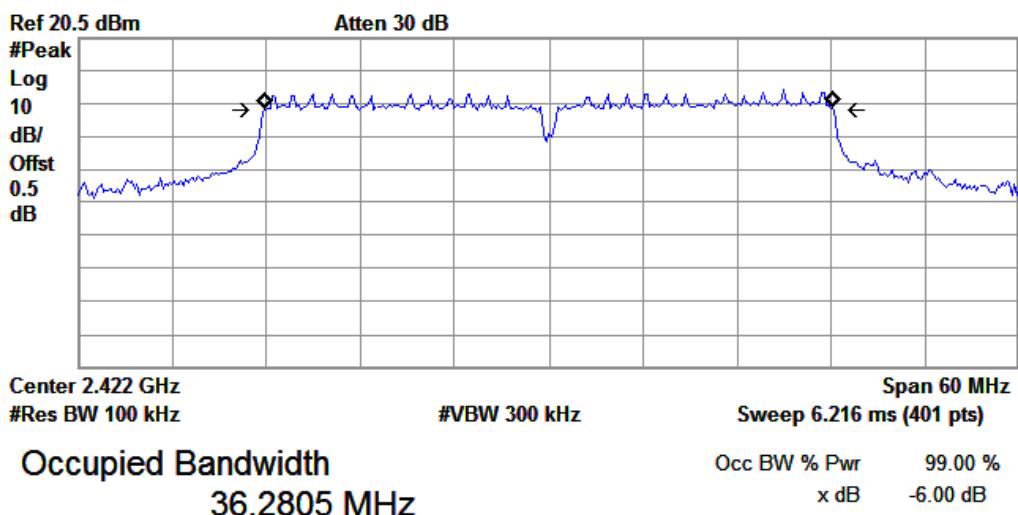


Transmit Freq Error 17.898 kHz
x dB Bandwidth 36.377 MHz

802.11n40 Middle Channel


Agilent

R T

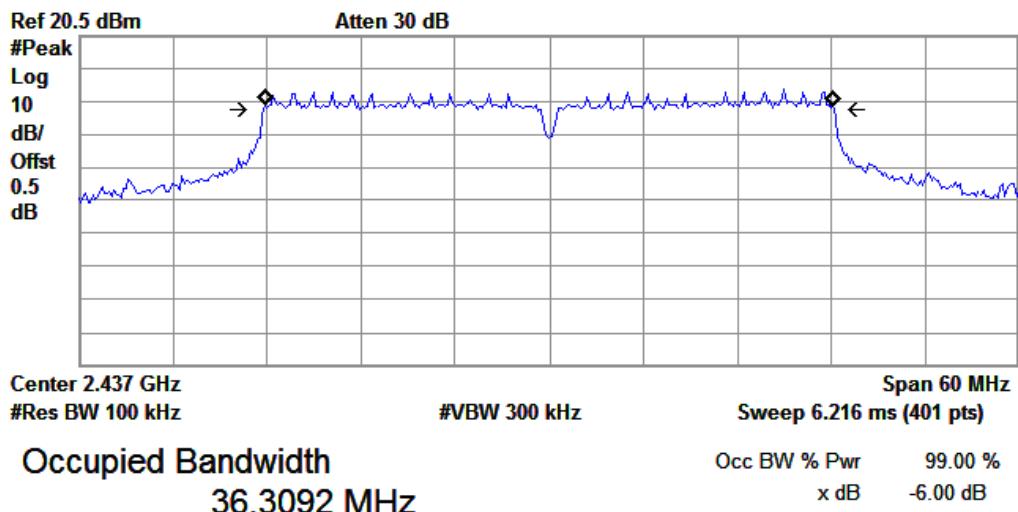


Transmit Freq Error 359.615 Hz
x dB Bandwidth 36.449 MHz

802.11n40 High Channel

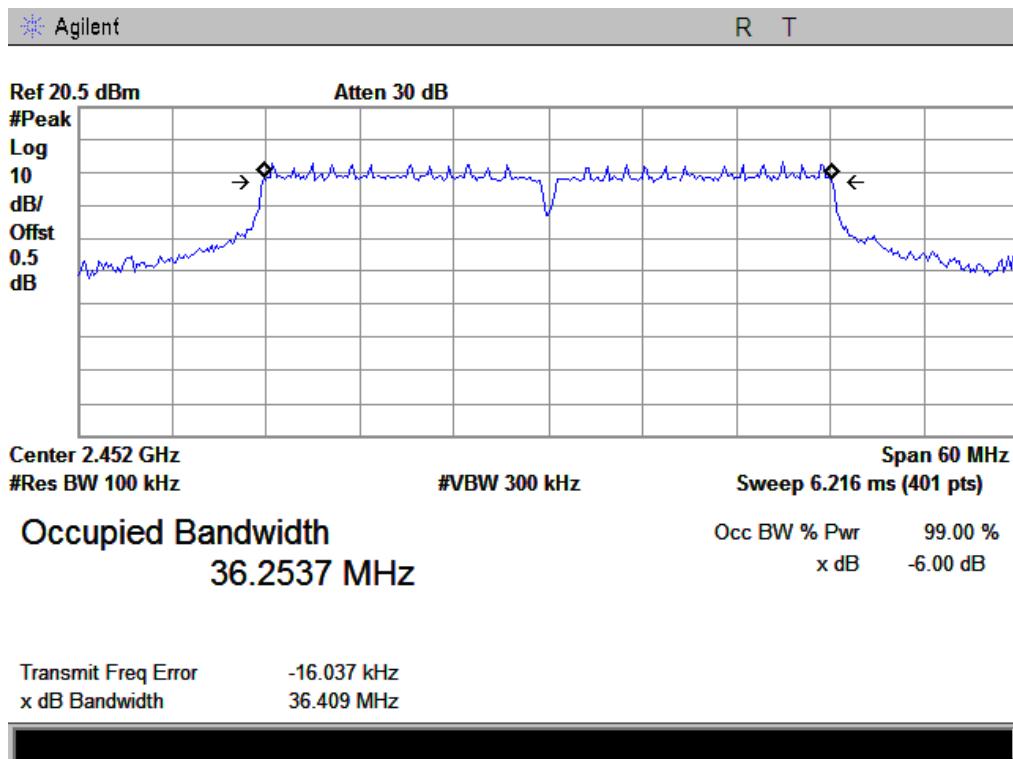


The 20dB bandwidth:

802.11b Low Channel

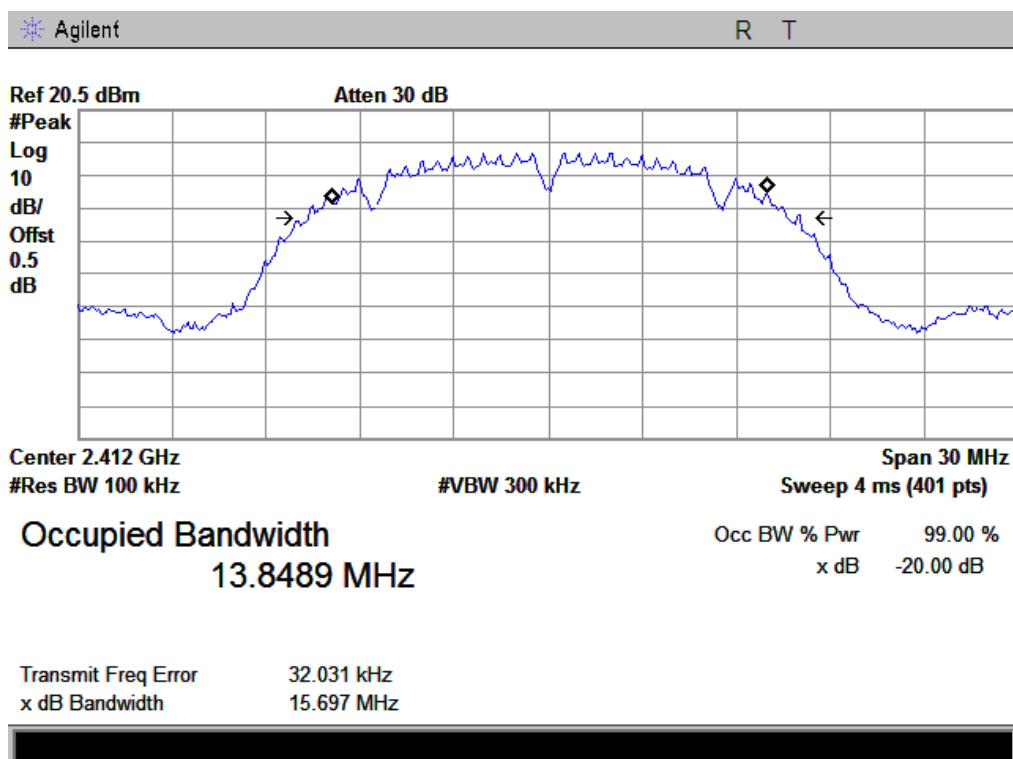


802.11b Middle Channel

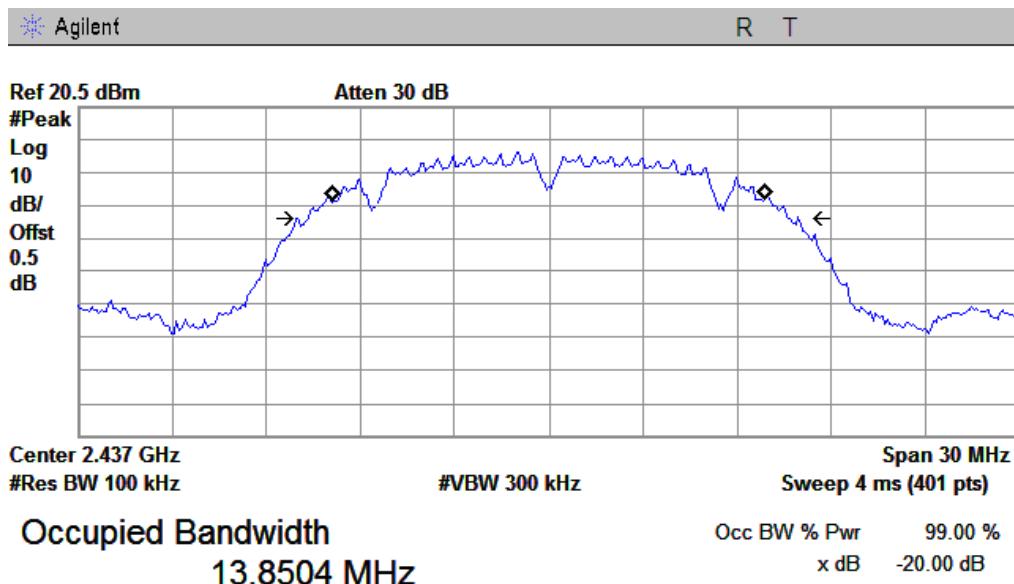


Transmit Freq Error -2.137 kHz
 x dB Bandwidth 15.627 MHz

802.11b High Channel

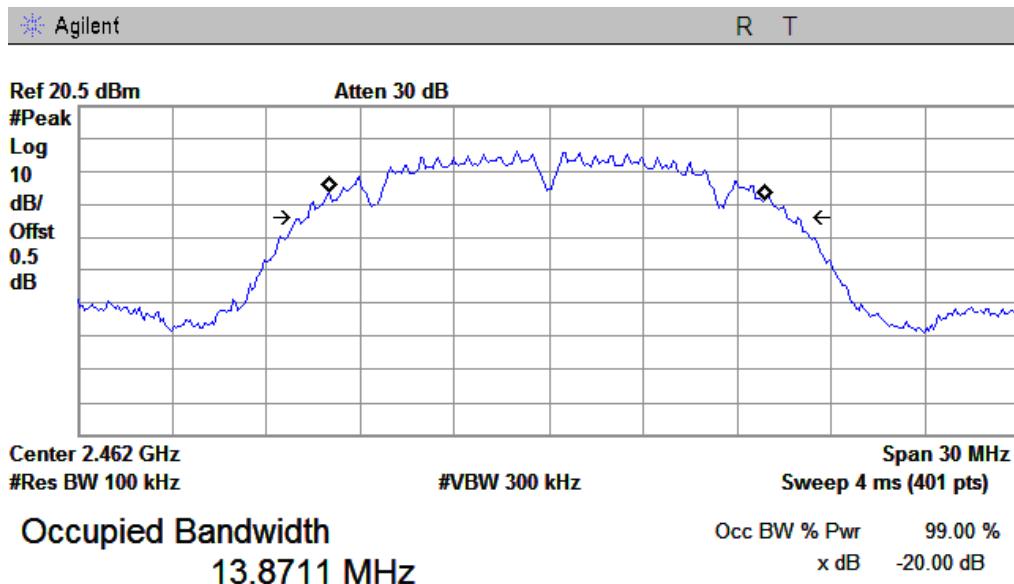


Transmit Freq Error -39.584 kHz
 x dB Bandwidth 15.630 MHz

802.11g Low Channel

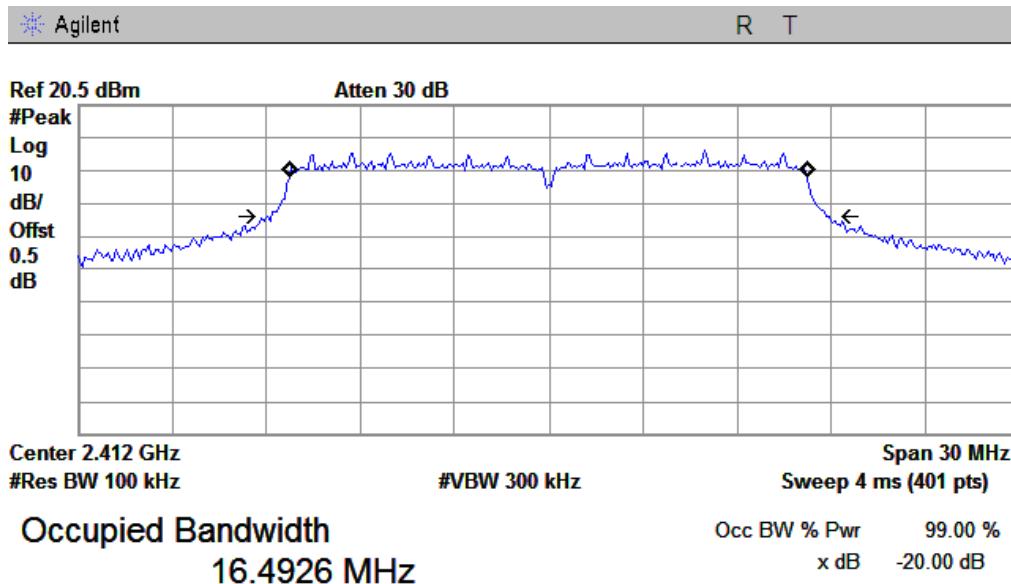


Transmit Freq Error -5.778 kHz
x dB Bandwidth 17.659 MHz

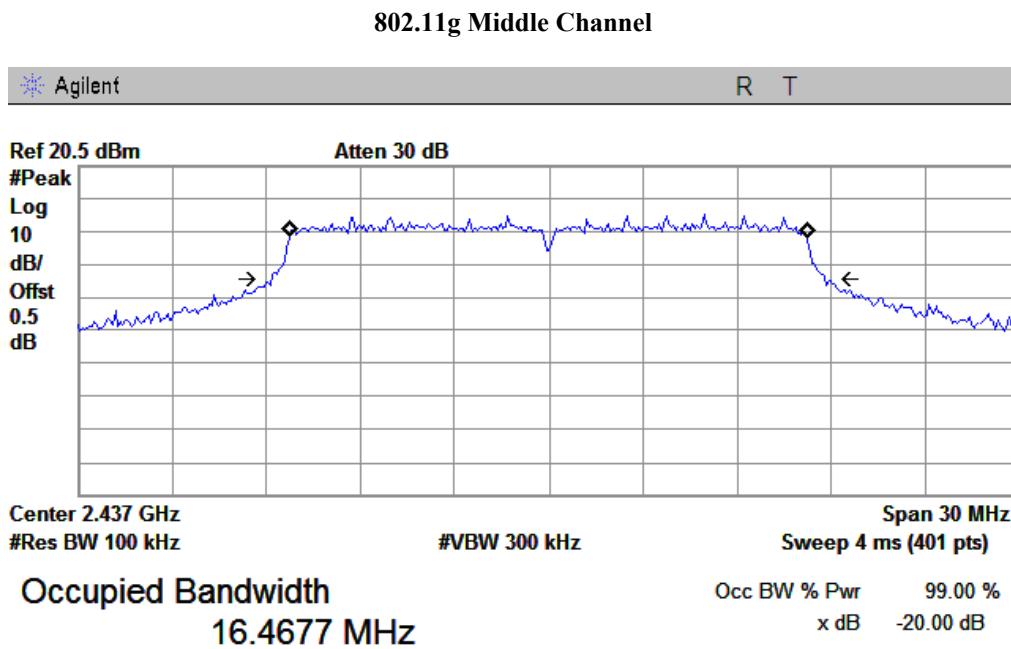


Transmit Freq Error -6.717 kHz
x dB Bandwidth 17.633 MHz

802.11g High Channel

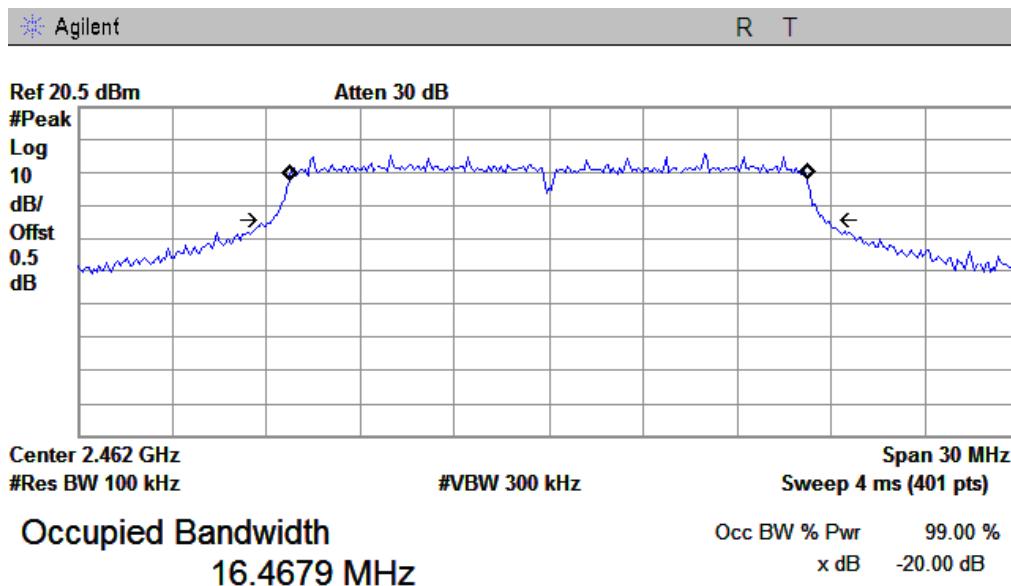


Transmit Freq Error -15.111 kHz
 x dB Bandwidth 17.572 MHz

802.11n20 Low Channel

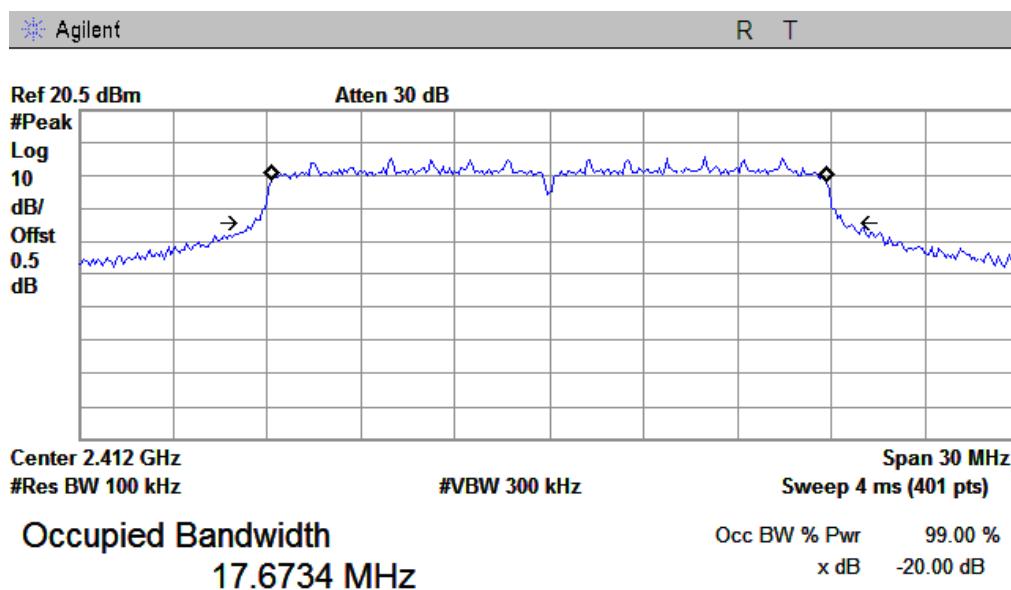


Transmit Freq Error 3.531 kHz
 x dB Bandwidth 18.841 MHz

802.11n20 Middle Channel

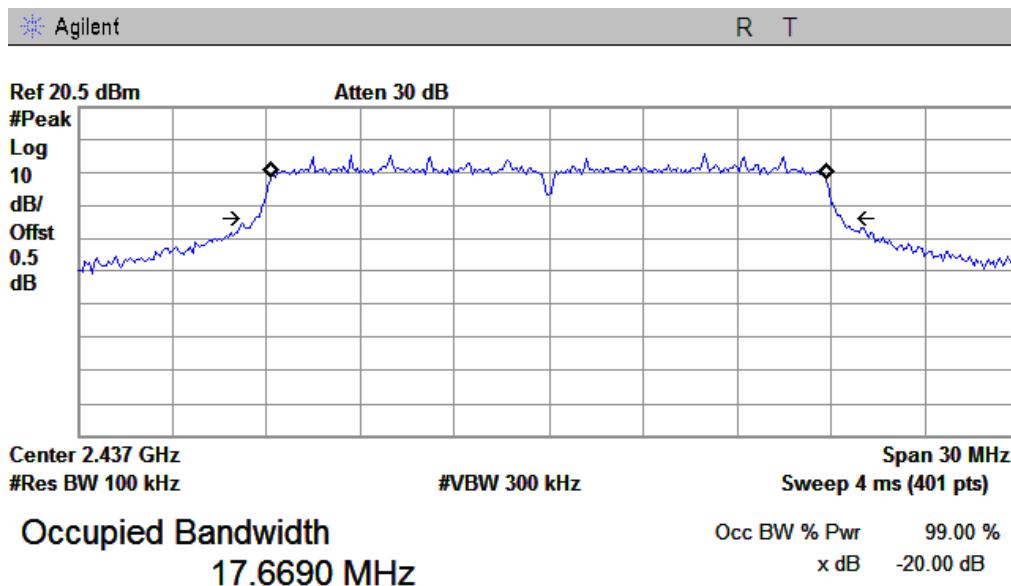


Transmit Freq Error -10.957 kHz
 x dB Bandwidth 18.739 MHz

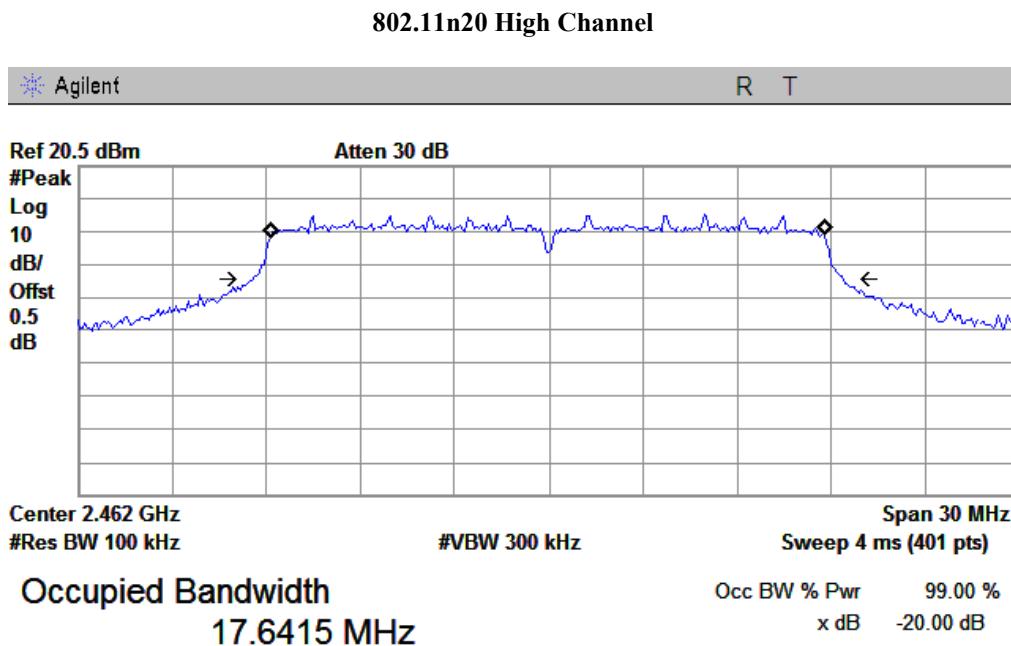


Transmit Freq Error -32.735 kHz
 x dB Bandwidth 18.856 MHz

802.11n40 Low Channel

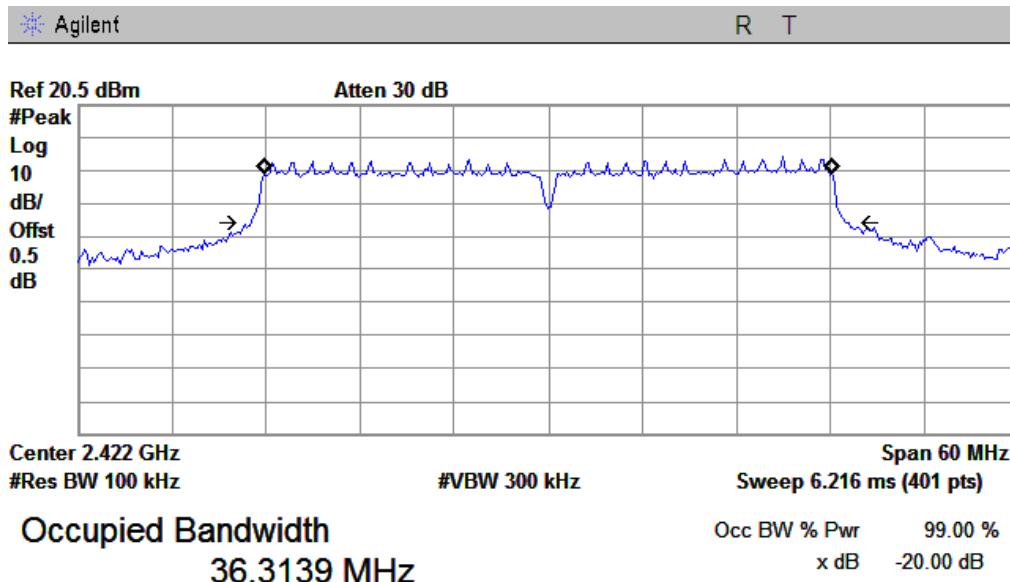

Transmit Freq Error 13.005 kHz
x dB Bandwidth 38.048 MHz

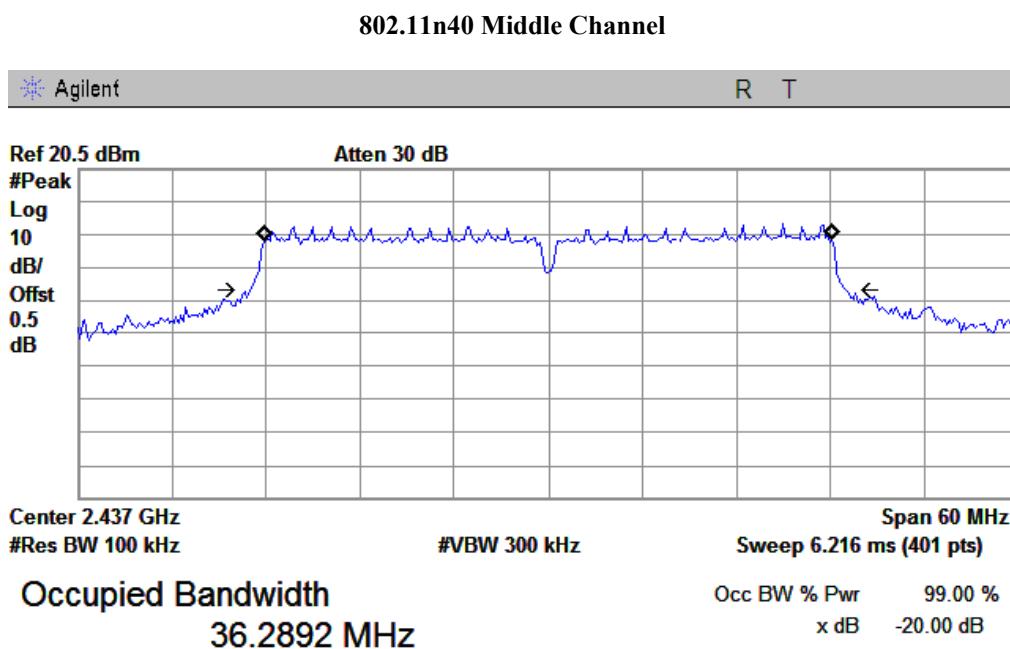


Transmit Freq Error 11.159 kHz
x dB Bandwidth 38.055 MHz

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 51 of 224
www.siemic.com.cn

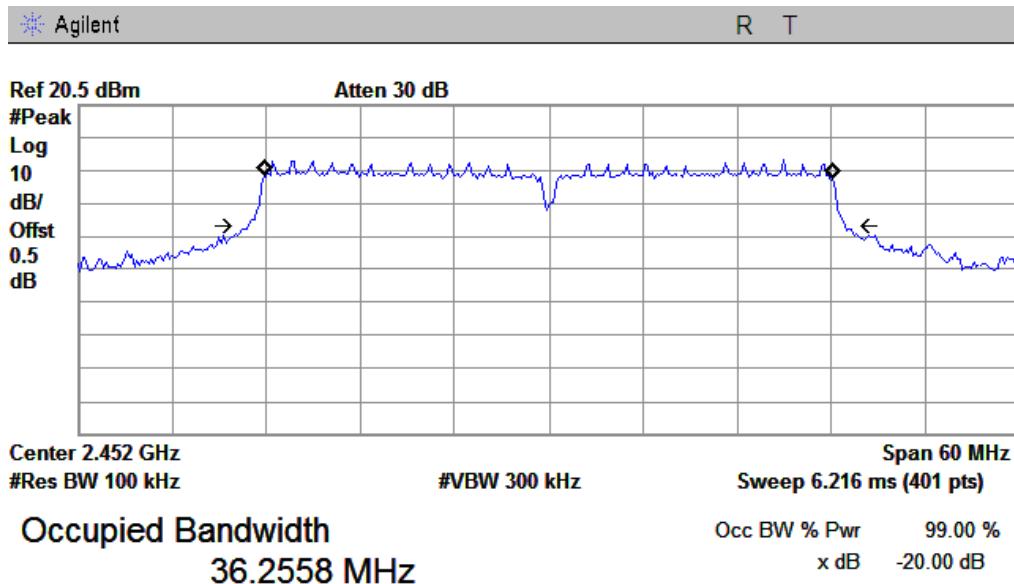802.11n40 High Channel

Transmit Freq Error -21.154 kHz
x dB Bandwidth 38.049 MHz



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 52 of 224
www.siemic.com.cn

5.3 §15.247(b) (3) - Conducted Maximum Output Power (For 2.4GHz Band)

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

Temperature	26°C
Relative Humidity	57%
Atmospheric Pressure	1001mbar
4. Test date : October 28, 2013
Tested By : Herith Shi

Standard Requirement:

Maximum Peak Conducted Output Power

The following procedures can be used to determine the maximum peak conducted output power of a DTS EUT.

Maximum Conducted Output Power

§15.247(b)(3) permits the maximum (average) conducted output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When these procedures are utilized, the power is referenced to the emission bandwidth (EBW) rather than the DTS bandwidth (see Section 2.0 for definitions).

When using a spectrum/signal analyzer to perform these measurements, it must be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW in order to ensure bin-to-bin spacing of $\leq \text{RBW}/2$ so that narrowband signals are not lost between frequency bins.

The ideal method for measuring the maximum (average) conducted output power is with the EUT is configured to transmit continuously (duty cycle $\geq 98\%$) at its maximum power control level. However, when this condition cannot be realized, video triggering or signal gating can be used to ensure that the measurements are performed only during periods when the EUT is transmitting at its maximum power control level. An option is also provided that can be used when none of the above requirements can be met with the available measurement instrumentation.

Procedures:

Measurement Procedure PK:

This procedure should only be used when the maximum available RBW of the spectrum/signal analyzer is less than the DTS bandwidth.

1. Set the RBW = 1 MHz.
2. Set the VBW = $3 \times \text{RBW}$ or maximum available setting (must be $\geq \text{RBW}$).
3. Set the span to fully encompass the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

Measurement Procedure AVG:

This procedure should be used with an RMS power averaging detector; however, a sample detector can be used when an RMS detector is not available. This is the baseline method for measuring the maximum (average) conducted output power.

1. Set span to at least 1.5 times the OBW
2. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 53 of 224
www.siemic.com.cn

3. Set the VBW \geq 3 MHz.
4. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
5. Sweep time = auto couple.
6. Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode
7. If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission
8. Employ trace averaging in power averaging (RMS) mode over a minimum of 100 traces.
9. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Test Result: Pass.

Please refer to the following tables and plots.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 54 of 224
www.siemic.com.cn

The Peak Power



802.11b mode									
Data Rate: 1Mbps									
Channel	PK Output Power (dBm)			Total PK Power (dBm)	AV Output Power (dBm)			Total AV Power (dBm)	Limit (dBm)
	CH0	CH1	CH2		CH0	CH1	CH2		
2412	20.06	19.45	19.73	24.53	16.51	16.56	16.60	21.33	30
2437	20.14	19.46	18.58	24.21	16.57	16.54	15.91	21.12	30
2462	19.54	19.79	18.81	24.17	16.54	16.42	15.65	20.99	30
802.11g mode									
Data Rate: 6Mbps									
Channel	PK Output Power (dBm)			Total PK Power (dBm)	AV Output Power (dBm)			Total AV Power (dBm)	Limit (dBm)
	CH0	CH1	CH2		CH0	CH1	CH2		
2412	22.42	21.55	21.94	26.76	16.57	16.59	16.13	21.21	30
2437	22.31	21.38	21.61	26.56	17.27	16.05	15.76	21.18	30
2462	20.42	21.48	20.26	25.53	16.25	16.16	15.80	20.85	30
802.11n20 mode									
Data Rate: 7.2Mbps									
Channel	PK Output Power (dBm)			Total PK Power (dBm)	AV Output Power (dBm)			Total AV Power (dBm)	Limit (dBm)
	CH0	CH1	CH2		CH0	CH1	CH2		
2412	21.84	21.77	21.34	26.43	16.53	16.05	15.91	20.94	30
2437	21.85	21.74	21.38	26.43	16.54	16.23	15.63	20.92	30
2462	21.80	21.72	21.31	26.39	16.01	16.67	15.95	20.99	30
802.11n40 mode									
Data Rate: 15Mbps									
Channel	PK Output Power (dBm)			Total PK Power (dBm)	AV Output Power (dBm)			Total AV Power (dBm)	Limit (dBm)
	CH0	CH1	CH2		CH0	CH1	CH2		
2422	22.00	21.73	22.25	26.77	15.48	15.58	15.87	20.42	30
2437	22.32	21.84	21.78	26.76	15.96	15.29	15.68	20.42	30
2452	22.39	21.57	21.64	26.65	15.71	15.38	15.62	20.34	30

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 55 of 224
www.siemic.com.cn

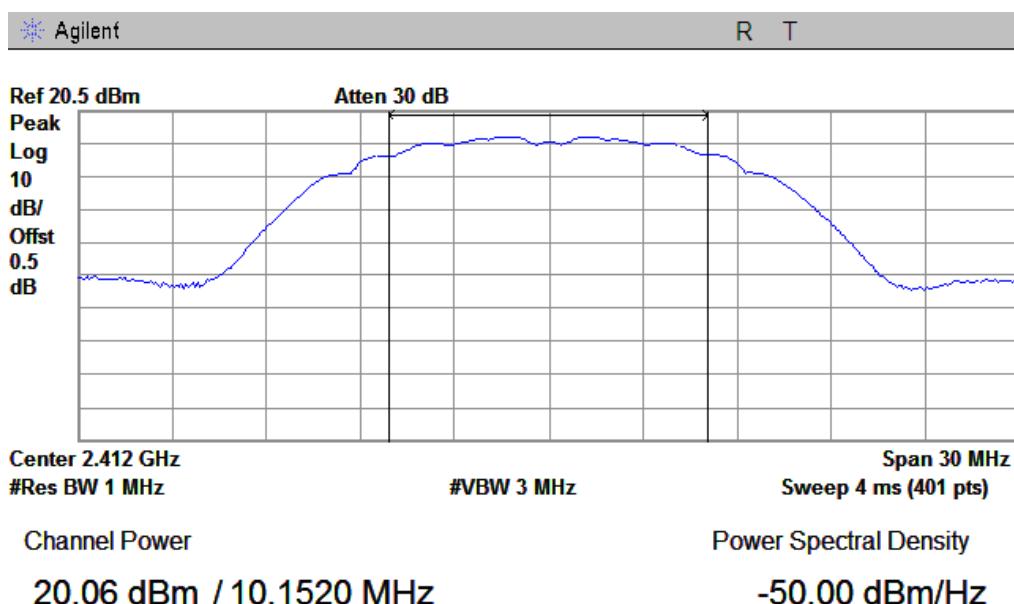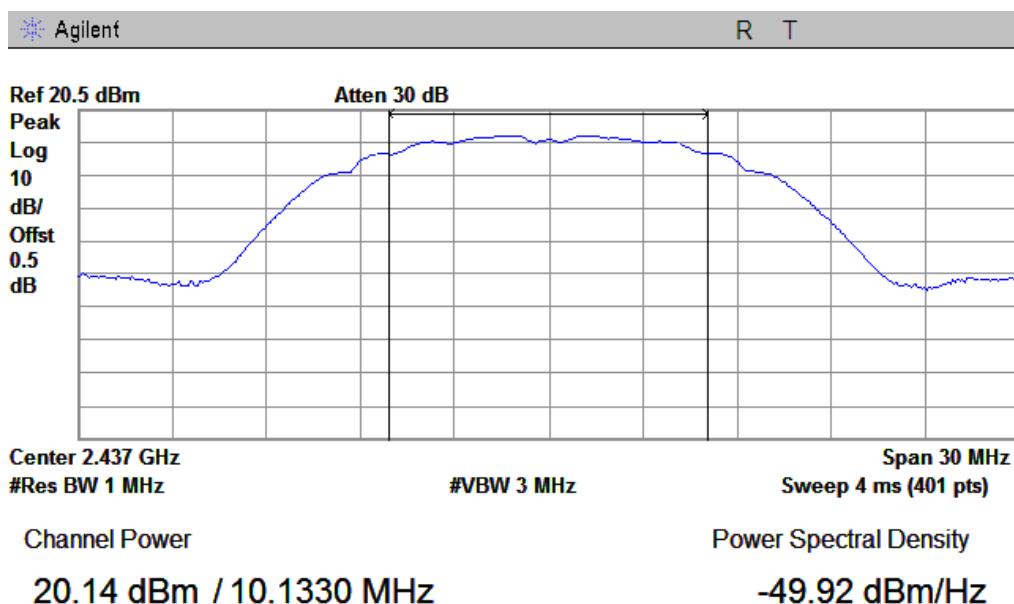RF Port CH0**The Peak Power****802.11b Low Channel****802.11b Middle Channel**


802.11b High Channel

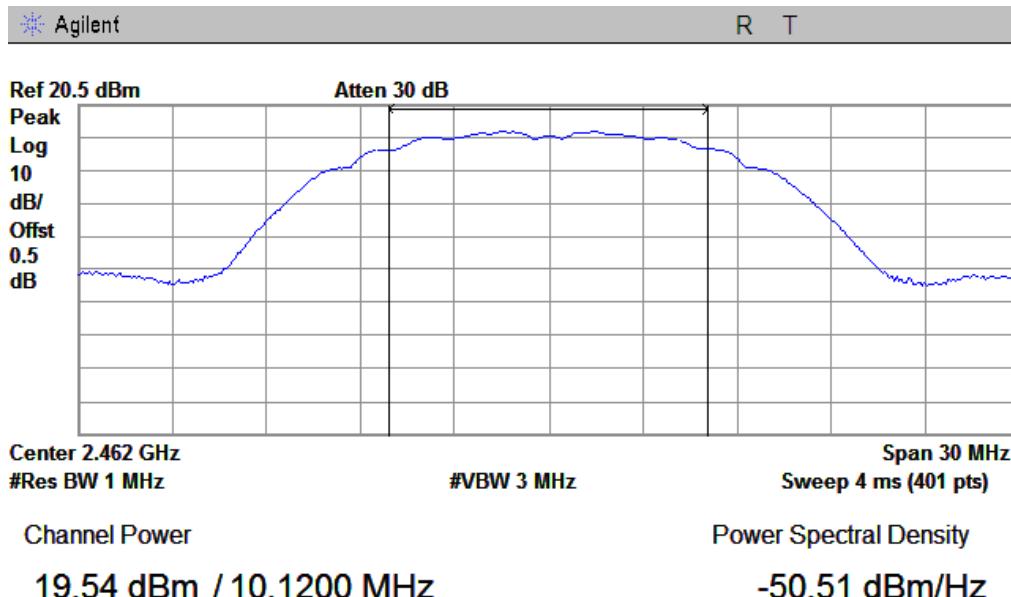


802.11g Low Channel

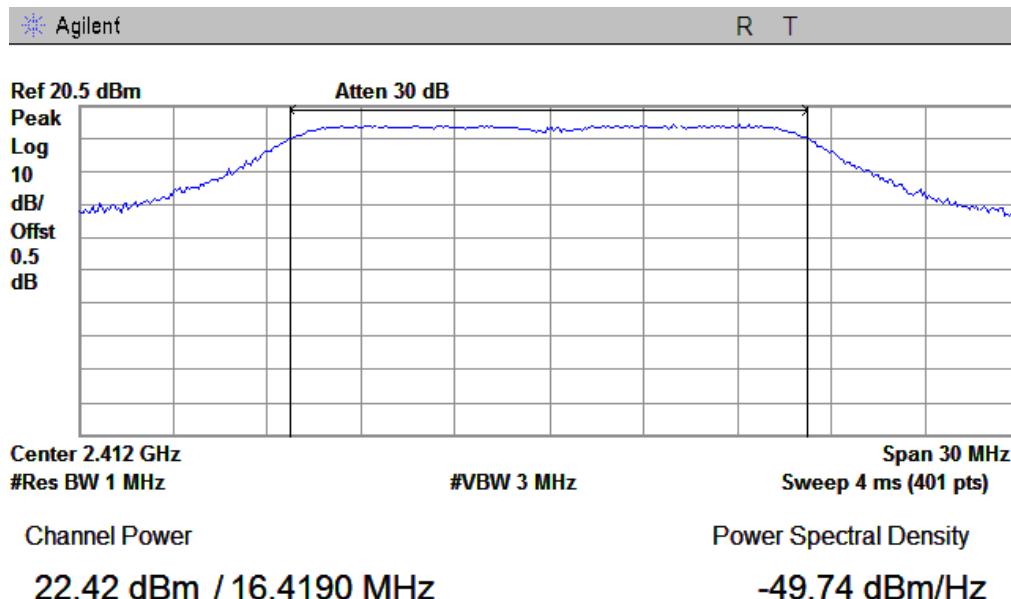

802.11g Middle Channel

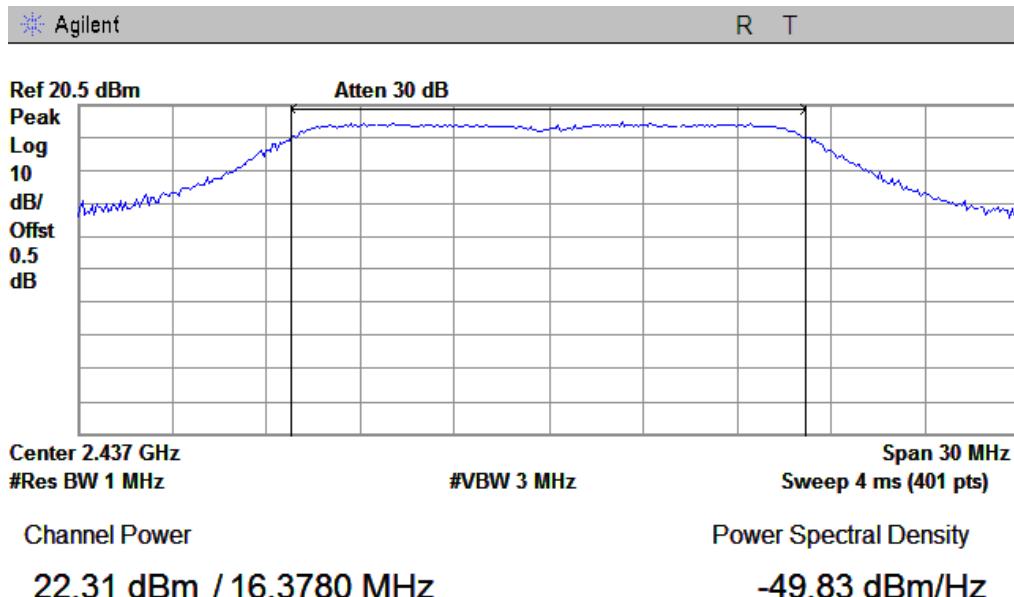

802.11g High Channel


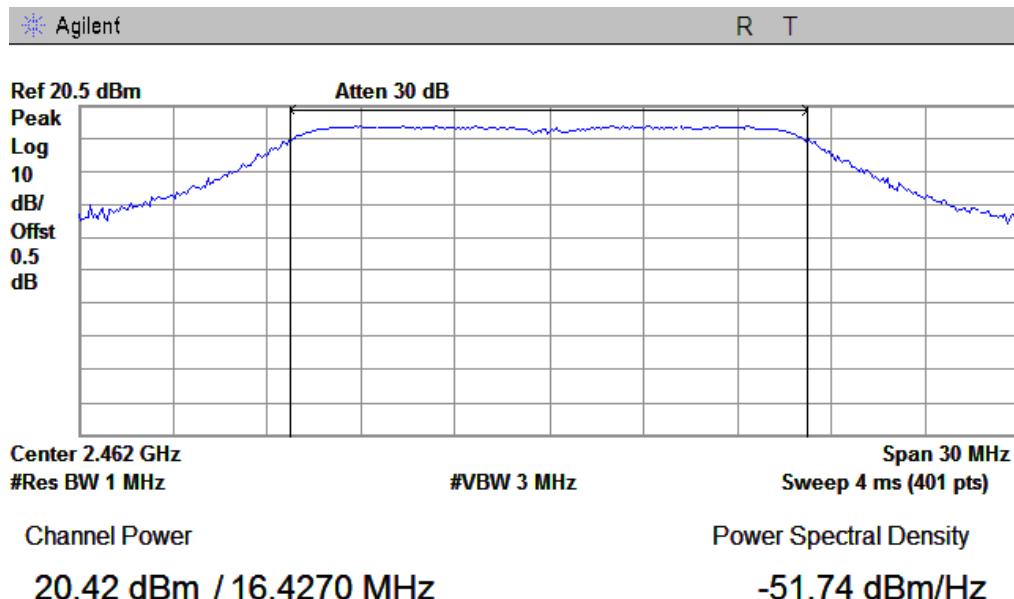


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 58 of 224
www.siemic.com.cn

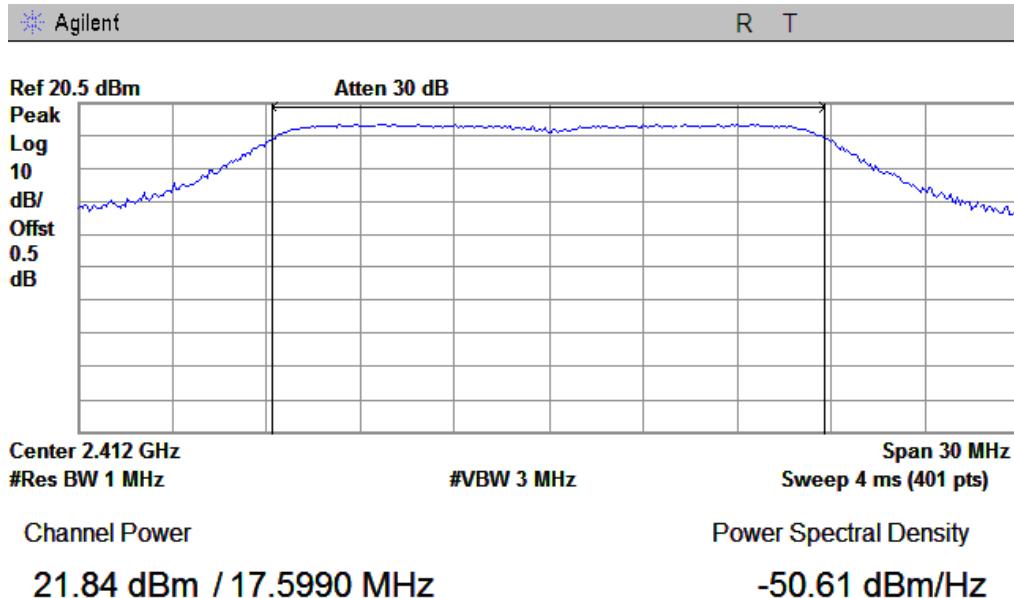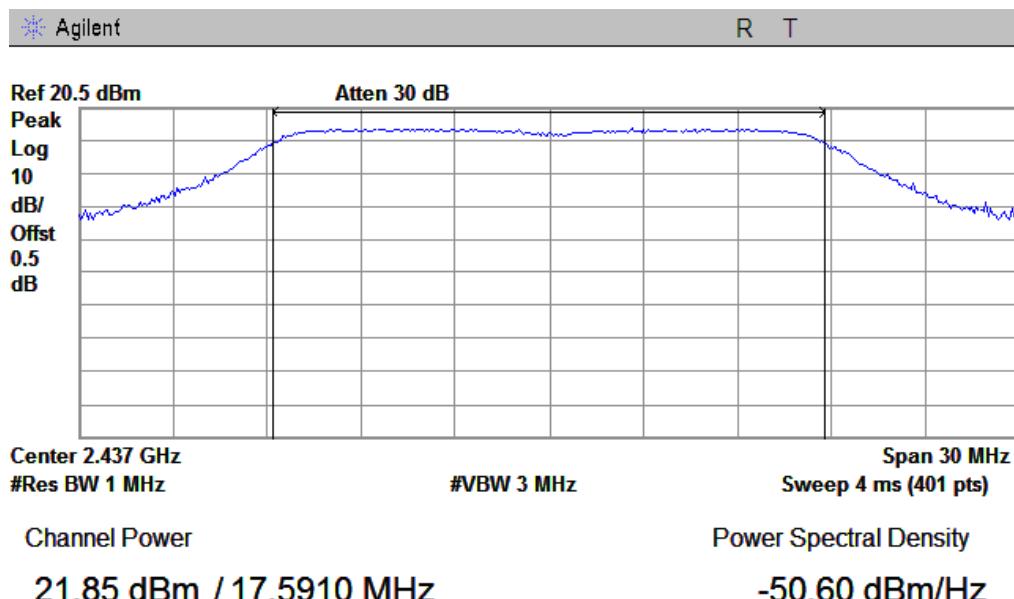802.11n20 Low Channel**802.11n20 Middle Channel**


**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 59 of 224
www.siemic.com.cn


802.11n20 High Channel

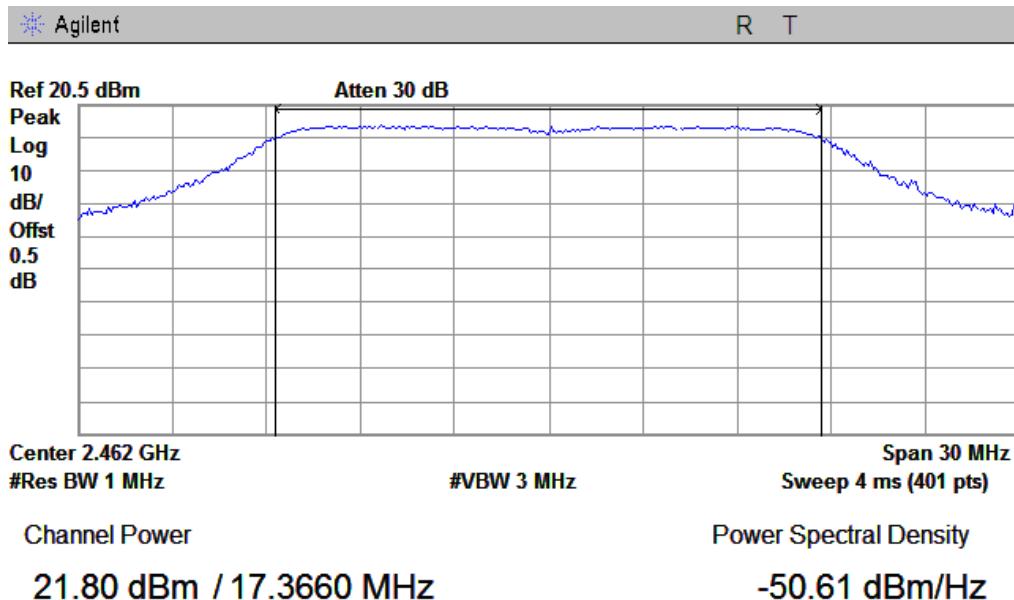


802.11n40 Low Channel

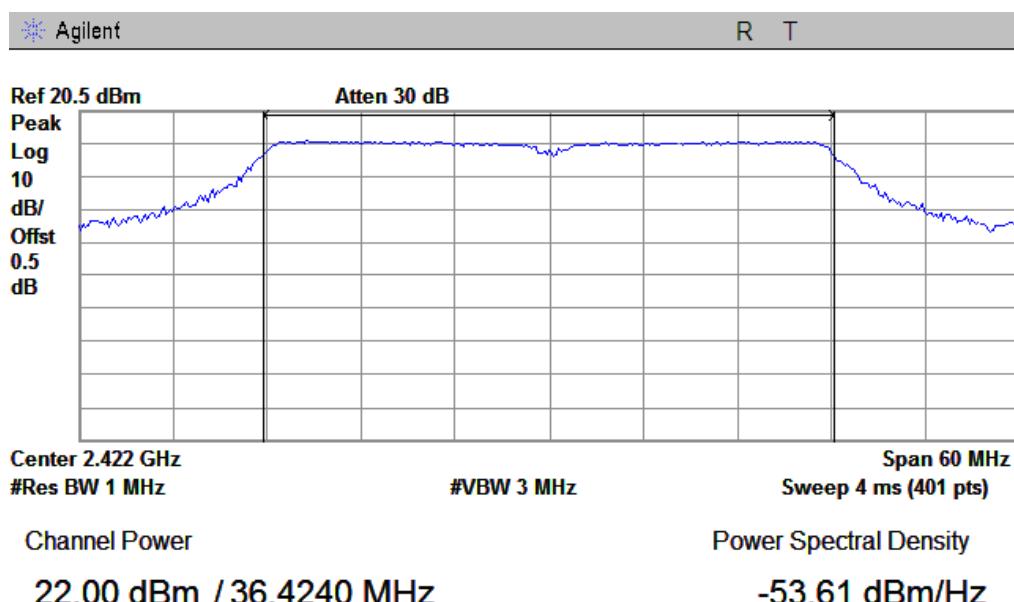

802.11n40 Middle Channel

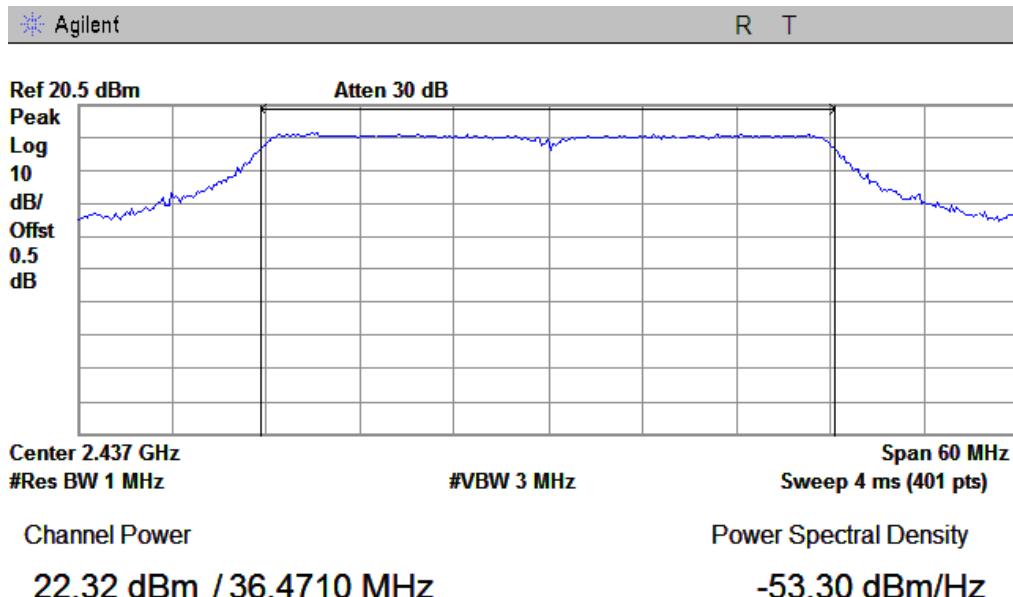

802.11n40 High Channel


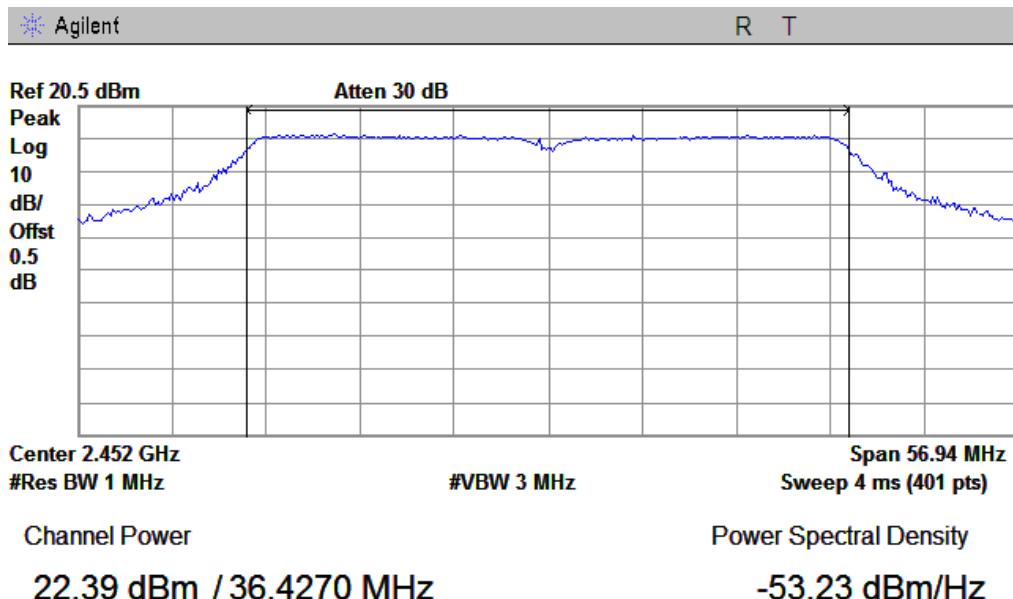


**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 61 of 224
www.siemic.com.cn

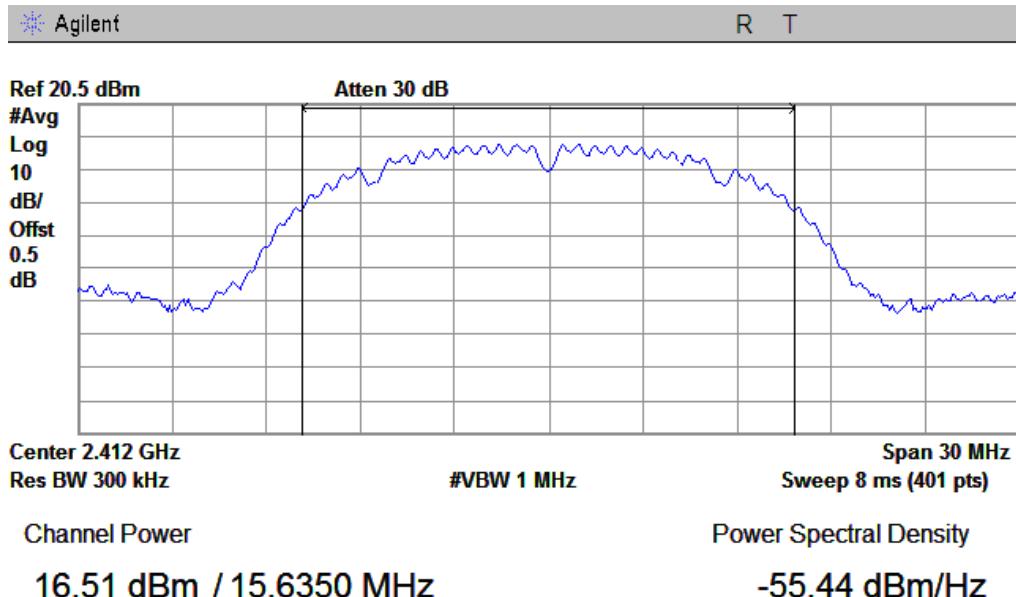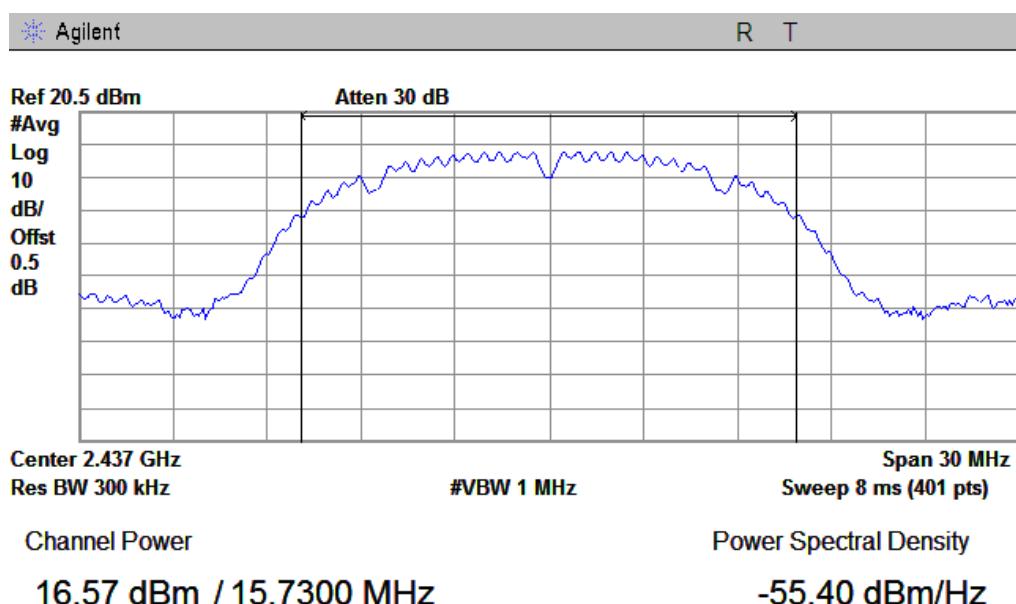The Average Power**802.11b Low Channel****802.11b Middle Channel**


802.11b High Channel

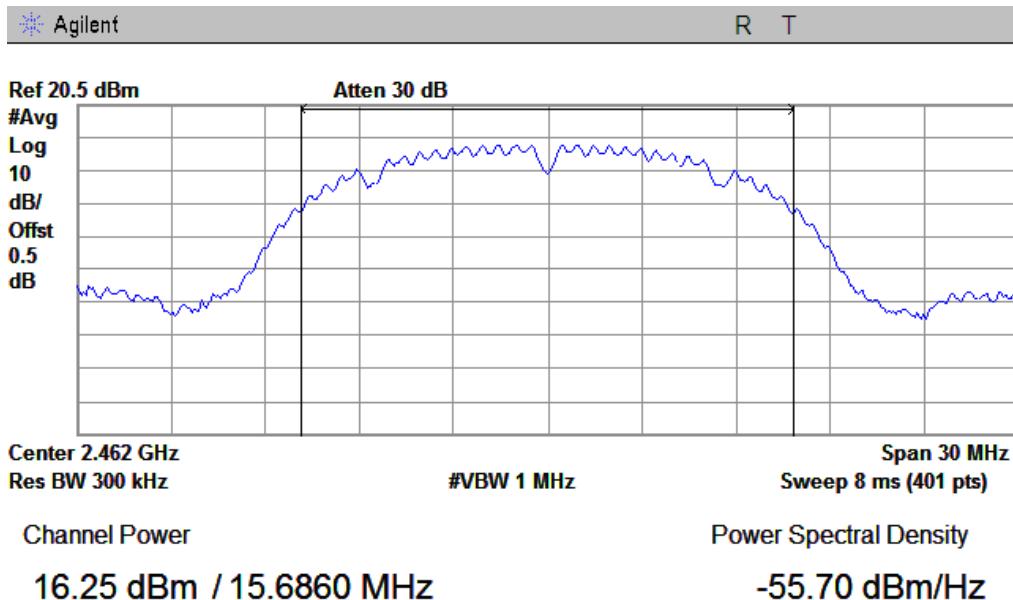


802.11g Low Channel

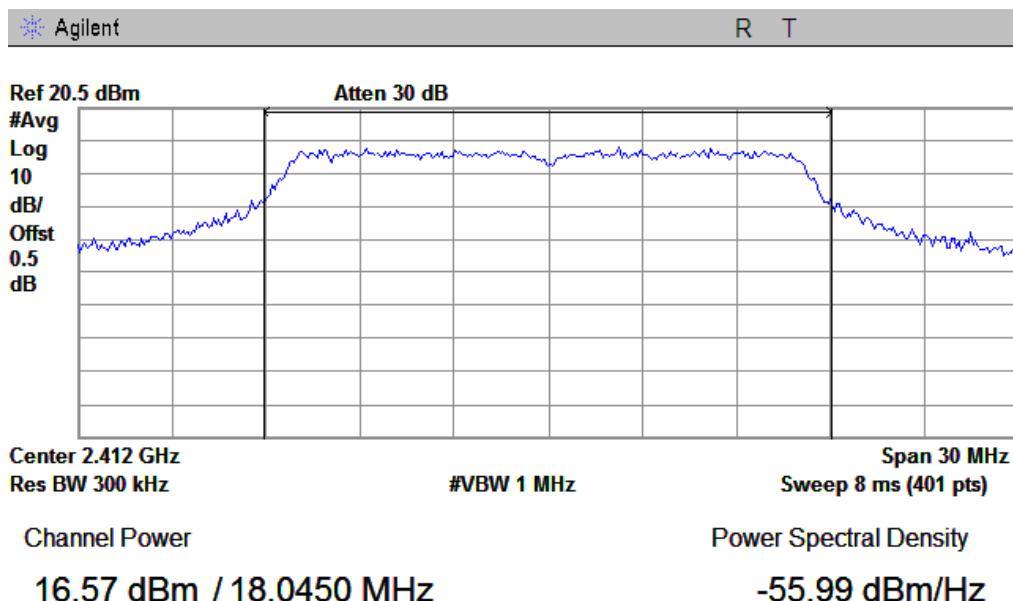


802.11g Middle Channel

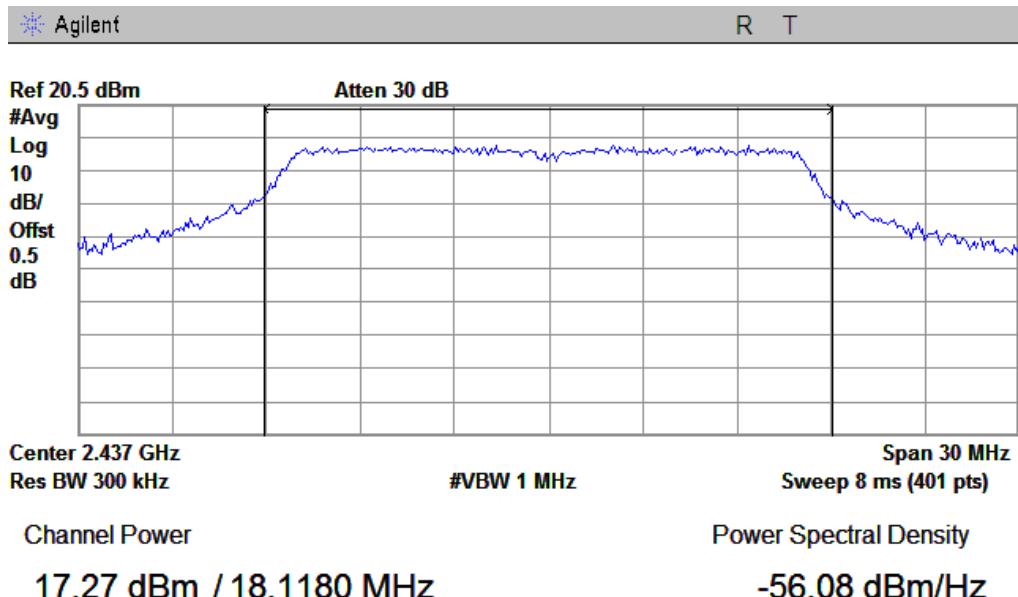


802.11g High Channel

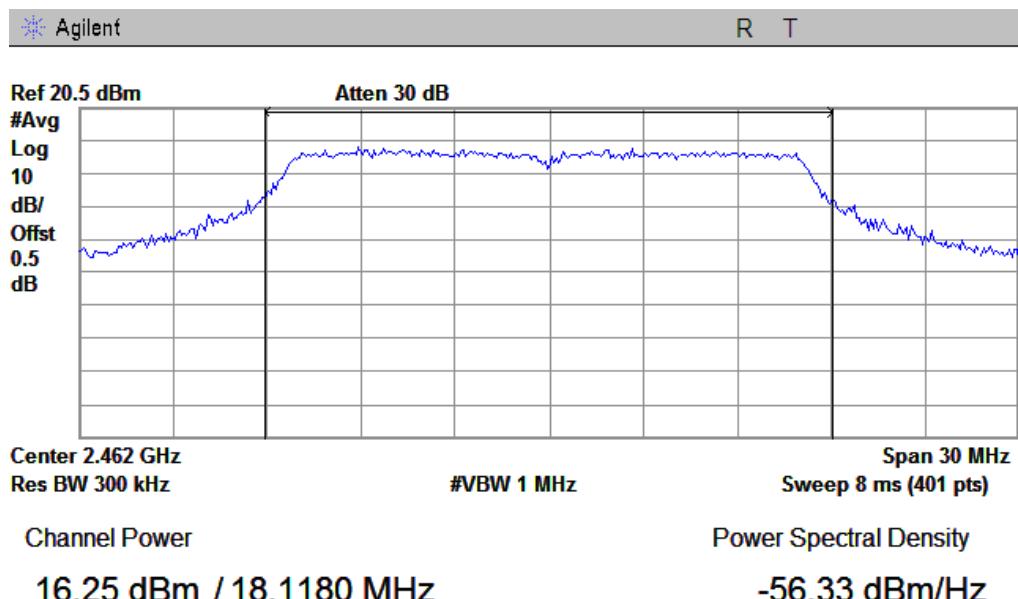


802.11n20 Low Channel

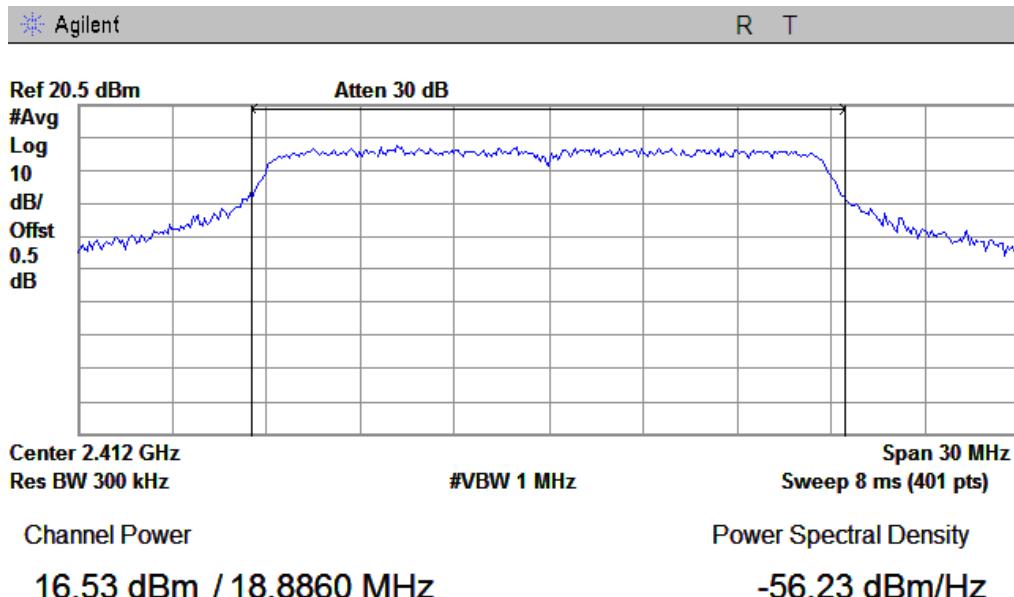


802.11n20 Middle Channel

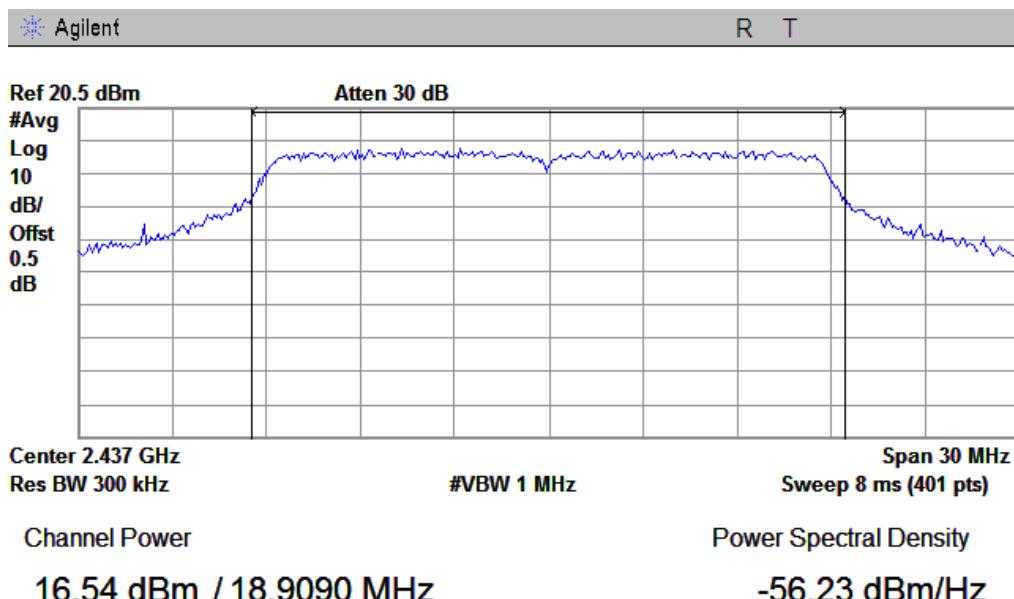


802.11n20 High Channel

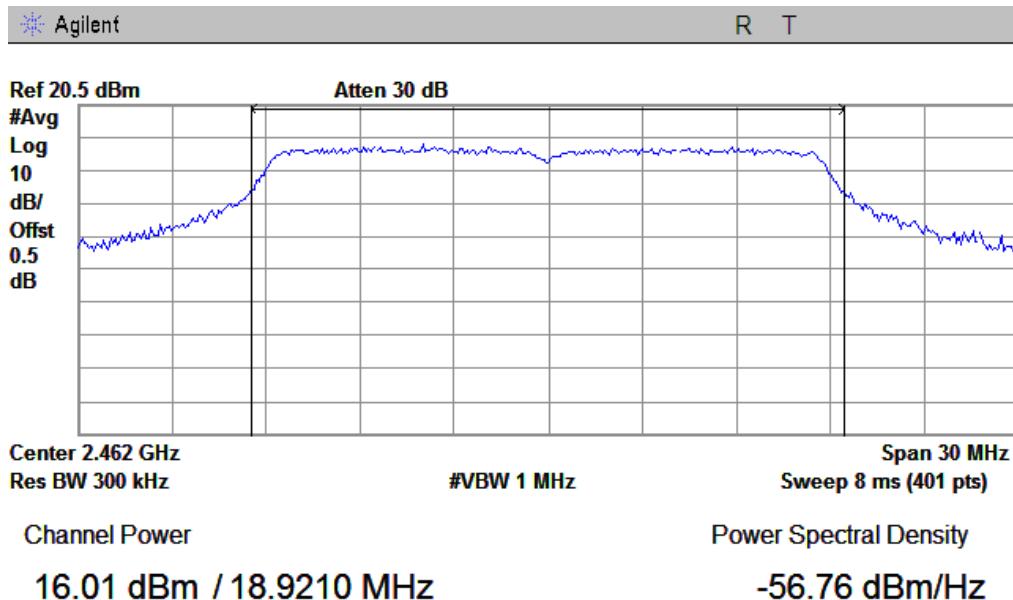


802.11n40 Low Channel

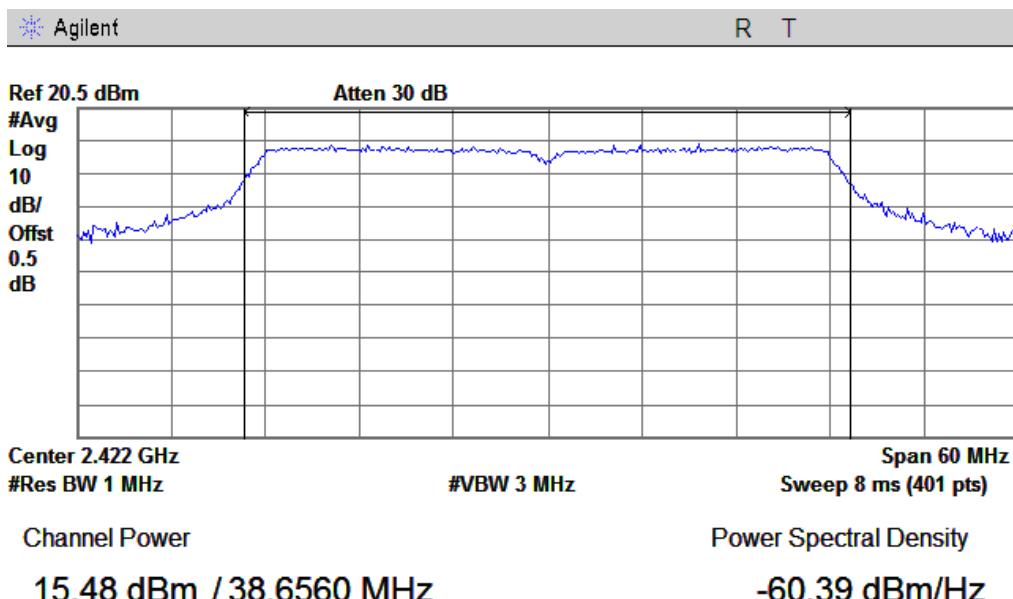

802.11n40 Middle Channel

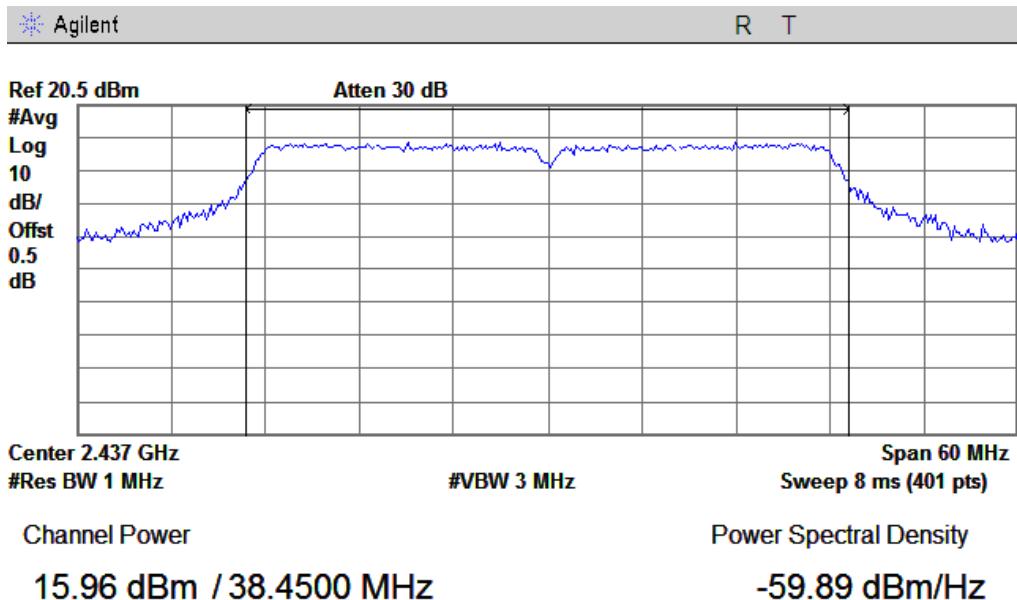

802.11n40 High Channel


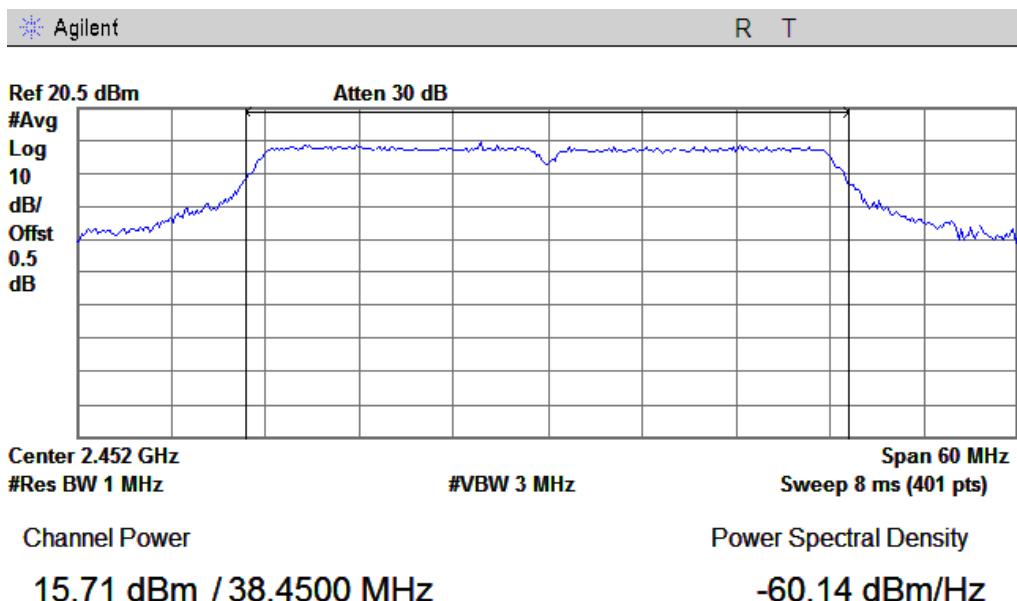


**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 67 of 224
www.siemic.com.cn

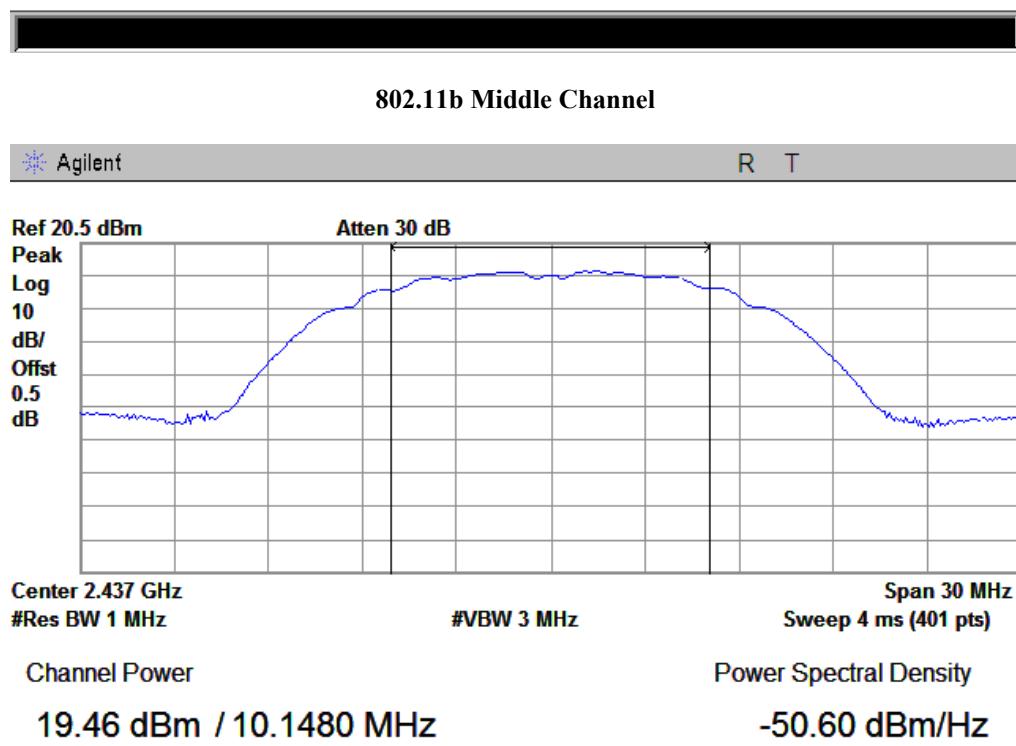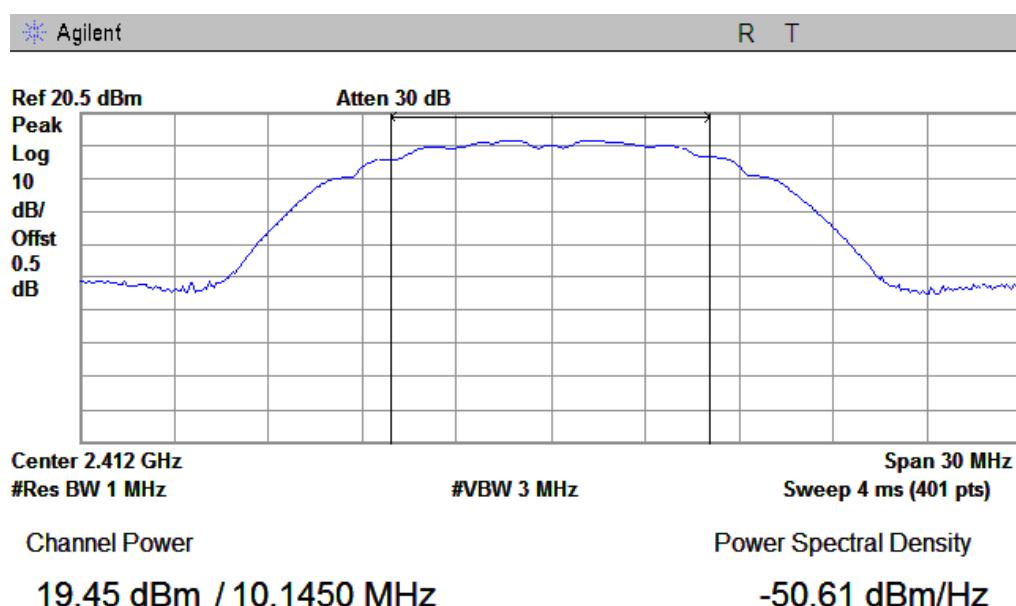RF Port CH1
The Peak Power**802.11b Low Channel**


802.11b High Channel

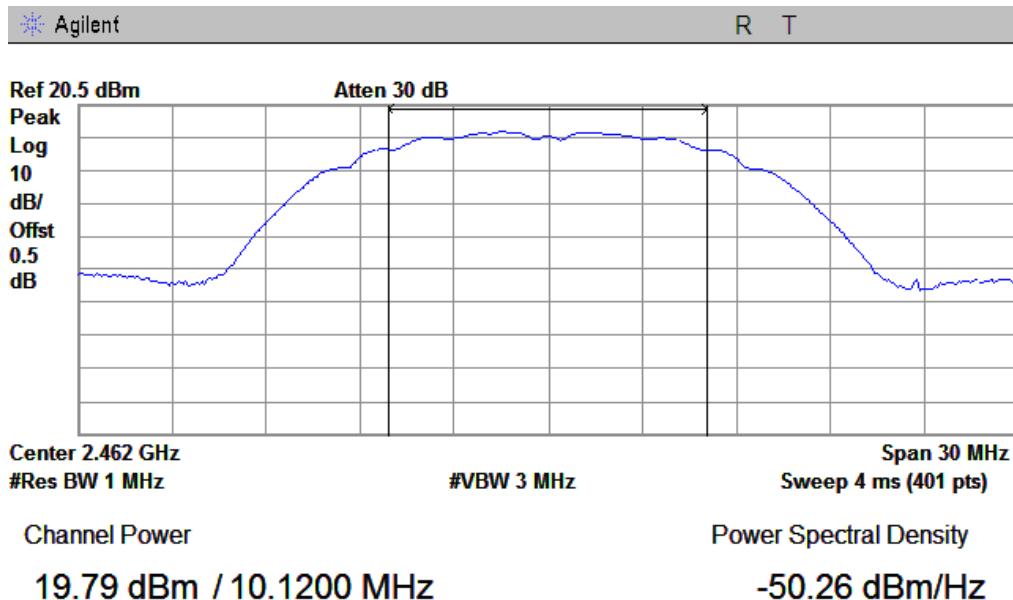


802.11g Low Channel


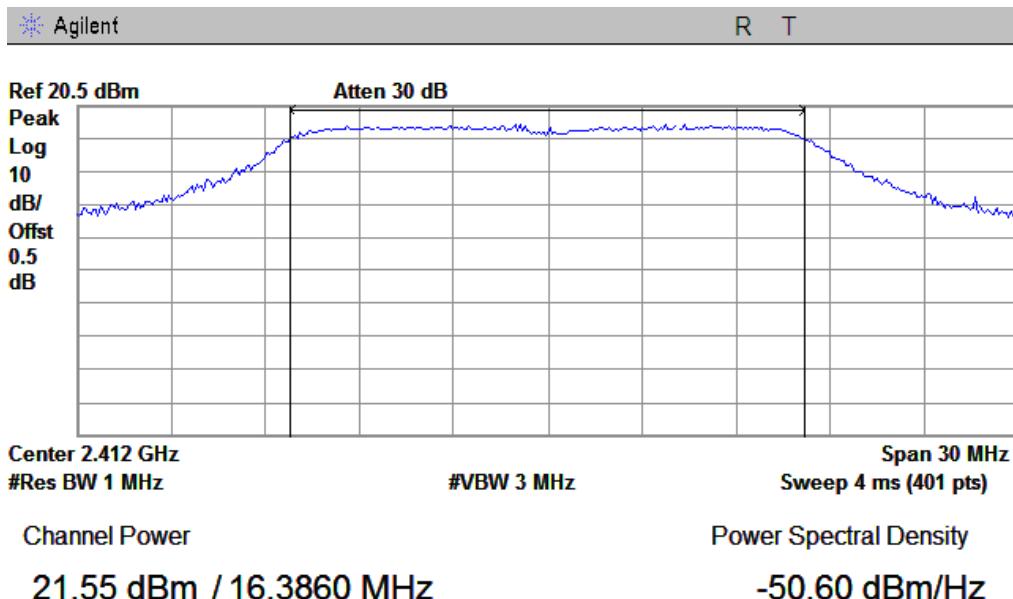


802.11g Middle Channel

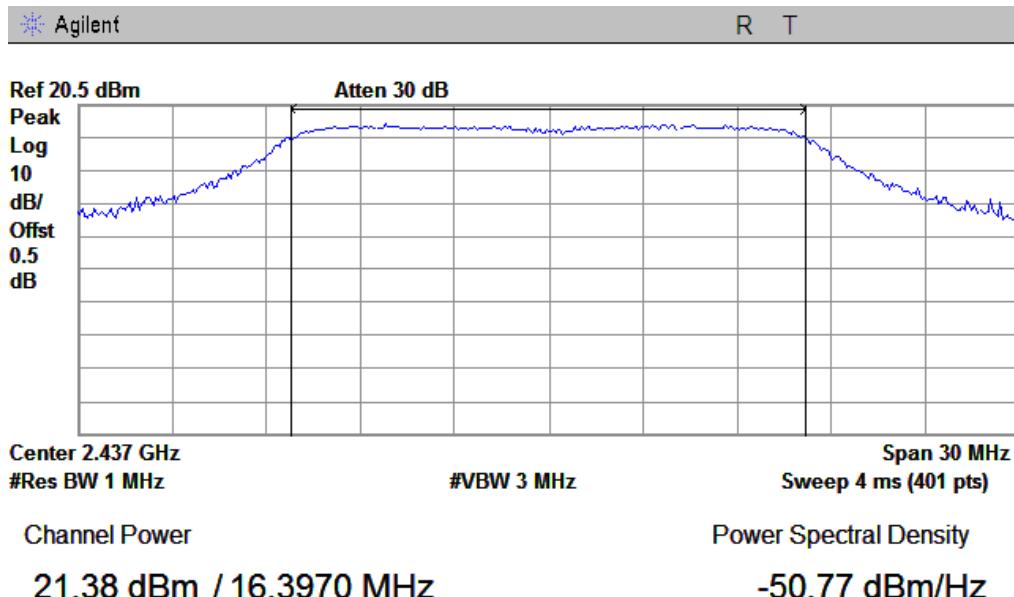


802.11g High Channel

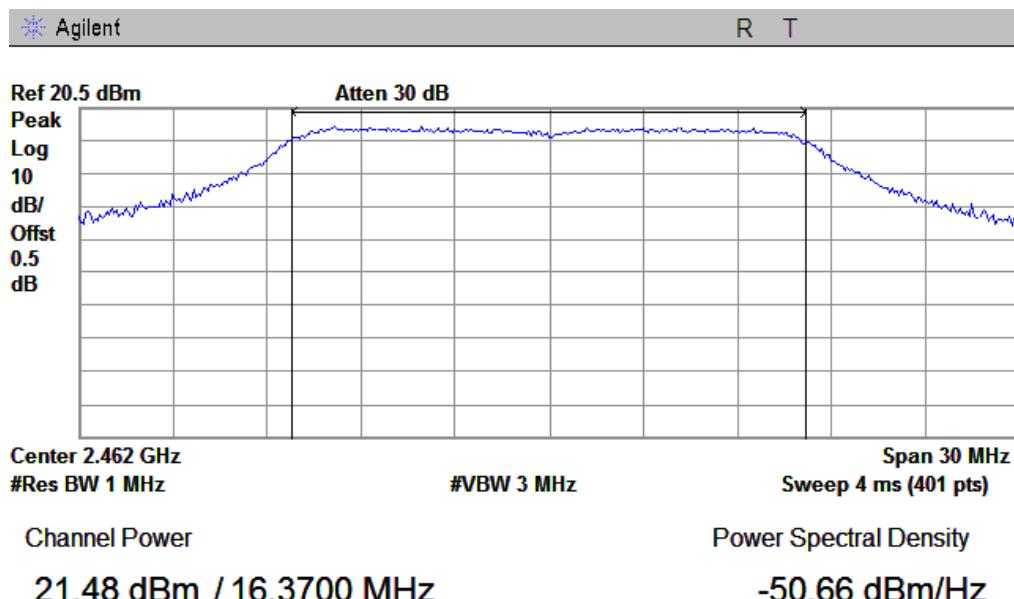


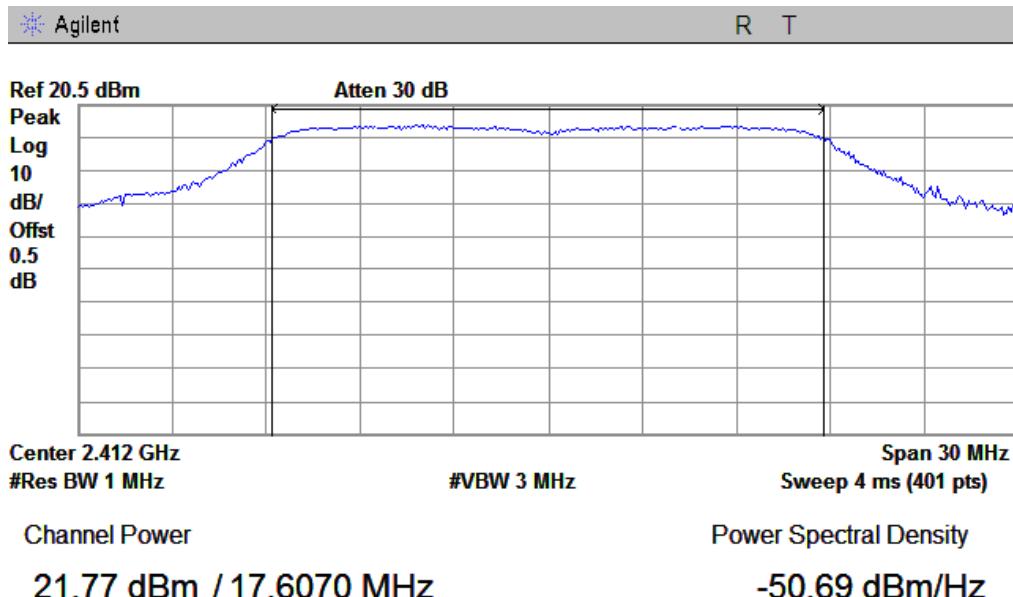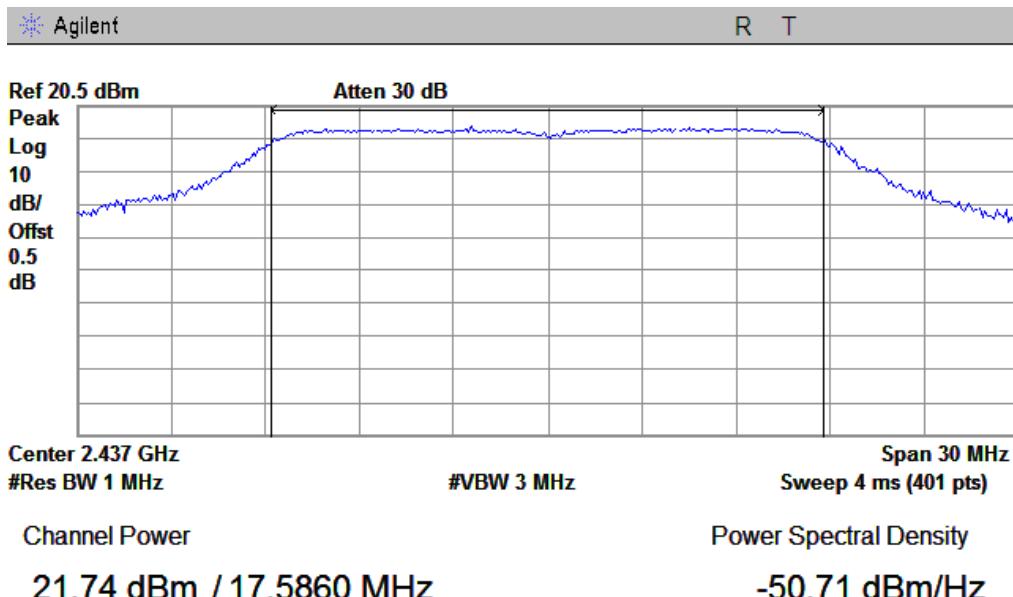802.11n20 Low Channel**802.11n20 Middle Channel**

802.11n20 High Channel

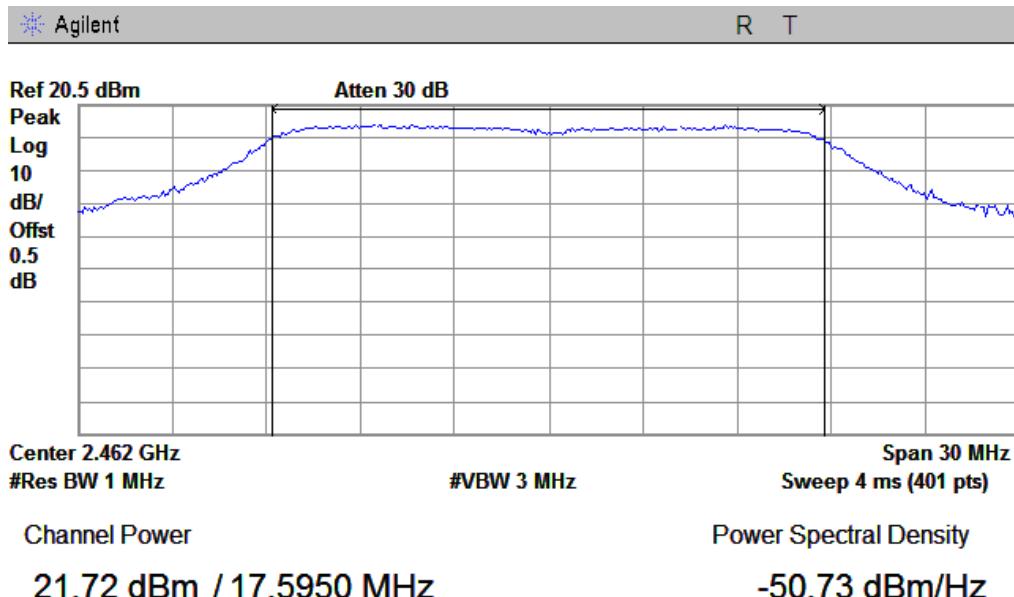

802.11n40 Low Channel


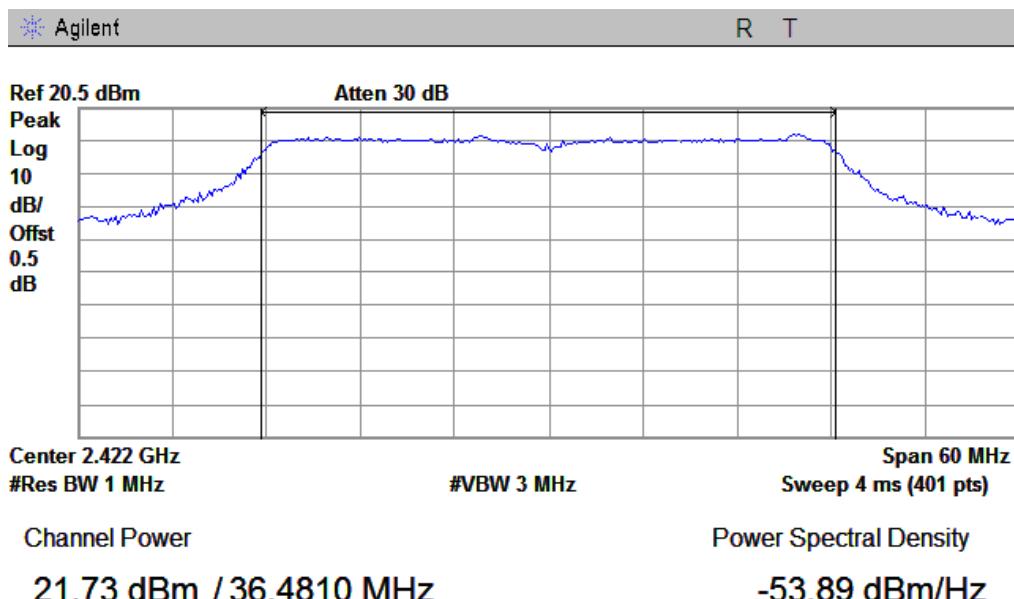


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 72 of 224
www.siemic.com.cn

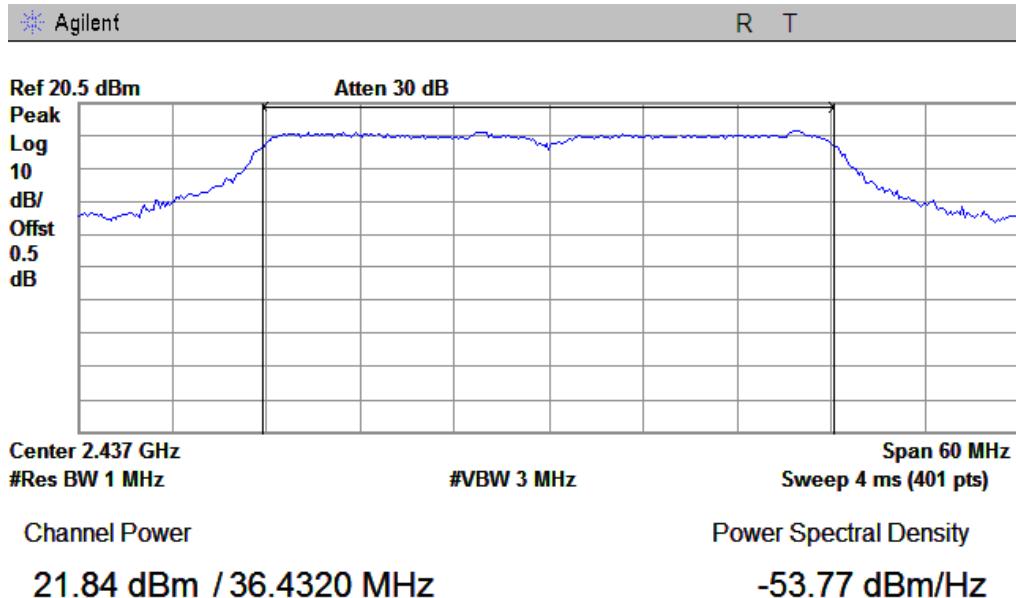
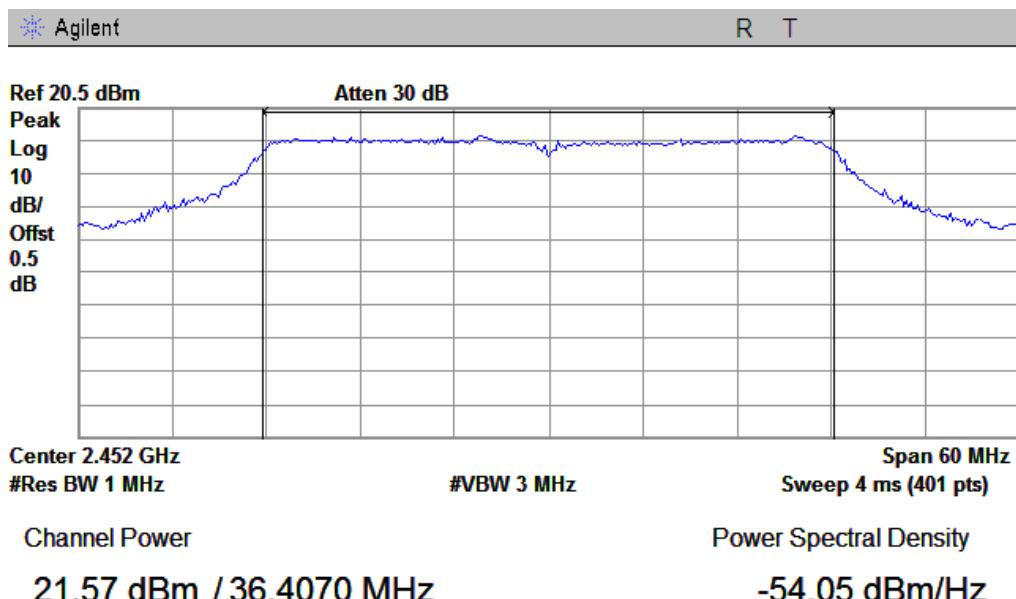
802.11n40 Middle Channel**802.11n40 High Channel**

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 73 of 224
www.siemic.com.cn

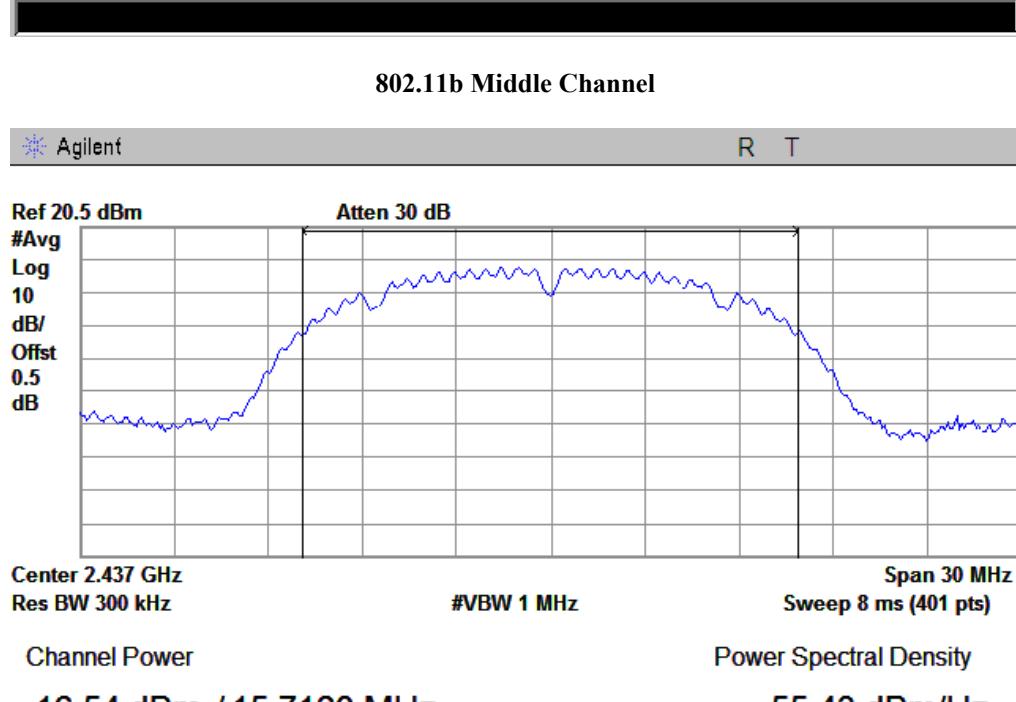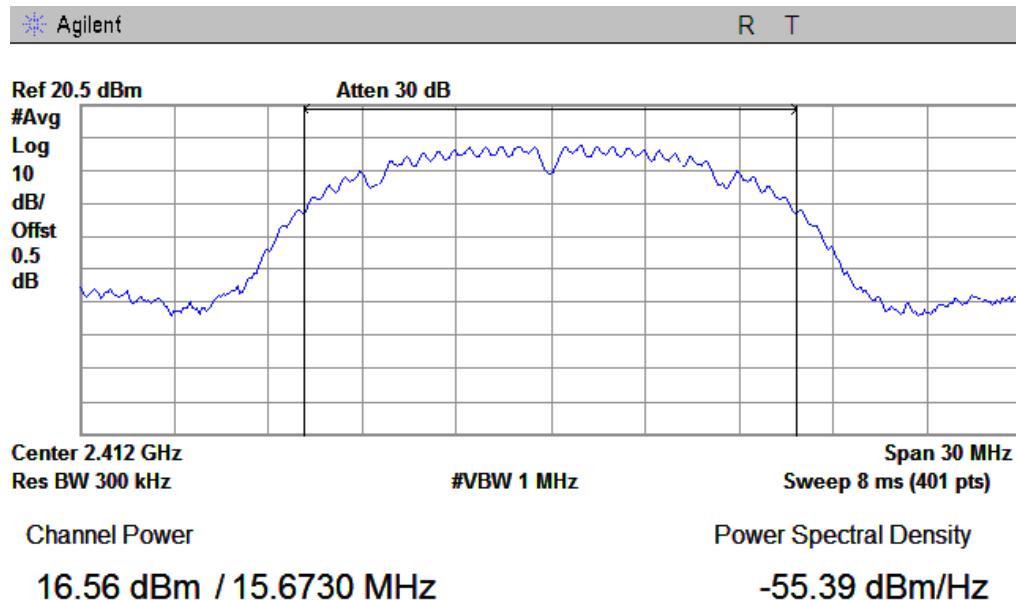The Average Power**802.11b Low Channel**


802.11b High Channel

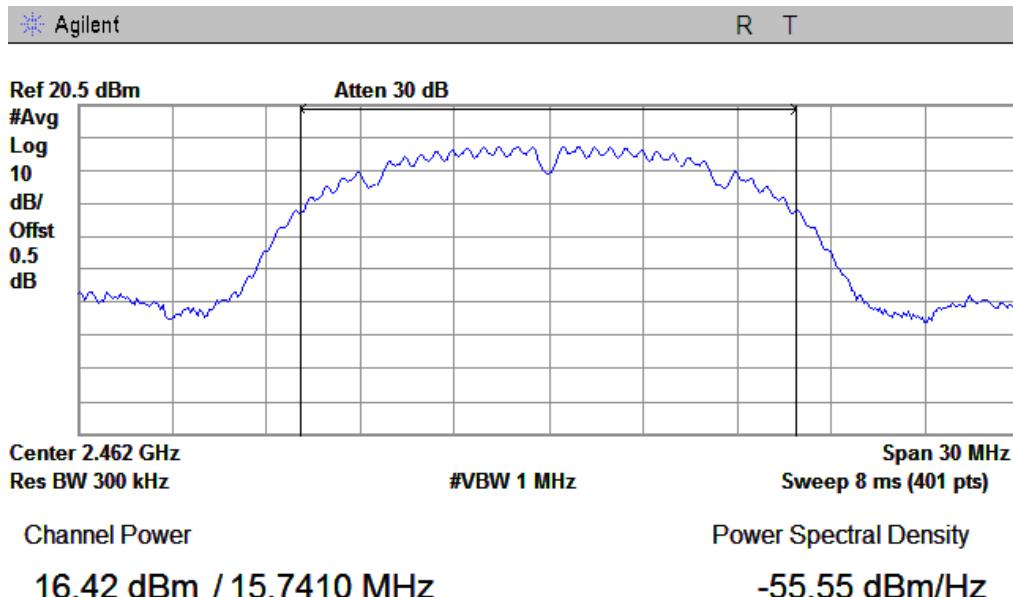


802.11g Low Channel

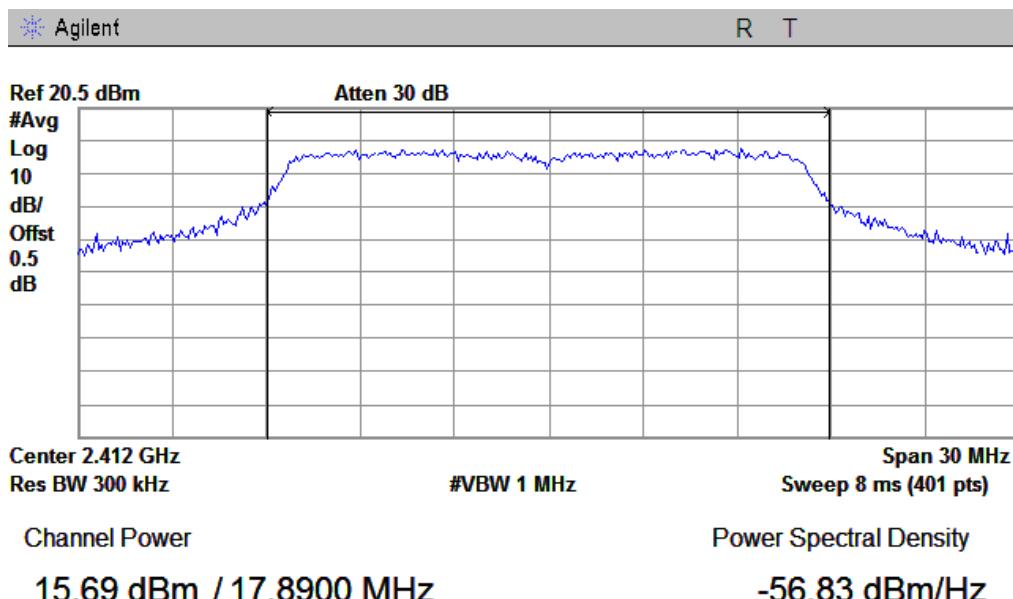


802.11g Middle Channel

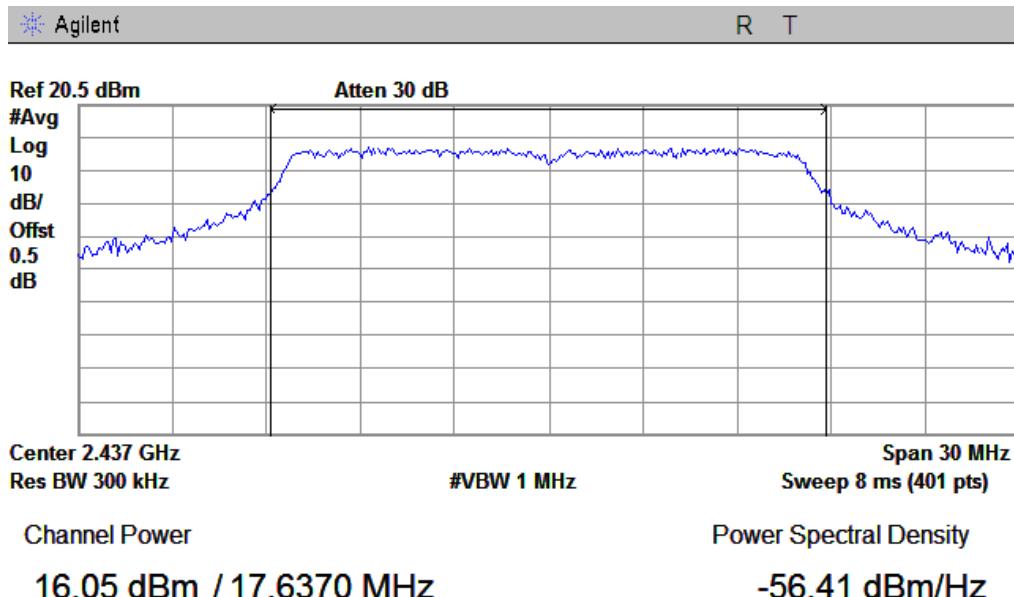


802.11g High Channel

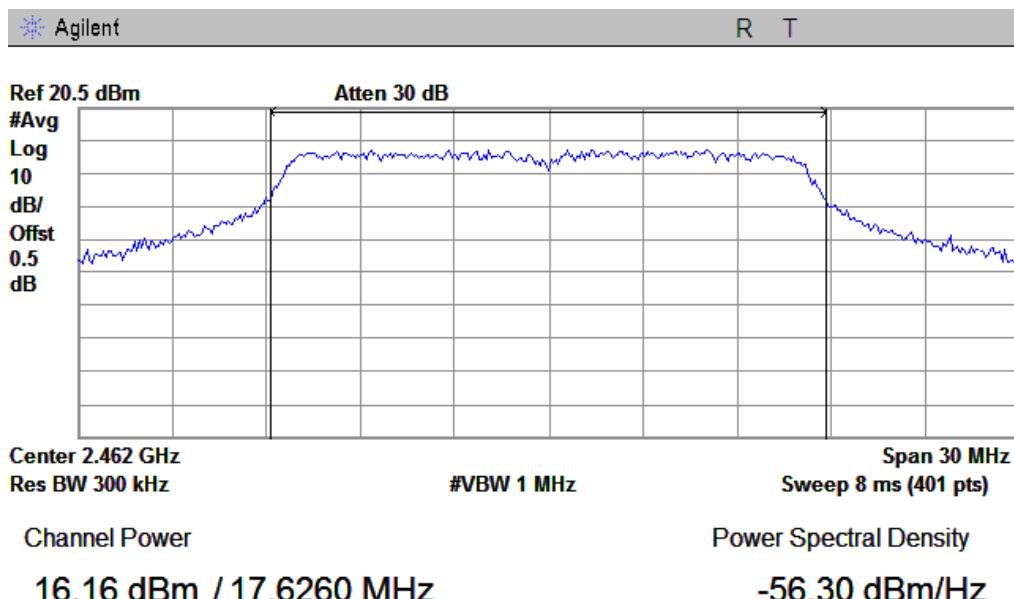

802.11n20 Low Channel

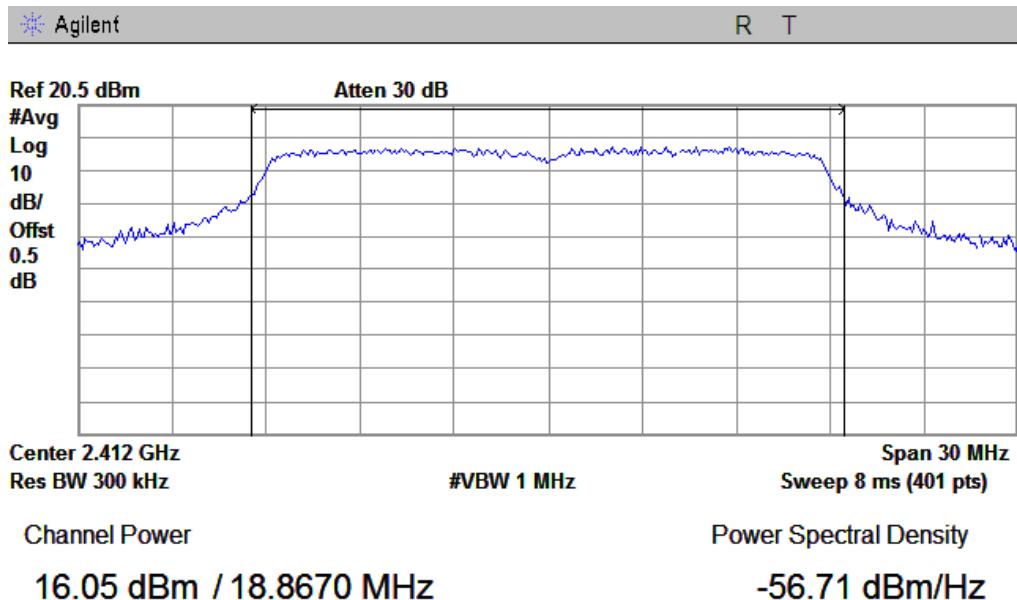

802.11n20 Middle Channel

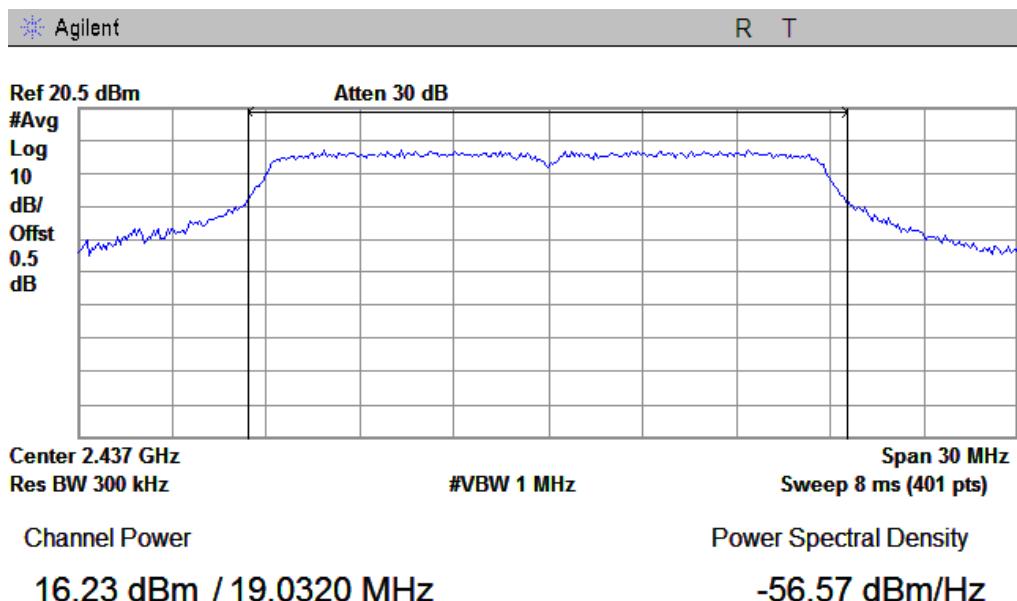



SIEMIC, Inc.

Accessing global markets


Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4:

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 77 of 224
www.siemic.com.cn

802.11n20 High Channel

* Agilent


R T

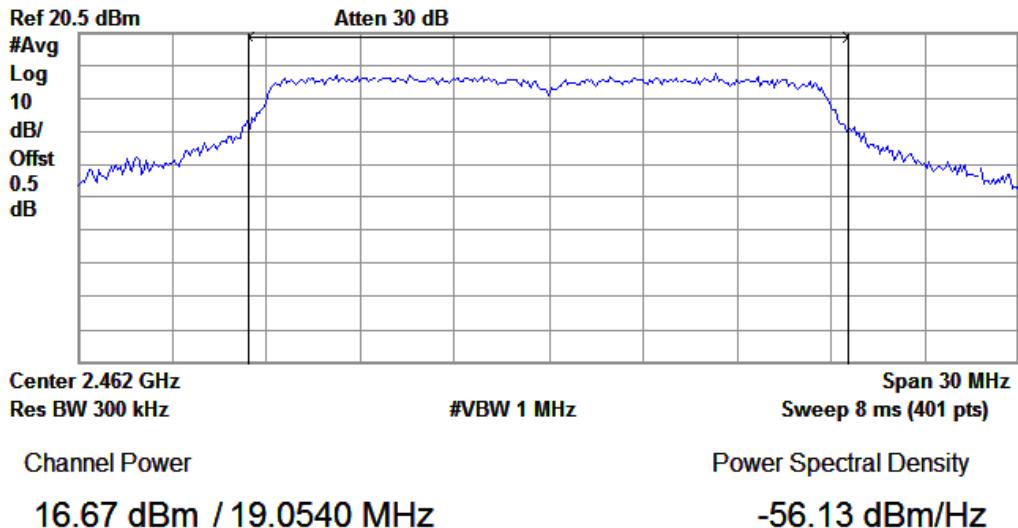


802.11n40 Low Channel

* Agilent


R T

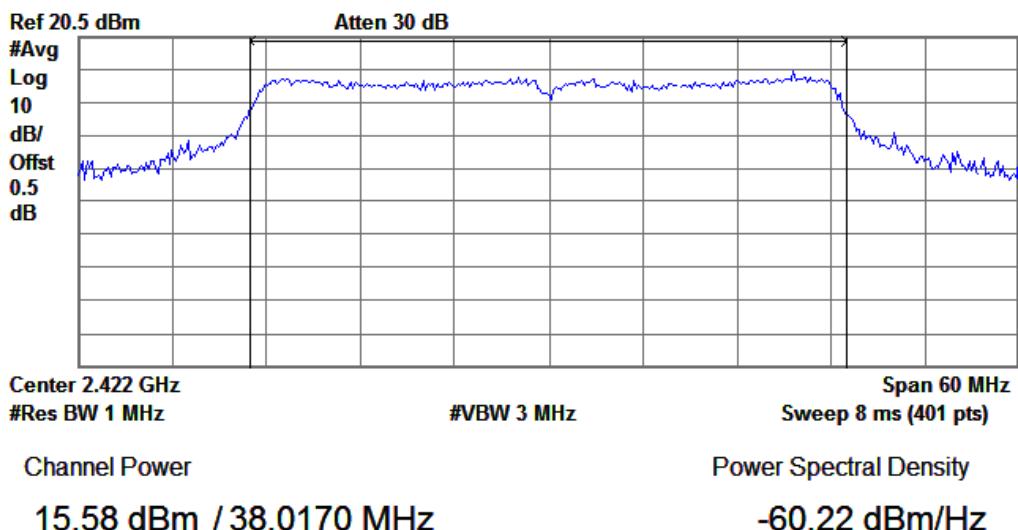

802.11n40 Middle Channel

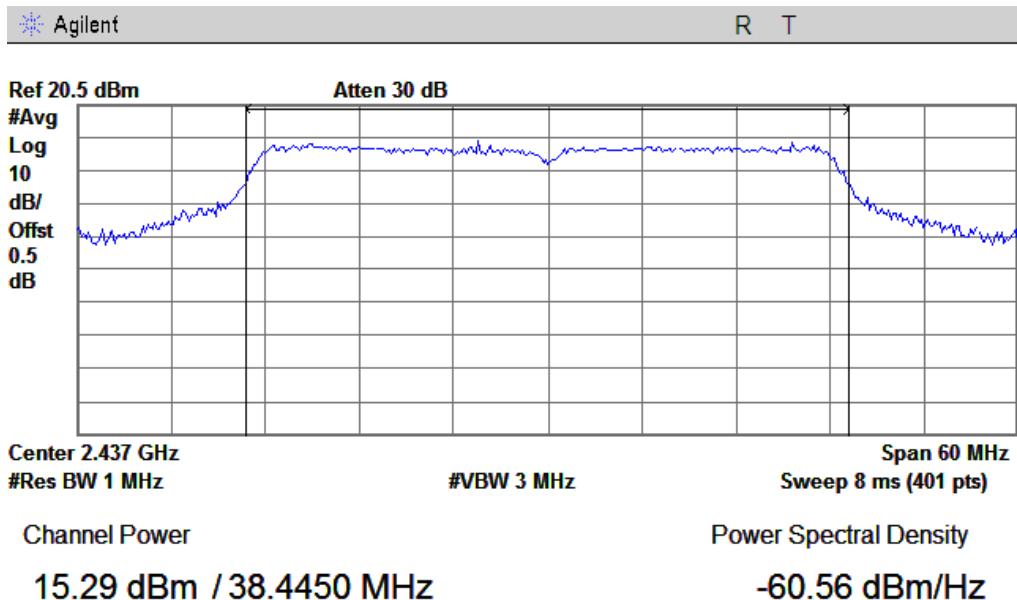

802.11n40 High Channel


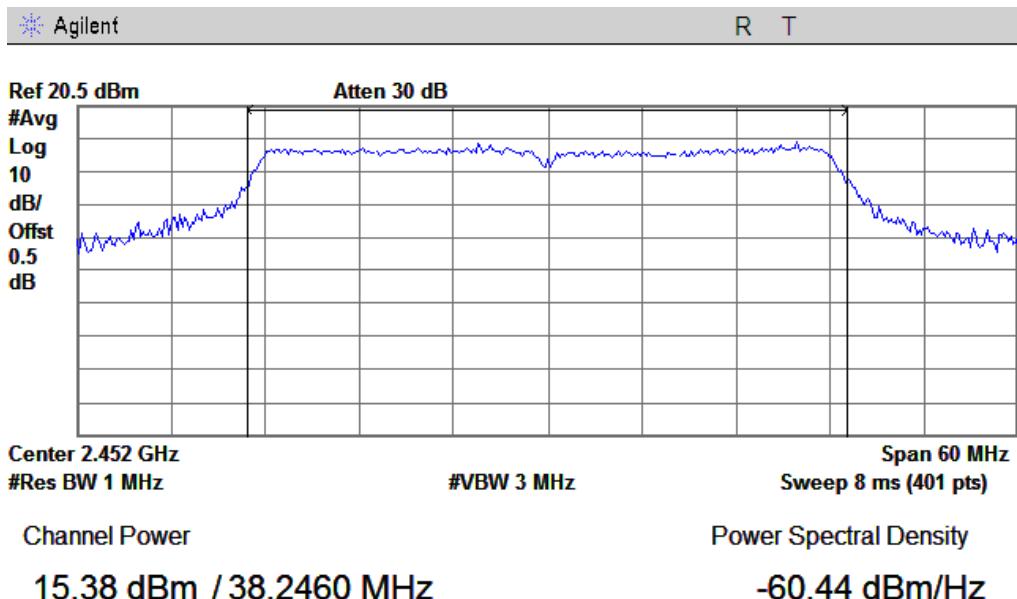


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 79 of 224
www.siemic.com.cn

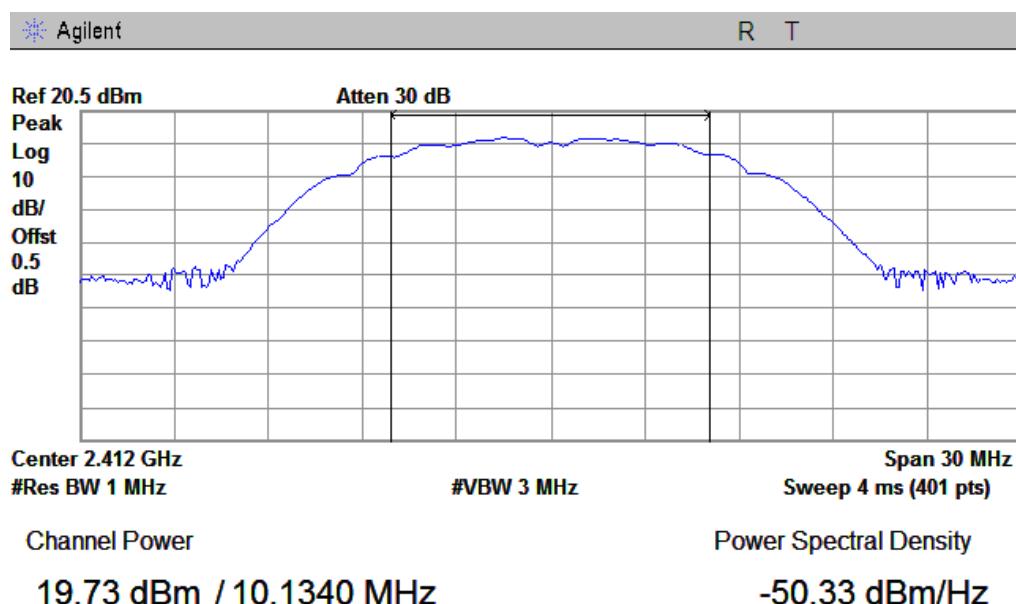
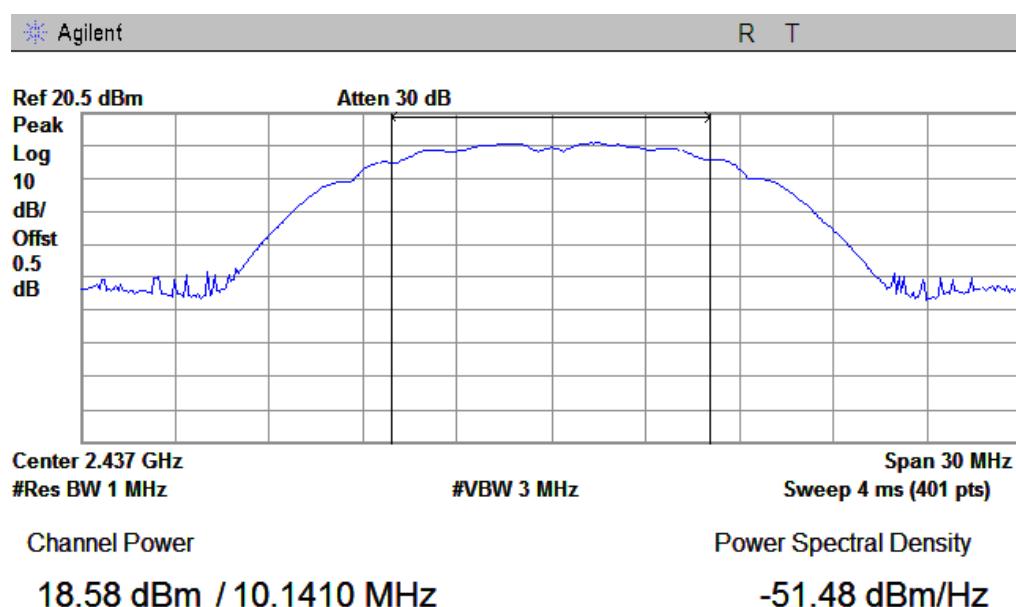
RF Port CH2**The Peak Power****802.11b Low Channel****802.11b Middle Channel**

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 80 of 224
www.siemic.com.cn

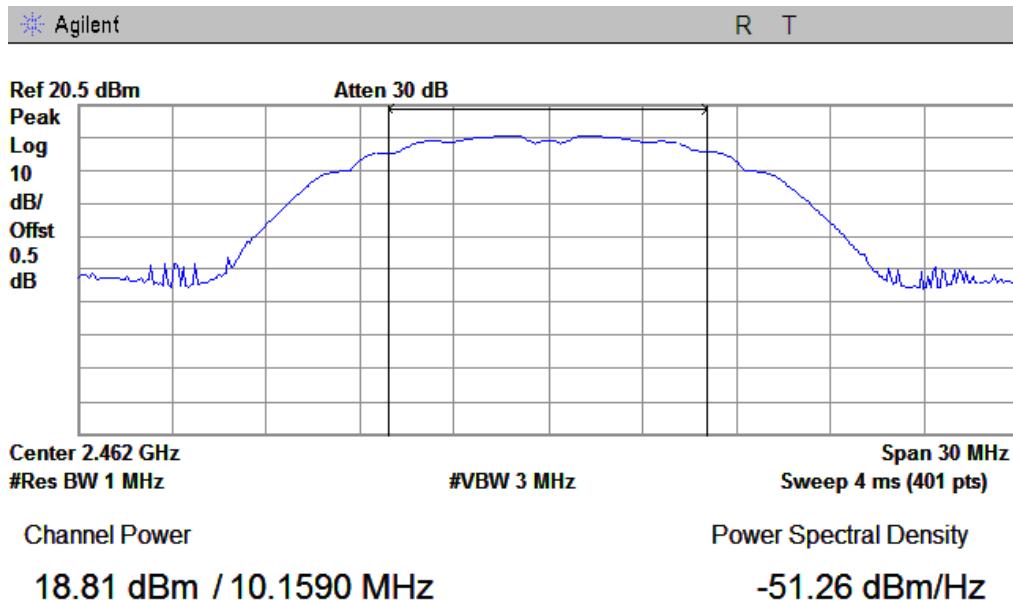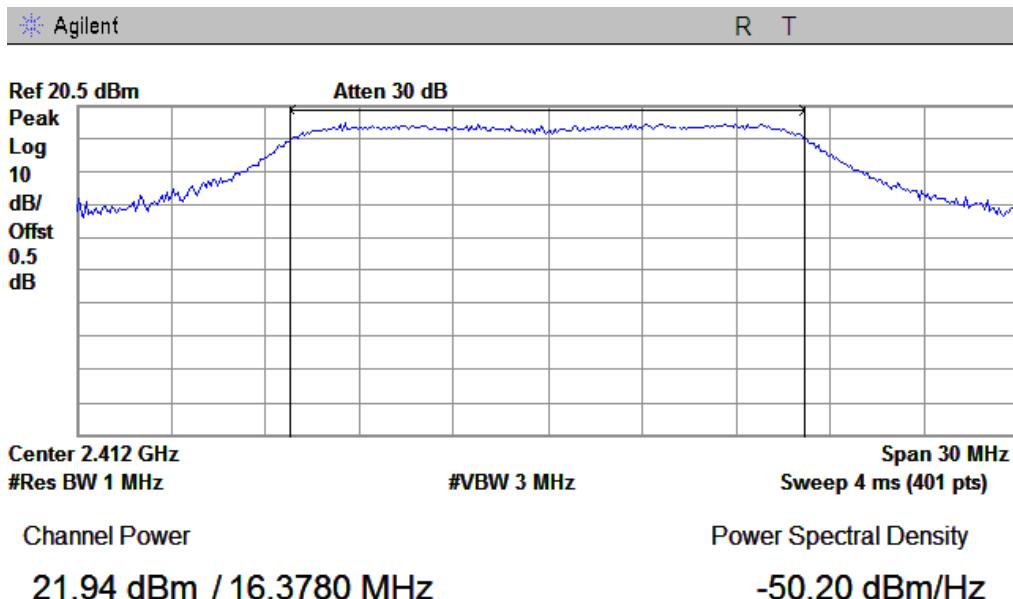802.11b High Channel**802.11g Low Channel**


802.11g Middle Channel

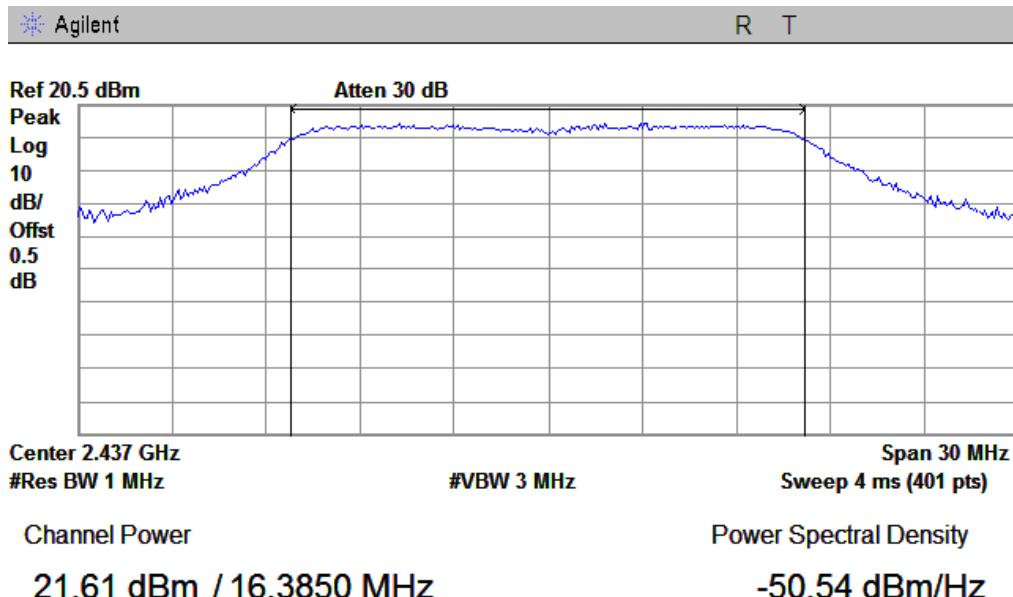


802.11g High Channel

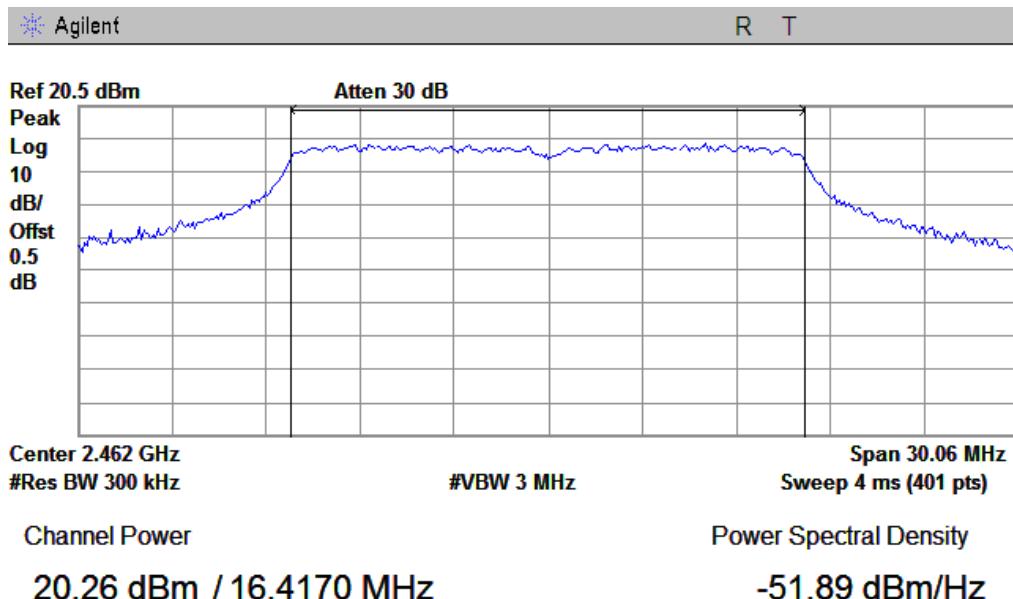


802.11n20 Low Channel

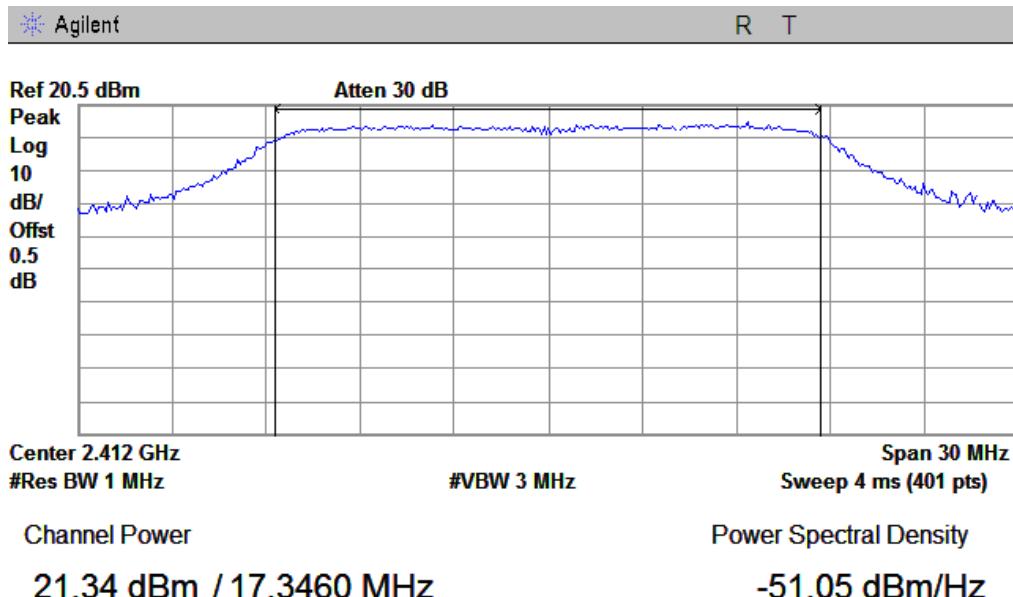


802.11n20 Middle Channel

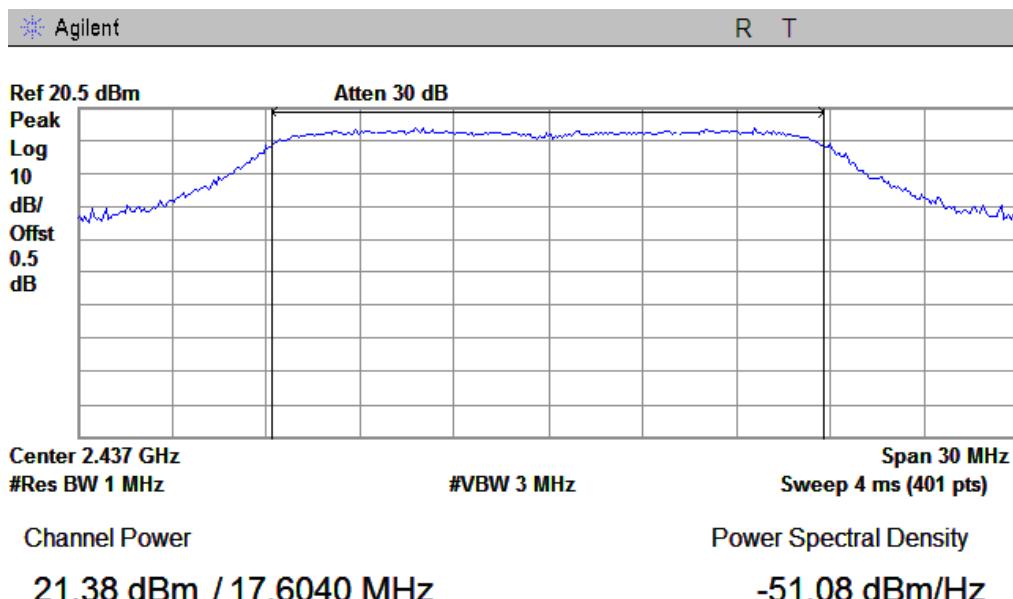

802.11n20 High Channel

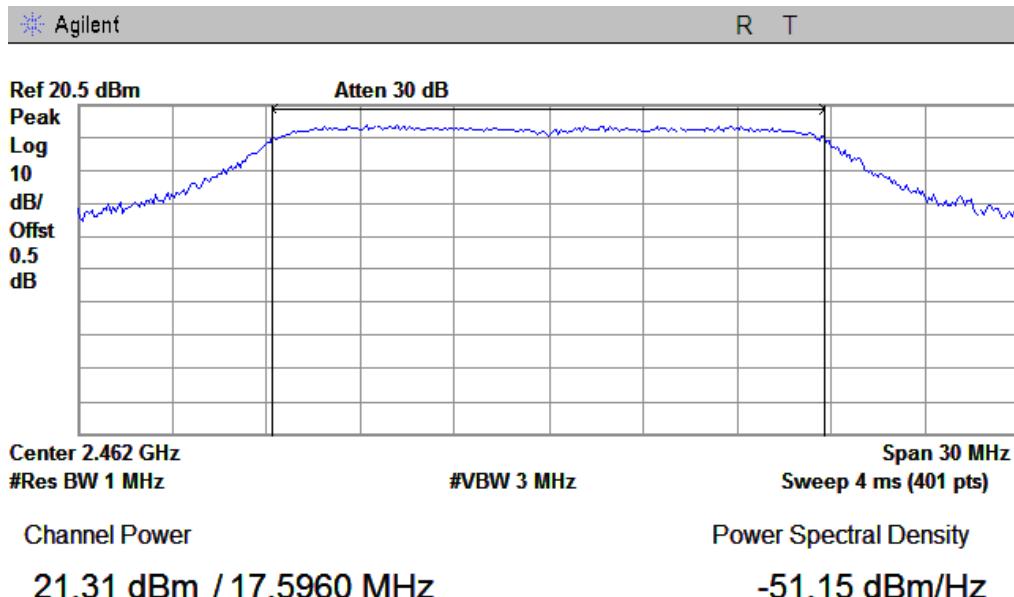

802.11n40 Low Channel

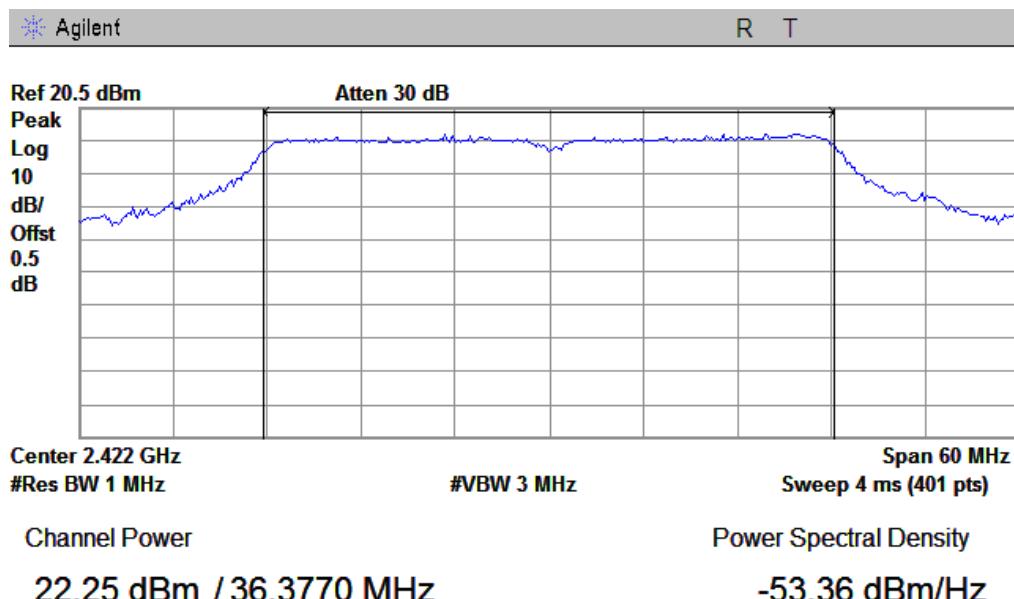


**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 84 of 224
www.siemic.com.cn

802.11n40 Middle Channel

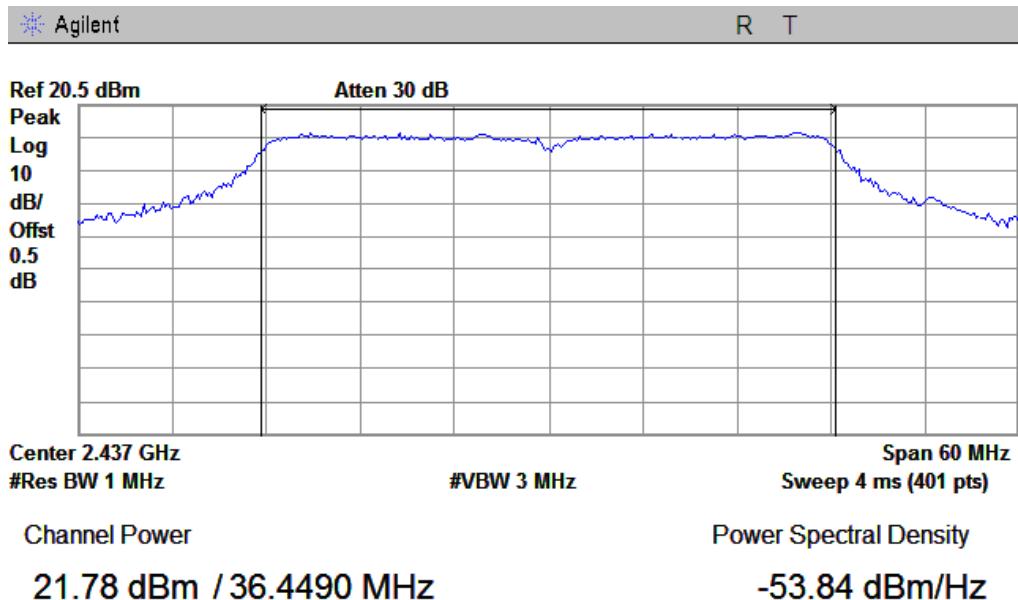

802.11n40 High Channel


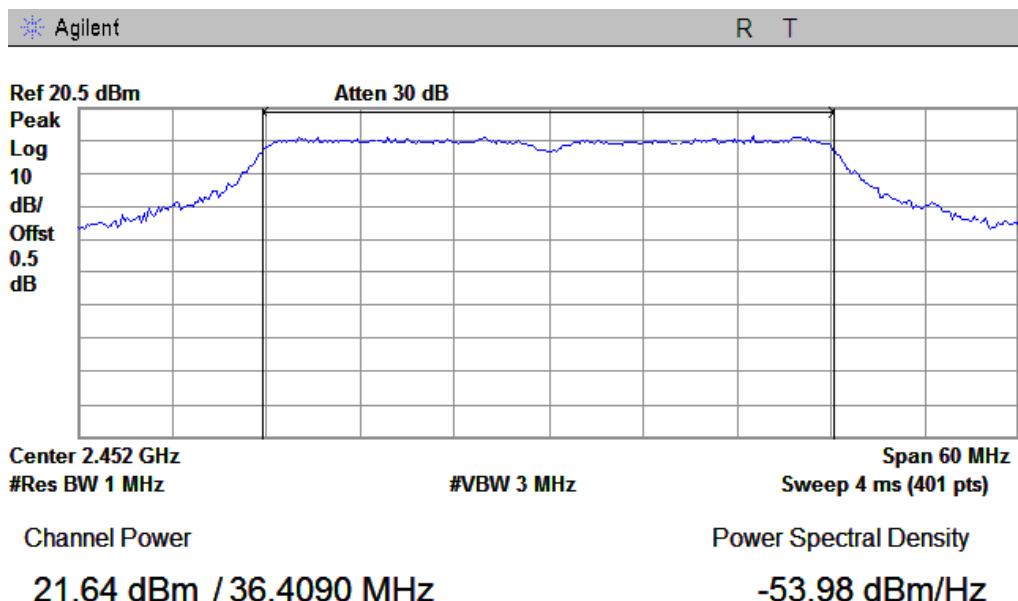


**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 85 of 224
www.siemic.com.cn

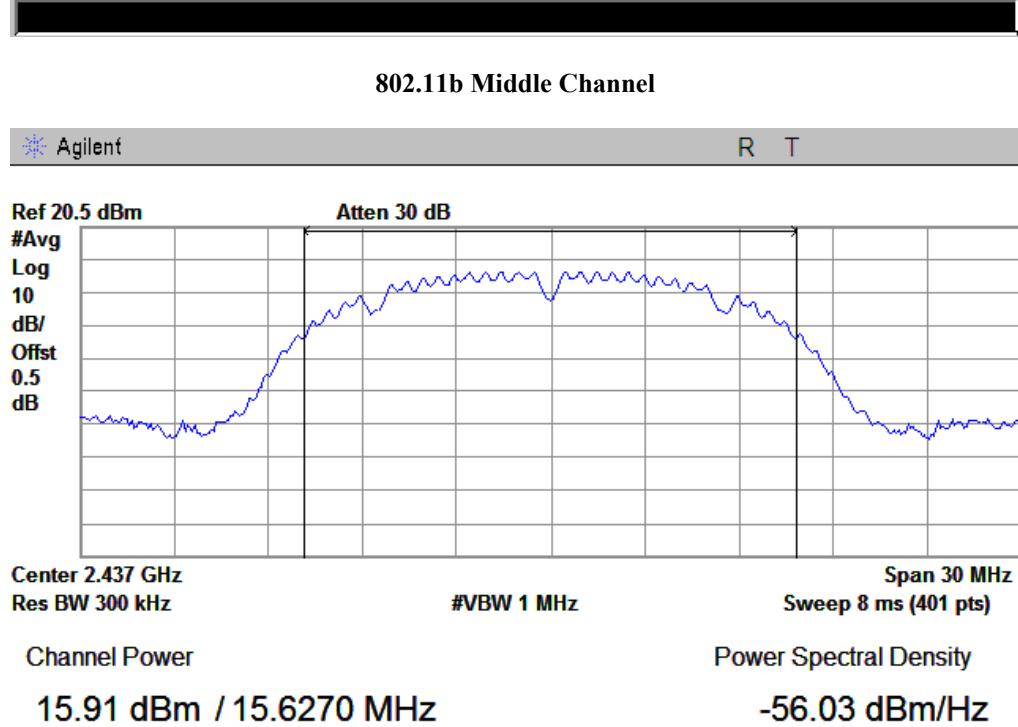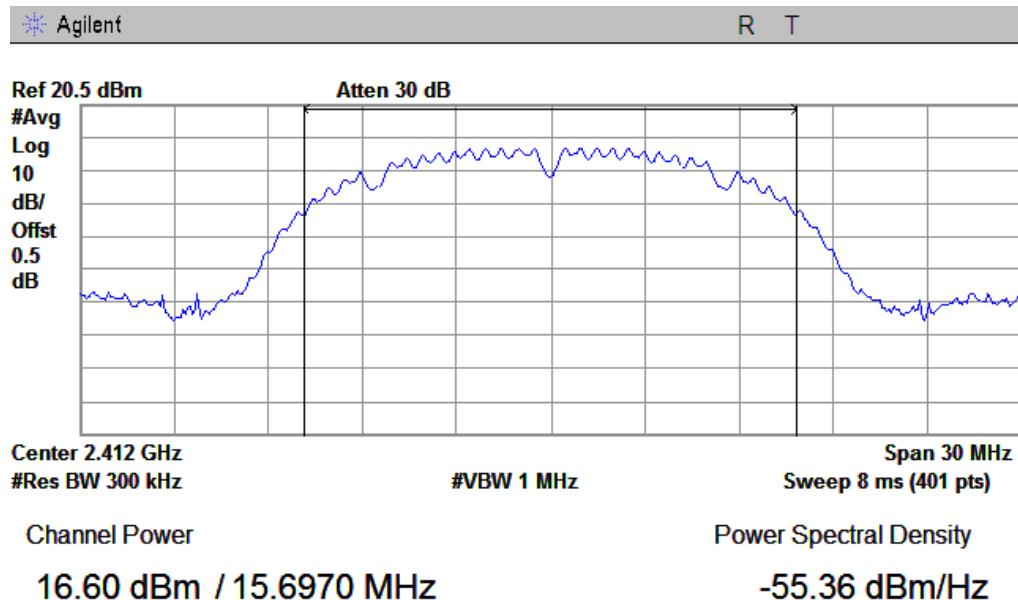The Average Power**802.11b Low Channel**


802.11b High Channel

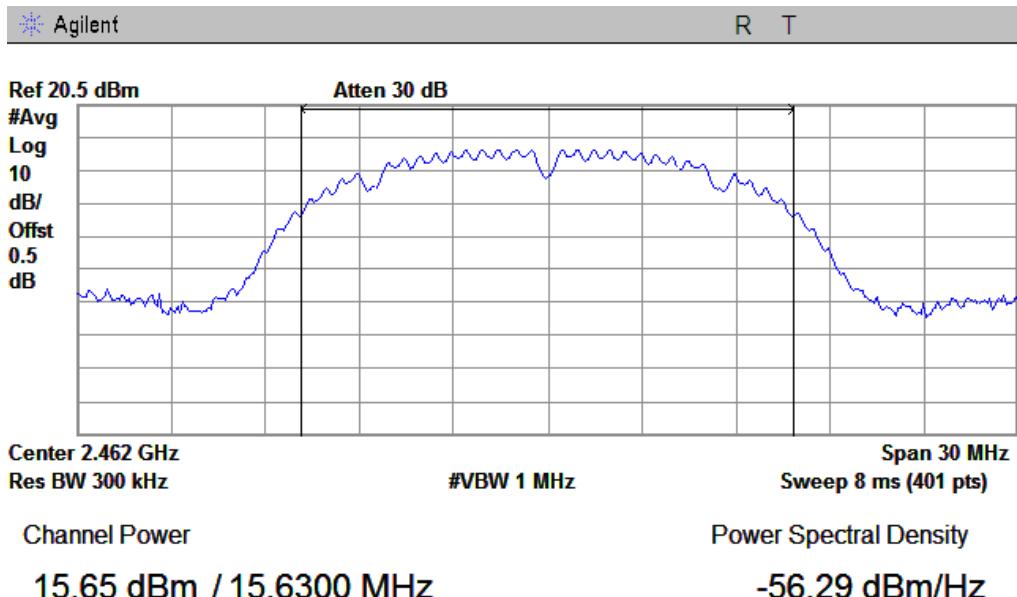


802.11g Low Channel

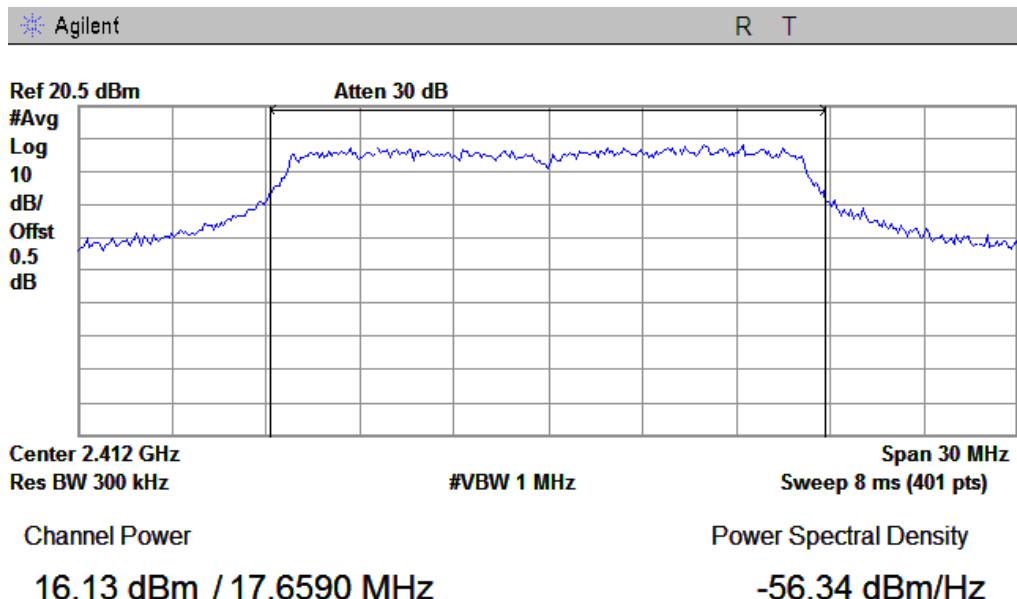


802.11g Middle Channel

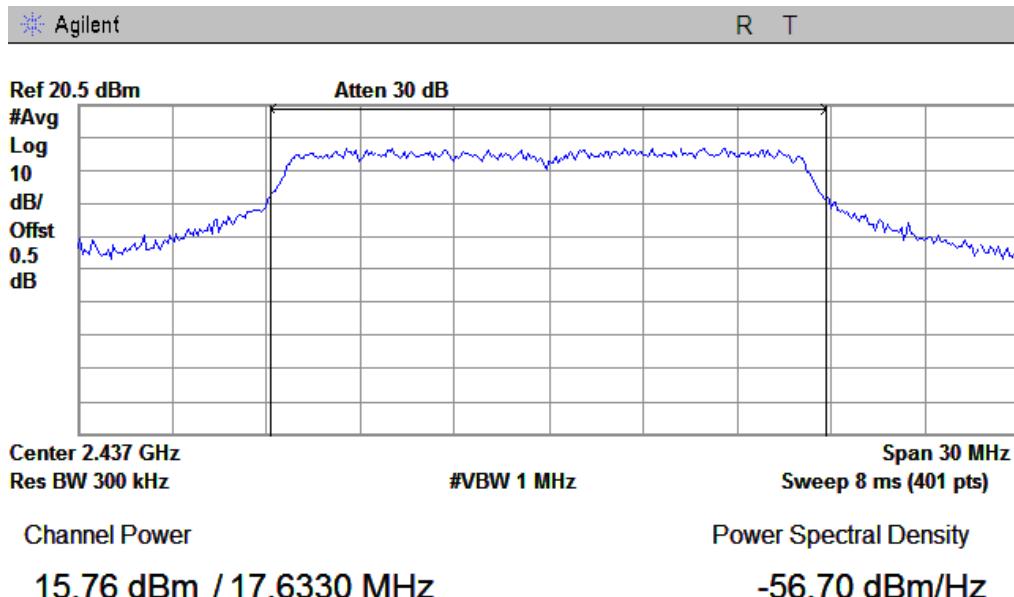


802.11g High Channel

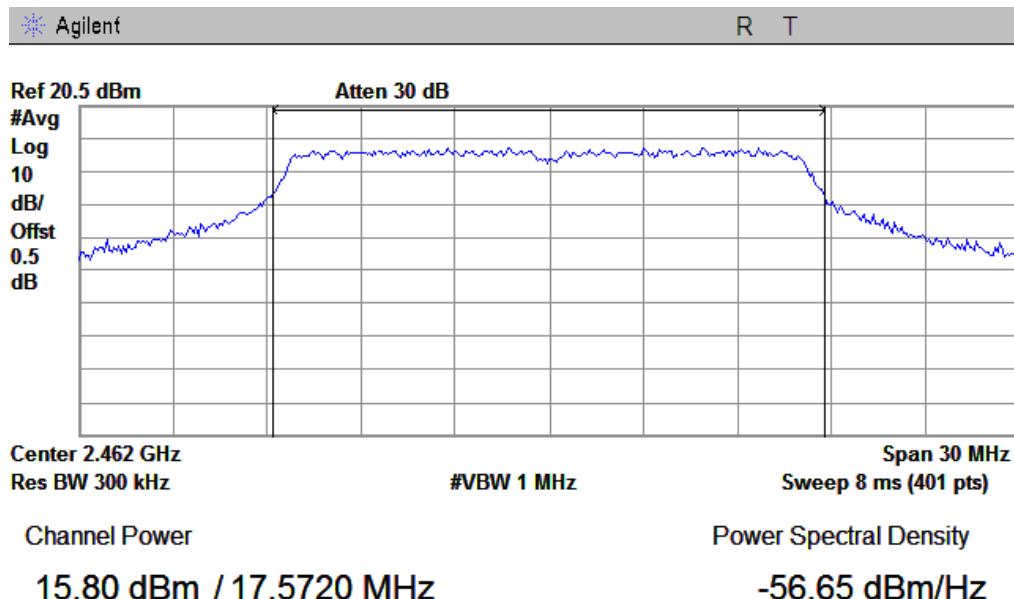

802.11n20 Low Channel

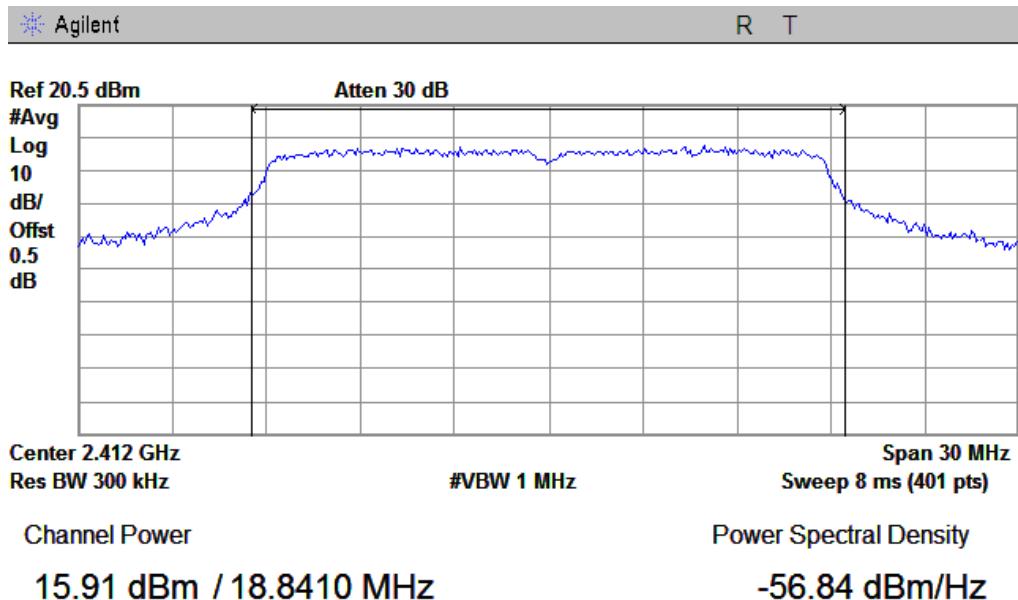


802.11n20 Middle Channel

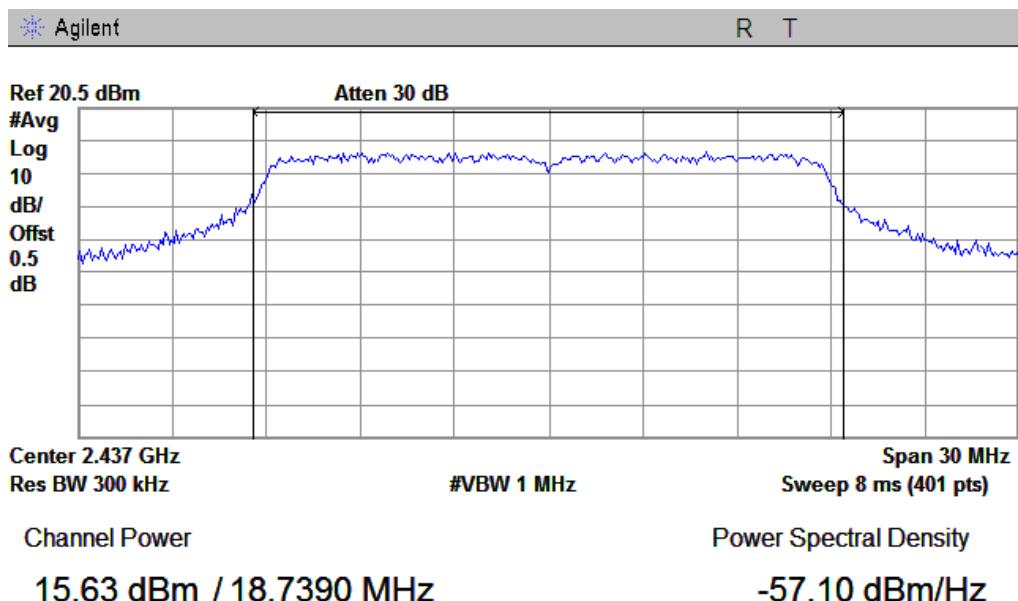

802.11n20 High Channel


Agilent

R T

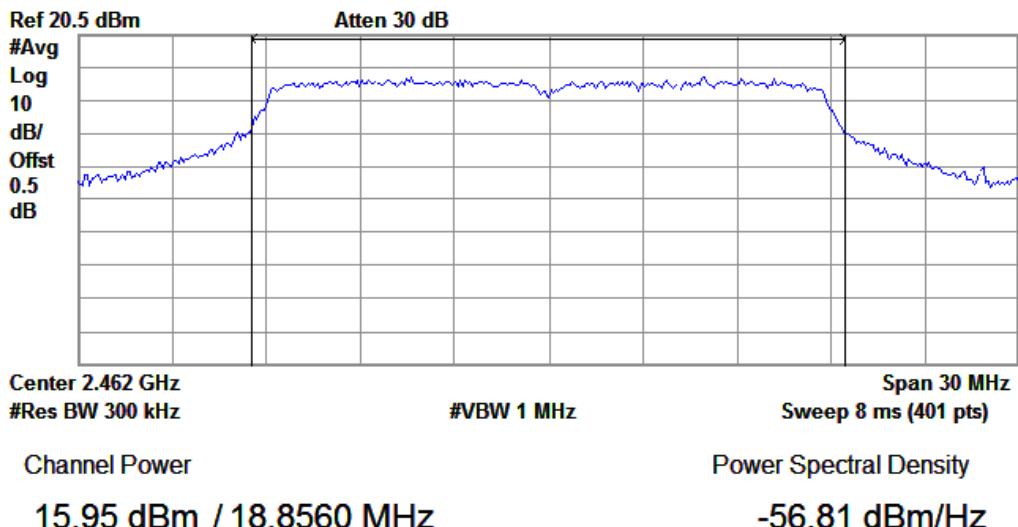


Agilent


R T

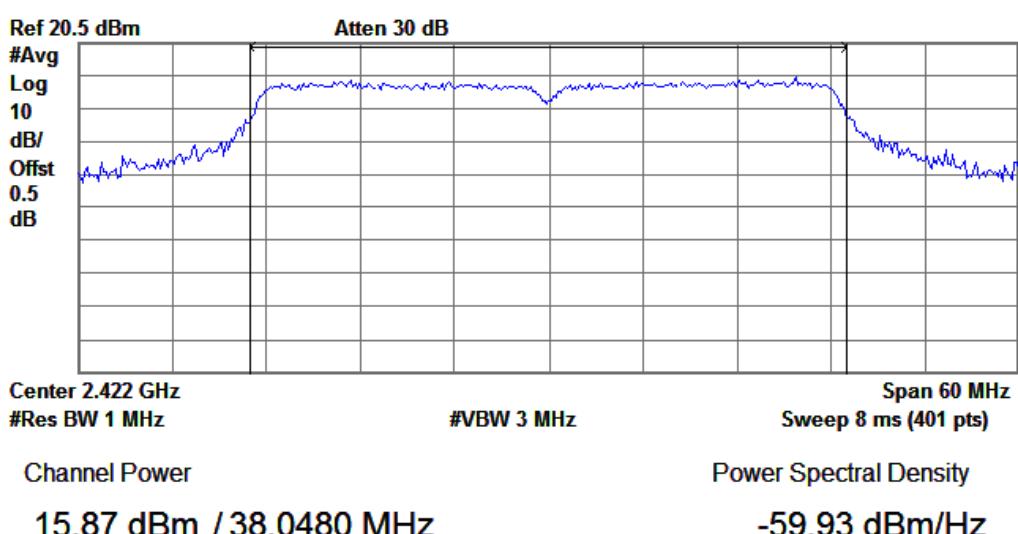

802.11n40 Middle Channel

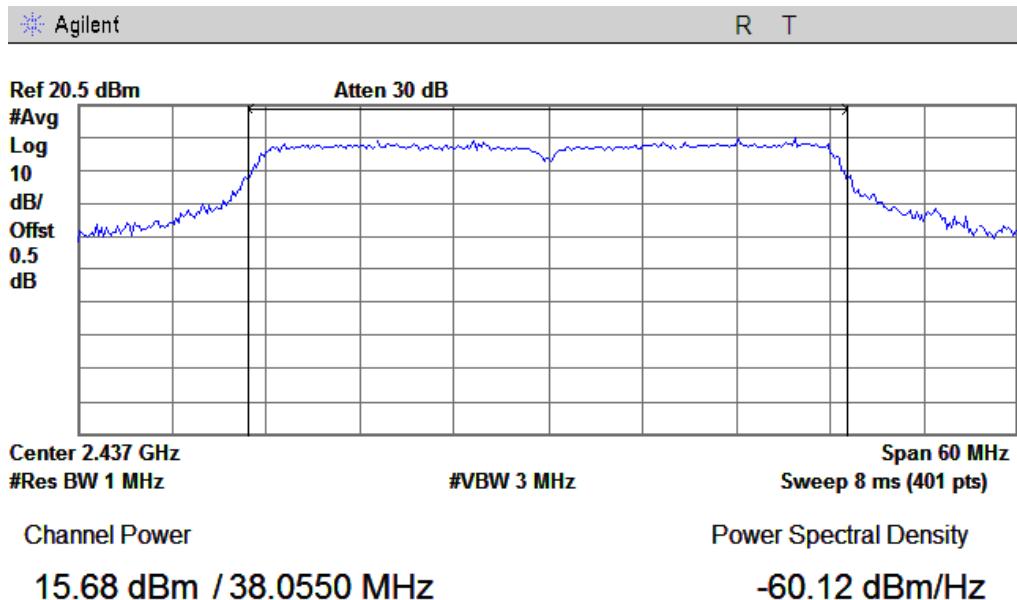

802.11n40 High Channel

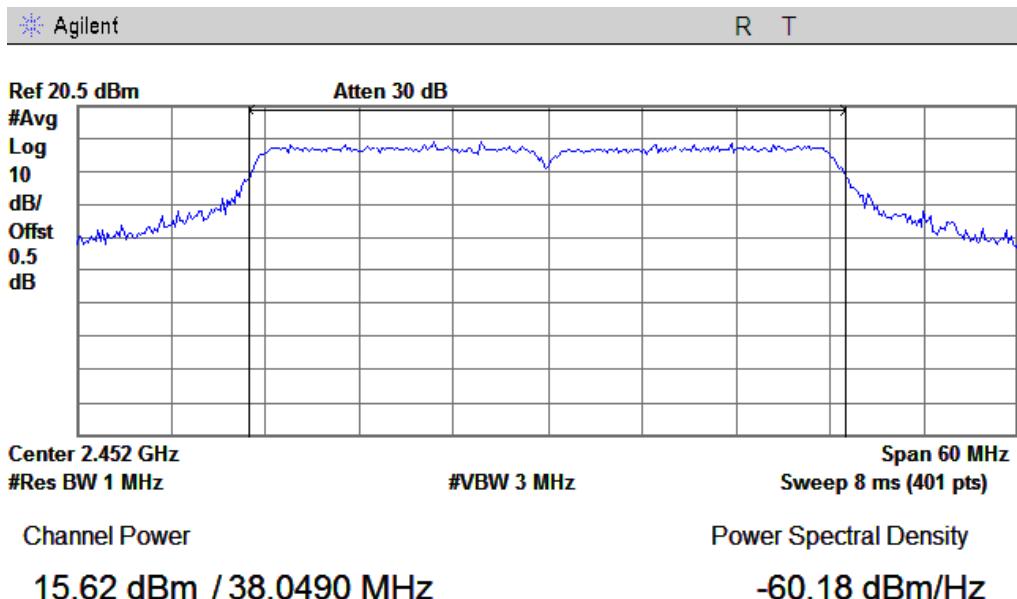

5.4 §15.247(e) - Power Spectral Density (For 2.4GHz Band)

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1001mbar

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.

4. Test date : October 30, 2013

Tested By : Herith Shi

Requirement(s):

A conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the DTS bandwidth is specified during any time interval of continuous transmission.⁴ By rule, the same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if maximum peak conducted output power was measured then the peak PSD procedure shall be used and if maximum conducted output power was measured then the average PSD procedure shall be used).

If the average PSD is measured with a power averaging (RMS) detector or a sample detector, then the spectrum analyzer must be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW in order to ensure bin-to-bin spacing of $\leq \text{RBW}/2$ so that narrowband signals are not lost between frequency bins.

Procedures:

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Result: Pass.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 92 of 224
www.siemic.com.cn

Please refer to the following tables and plots.



802.11b mode					
Data Rate: 1Mbps					
Channel	PSD (dBm)			Total PSD (dBm)	Limit (dBm)
	CH0	CH1	CH2		
2412	-0.532	-0.601	-0.463	4.24	8
2437	-0.278	-0.170	-1.287	4.22	8
2462	-0.596	-0.224	-1.205	4.11	8
802.11g mode					
Data Rate: 6Mbps					
Channel	PSD (dBm)			Total PSD (dBm)	Limit (dBm)
	CH0	CH1	CH2		
2412	-2.159	-1.524	-1.516	3.05	8
2437	-1.839	-1.909	-2.085	2.83	8
2462	-2.253	-1.738	-1.791	2.85	8
802.11n20 mode					
Data Rate: 7.2Mbps					
Channel	PSD (dBm)			Total PSD (dBm)	Limit (dBm)
	CH0	CH1	CH2		
2412	-1.952	-2.529	-2.780	2.36	8
2437	-1.932	-3.154	-2.795	2.17	8
2462	-2.053	-2.849	-2.891	2.19	8
802.11n40 mode					
Data Rate: 15Mbps					
Channel	PSD (dBm)			Total PSD (dBm)	Limit (dBm)
	CH0	CH1	CH2		
2422	-4.030	-4.865	-4.956	0.17	8
2437	-4.608	-5.089	-4.474	0.06	8
2452	-4.839	-5.269	-5.331	-0.37	8

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 93 of 224
www.siemic.com.cn

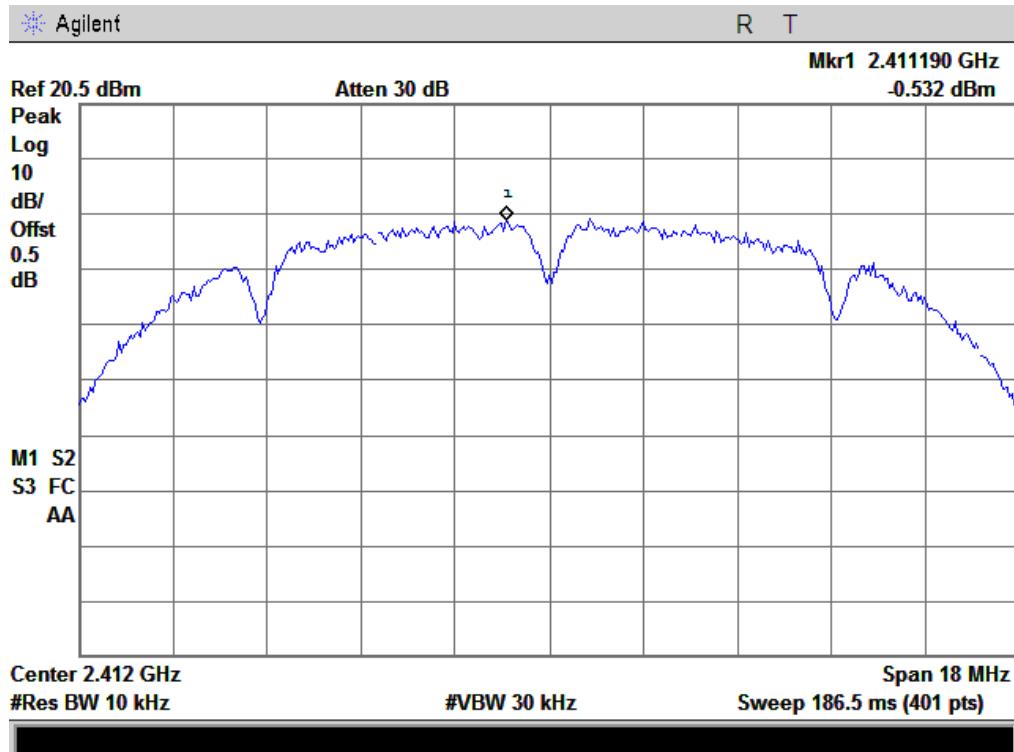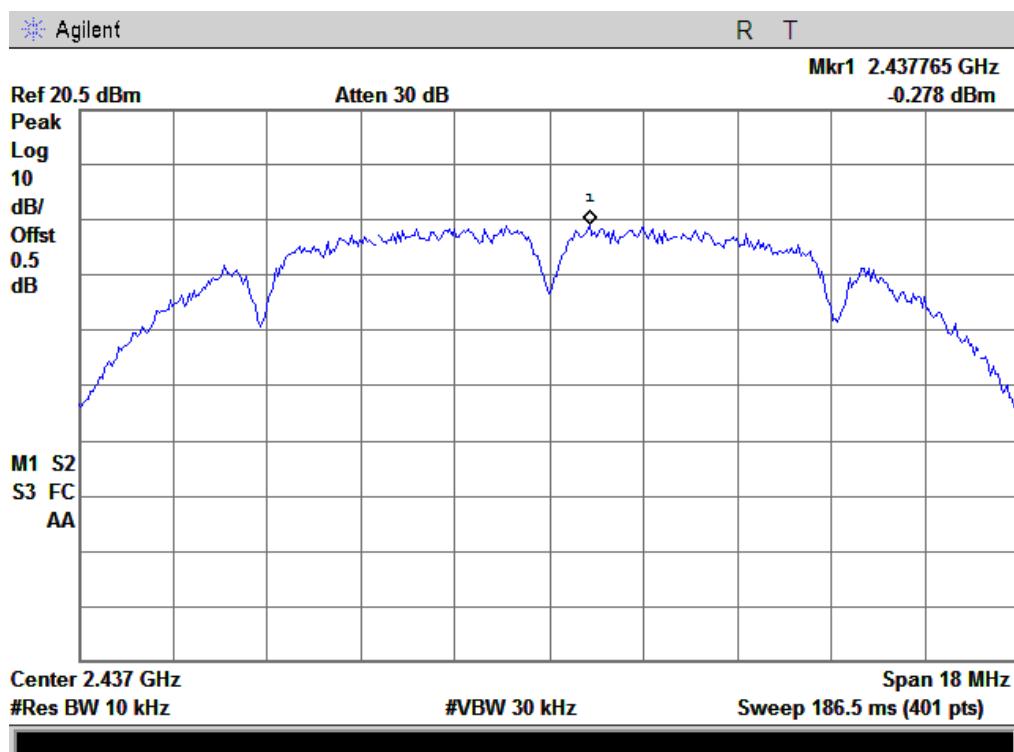RF Port CH0**Power Spectral Density, 802.11b Low Channel****Power Spectral Density, 802.11b Middle Channel**

Power Spectral Density, 802.11b High Channel

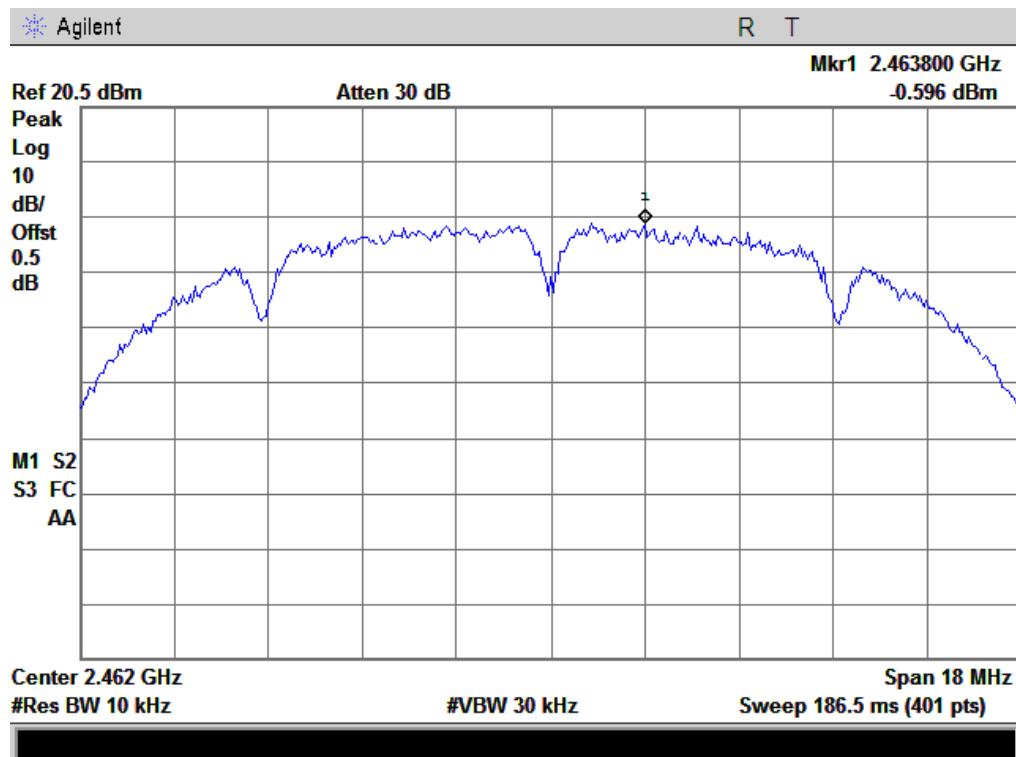

Power Spectral Density, 802.11g Low Channel

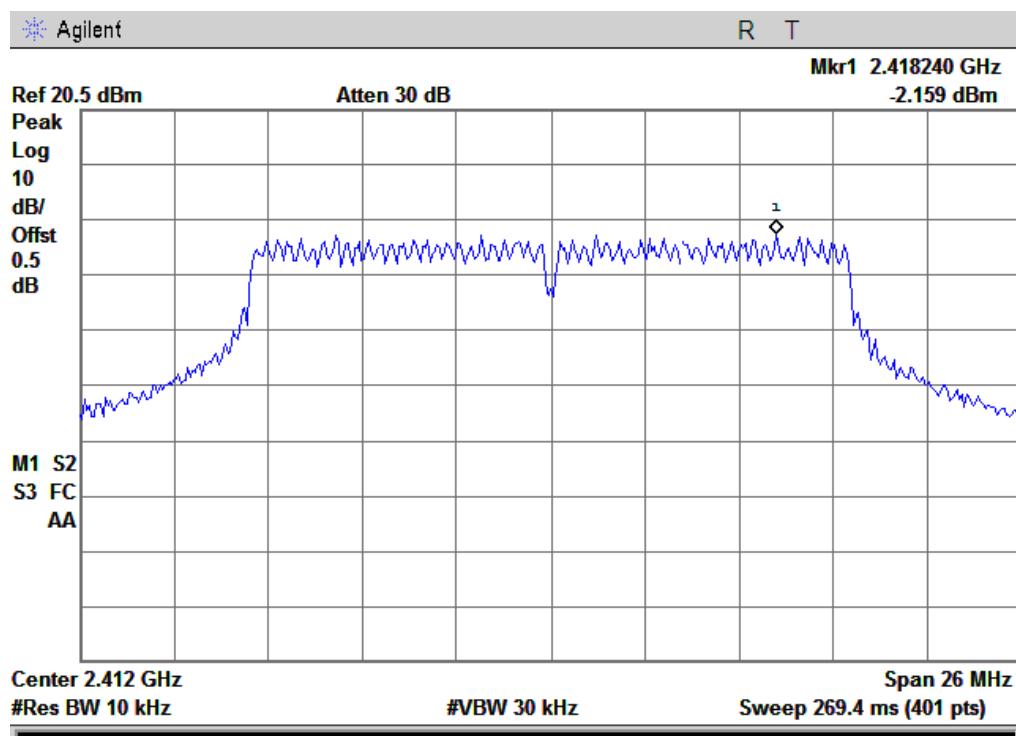


**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 95 of 224
www.siemic.com.cn


Power Spectral Density, 802.11g Middle Channel

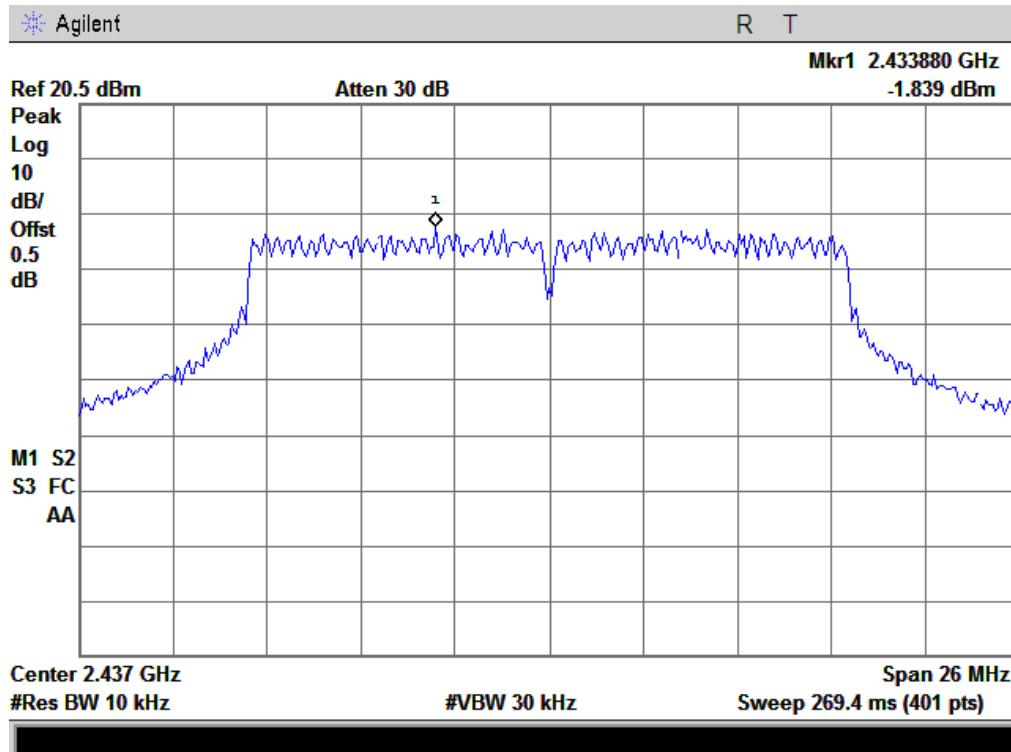


Power Spectral Density, 802.11g High Channel

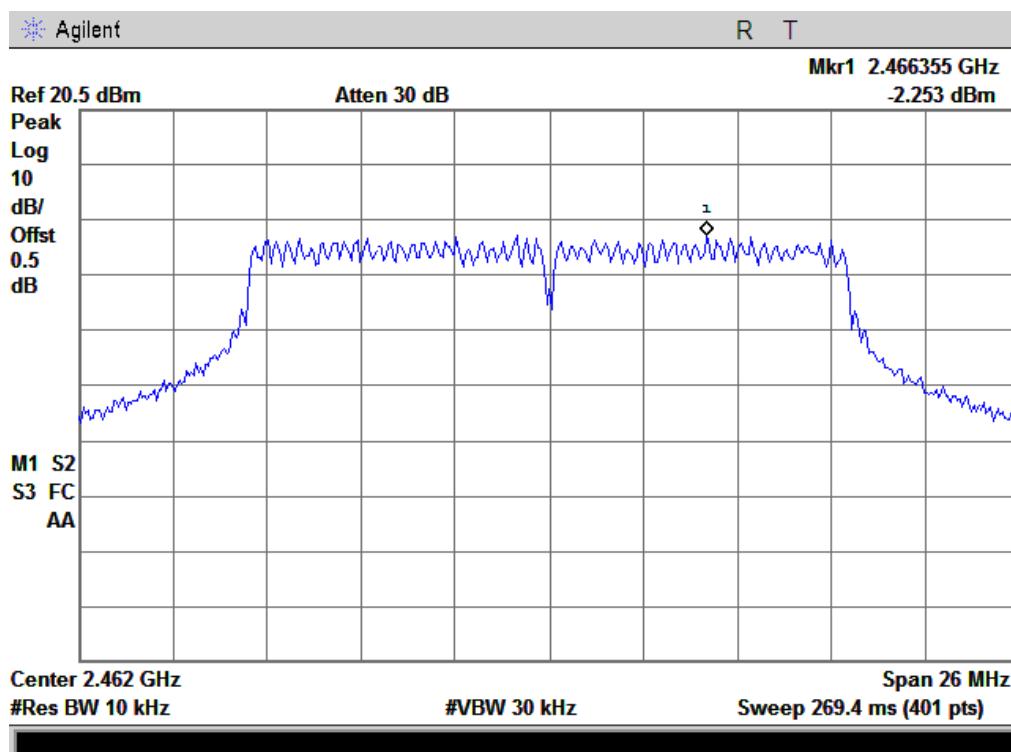


Power Spectral Density, 802.11n20 Low Channel

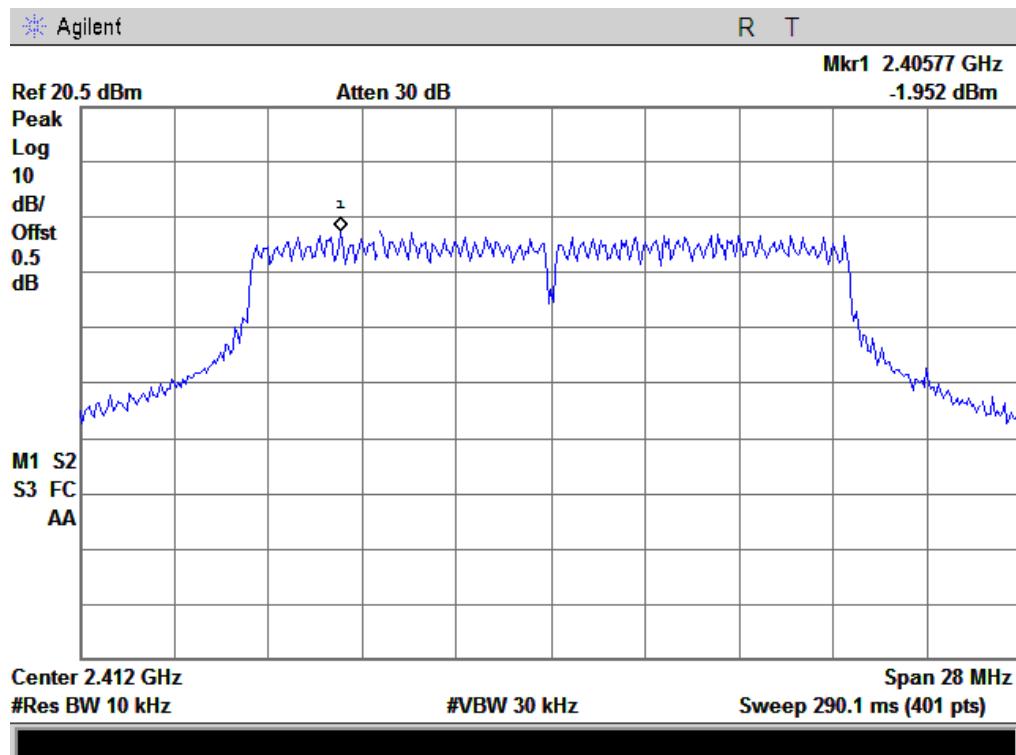


Power Spectral Density, 802.11n20 Middle Channel

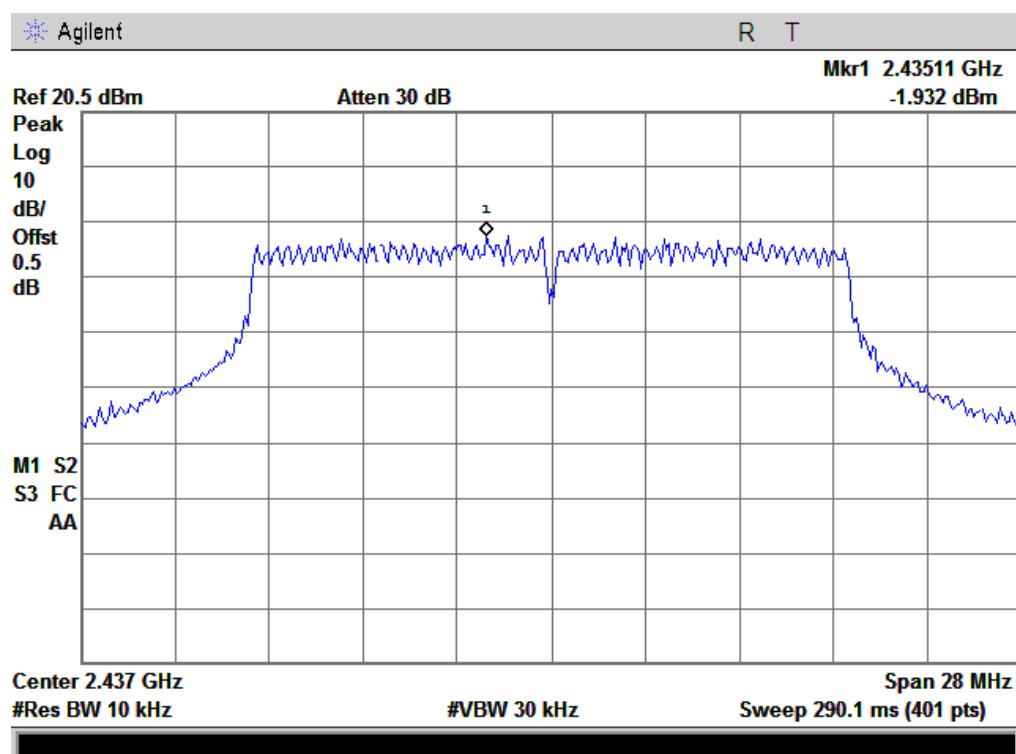


Power Spectral Density, 802.11n20 High Channel

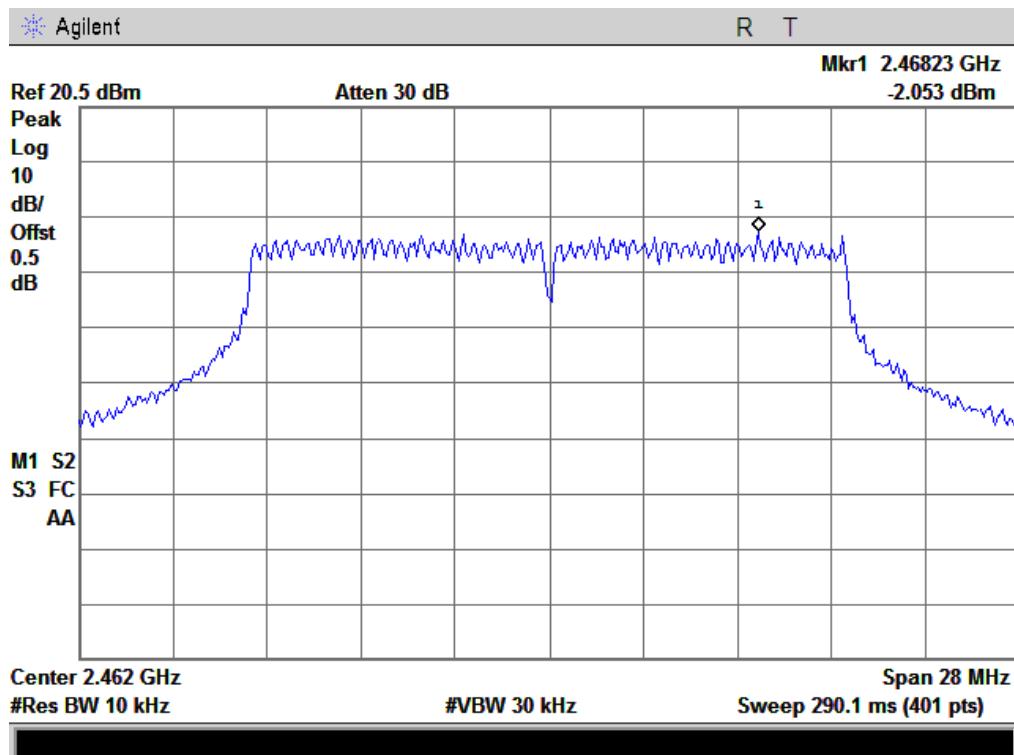


Power Spectral Density, 802.11n40 Low Channel

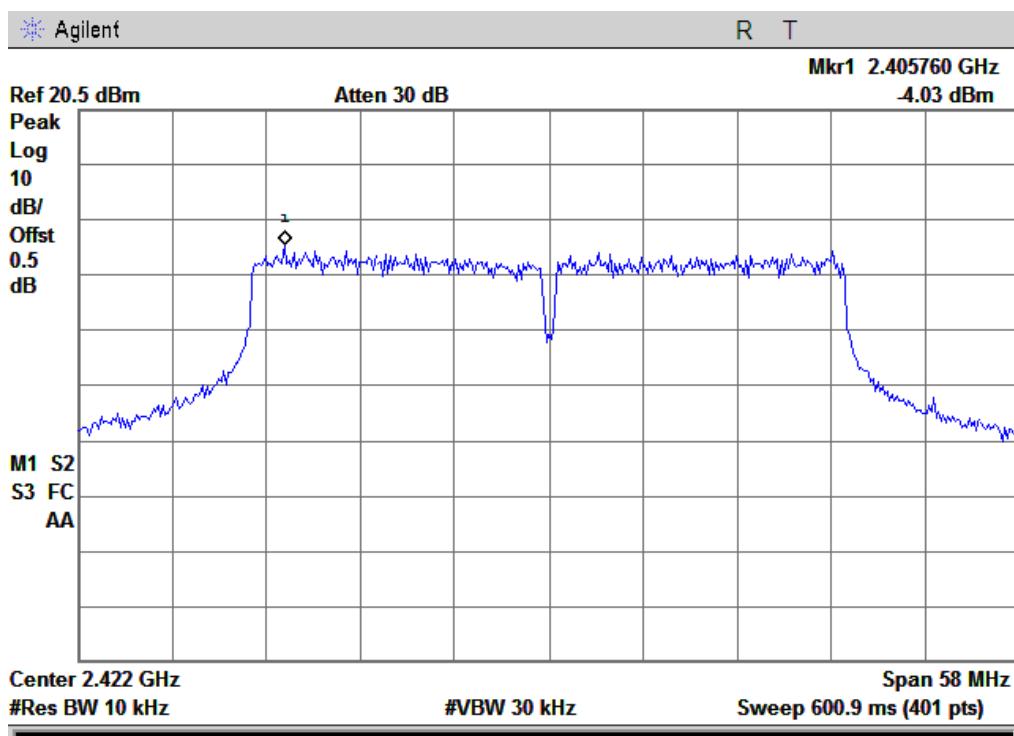

Power Spectral Density, 802.11n40 Middle Channel

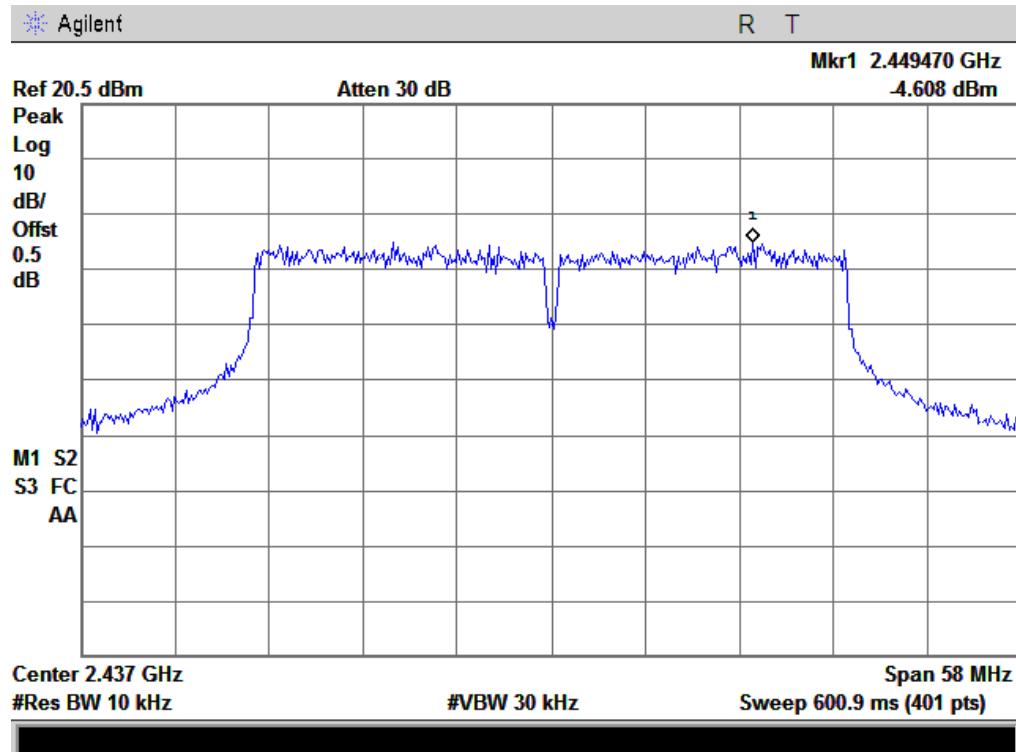

Power Spectral Density, 802.11n40 High Channel


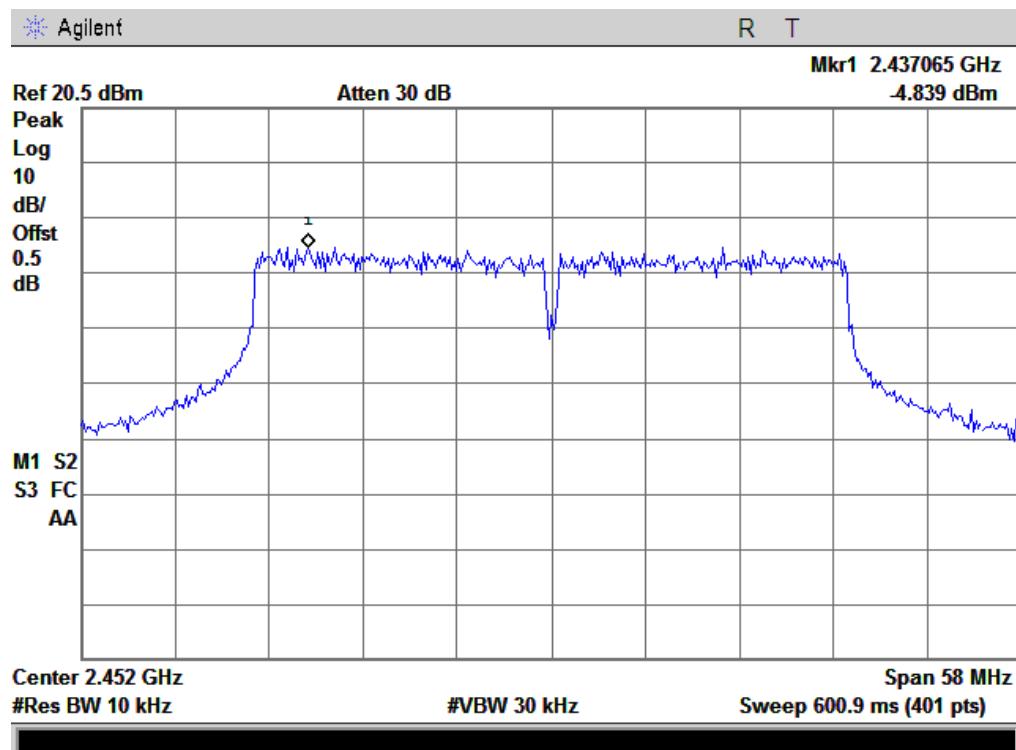


**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 99 of 224
www.siemic.com.cn

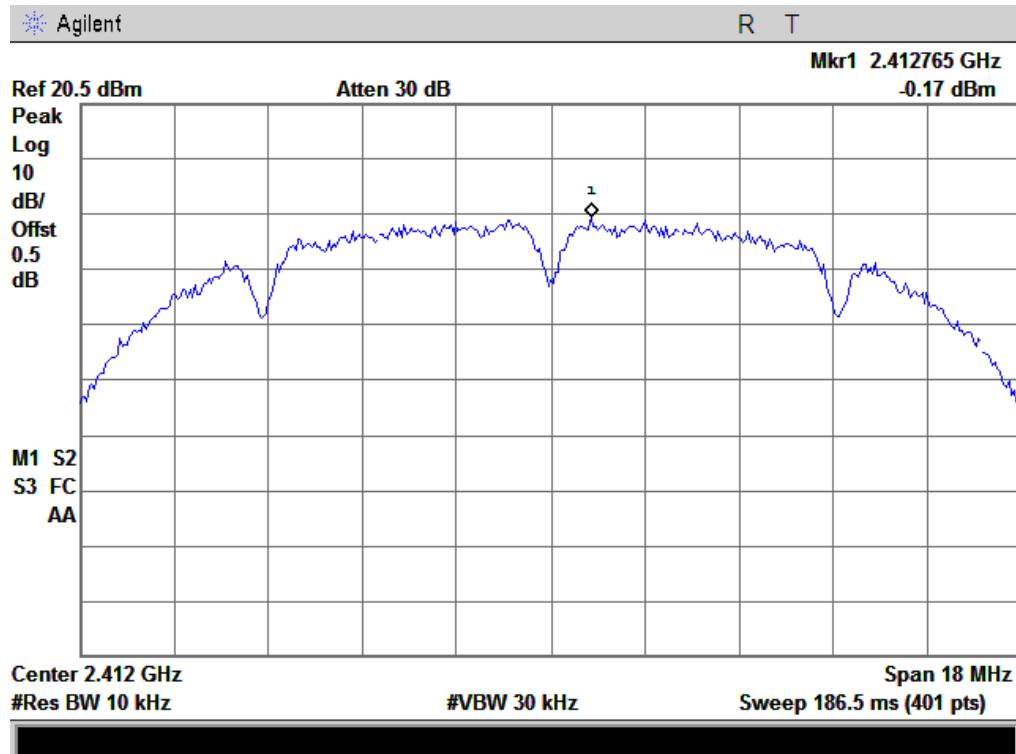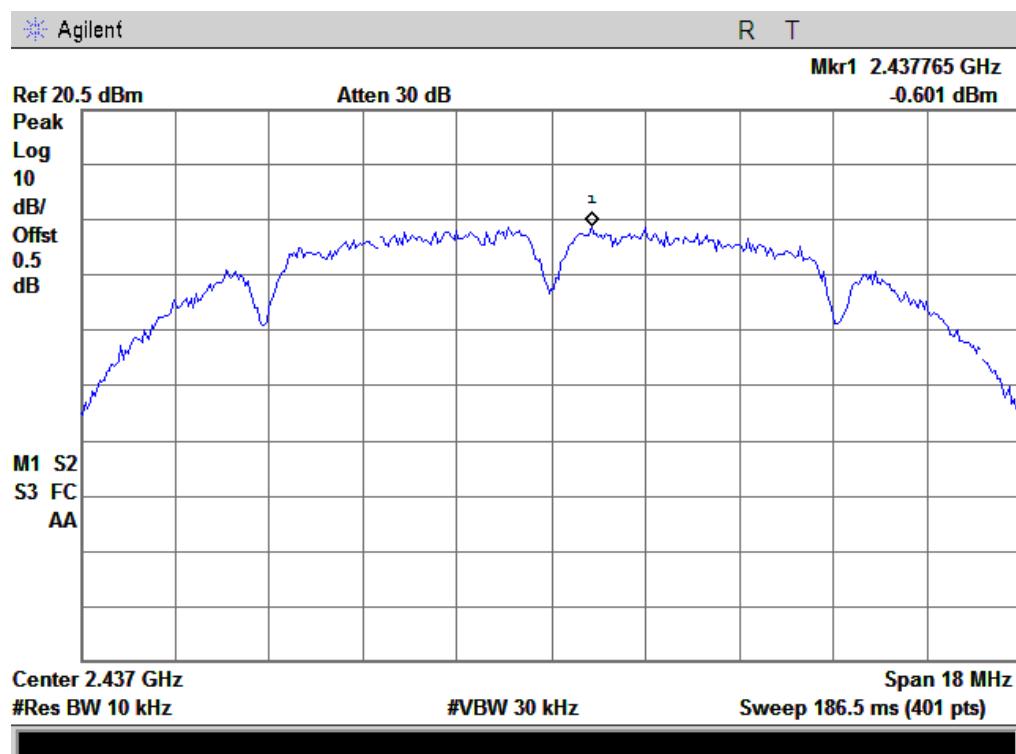RF Port CH1**Power Spectral Density, 802.11b Low Channel****Power Spectral Density, 802.11b Middle Channel**


Power Spectral Density, 802.11b High Channel

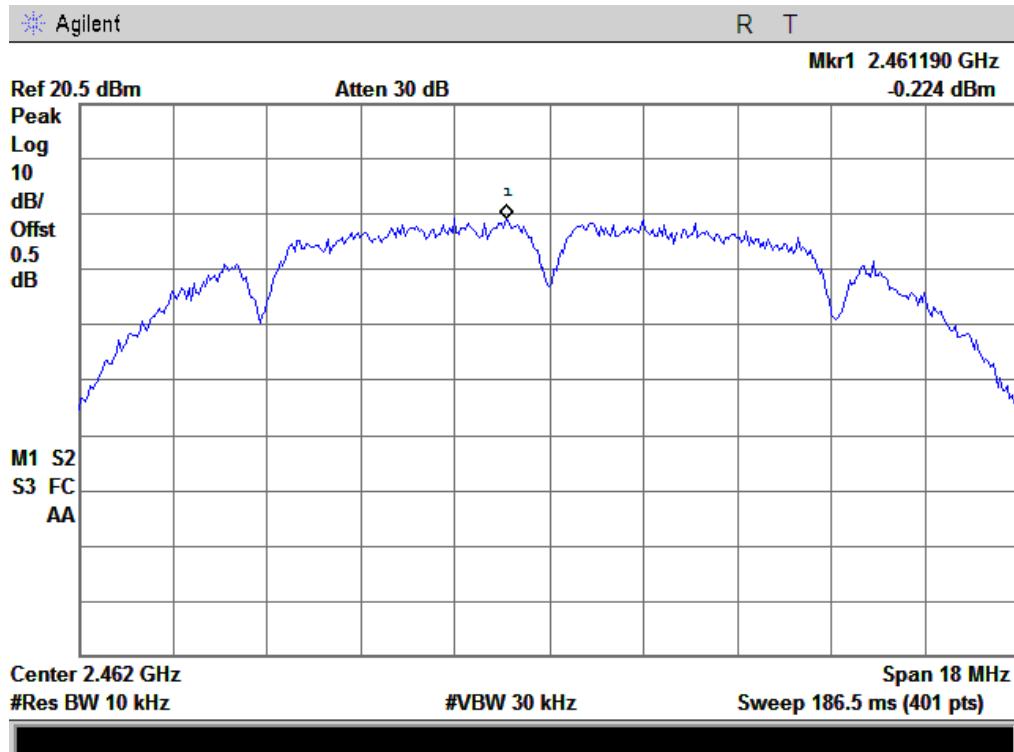


Power Spectral Density, 802.11g Low Channel

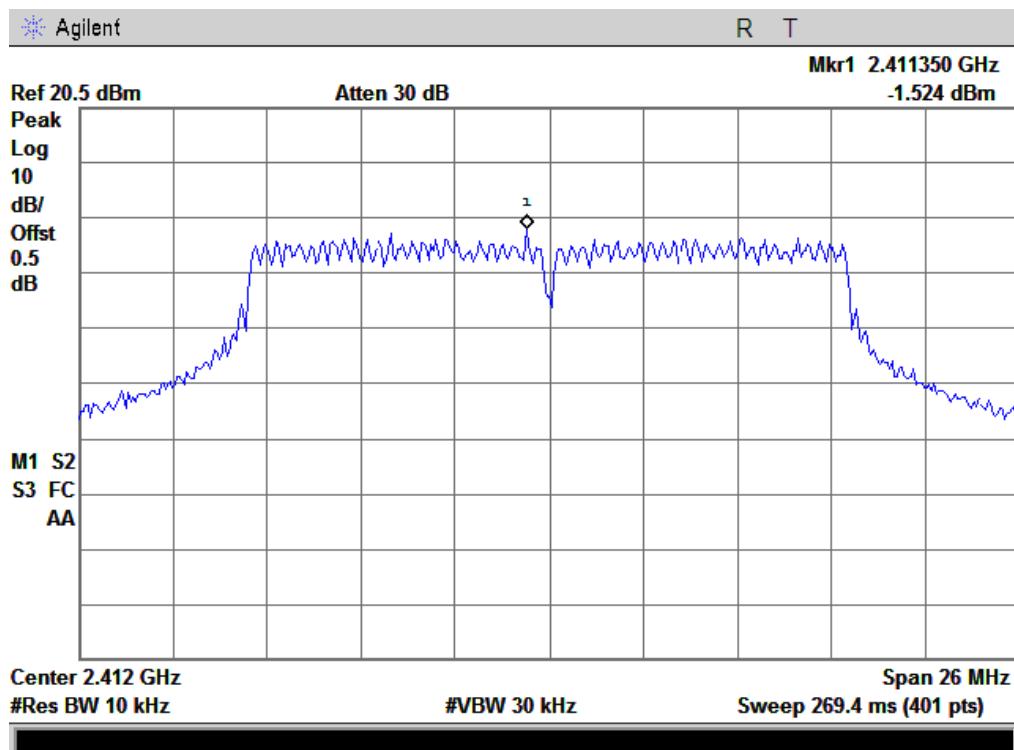


Power Spectral Density, 802.11g Middle Channel

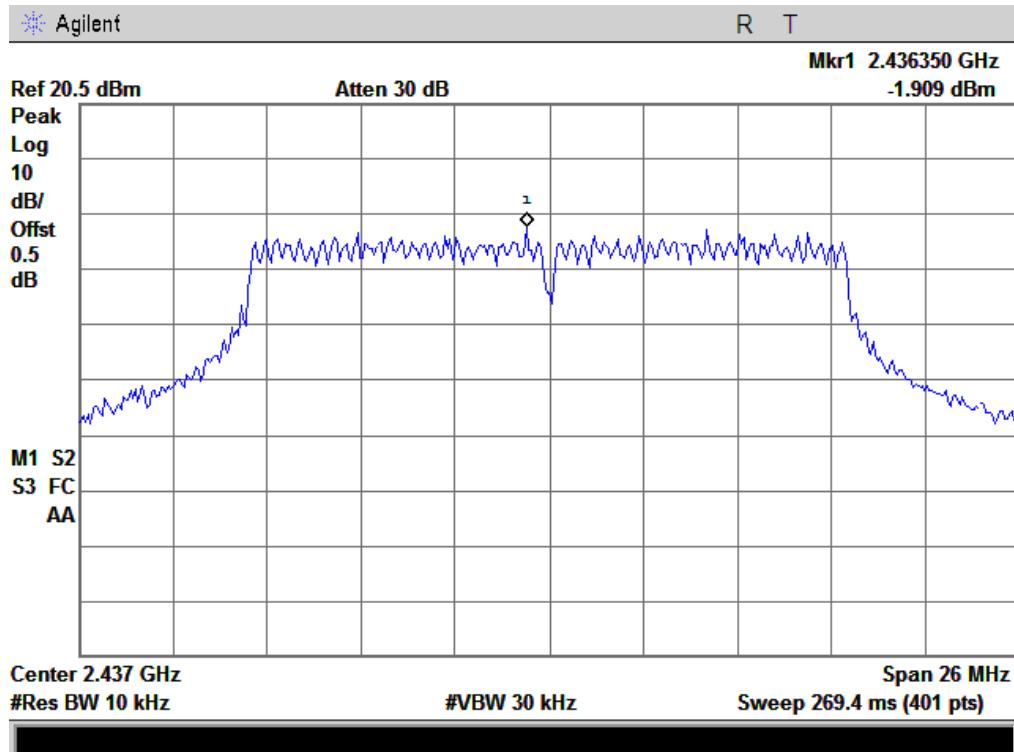


Power Spectral Density, 802.11g High Channel

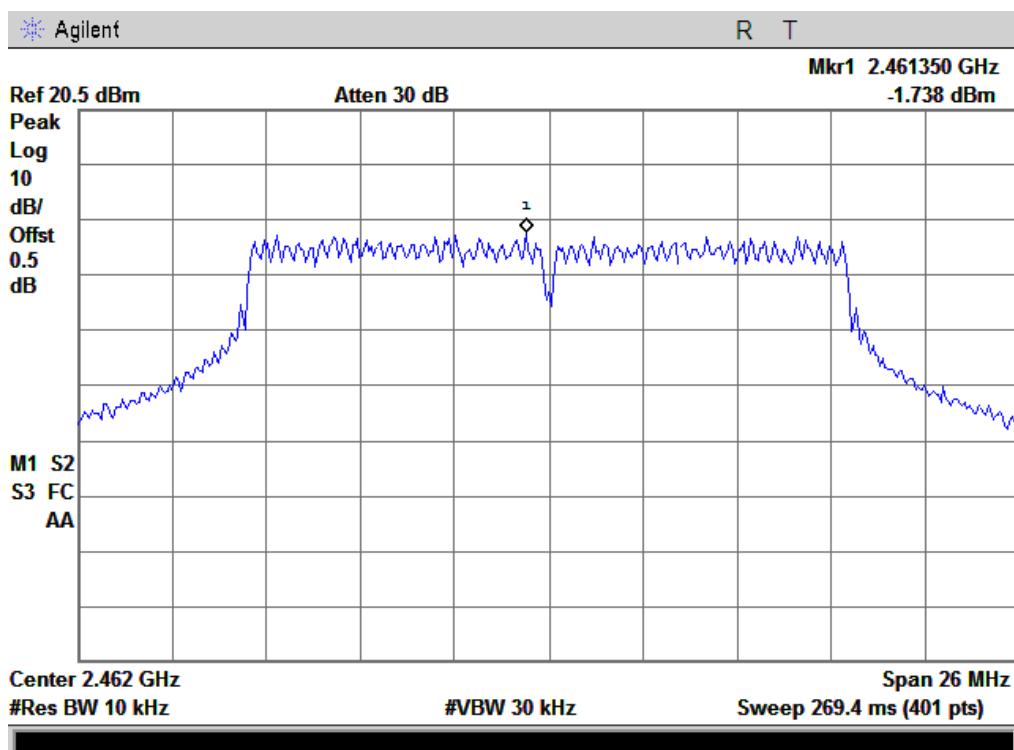


Power Spectral Density, 802.11n20 Low Channel

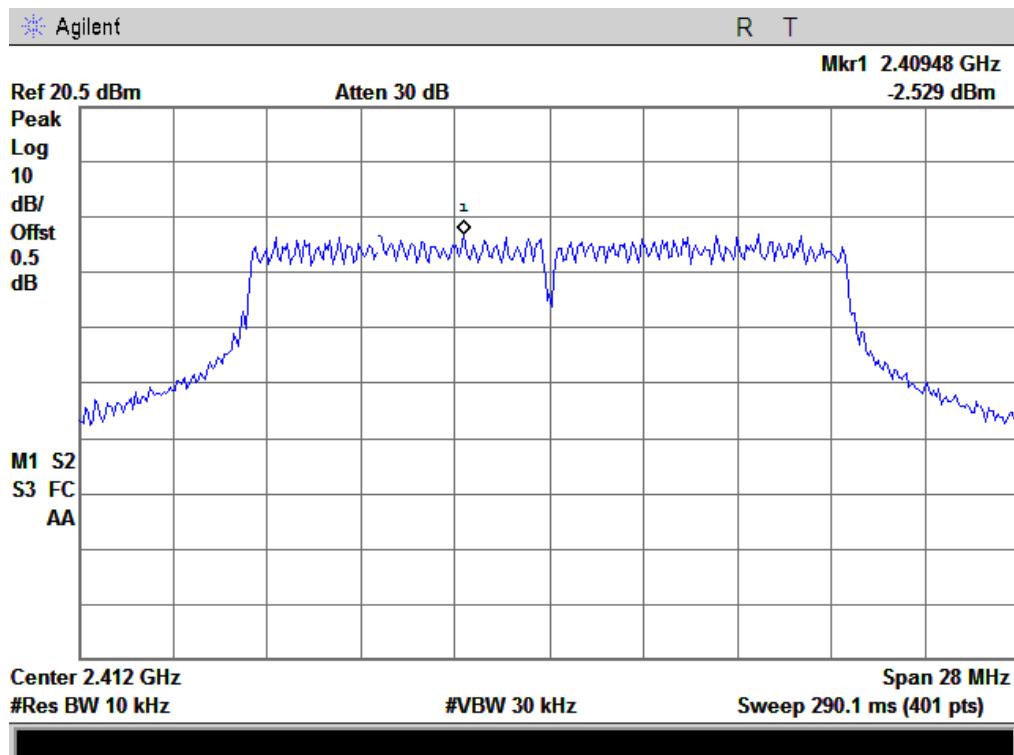


Power Spectral Density, 802.11n20 Middle Channel

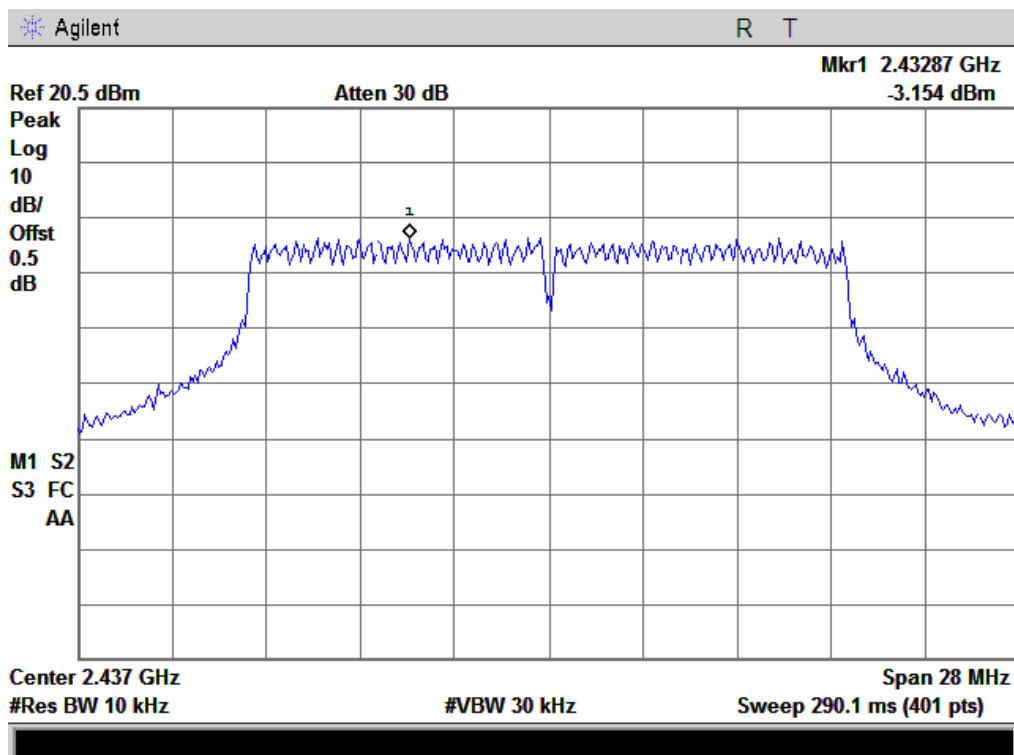

Power Spectral Density, 802.11n20 High Channel

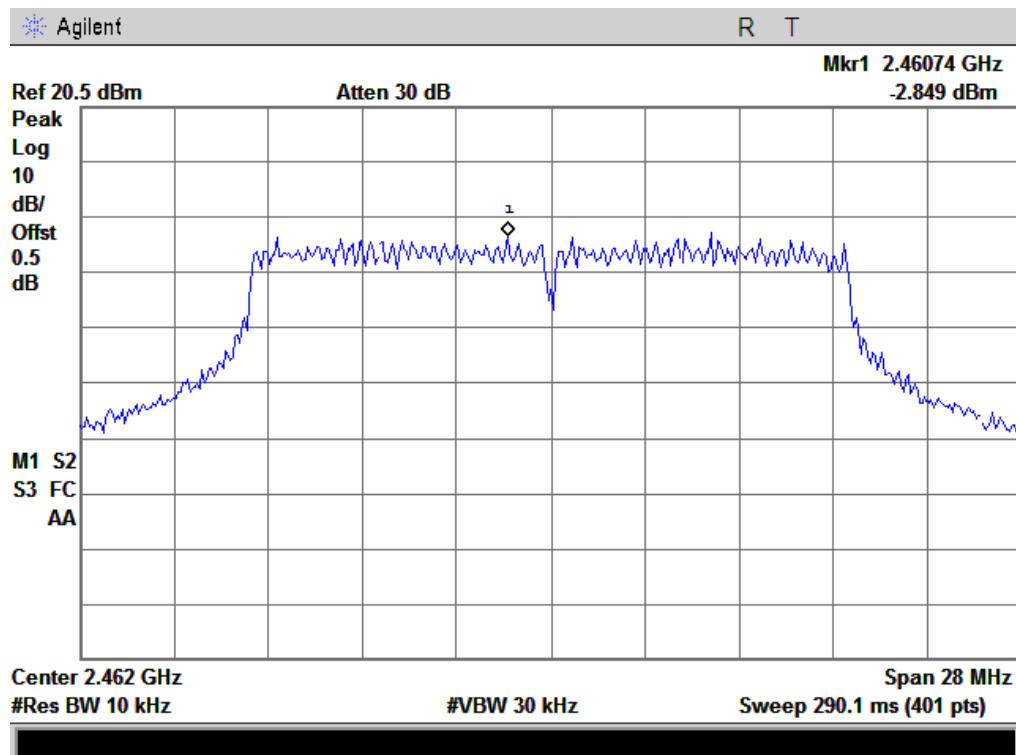

Power Spectral Density, 802.11n40 Low Channel

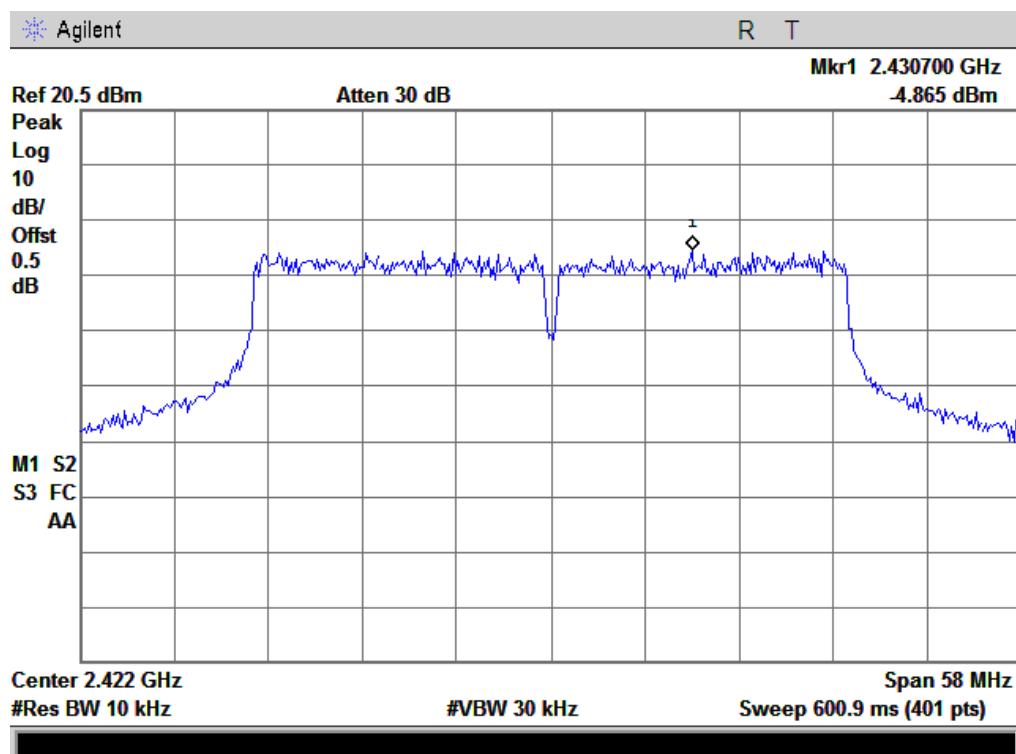


**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 104 of 224
www.siemic.com.cn

Power Spectral Density, 802.11n40 Middle Channel

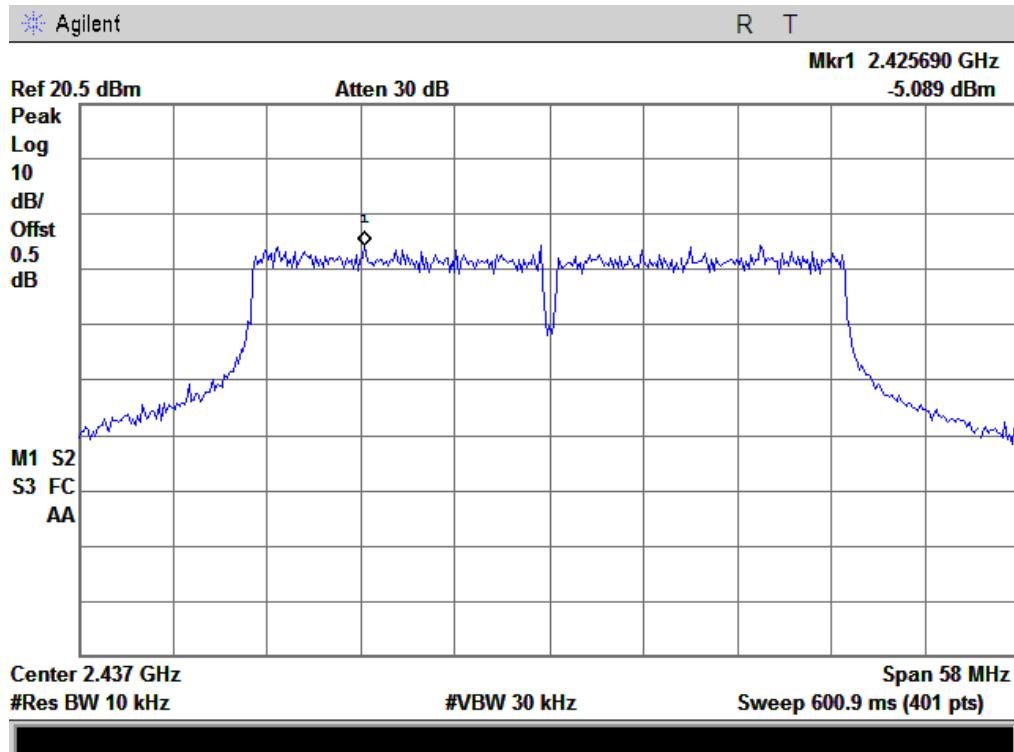

Power Spectral Density, 802.11n40 High Channel


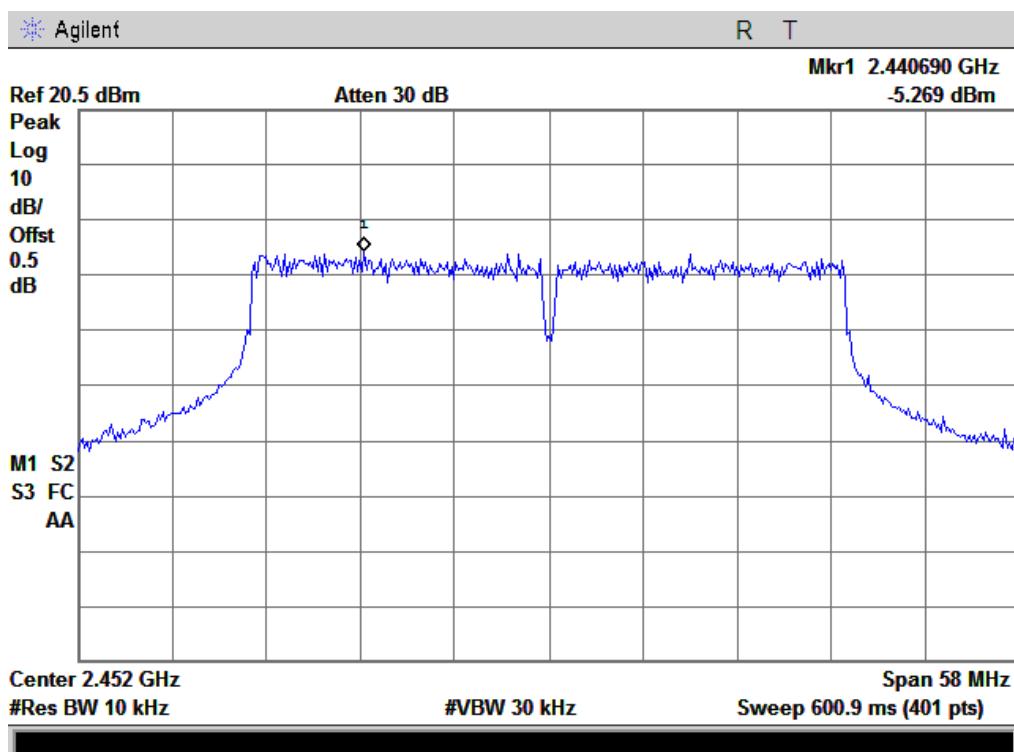


**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 105 of 224
www.siemic.com.cn

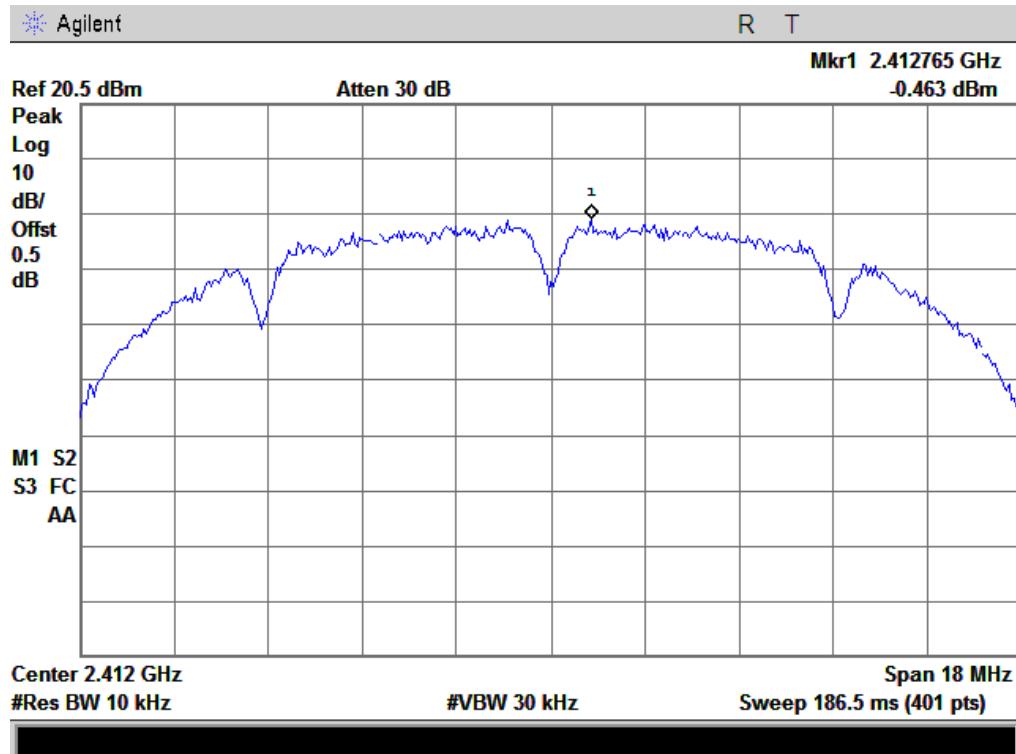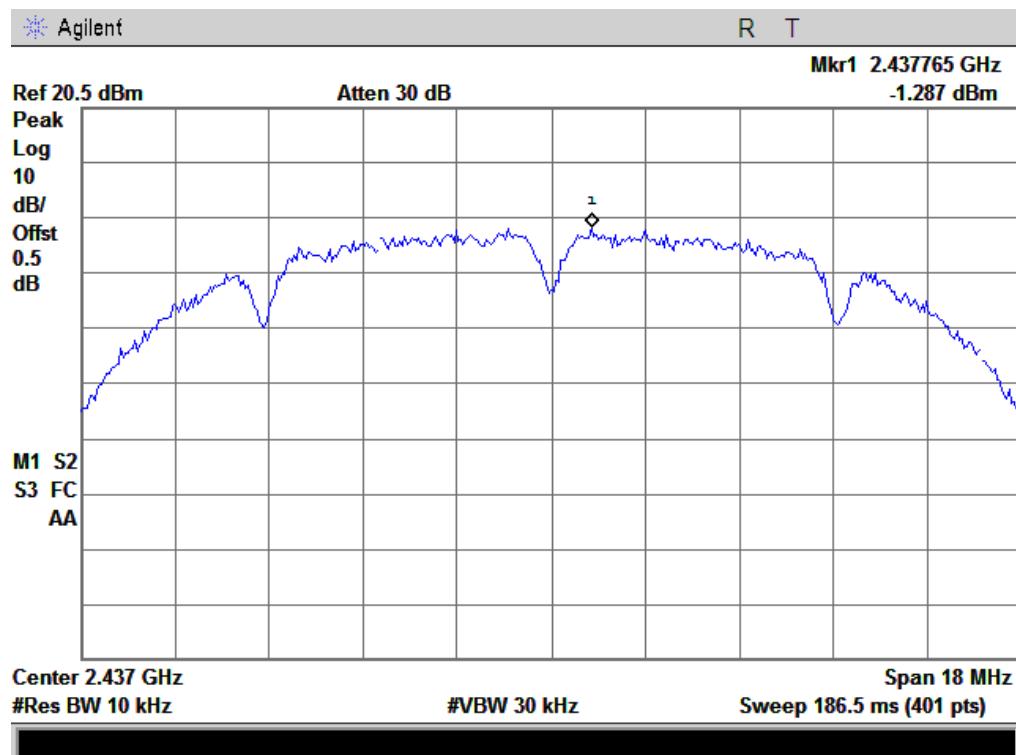RF Port CH2**Power Spectral Density, 802.11b Low Channel****Power Spectral Density, 802.11b Middle Channel**


Power Spectral Density, 802.11b High Channel

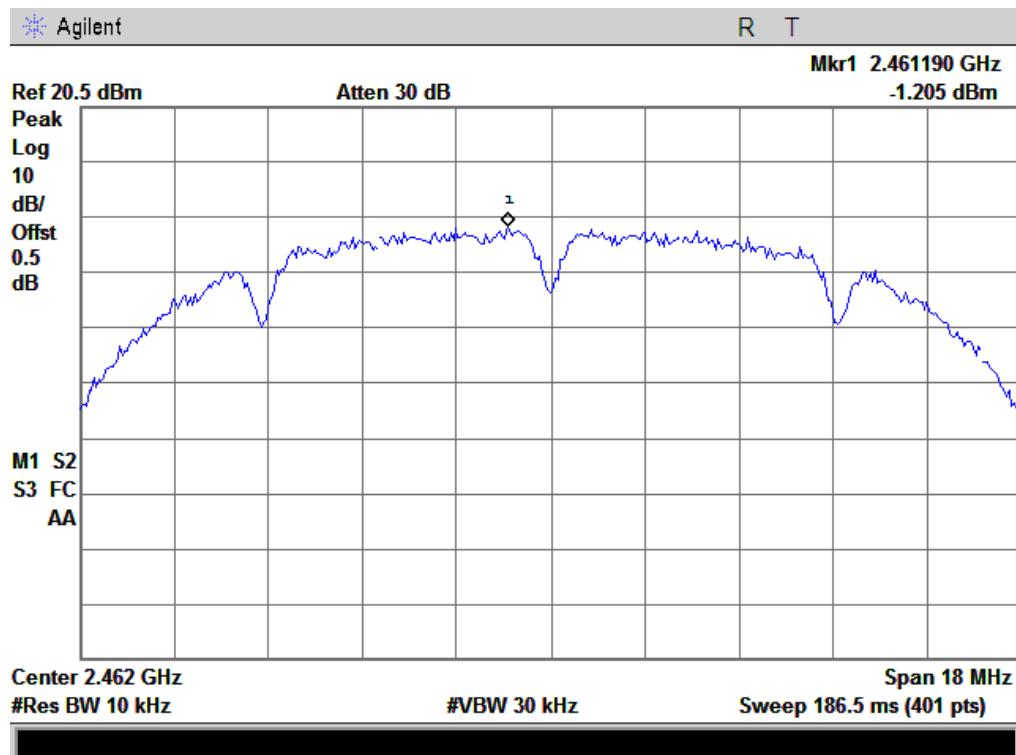


Power Spectral Density, 802.11g Low Channel

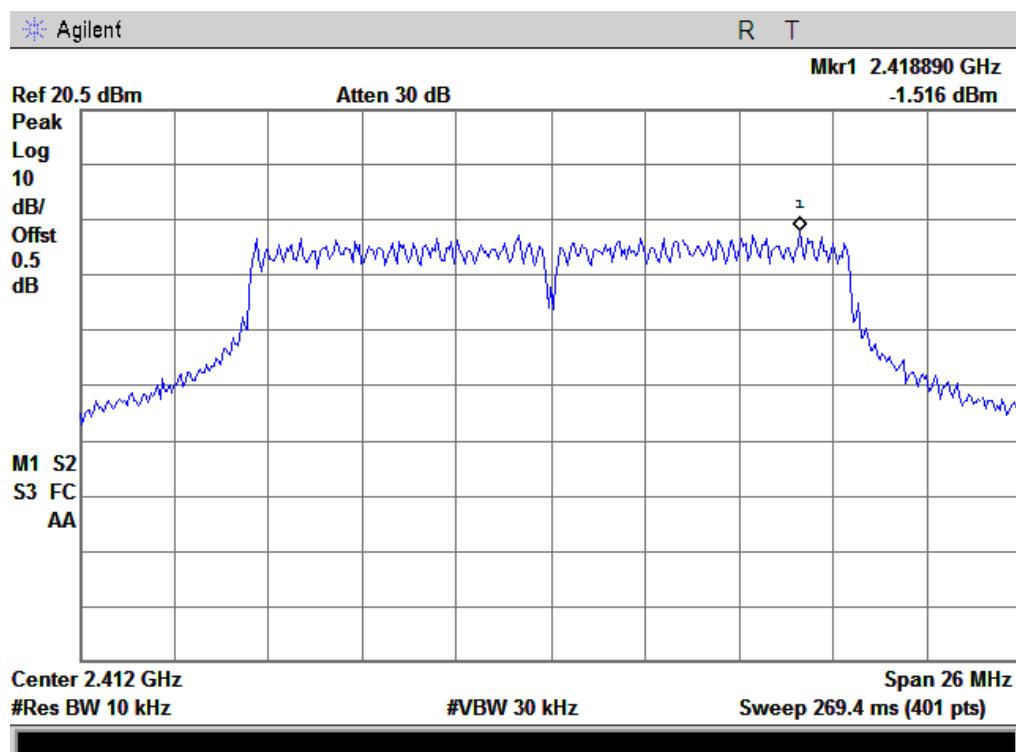


Power Spectral Density, 802.11g Middle Channel

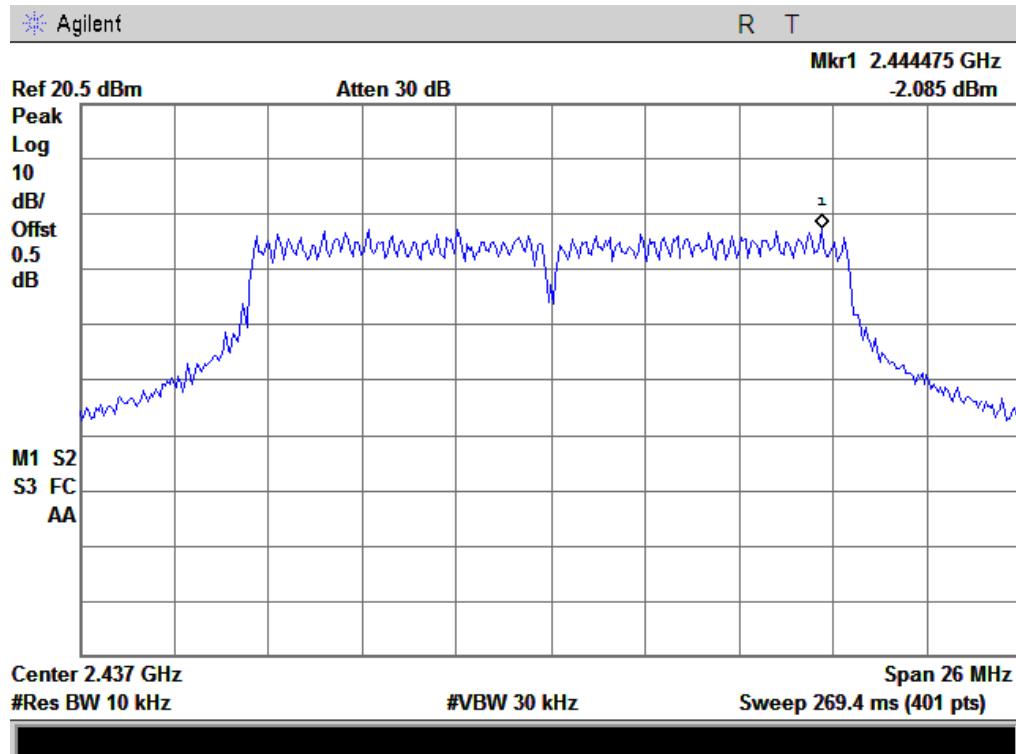


Power Spectral Density, 802.11g High Channel

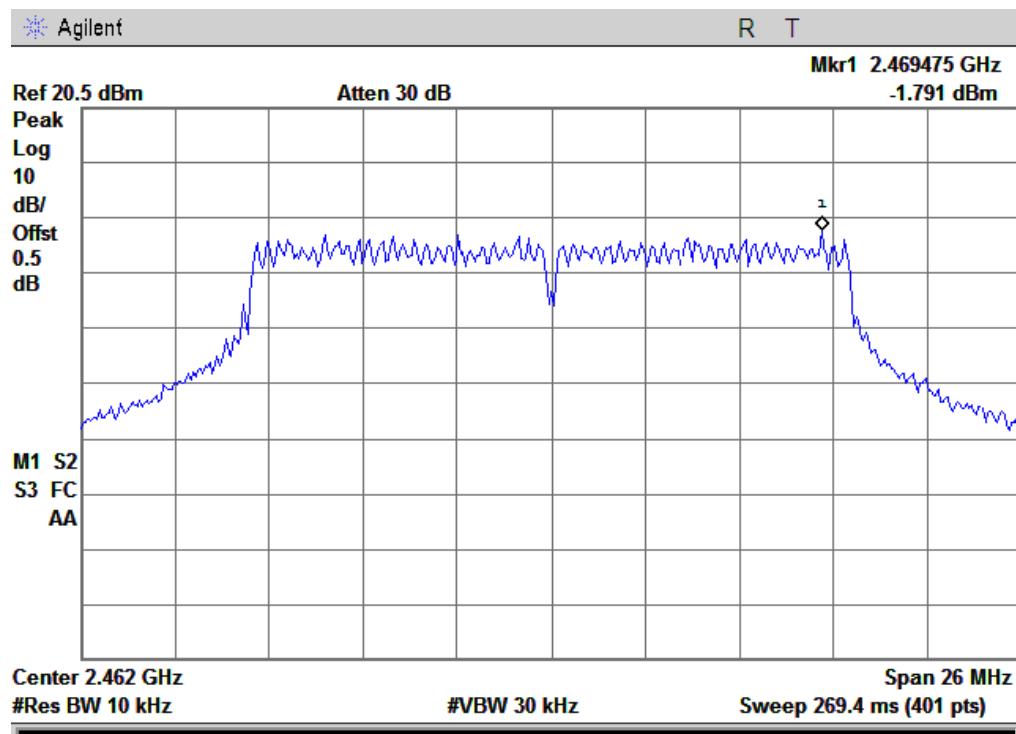


Power Spectral Density, 802.11n20 Low Channel

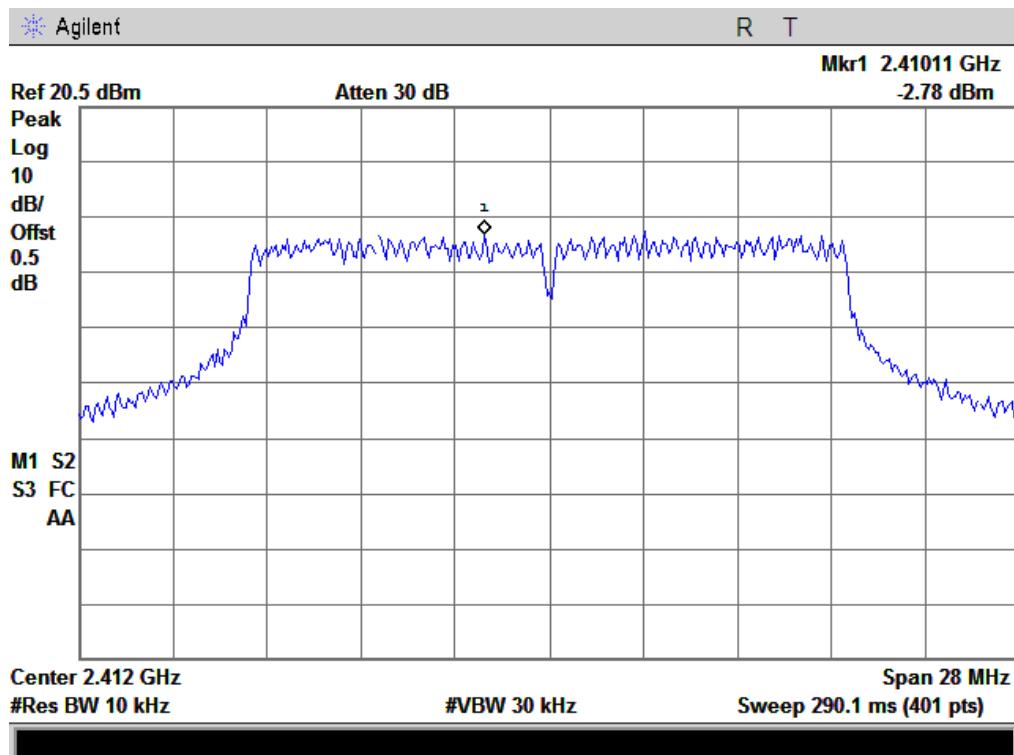


Power Spectral Density, 802.11n20 Middle Channel

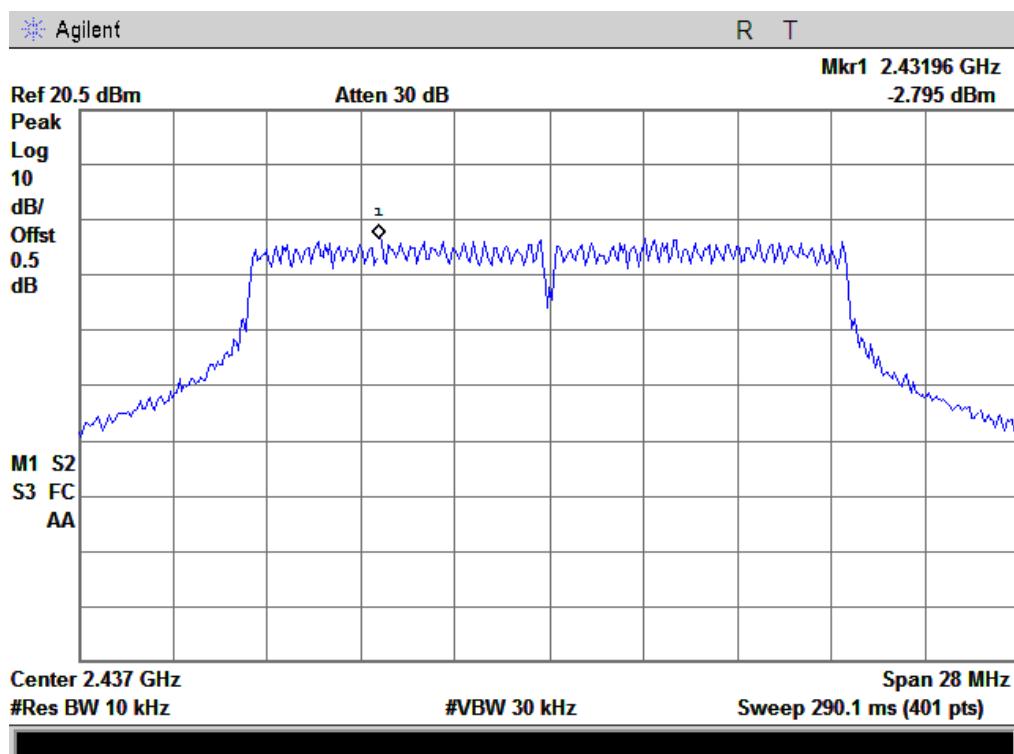


Power Spectral Density, 802.11n20 High Channel

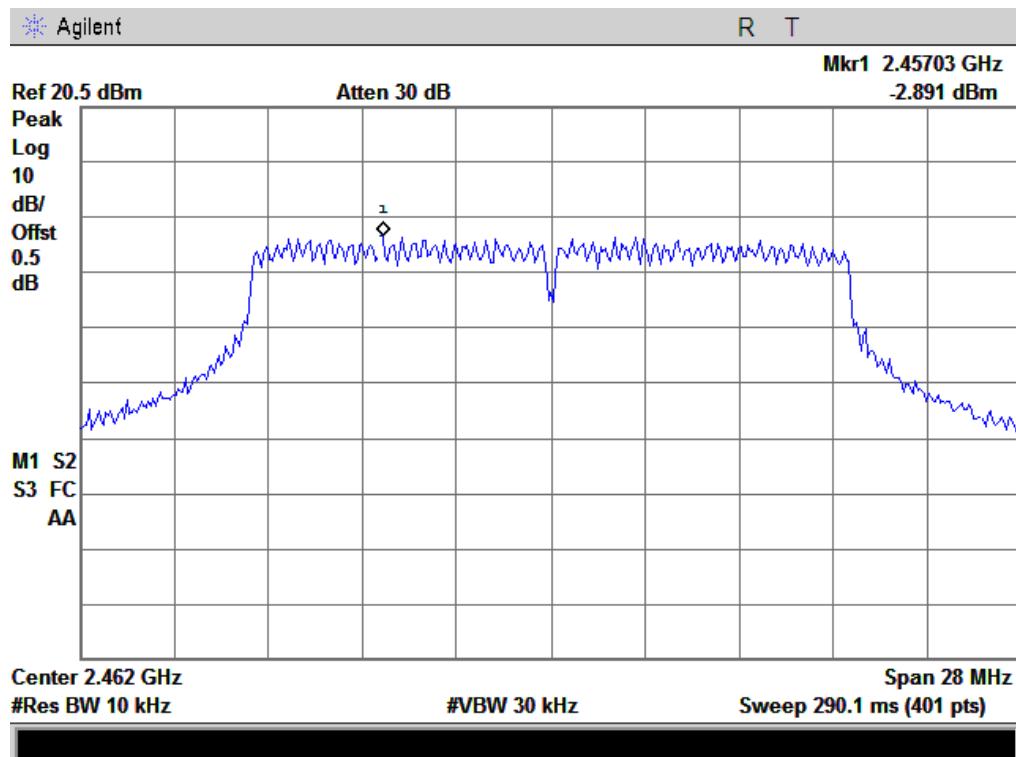


Power Spectral Density, 802.11n40 Low Channel

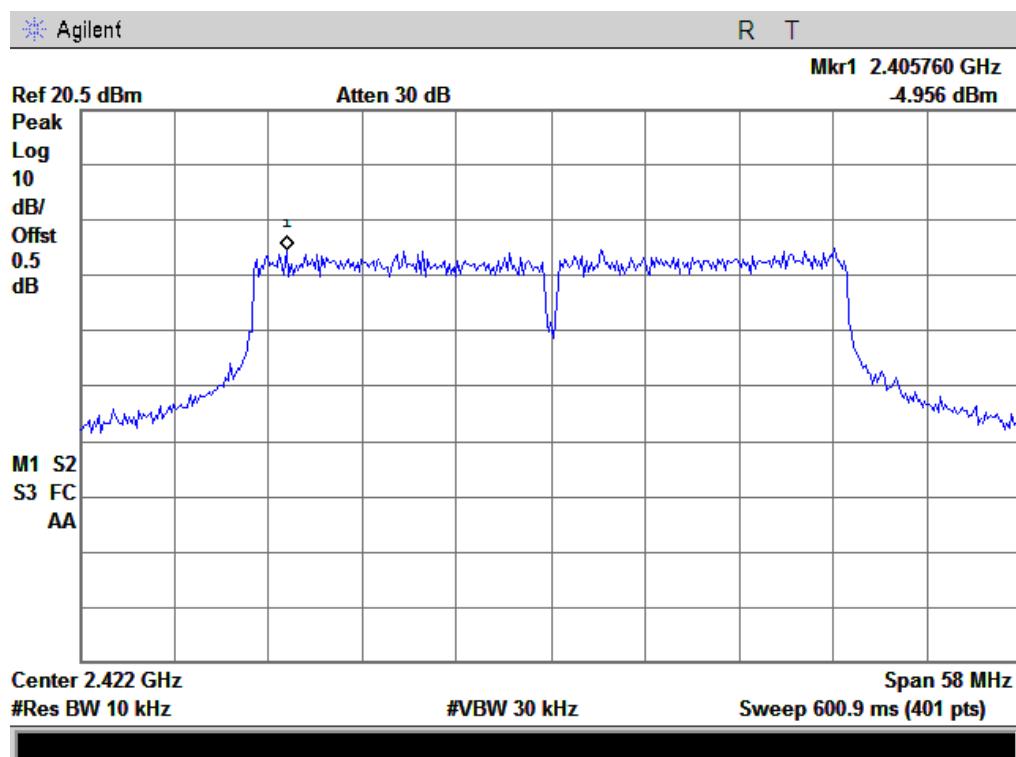

Power Spectral Density, 802.11n40 Middle Channel

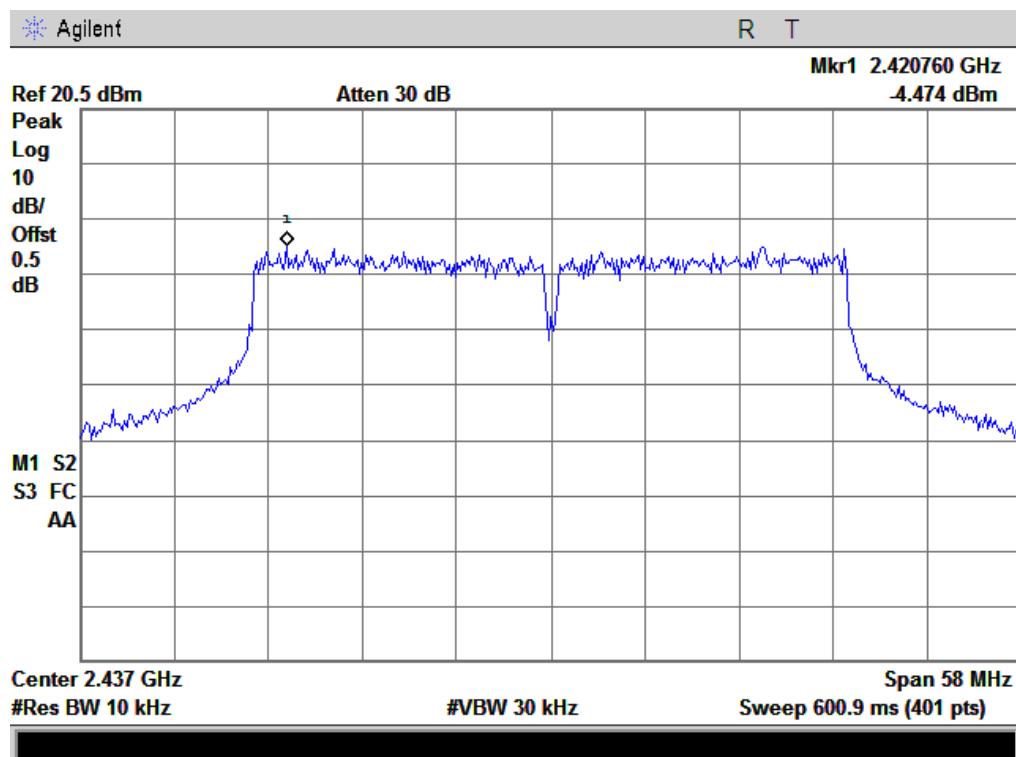

Power Spectral Density, 802.11n40 High Channel

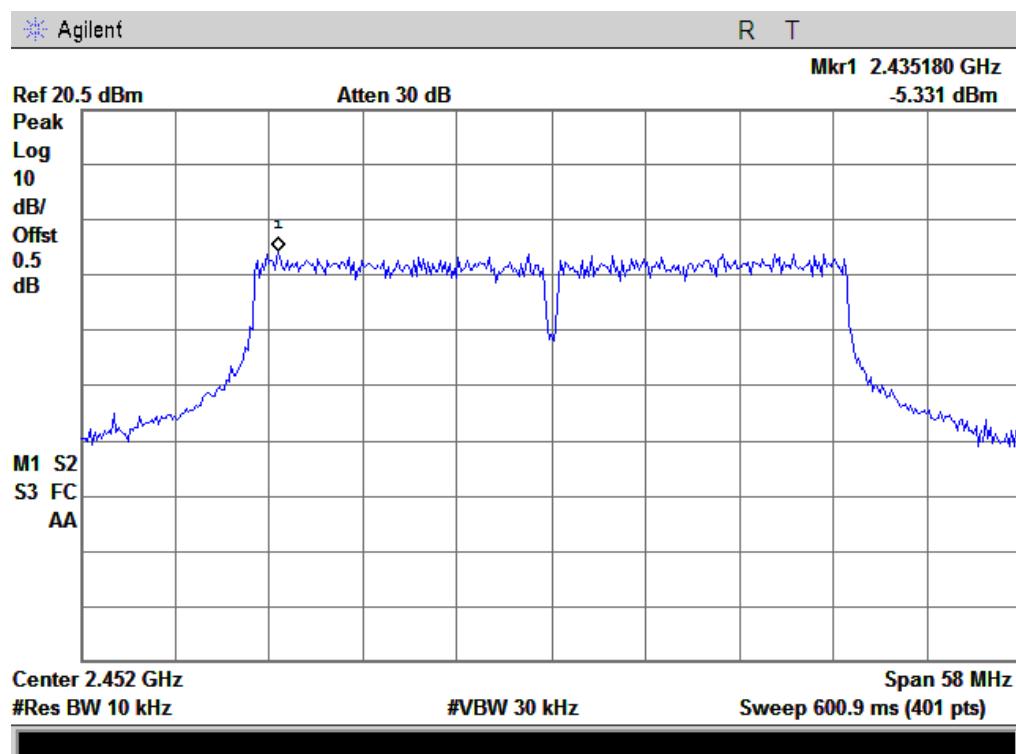

5.5 §15.247(d) –Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands(For 2.4GHz Band)

1. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))
2. Environmental Conditions Temperature 25 °C
 Relative Humidity 56%
 Atmospheric Pressure 1001mbar
3. Test date : November 11, 2013
 Tested By : Herith Shi

Requirement(s):

Band-Edge Measurements

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

Procedures: (Radiated Method Only)

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the rotated table inside the anechoic chamber without connection to measurement instrument. Turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. Repeat above procedures until all measured frequencies were complete.
3. Set band RBW=1MHz, VBW=3MHz with a convenient frequency span from band edge.
4. Find the highest point in edge frequency, and then calculated results.
5. Repeat above procedures until all measured frequencies were complete.

Test Result: Pass.


Please refer to the following tables and plots.

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 112 of 224
www.siemic.com.cn

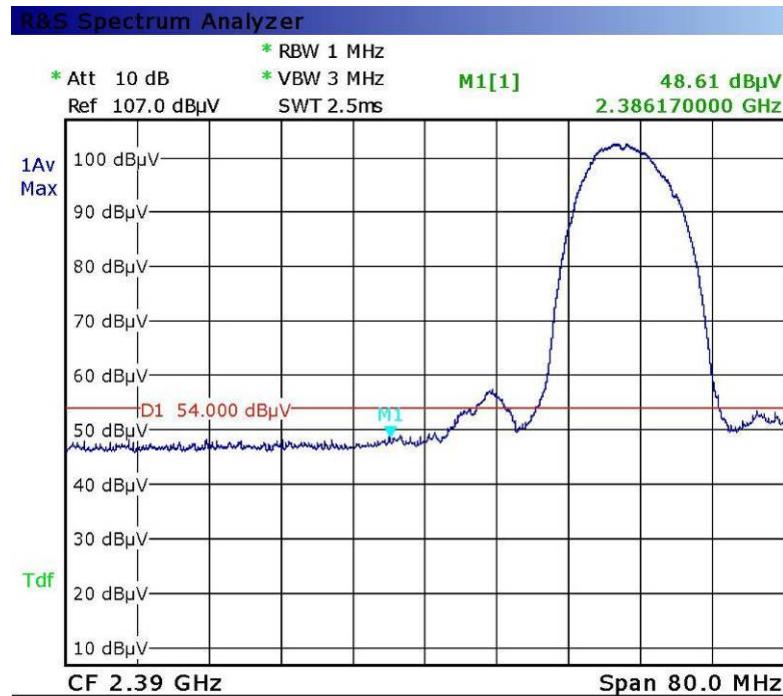802.11b: Band Edge, Left Side (Average)

Date: 10.NOV.2013 19:39:50

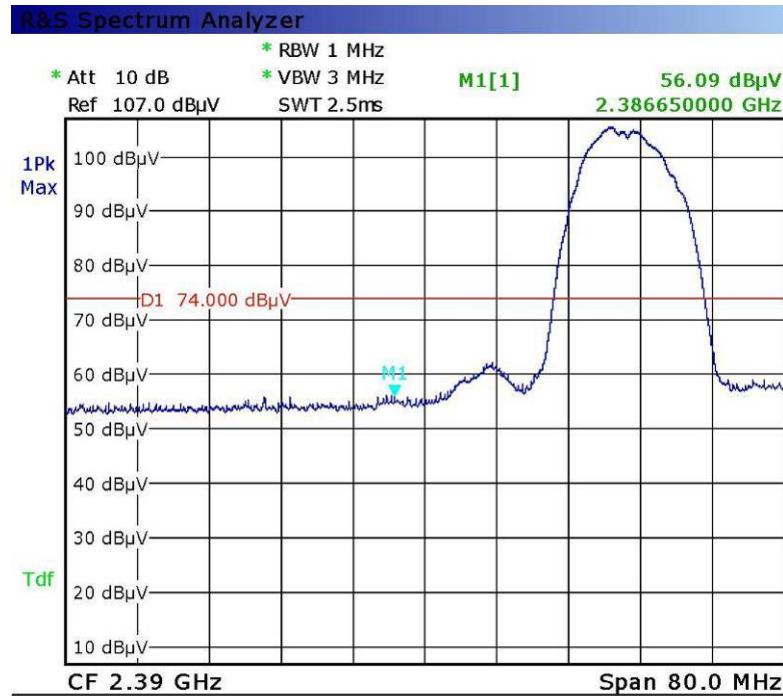802.11b: Band Edge, Left Side (Peak)


Date: 10.NOV.2013 19:38:33

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 113 of 224
www.siemic.com.cn

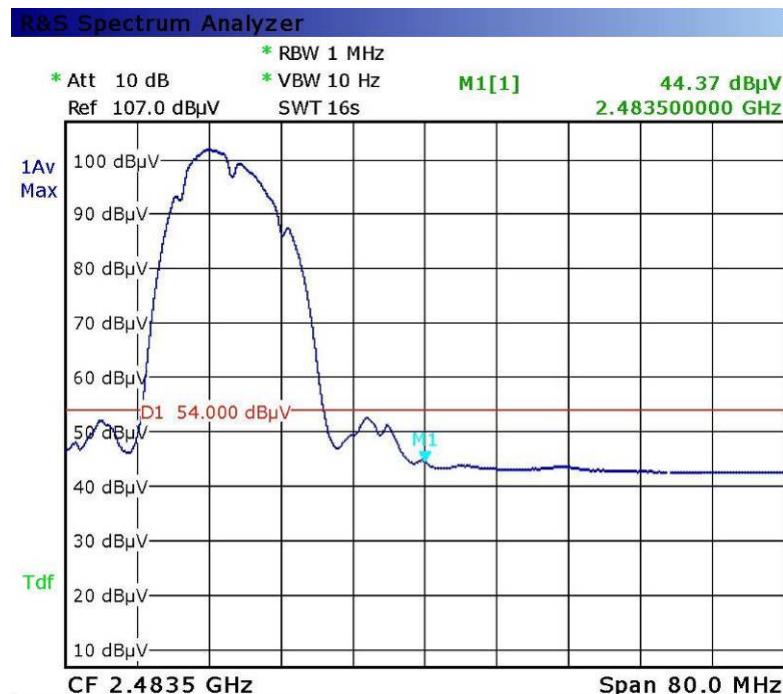802.11b: Band Edge, Right Side (Average)

Date: 10.NOV.2013 21:11:54

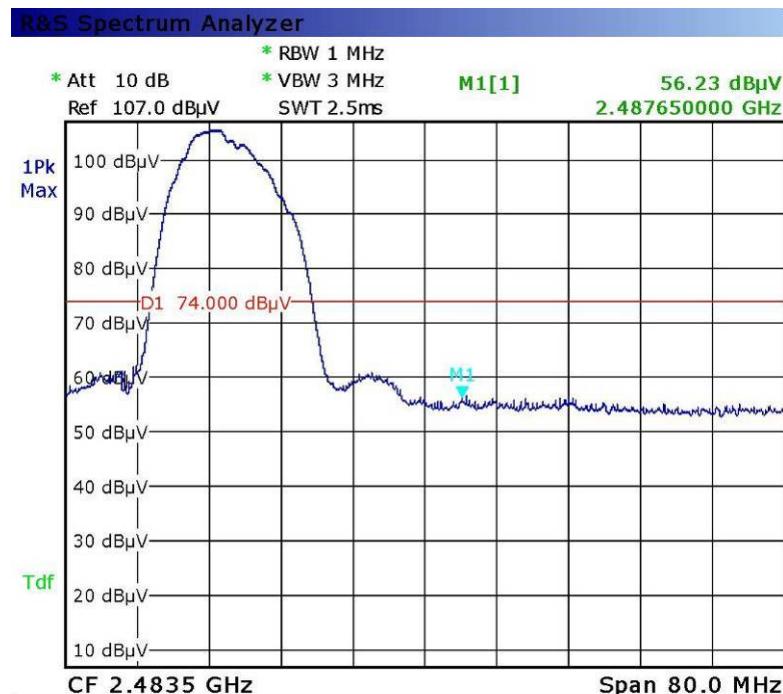802.11b: Band Edge, Right Side (Peak)

Date: 10.NOV.2013 21:12:49

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 114 of 224
www.siemic.com.cn

802.11g: Band Edge, Left Side (Average)

Date: 10.NOV.2013 19:44:25

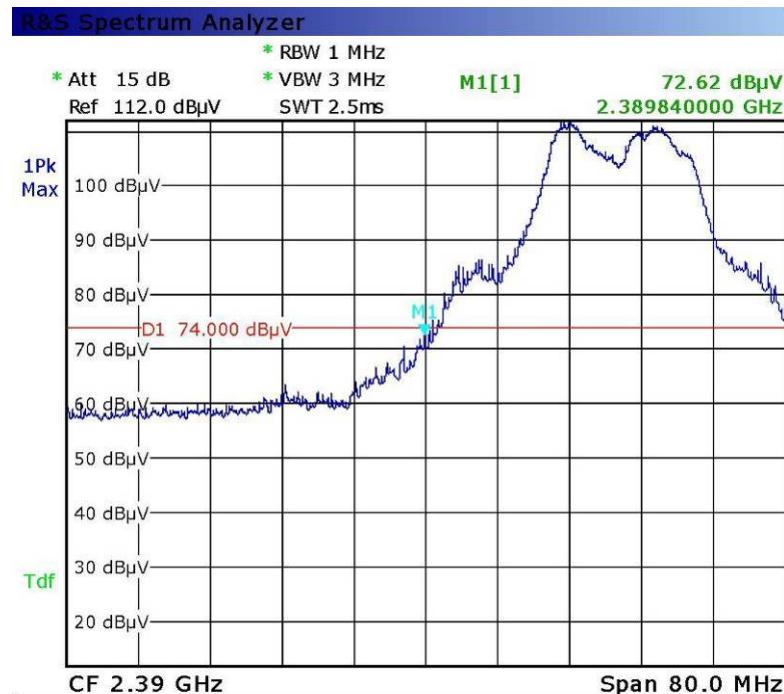802.11g: Band Edge, Left Side (Peak)


Date: 10.NOV.2013 19:50:28

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 115 of 224
www.siemic.com.cn

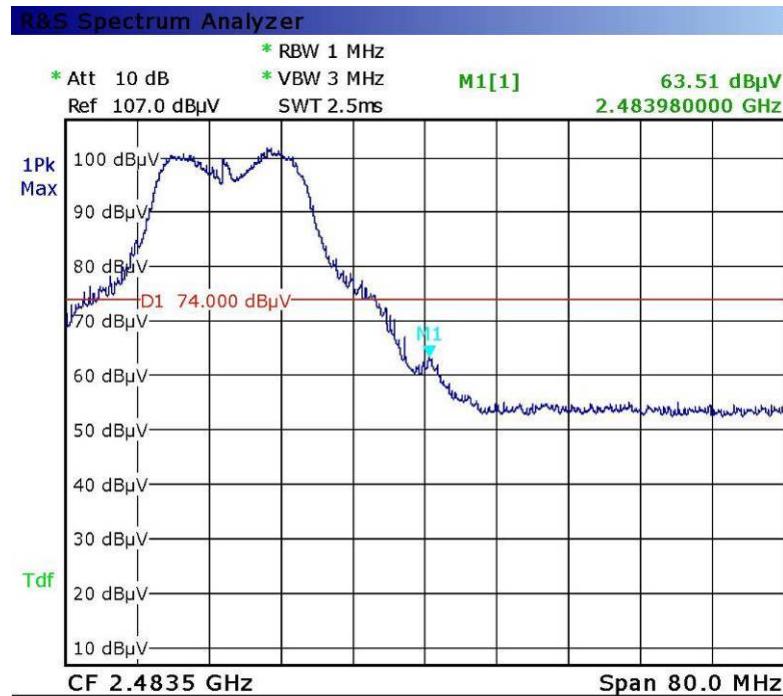802.11g: Band Edge, Right Side (Average)

Date: 10.NOV.2013 21:02:42

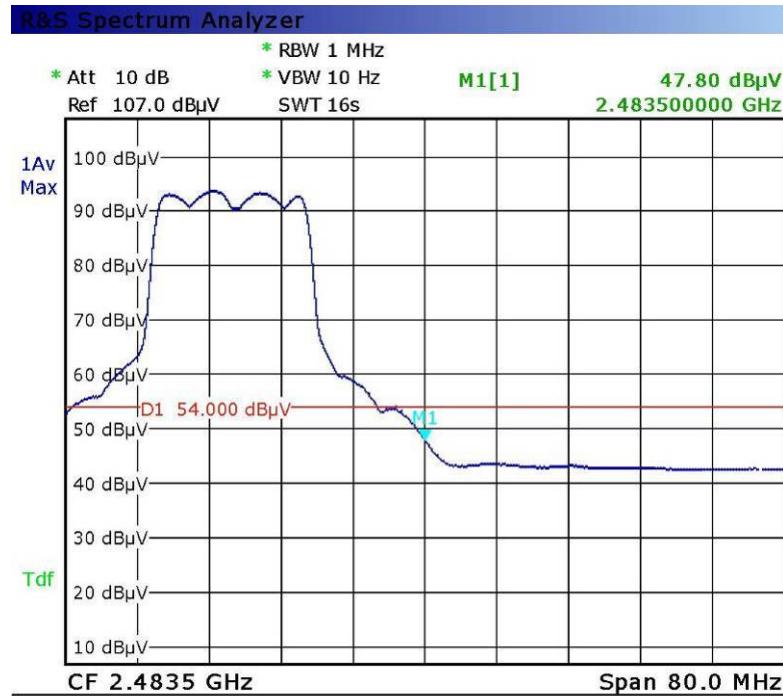802.11g: Band Edge, Right Side (Peak)


Date: 10.NOV.2013 21:06:58

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 116 of 224
www.siemic.com.cn

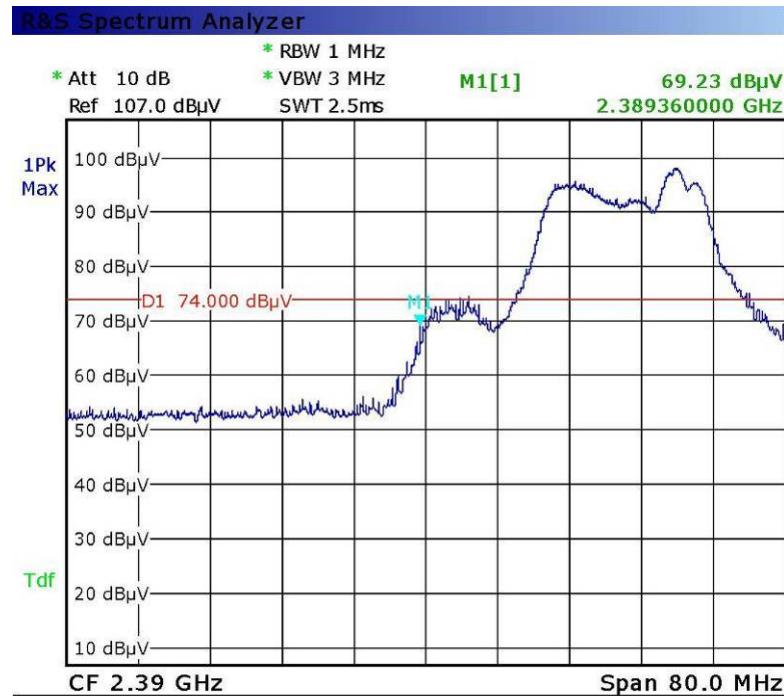802.11n20: Band Edge, Left Side (Average)

Date: 10.NOV.2013 20:07:12

802.11n20: Band Edge, Left Side (Peak)


Date: 10.NOV.2013 20:21:29

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 117 of 224
www.siemic.com.cn

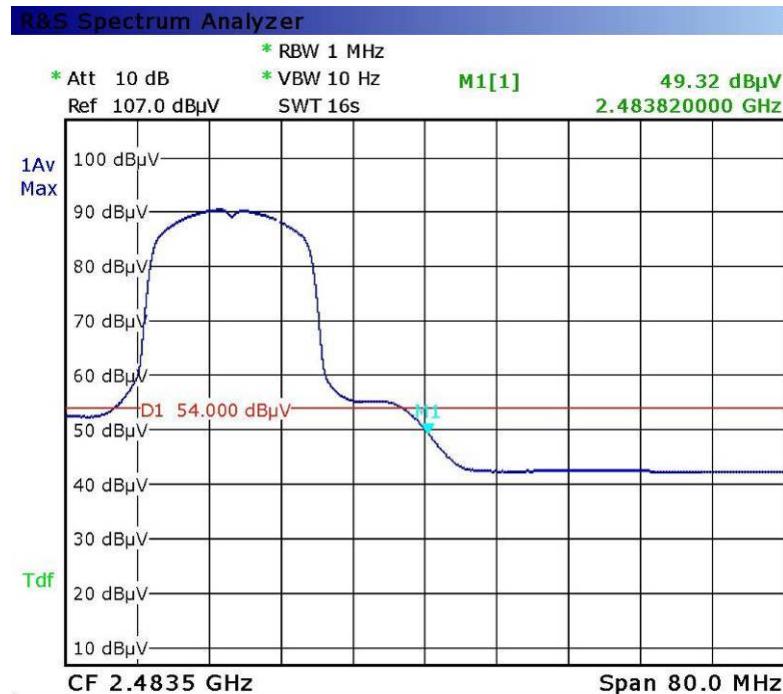802.11n20: Band Edge, Right Side (Average)

Date: 10.NOV.2013 20:57:56

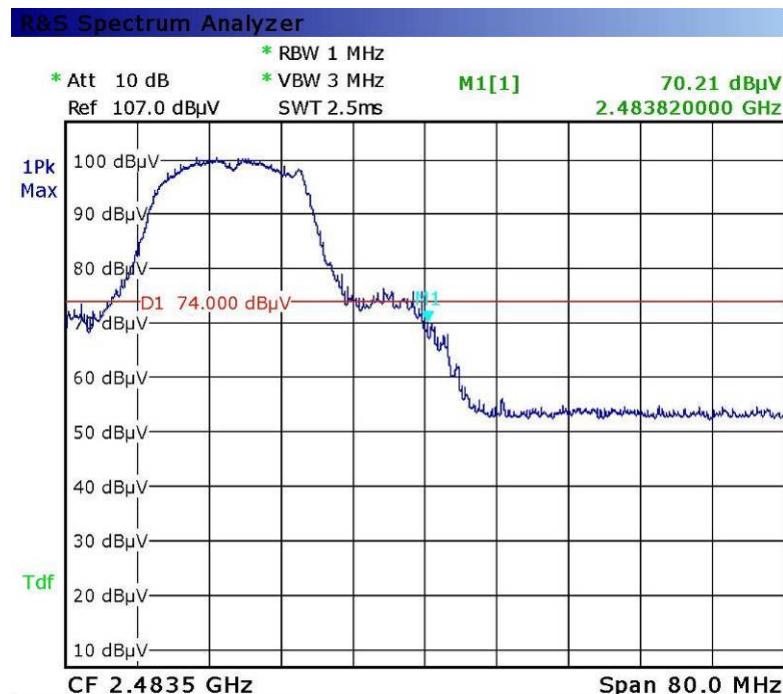802.11n20: Band Edge, Right Side (Peak)


Date: 10.NOV.2013 20:56:22

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 118 of 224
www.siemic.com.cn

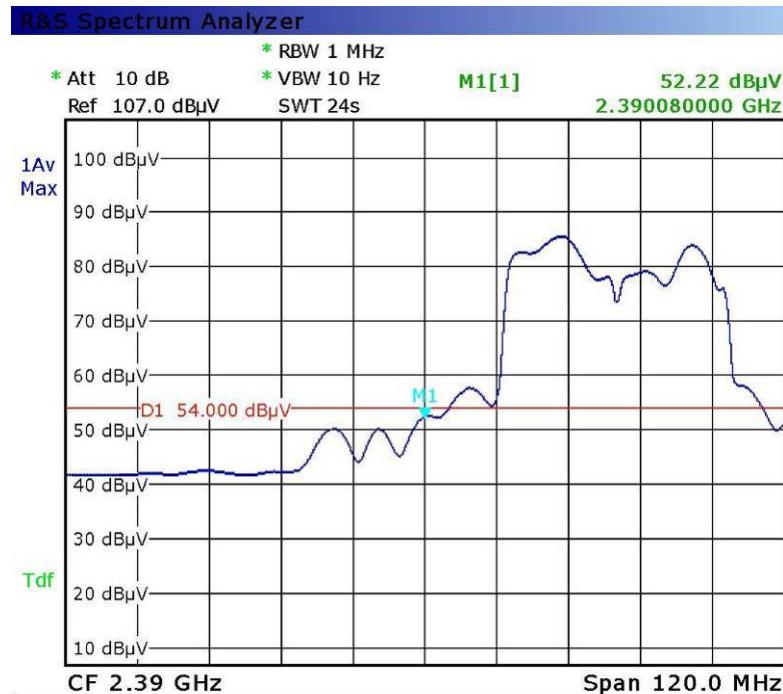802.11n20: Band Edge, Left Side (Average)

Date: 10.NOV.2013 20:21:29

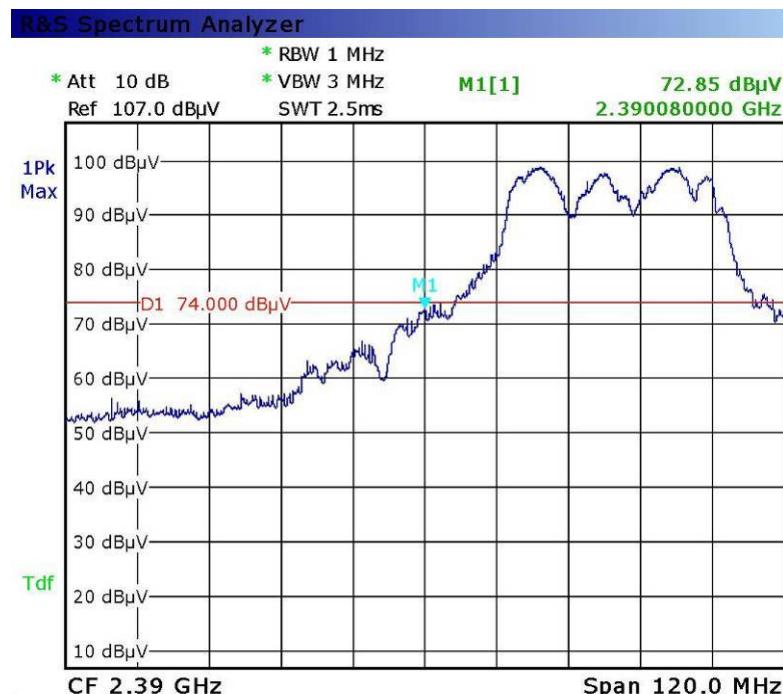802.11n20: Band Edge, Left Side (Peak)

Date: 10.NOV.2013 20:24:05




802.11n40: Band Edge, Right Side (Average)



Date: 10.NOV.2013 20:45:15

802.11n40: Band Edge, Right Side (Peak)

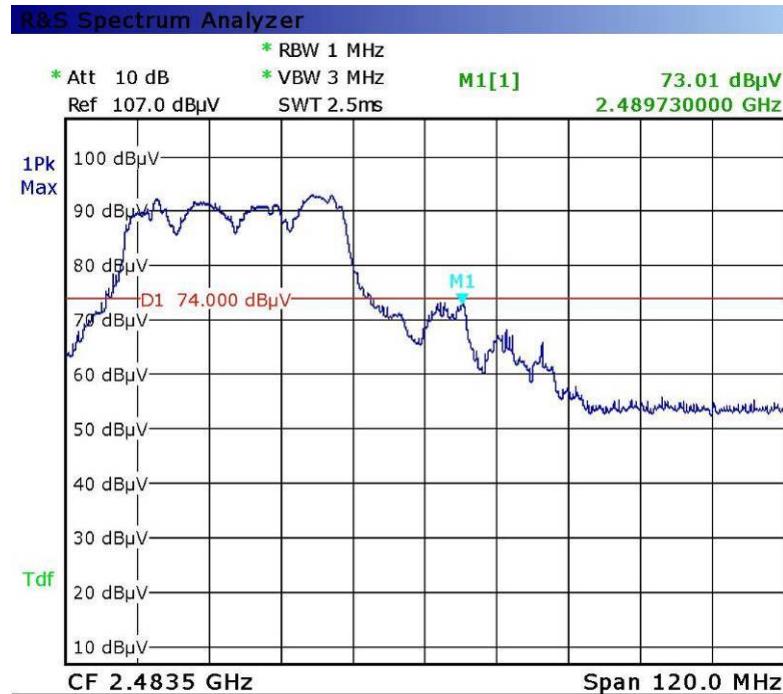

Date: 10.NOV.2013 20:28:24

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 120 of 224
www.siemic.com.cn

5.6 §15.207 (a) - AC Power Line Conducted Emissions(For 2.4GHz Band)

Requirement:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

Procedures:

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ± 3.5 dB.
4. Environmental Conditions Temperature 25°C
 Relative Humidity 58%
 Atmospheric Pressure 1001mbar
5. Test date: October 13, 2013
Tested By : Herith Shi

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 121 of 224
www.siemic.com.cn

Test Mode: 2.4GHz 802.11b Transmitting Mode (Worse Case)

Peak Detector **Quasi Peak Limit**
Average Detector **Average Limit**

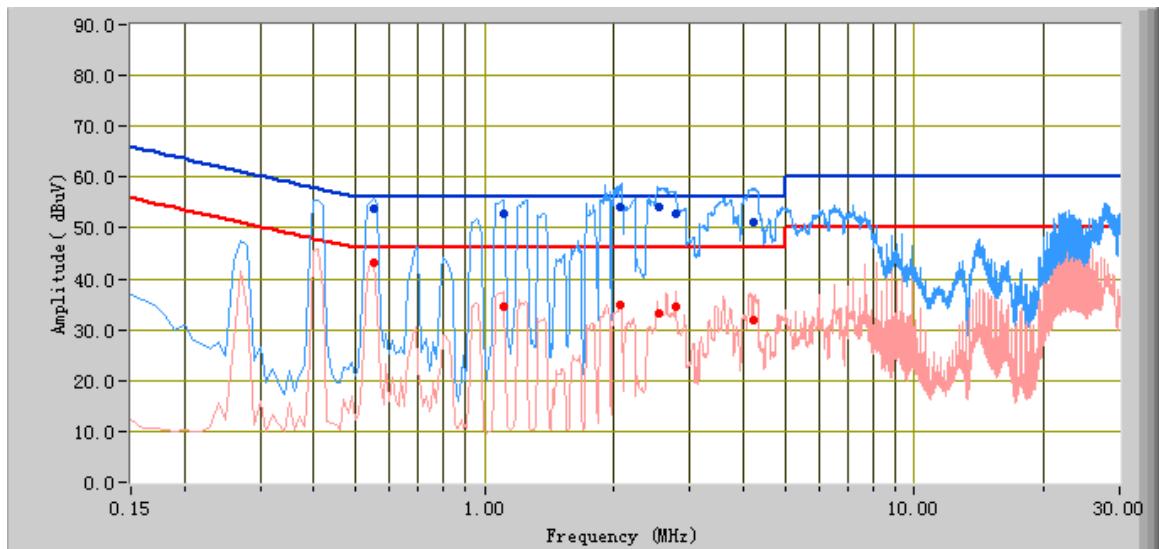**Test Data****Phase Line Plot at 120V AC, 60Hz**

Frequency (MHz)	Quasi Peak (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Factors (dB)
2.54	53.97	56.00	-2.03	33.15	46.00	-12.85	10.13
4.22	51.04	56.00	-4.96	31.90	46.00	-14.10	10.17
2.06	54.18	56.00	-1.82	34.82	46.00	-11.18	10.11
2.78	52.95	56.00	-3.05	34.44	46.00	-11.56	10.13
0.55	53.68	56.00	-2.32	43.08	46.00	-2.92	10.10
1.11	52.74	56.00	-3.26	34.61	46.00	-11.39	10.10

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 122 of 224
www.siemic.com.cn

Test Mode:**2.4GHz 802.11b Transmitting Mode(Worse Case)**

Peak Detector Quasi Peak Limit
Average Detector Average Limit

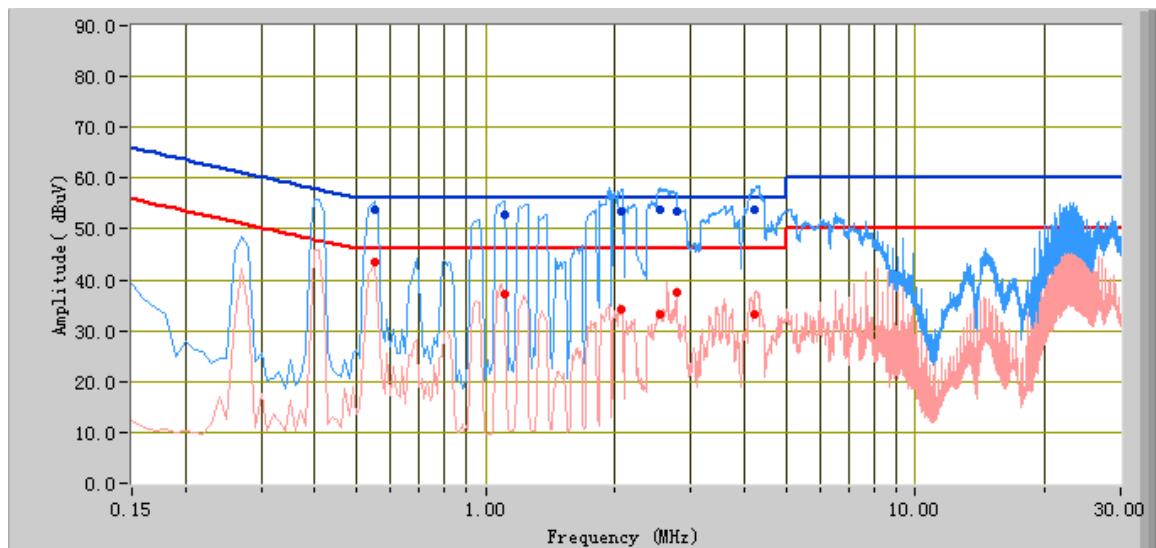**Test Data****Phase Natural Plot at 120V AC, 60Hz**

Frequency (MHz)	Quasi Peak (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Factors (dB)
2.54	53.89	56.00	-2.11	33.07	46.00	-12.93	10.13
4.22	53.88	56.00	-2.12	33.18	46.00	-12.82	10.17
2.06	53.55	56.00	-2.45	34.25	46.00	-11.75	10.11
2.78	53.62	56.00	-2.38	37.37	46.00	-8.63	10.13
0.55	53.78	56.00	-2.22	43.56	46.00	-2.44	10.10
1.11	52.88	56.00	-3.12	37.04	46.00	-8.96	10.10

5.7 §15.209, §15.205 & §15.247(d) - Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands(For 2.4GHz Band)

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz & 1GHz above (3m & 10m) is +/-6dB.
4. Environmental Conditions Temperature 25°C
 Relative Humidity 56%
 Atmospheric Pressure 1001mbar
5. Test date : October 28 2013
Tested By : Herith Shi

Requirement: §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Procedures:

Radiated Spurious Emissions Measurement

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Established procedures for performing radiated measurements shall be used (see C63.10). All detected emissions must comply with the applicable limits.

Measurement Detectors

§15.35(a) specifies that on frequencies less than and below 1000 MHz, the radiated emissions limits assume the use of a CISPR quasi-peak detector function and related measurement bandwidths. §15.35(b) specifies that on frequencies above 1000 MHz, the radiated emissions limits assume the use of an average detector and a minimum resolution bandwidth of 1 MHz. In addition, §15.35(b) that when average radiated emissions measurements are specified there is also a limit on the peak emissions level which is 20 dB above the applicable maximum permitted average emission limit. These specifications also apply to conducted emissions measurements.

1. CISPR Quasi-Peak Measurement

The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

2. Peak Power Measurement Procedure

Utilize the peak power measurement procedure specified in Section 8.1.1 with the following modifications:
Set analyzer center frequency to the frequency associated with the restricted band emission under examination.
Set RBW = 1 MHz.

Note that if the peak measured value complies with the average limit, it is not necessary to perform a separate average measurement. If this option is exercised, it should be so noted in the test report.

3. Average Power Measurement Procedures

The average restricted band emission levels must be measured with the EUT transmitting continuously ($\geq 98\%$ duty cycle) at its maximum power control level. Optionally, video triggering/signal gating can be used to ensure that measurements are performed only when the EUT is transmitting at its maximum power control level.

The average power measurement procedures described in Section 8.2 shall be used with the following modifications:
Set analyzer center frequency to the frequency associated with the restricted band emission.
Set span to at least 1 MHz.

Use peak marker function to determine the highest amplitude within the RBW (1 MHz).

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 124 of 224
www.siemic.com.cn

Test Result: Pass

Test Mode:	Transmitting Mode(Worse Case)
-------------------	--------------------------------------

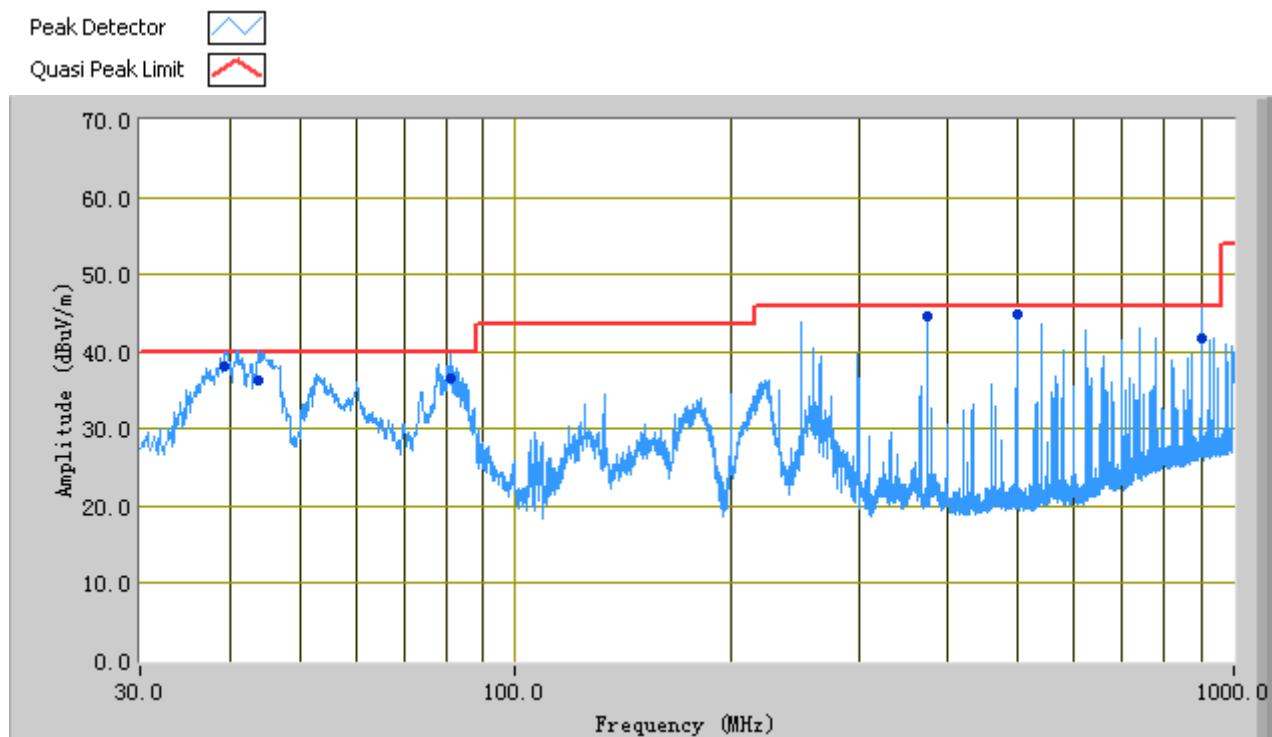(Below 1GHz)**Test Data**

Frequency (MHz)	Quasi Peak (dBuV/m)	Azimuth	Polarity(H/V)	Height (cm)	Factors (dB)	Limit (dBuV)	Margin (dB)
499.99	44.90	85.00	H	100.00	-1.95	46.00	-1.1
43.75	36.32	3.00	V	153.00	-10.46	40.00	-3.68
39.39	38.06	250.00	V	101.00	-7.06	40.00	-1.94
81.15	36.59	91.00	V	145.00	-13.76	40.00	-3.41
900.04	41.65	166.00	H	252.00	4.77	46.00	-4.35
375.01	44.85	81.00	H	101.00	-3.92	46.00	-1.15



Above 1 GHz:

Test Mode: Transmitting

Note: Other modes were verified, only the result of worst case basic rate mode was presented.

Mode: 802.11b

Low Channel (2412 MHz)

Frequency (MHz)	Substituted level (dB μ V/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4824	39.71	AV	0	100	V	33.83	3.3	24	52.84	54	-1.16
4824	40.22	AV	179	120	H	33.83	3.3	24	53.35	54	-0.65
4824	45.15	PK	0	100	V	33.83	3.3	24	58.28	74	-15.72
4824	46.74	PK	179	120	H	33.83	3.3	24	59.87	74	-14.13
1420.1	33.33	AV	153	100	V	25.72	2.5	24	37.55	54	-16.45
1420.1	33.50	AV	330	100	H	25.72	2.5	24	37.72	54	-16.28
1420.1	42.51	PK	153	100	V	25.72	2.5	24	46.73	74	-27.27
1420.1	42.10	PK	330	100	H	25.72	2.5	24	46.32	74	-27.68

Middle Channel (2437 MHz)

Frequency (MHz)	Substituted level (dB μ V/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4874	38.21	AV	312	100	V	33.83	3.3	24	51.34	54	-2.66
4874	40.41	AV	91	120	H	33.83	3.3	24	53.54	54	-0.46
4874	43.22	PK	312	100	V	33.83	3.3	24	56.35	74	-17.65
4874	47.33	PK	91	120	H	33.83	3.3	24	60.46	74	-13.54
1671.2	34.07	AV	159	100	V	25.72	2.5	24	38.29	54	-15.71
1671.2	34.15	AV	352	100	H	25.72	2.5	24	38.37	54	-15.63
1671.2	42.12	PK	159	100	V	25.72	2.5	24	46.34	74	-27.66
1671.2	42.22	PK	352	100	H	25.72	2.5	24	46.44	74	-27.56

High Channel (2462 MHz)

Frequency (MHz)	Substituted level (dB μ V/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4924	39.41	AV	310	100	V	33.83	3.3	24	52.54	54	-1.46
4924	40.30	AV	92	120	H	33.83	3.3	24	53.43	54	-0.57
4924	46.14	PK	310	100	V	33.83	3.3	24	59.27	74	-14.73
4924	46.29	PK	92	120	H	33.83	3.3	24	59.42	74	-14.58
1420.1	34.35	AV	163	100	V	25.72	2.5	24	38.57	54	-15.43
1420.1	35.14	AV	350	100	H	25.72	2.5	24	39.36	54	-14.64
1420.1	43.28	PK	163	100	V	25.72	2.5	24	47.5	74	-26.50
1420.1	42.11	PK	350	100	H	25.72	2.5	24	46.33	74	-27.67

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 126 of 224
www.siemic.com.cn

5.8 §15.247(a) (2) –DTS (6 dB&20dB) CHANNEL BANDWIDTH (For 5GHz Band)

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions

Temperature	26°C
Relative Humidity	58%
Atmospheric Pressure	1001mbar

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.

4. Test date : October 27, 2013

Tested By : Herith Shi

Requirement(s): The minimum 6 dB bandwidth of a DTS transmission shall be at least 500 kHz. Within this document, this bandwidth is referred to as the DTS bandwidth. The procedures provided herein for measuring the maximum peak conducted output power assume the use of the DTS bandwidth.

Procedures:

8. Set RBW = 100 kHz.
9. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
10. Detector = Peak.
11. Trace mode = max hold.
12. Sweep = auto couple.
13. Allow the trace to stabilize.
14. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Result: Pass.

Please refer to the following tables and plots.

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 127 of 224
www.siemic.com.cn


RF Port CH0**6dB bandwidth:**

Channel	Channel Frequency (MHz)	Data Rate (Mbps)	Measured 6dB Bandwidth (MHz)	FCC Part 15.247 Limit (kHz)
802.11a mode				
Low	5745	1	16.268	>500
Middle	5785	1	16.362	>500
High	5825	1	15.995	>500
802.11n(20M) mode				
Low	5745	MCS0	17.322	>500
Middle	5785	MCS0	16.962	>500
High	5825	MCS0	16.856	>500
802.11n(40M) mode				
Low	5755	MCS0	35.932	>500
High	5795	MCS0	35.841	>500

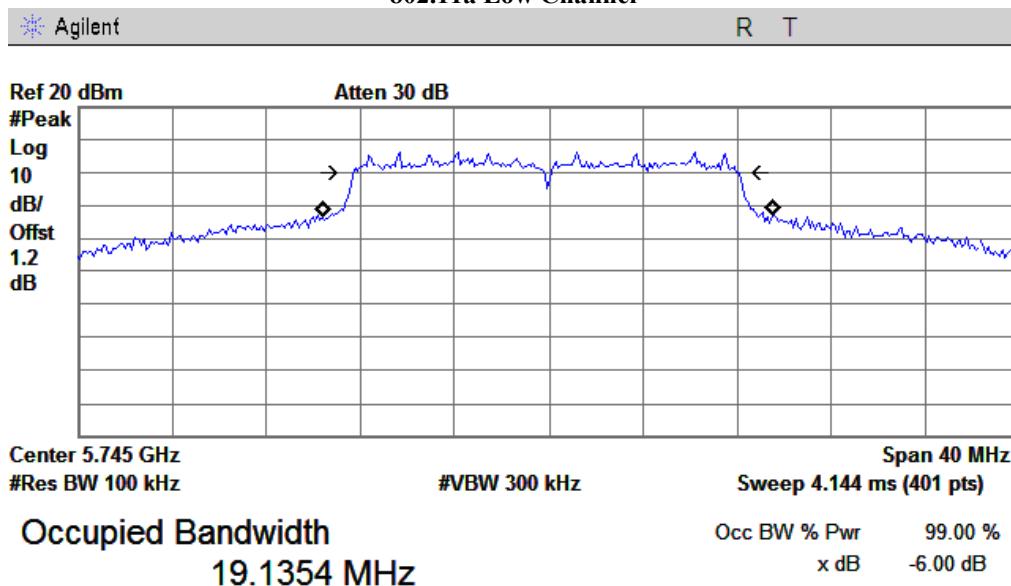802.11a Low Channel


Transmit Freq Error -19.344 kHz
x dB Bandwidth 16.268 MHz

802.11a Middle Channel

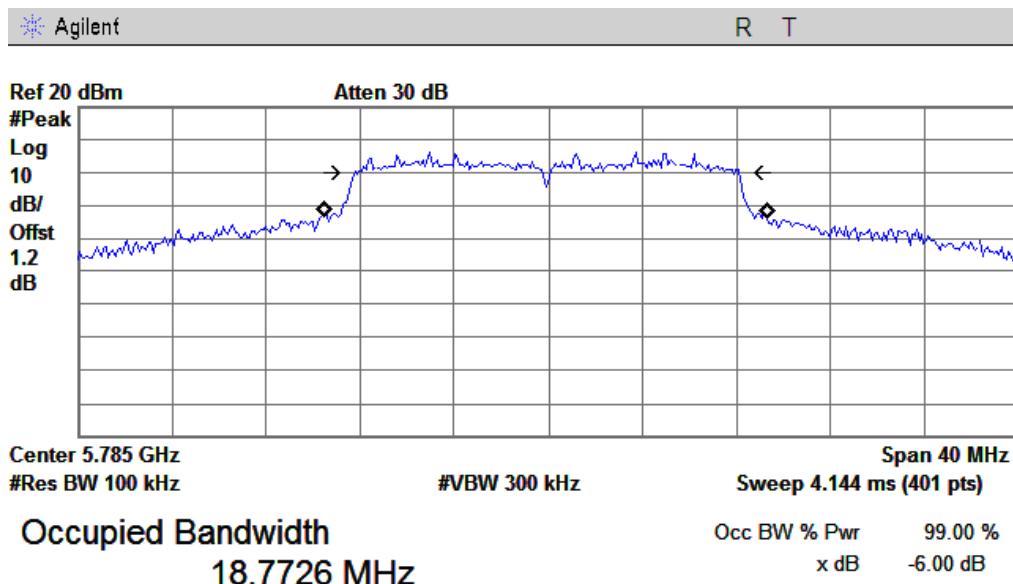


Transmit Freq Error -67.998 kHz
 x dB Bandwidth 16.362 MHz

802.11a High Channel

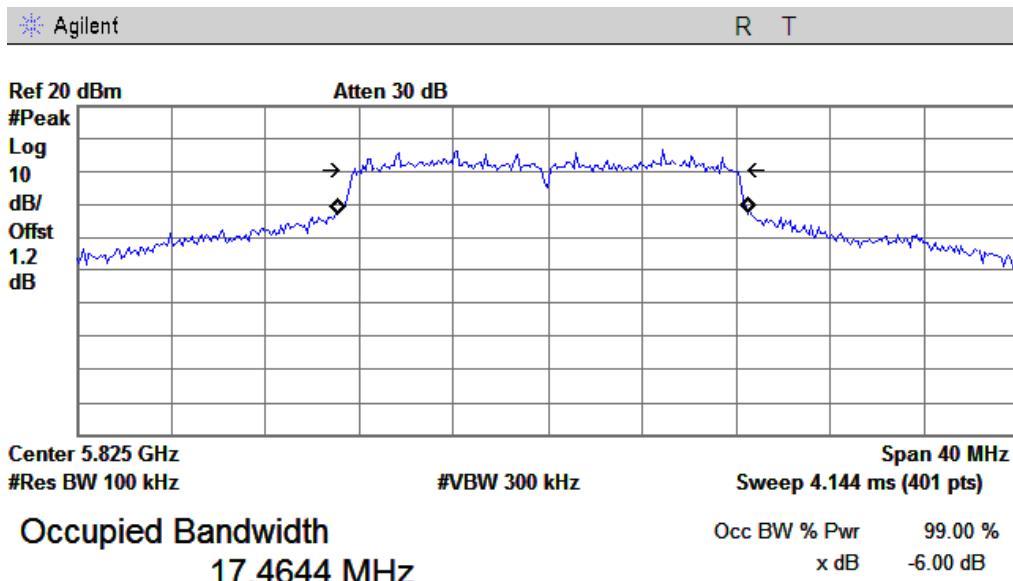


Transmit Freq Error -205.581 kHz
 x dB Bandwidth 15.995 MHz

802.11 n20 Low Channel

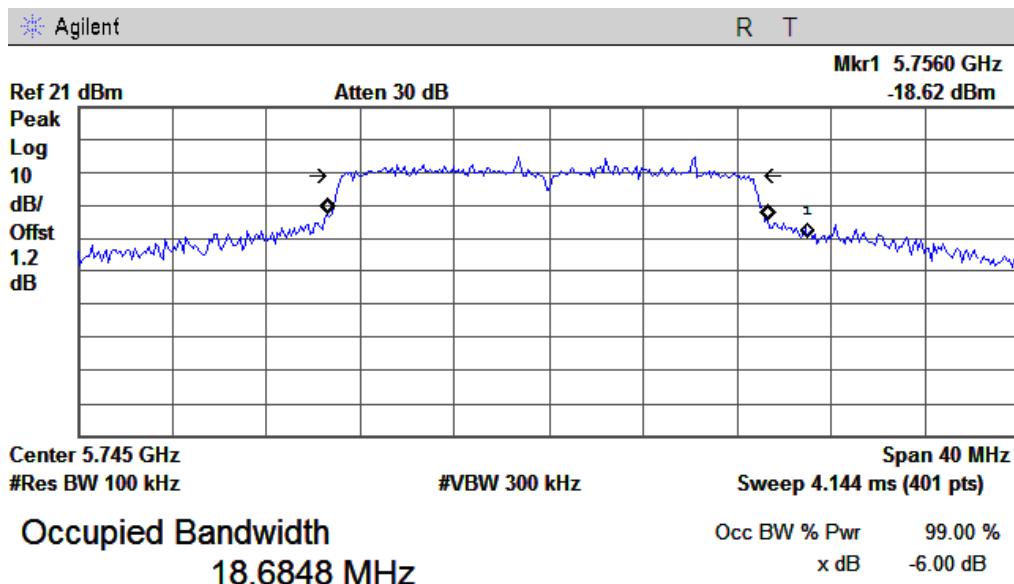


Transmit Freq Error -62.650 kHz
x dB Bandwidth 17.322 MHz

802.11 n20 Middle Channel

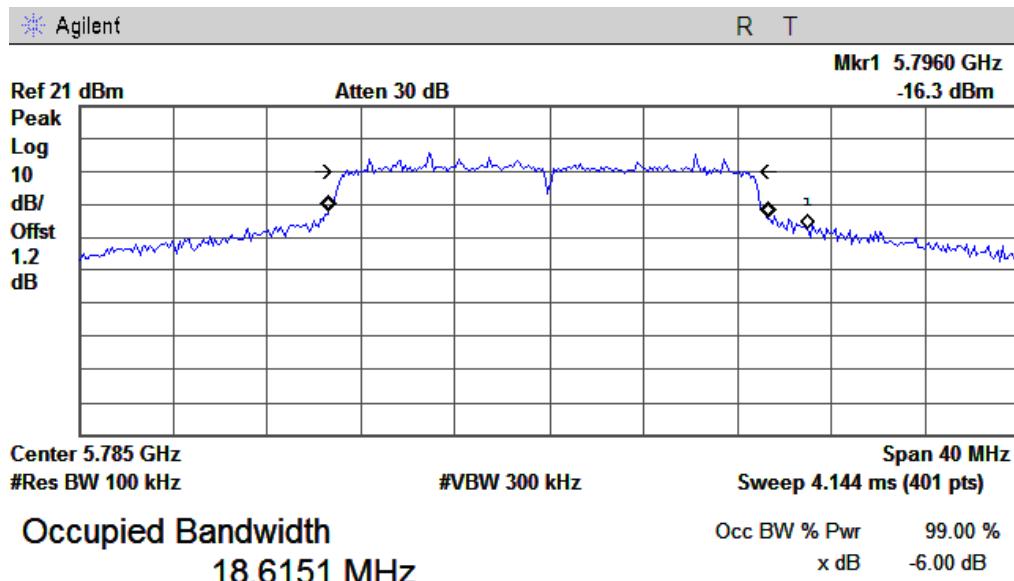


Transmit Freq Error -43.419 kHz
x dB Bandwidth 16.962 MHz

802.11n20 High Channel

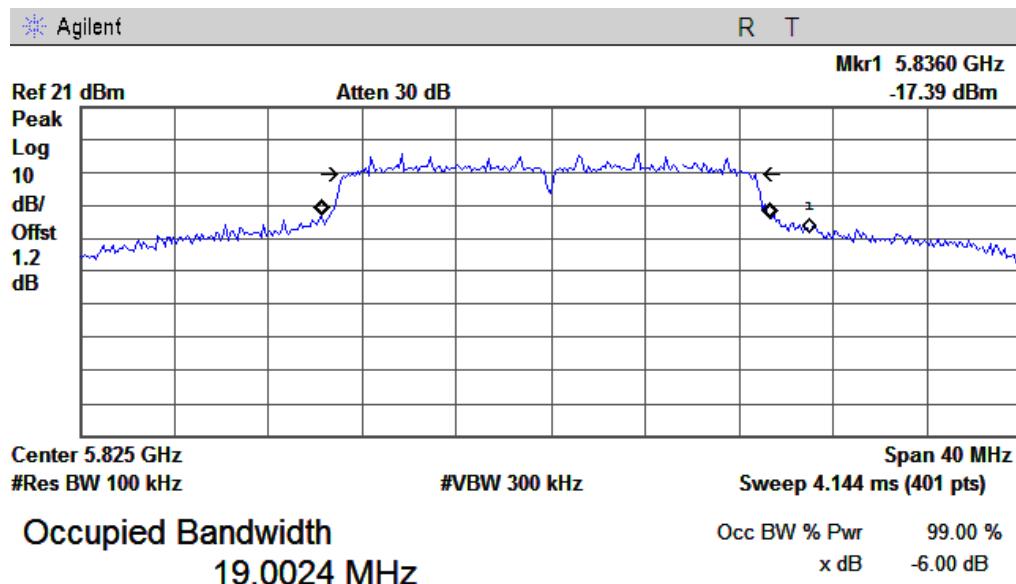


Transmit Freq Error -210.896 kHz
x dB Bandwidth 16.856 MHz

802.11n40 Low Channel

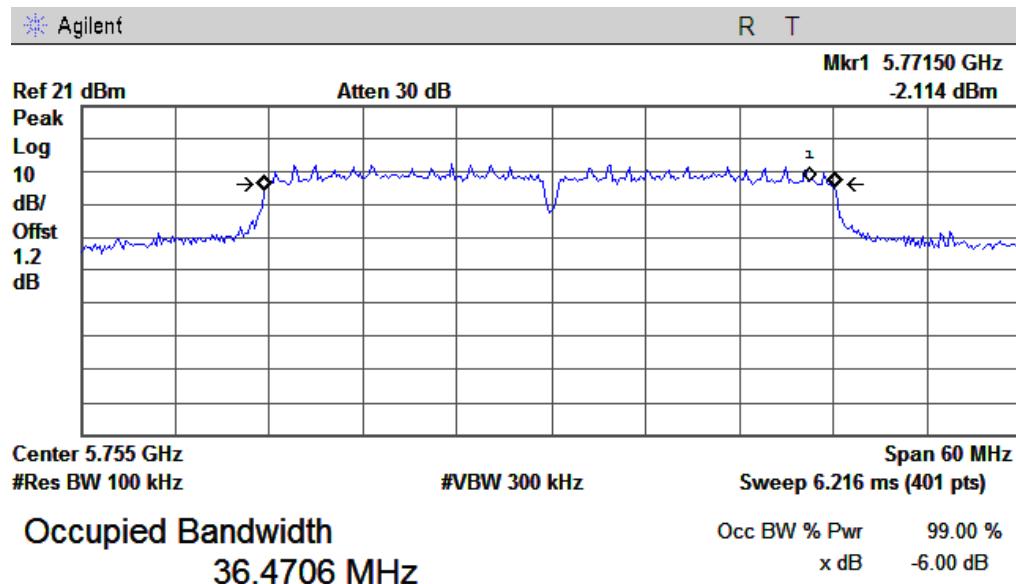


Transmit Freq Error -61.689 kHz
x dB Bandwidth 35.932 MHz

802.11n40 High Channel

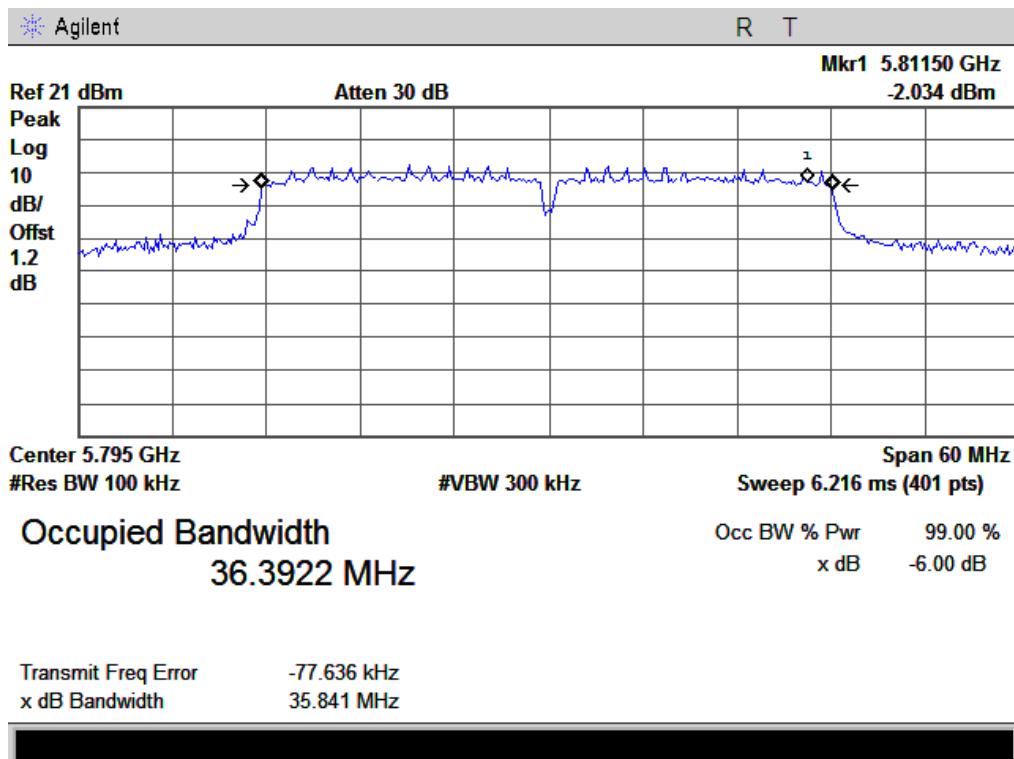


The 20dB bandwidth:

802.11a Low Channel

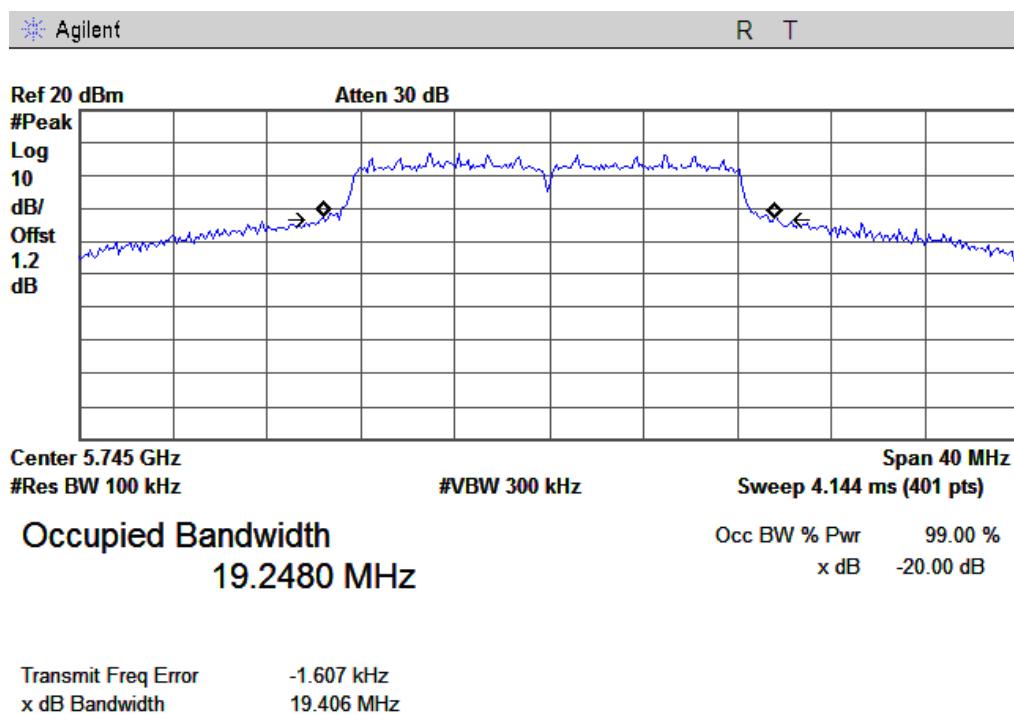


802.11a Middle Channel

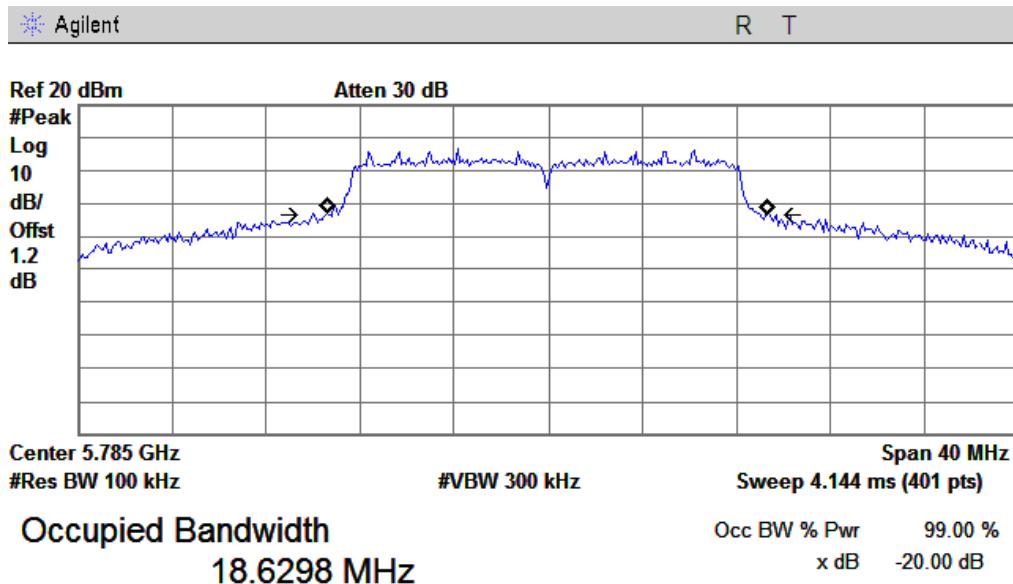


Transmit Freq Error -54.681 kHz
 x dB Bandwidth 19.474 MHz

802.11a High Channel

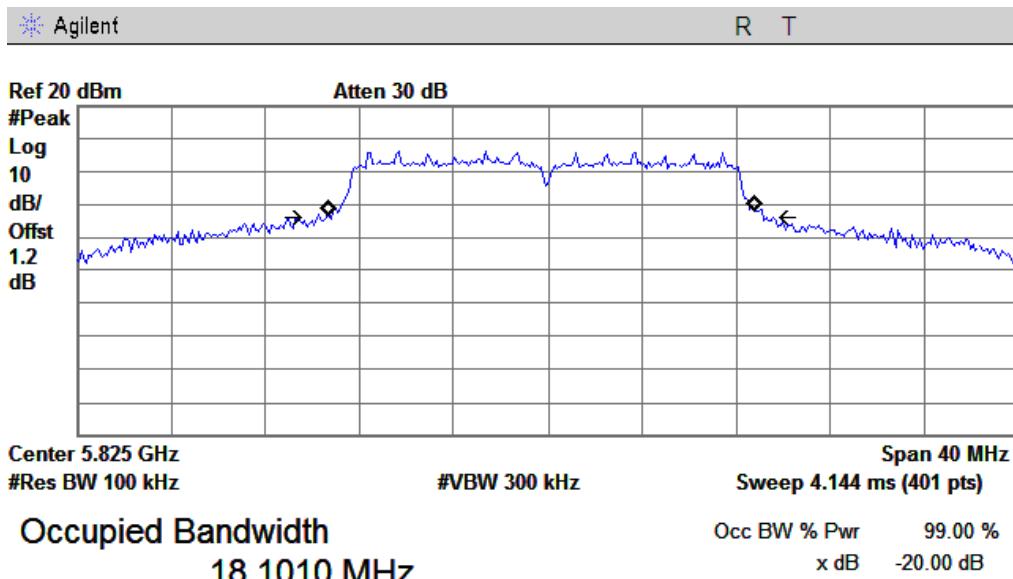


Transmit Freq Error -229.132 kHz
 x dB Bandwidth 18.930 MHz

802.11n20 Low Channel

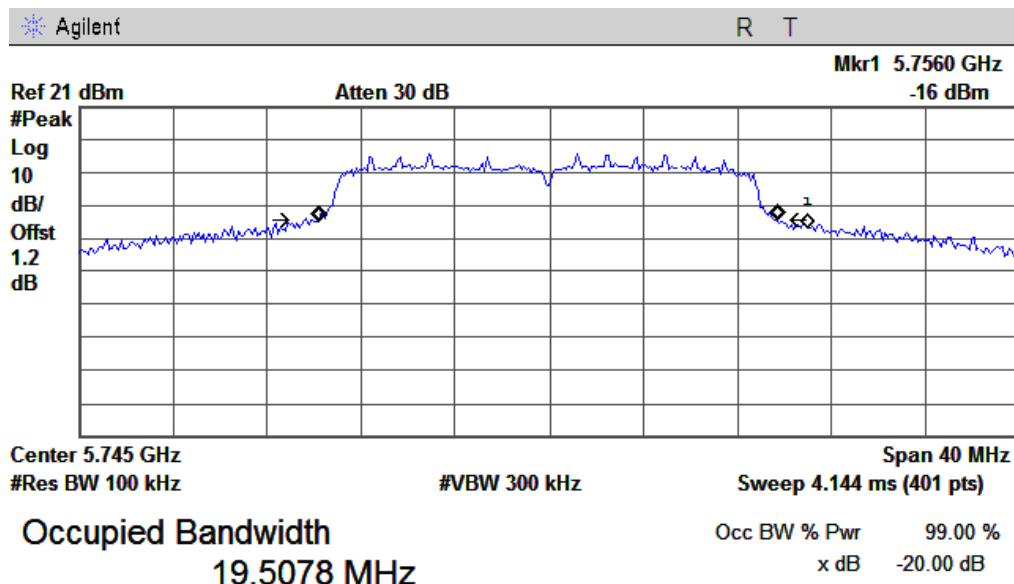


Transmit Freq Error -90.119 kHz
 x dB Bandwidth 19.985 MHz

802.11n20 Middle Channel

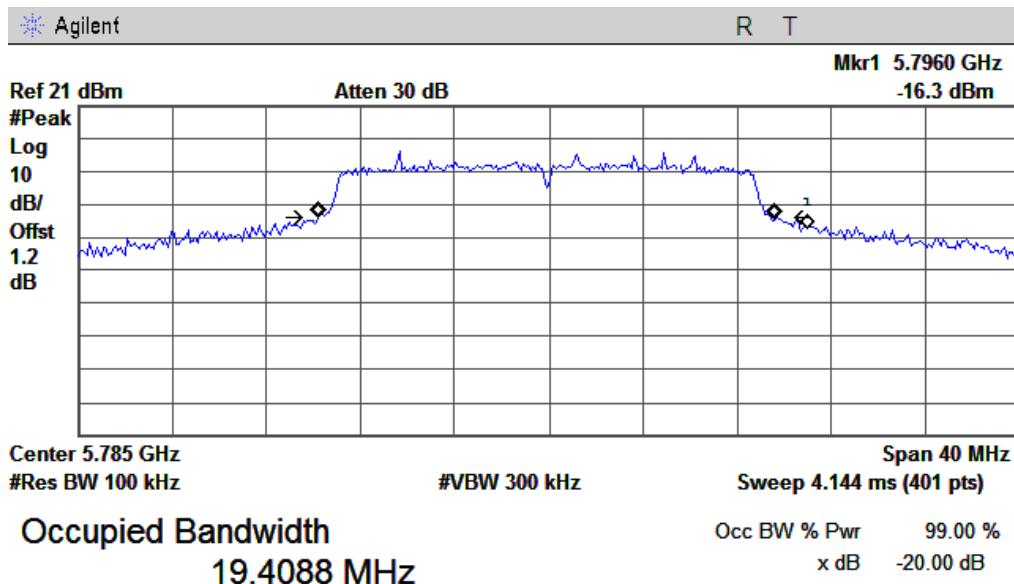


Transmit Freq Error -64.809 kHz
 x dB Bandwidth 19.540 MHz

802.11n20 High Channel

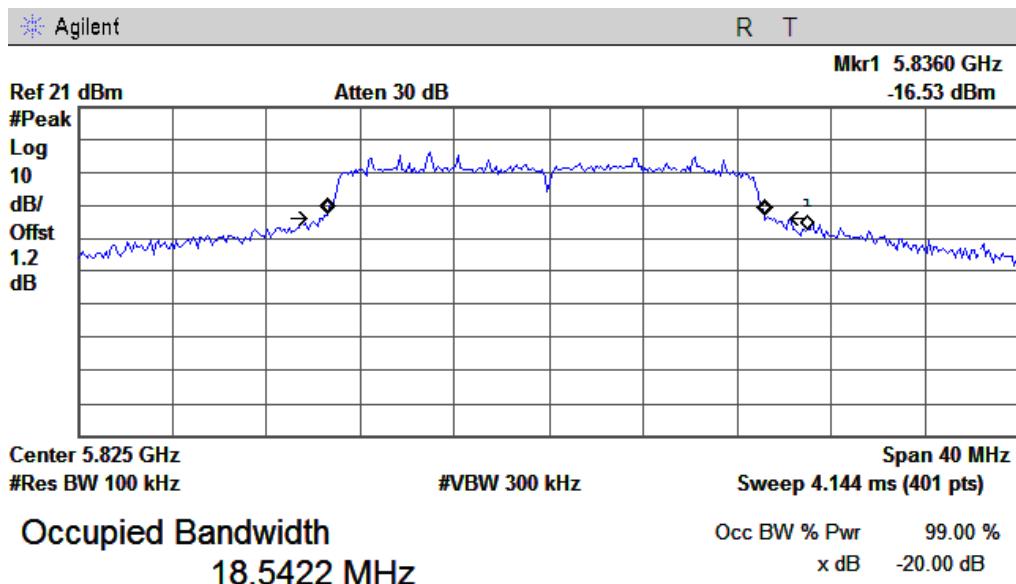


Transmit Freq Error -118.772 kHz
 x dB Bandwidth 19.205 MHz

802.11n40 Low Channel

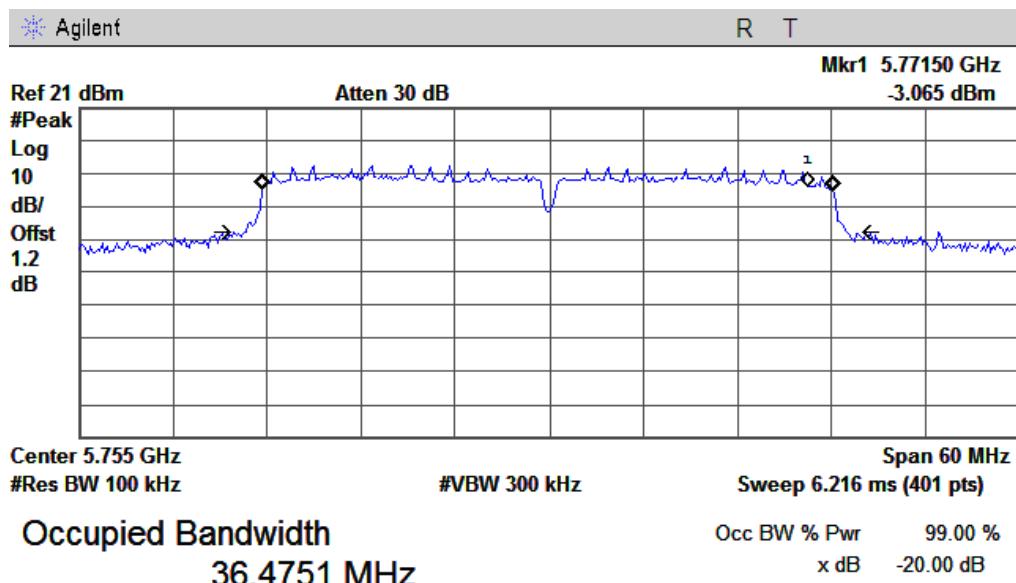

Transmit Freq Error -67.350 kHz
 x dB Bandwidth 38.342 MHz


802.11n40 High Channel

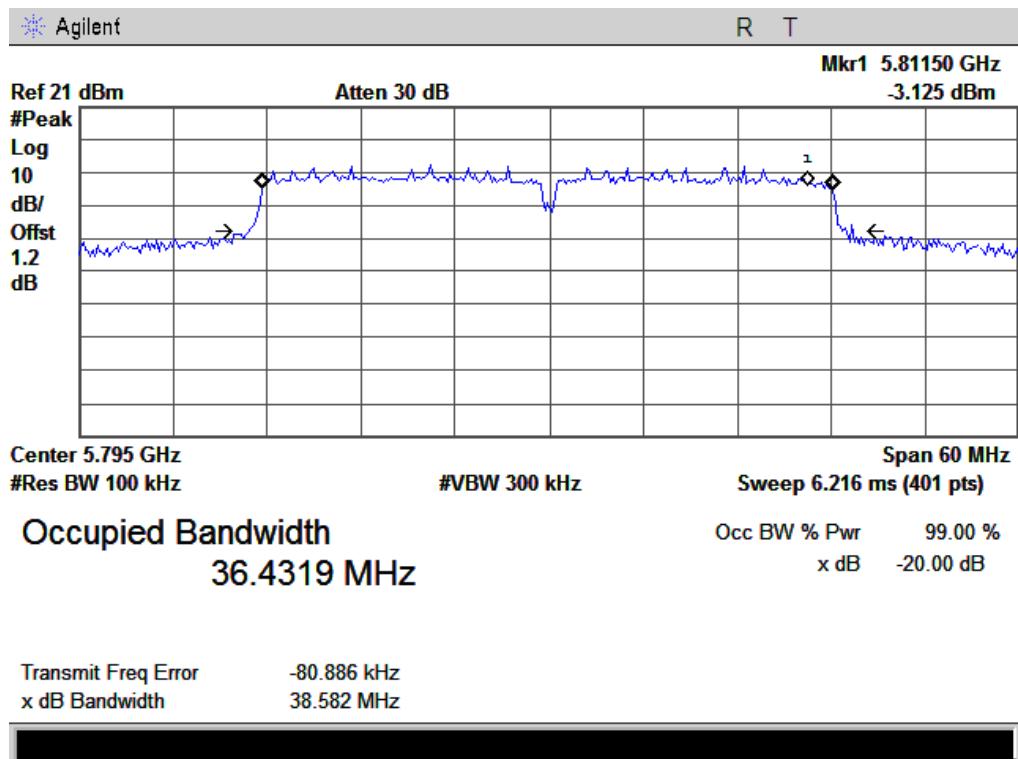

RF Port CH1
 6dB bandwidth:


Channel	Channel Frequency (MHz)	Data Rate (Mbps)	Measured 6dB Bandwidth (MHz)	FCC Part 15.247 Limit (kHz)
802.11a mode				
Low	5745	1	15.783	>500
Middle	5785	1	16.332	>500
High	5825	1	16.372	>500
802.11n(20M) mode				
Low	5745	MCS0	16.805	>500
Middle	5785	MCS0	16.697	>500
High	5825	MCS0	17.029	>500
802.11n(40M) mode				
Low	5755	MCS0	35.806	>500
High	5795	MCS0	36.132	>500

802.11a Low Channel

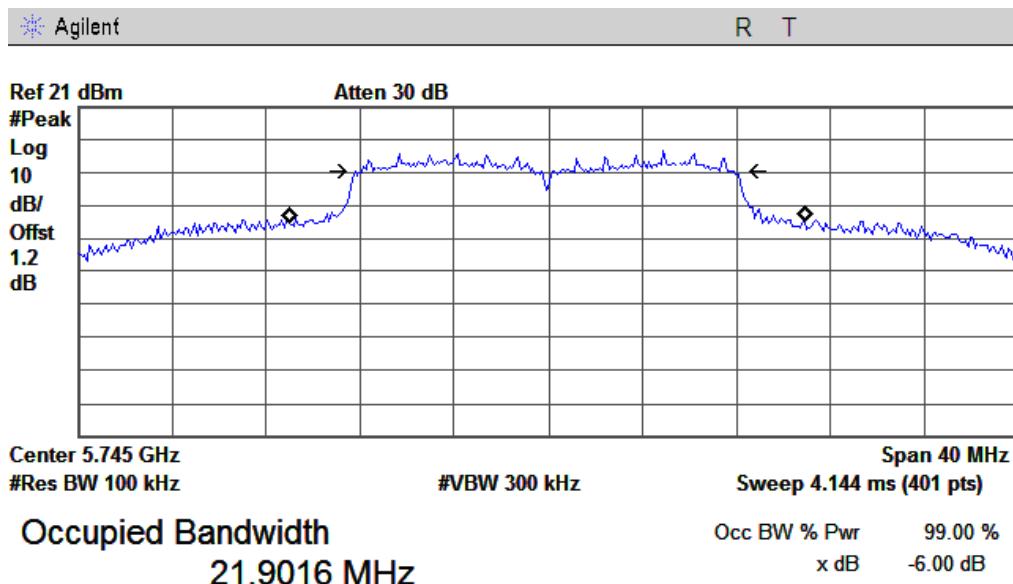

Transmit Freq Error -69.432 kHz
 x dB Bandwidth 15.783 MHz

802.11a Middle Channel

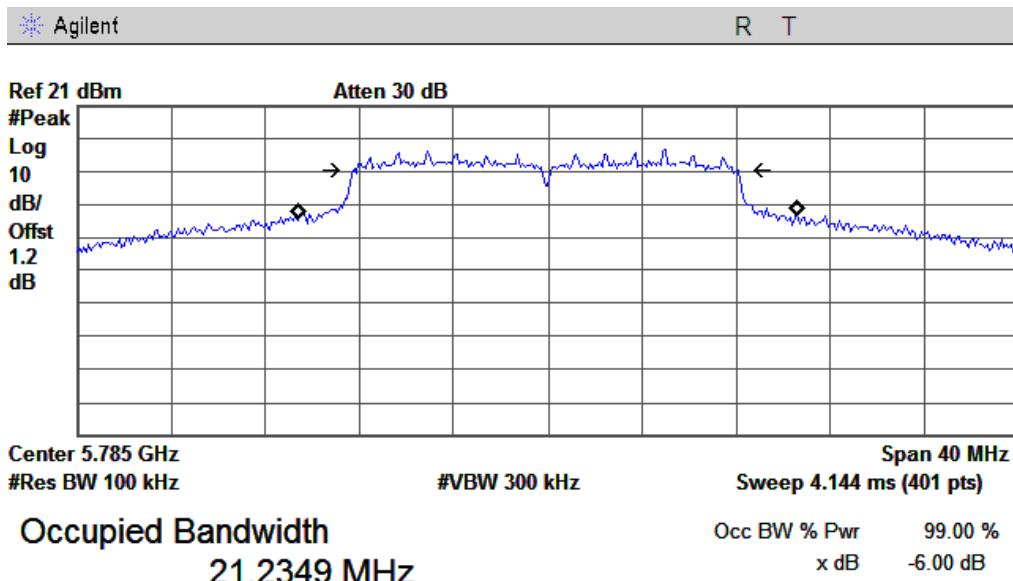

Transmit Freq Error -10.088 kHz
 x dB Bandwidth 16.332 MHz


**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 137 of 224
www.siemic.com.cn


802.11a High Channel

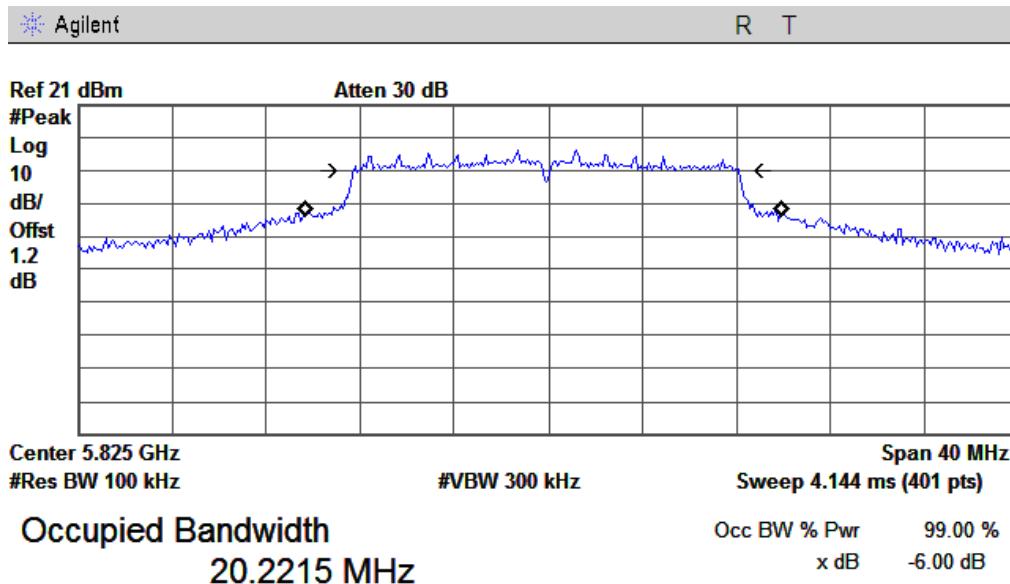

802.11n20 Low Channel

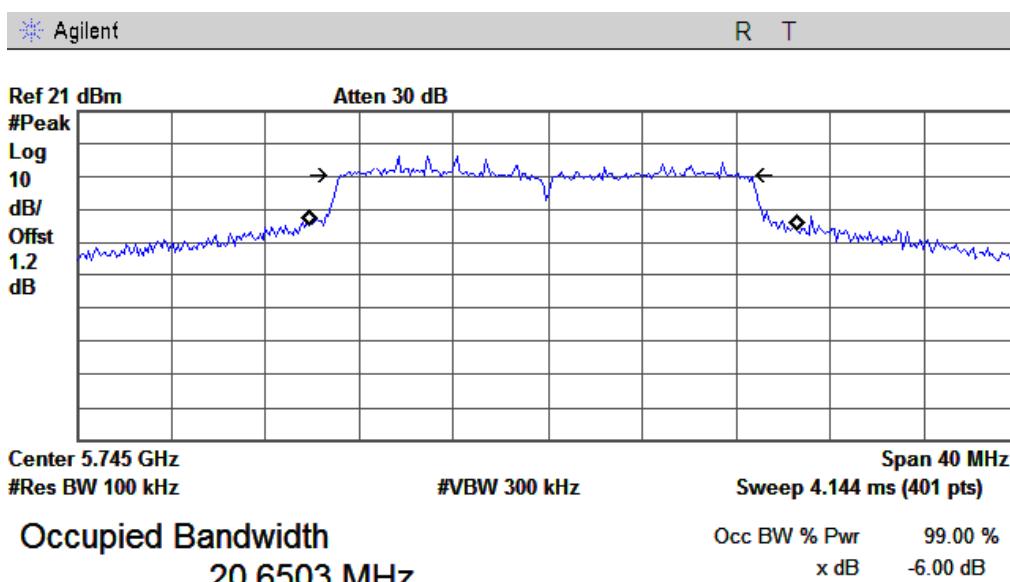


802.11n20 Middle Channel

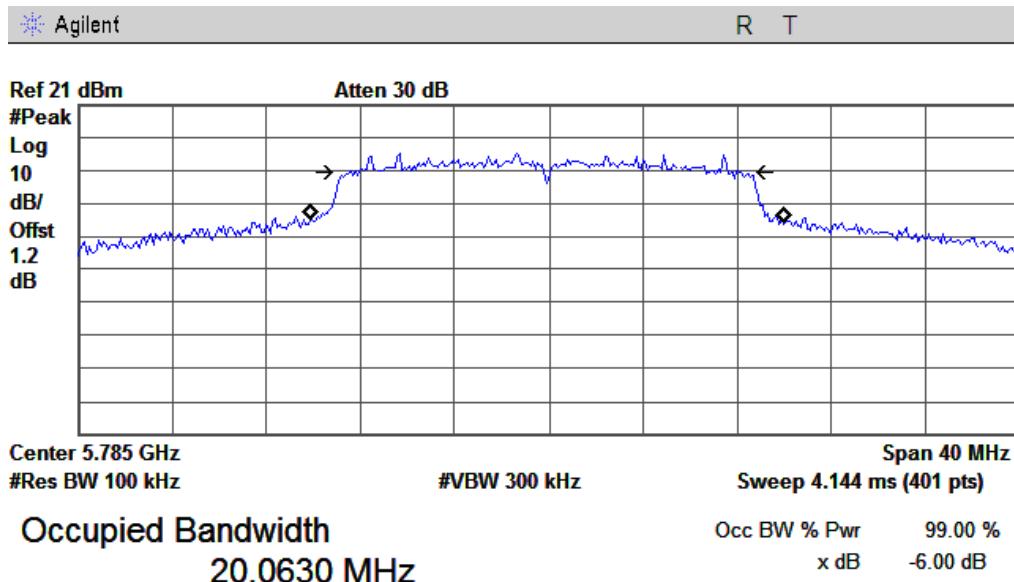


Transmit Freq Error -72.063 kHz
 x dB Bandwidth 16.697 MHz

802.11n20 High Channel

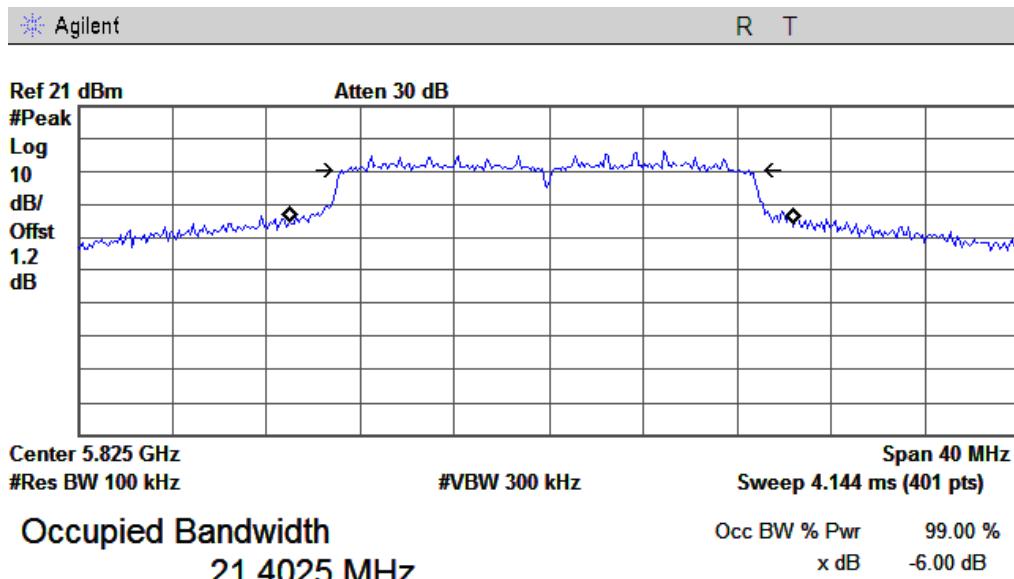


Transmit Freq Error -262.874 kHz
 x dB Bandwidth 17.029 MHz

802.11n40 Low Channel

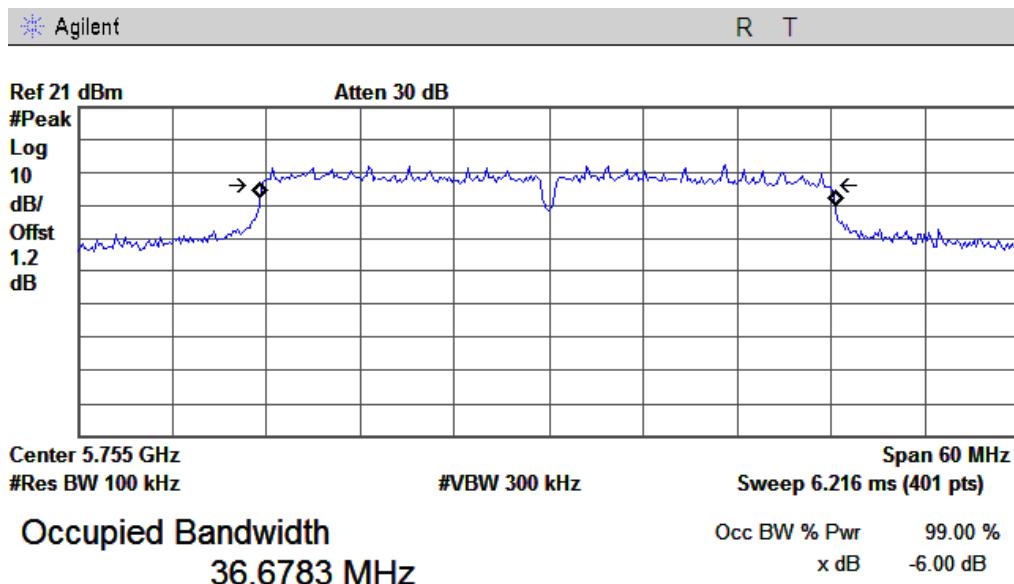

Transmit Freq Error -48.220 kHz
 x dB Bandwidth 35.806 MHz

802.11n40 High Channel

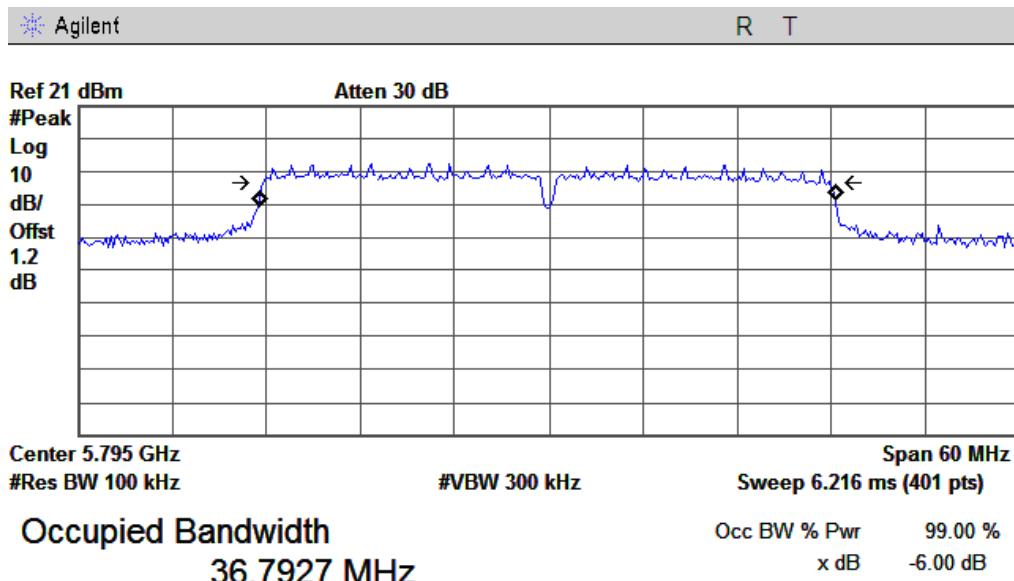


Transmit Freq Error -105.827 kHz
 x dB Bandwidth 36.132 MHz




The 20dB bandwidth:

802.11a Low Channel

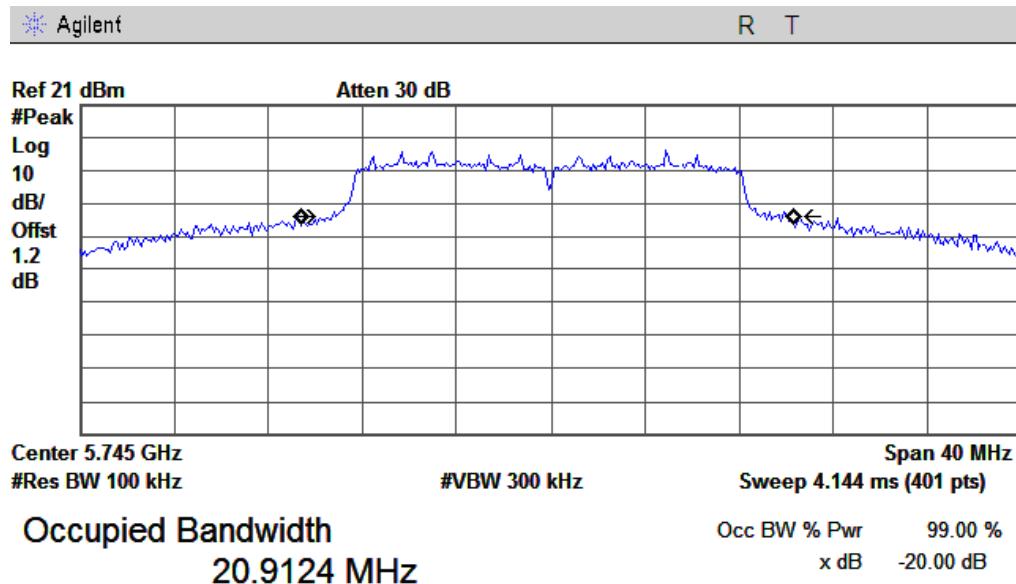


Transmit Freq Error -106.589 kHz
x dB Bandwidth 19.321 MHz

802.11a Middle Channel

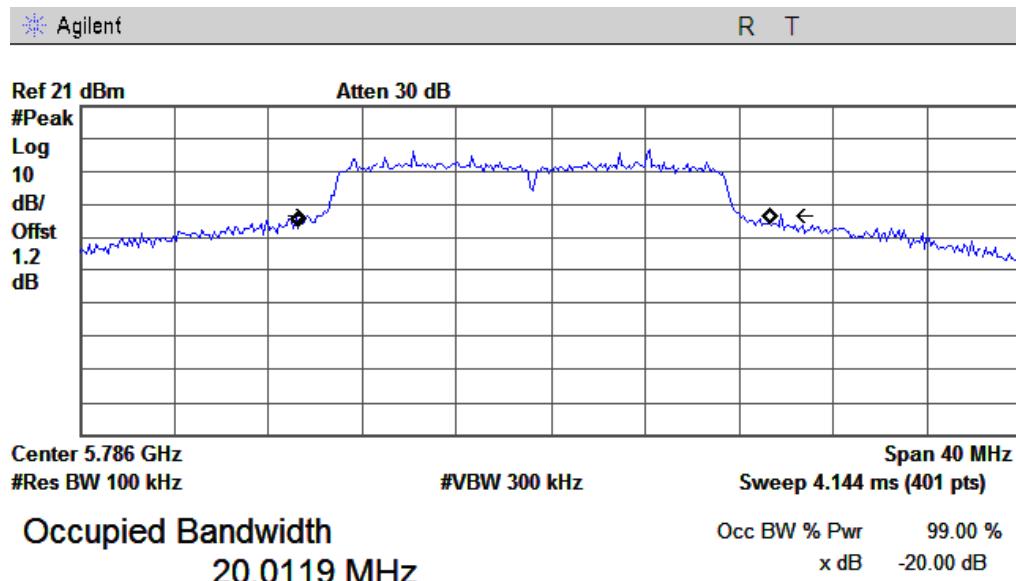


Transmit Freq Error -700.303 kHz
x dB Bandwidth 19.624 MHz

802.11a High Channel

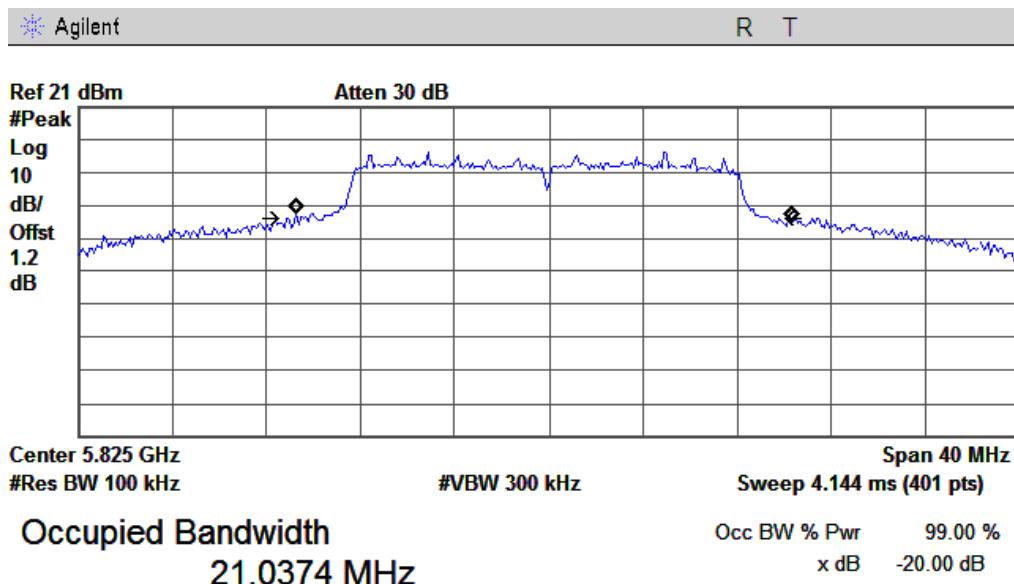


Transmit Freq Error -176.827 kHz
 x dB Bandwidth 20.116 MHz

802.11 n20 Low Channel

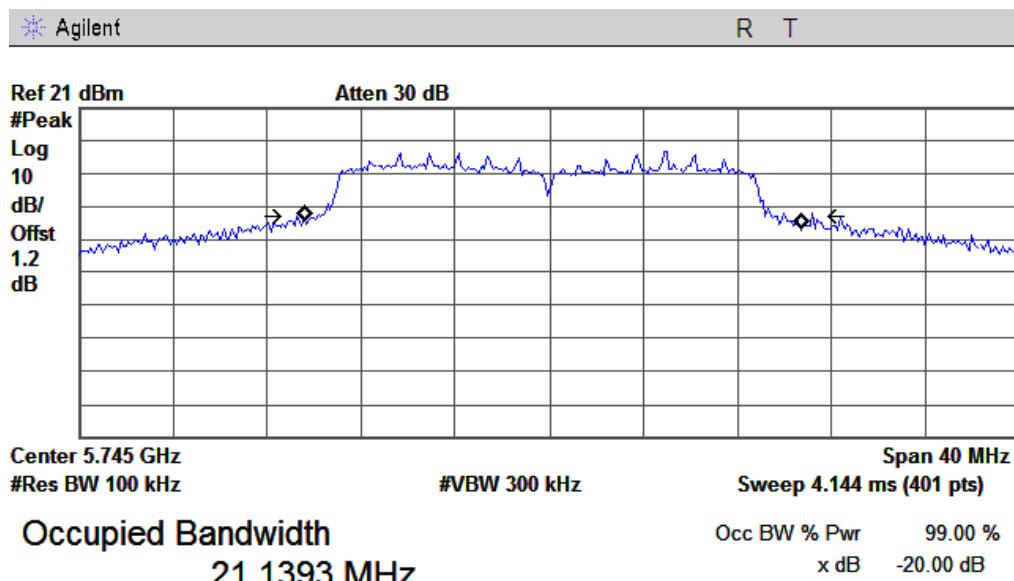


Transmit Freq Error 150.470 kHz
 x dB Bandwidth 21.939 MHz

802.11 n20 Middle Channel

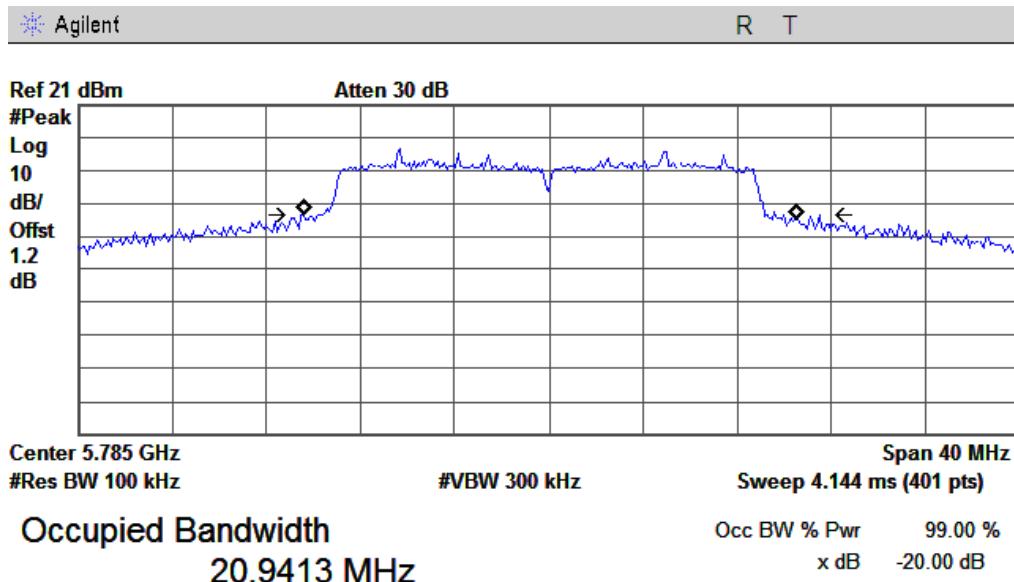


Transmit Freq Error 55.385 kHz
x dB Bandwidth 21.981 MHz

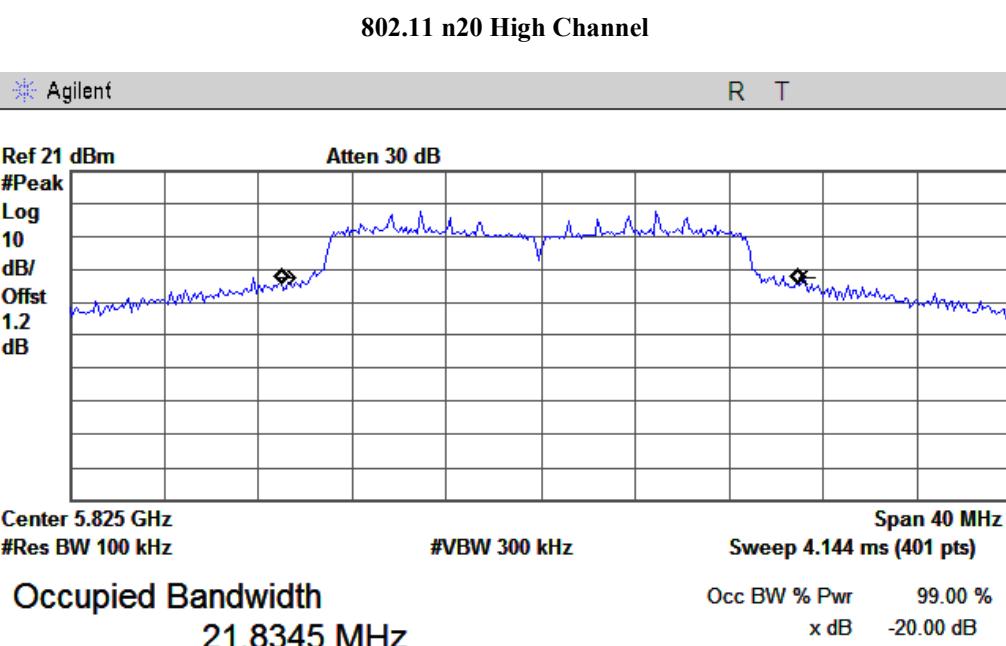


Transmit Freq Error -55.675 kHz
x dB Bandwidth 20.034 MHz

802.11n40 Low Channel

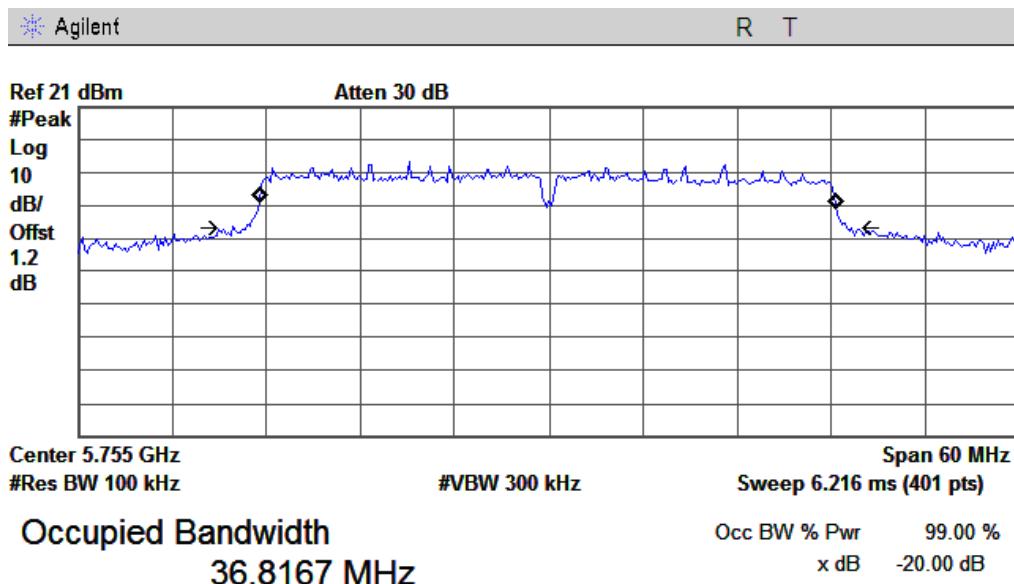

Transmit Freq Error -39.057 kHz
 x dB Bandwidth 39.154 MHz

802.11n40 High Channel

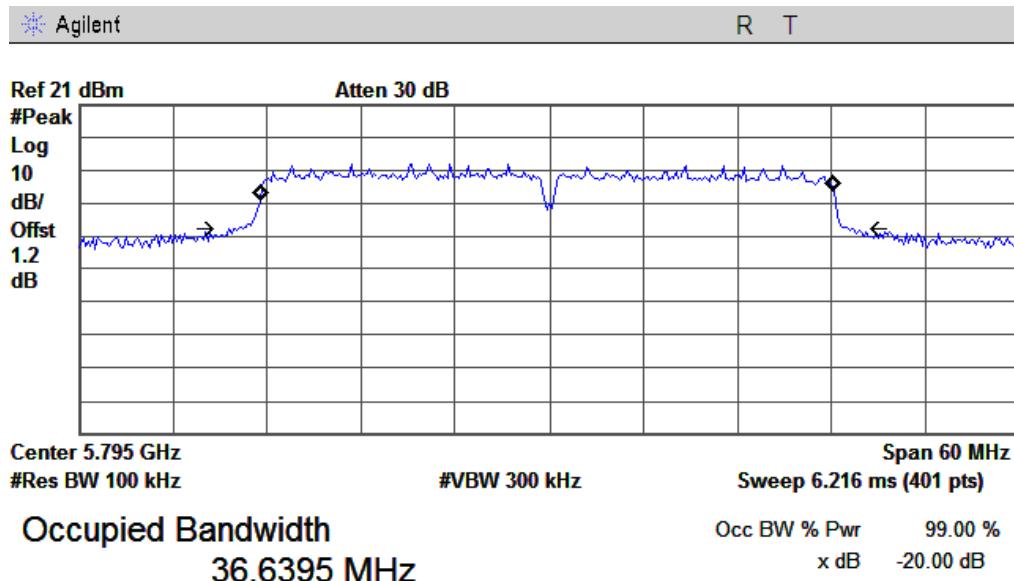

Transmit Freq Error -119.363 kHz
 x dB Bandwidth 39.836 MHz




RF Port CH2

6dB bandwidth:


Channel	Channel Frequency (MHz)	Data Rate (Mbps)	Measured 6dB Bandwidth (MHz)	FCC Part 15.247 Limit (kHz)
802.11b mode				
Low	5745	1	16.168	>500
Middle	5785	1	16.340	>500
High	5825	1	16.243	>500
802.11n(20M) mode				
Low	5745	MCS0	16.722	>500
Middle	5785	MCS0	16.898	>500
High	5825	MCS0	16.935	>500
802.11n(40M) mode				
Low	5755	MCS0	35.689	>500
High	5795	MCS0	35.687	>500

802.11a Low Channel

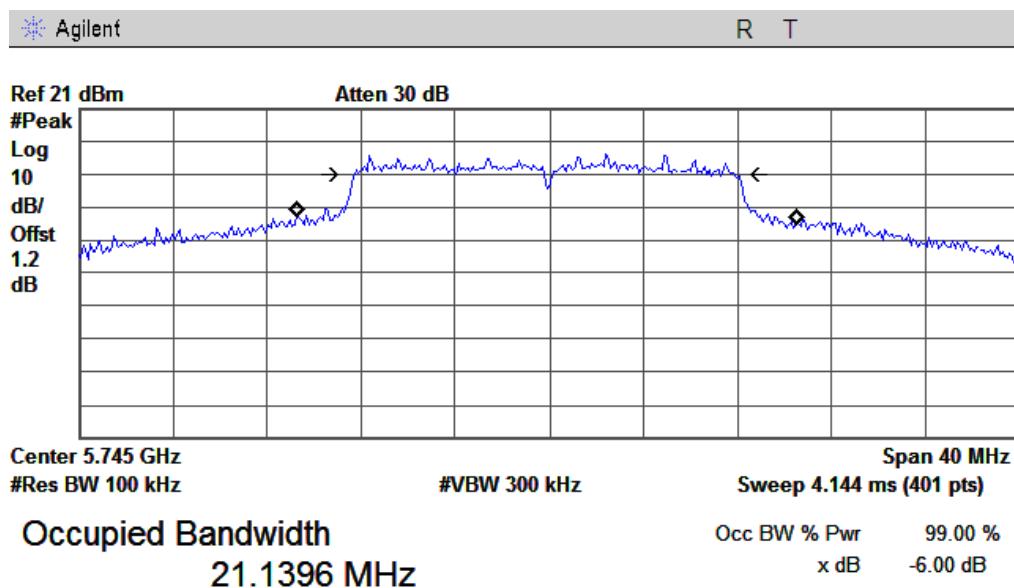


Transmit Freq Error -108.631 kHz
x dB Bandwidth 16.168 MHz

802.11a Middle Channel

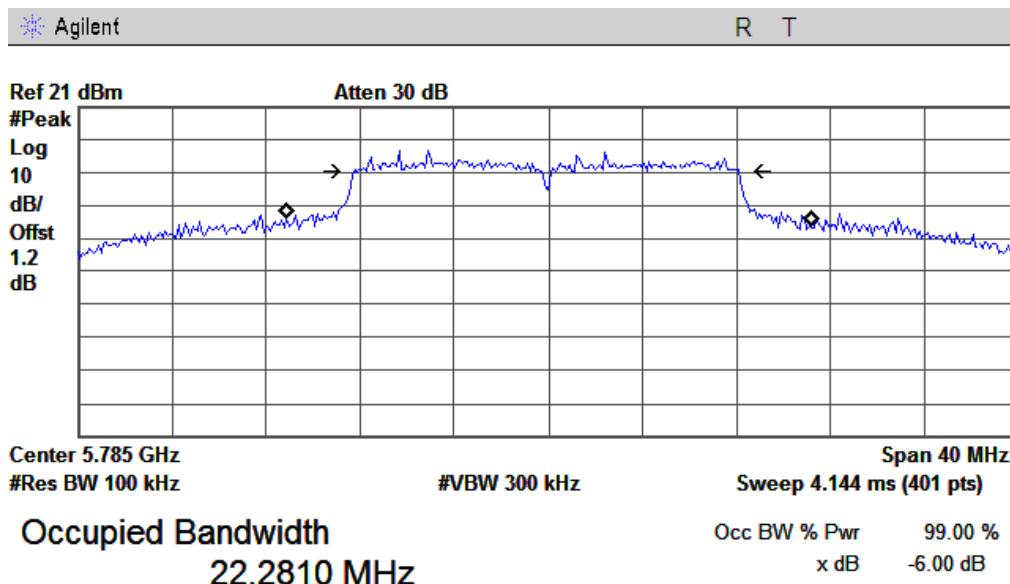


Transmit Freq Error 45.095 kHz
 x dB Bandwidth 16.340 MHz

802.11a High Channel

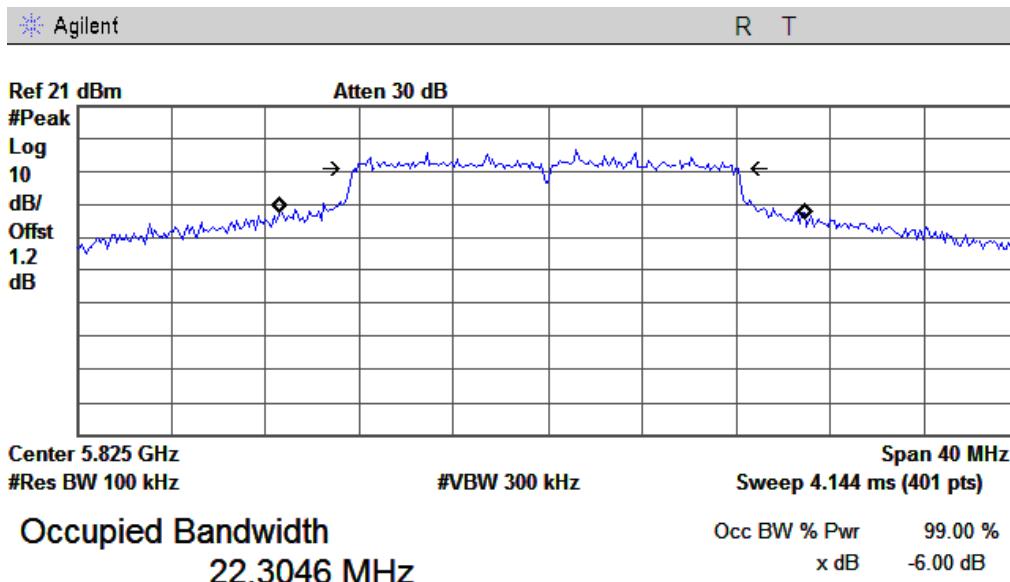


Transmit Freq Error -209.458 kHz
 x dB Bandwidth 16.243 MHz

802.11n20 Low Channel

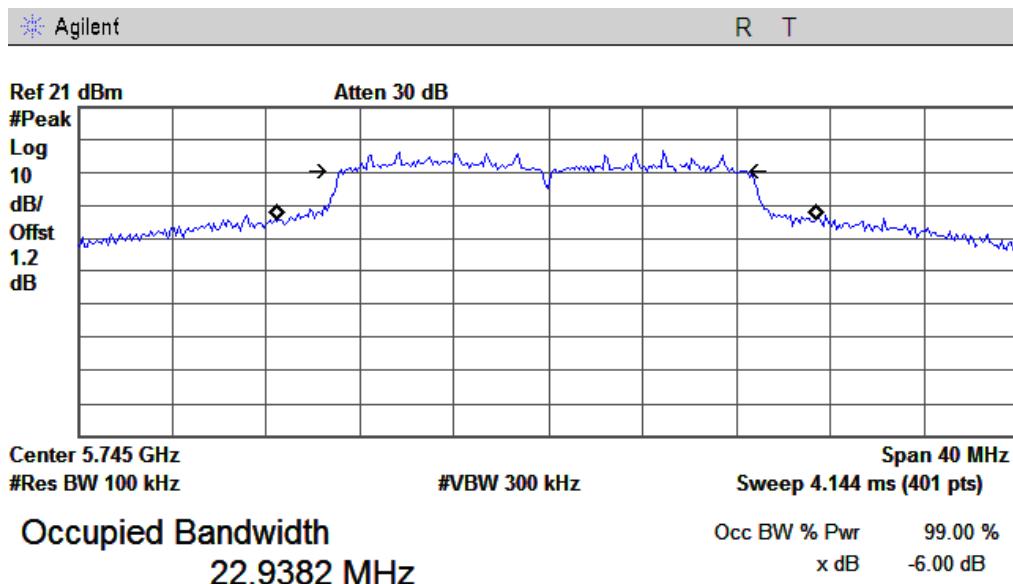


Transmit Freq Error -70.029 kHz
 x dB Bandwidth 16.722 MHz

802.11n20 Middle Channel

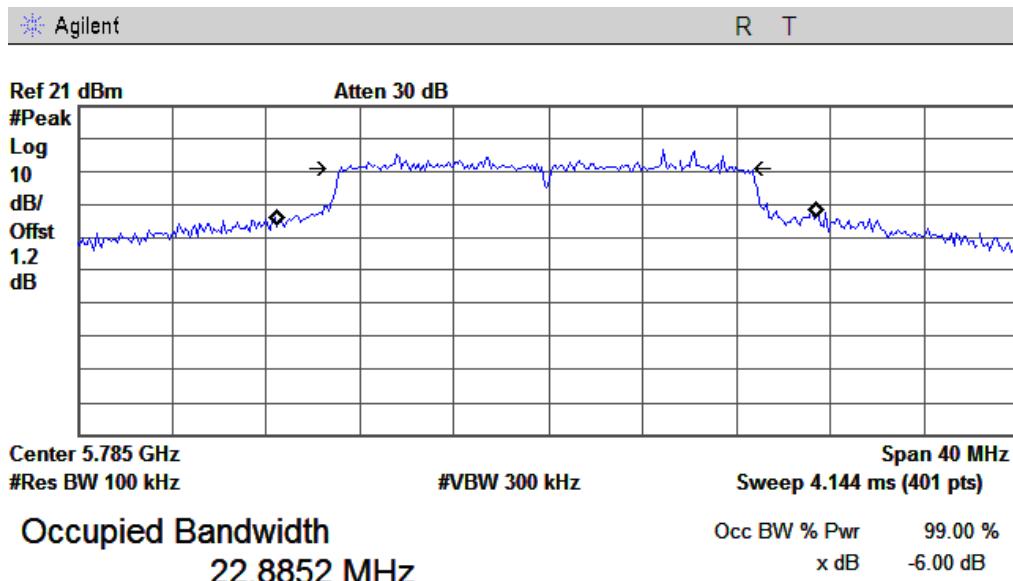


Transmit Freq Error -78.018 kHz
 x dB Bandwidth 16.898 MHz

802.11n20 High Channel

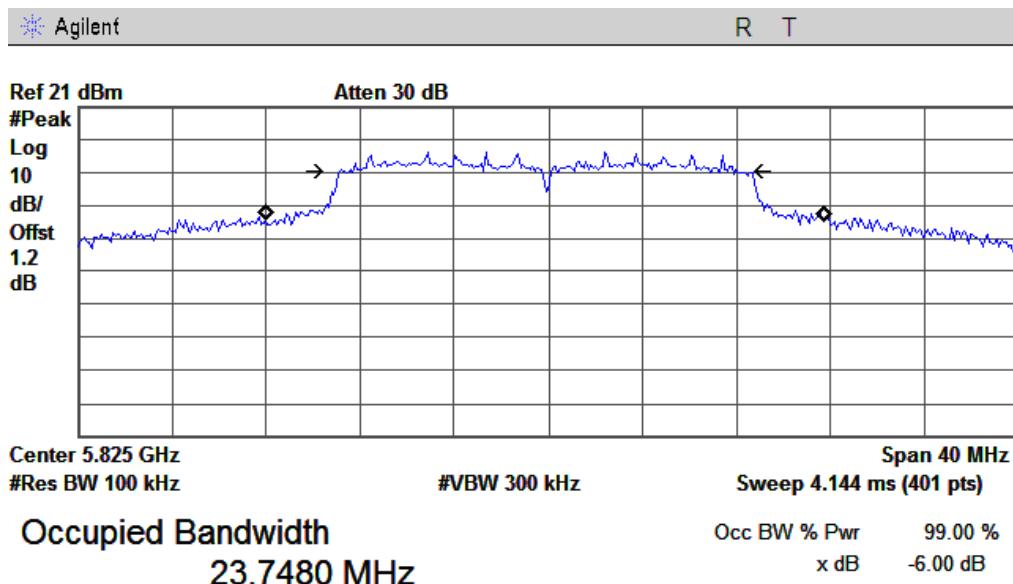


Transmit Freq Error -159.609 kHz
 x dB Bandwidth 16.935 MHz

802.11n40 Low Channel

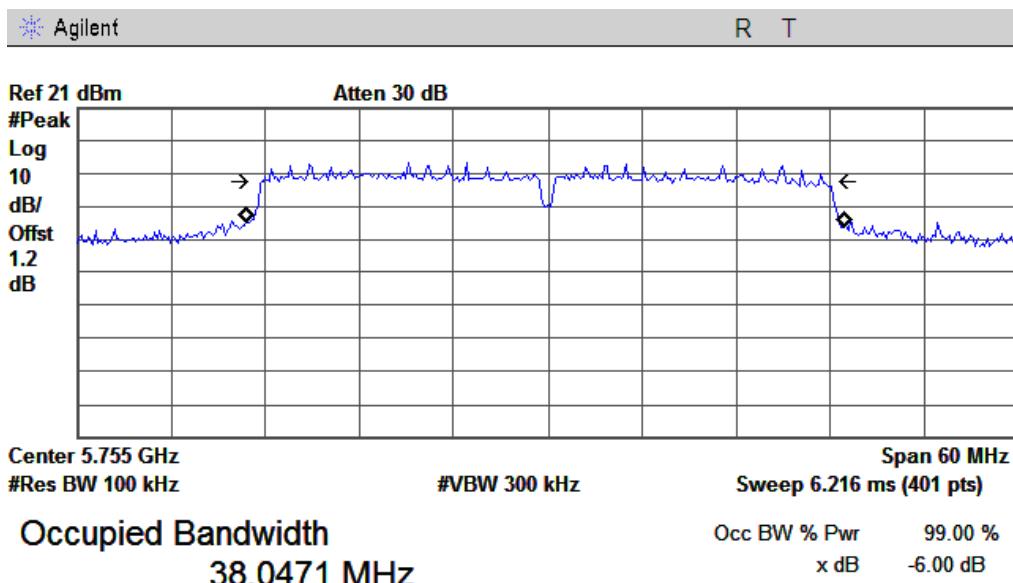


Transmit Freq Error -129.644 kHz
 x dB Bandwidth 35.689 MHz

802.11n40 High Channel

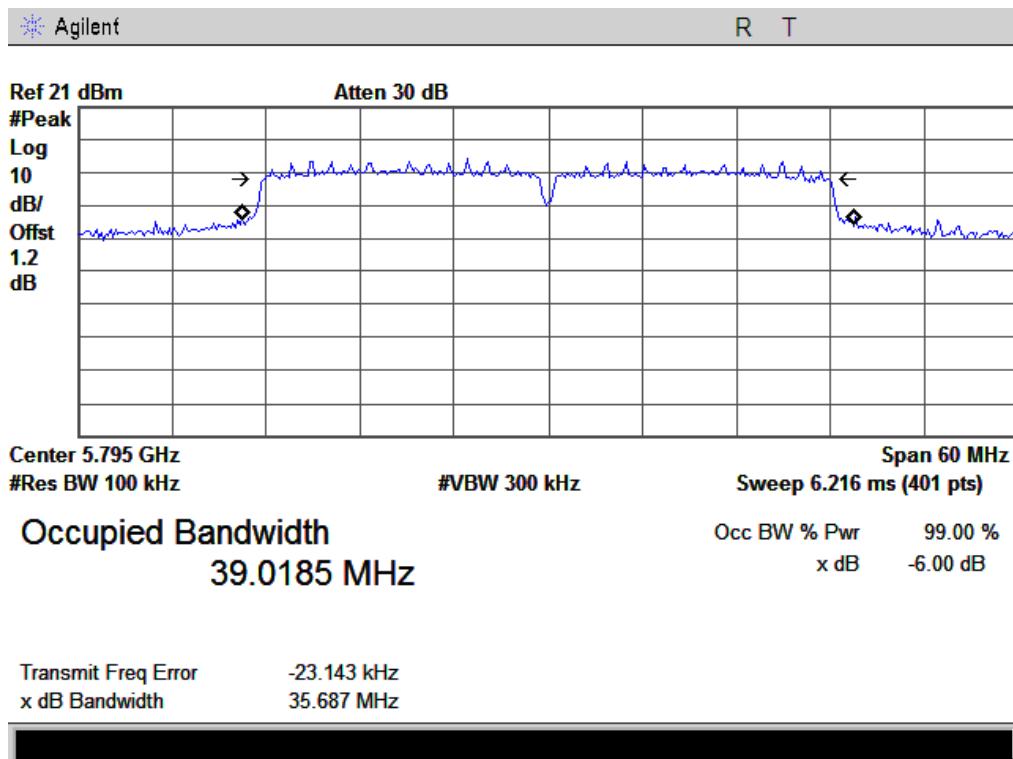


The 20dB bandwidth:

802.11a Low Channel

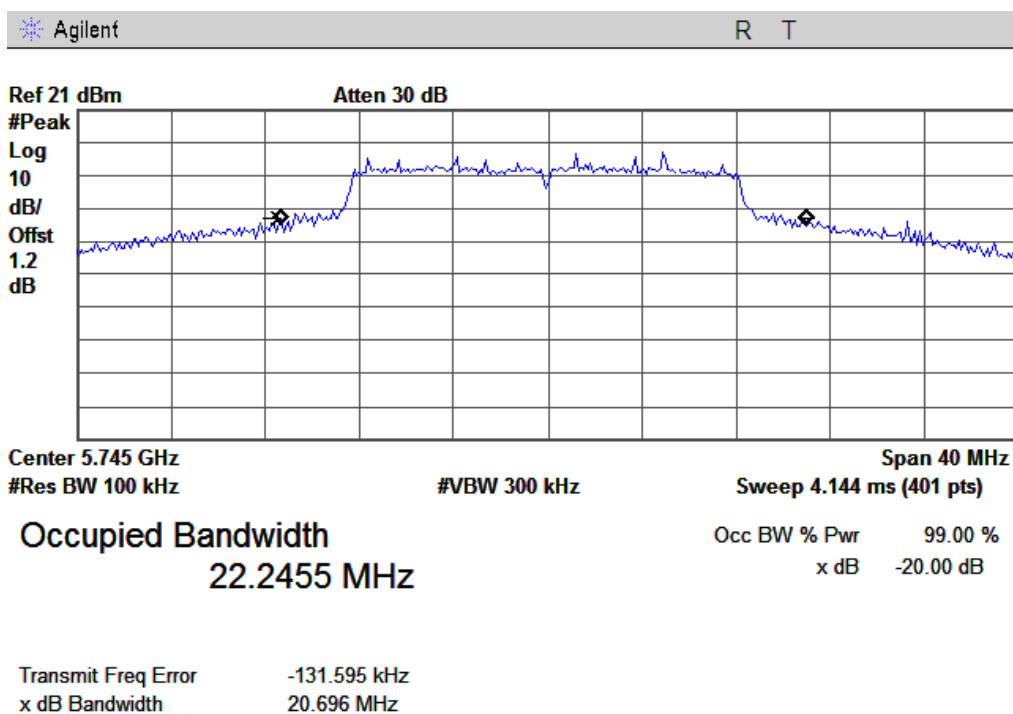


802.11a Middle Channel

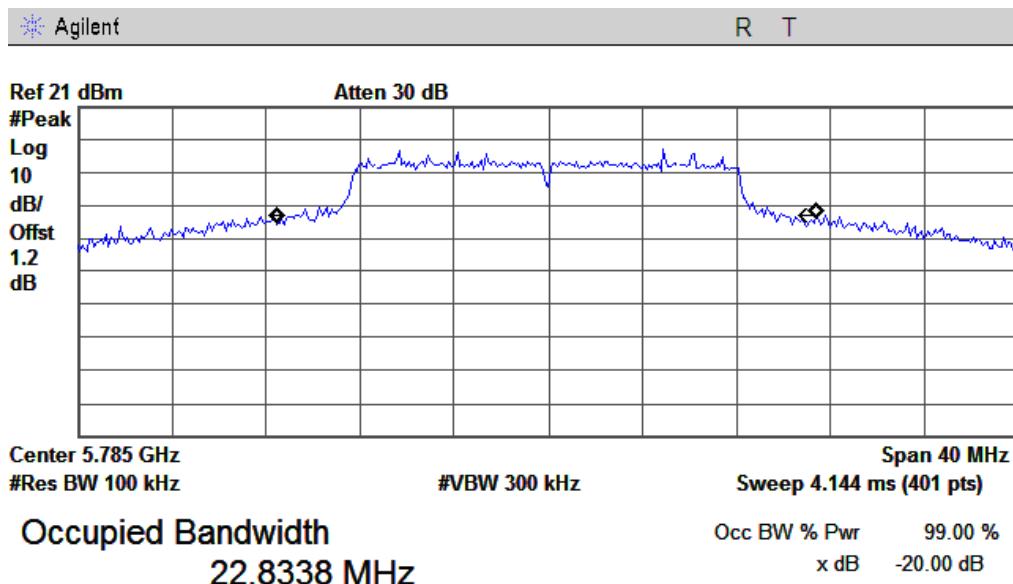


Transmit Freq Error -55.961 kHz
 x dB Bandwidth 20.416 MHz

802.11a High Channel

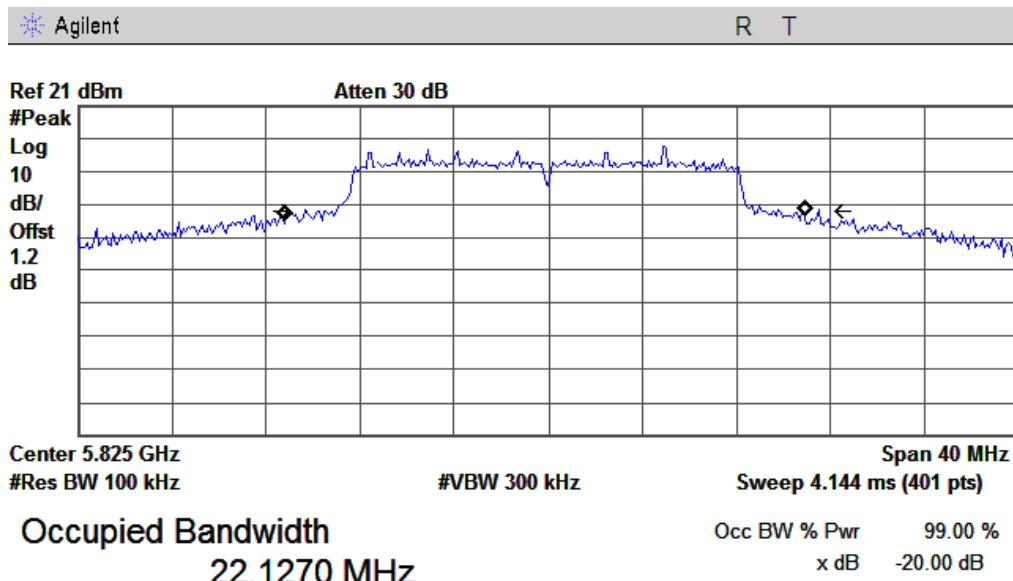


Transmit Freq Error -182.057 kHz
 x dB Bandwidth 21.848 MHz

802.11 n20 Low Channel

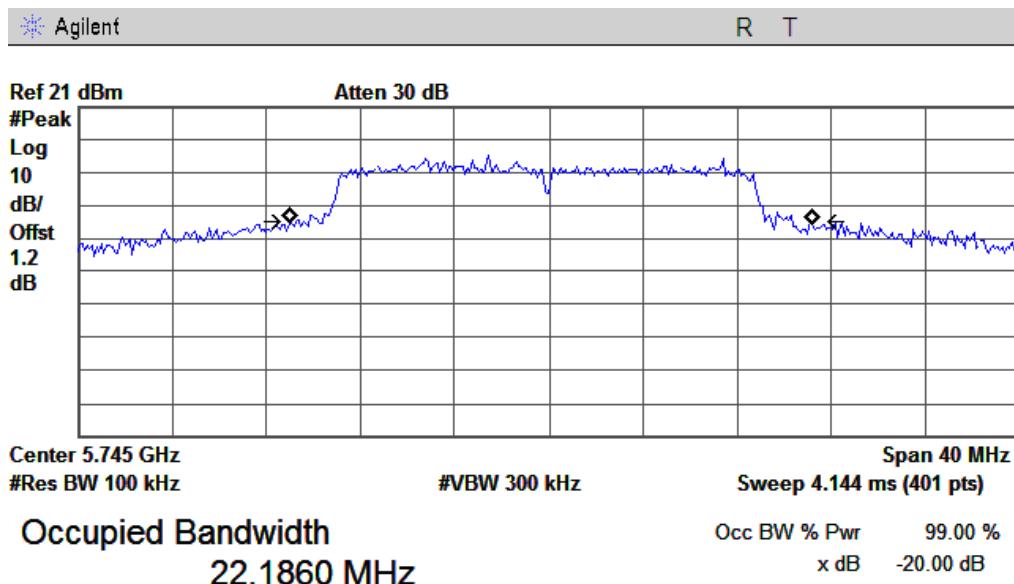


Transmit Freq Error 142.620 kHz
x dB Bandwidth 21.817 MHz

802.11 n20 Middle Channel

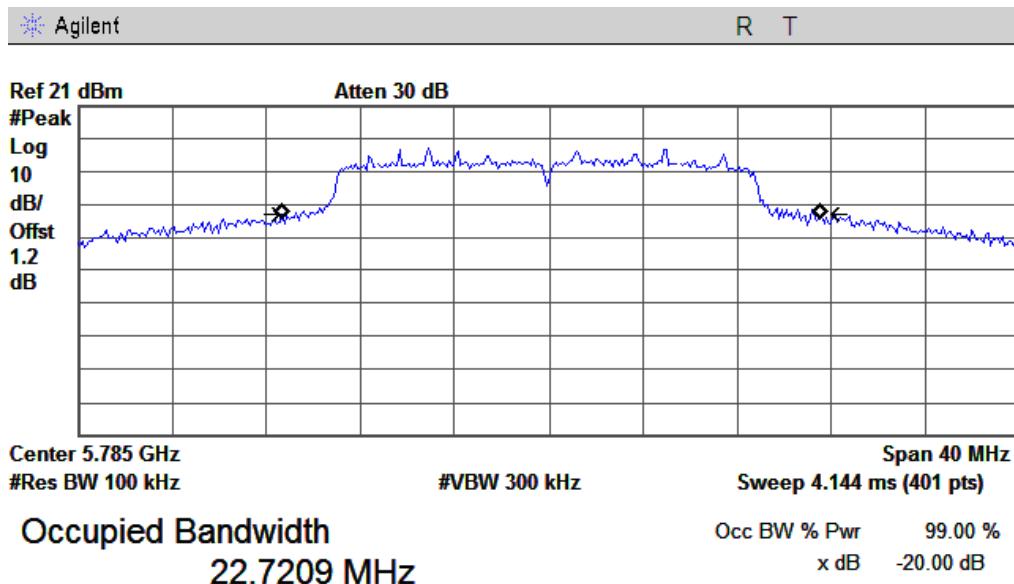


Transmit Freq Error 102.124 kHz
x dB Bandwidth 21.994 MHz

802.11n20 High Channel

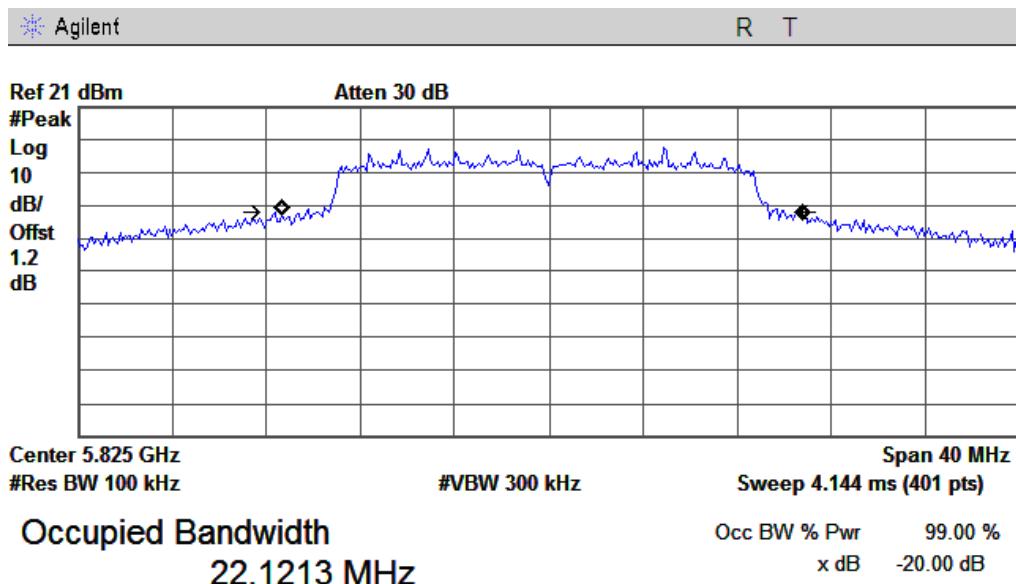

Transmit Freq Error -244.271 kHz
 x dB Bandwidth 21.648 MHz

802.11n40 Low Channel

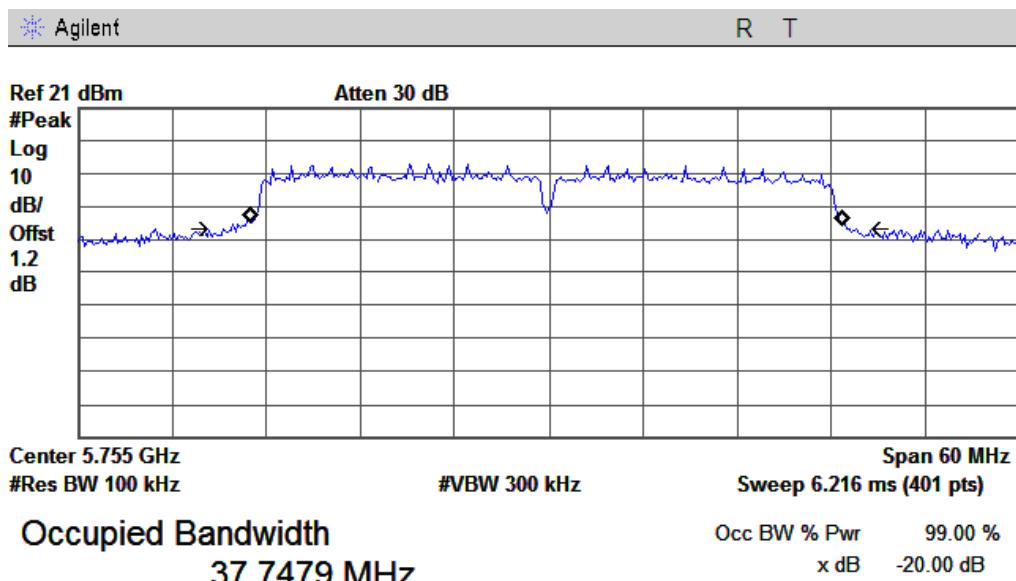


Transmit Freq Error -188.669 kHz
 x dB Bandwidth 40.391 MHz

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 152 of 224
www.siemic.com.cn

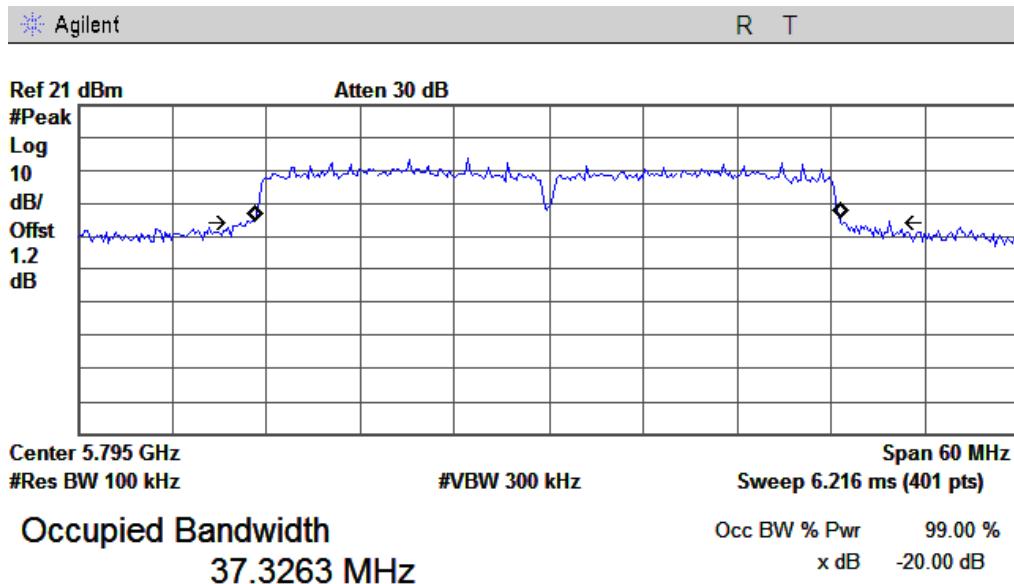802.11n40 High Channel

Transmit Freq Error -120.923 kHz
x dB Bandwidth 41.434 MHz



5.9 §15.247(b) (3) - Conducted Maximum Output Power (For 5GHz Band)

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

Temperature	26°C
Relative Humidity	57%
Atmospheric Pressure	1001mbar
4. Test date : October 28, 2013
Tested By : Herith Shi

Standard Requirement:

Measurement Procedure PK:

This procedure should only be used when the maximum available RBW of the spectrum/signal analyzer is less than the DTS bandwidth.

1. Set the RBW = 1 MHz.
2. Set the VBW = $3 \times \text{RBW}$ or maximum available setting (must be $\geq \text{RBW}$).
3. Set the span to fully encompass the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

Measurement Procedure AVG:

This procedure should be used with an RMS power averaging detector; however, a sample detector can be used when an RMS detector is not available. This is the baseline method for measuring the maximum (average) conducted output power.

1. Set span to at least 1.5 times the OBW
2. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
3. Set the VBW ≥ 3 MHz.
4. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
5. Sweep time = auto couple.
6. Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode
7. If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission
8. Employ trace averaging in power averaging (RMS) mode over a minimum of 100 traces.
9. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Test Result: Pass.

Please refer to the following tables and plots.

The Peak Power



802.11a mode									
Channel	PK Output Power (dBm)			Total PK Power (dBm)	AV Output Power (dBm)			Total AV Power (dBm)	Limit (dBm)
	CH0	CH1	CH2		CH0	CH1	CH2		
	5745	22.03	22.12	22.74	27.08	16.53	16.88	17.27	21.68
5785	21.97	22.23	23.23	27.28	16.85	16.70	17.30	21.73	30
5825	21.81	22.05	23.29	27.20	16.07	16.71	17.60	21.61	30
802.11n20 mode									
Channel	PK Output Power (dBm)			Total PK Power (dBm)	AV Output Power (dBm)			Total AV Power (dBm)	Limit (dBm)
	CH0	CH1	CH2		CH0	CH1	CH2		
	5745	21.66	21.68	23.02	26.94	16.69	16.17	17.20	21.48
5785	21.77	22.00	23.19	27.14	16.77	16.49	17.64	21.77	30
5825	21.77	22.26	23.49	27.34	16.67	16.26	18.21	21.90	30
802.11n40 mode									
Channel	PK Output Power (dBm)			Total PK Power (dBm)	AV Output Power (dBm)			Total AV Power (dBm)	Limit (dBm)
	CH0	CH1	CH2		CH0	CH1	CH2		
	5755	21.91	21.85	22.31	26.80	15.69	15.89	16.31	20.74
5795	21.85	21.82	23.30	27.15	15.93	16.11	16.45	20.94	30

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 155 of 224
www.siemic.com.cn

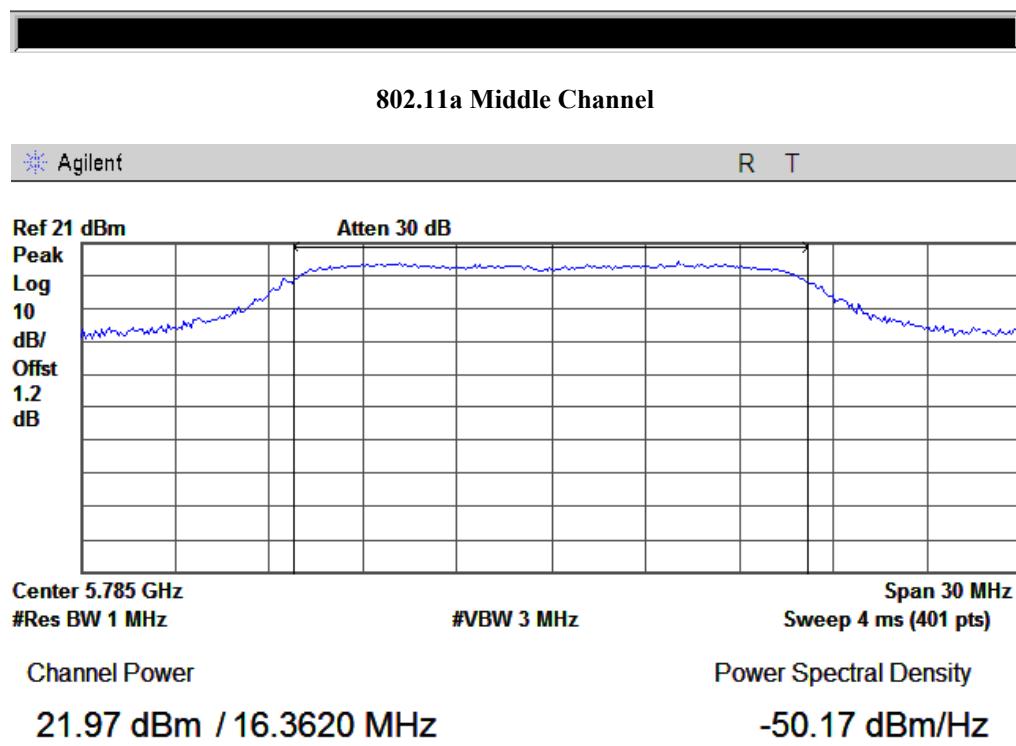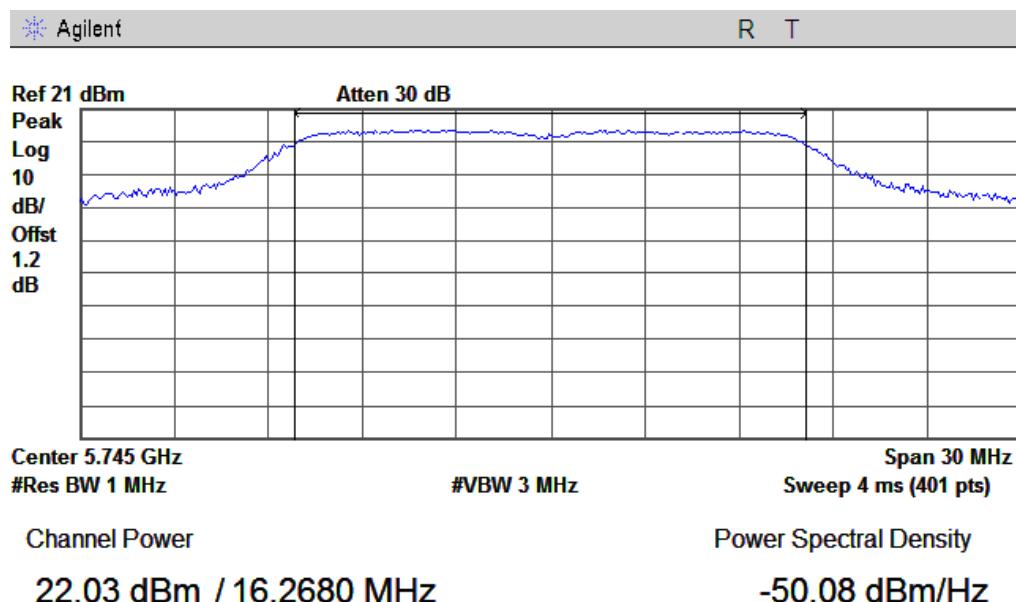**RF Port CH0
The Peak Power****802.11a Low Channel**


**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 156 of 224
www.siemic.com.cn


802.11a High Channel

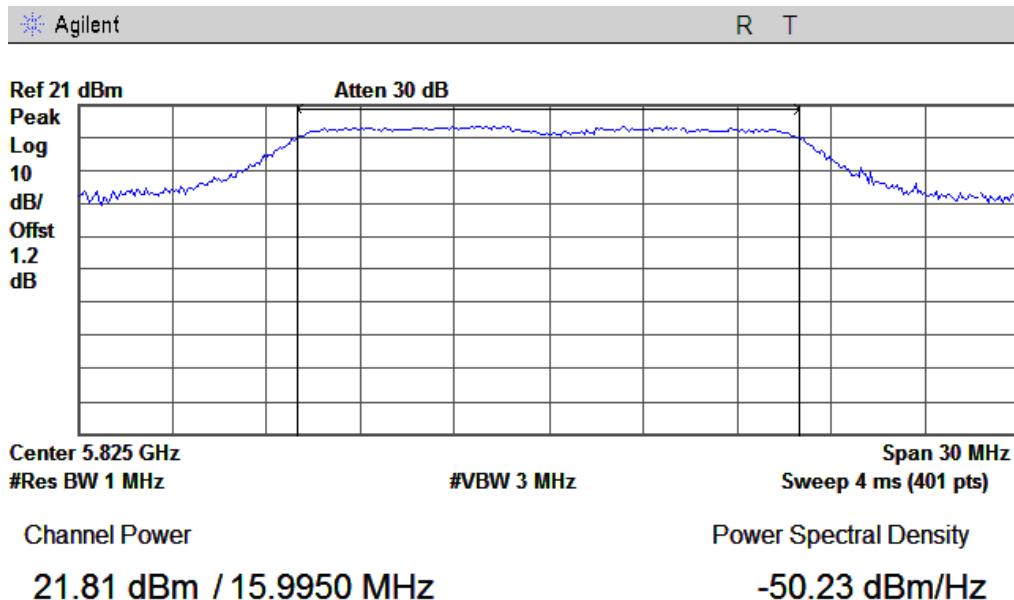


802.11n20 Low Channel


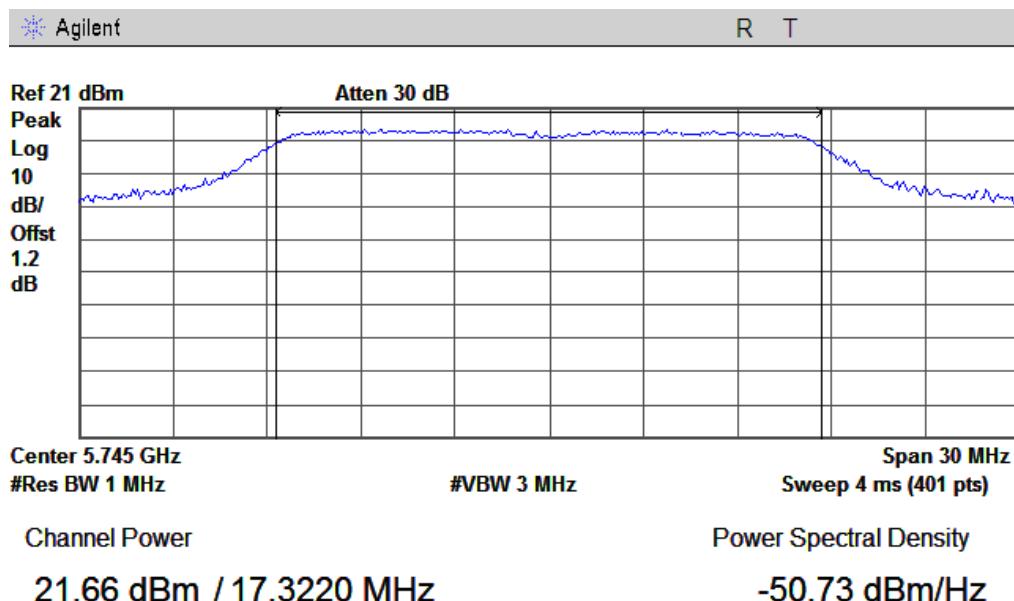


802.11n20 Middle Channel

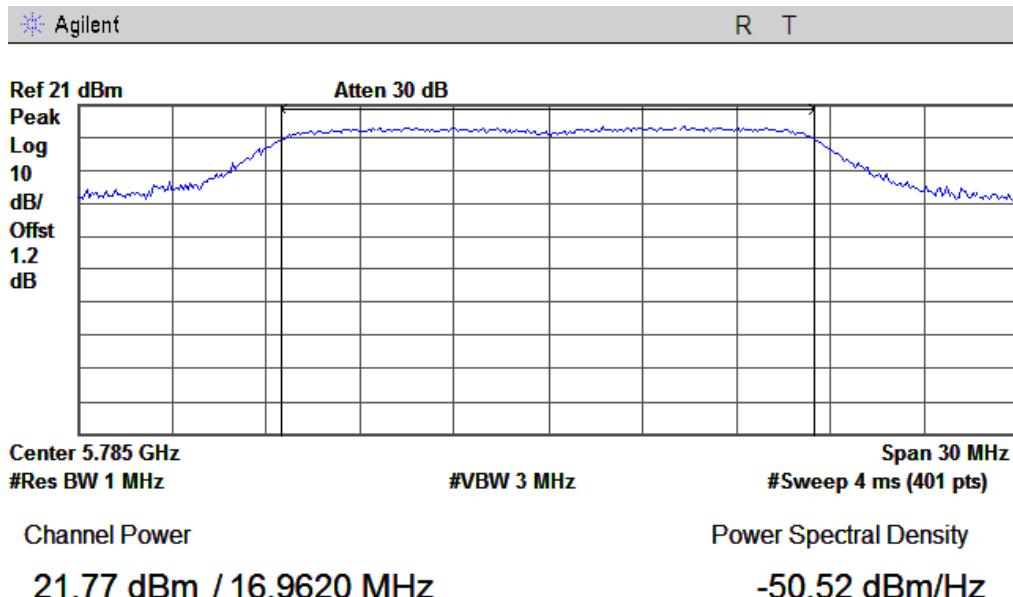

802.11n20 High Channel

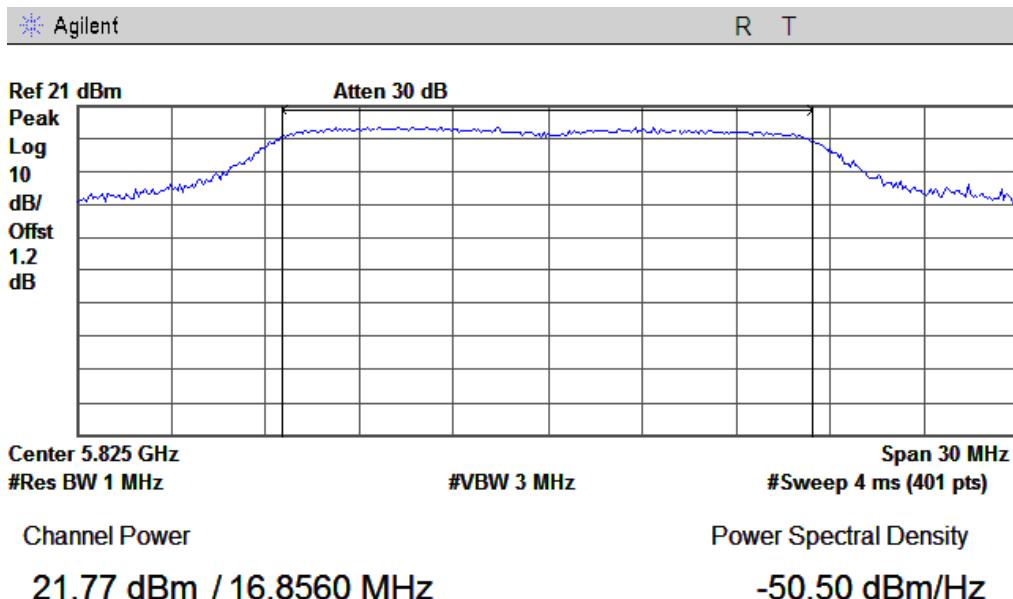

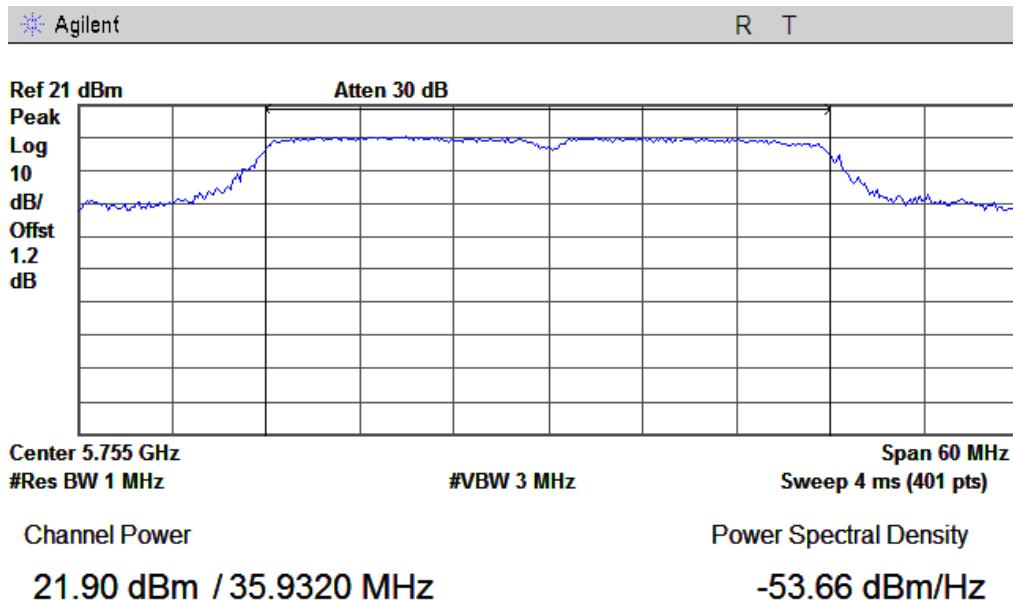
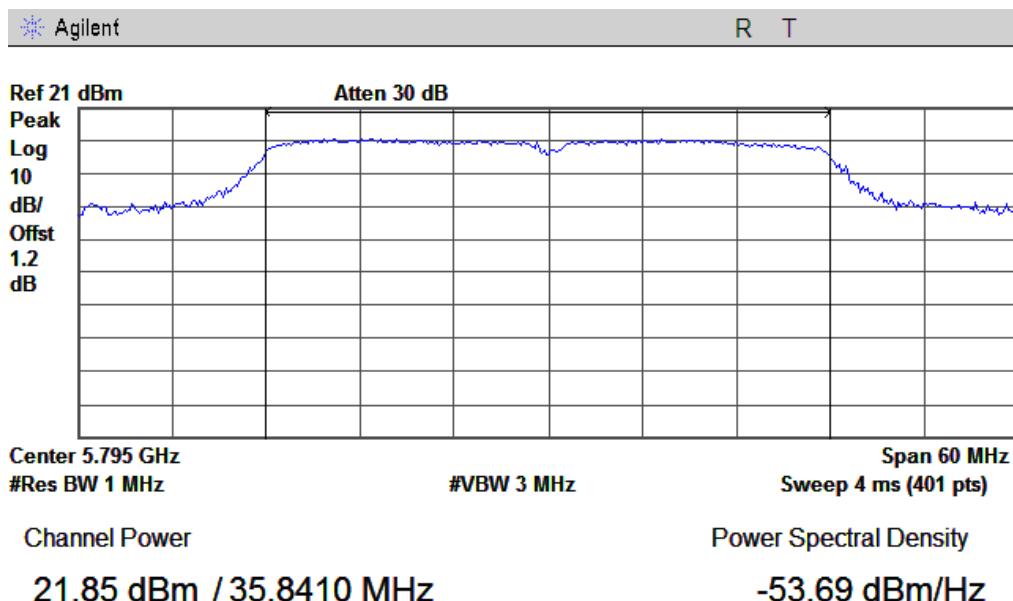
802.11n40 Low Channel**802.11n40 High Channel**

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 159 of 224
www.siemic.com.cn

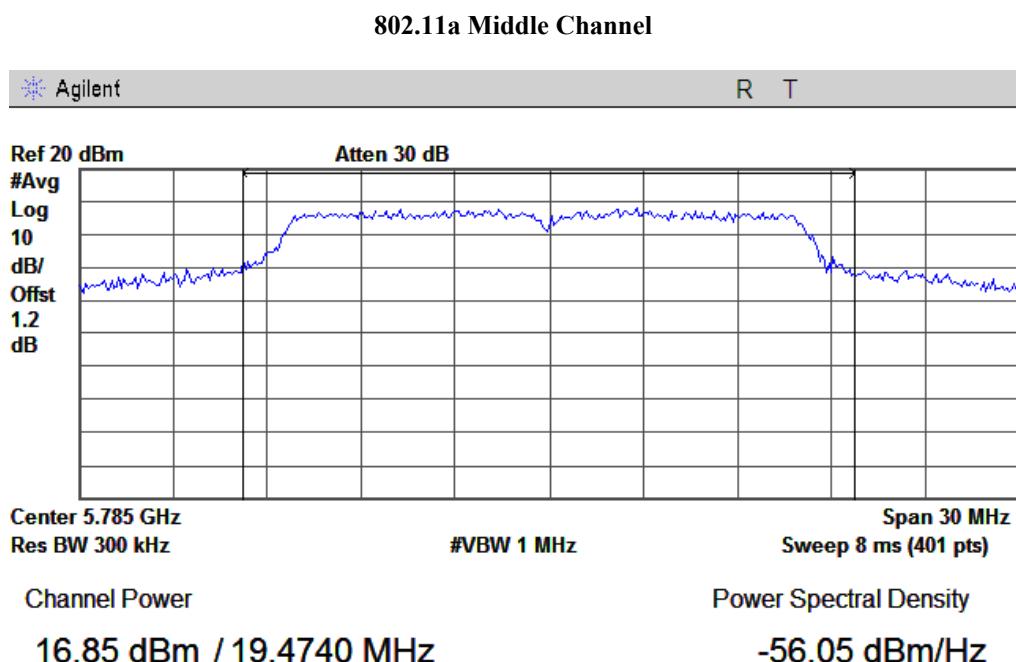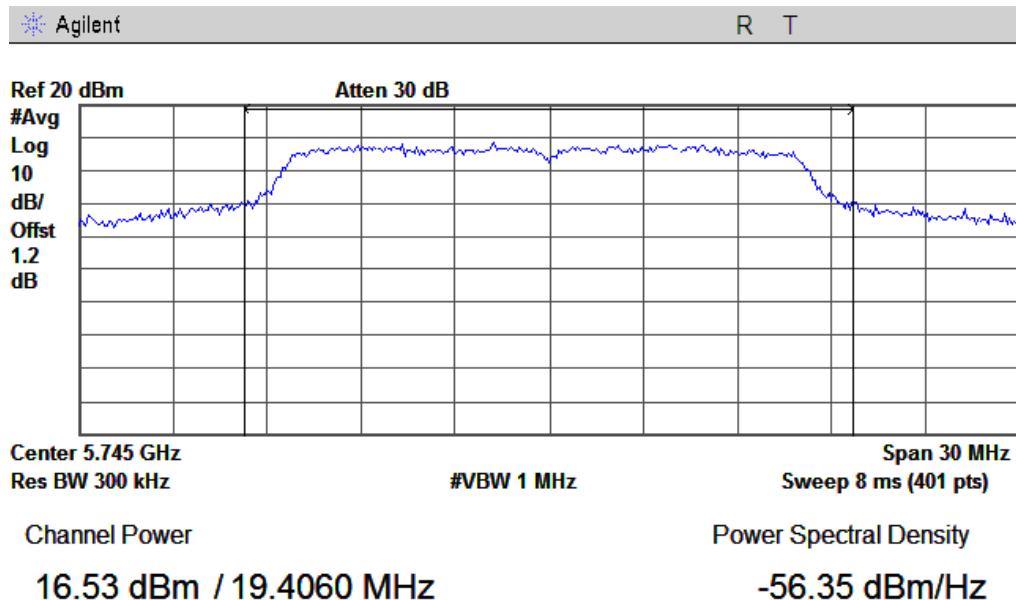The Average Power**802.11a Low Channel**

802.11a High Channel

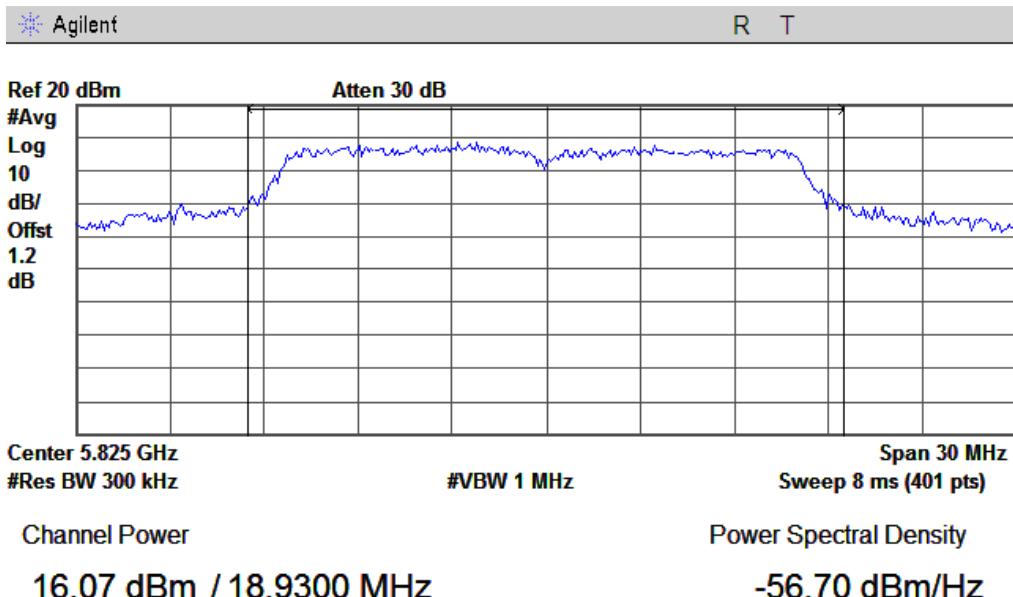

802.11 n20 Low Channel

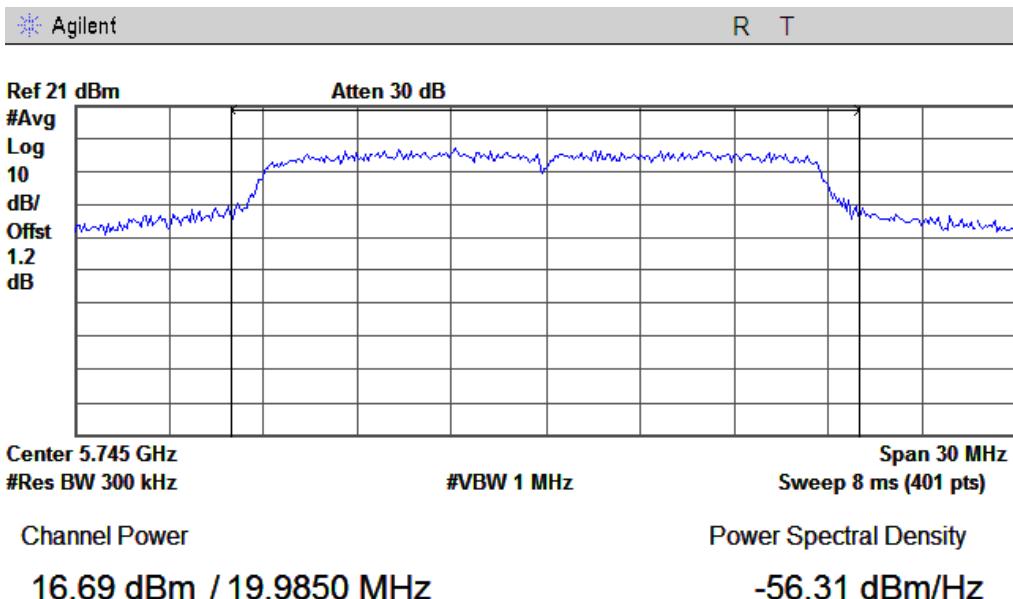



SIEMIC, Inc.

Accessing global markets


Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4:

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 161 of 224
www.siemic.com.cn

802.11 n20 Middle Channel

* Agilent


R T

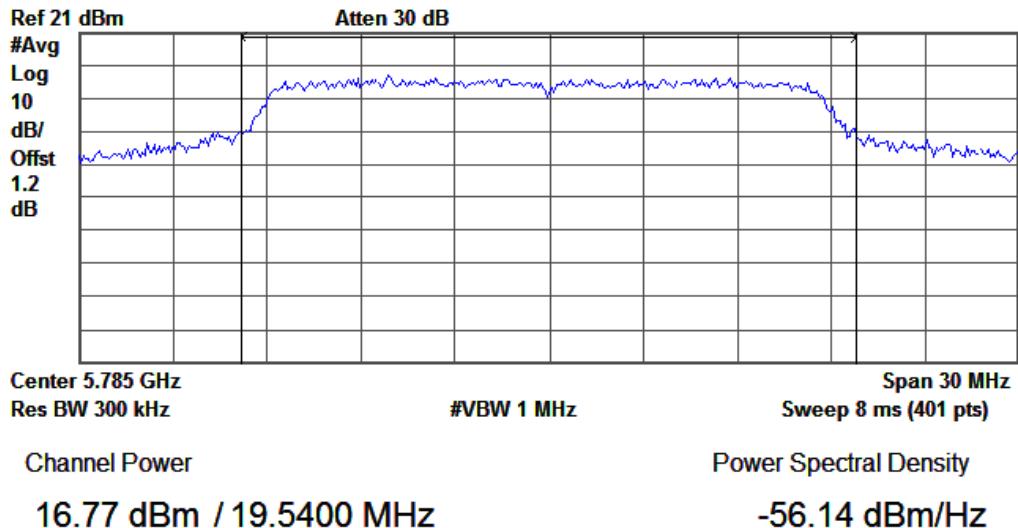


802.11n20 High Channel

* Agilent


R T

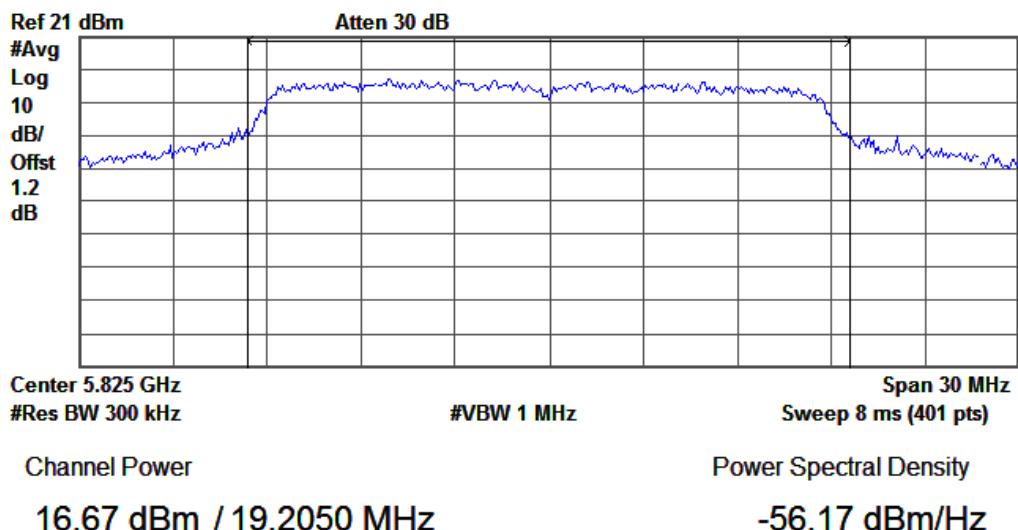

802.11n40 Low Channel

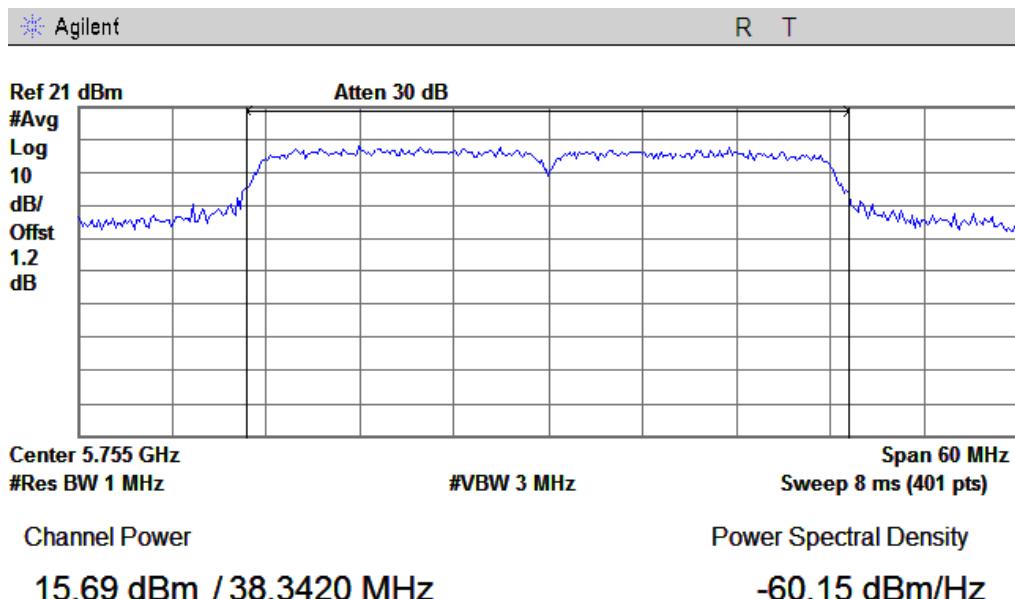

802.11n40 High Channel


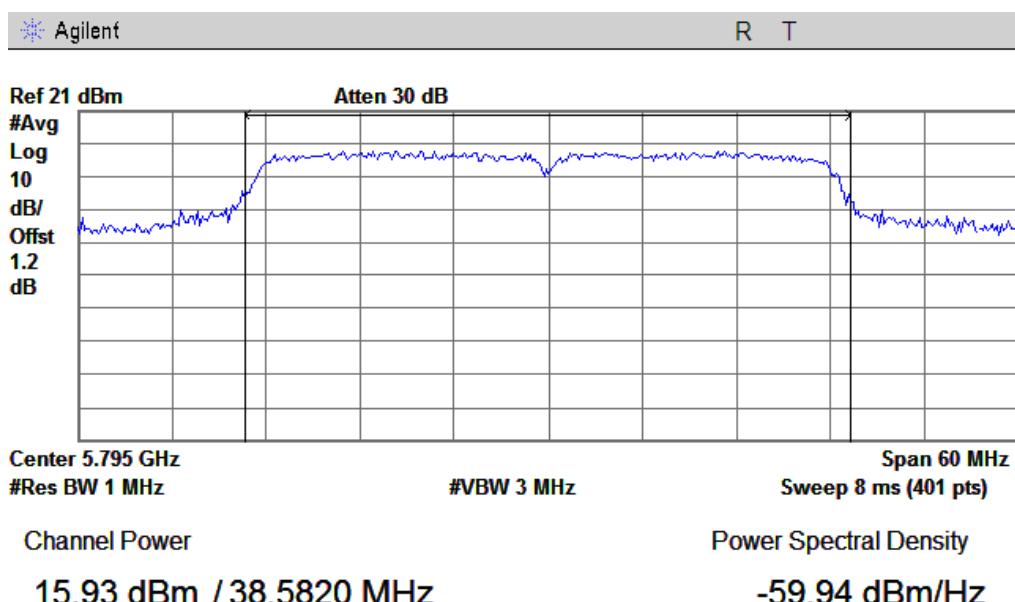


**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 163 of 224
www.siemic.com.cn

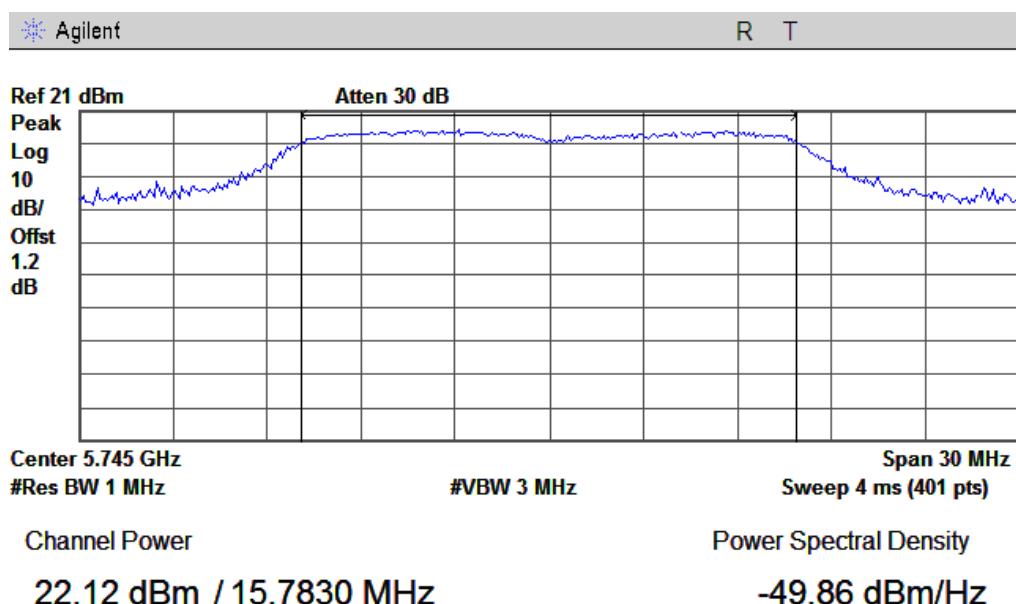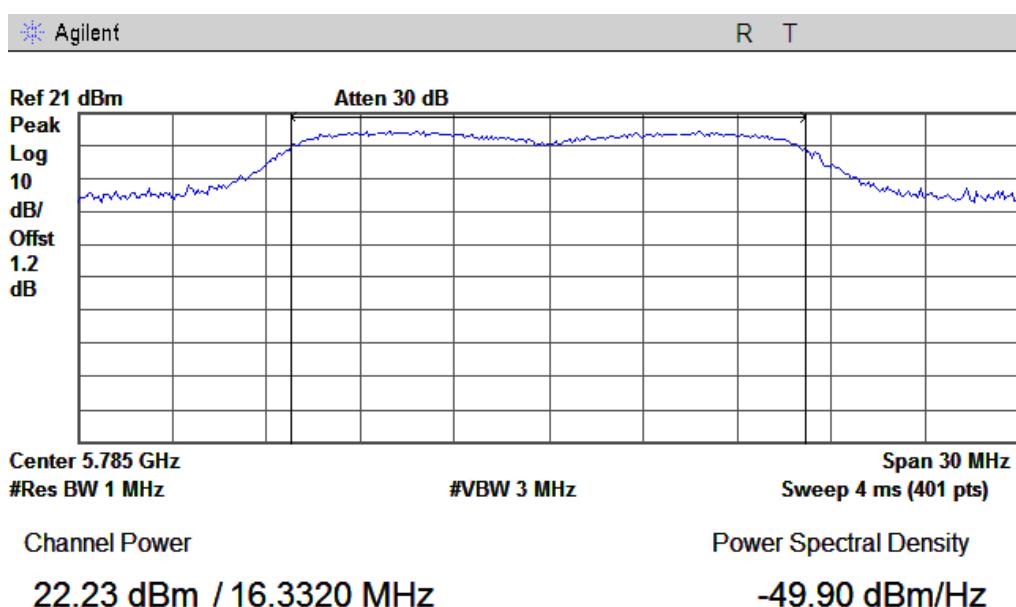RF Port CH1
The Peak Power**802.11a Low Channel****802.11a Middle Channel**


802.11a High Channel

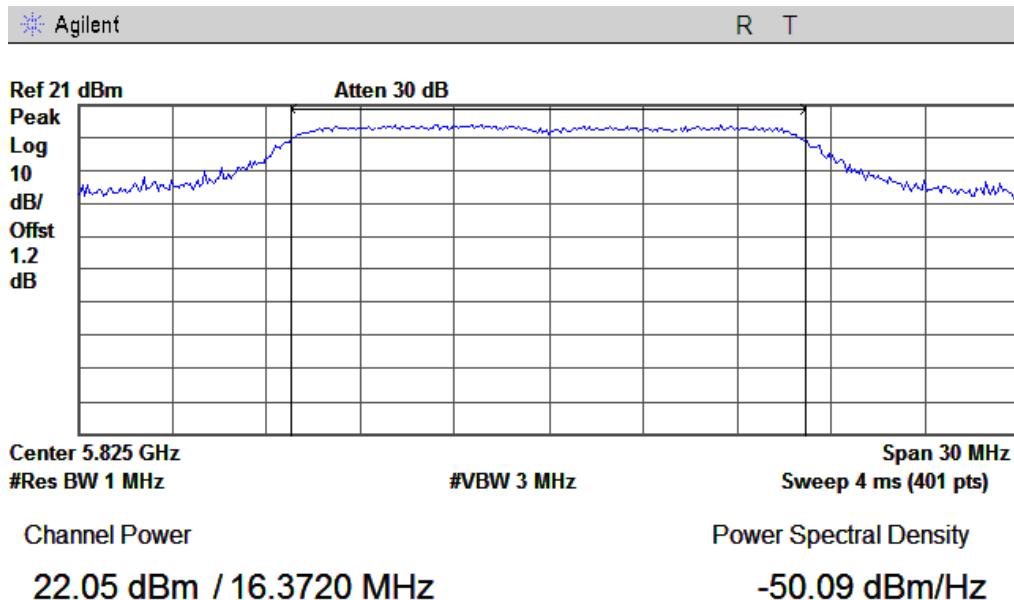


802.11n20 Low Channel

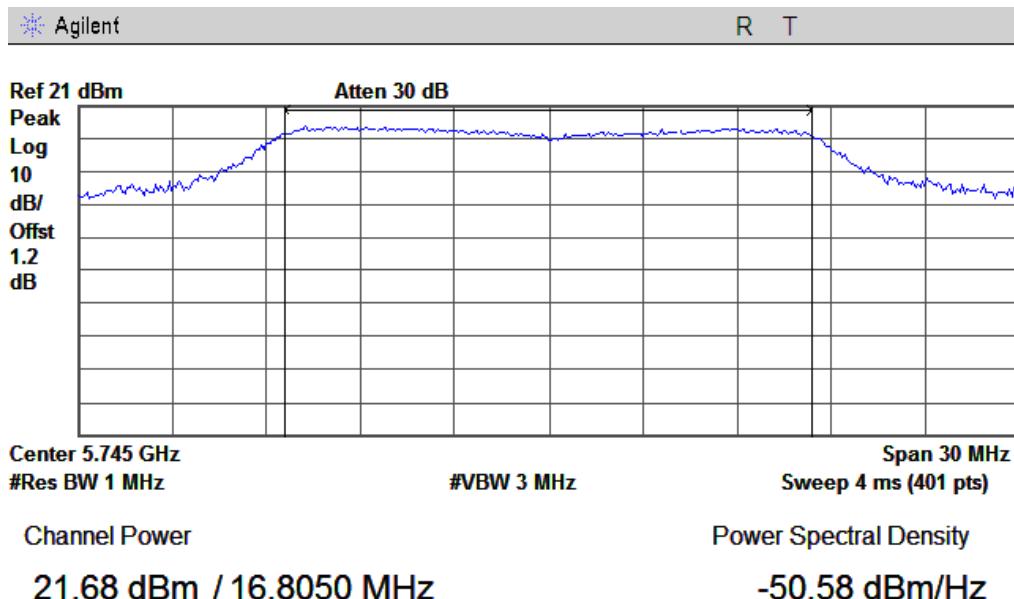


802.11n20 Middle Channel

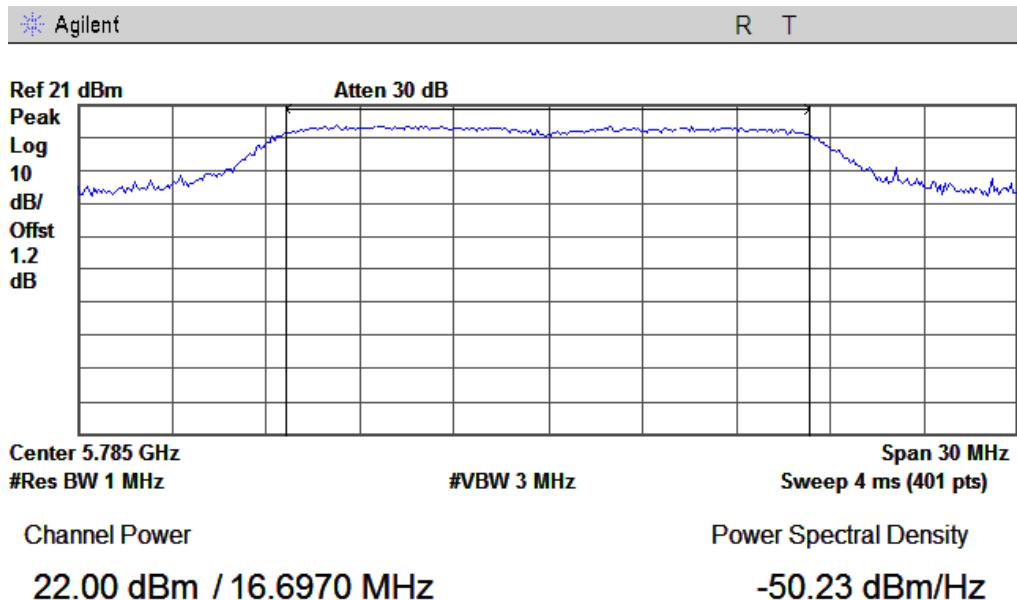


802.11n20 High Channel

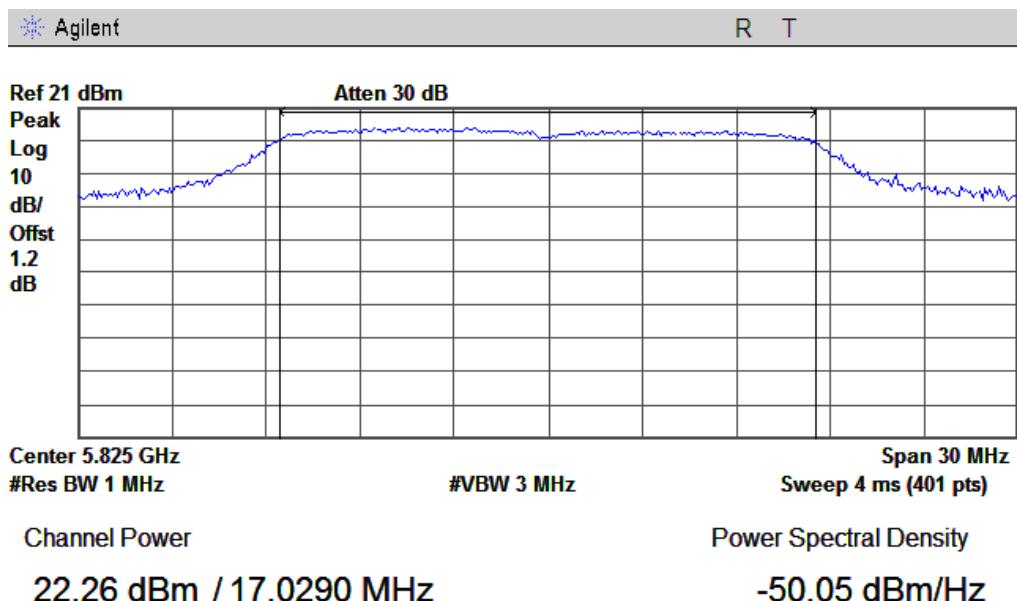

802.11n40 Low Channel

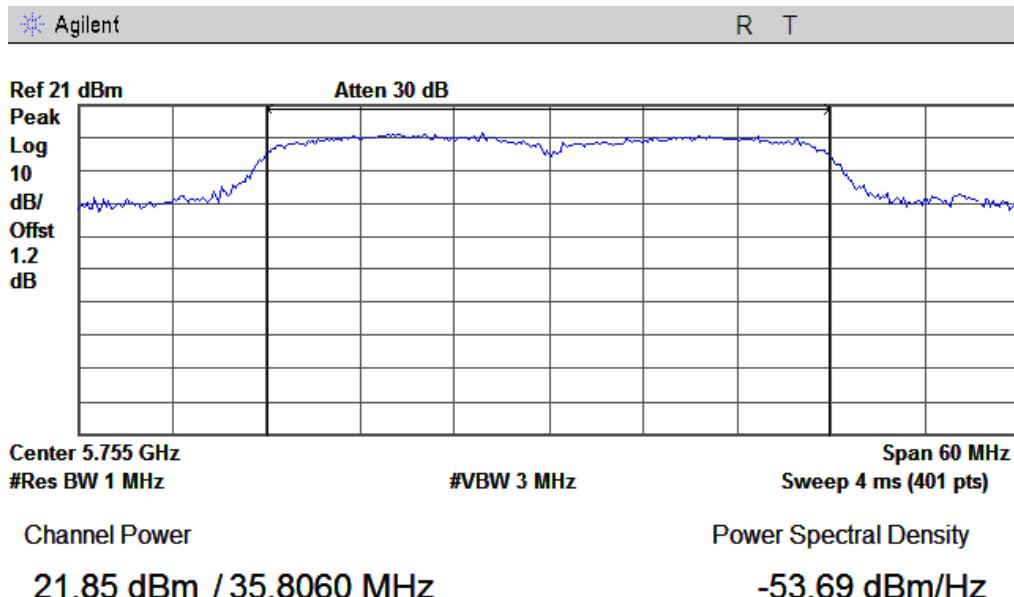

802.11n40 High Channel


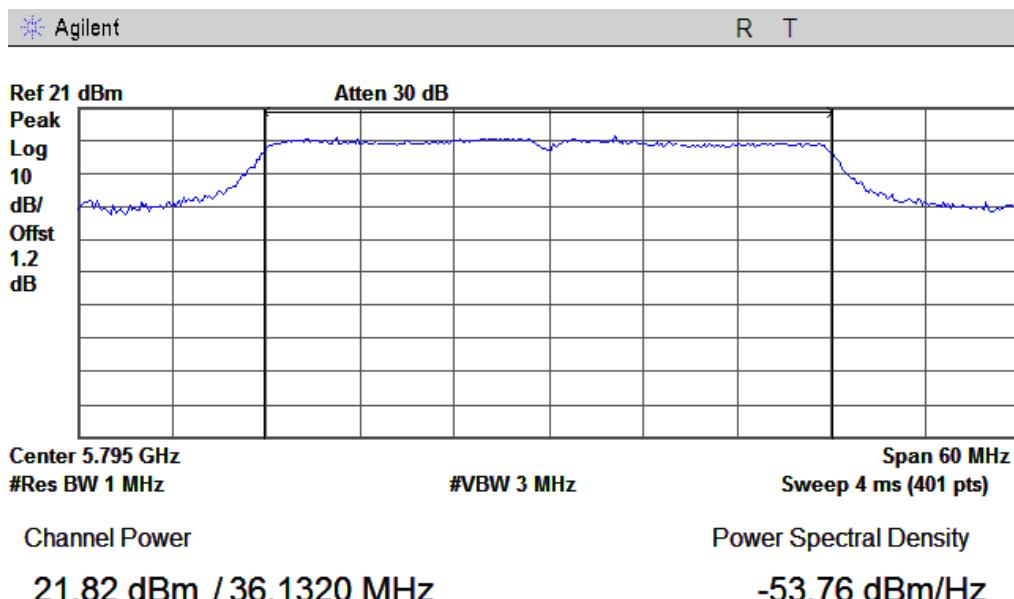


**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 167 of 224
www.siemic.com.cn

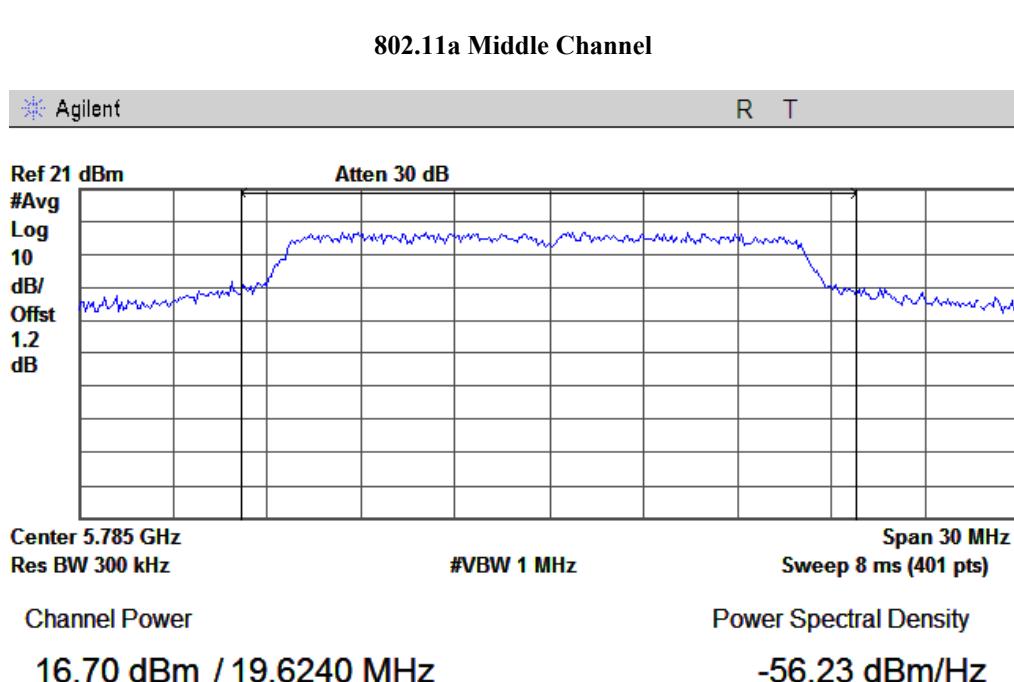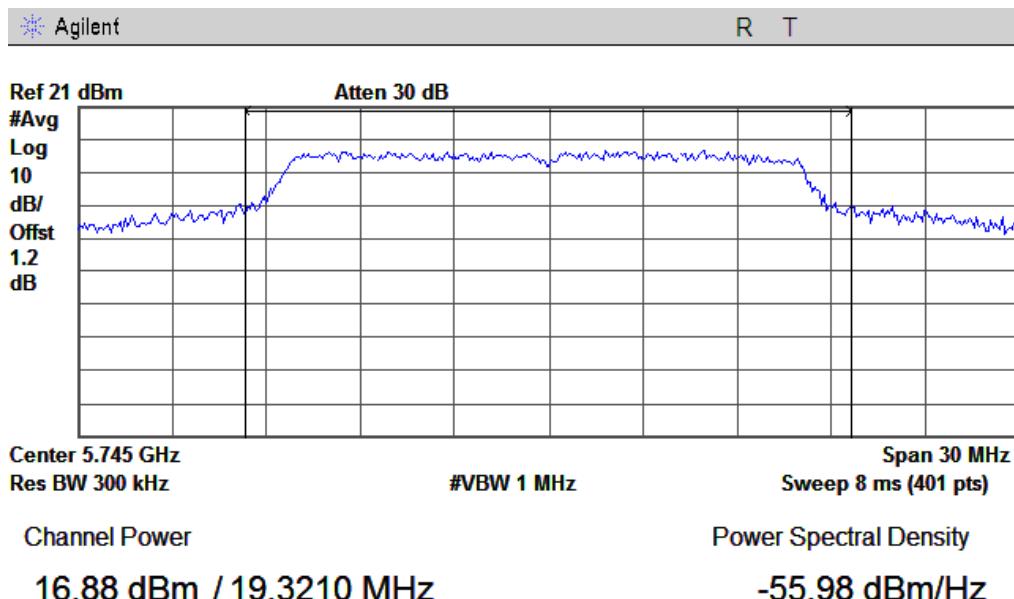The Average Power**802.11a Low Channel**


802.11a High Channel

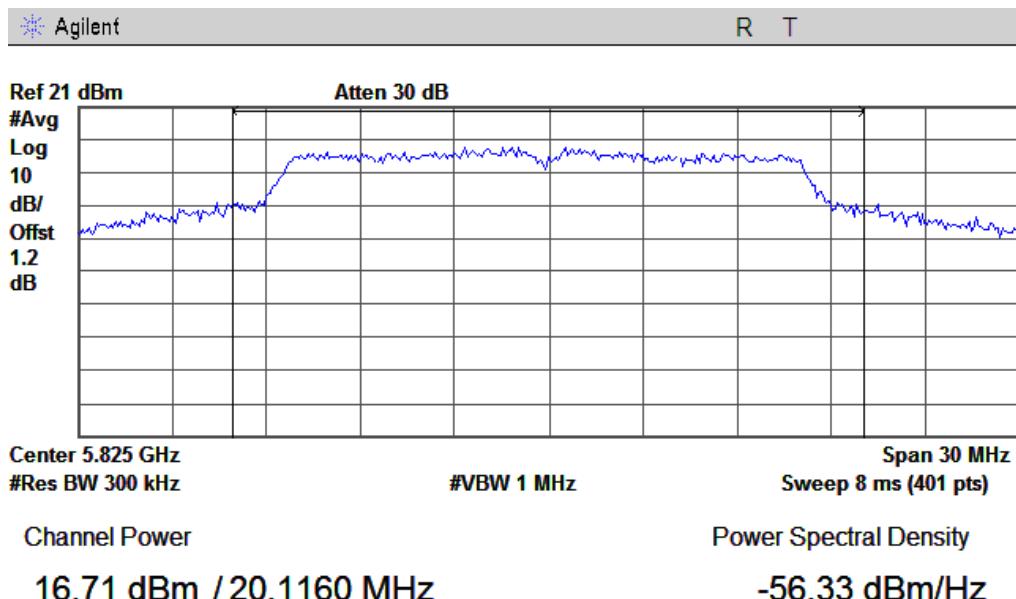


802.11n20 Low Channel

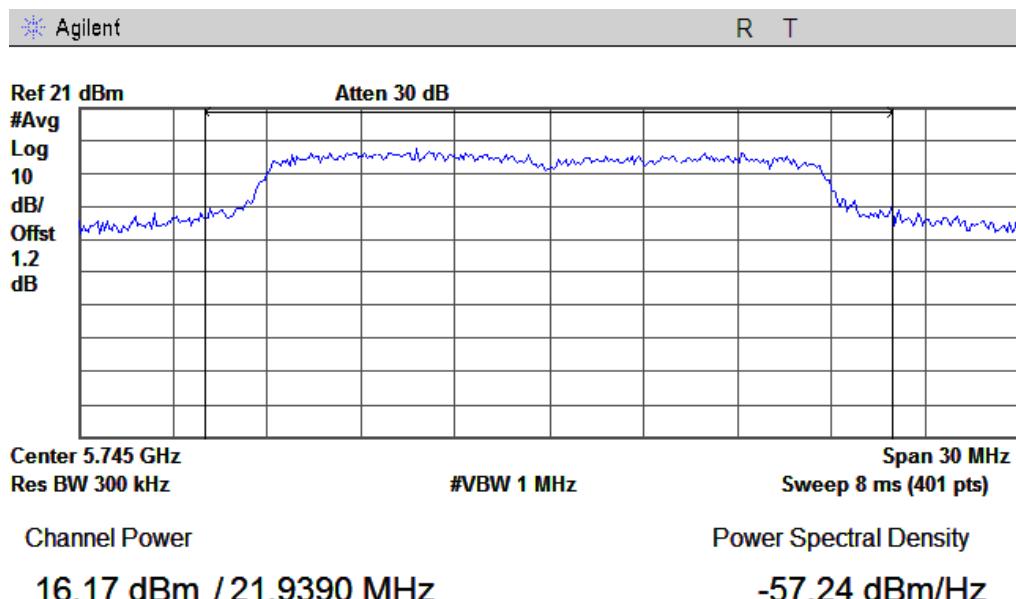


802.11n20 Middle Channel

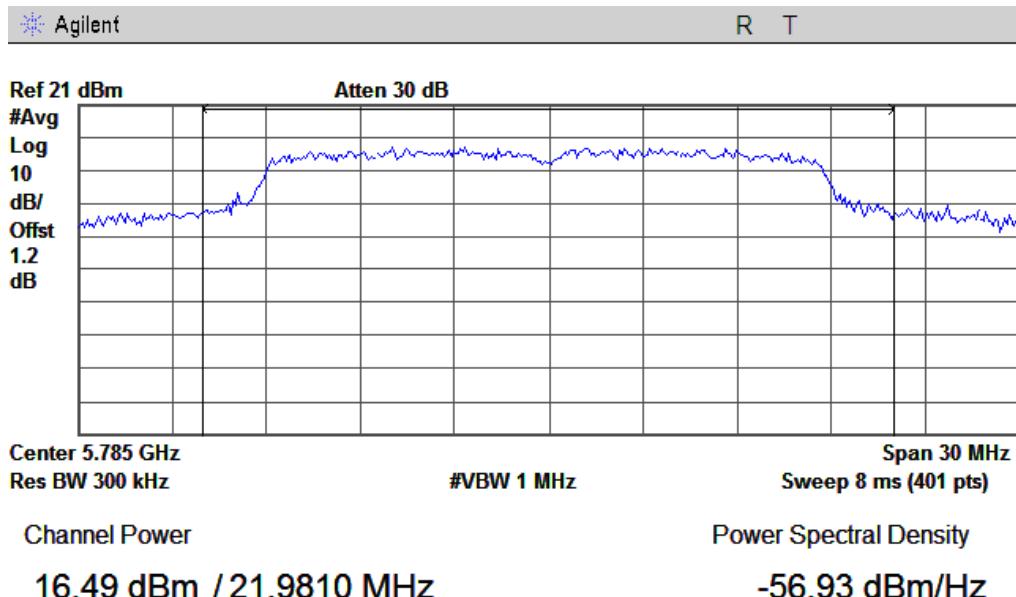


802.11n20 High Channel

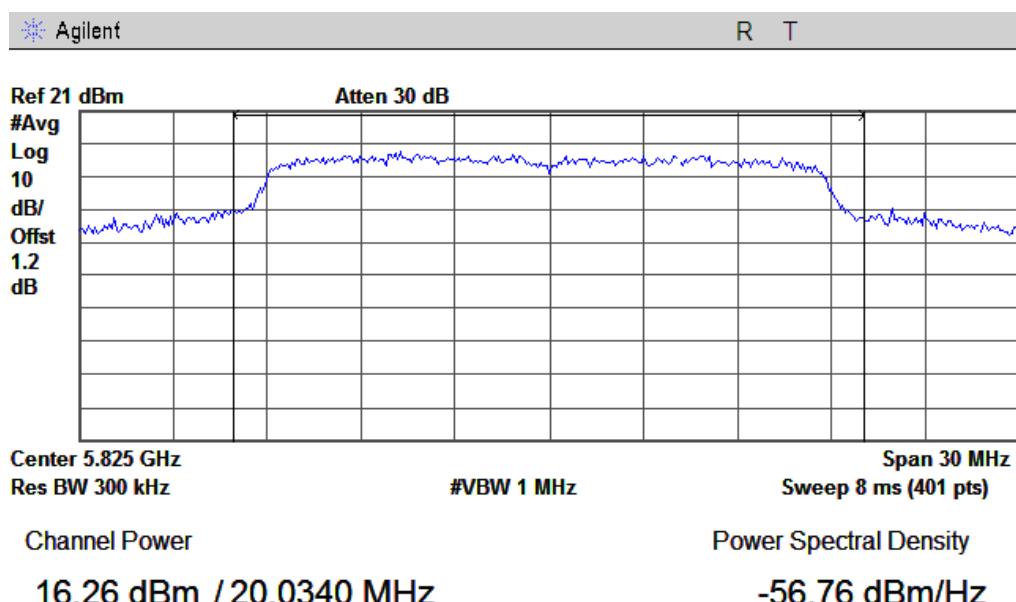

802.11n40 Low Channel

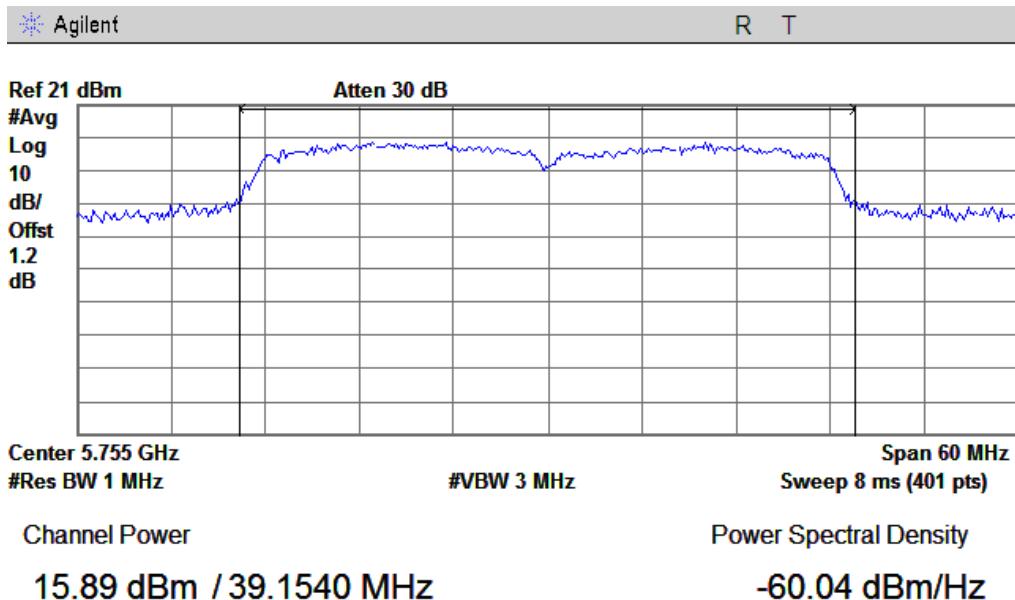

802.11n40 High Channel


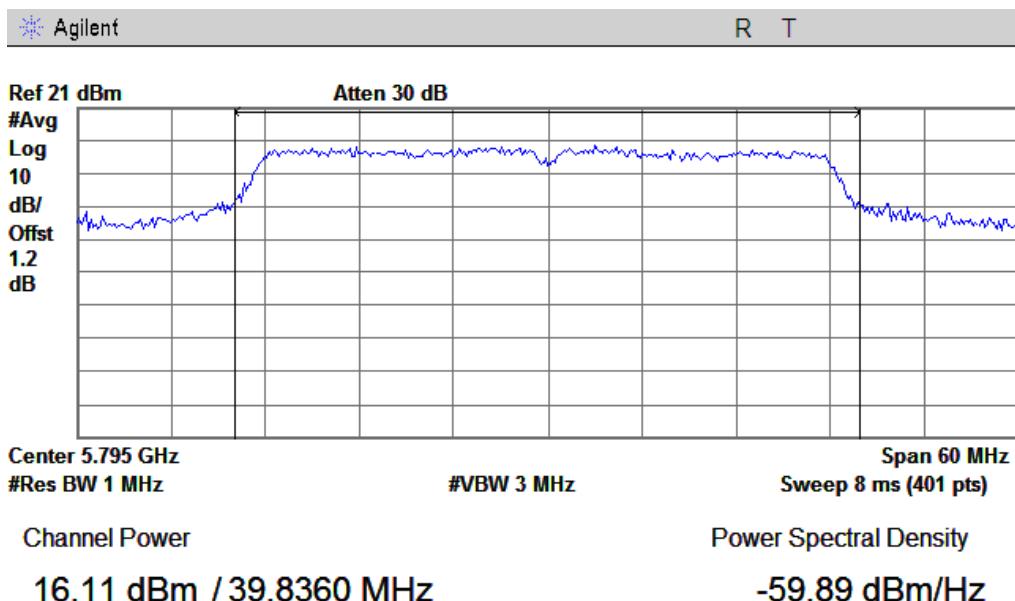


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 171 of 224
www.siemic.com.cn

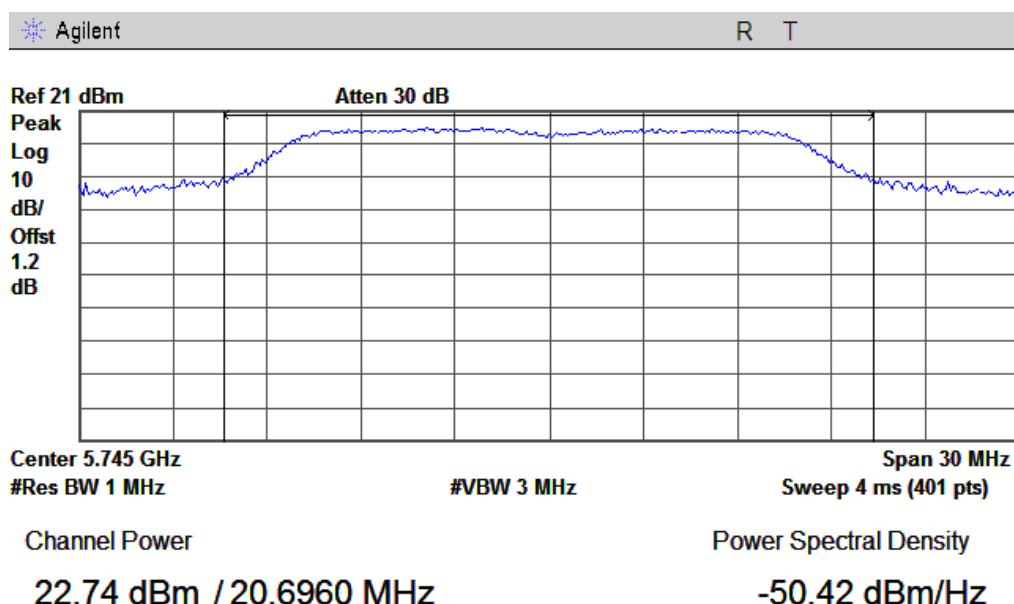
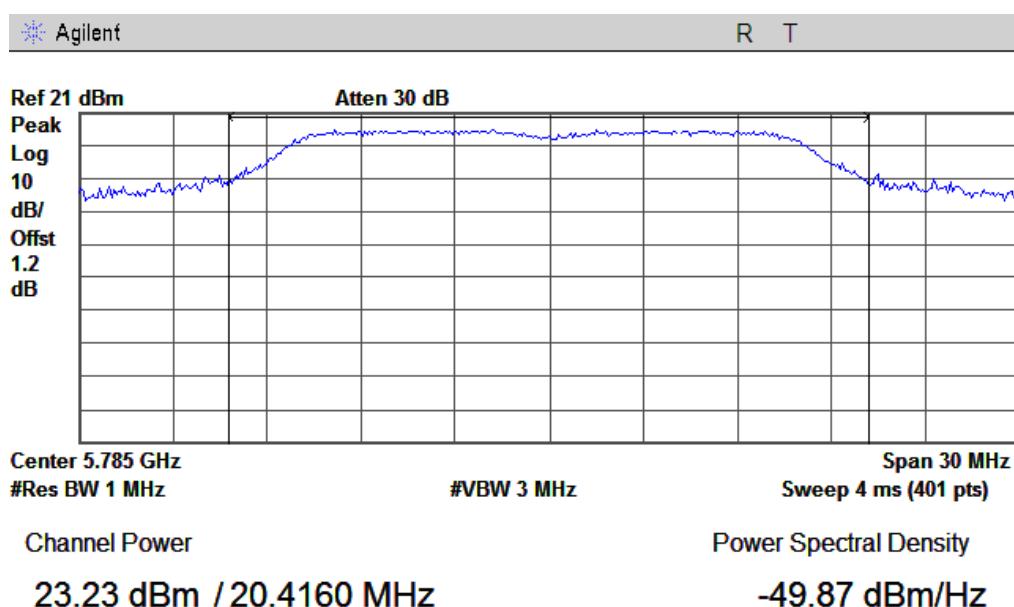
RF Port CH2**The Peak Power****802.11a Low Channel****802.11a Middle Channel**

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 172 of 224
www.siemic.com.cn

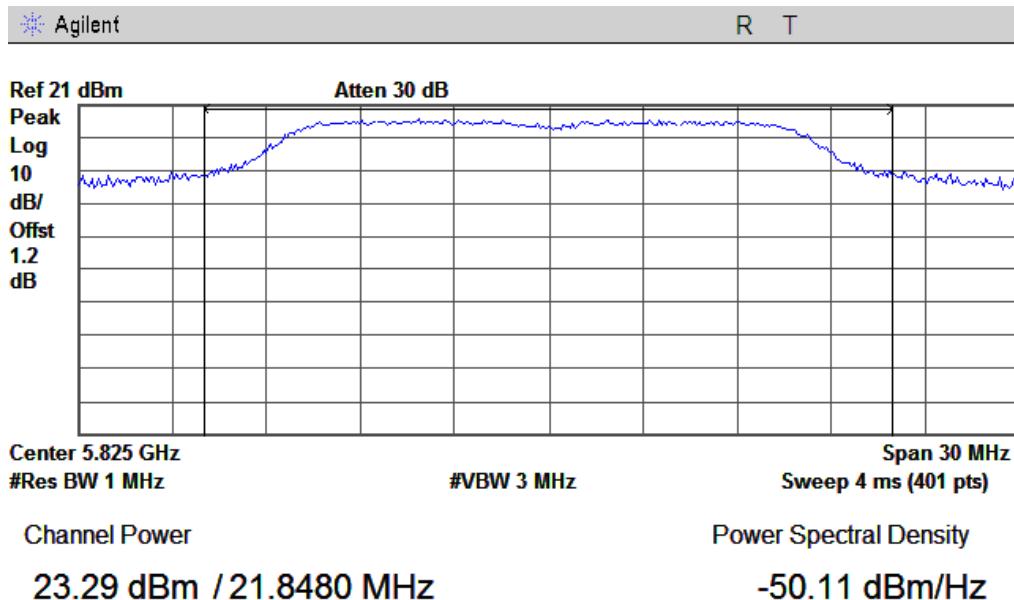
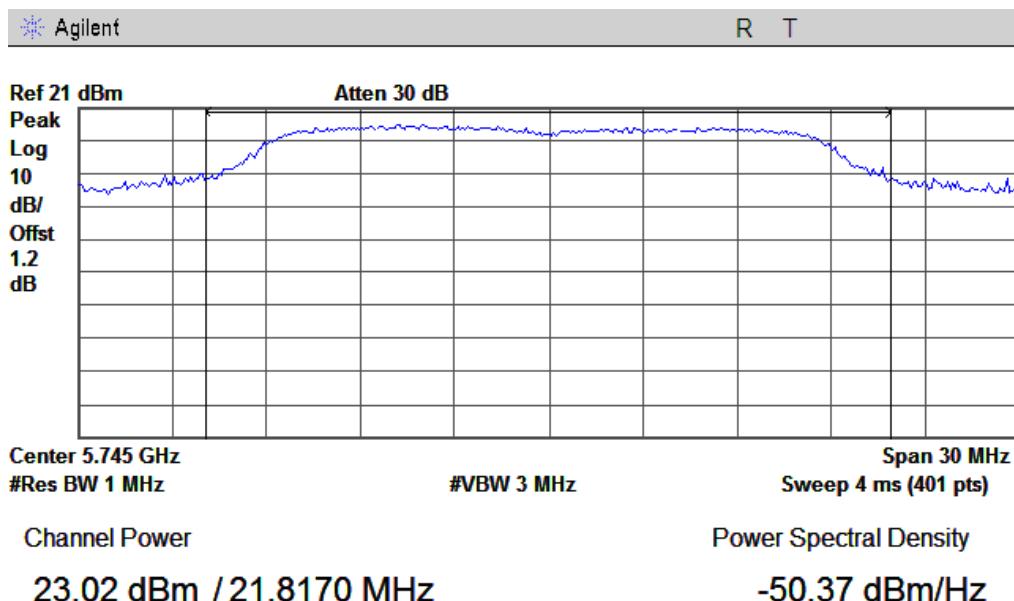
802.11a High Channel**802.11n20 Low Channel**

802.11n20 Middle Channel

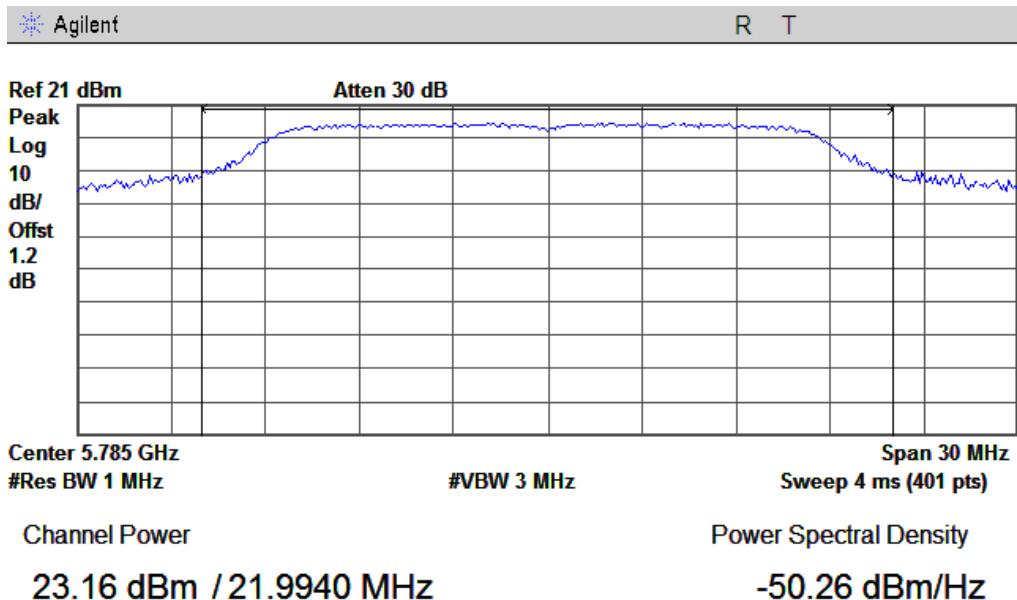

802.11n20 High Channel

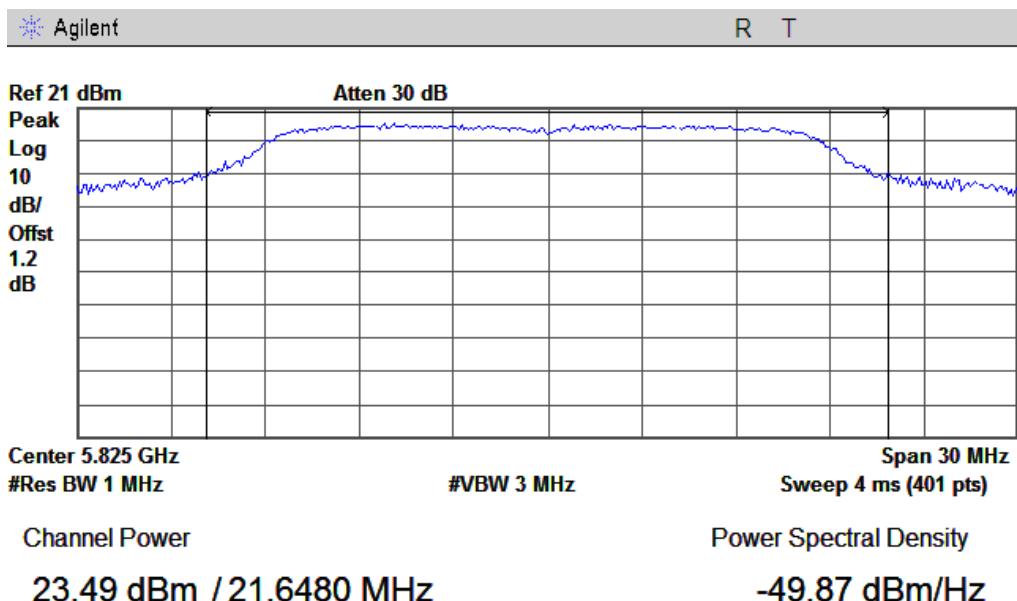

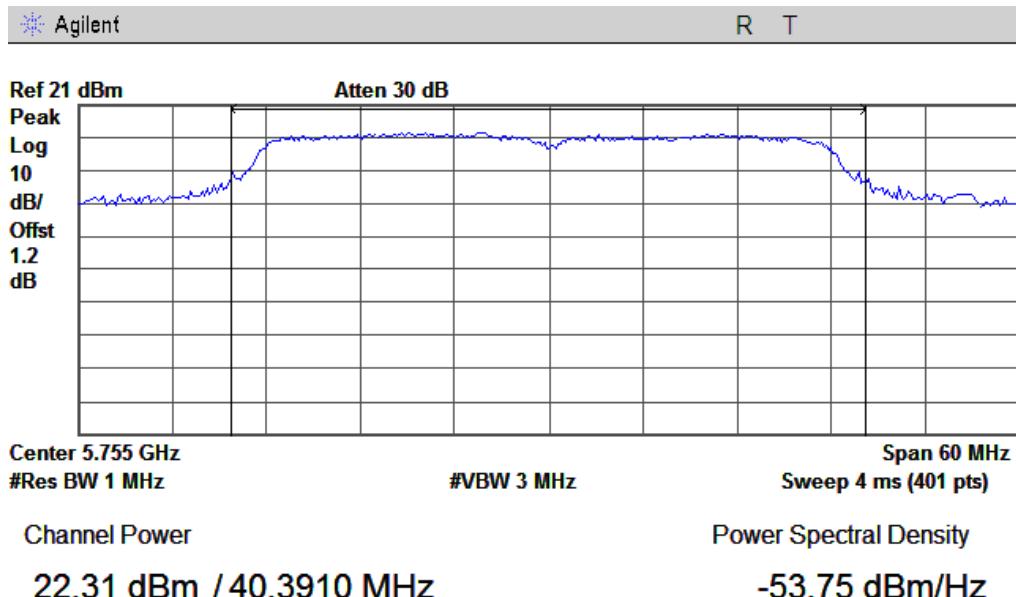
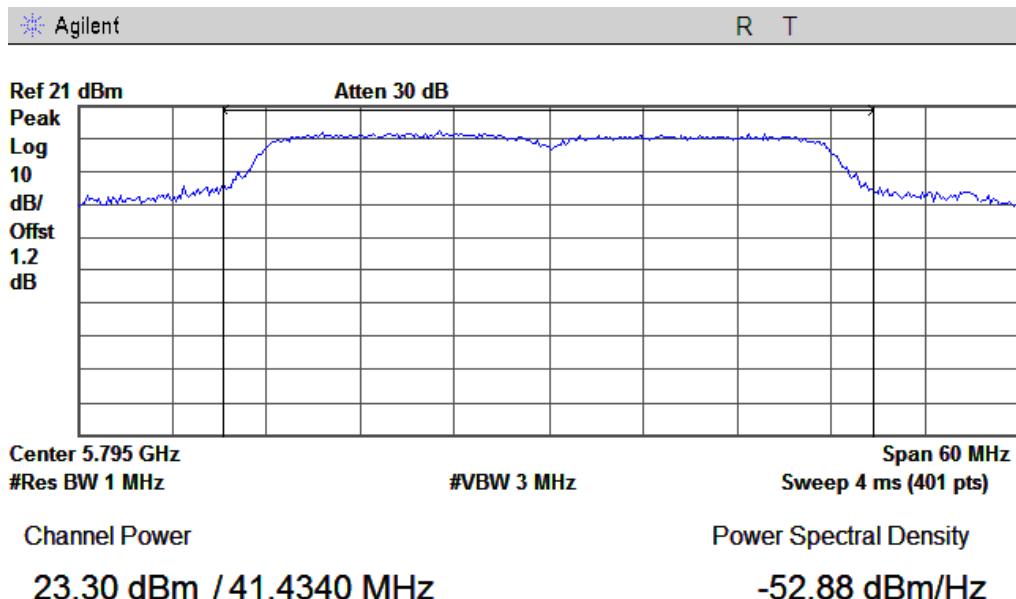
802.11n40 Low Channel**802.11n40 High Channel**

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 175 of 224
www.siemic.com.cn

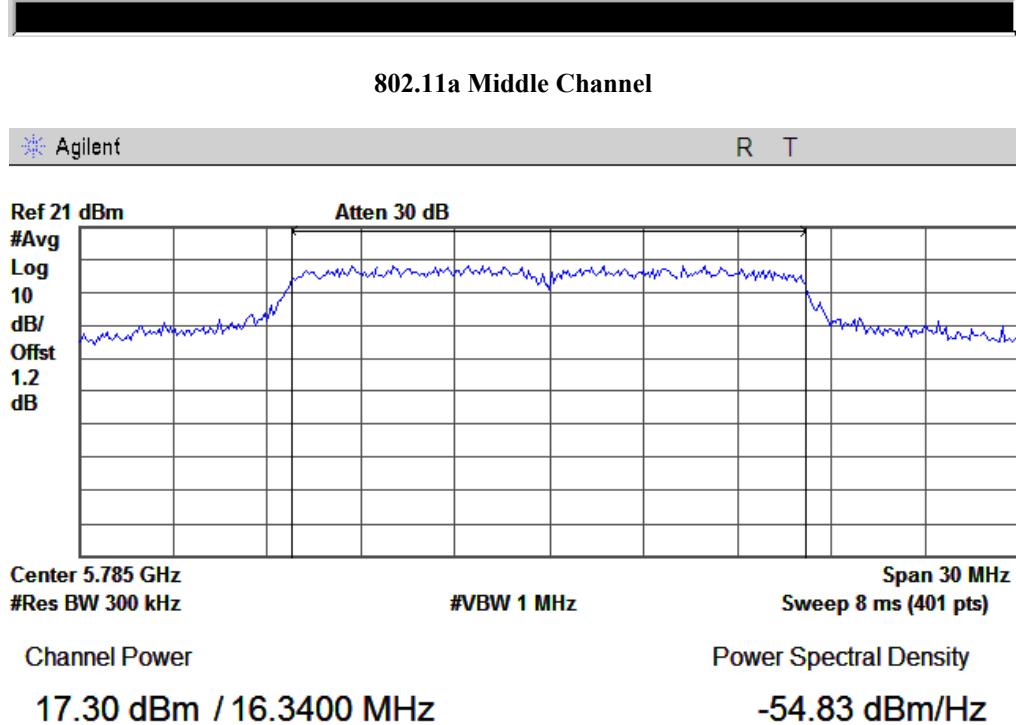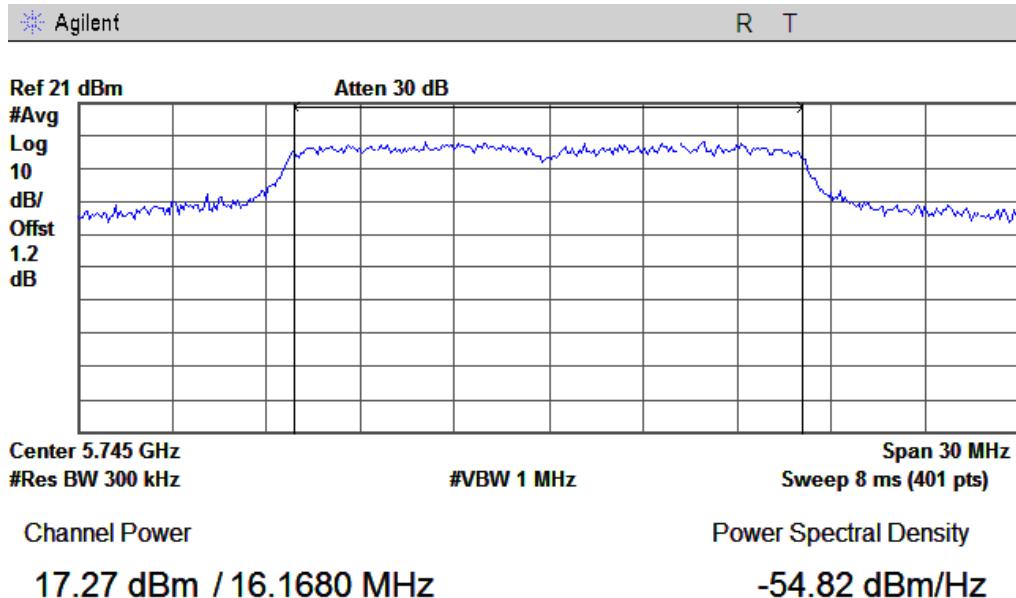The Average Power**802.11a Low Channel**


802.11a High Channel

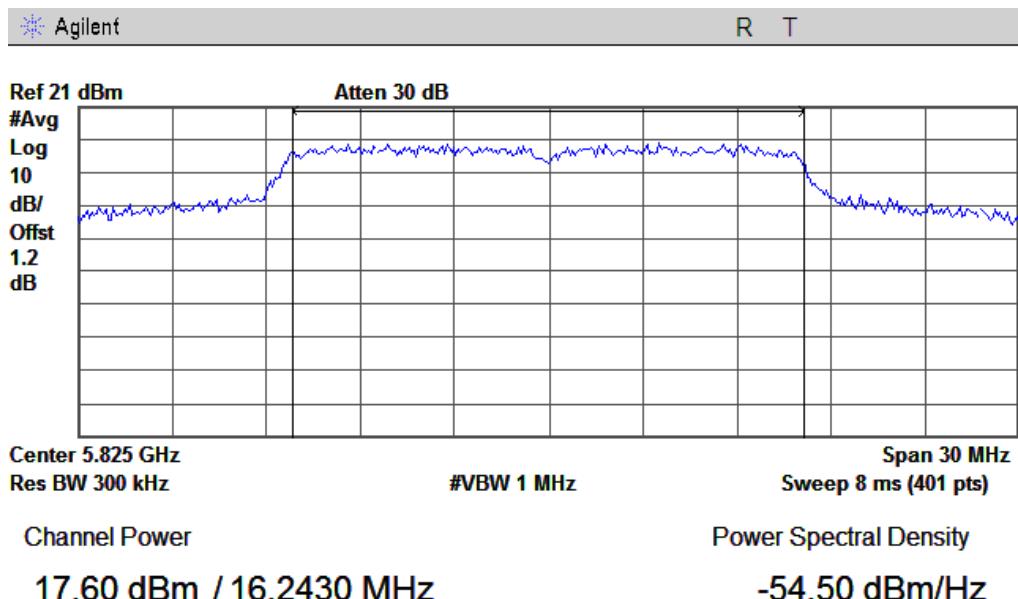


802.11n20 Low Channel


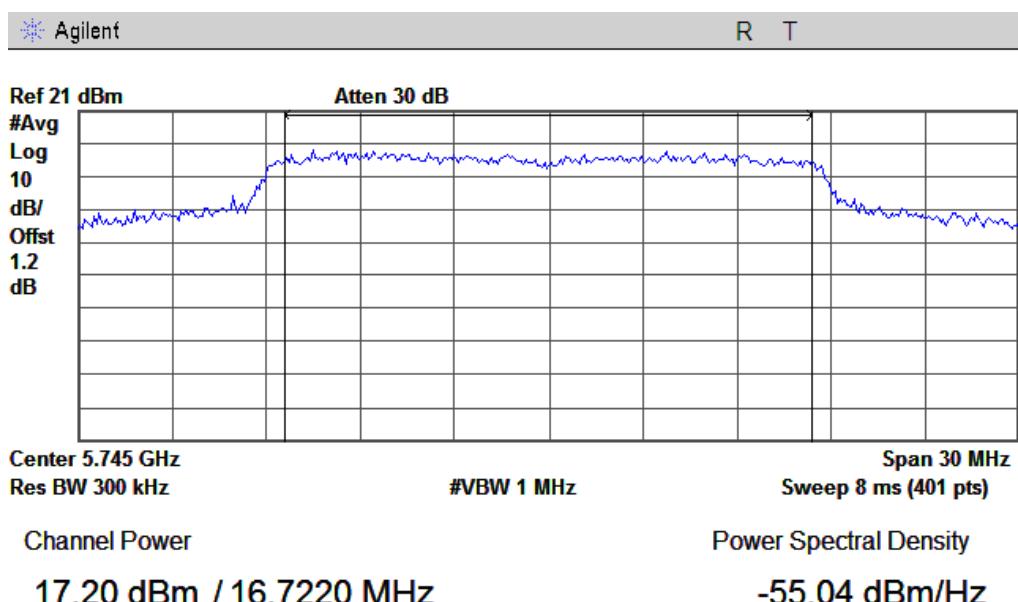


802.11n20 Middle Channel

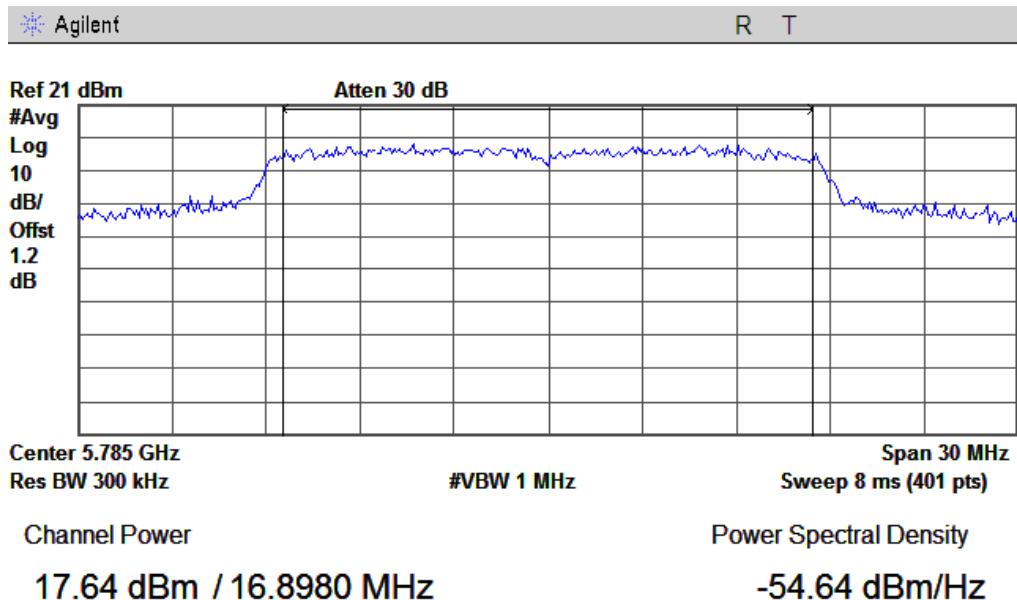

802.11n20 High Channel

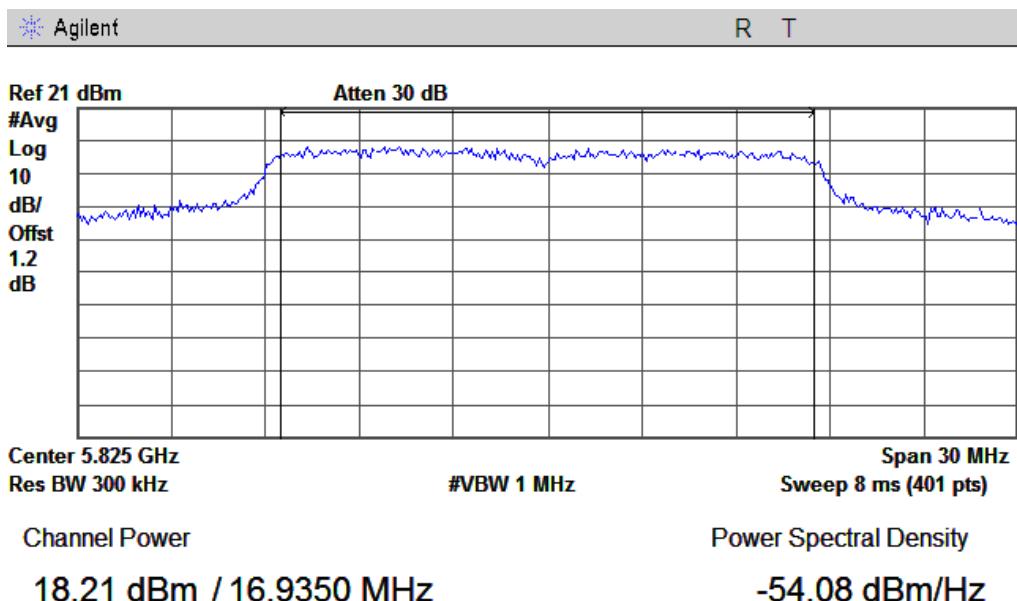

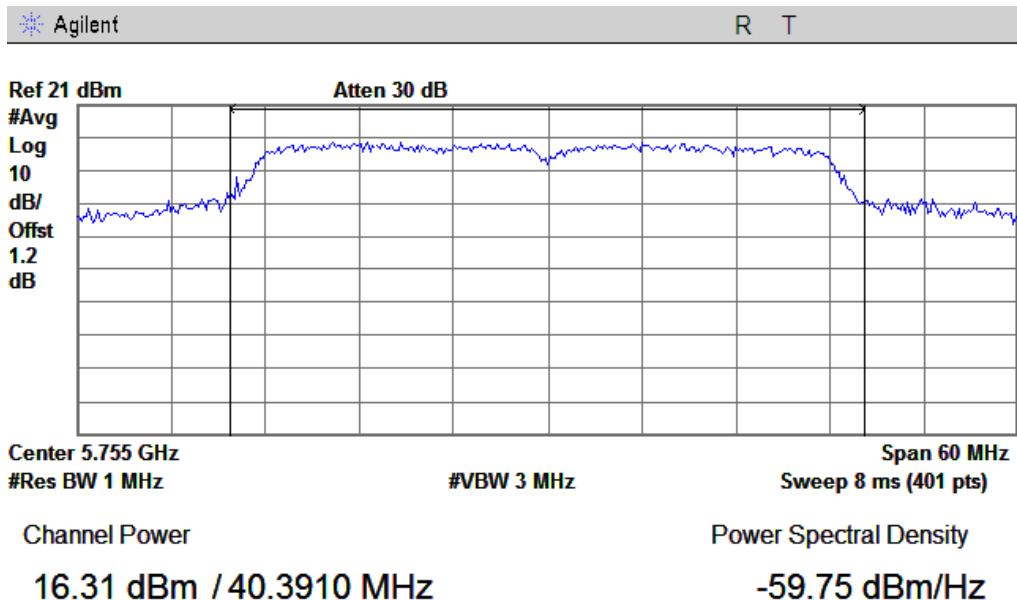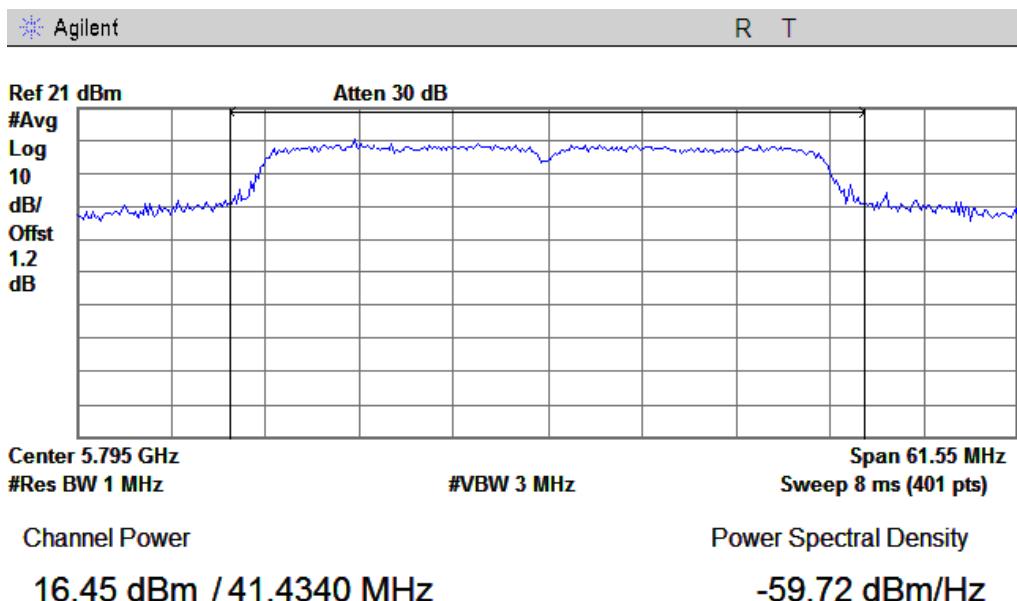802.11n40 Low Channel**802.11n40 High Channel**

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 179 of 224
www.siemic.com.cn

5.10§15.247(e) - Power Spectral Density(For 5GHz Band)

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1001mbar

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.

4. Test date :August 12, 2013

Tested By : Herith Shi

Requirement(s):

A conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the DTS bandwidth is specified during any time interval of continuous transmission.⁴ By rule, the same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if maximum peak conducted output power was measured then the peak PSD procedure shall be used and if maximum conducted output power was measured then the average PSD procedure shall be used).

If the average PSD is measured with a power averaging (RMS) detector or a sample detector, then the spectrum analyzer must be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW in order to ensure bin-to-bin spacing of $\leq \text{RBW}/2$ so that narrowband signals are not lost between frequency bins.

Procedures:

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Result: Pass.

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 180 of 224
www.siemic.com.cn

Please refer to the following tables and plots.



802.11a mode					
Data Rate: 1Mbps					
Channel	PSD (dBm)			Total PSD (dBm)	Limit (dBm)
	CH0	CH1	CH2		
5745	-1.780	-1.280	-1.574	3.23	8
5785	-1.838	-1.494	-1.093	3.31	8
5825	-1.823	-1.399	-1.309	3.27	8
802.11n20 mode					
Data Rate: 7.2Mbps					
Channel	PSD (dBm)			Total PSD (dBm)	Limit (dBm)
	CH0	CH1	CH2		
5745	-1.697	-2.395	-2.305	2.65	8
5785	-1.996	-1.455	-1.422	3.15	8
5825	-1.520	-1.365	-1.882	3.19	8
802.11n40 mode					
Data Rate: 15Mbps					
Channel	PSD (dBm)			Total PSD (dBm)	Limit (dBm)
	CH0	CH1	CH2		
5755	-5.392	-4.709	-3.992	0.11	8
5795	-5.274	-4.387	-3.857	0.30	8

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 181 of 224
www.siemic.com.cn

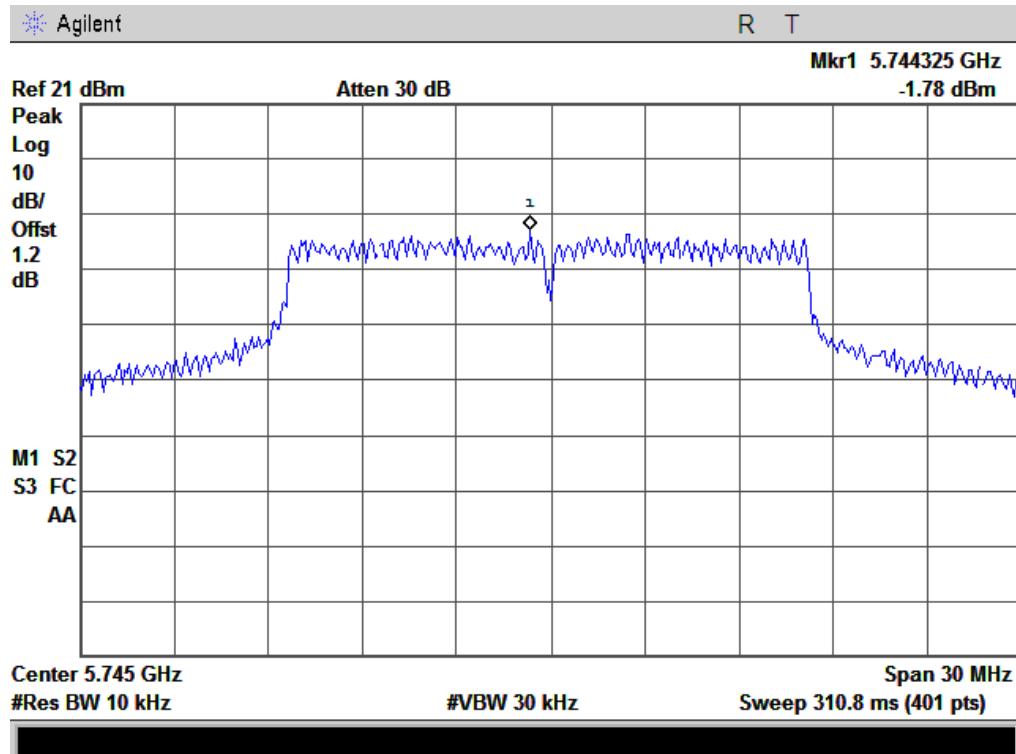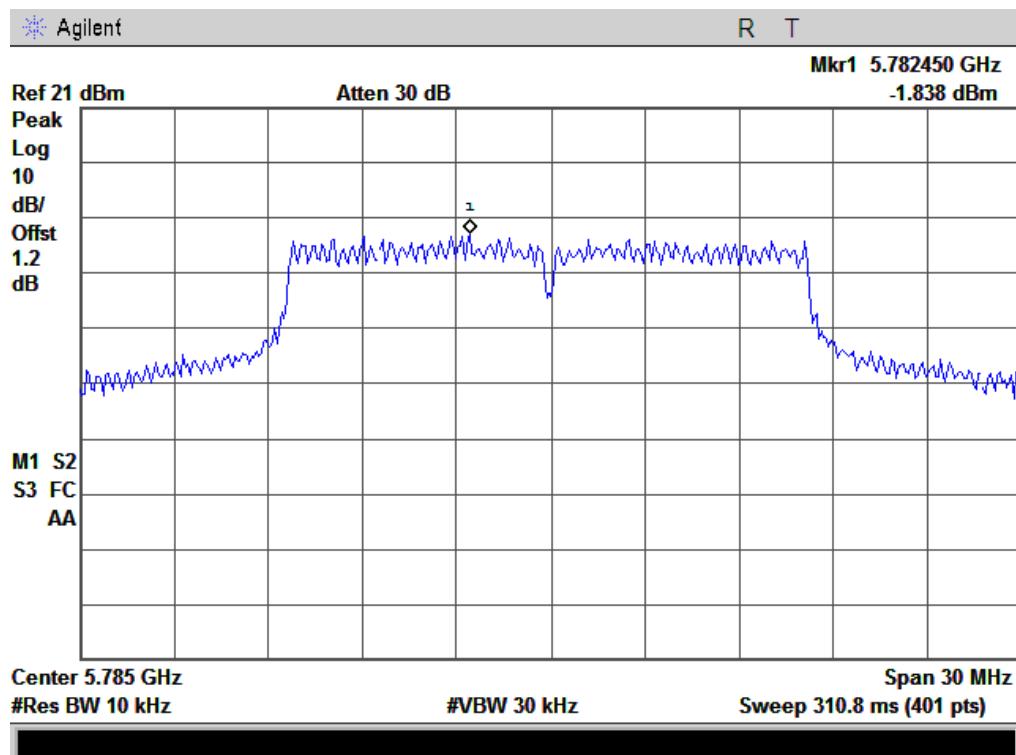RF Port CH0**Power Spectral Density, 802.11a Low Channel****Power Spectral Density, 802.11a Middle Channel**


Power Spectral Density, 802.11a High Channel

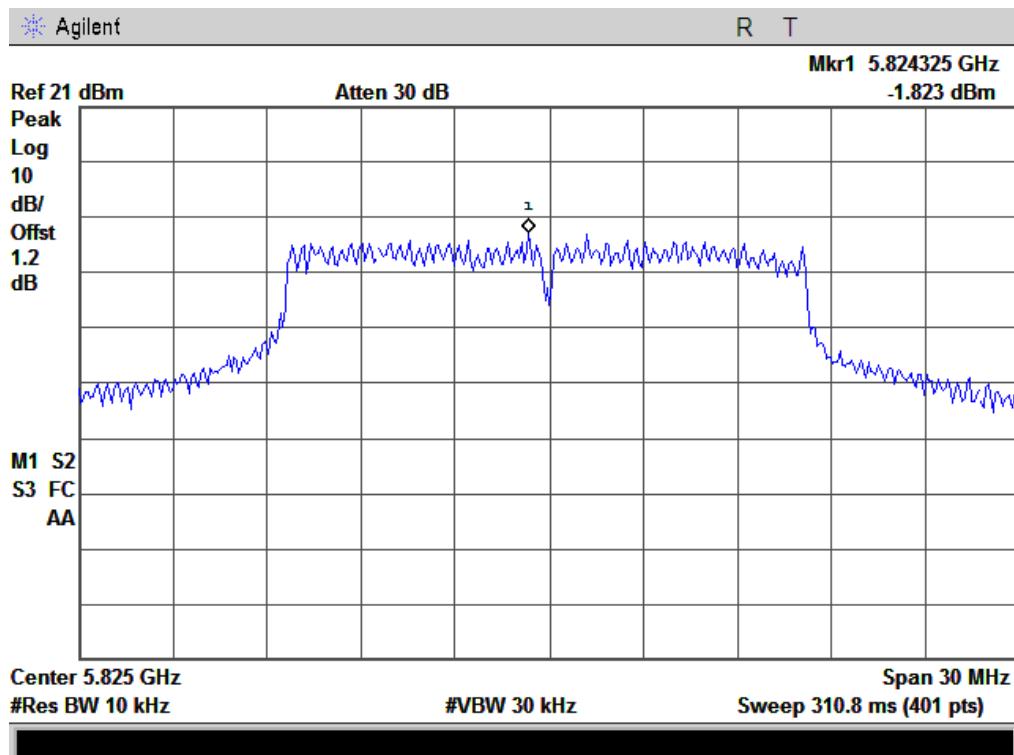


Power Spectral Density, 802.11n20 Low Channel

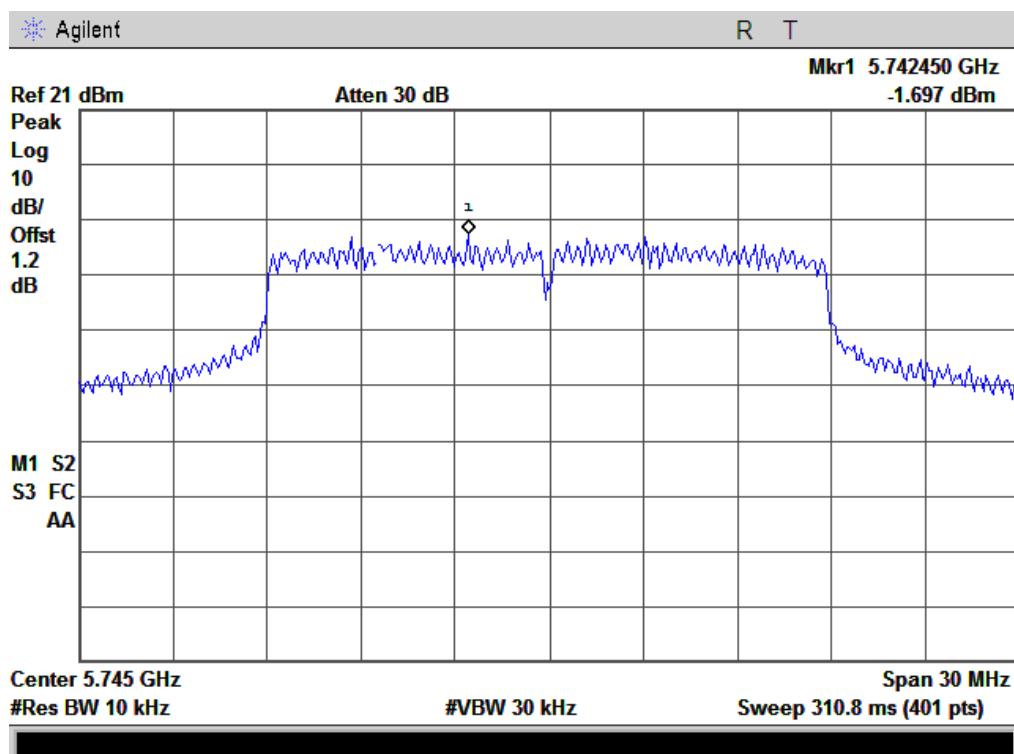


Power Spectral Density, 802.11n20 Middle Channel

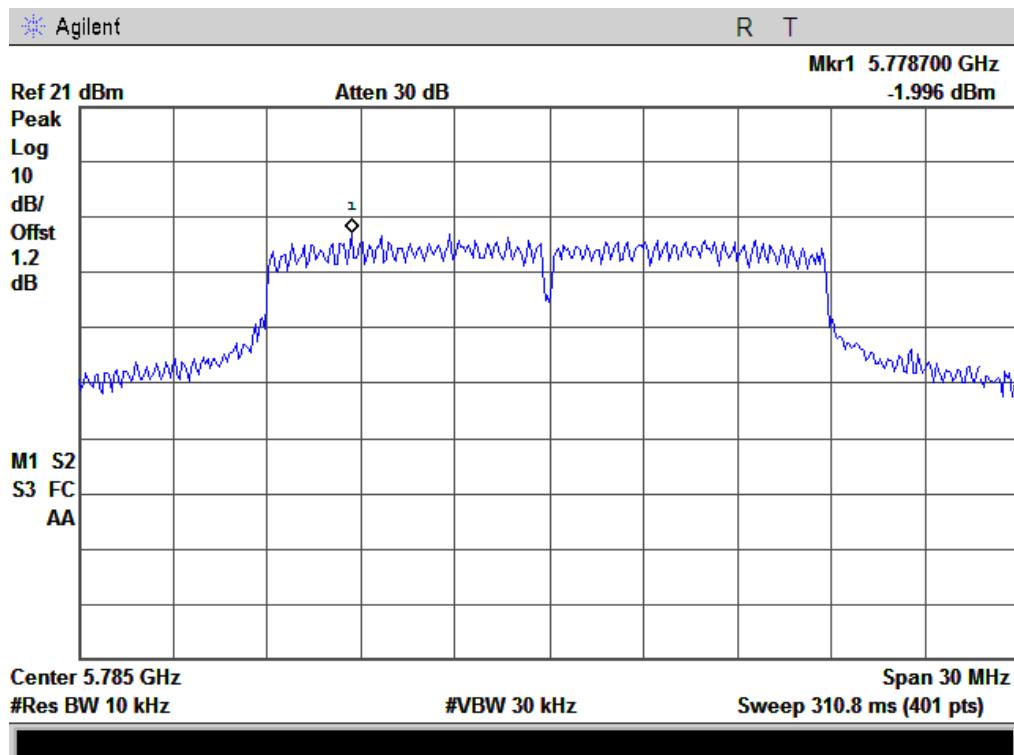


Power Spectral Density, 802.11n20 High Channel

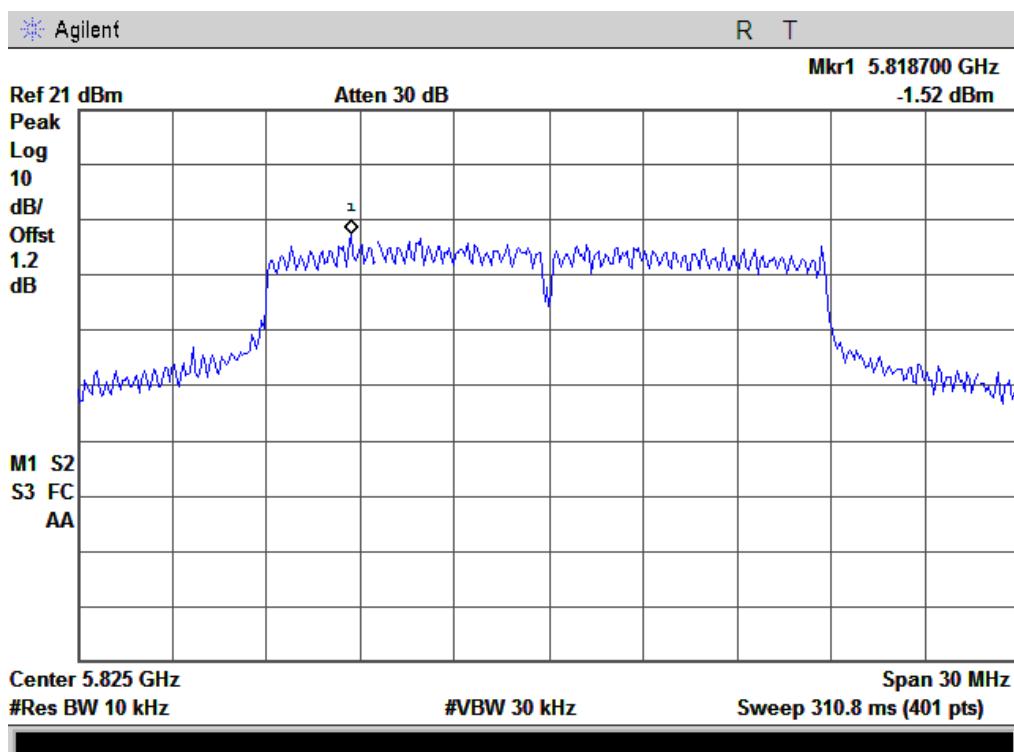

Power Spectral Density, 802.11n40 Low Channel

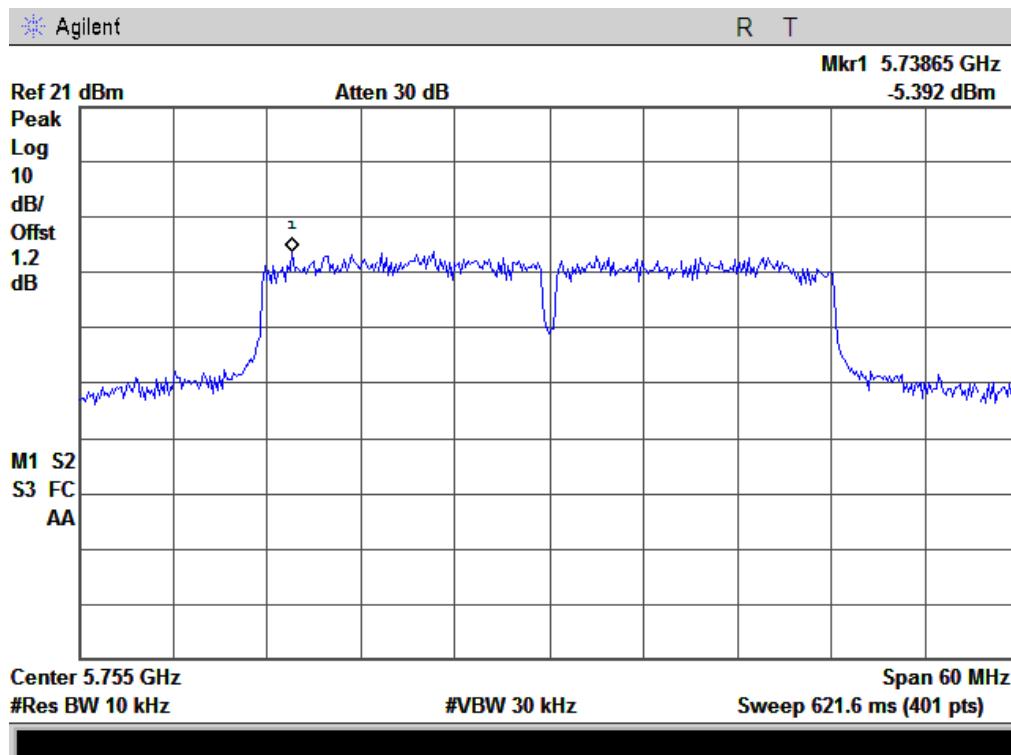

Power Spectral Density, 802.11n40 High Channel


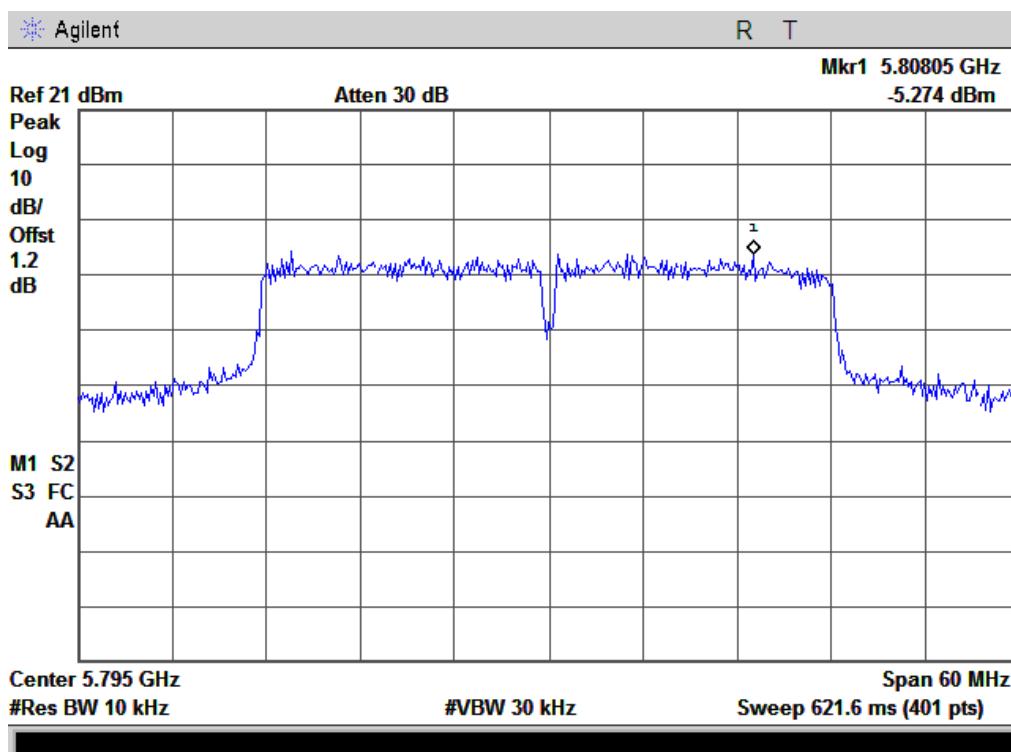


**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009


Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 185 of 224
www.siemic.com.cn

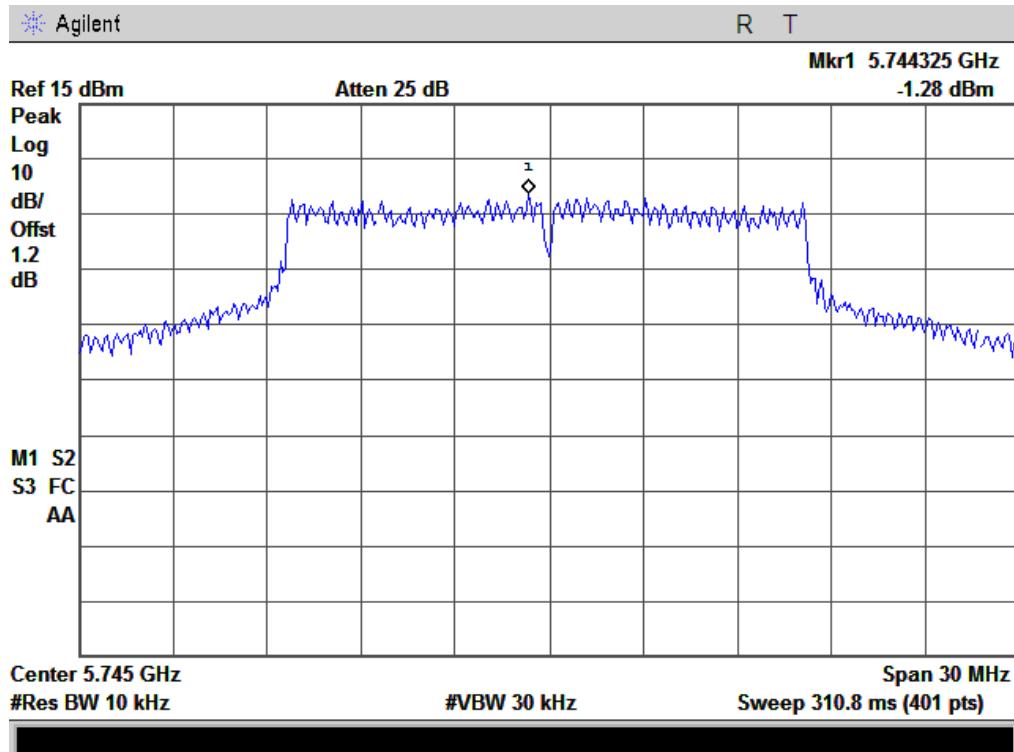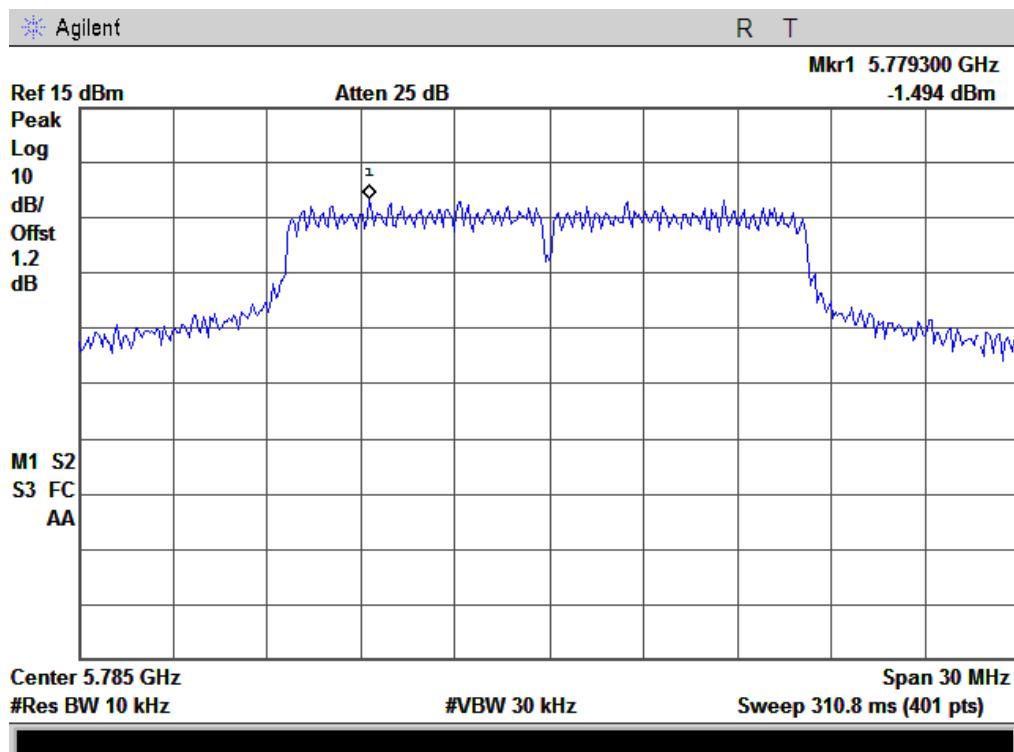RF Port CH1**Power Spectral Density, 802.11a Low Channel****Power Spectral Density, 802.11a Middle Channel**


Power Spectral Density, 802.11a High Channel

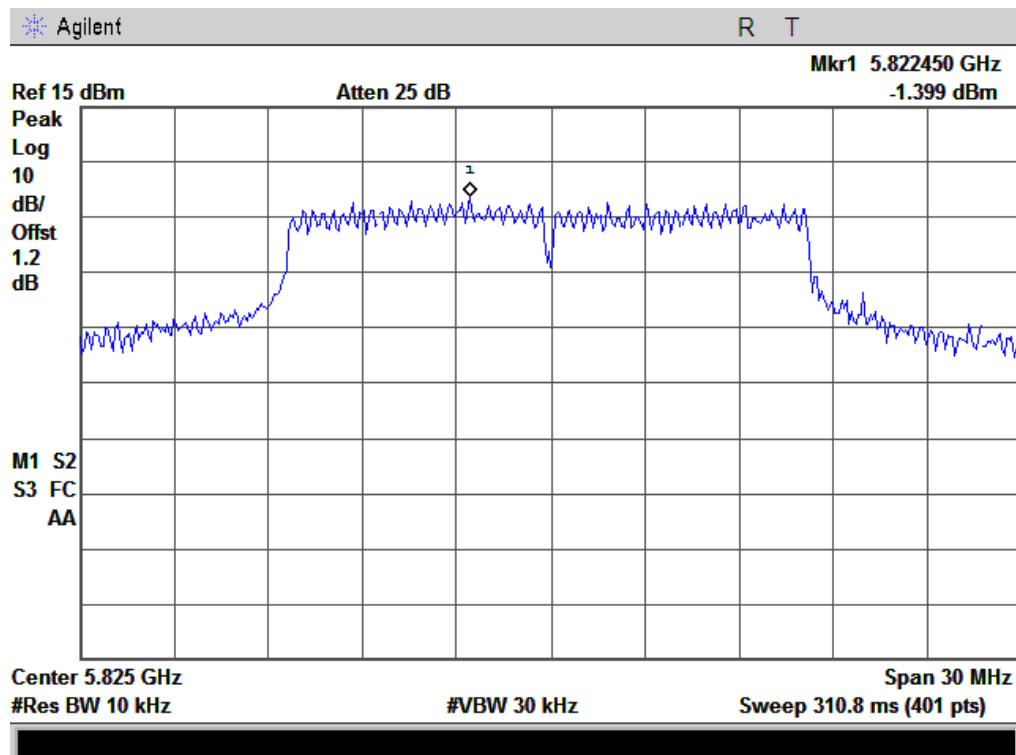


Power Spectral Density, 802.11n20 Low Channel

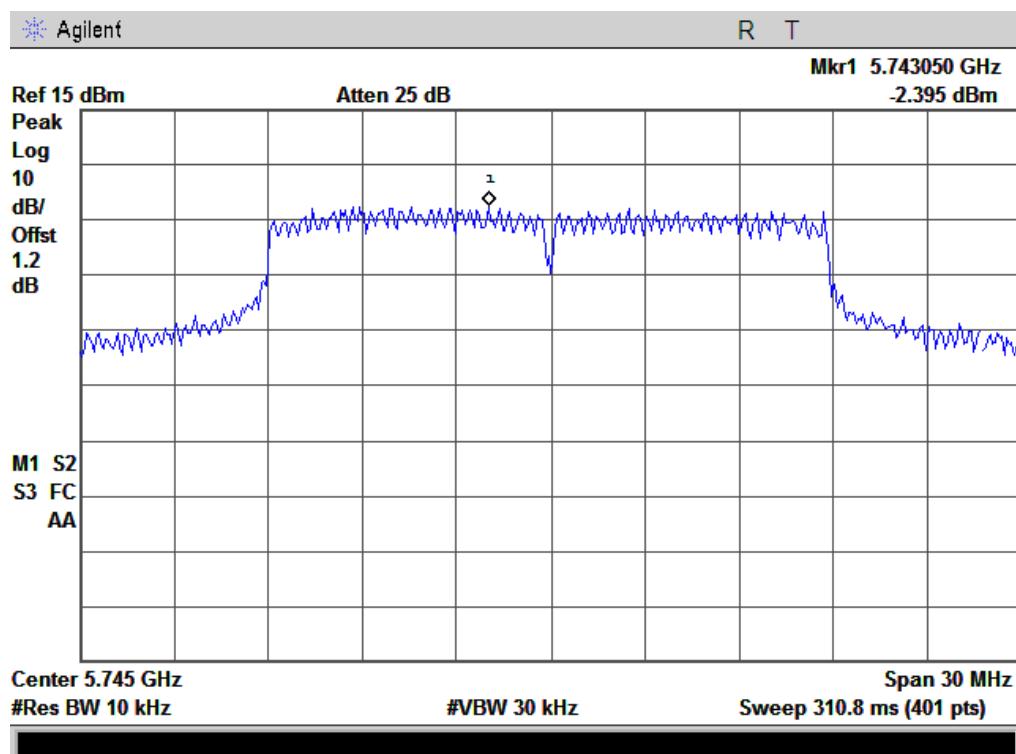


Power Spectral Density, 802.11n20 Middle Channel

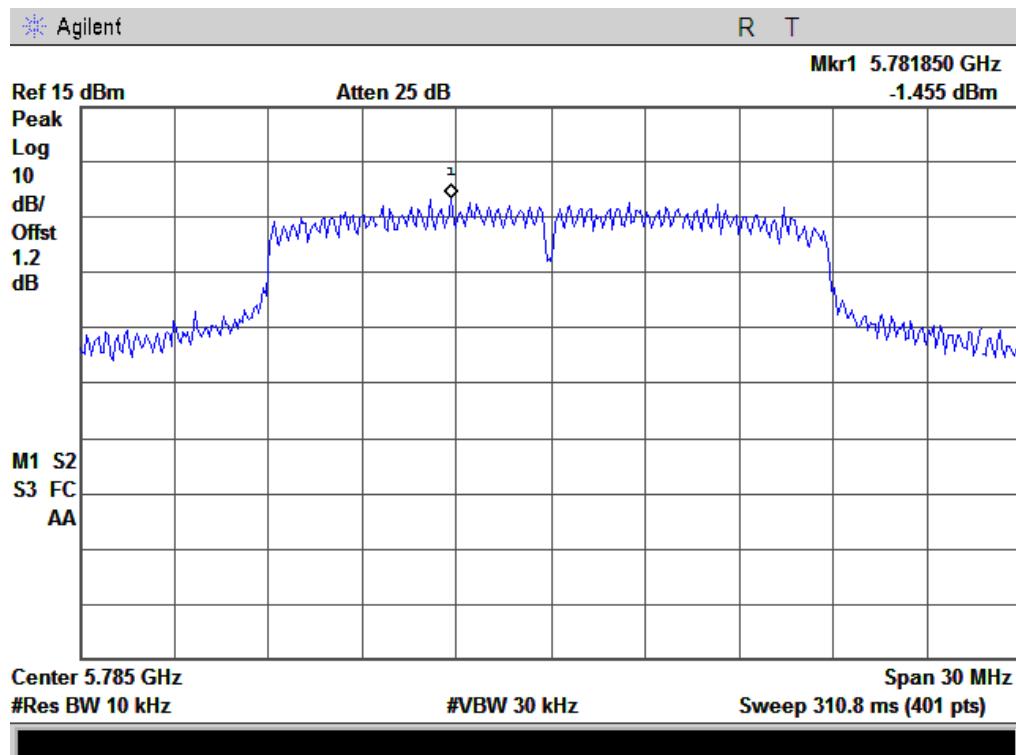


Power Spectral Density, 802.11n20 High Channel

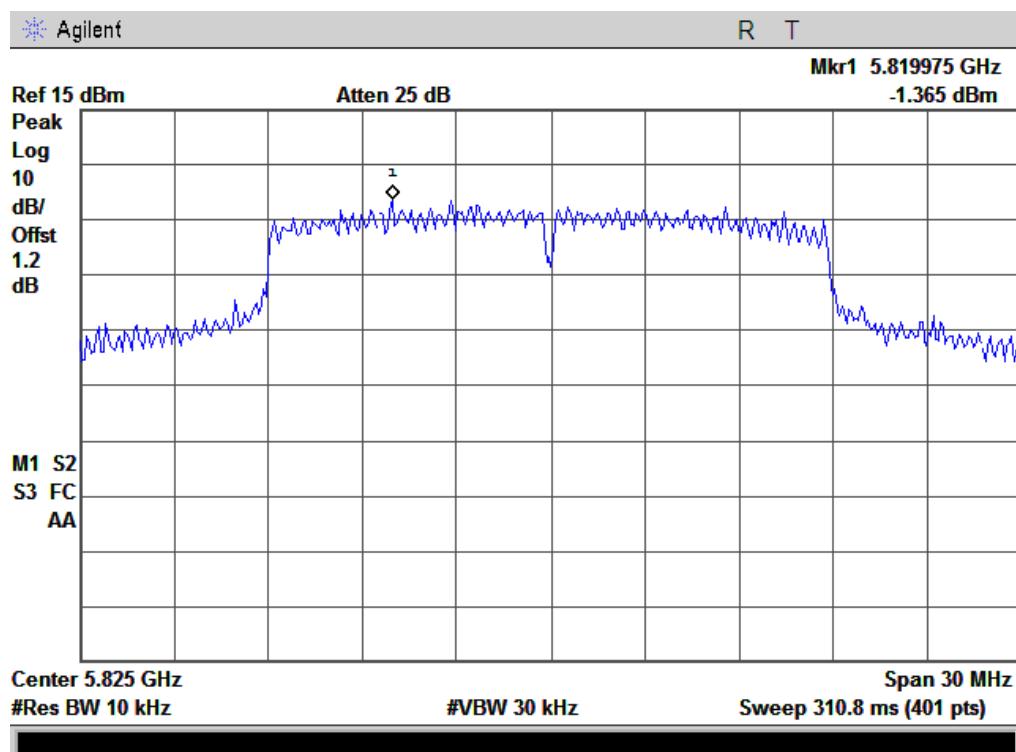

Power Spectral Density, 802.11n40 Low Channel

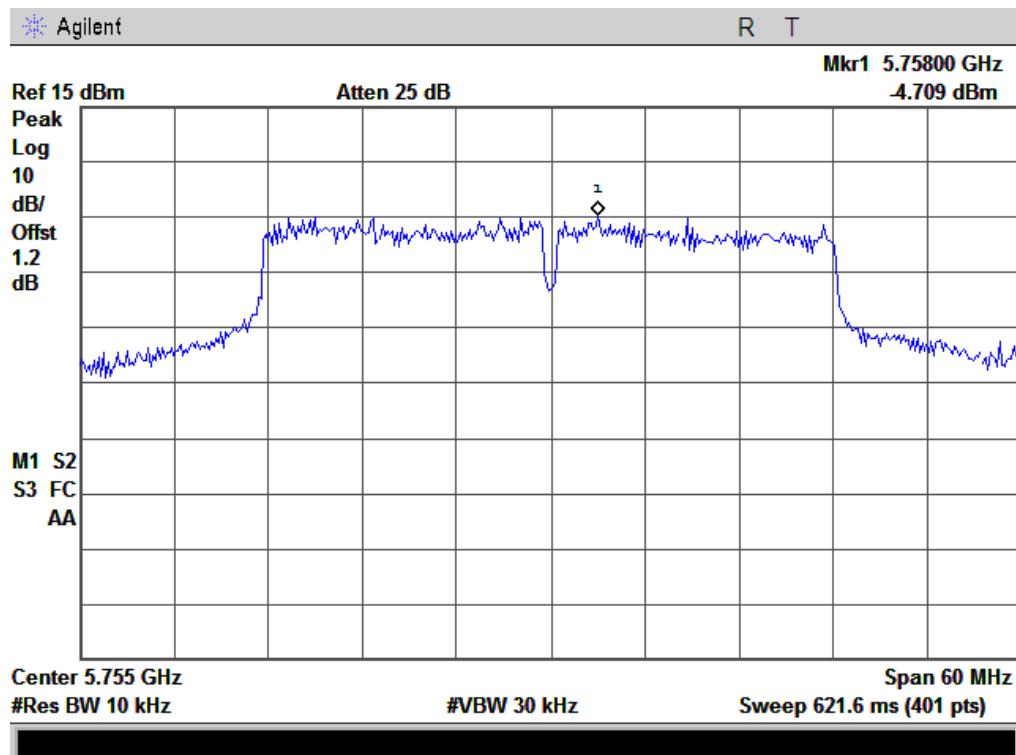


Power Spectral Density, 802.11n40 High Channel

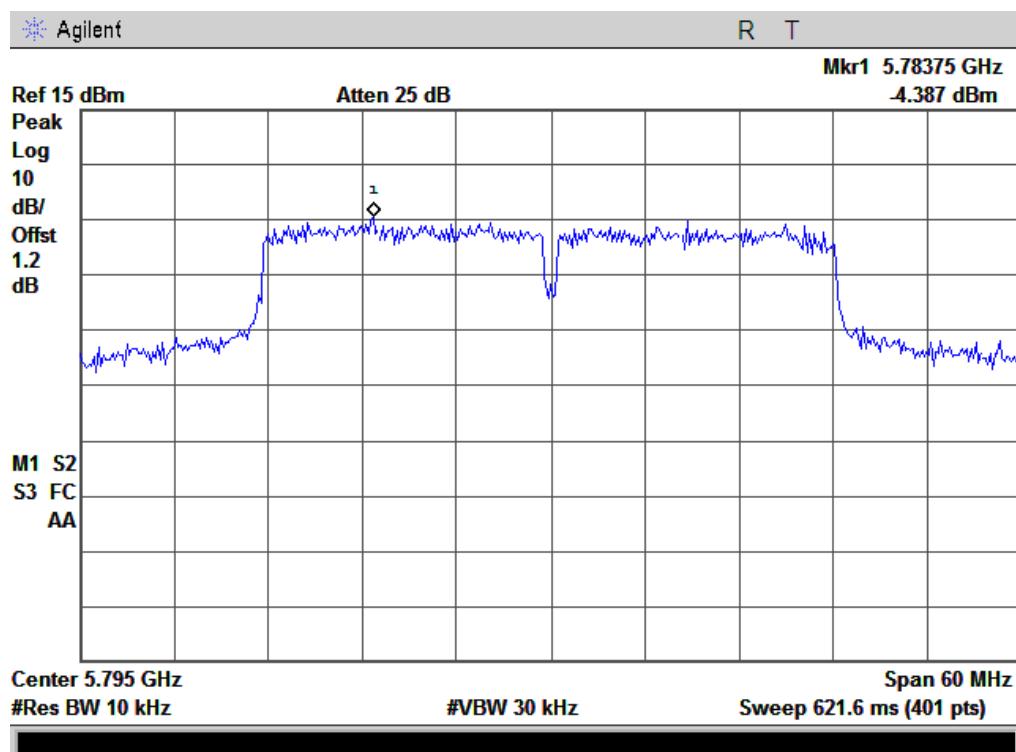


RF Port CH2


Power Spectral Density, 802.11a Low Channel

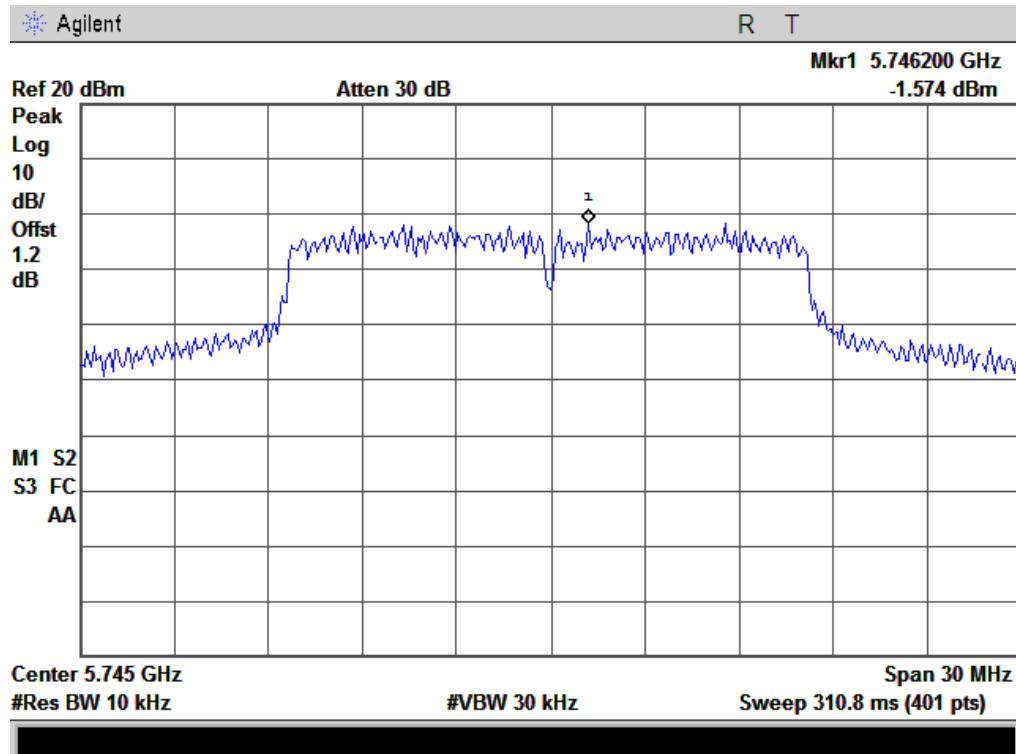


Power Spectral Density, 802.11a Middle Channel

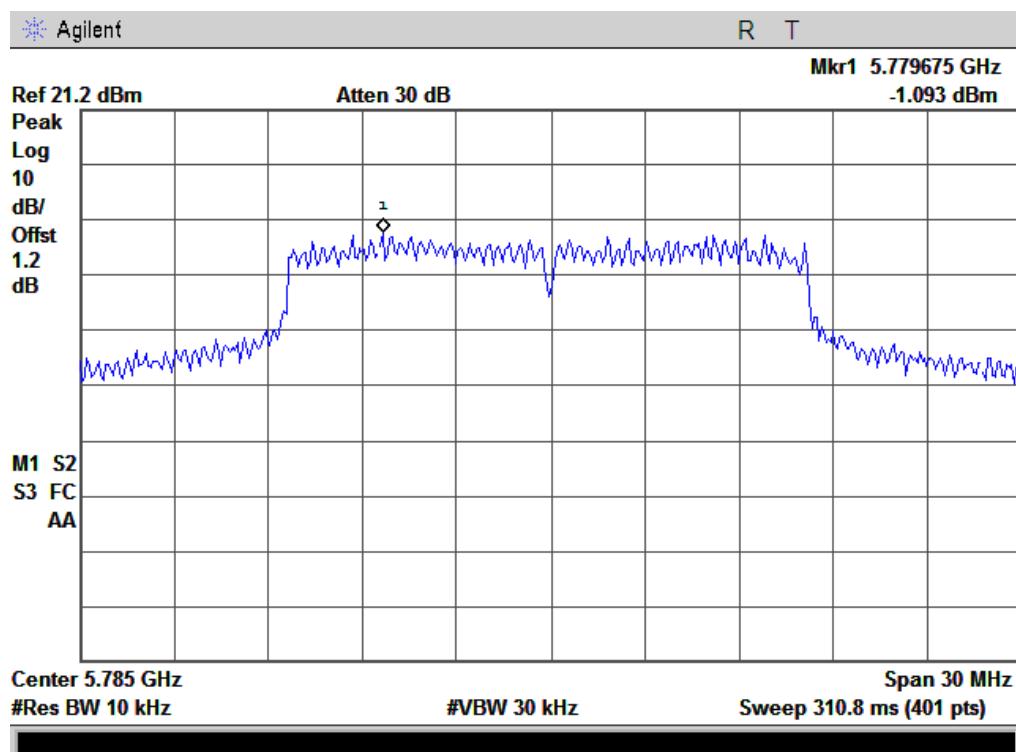


Power Spectral Density, 802.11a High Channel

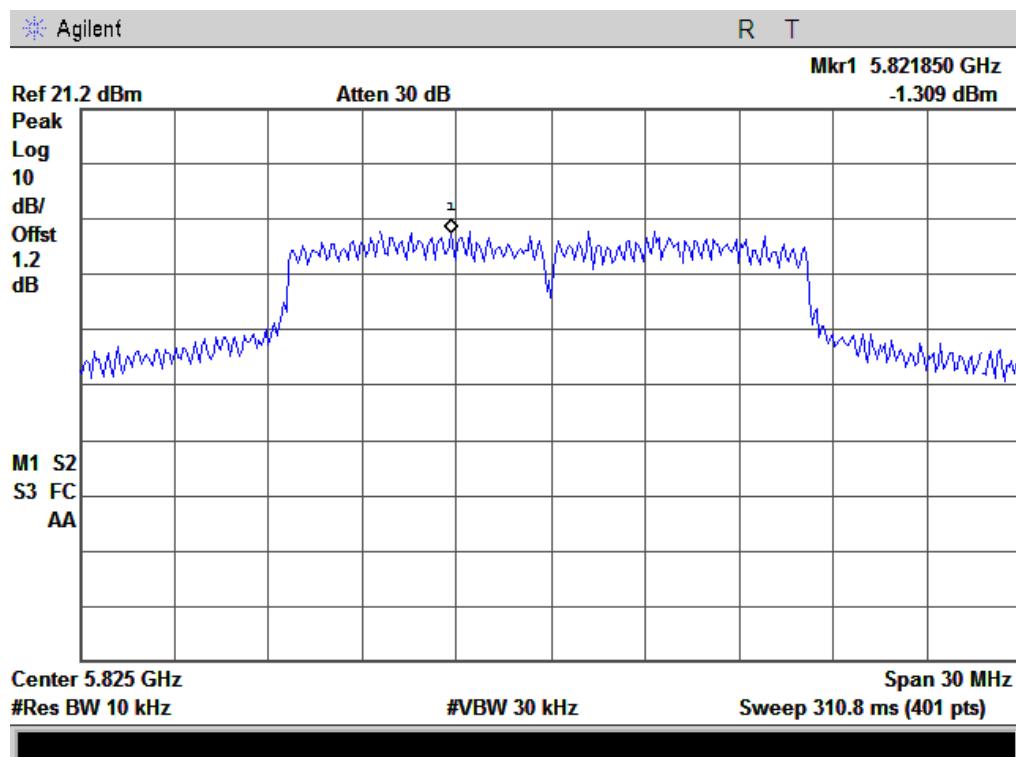


Power Spectral Density, 802.11n20 Low Channel

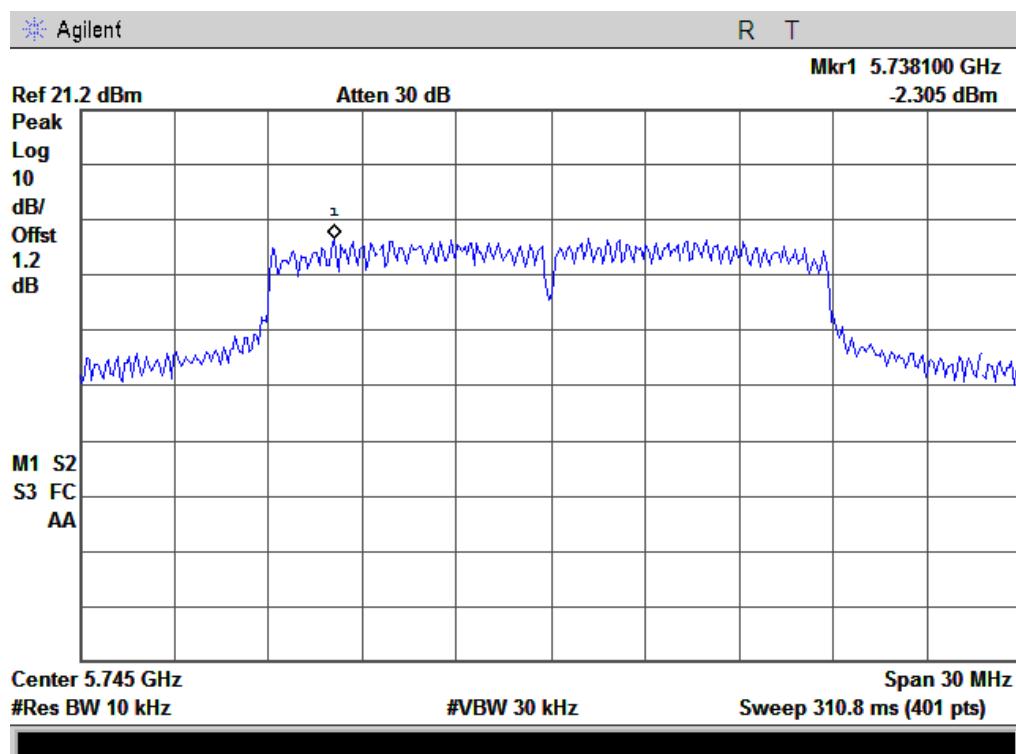


Power Spectral Density, 802.11n20 Middle Channel

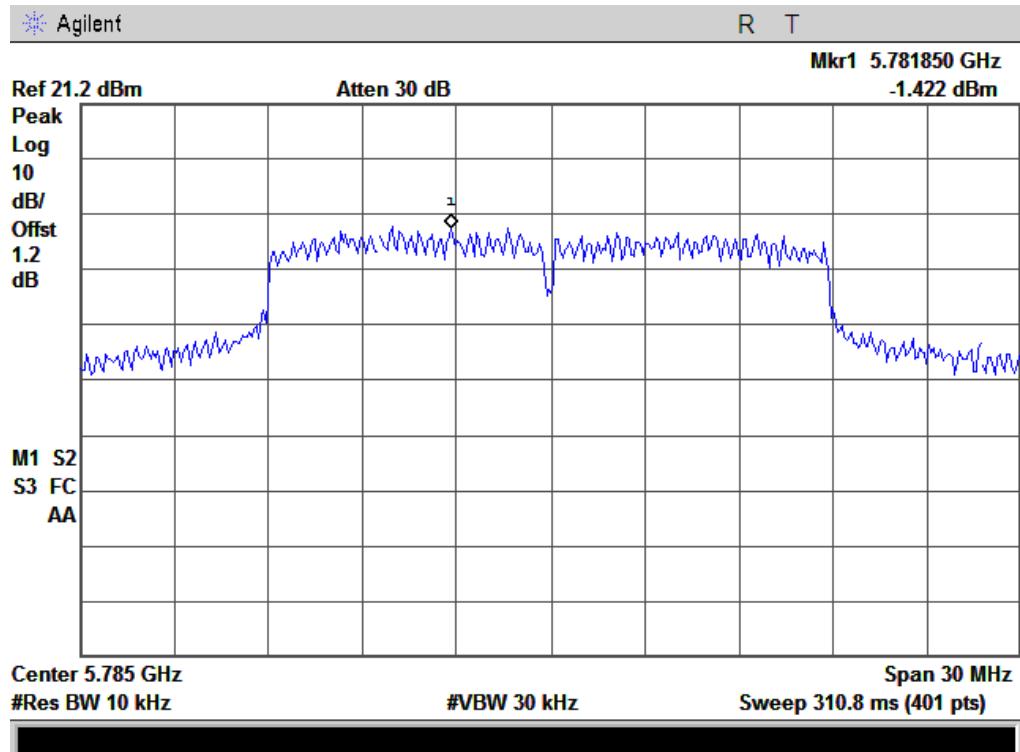


Power Spectral Density, 802.11n20 High Channel

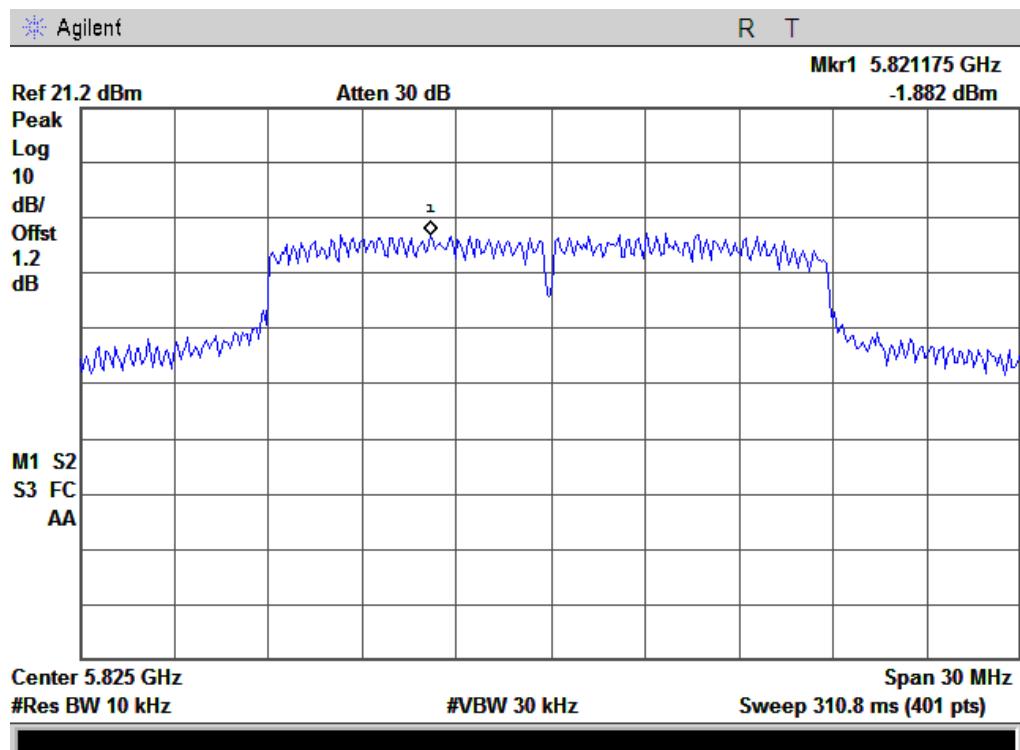

Power Spectral Density, 802.11n40 Low Channel

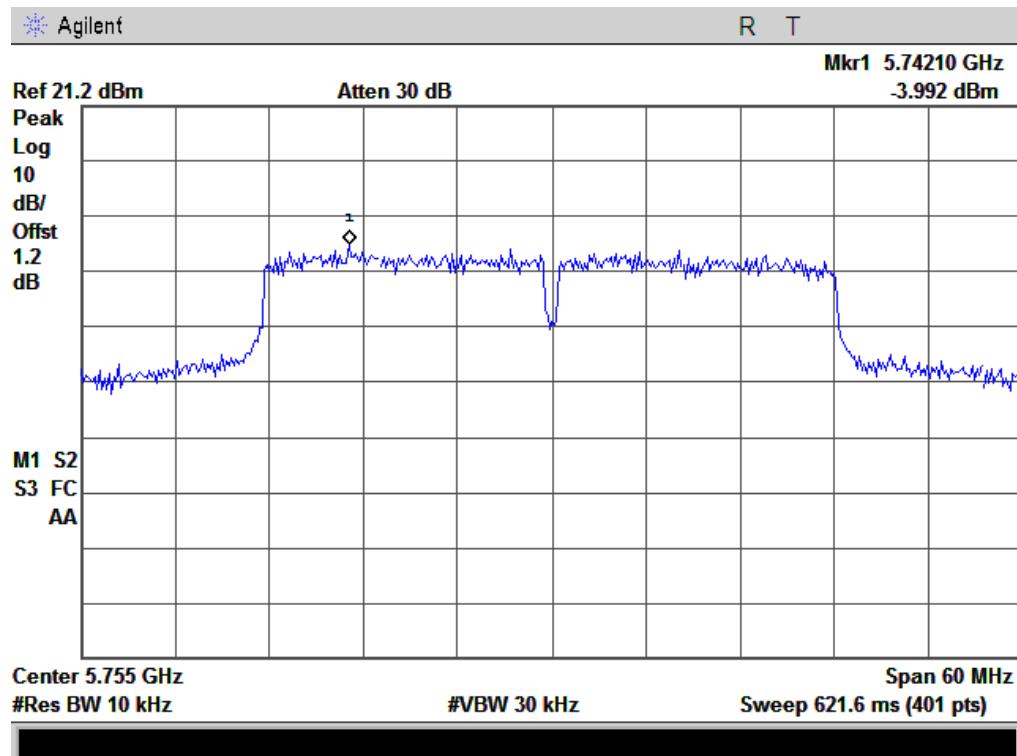

Power Spectral Density, 802.11n40 High Channel

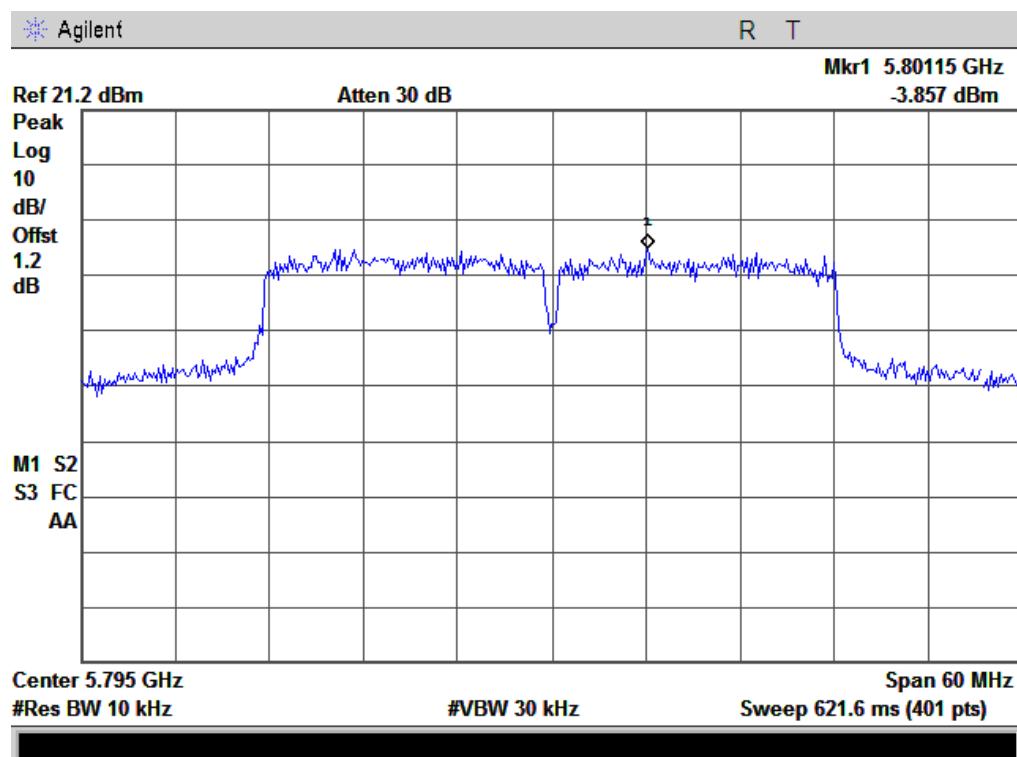

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 193 of 224
www.siemic.com.cn

5.11§15.207 (a) - AC Power Line Conducted Emissions(For 5G Band)

Requirement:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

Procedures:


1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ± 3.5 dB.
4. Environmental Conditions Temperature 25°C
 Relative Humidity 58%
 Atmospheric Pressure 1001mbar
5. Test date: August 13, 2013
Tested By : Herith Shi

**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 194 of 224
www.siemic.com.cn

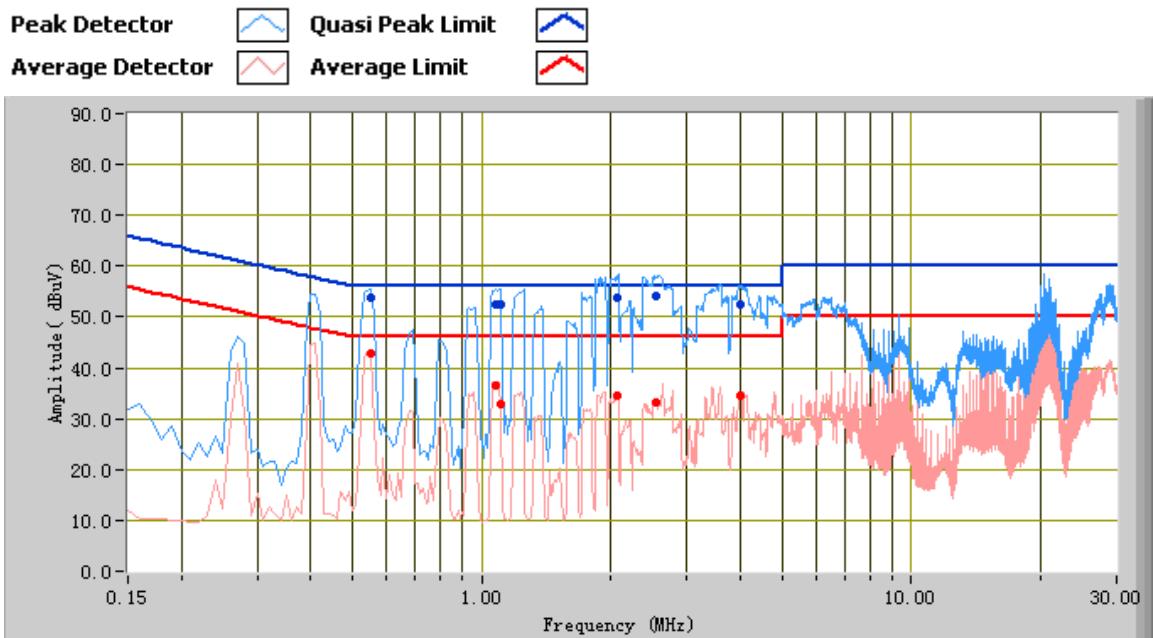Test Mode: 5.8GHz 802.11a Transmitting Mode(Worse Case)**Test Data****Phase Line Plot at 120V AC, 60Hz**

Frequency (MHz)	Quasi Peak (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Factors (dB)
2.06	53.91	56.00	-2.09	34.48	46.00	-11.52	10.11
2.54	54.03	56.00	-1.97	33.31	46.00	-12.69	10.13
3.98	52.57	56.00	-3.43	34.48	46.00	-11.52	10.17
1.11	52.44	56.00	-3.56	32.76	46.00	-13.24	10.10
0.55	53.84	56.00	-2.16	42.87	46.00	-3.13	10.10
1.08	52.59	56.00	-3.41	36.59	46.00	-9.41	10.10

Test Mode: 5.8GHz 802.11a Transmitting Mode(Worse Case)

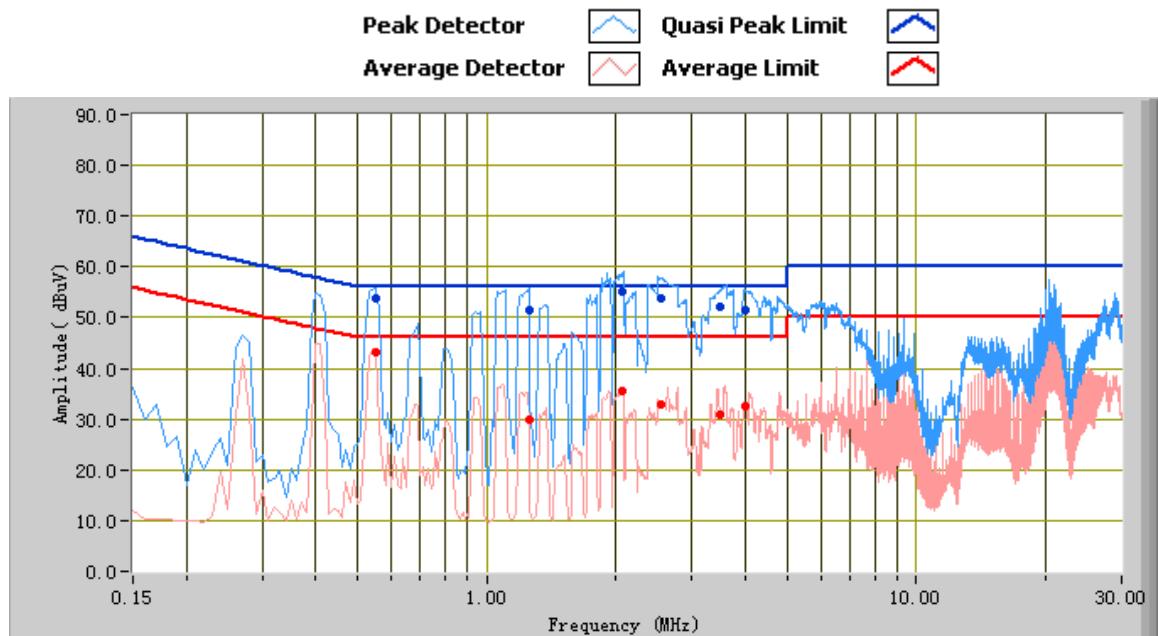

Test Data

Phase Natural Plot at 120V AC, 60Hz

Frequency (MHz)	Quasi Peak (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Factors (dB)
2.06	55.14	56.00	-0.86	35.46	46.00	-10.54	10.11
2.54	53.87	56.00	-2.13	32.97	46.00	-13.03	10.13
0.55	53.96	56.00	-2.04	43.08	46.00	-2.92	10.10
1.25	51.50	56.00	-4.50	29.87	46.00	-16.13	10.10
3.98	51.47	56.00	-4.53	32.66	46.00	-13.34	10.17
3.50	52.24	56.00	-3.76	30.74	46.00	-15.26	10.15

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 196 of 224
www.siemic.com.cn

5.12§15.209, §15.205 & §15.247(d) - Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands(For 5GHz Band)

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz & 1GHz above (3m & 10m) is +/-6dB.
4. Environmental Conditions Temperature 25°C
 Relative Humidity 56%
 Atmospheric Pressure 1001mbar
5. Test date : August 13 2013
Tested By : Herith Shi

Requirement: §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Procedures:

Radiated Spurious Emissions Measurement

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Established procedures for performing radiated measurements shall be used (see C63.10). All detected emissions must comply with the applicable limits.

Measurement Detectors

§15.35(a) specifies that on frequencies less than and below 1000 MHz, the radiated emissions limits assume the use of a CISPR quasi-peak detector function and related measurement bandwidths. §15.35(b) specifies that on frequencies above 1000 MHz, the radiated emissions limits assume the use of an average detector and a minimum resolution bandwidth of 1 MHz. In addition, §15.35(b) that when average radiated emissions measurements are specified there is also a limit on the peak emissions level which is 20 dB above the applicable maximum permitted average emission limit. These specifications also apply to conducted emissions measurements.

4. CISPR Quasi-Peak Measurement

The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

5. Peak Power Measurement Procedure

Utilize the peak power measurement procedure specified in Section 8.1.1 with the following modifications:

Set analyzer center frequency to the frequency associated with the restricted band emission under examination.

Set RBW = 1 MHz.

Note that if the peak measured value complies with the average limit, it is not necessary to perform a separate average measurement. If this option is exercised, it should be so noted in the test report.

6. Average Power Measurement Procedures

The average restricted band emission levels must be measured with the EUT transmitting continuously ($\geq 98\%$ duty cycle) at its maximum power control level. Optionally, video triggering/signal gating can be used to ensure that measurements are performed only when the EUT is transmitting at its maximum power control level.

The average power measurement procedures described in Section 8.2 shall be used with the following modifications:

Set analyzer center frequency to the frequency associated with the restricted band emission.

Set span to at least 1 MHz.

Use peak marker function to determine the highest amplitude within the RBW (1 MHz).

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 197 of 224
www.siemic.com.cn

Test Result: Pass

Test Mode:	Transmitting Mode(Worse Case)
-------------------	--------------------------------------

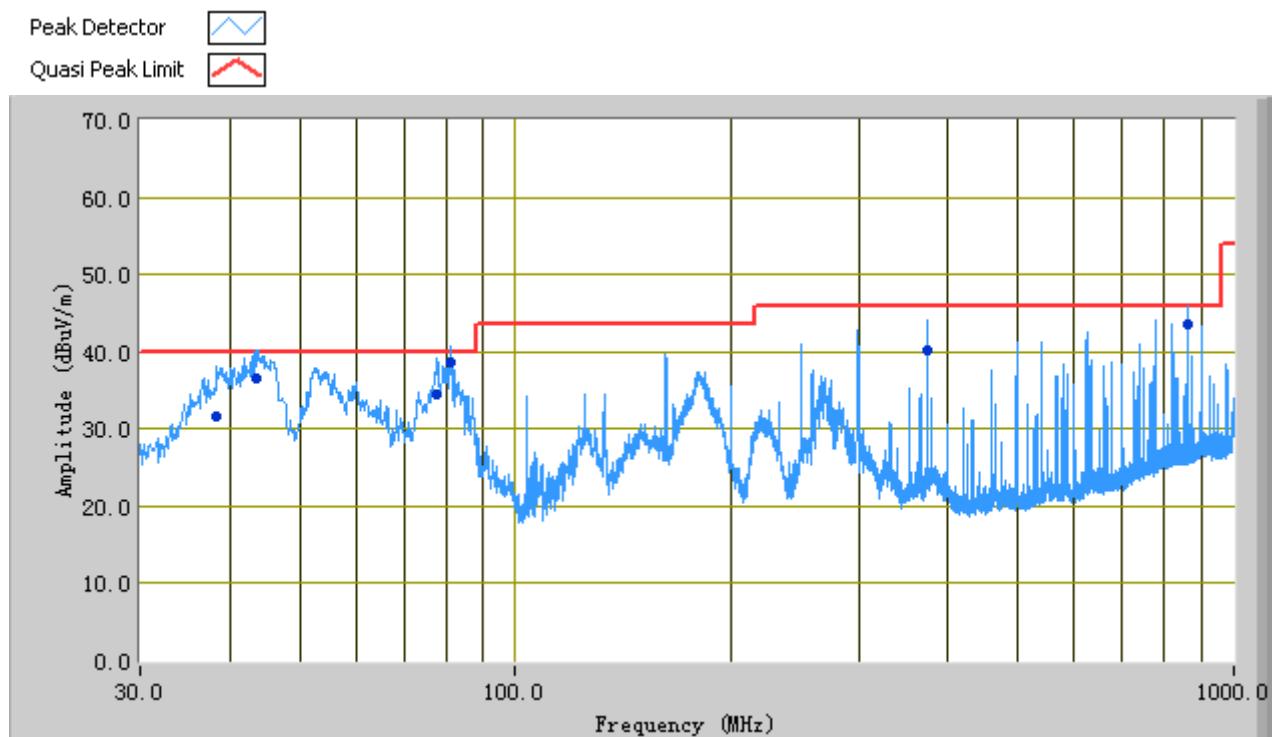(Below 1GHz)**Test Data**

Frequency (MHz)	Quasi Peak (dBuV/m)	Azimuth	Polarity(H/V)	Height (cm)	Factors (dB)	Limit (dBuV)	Margin (dB)
81.19	38.75	94.00	V	135.00	-13.76	40.00	-1.25
43.51	36.44	315.00	V	150.00	-10.27	40.00	-3.56
860.03	43.52	201.00	H	100.00	4.26	46.00	-2.48
77.58	34.44	180.00	V	130.00	-13.72	40.00	-5.56
374.95	40.29	92.00	H	103.00	-3.92	46.00	-5.71
38.42	31.62	360.00	V	138.00	-6.42	40.00	-8.38

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 198 of 224
www.siemic.com.cn

Above 1 GHz:***Test Mode: Transmitting*****Note: Other modes were verified, only the result of worst case basic rate mode was presented.****Mode: 802.11a**

Low Channel (5745 MHz)

Frequency (MHz)	Substituted level (dB μ V/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11490	31.61	AV	0	100	V	39.93	6.04	24	53.58	54	-0.42
11490	31.30	AV	180	120	H	39.93	6.04	24	53.27	54	-0.73
11490	44.02	PK	0	100	V	39.93	6.04	24	65.99	74	-8.01
11490	45.68	PK	180	120	H	39.93	6.04	24	67.65	74	-6.35

Middle Channel (5785 MHz)

Frequency (MHz)	Substituted level (dB μ V/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11570	31.42	AV	310	100	V	39.93	6.04	24	53.39	54	-0.61
11570	31.41	AV	100	120	H	39.93	6.04	24	53.38	54	-0.62
11570	43.71	PK	310	100	V	39.93	6.04	24	65.68	74	-8.32
11570	45.40	PK	100	120	H	39.93	6.04	24	67.37	74	-6.63

High Channel (5825 MHz)

Frequency (MHz)	Substituted level (dB μ V/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11650	31.48	AV	311	100	V	39.93	6.04	24	53.45	54	-0.55
11650	31.42	AV	95	120	H	39.93	6.04	24	53.39	54	-0.61
11650	43.25	PK	311	100	V	39.93	6.04	24	65.22	74	-8.78
11650	45.33	PK	95	120	H	39.93	6.04	24	67.30	74	-6.70

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 199 of 224
www.siemic.com.cn

Annex A. TEST INSTRUMENT & METHOD


Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Model	Serial #	Calibration Date	Calibration Due Date
AC Line Conducted Emissions				
EMI test receiver	ESL6	100262	11/19/2012	11/19/2013
Line Impedance Stabilization Network	LI-125A	191106	11/14/2012	11/13/2013
Line Impedance Stabilization Network	LI-125A	191107	11/14/2012	11/13/2013
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	071259	11/20/2012	11/19/2013
Transient Limiter	LIT-153	531118	03/03/2013	03/02/2014
RF conducted test				
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	CFG038	10/25/2013	10/24/2014
Power Splitter	1#	1#	02/02/2013	02/01/2014
Temperature/Humidity Chamber	1007H	N/A	01/07/2013	01/06/2014
DC Power Supply	E3640A	MY4000401 3	03/22/2013	03/21/2014
Radiated Emissions				
EMI test receiver	ESL6	100262	11/19/2012	11/19/2013
Positioning Controller	UC3000	MF78020828 2	11/19/2012	11/19/2013
OPT 010 AMPLIFIER(0.1-1300MHz)	8447E	2727A02430	11/19/2012	11/19/2013
Microwave Preamplifier(0.5~18GHz)	PAM-118	443008	11/08/2013	11/07/2014
Bilog Antenna (30MHz~6GHz)	JB6	A110712	01/27/2013	01/26/2014
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	071283	11/20/2012	11/19/2013
Horn Antenna (18 ~40GHz)	AH-840	10SL0073	04/23/2013	04/23/2014
Microwave Preamplifier(18~40GHz)	PA-840	181250	05/30/2013	05/30/2014

Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in [Annex B](#).
2. The power supply for the EUT was fed through a $50\Omega/50\mu\text{H}$ EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

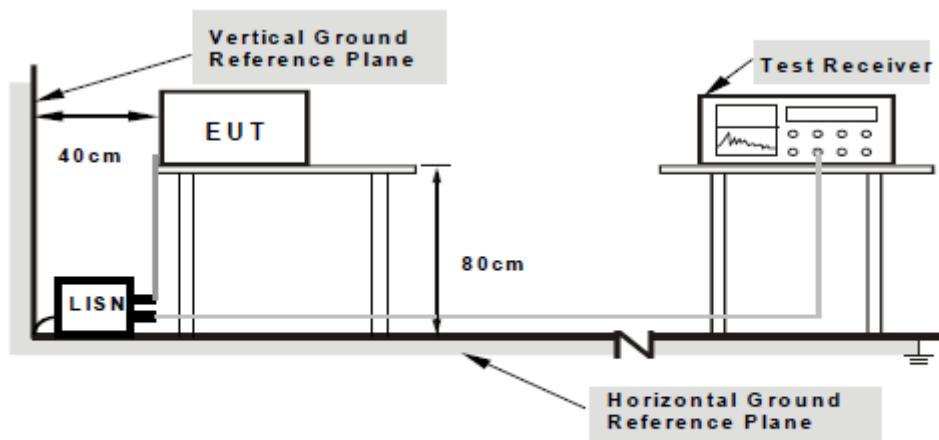

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration1.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

Description of Conducted Emission Program

This EMC Measurement software run LabView automation software and offers a common user interface for electromagnetic interference (EMI) measurements. This software is a modern and powerful tool for controlling and monitoring EMI test receivers and EMC test systems. It guarantees reliable collection, evaluation, and documentation of measurement results. Basically, this program will run a pre-scan measurement before it proceeds with the final measurement. The pre-scan routine will run the common scan range from 150 kHz to 30 MHz; the program will first start a peak and average scan on selectable measurement time and step size. After the program complete the pre-scan, this program will perform the Quasi Peak and Average measurement, based on the pre-scan peak data reduction result.



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4:

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 201 of 224
www.siemic.com.cn

Sample Calculation Example

At 20 MHz

limit = 250 μ V = 47.96 dB μ V

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver = 40.00 dB μ V
(Calibrated for system losses)

Therefore, Q-P margin = $47.96 - 40.00 = 7.96$ i.e. **7.96 dB below limit**

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 202 of 224
www.siemic.com.cn

Annex A. iii RADIATED EMISSIONS TEST DESCRIPTION


EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10th Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer / receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

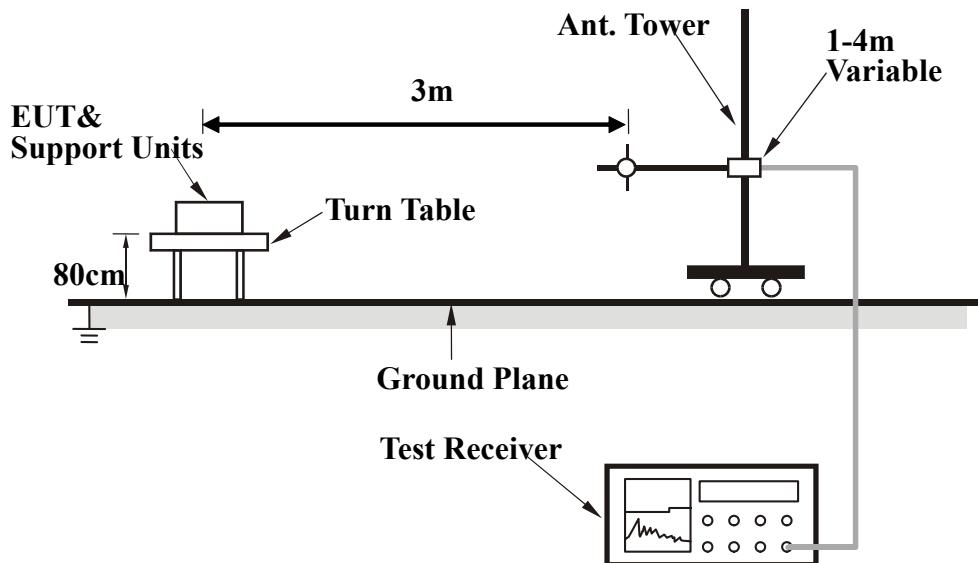

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless Router
Main Model: R2-CAP-ND-900N
Serial Model: N/A
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 13070456-FCC-R1
Issue Date: November 13, 2013
Page: 203 of 224
www.siemic.com.cn

Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured was complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor} \text{ or}$$
$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note :

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.