

## **Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.**

Application  
For  
Certification

**FCC ID: 2AABK-CT101W**

**2 IN 1 DETACHABLE TABLET**

**Model: CT101W**

**Brand name: Singer**

**2.4GHz WiFi Transceiver**

**Report No.: 171023017SZN-002**

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-16]

Prepared and Checked by:

Approved by:

Sign on file

Leo Li  
Engineer

---

Kidd Yang  
Senior Project Engineer  
Date: November 08, 2017

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF no.: FCC 15C\_Tx\_c

**Intertek Testing Services Shenzhen Ltd. Longhua Branch**

1F/2F, Building B, QiaoAn Scientific Technology Park, ShangKeng Community, GuanHu Subdistrict, LongHua District, Shenzhen

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: [www.china.intertek-etlsemko.com](http://www.china.intertek-etlsemko.com)

# INTERTEK TESTING SERVICE

---

---

## LIST OF EXHIBITS

### *INTRODUCTION*

<i>EXHIBIT 1:</i>	Summary of Tests
<i>EXHIBIT 2:</i>	General Description
<i>EXHIBIT 3:</i>	System Test Configuration
<i>EXHIBIT 4:</i>	Measurement Results
<i>EXHIBIT 5:</i>	Equipment Photographs
<i>EXHIBIT 6:</i>	Product Labeling
<i>EXHIBIT 7:</i>	Technical Specifications
<i>EXHIBIT 8:</i>	Instruction Manual
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Miscellaneous Information
<i>EXHIBIT 11:</i>	Test Equipment List

# INTERTEK TESTING SERVICES

## MEASUREMENT/TECHNICAL REPORT

### 2 IN 1 DETACHABLE TABLET

**Model: CT101W**

**FCC ID: 2AABK-CT101W**

This report concerns (check one)    Original Grant  Class II Change

Equipment Type: DTS - Part 15 Digital Transmission Systems (WiFi transmitter portion)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?    Yes     No

If yes, defer until : \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37?    Yes     No

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-16] Edition] provision.

Report prepared by:

Leo Li  
Intertek Testing Services Shenzhen Ltd.  
Longhua Branch  
1F/2F, Building B, QiaoAn Scientific Technology  
Park, Shangkeng Community, Guanhu  
Subdistrict, Longhua District, Shenzhen, P.R.  
China  
Phone: (86 755) 8614 0743  
Fax: (86 755) 8601 6751

# INTERTEK TESTING SERVICES

---

---

## Table of Contents

1.0	<b><u>Summary of Test results</u></b>	2
2.0	<b><u>General Description</u></b>	4
2.1	Product Description	4
2.2	Related Submittal(s) Grants	4
2.3	Test Methodology	5
2.4	Test Facility	5
3.0	<b><u>System Test Configuration</u></b>	7
3.1	Justification	7
3.2	EUT Exercising Software	7
3.3	Special Accessories	8
3.4	Measurement Uncertainty	8
3.5	Equipment Modification	8
3.6	Support Equipment List and Description	8
4.0	<b><u>Measurement Results</u></b>	10
4.1	Maximum Conducted Output Power at Antenna Terminals	10
4.2	Minimum 6 dB RF Bandwidth	12
4.3	Maximum Power Density Reading	22
4.4	Out of Band Conducted Emissions	31
4.5	Out of Band Radiated Emissions	32
4.6	Transmitter Radiated Emissions in Restricted Bands	33
4.7	Field Strength Calculation	34
4.8	Radiated Spurious Emission	35
4.9	Conducted Emission	49
4.10	Radiated Emissions from Digital Section of Transceiver	52
4.11	Transmitter Duty Cycle Calculation and Measurements	53
5.0	<b><u>Equipment Photographs</u></b>	55
6.0	<b><u>Product Labelling</u></b>	57
7.0	<b><u>Technical Specifications</u></b>	59
8.0	<b><u>Instruction Manual</u></b>	61
9.0	<b><u>Confidentiality Request</u></b>	63
10.0	<b><u>Discussion of Pulse Desensitization</u></b>	65
11.0	<b><u>Test Equipment List</u></b>	67

## INTERTEK TESTING SERVICES

---

---

### List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

# **INTERTEK TESTING SERVICES**

---

---

## **EXHIBIT 1**

### **SUMMARY OF TEST RESULTS**

# INTERTEK TESTING SERVICES

---

## 1.0 Summary of Test results

### 2 IN 1 DETACHABLE TABLET

**Model: CT101W**

**FCC ID: 2AABK-CT101W**

TEST	REFERENCE	RESULTS
Max. Output power	15.247(b)(3)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(e)	Pass
Out of Band Antenna Conducted Emission	15.247(d)	Pass
Radiated Emission in Restricted Bands	15.247(d)	Pass
AC Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 2**

#### **GENERAL DESCRIPTION**

## INTERTEK TESTING SERVICES

---

### 2.0 General Description

#### 2.1 Product Description

The Equipment Under Test (EUT) is a 2 IN 1 DETACHABLE TABLET with Bluetooth function operated at 2402-2480MHz, and with the WiFi function operated at 2412-2462MHz for 802.11b/g/n-HT20, 11 channels with 5MHz channel spacing and 2422-2452MHz for 802.11n-HT40, 7 channels with 5MHz channel spacing. The EUT is powered by two rechargeable battery (DC 3.8V, 6000mAh) which can be charged by AC/DC adapter (Input: AC100-240V, 50-60Hz, 0.5A; Output: DC 5V, 3.0A). The WiFi and Bluetooth transmitter can't transmit simultaneously. For more detailed features description, please refer to the user's manual.

Type of Modulation: BPSK, QPSK, 16QAM, 64QAM, CCK, DQPSK, DBPSK.

Antenna Type: Integral Antenna.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 2.2 Related Submittal(s) Grants

This is an application for certification of:

DTS- Part 15 Digital Transmission Systems (WiFi transmitter portion), and the Bluetooth function was reported in the test report: 171023017SZN-001. Other digital functions were reported in the verification report: 170922009SZN-003.

## INTERTEK TESTING SERVICES

---

---

### 2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10: 2013 and KDB 558074 D01 v04. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

### 2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 1F/2F, Building B, QiaoAn Scientific Technology Park, Shangkeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 3**

#### **SYSTEM TEST CONFIGURATION**

## INTERTEK TESTING SERVICES

---

### 3.0 System Test Configuration

#### 3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. The EUT was powered by two rechargeable battery which was charged by AC/DC adapter (Input: AC100-240V, 50-60Hz, 0.5A; Output: DC 5V, 3.0A) during the test. Only the worst case data was reported.

On 802.11b, g, n (20MHz and 40MHz) mode, one antenna is used, and all data rate were tested and only the worst case data is shown in the report.

For maximizing emissions, the EUT was rotated through 360°, the EUT was placed on the styrene turntable with 0.8m up to 1GHz and 1.5 m above 1GHz. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

The rear of unit was flushed with the rear of the table.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

#### 3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

## INTERTEK TESTING SERVICES

---

### 3.3 Special Accessories

N/A.

### 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

### 3.5 Equipment Modification

Any modifications installed previous to testing by Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

### 3.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Model No.
DC adapter	MINGXIN POWER	MX18W1-0503000B
Micro HDMI cable	N/A	Unshielded, Length 220cm
Earphone	Skyworth	Unshielded, Length 125cm
U-Disk*2	SanDisk	SDCZ36-002G-P36
SD card	Kingston	8G
Tuner Resister	N/A	75ohm

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 4**

### **MEASUREMENT RESULTS**

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

### 4.0 Measurement Results

#### 4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna power of the EUT was connected to the input of a broadband peak RF power meter. The power meter has a video bandwidth that is greater than DTS bandwidth and utilize a fast-responding diode detector. Power was read directly at the EUT antenna terminals with cable loss added.

For antennas with gains of 6 dBi or less, maximum allowed Transmitter output is 1 watt (+30 dBm).

IEEE 802.11b (Antenna Gain = 2.3dBi) (CCK, 1Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	9.23	8.4
Middle Channel: 2437	9.46	8.8
High Channel: 2462	9.15	8.2

IEEE 802.11g (Antenna Gain = 2.3dBi) (16QAM, 6Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	8.04	6.4
Middle Channel: 2437	8.30	6.8
High Channel: 2462	8.52	7.1

IEEE 802.11n-HT20 (Antenna Gain = 2.3dBi) (16QAM, 6.5Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	7.48	5.6
Middle Channel: 2437	7.76	6.0
High Channel: 2462	7.96	6.3

## INTERTEK TESTING SERVICES

---

---

IEEE 802.11n-HT40 (Antenna Gain = 2.3dBi) (64QAM, 13.5Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2422	6.93	4.9
Middle Channel: 2437	7.01	5.0
High Channel: 2452	7.22	5.3

Cable loss: 1.0 dB    External Attenuation: 0 dB

Cable loss, external attenuation has been included in OFFSET function

EUT max. output level = 9.46dBm  
EUT max. E.I.R.P level = 9.46dBm + 2.3dBi = 11.76dBm = 15.0mW

For RF Exposure, the information is saved with filename: analysis report.pdf.

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

### 4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 KHz according to FCC KDB 558074 D01 v04. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Limit: The 6 dB Bandwidth is at least 500 kHz.

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	10.072
2437	10.072
2462	10.072

IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	16.614
2437	16.614
2462	16.614

IEEE 802.11n-HT20 (16QAM, 6.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	17.829
2437	17.829
2462	17.829

## INTERTEK TESTING SERVICES

---



---

IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2422	36.580
2437	36.560
2452	36.507

The test plots are attached as below.

# INTERTEK TESTING SERVICES

802.11b

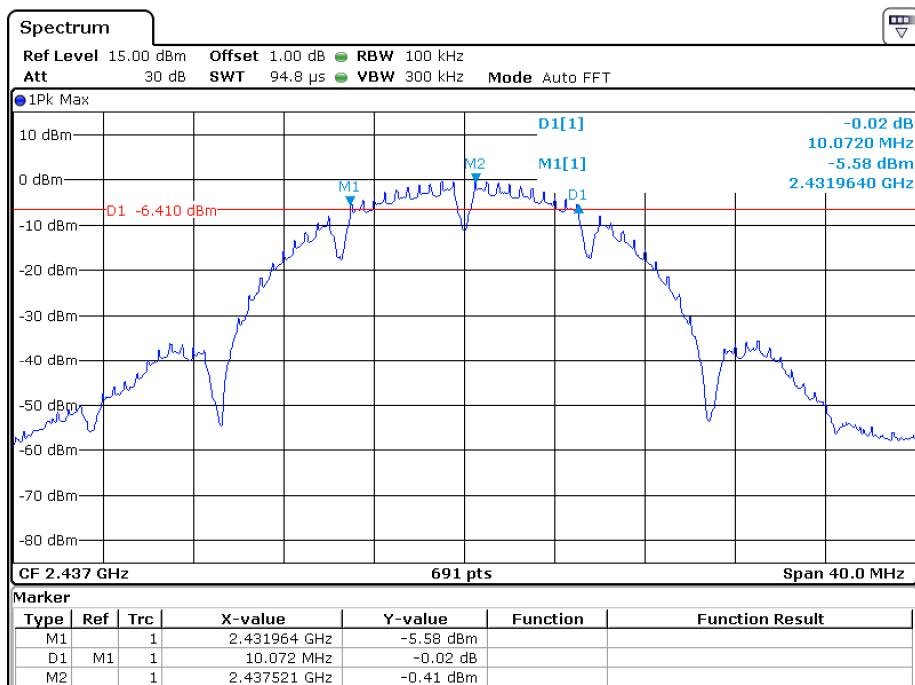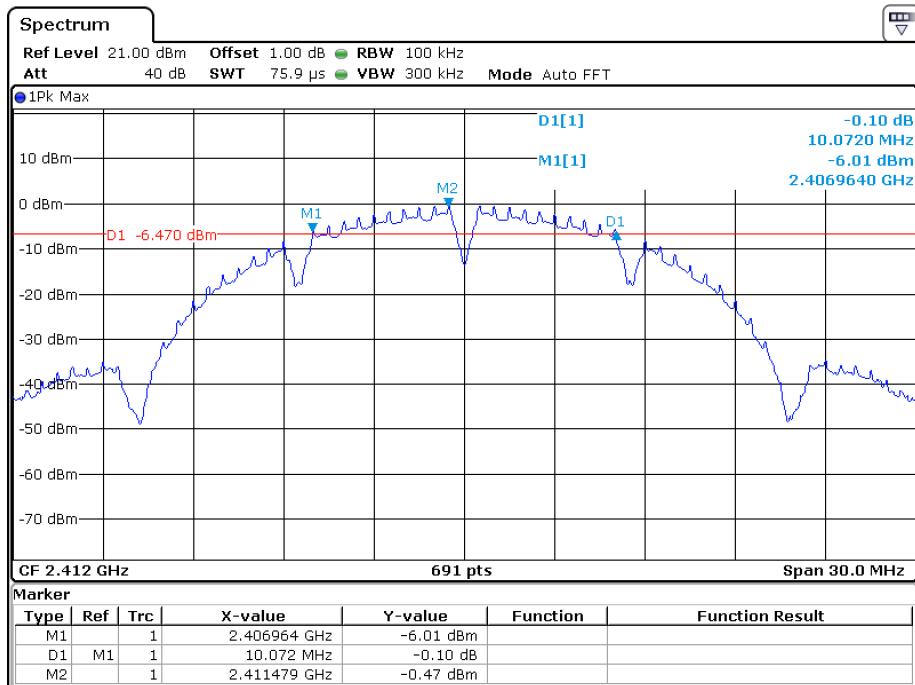


TRF no.: FCC 15C\_TX\_c

FCC ID: 2AABK-CT101W

Report No.: 171023017SZN-002



# INTERTEK TESTING SERVICES

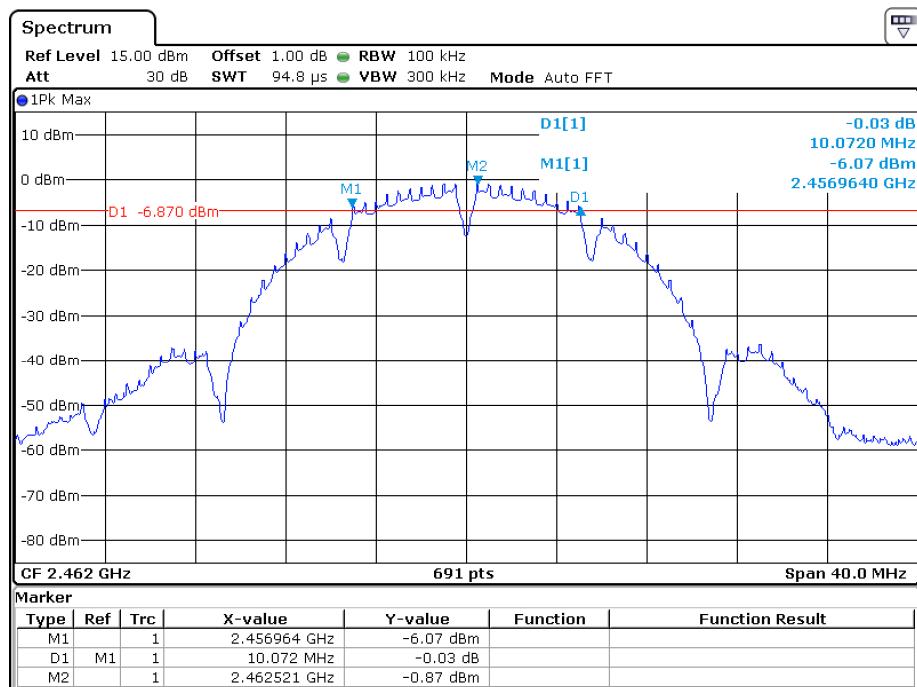

TRF no.: FCC 15C\_TX\_c  
 FCC ID: 2AABK-CT101W  
 Report No.: 171023017SZN-002

# INTERTEK TESTING SERVICES

802.11g

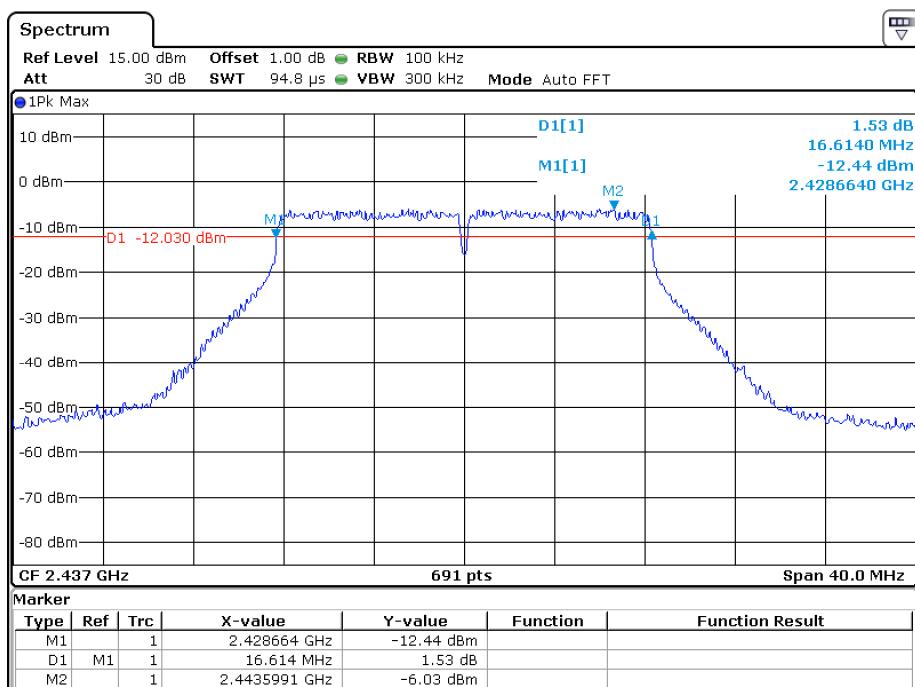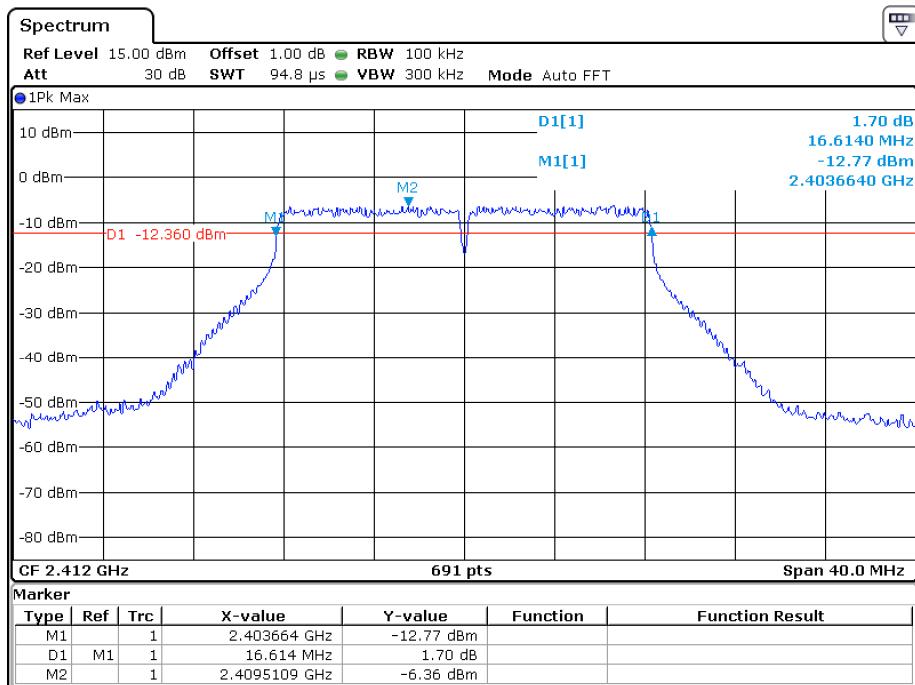


TRF no.: FCC 15C\_TX\_c

FCC ID: 2AABK-CT101W

Report No.: 171023017SZN-002



# INTERTEK TESTING SERVICES

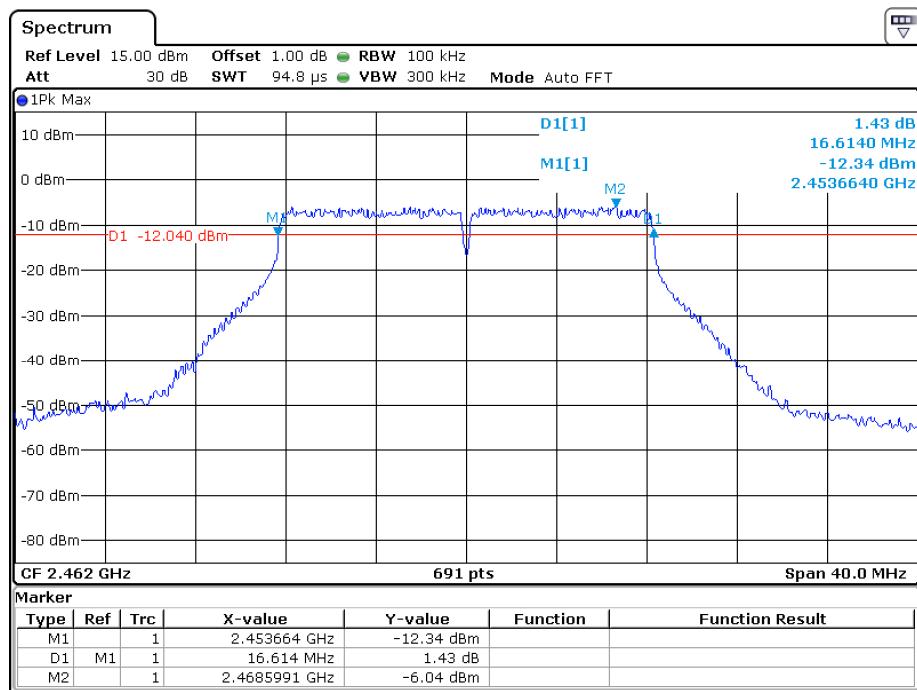

TRF no.: FCC 15C\_TX\_c  
 FCC ID: 2AABK-CT101W  
 Report No.: 171023017SZN-002

# INTERTEK TESTING SERVICES

## 802.11n-HT20

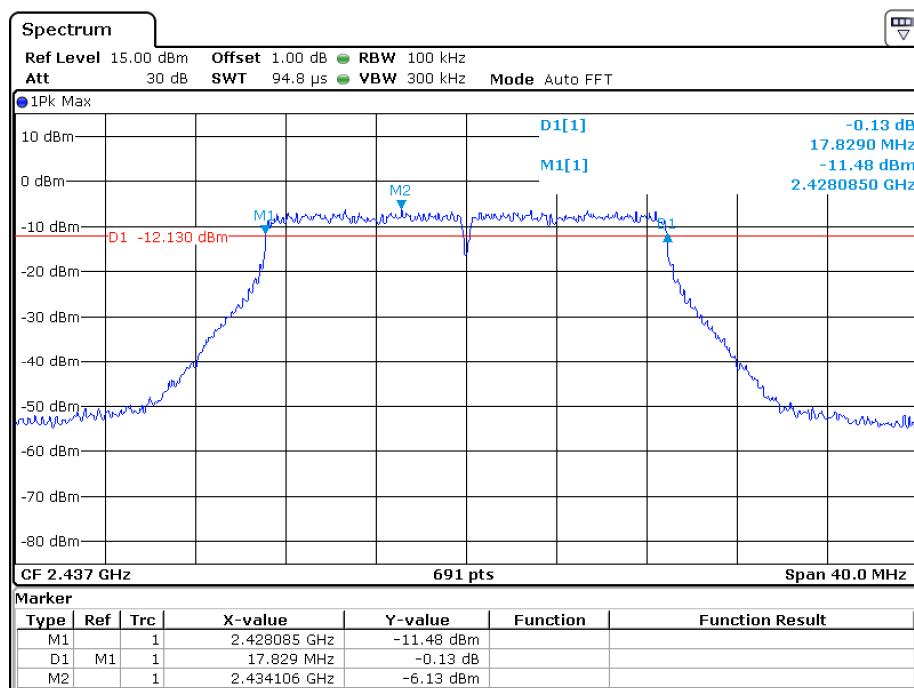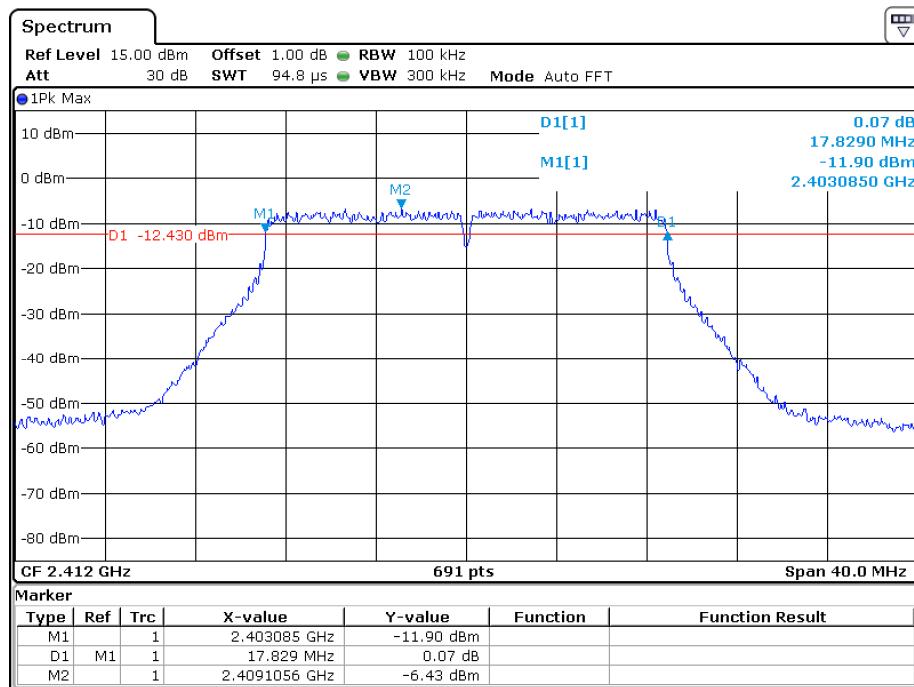


TRF no.: FCC 15C\_TX\_c

FCC ID: 2AABK-CT101W

Report No.: 171023017SZN-002



# INTERTEK TESTING SERVICES

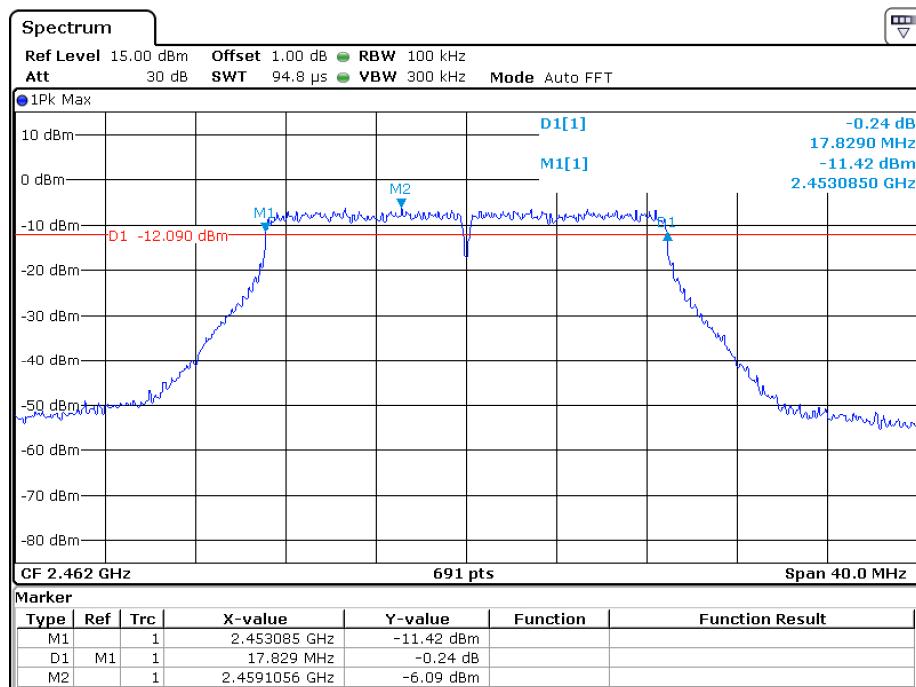

TRF no.: FCC 15C\_TX\_c  
FCC ID: 2AABK-CT101W  
Report No.: 171023017SZN-002

# INTERTEK TESTING SERVICES

## 802.11n-HT40

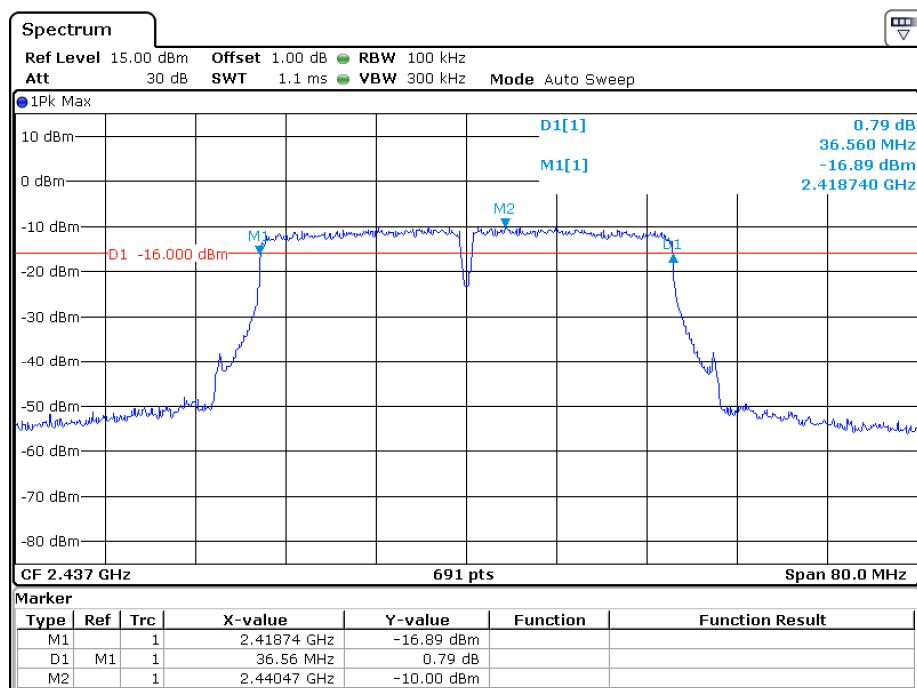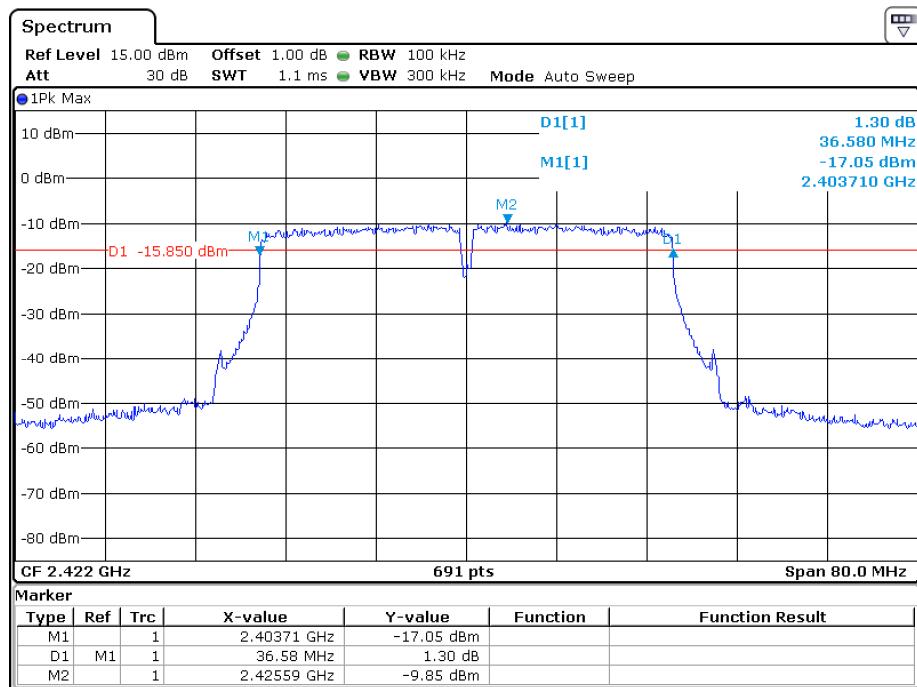


TRF no.: FCC 15C\_TX\_c

FCC ID: 2AABK-CT101W

Report No.: 171023017SZN-002

# INTERTEK TESTING SERVICES

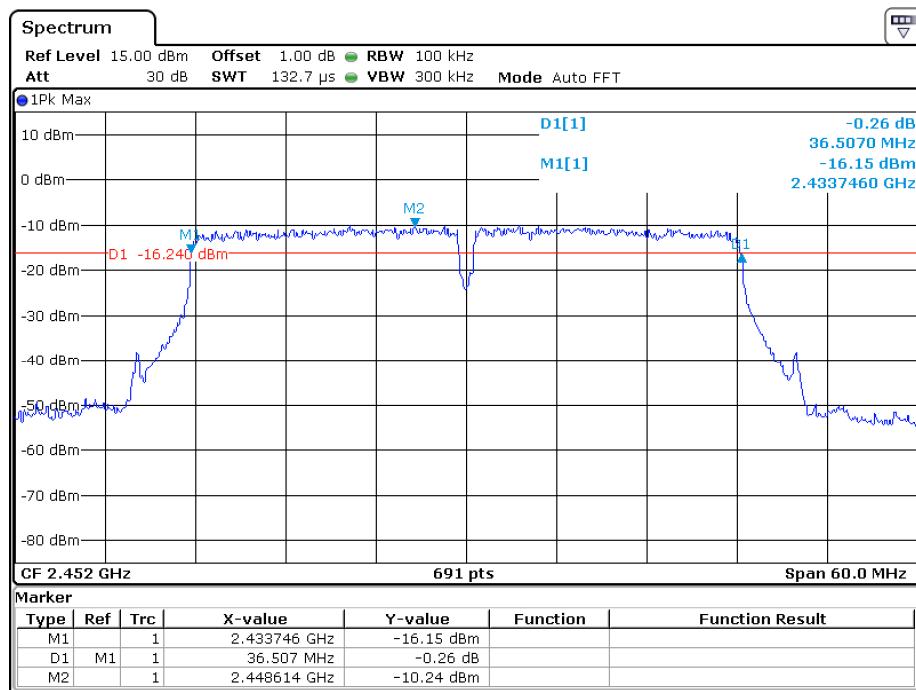

TRF no.: FCC 15C\_TX\_c  
 FCC ID: 2AABK-CT101W  
 Report No.: 171023017SZN-002

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

### 4.3 Maximum Power Density Reading, FCC Rule 15.247(e):

The Measurement Procedure PKPSD was set according to the FCC KDB 558074 D01 v04.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/3 kHz.

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-0.82
2437	-0.57
2462	-0.90

IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-6.69
2437	-6.43
2462	-6.29

IEEE 802.11n-HT20 (16QAM, 6.5Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-6.65
2437	-6.88
2462	-6.49

IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2422	-10.68
2437	-10.57
2452	-10.33

The test plots are attached as below.



TRF no.: FCC 15C\_TX\_c

FCC ID: 2AABK-CT101W

Report No.: 171023017SZN-002


# INTERTEK TESTING SERVICES

## 802.11b

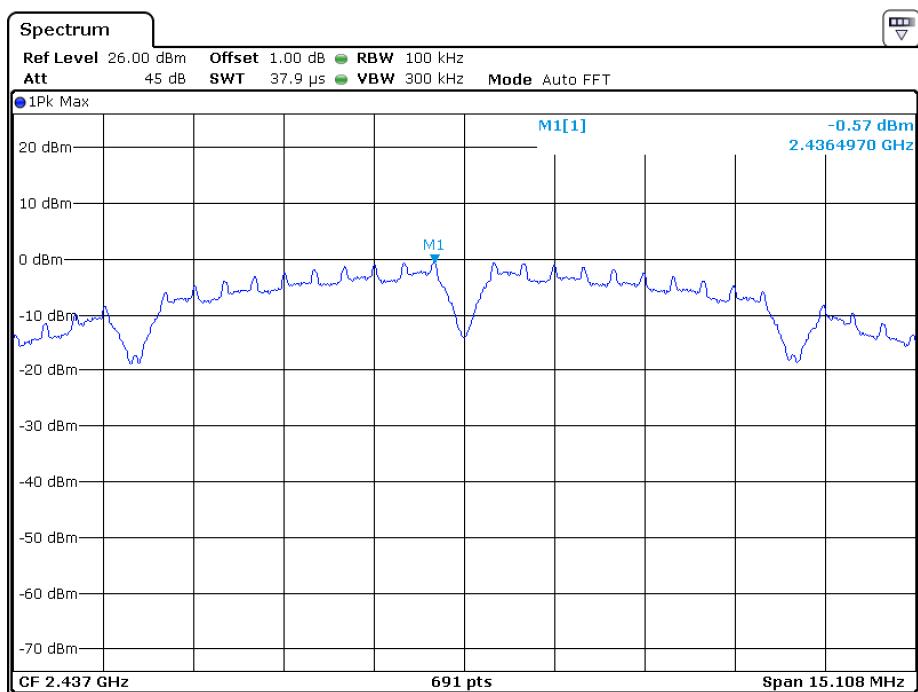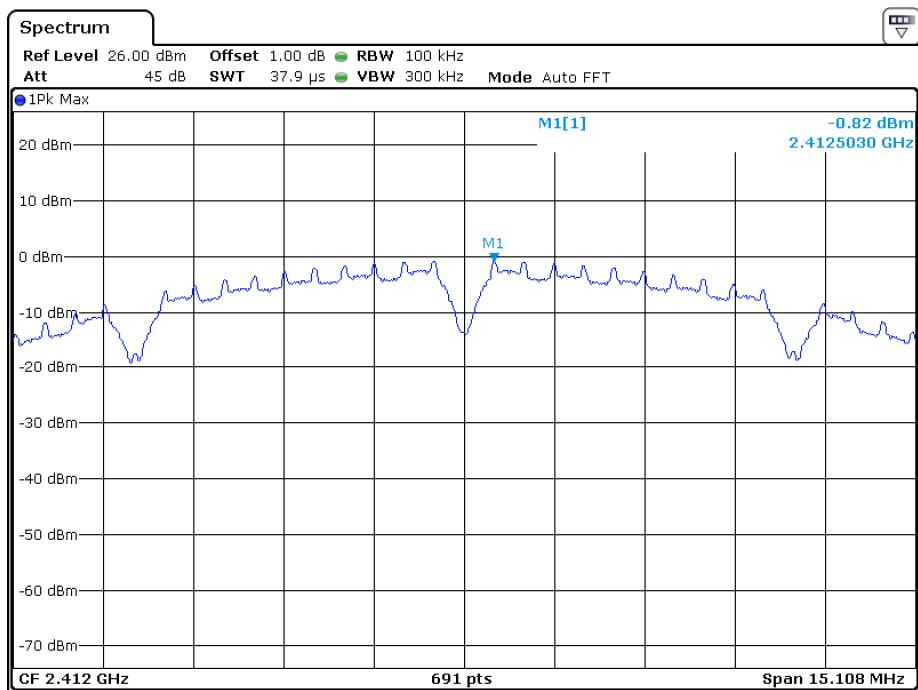

# INTERTEK TESTING SERVICES



---

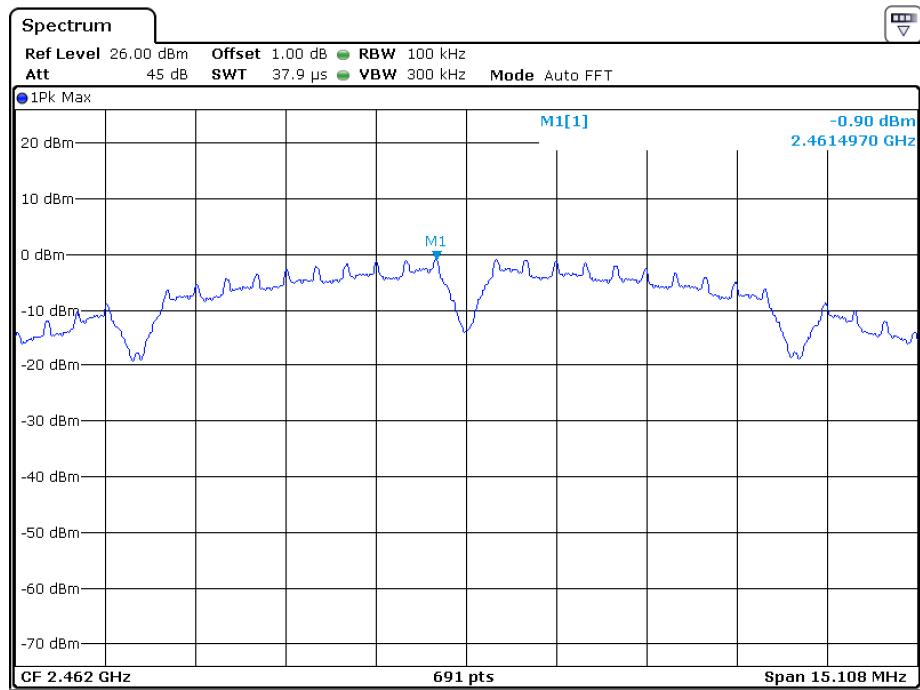

TRF no.: FCC 15C\_TX\_c  
FCC ID: 2AABK-CT101W  
Report No.: 171023017SZN-002

# INTERTEK TESTING SERVICES


802.11g

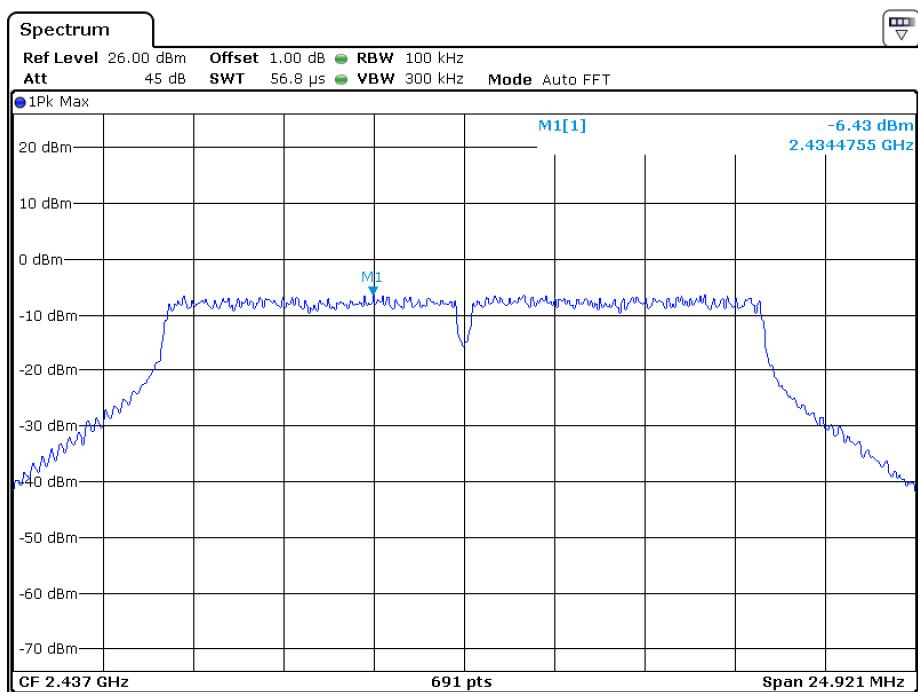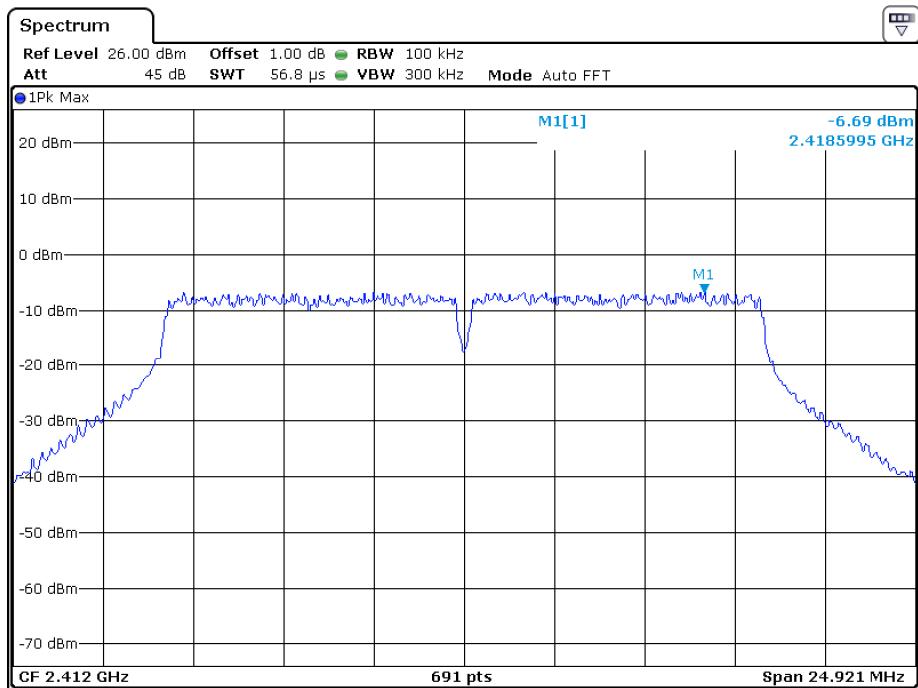

TRF no.: FCC 15C\_TX\_c  
FCC ID: 2AABK-CT101W  
Report No.: 171023017SZN-002

# INTERTEK TESTING SERVICES



---

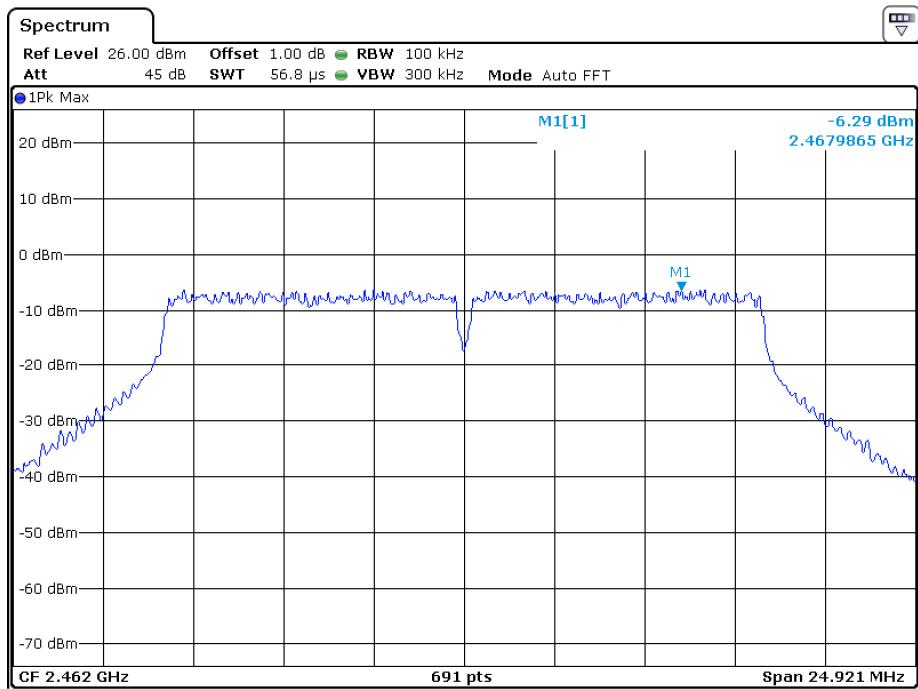

TRF no.: FCC 15C\_TX\_c  
FCC ID: 2AABK-CT101W  
Report No.: 171023017SZN-002


# INTERTEK TESTING SERVICES

## 802.11n-HT20

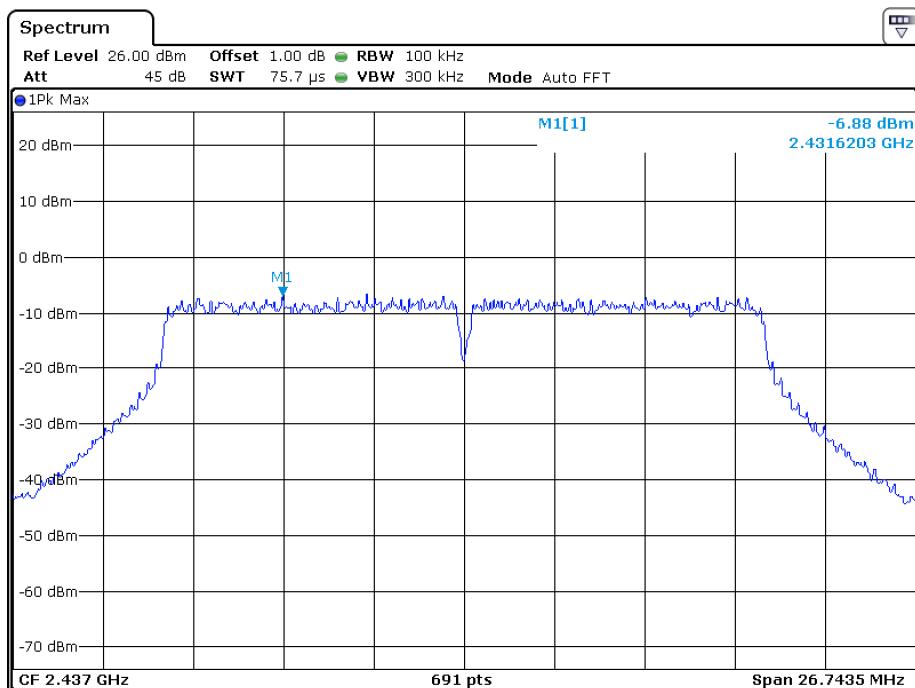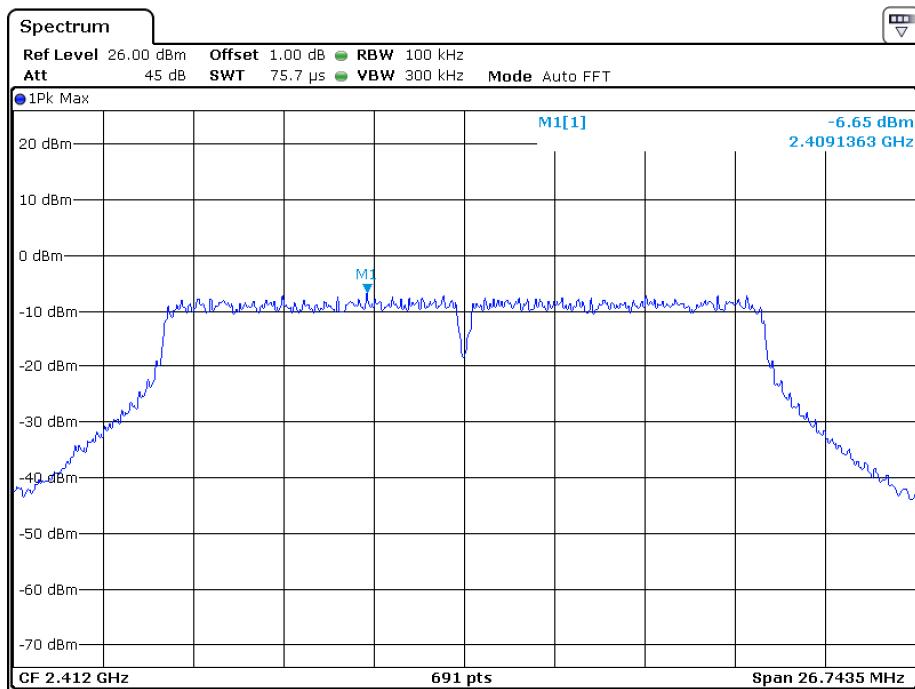

# INTERTEK TESTING SERVICES



---

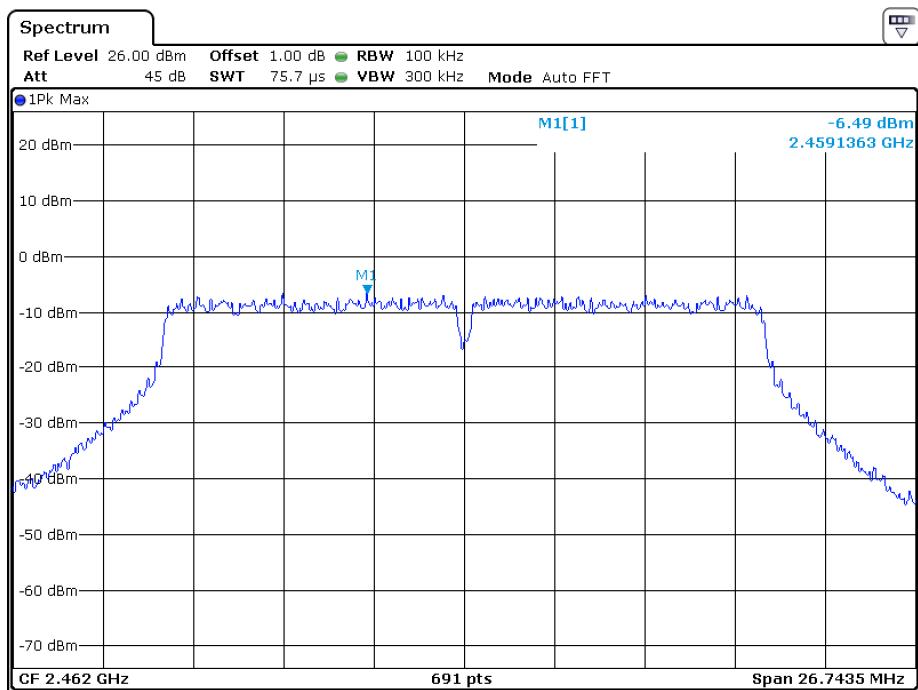

TRF no.: FCC 15C\_TX\_c  
FCC ID: 2AABK-CT101W  
Report No.: 171023017SZN-002

# INTERTEK TESTING SERVICES


## 802.11n-HT40

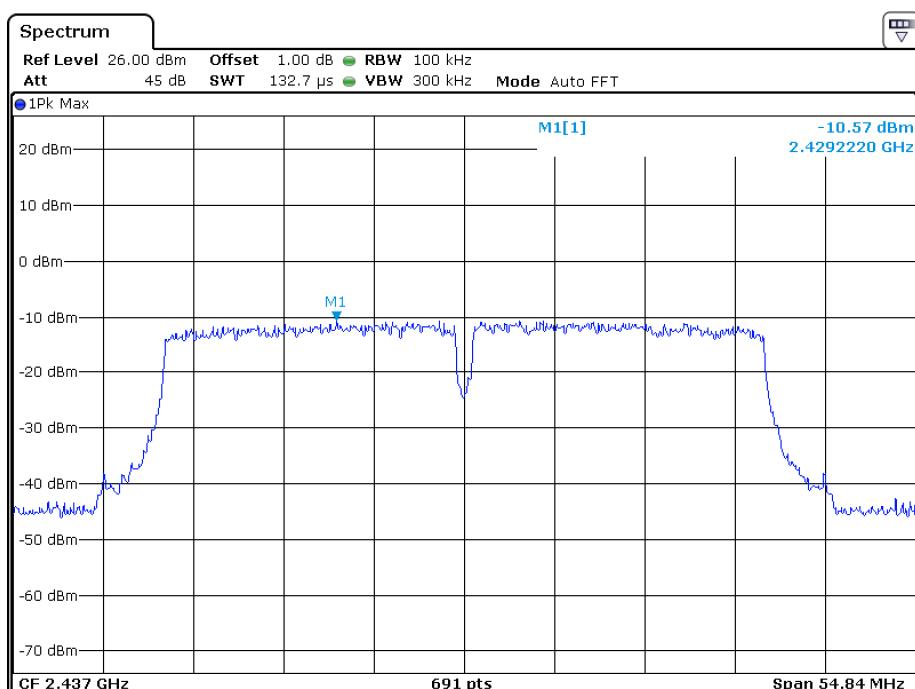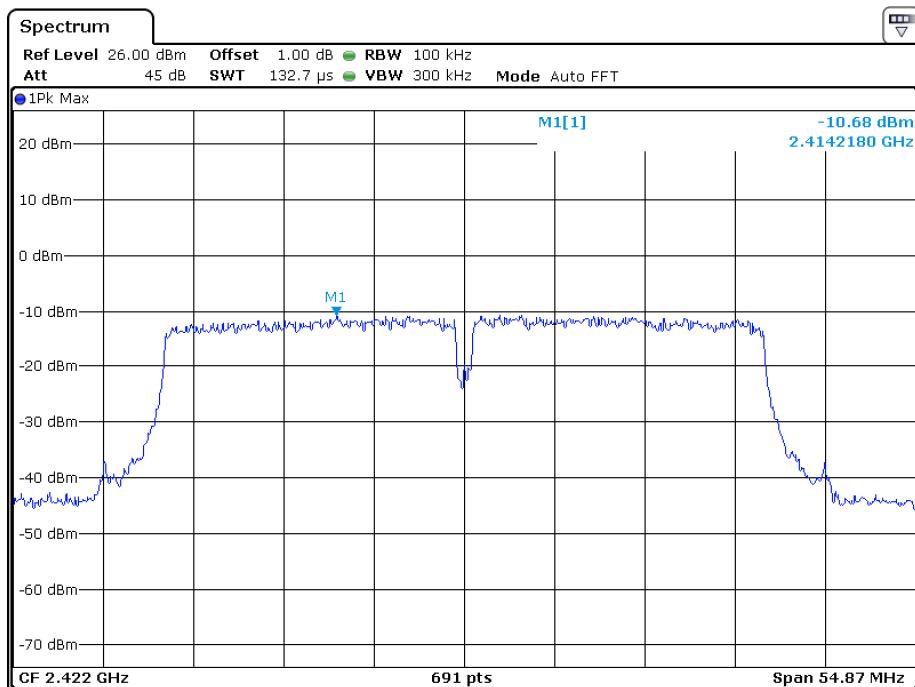

TRF no.: FCC 15C\_TX\_c  
 FCC ID: 2AABK-CT101W  
 Report No.: 171023017SZN-002

# INTERTEK TESTING SERVICES

---

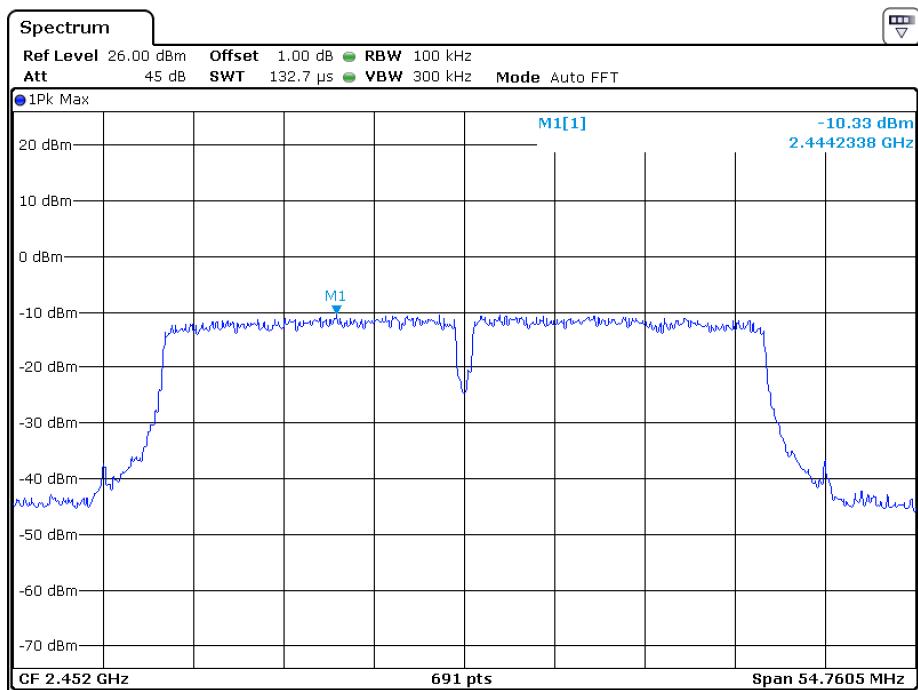

TRF no.: FCC 15C\_TX\_c  
FCC ID: 2AABK-CT101W  
Report No.: 171023017SZN-002

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

### 4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. The Measurement Procedure was set according to the FCC KDB 558074 D01 v04.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.

Refer to the attached test plots for out of band conducted emissions data with rate of 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n-HT20 and 13.5Mbps for 802.11n-HT40.

The test plots showed all spurious emission up to the tenth harmonic were measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

Please refer the graph of “Out of Band Conducted Emissions.pdf”.

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

### 4.5 Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d):

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

- Not required, since all emissions are more than 20dB below fundamental
- See attached data sheet

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

### 4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b), (c):

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

### 4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD$$

Where

FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB. The net field strength for comparison to the appropriate emission limit is 42 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m}$$

Level in mV/m = Common Antilogarithm  $[(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$

TRF no.: FCC 15C\_TX\_c

FCC ID: 2AABK-CT101W

Report No.: 171023017SZN-002

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

### 4.8 Radiated Spurious Emission

All mode had been tested, but only the worst-case is recorded in the following graph and table.

Worst Case Radiated Spurious Emission (802.11b TX-Channel 06) at 9748.000MHz is passed by 5.4dB margin.

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11b (TX-Channel 1)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	72.195	30.1	20.0	8.4	18.5	40.0	-21.5
Horizontal	119.725	29.6	20.0	18.4	28.0	43.5	-15.5
Horizontal	240.005	34.9	20.0	25.0	39.9	46.0	-6.1
Vertical	36.305	43.4	20.0	8.4	31.8	40.0	-8.2
Vertical	45.520	32.3	20.0	18.4	30.7	40.0	-9.3
Vertical	240.005	33.3	20.0	25.0	38.3	46.0	-7.7

NOTES: 1. Quasi-Peak detector is used for frequency below 1GHz.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.

## INTERTEK TESTING SERVICES

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11b (TX-Channel 01)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4824.000	51.9	36.2	32.9	48.6	74.0	-25.4
Vertical	*2379.147	49.4	36.2	27.7	40.9	74.0	-33.1

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4824.000	42.1	36.2	32.9	38.8	54.0	-15.2
Vertical	*2379.147	41.4	36.2	27.7	32.9	54.0	-21.1

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
  - \* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## INTERTEK TESTING SERVICES

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11b (TX-Channel 06)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4874.000	50.2	36.2	33.5	47.5	74.0	-26.5
Vertical	*7311.000	48.3	36.3	37.9	49.9	74.0	-24.1
Vertical	*9748.000	57.2	36.3	38.5	59.4	74.0	-14.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4874.000	36.2	36.2	33.5	33.5	54.0	-20.5
Vertical	*7311.000	35.6	36.3	37.9	37.2	54.0	-16.8
Vertical	*9748.000	46.4	36.3	38.5	48.6	54.0	-5.4

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

\* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11b (TX-Channel 11)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4924.000	51.4	36.2	33.6	48.8	74.0	-25.2
Vertical	*7386.000	48.9	36.3	38.0	50.6	74.0	-23.4
Vertical	*2492.187	50.4	36.4	27.2	41.2	74.0	-32.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4924.000	36.0	36.2	33.6	33.4	54.0	-20.6
Vertical	*7386.000	36.6	36.3	38.0	38.3	54.0	-15.7
Vertical	*2492.187	41.9	36.4	27.2	32.7	54.0	-21.3

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

\* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## INTERTEK TESTING SERVICES

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11g (TX-Channel 01)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4824.000	45.0	36.2	32.9	41.7	74.0	-32.3
Vertical	*2356.158	48.0	36.2	27.7	39.5	74.0	-34.5

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4824.000	32.7	36.2	32.9	29.4	54.0	-24.6
Vertical	*2356.158	38.2	36.2	27.7	29.7	54.0	-24.3

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
  - \* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11g (TX-Channel 06)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4874.000	49.6	36.2	33.5	46.9	74.0	-27.1
Vertical	*7311.000	46.7	36.3	37.9	48.3	74.0	-25.7
Vertical	*9748.000	55.7	36.3	38.5	57.9	74.0	-16.1

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4874.000	35.6	36.2	33.5	32.9	54.0	-21.1
Vertical	*7311.000	35.2	36.3	37.9	36.8	54.0	-17.2
Vertical	*9748.000	44.1	36.8	38.5	45.8	54.0	-8.2

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

\* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11g (TX-Channel 11)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4924.000	50.1	36.2	33.6	47.5	74.0	-26.5
Horizontal	*7386.000	50.7	36.3	38.0	52.4	74.0	-21.6
Horizontal	*2489.537	52.0	36.4	27.2	42.8	74.0	-31.2

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4924.000	37.4	36.2	33.6	34.8	54.0	-19.2
Horizontal	*7386.000	35.8	36.3	38.0	37.5	54.0	-16.5
Horizontal	*2489.537	42.9	36.4	27.2	33.7	54.0	-20.3

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

\* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11n-HT20 (TX-Channel 01)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4824.000	44.5	36.2	32.9	41.2	74.0	-32.8
Horizontal	*2356.158	46.6	36.2	27.7	38.1	74.0	-35.9

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4824.000	31.9	36.2	32.9	28.6	54.0	-25.4
Horizontal	*2356.158	42.2	36.2	27.7	33.7	54.0	-20.3

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

\* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## INTERTEK TESTING SERVICES

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11n-HT20 (TX-Channel 06)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4874.000	47.9	36.2	33.5	45.2	74.0	-28.8
Vertical	*7311.000	47.8	36.3	37.9	49.4	74.0	-24.6
Vertical	*9748.000	53.9	36.3	38.5	56.1	74.0	-17.9

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	*4874.000	34.0	36.2	33.5	31.3	54.0	-22.7
Vertical	*7311.000	38.4	36.3	37.9	40.0	54.0	-14.0
Vertical	*9748.000	44.4	36.8	38.5	46.1	54.0	-7.9

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
  - \* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## INTERTEK TESTING SERVICES

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11n-HT20 (TX-Channel 11)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4924.000	49.1	36.2	33.6	46.5	74.0	-27.5
Horizontal	*7386.000	50.2	36.3	38.0	51.9	74.0	-22.1
Horizontal	*2485.873	51.1	36.4	27.2	41.9	74.0	-32.1

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4924.000	35.1	36.2	33.6	32.5	54.0	-21.5
Horizontal	*7386.000	42.1	36.3	38.0	43.8	54.0	-10.2
Horizontal	*2485.873	42.9	36.4	27.2	33.7	54.0	-20.3

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

\* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## INTERTEK TESTING SERVICES

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11n-HT40 (TX-Channel 03)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4844.000	46.1	36.2	32.6	42.5	74.0	-31.5
Horizontal	*2337.297	46.4	36.7	28.2	37.9	74.0	-36.1

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4844.000	33.3	36.2	32.6	29.7	54.0	-24.3
Horizontal	*2337.297	40.0	36.7	28.2	31.5	54.0	-22.5

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
  - \* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11n-HT40 (TX-Channel 06)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4874.000	45.4	36.2	33.5	42.7	74.0	-31.3
Horizontal	*7311.000	44.6	36.3	37.9	46.2	74.0	-27.8
Horizontal	*9748.000	52.1	36.8	38.5	53.8	74.0	-20.2

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4874.000	33.2	36.2	33.5	30.5	54.0	-23.5
Horizontal	*7311.000	32.2	36.3	37.9	33.8	54.0	-20.2
Horizontal	*9748.000	43.2	36.8	38.5	44.9	54.0	-9.1

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
  - \* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11n-HT40 (TX-Channel 09)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4904.000	46.9	36.2	33.5	44.2	74.0	-29.8
Horizontal	*7356.000	49.3	36.3	37.7	50.7	74.0	-23.3
Horizontal	*2495.716	52.1	36.4	27.2	42.9	74.0	-31.1

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	*4904.000	35.6	36.2	33.5	32.9	54.0	-21.1
Horizontal	*7356.000	35.3	36.3	37.7	36.7	54.0	-17.3
Horizontal	*2495.716	41.9	36.4	27.2	32.7	54.0	-21.3

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

\* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

## **INTERTEK TESTING SERVICES**

---

### **4.9 Conducted Emission**

Worst Case Conducted emission at 0.614MHz is Passed by 13.4dB margin

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

# INTERTEK TESTING SERVICES

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.


Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11b (TX-Channel 1)

Line: Live

## Conducted Emission Test - FCC

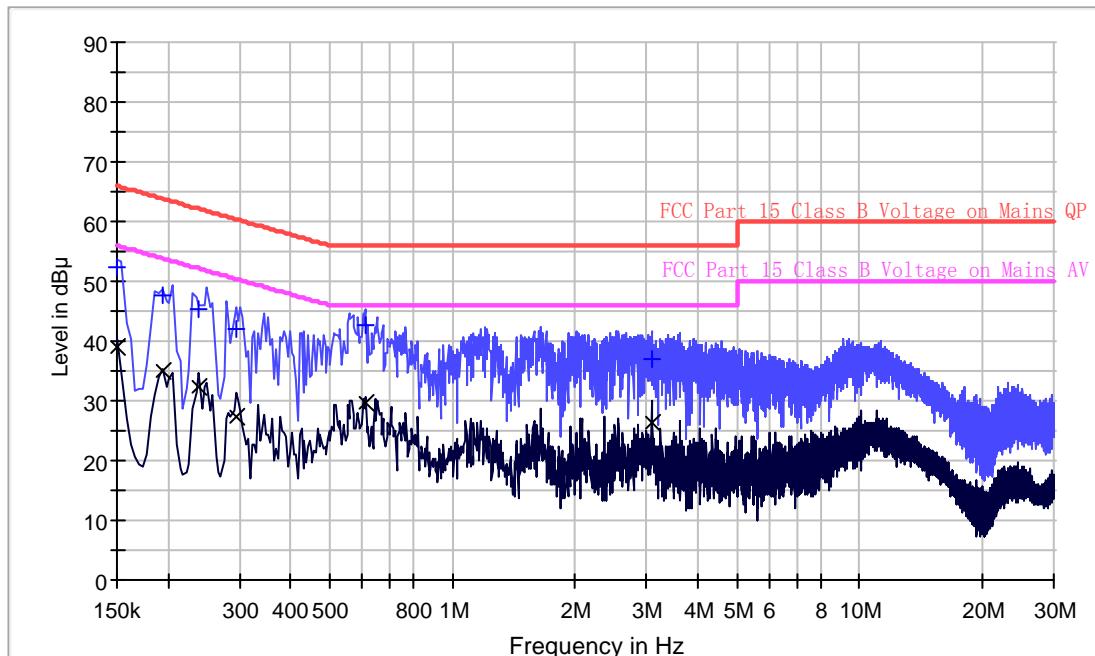

### Result Table QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	52.3	L1	9.6	13.7	66.0
0.194000	47.5	L1	9.7	16.4	63.9
0.238000	45.4	L1	9.7	16.8	62.2
0.294000	42.2	L1	9.7	18.2	60.4
0.614000	42.6	L1	9.7	13.4	56.0
3.078000	37.1	L1	9.8	18.9	56.0

### Result Table AV

Frequency (MHz)	Average (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	39.0	L1	9.6	17.0	56.0
0.194000	34.9	L1	9.7	19.0	53.9
0.238000	32.5	L1	9.7	19.7	52.2
0.294000	27.4	L1	9.7	23.0	50.4
0.614000	29.6	L1	9.7	16.4	46.0
3.078000	26.5	L1	9.8	19.5	46.0

TRF no.: FCC 15C\_TX\_c

FCC ID: 2AABK-CT101W

Report No.: 171023017SZN-002

## INTERTEK TESTING SERVICES

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.


Date of Test: October 31, 2017

Model: CT101W

Worst Case Operating Mode: 802.11b (TX-Channel 1)

Line: Neutral

### Conducted Emission Test - FCC

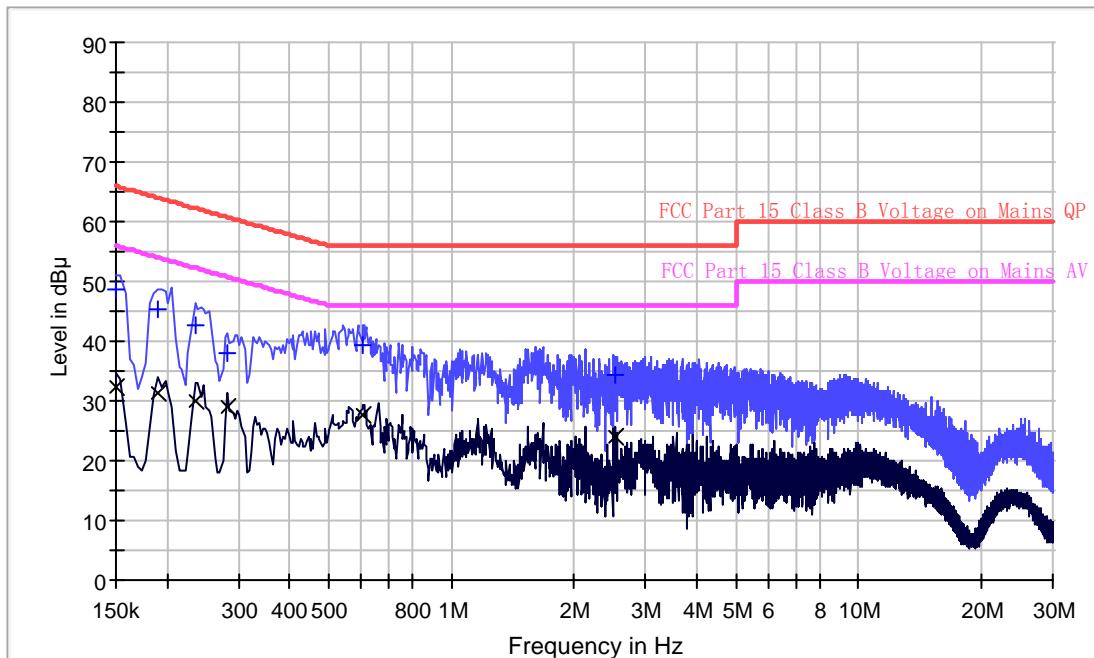

### Result Table QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	48.7	N	9.6	17.3	66.0
0.190000	45.4	N	9.7	18.6	64.0
0.234000	42.8	N	9.7	19.5	62.3
0.282000	37.9	N	9.7	22.9	60.8
0.606000	39.4	N	9.7	16.6	56.0
2.514000	34.5	N	9.7	21.5	56.0

### Result Table AV

Frequency (MHz)	Average (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	32.5	N	9.6	23.5	56.0
0.190000	31.2	N	9.7	22.8	54.0
0.234000	29.9	N	9.7	22.4	52.3
0.282000	29.0	N	9.7	21.8	50.8
0.606000	27.8	N	9.7	18.2	46.0
2.514000	24.1	N	9.7	21.9	46.0

TRF no.: FCC 15C\_TX\_c

FCC ID: 2AABK-CT101W

Report No.: 171023017SZN-002

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

### 4.10 Radiated Emissions from Digital Section of Transceiver, FCC Ref: 15.109

- [ ] Not required - No digital part
- [ ] Test results are attached
- [ x ] Included in the separated report.

## INTERTEK TESTING SERVICES

---

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.

Date of Test: October 31, 2017

Model: CT101W

### 4.11 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for Transmitter timing
	See Transmitter timing diagram provided by manufacturer
x	Not applicable, duty cycle was not used.

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 5**

### **EQUIPMENT PHOTOGRAPHS**

## INTERTEK TESTING SERVICES

---

---

### 5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 6**

#### **PRODUCT LABELLING**

## INTERTEK TESTING SERVICES

---

### 6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 7**

### **TECHNICAL SPECIFICATIONS**

## INTERTEK TESTING SERVICES

---

### 7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

# **INTERTEK TESTING SERVICES**

---

---

## **EXHIBIT 8**

## **INSTRUCTION MANUAL**

## **INTERTEK TESTING SERVICES**

---

---

### **8.0 Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 9**

#### **CONFIDENTIALITY REQUEST**

## INTERTEK TESTING SERVICES

---

---

### 9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 10**

#### **MISCELLANEOUS INFORMATION**

## INTERTEK TESTING SERVICES

---

---

### 10.0 Discussion of Pulse Desensitization

The determination of pulse desensitivity was made in accordance with Hewlett Packard Application Note 150-2, *Spectrum Analysis ... Pulsed RF*.

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 11**

### **TEST EQUIPMENT LIST**

## INTERTEK TESTING SERVICES

---

### 11.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ182-02	RF Power Meter	Anritsu	ML2496A	1302005	1-Jun-2017	1-Jun-2018
SZ182-02-01	Power Sensor	Anritsu	MA2411B	1207429	1-Jun-2017	1-Jun-2018
SZ185-01	EMI Receiver	R&S	ESCI	100547	9-Feb-2017	9-Feb-2018
SZ061-08	Horn Antenna	ETS	3115	00092346	20-Sep-2017	20-Sep-2018
SZ061-04	BiConiLog Antenna	ETS	3142C	00078828	17-Oct-2017	17-Oct-2018
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	26-May-2017	26-May-2018
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	1-Jun-2017	1-Jun-2018
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	7-Jul-2017	7-Jul-2018
SZ181-04	Preamplifier	Agilent	8449B	3008A024 74	9-Feb-2017	9-Feb-2018
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	16-Jan-2017	16-Jan-2019
SZ062-02	RF Cable	RADIALL	RG 213U	--	30-Jun-2017	30-Dec-2017
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	11-Sep-2017	11-Mar-2018
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	11-Sep-2017	11-Mar-2018
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	14-Jun-2017	14-Jun-2018
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	20-Oct-2017	20-Oct-2018
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	20-Oct-2017	20-Oct-2018
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2019