

FCC - TEST REPORT

Report Number : **60/790.13.015.01** Date of Issue: 20th May 2013
(Version 2.0)

Model : **ID638**

Product Type : **2 in 1 Waterproof Bluetooth Speaker + Handset**

Applicant : **Diffany Development Co., Ltd.**

Address : **G1, 13/F, World Tech Centre, 95 How Ming St, Kwun Tong, Kowloon, Hong Kong**

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : 50

TÜV SÜD Hong Kong Ltd. is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Hong Kong Ltd. reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Hong Kong Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Hong Kong Ltd. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

1. Table of Contents

1. Table of Contents	2
2. Details about the Test Laboratory	3
3. Description of the Equipment Under Test	4
4. Summary of Test Standards	5
5. Summary of Test Results.....	6
6. General Remarks.....	7
7. Technical Requirement.....	8
7.1 Conducted Emission Test 150kHz – 30MHz.....	8
7.2 Conducted peak output power	11
7.3 Band edge Measurement.....	14
7.4 Spurious RF conducted emissions.....	24
7.5 Spurious radiated emissions	29
7.6 20 dB bandwidth	34
7.7 Carrier Frequency Separation	39
7.8 Number of hopping frequencies	42
7.9 Dwell Time	45
8. System Measurement Uncertainty.....	50

2. Details about the Test Laboratory

Details about the Test Laboratory

Test site 1:

Company name: TÜV SÜD HONG KONG LTD.
3/F, West Wing, Lakeside 2,
10 Science Park West Avenue,
Science Park, Shatin
HK.

Telephone: 852 2776 1323

Fax: 852 2776 1372

Test site 2:

Company name: TMC-Telecommunication Metrology Center of M.I.I.T
No. 52 Hua Yuanbei Road, Haidian District, Beijing, P.R.China

3. Description of the Equipment Under Test

Description of the Equipment Under Test

Product: 2 in 1 Waterproof Bluetooth Speaker + Handset

Model no.: ID638

Serial number: NIL

Options and accessories: USB cable

Rated Voltage: 3.7VDC rechargeable battery

Rated Current: NIL

Rated Power: NIL

Frequency: NIL

Modulation type: GFSK, $\pi/4$ -DQPSK and 8DPSK

Antenna gain: 0 dBi

RF Transmission
Frequency: 2402MHz-2480MHz

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
--	--	--	--

4. Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C, Intentional Radiators, 10-1-12 Edition	PART 15 – RADIO FREQUENCY DEVICES Subpart C – Intentional Radiators

All the test methods were according to Public Notice DA 00-705 -Frequency Hopper Spread Spectrum Test Procedure released by FCC on March 30, 2000.

5. Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C					
Test Condition	Pages	Test site	Test Result		
			Pass	Fail	N/A
15.207 Conducted Emission AC Power Port	8	Site 2	☒	☐	☐
15.247 (b) (1) Conducted peak output power	11	Site 2	☒	☐	☐
15.247(d) band edge compliance of RF radiated emission	14	Site 2	☒	☐	☐
15.247(d) Spurious RF conducted emissions	24	Site 2	☒	☐	☐
15.247(d) 15.209 Spurious radiated emissions	29	Site 2	☒	☐	☐
15.247(a)(1) 20dB bandwidth	34	Site 2	☒	☐	☐
15.247(a)(1) Carrier frequency separation	39	Site 2	☒	☐	☐
15.247(a)(1)(iii) Number of hopping frequencies	42	Site 2	☒	☐	☐
15.247(a)(1)(iii) Dwell Time	45	Site 2	☒	☐	☐

6. General Remarks

Remarks

This submittal(s) (test report) intended for FCC ID: 2AABR-ID638 complies with Section 15.209, 15.247 of the FCC Part 15, Subpart C Rules.

All the configurations of the product were tested and only the worst test results listed in the report.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 24th April 2013

Testing Start Date: 24th April 2013

Testing End Date: 08th May 2013

- TÜV SÜD HONG KONG LTD. -

Reviewed by:

Edmond FUNG



Prepared by:

Sam WONG

7. Technical Requirement

7.1 Conducted Emission Test 150kHz – 30MHz

Date of test : 07th May 2013

Test requirement : FCC 47CFR Part 15.207

Operating mode : Transmitter with battery charging


Tested on : Adaptor AC Mains, Live

Remarks : NIL

Test Result

☒ Passed

☐ Not Passed

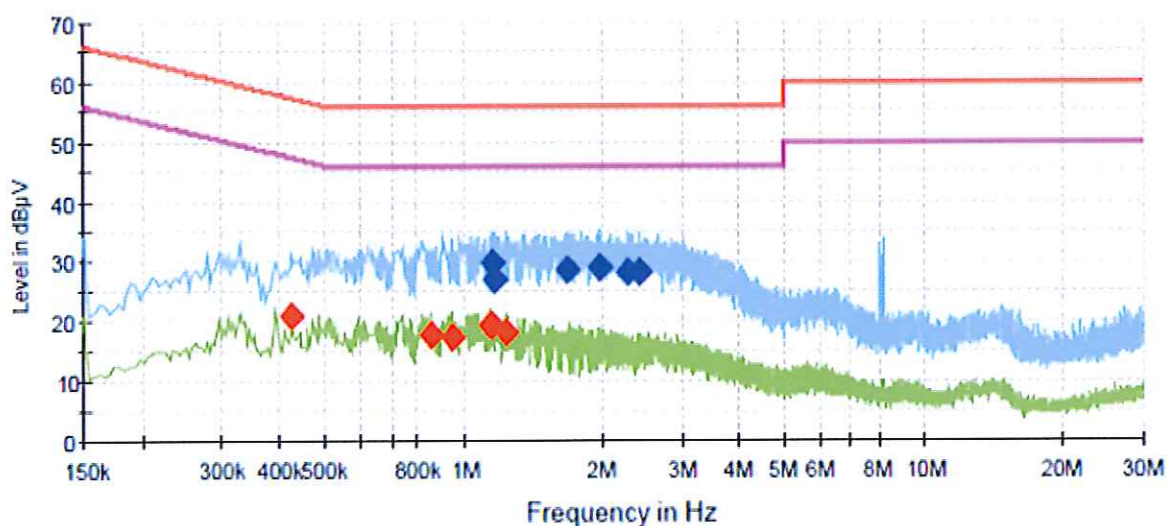

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1.162000	29.8	56.0	-26.2	QP
1.170000	27.1	56.0	-28.9	QP
1.674000	28.5	56.0	-27.5	QP
1.986000	28.8	56.0	-27.2	QP
2.274000	28.1	56.0	-27.9	QP
2.414000	28.2	56.0	-27.8	QP

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
0.426000	20.7	47.3	-26.6	AV
0.854000	17.6	46.0	-28.4	AV
0.946000	17.3	46.0	-28.7	AV
1.146000	19.1	46.0	-26.9	AV
1.162000	19.1	46.0	-26.9	AV
1.246000	18.3	46.0	-27.7	AV

Conducted Emission Test 150kHz – 30MHz

Date of test : 07th May 2013

Test requirement : FCC 47CFR Part 15.207

Operating mode : Transmitter with battery charging


Tested on : Adaptor AC Mains, Neutral

Remarks : NIL

Test Result

☒ Passed

☐ Not Passed

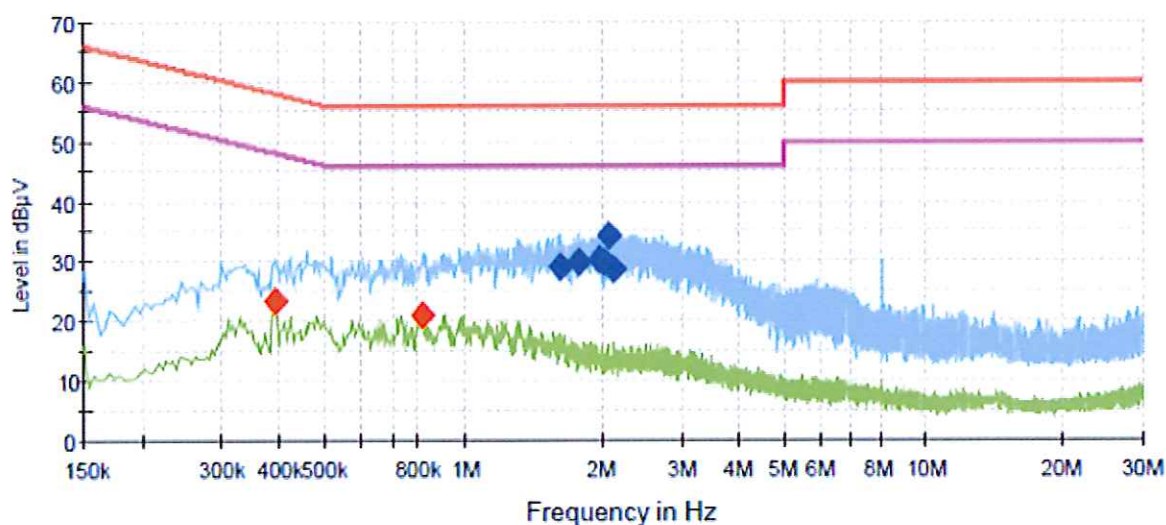

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1.630000	29.0	56.0	-27.0	QP
1.774000	29.7	56.0	-26.3	QP
1.982000	30.1	56.0	-25.9	QP
2.026000	29.7	56.0	-26.3	QP
2.062000	34.2	56.0	-21.8	QP
2.130000	28.7	56.0	-27.3	QP

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
0.390000	23.2	48.1	-24.9	AV
0.810000	21.0	46.0	-25.0	AV

Test Equipment List**Conducted Emission Test**

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Aug. 05, 2013
2	LISN	R&S	ENV216	101113	Aug. 05, 2013
4	50Ω Terminator	N/A	N/A	N/A	Jul. 01, 2013
5	Test Cable	N/A	C01	N/A	Jul. 01, 2013
6	EMI Test Receiver	R&S	ESCI	100920	Aug. 04, 2013

7.2 Conducted peak output power

Test Method

The transmitter output connected to the Spectrum analyzer and set to the peak power detection.

Limits for conducted peak output power measurements

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1.0	≤ 30.0

Conducted peak output power

Date of test : 07th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009

Remarks : All the configurations of the product were tested and only the worst test (AC/DC adaptor powered) results listed in the report.

Test Result

☒ Passed

☐ Not Passed

Type	Channel		
	2402MHz	2441MHz	2480MHz
GFSK	2.56dBm	2.48dBm	2.10dBm
$\pi/4$ -DQPSK	1.90dBm	1.79dBm	1.20dBm
8DPSK	2.07dBm	2.00dBm	1.37dBm

Conducted peak output power**Test Equipment**

DESCRIPTION	Type No.	Serial No.	Calibrated until
Antenna	VULB9163	9163 330	2014.02.24
Antenna	3164-05	85724	2014.02.17
Loop Antenna	6512	29604	2013.09.24
Spectrum Analyzer	FSP 40	100378	2013.12.22
EMI Test Receiver	ESCI	100701	2013.08.03
Spectrum Analyzer	FSV40	100903	2014.01.26
Test Cable	SUCOFLEX 104	MY2320/4	2014.02.17
Amplifier	150A250	326446	2014.03.17

7.3 Band edge Measurement

Test Method

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW and VBW to 1MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW and VBW to 100kHz, to measure the conducted peak band edge.

Limits

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Frequency MHz	Limit Average dBuV/m	Limit Peak dBuV/m
Below 2390 Above 2483.5	54	74

Band edge Measurement

Date of test : 07th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Remarks : The EUT has been tested under all modulation modes, only the worst case (GFSK - AC/DC adaptor powered) modulation test result are listed in the report.

Test Result

☒ Passed

☐ Not Passed

Conducted measurement – Hopping off

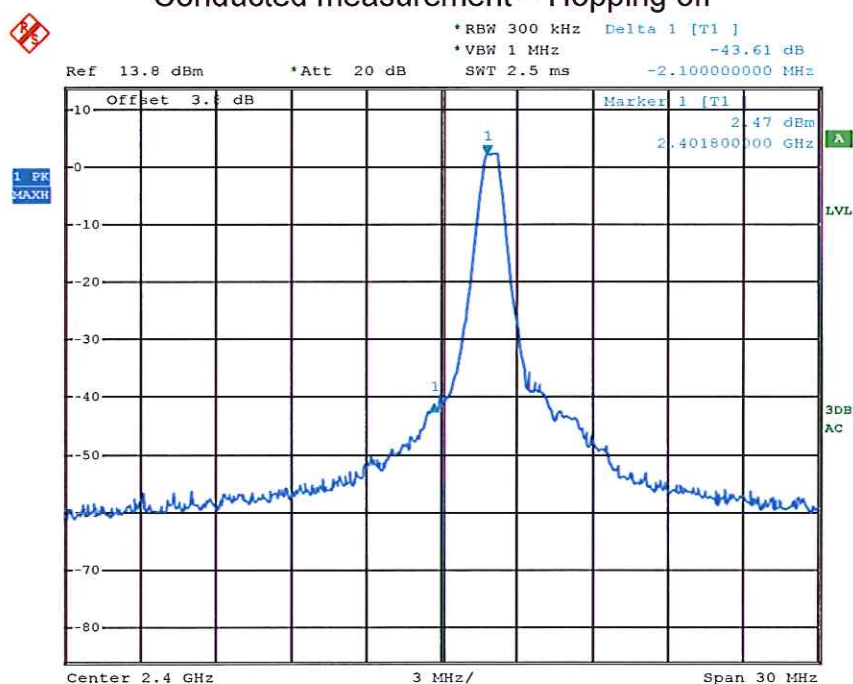

Frequency (MHz)	Reading (dBm)	Limit (-20dBc)	Margin (dB)
2399.700	-43.61	-22.47	-21.14
2400.000	-40.16	-22.47	-17.69
2401.800	2.47	-	-

Band edge Measurement

Date of test : 07th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Remarks : The EUT has been tested under all modulation modes, only the worst case (GFSK - AC/DC adaptor powered) modulation test result are listed in the report.

Test Result

☒ Passed

☐ Not Passed

Conducted measurement – Hopping on

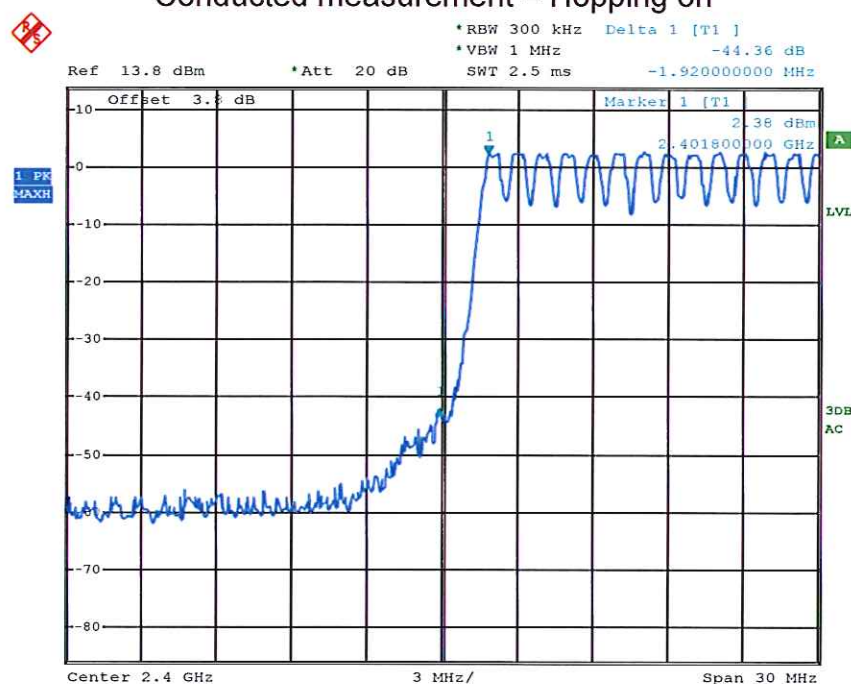

Frequency (MHz)	Reading (dBm)	Limit (-20dBc)	Margin (dB)
2400.000	-46.74	-22.38	-24.36
2402.160	2.38	-	-

Band edge Measurement

Date of test : 08th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Remarks : The EUT has been tested under all modulation modes, only the worst case (GFSK - AC/DC adaptor powered) modulation test result are listed in the report.

Test Result

☒ Passed

☐ Not Passed

Conducted measurement – Hopping off

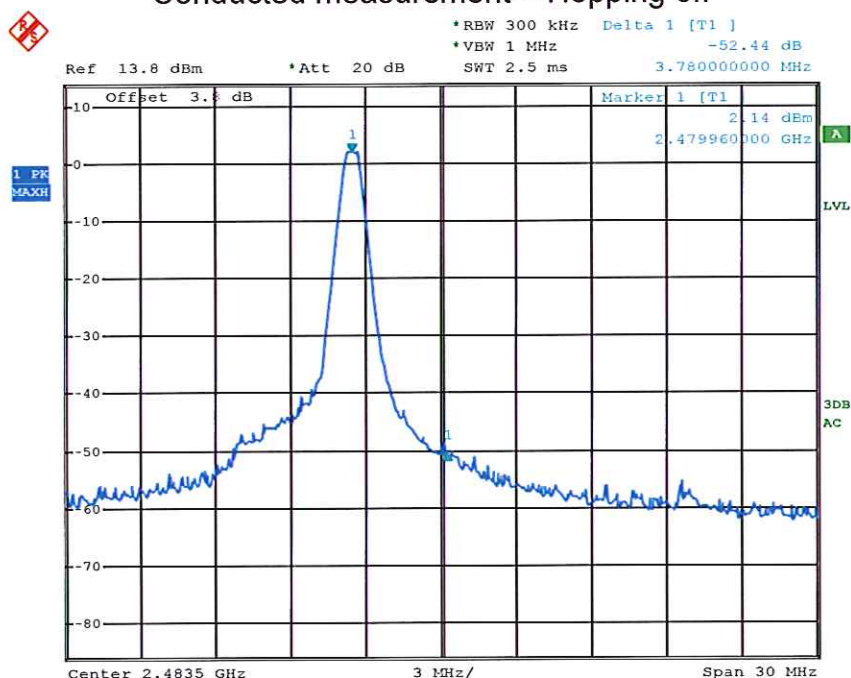

Frequency (MHz)	Reading (dBm)	Limit (-20dBc)	Margin (dB)
2479.960	2.14	-	-
2483.500	-52.44	-22.14	-30.30

Band edge Measurement

Date of test : 08th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Remarks : The EUT has been tested under all modulation modes, only the worst case (GFSK - AC/DC adaptor powered) modulation test result are listed in the report.

Test Result

☒ Passed

☐ Not Passed

Conducted measurement – Hopping on

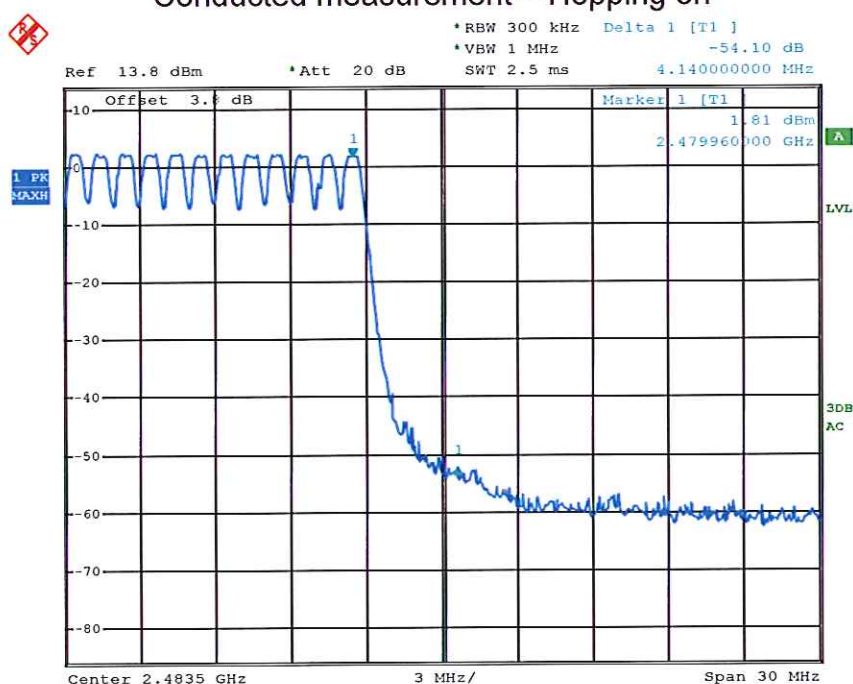

Frequency (MHz)	Reading (dBm)	Limit (-20dBc)	Margin (dB)
2479.960	1.81	-	-
2483.500	-50.10	-21.81	-28.29

Band edge Measurement

Date of test : 08th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Remarks : The EUT has been tested under all modulation modes, only the worst case (GFSK - AC/DC adaptor powered) modulation test result are listed in the report.

Test Result

☒ Passed

☐ Not Passed

Radiated measurement – Hopping off

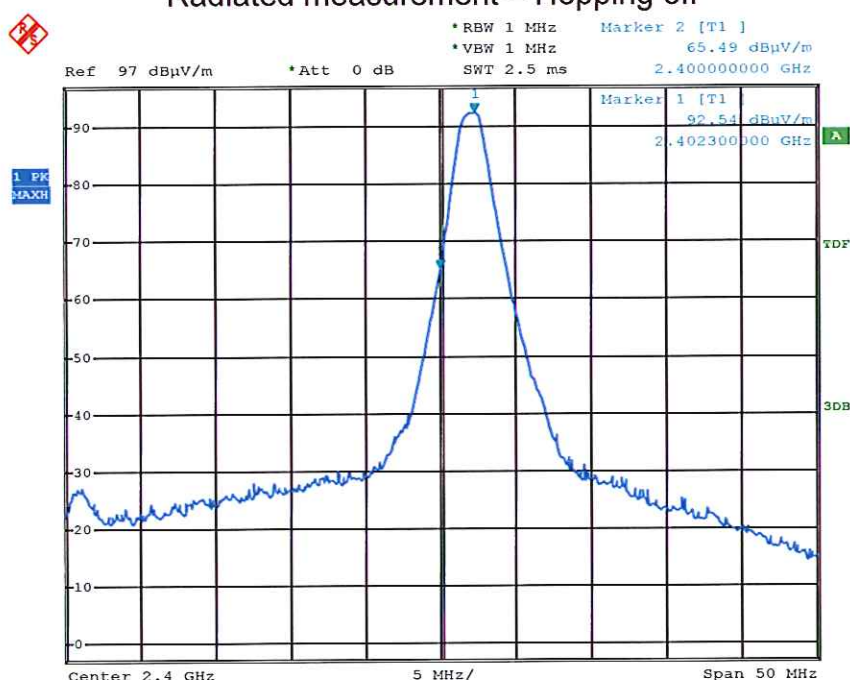

Frequency (MHz)	Reading (dBμV)	Corr. (dB/m)	Reading (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
2400.000	63.63	1.86	65.49	74.0	-8.51	Peak
2400.000	49.03	1.86	50.89	54.0	-3.11	Average

Band edge Measurement

Date of test : 08th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Remarks : The EUT has been tested under all modulation modes, only the worst case (GFSK - AC/DC adaptor powered) modulation test result are listed in the report.

Test Result

☒ Passed

☐ Not Passed

Radiated measurement – Hopping on

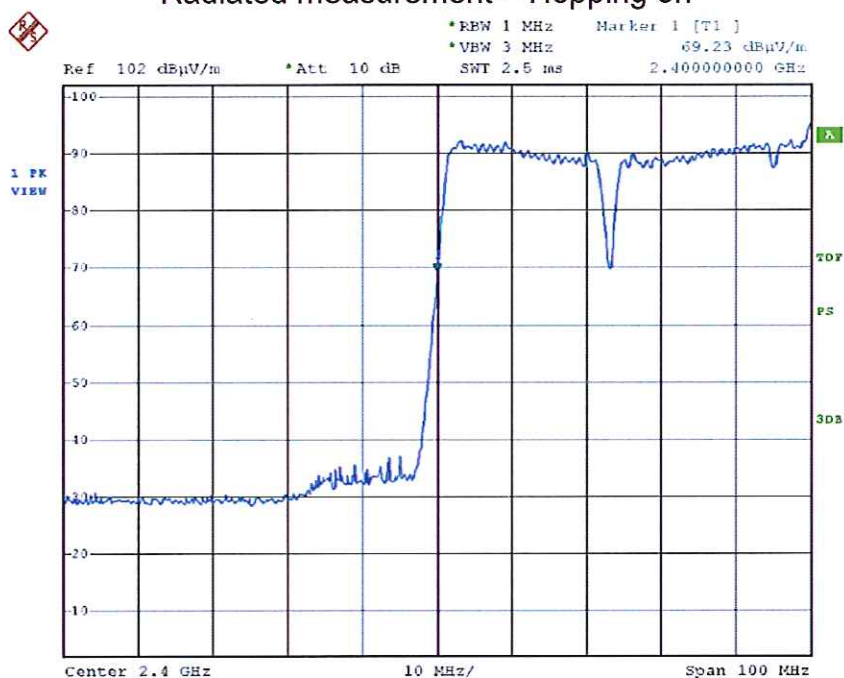

Frequency (MHz)	Reading (dBμV)	Corr. (dB/m)	Reading (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
2400.000	67.37	1.86	69.23	74.0	-4.77	Peak
2400.000	49.05	1.86	50.91	54.0	-3.09	Average

Band edge Measurement

Date of test : 08th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Remarks : The EUT has been tested under all modulation modes, only the worst case (GFSK - AC/DC adaptor powered) modulation test result are listed in the report.

Test Result

☒ Passed

☐ Not Passed

Radiated measurement - Hopping off

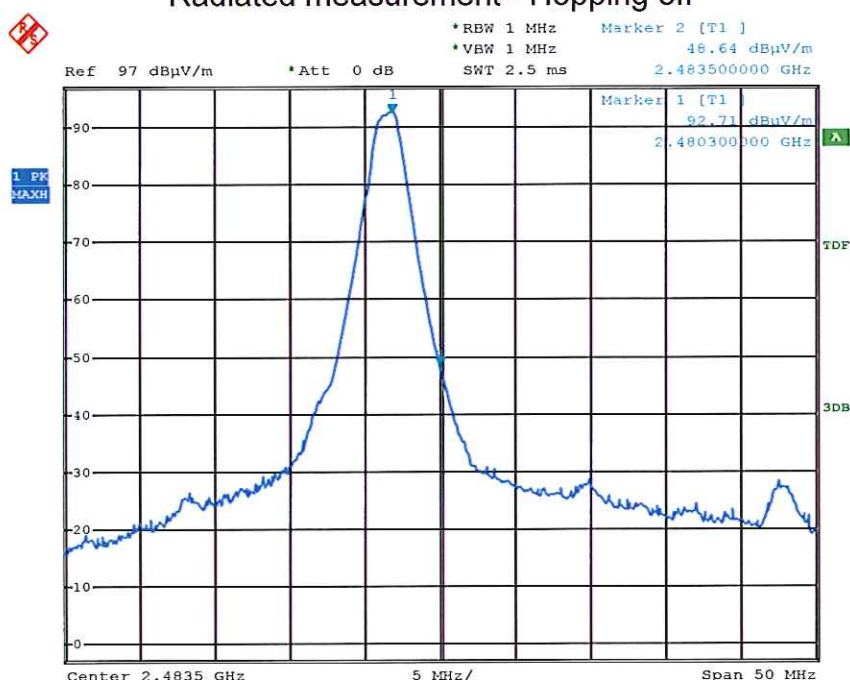

Frequency (MHz)	Reading (dBμV)	Corr. (dB/m)	Reading (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
2483.500	52.68	-4.04	48.64	74.0	-25.36	Peak
2483.500	43.54	-4.04	39.50	54.0	-14.50	Average

Band edge Measurement

Date of test : 08th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Remarks : The EUT has been tested under all modulation modes, only the worst case (GFSK - AC/DC adaptor powered) modulation test result are listed in the report.

Test Result

☒ Passed

☐ Not Passed

Radiated measurement - Hopping on

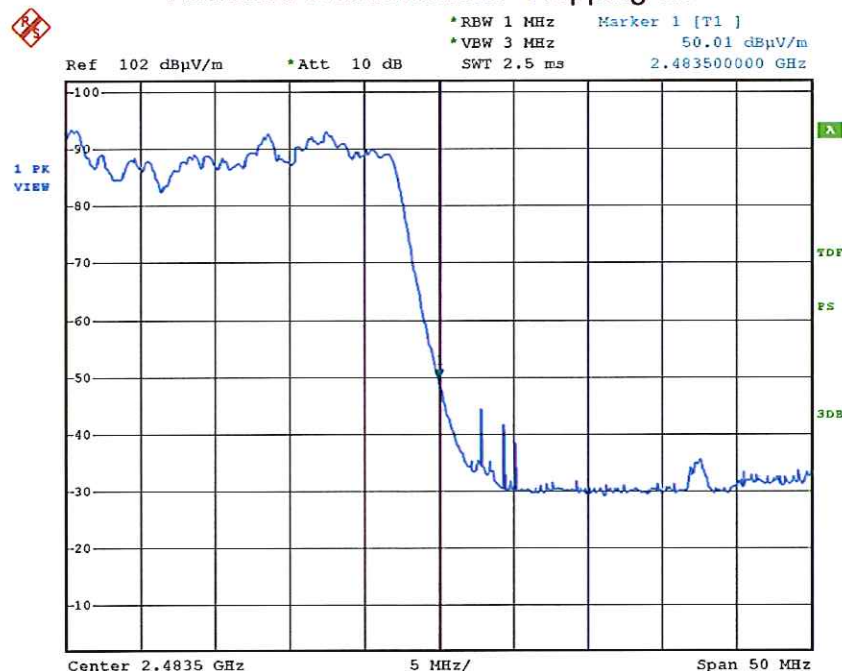

Frequency (MHz)	Reading (dBμV)	Corr. (dB/m)	Reading (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
2483.500	54.05	-4.04	50.01	74.0	-23.99	Peak
2483.500	45.72	-4.04	41.68	54.0	-12.32	Average

Band edge Measurement**Test Equipment List**

DESCRIPTION	Type No.	Serial No.	Calibrated until
Antenna	VULB9163	9163 330	2014.02.24
Antenna	3164-05	85724	2014.02.17
Loop Antenna	6512	29604	2013.09.24
Spectrum Analyzer	FSP 40	100378	2013.12.22
EMI Test Receiver	ESCI	100701	2013.08.03
Spectrum Analyzer	FSV40	100903	2014.01.26
Test Cable	SUCOFLEX 104	MY2320/4	2014.02.17
Amplifier	150A250	326446	2014.03.17

7.4 Spurious RF conducted emissions

Test Method

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The resolution bandwidth(RBW) and the video bandwidth (VBW) of the spectrum analyzer were respectively set to 100kHz and 100kHz.

Limit

Frequency Range MHz	Limit (dBc)
1000-25000	-20

Spurious RF conducted emissions

Date of test : 08th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Channel : 2402MHz

Remark : All the configurations of the product were tested and only the worst test results (GFSK, Hopping off - AC/DC adaptor powered) listed in the report.

Test Result

☒ Passed

☐ Not Passed

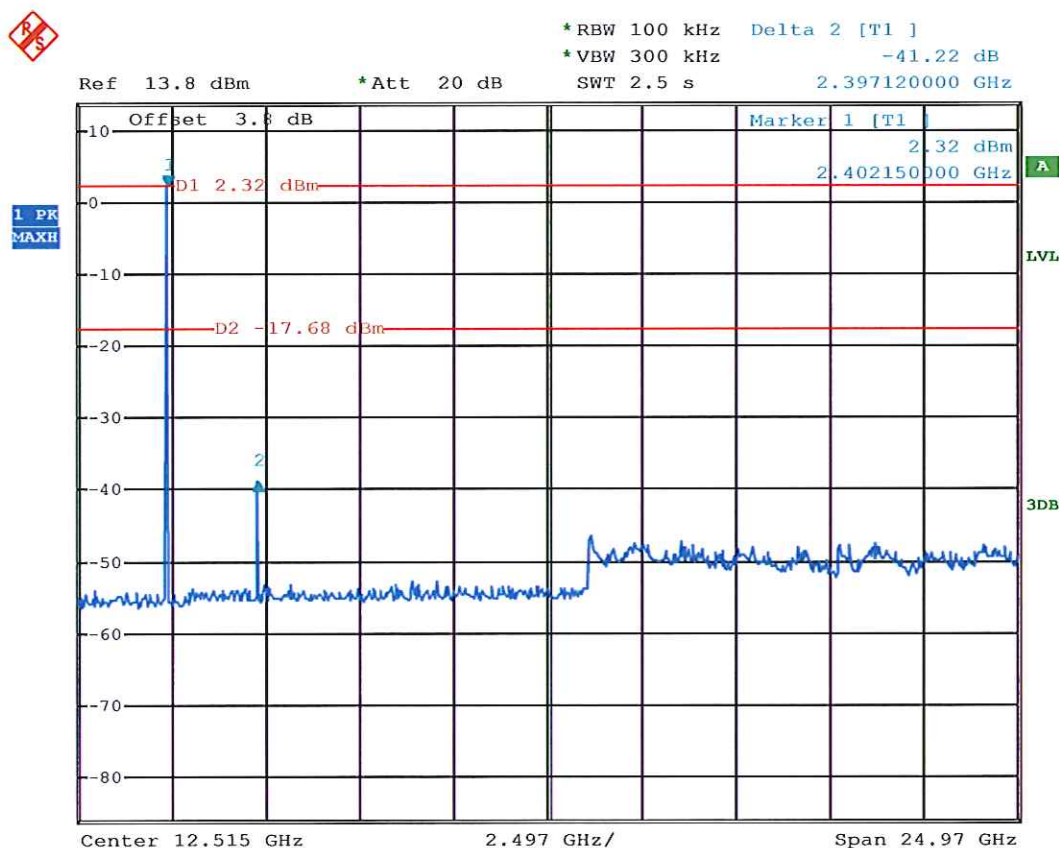

Spurious RF conducted emissions

Date of test : 08th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Channel : 2441MHz

Remark : All the configurations of the product were tested and only the worst test results (GFSK, Hopping off - AC/DC adaptor powered) listed in the report.

Test Result

☒ Passed

☐ Not Passed

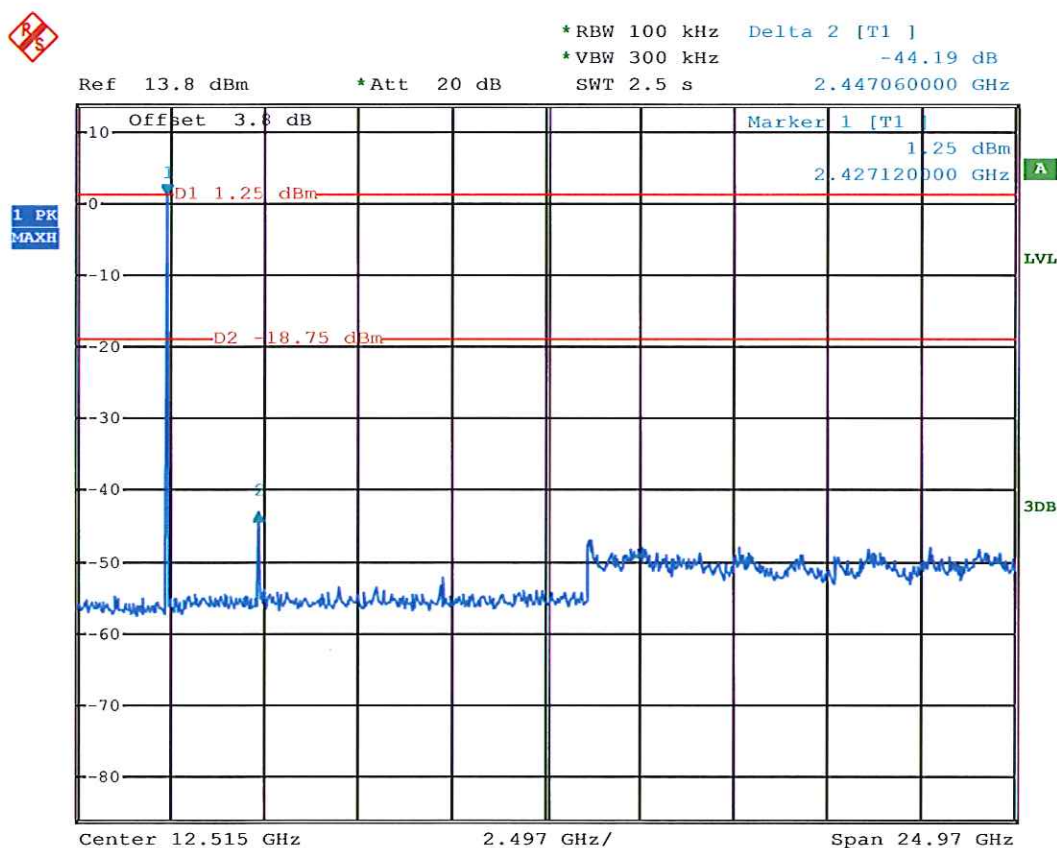

Spurious RF conducted emissions

Date of test : 08th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Channel : 2480MHz

Remark : All the configurations of the product were tested and only the worst test results (GFSK, Hopping off - AC/DC adaptor powered) listed in the report.

Test Result

☒ Passed

☐ Not Passed

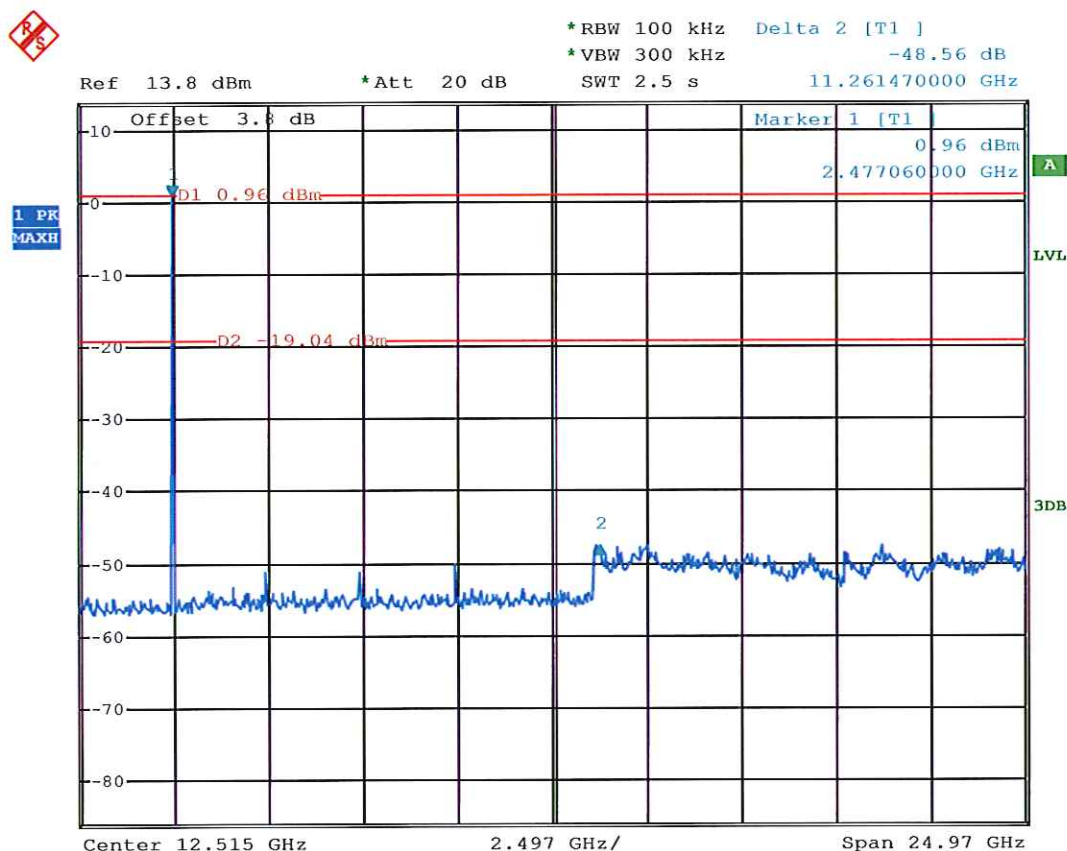

Test Equipment List

DESCRIPTION	Type No.	Serial No.	Calibrated until
Antenna	VULB9163	9163 330	2014.02.24
Antenna	3164-05	85724	2014.02.17
Loop Antenna	6512	29604	2013.09.24
Spectrum Analyzer	FSP 40	100378	2013.12.22
EMI Test Receiver	ESCI	100701	2013.08.03
Spectrum Analyzer	FSV40	100903	2014.01.26
Test Cable	SUCOFLEX 104	MY2320/4	2014.02.17
Amplifier	150A250	326446	2014.03.17

7.5 Spurious radiated emissions

Test Method

- 1 The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2 The turntable shall be rotated for 360 degrees to determine the position of maximum emission level
- 3 EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4 Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5 Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Limit

Frequency MHz	Field Strength uV/m	Field Strength dBμV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions

Date of test : 08th May 2013

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009

Operating mode : Transmitter mode

Frequency : 2402MHz

Remark : All the configurations of the product were tested and only the worst test results (GFSK, Hopping off - AC/DC adaptor powered) listed in the report.

Test Result

☒ Passed

☐ Not Passed

Frequency (MHz)	Polarity (H/V)	Read Level (dBμV)	Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
102.200	V	39.06	-17.41	21.65	43.50	-21.85	QP
*171.900	H	40.39	-15.57	24.82	43.50	-18.68	QP
*1035.000	V	61.94	-13.39	48.55	74.00	-25.45	PK
*1035.000	V	42.45	-13.39	29.06	54.00	-24.94	Ave.
*1354.000	V	60.78	-11.56	49.22	74.00	-24.78	PK
*1354.000	V	40.15	-11.56	28.59	54.00	-25.41	Ave.
2402.000	H	95.86	1.86	97.72	/	/	PK
2402.000	H	72.15	1.86	74.01	/	/	Ave.
*4804.000	H	67.05	0.19	67.24	74.00	-6.76	PK
*4804.000	H	45.66	0.19	45.85	54.00	-8.15	Ave.
7206.000	V	56.39	6.62	63.01	74.00	-10.99	PK
7206.000	V	40.73	6.62	47.35	54.00	-6.65	Ave.

“*” means the emission(s) appear within the restricted bands shall follow the requirement of section 15.205.