

FCC Test Report

Report No. : 1818C50132712501

Applicant : Aputure Imaging Industries Co., Ltd.

Address : 3rd Floor, Building 21, Longjun industrial estate, Longhua, Bao'an, Shenzhen, P.R.China

Product Name : amaran Video Light

Report Date : 2025-09-22

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	8
1.4. Operation channel list	8
1.5. Description of Test Modes	8
1.6. Measurement Uncertainty	9
1.7. Additional Instructions	9
1.8. Test Summary	10
1.9. Description of Test Facility	10
1.10. Disclaimer	11
1.11. Test Equipment List	12
2. Antenna requirement	14
2.1. Conclusion	14
3. Conducted Emission at AC power line	15
3.1. EUT Operation	15
3.2. Test Setup	15
3.3. Test Data	16
4. 6dB Bandwidth	24
4.1. EUT Operation	24
4.2. Test Setup	24
4.3. Test Data	24
5. Maximum Conducted Output Power	25
5.1. EUT Operation	25
5.2. Test Setup	25
5.3. Test Data	25
6. Power Spectral Density	26
6.1. EUT Operation	26
6.2. Test Setup	26
6.3. Test Data	26
7. Emissions in non-restricted frequency bands	27
7.1. EUT Operation	27
7.2. Test Setup	27
7.3. Test Data	27
8. Band edge emissions (Radiated)	28
8.1. EUT Operation	28
8.2. Test Setup	28
8.3. Test Data	29
9. Emissions in restricted frequency bands (below 1GHz)	31
9.1. EUT Operation	31
9.2. Test Setup	32

9.3. Test Data33

10. Emissions in restricted frequency bands (above 1GHz).....41

10.1. EUT Operation41

10.2. Test Setup41

10.3. Test Data42

APPENDIX I -- TEST SETUP PHOTOGRAPH54

APPENDIX II -- EXTERNAL PHOTOGRAPH54

APPENDIX III -- INTERNAL PHOTOGRAPH.....54

TEST REPORT

Applicant : Aputure Imaging Industries Co., Ltd.
Manufacturer : Aputure Imaging Industries Co., Ltd.
Product Name : amaran Video Light
Model No. : amaran Ray 120c, amaran Ray 60c
Trade Mark : amaran
Rating(s) : amaran Ray 120c input:
DC IN: 24V=6.25A, Max150W
USB-C IN: 12V=5A, Max 60W, 20V=5A, Max 100W, 28V=5A, Max 140W
amaran Ace E-Lock IN: Max 140W
amaran Ray 60c input:
DC IN: 19V=4.2A, Max 79.8W
USB-C IN: 9V=3A, Max 27W, 12V=5A, Max 60W, 20V=3.75A, Max 75W
amaran Ace E-Lock IN: Max 75W
47 CFR Part 15.247
Test Standard(s) : ANSI C63.10-2020
KDB 558074 D01 15.247 Meas Guidance v05r02

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with above listed standard(s) requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt: 2025-07-21

Date of Test: 2025-07-29 to 2025-08-28

Prepared By:



(Lene Chen)

Approved & Authorized Signer:



(Hugo Chen)

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2025-09-22

1. General Information

1.1. Client Information

Applicant	:	Aputure Imaging Industries Co., Ltd.
Address	:	3rd Floor, Building 21, Longjun industrial estate, Longhua, Bao'an, Shenzhen, P.R.China
Manufacturer	:	Aputure Imaging Industries Co., Ltd.
Address	:	3rd Floor, Building 21, Longjun industrial estate, Longhua, Bao'an, Shenzhen, P.R.China
Factory	:	Aputure Imaging Industries Co., Ltd.
Address	:	Plants 1, 2, and 3, Huadeng Science and Technology Park, Yuanzhou Town, Boluo County, Huizhou City, Guangdong Province
Factory2	:	TONGWEI ELECTRONICS (VIETNAM) COMPANY LIMITED
Address	:	Block C-04 and part C-05 of Lot CN 12, An Duong Industrial Zone, Hong Phong Commune, An Duong District, Hai Phong City 180000 Vietnam

1.2. Description of Device (EUT)

Product Name	:	amaran Video Light
Model No.	:	amaran Ray 120c , amaran Ray 60c (Note: According to the model differences on page 7, so we prepare all models for EMC test.)
Trade Mark	:	amaran
Test Power Supply	:	AC 120V/60Hz for adapter/ 140W by amaran Ace E-Lock
Test Sample No.	:	1-3-1(Normal Sample), 1-3-2(Engineering Sample), 1-3-3(Normal Sample)
Adapter	:	N/A
RF Specification		
Operation Frequency	:	2402MHz to 2480MHz
Number of Channel	:	40
Modulation Type	:	GFSK
Antenna Type	:	FPC Antenna
Antenna Gain(Peak)	:	3.62dBi
Remark: (1) All of the RF specification are provided by customer. (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

Model differences:

Model name	Input	Output Power	Size	PCB
amaran Ray 120c	DC IN: 24V=6.25A, Max150W USB-C IN: 12V=5A, Max 60W, 20V=5A, Max 100W, 28V=5A, Max 140W amaran Ace E-Lock IN: Max 140W	120W	145*115* 51 cm	/
amaran Ray 60c	DC IN: 19V=4.2A, Max 79.8W USB-C IN: 9V=3A, Max 27W, 12V=5A, Max 60W, 20V=3.75A, Max 75W amaran Ace E-Lock IN: Max 75W	90W	145*115* 44 cm	60c are less than 120c: 1. One Schottky diode, with the identification number D24 2. Four constant current ICs, with the following designations: U1P/U1A/U1E/U1K

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
Amaran Power Bank	/	Amaran Peak	/
140W Adapter	Ugreen Group Limited	X569	35965

1.4. Operation channel list

Operation Band:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.5. Description of Test Modes

Pretest Modes	Descriptions
TM1	Keep the EUT in continuously transmitting mode with GFSK modulation.

1.6. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.2dB
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Power Spectral Density	0.76dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.64dB; 6G-18GHz: 4.82dB 18G-40GHz: 5.62dB
Radiated emissions (Below 30MHz)	3.26dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.70dB; Vertical: 4.42dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.7. Additional Instructions

Power level setup in software
EMI_Test_Tool

Operation Band:

Mode	Channel(MHz)	Power level	Transmitting type
BLE_1Mbps	2402	default	data pack TX
BLE_1Mbps	2440	default	data pack TX
BLE_1Mbps	2480	default	data pack TX

1.8. Test Summary

Test Items	Test Modes	Status
Antenna requirement	/	P
Conducted Emission at AC power line	Mode1	P
6dB Bandwidth	Mode1	P
Maximum Conducted Output Power	Mode1	P
Power Spectral Density	Mode1	P
Emissions in non-restricted frequency bands	Mode1	P
Band edge emissions (Radiated)	Mode1	P
Emissions in restricted frequency bands (below 1GHz)	Mode1	P
Emissions in restricted frequency bands (above 1GHz)	Mode1	P
Note: P: Pass N: N/A, not applicable		

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.:279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.
Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.10. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

1.11. Test Equipment List

Conducted Emission at AC power line						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	2024-09-09	2025-09-08
2	Software Name EZ-EMC	Farad Technology	ANB-03A	N/A	/	/
3	EMI Test Receiver(CE2#)	Rohde & Schwarz	ESPI3	100926	2024-09-09	2025-09-08
4	Three Phase V-type Artificial Power Network LISN 200A	EMtrace	PWL-50-3200A	2404	2025-02-21	2026-02-20

Emissions in non-restricted frequency bands 6dB Bandwidth Maximum Conducted Output Power Power Spectral Density						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	2024-10-14	2025-10-13
2	DC Power Supply	IVYTECH	IV3605	1804D360510	2024-09-09	2025-09-08
3	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	2025-04-25	2026-04-24
4	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY50531823	2024-09-09	2025-09-08
5	Oscilloscope	Tektronix	MDO3012	C020298	2024-10-10	2025-10-09
6	MXG RF Vector Signal Generator	Agilent	N5182A	MY47420647	2025-01-14	2026-01-13

Band edge emissions (Radiated)						
Emissions in frequency bands (above 1GHz)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	EMI Test Receiver(RE2/3#)	Rohde & Schwarz	ESR26	101481	2025-01-14	2026-01-13
2	EMI Preamplifier	SKET Electronic	LNPA-0118G-45	SKET-PA-002	2025-01-13	2026-01-12
3	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	2022-10-16	2025-10-15
4	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	/	/
5	Horn Antenna	A-INFO	LB-180400-KF	J211060628	2024-01-22	2027-01-21
6	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	2025-04-25	2026-04-24
7	Amplifier	Talent Microwave	TLLA18G40 G-53-30	23022802	2025-02-24	2026-02-23

Emissions in frequency bands (below 1GHz)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	EMI Test Receiver(RE2/3#)	Rohde & Schwarz	ESR26	101481	2025-01-14	2026-01-13
2	Pre-amplifier	SONOMA	310N	186860	2025-01-14	2026-01-13
3	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	2022-10-23	2025-10-22
4	Loop Antenna (9K-30M)	Schwarzbeck	FMZB1519 B	00053	2024-09-12	2025-09-11
5	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	/	/

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

2. Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

2.1. Conclusion

The antenna is a FPC antenna which permanently attached, and the best case gain of the antenna is 3.62dBi . It complies with the standard requirement.
--


3. Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	ANSI C63.10-2020 section 6.2		
Procedure:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

3.1. EUT Operation

Operating Environment:	
Test mode:	1: TX mode: Keep the EUT in continuously transmitting mode with GFSK modulation.


3.2. Test Setup

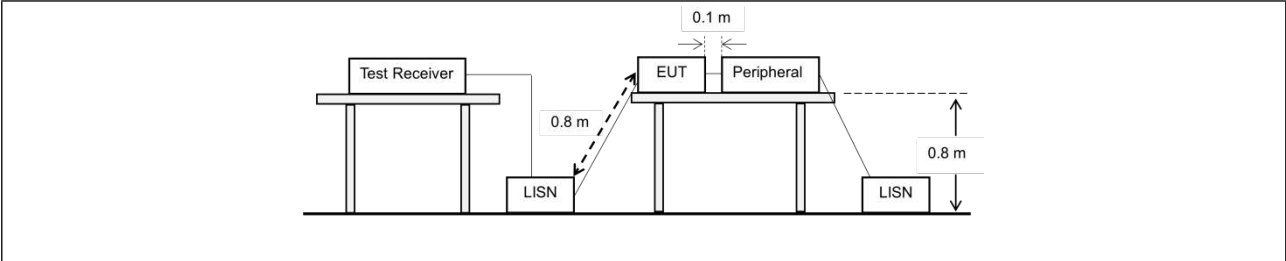

3.3. Test Data

amaran Ray 120c DC IN:


Temperature:	25.1 °C	Humidity:	59 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

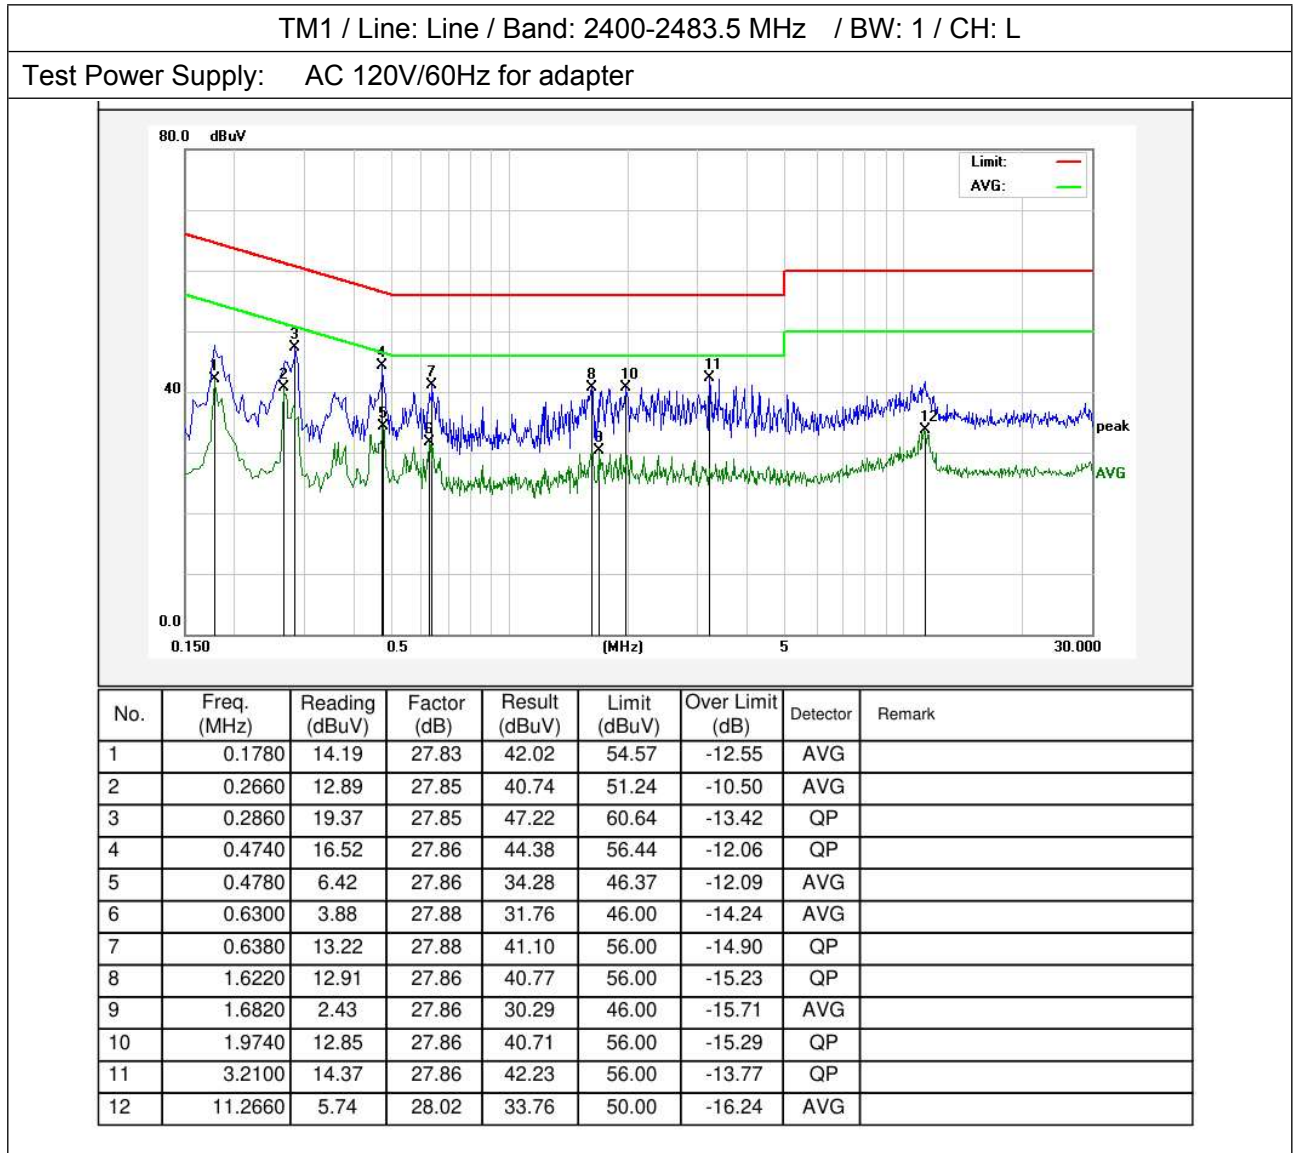

Temperature:	25.1 °C	Humidity:	59 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 1 / CH: L

Test Power Supply: AC 120V/60Hz for adapter

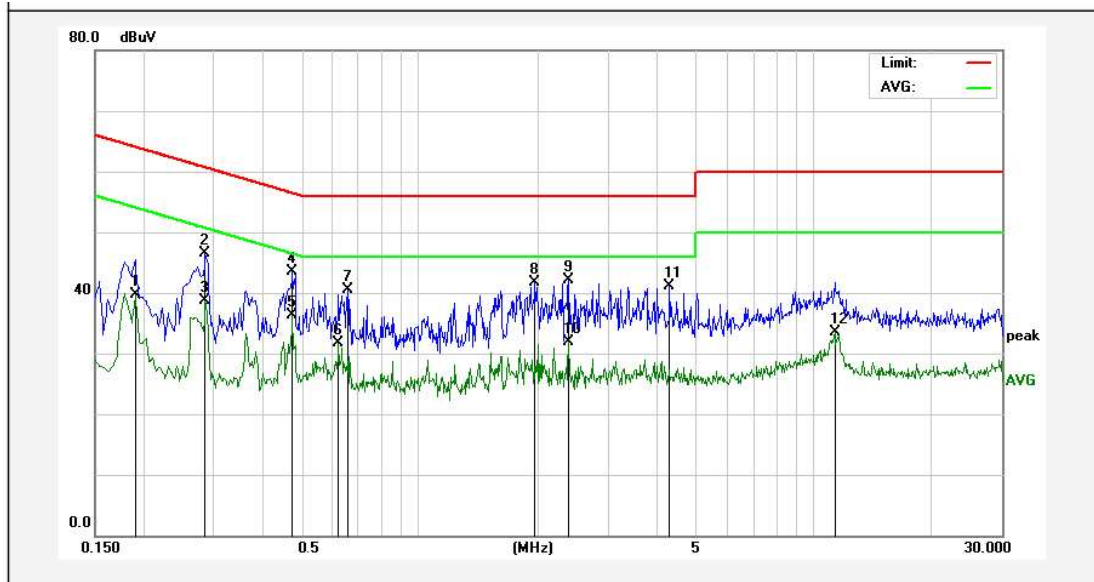

No.	Freq. (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Over Limit (dB)	Detector	Remark
1	0.1900	11.89	27.83	39.72	54.03	-14.31	AVG	
2	0.2860	18.72	27.85	46.57	60.64	-14.07	QP	
3	0.2860	10.93	27.85	38.78	50.64	-11.86	AVG	
4	0.4740	15.68	27.86	43.54	56.44	-12.90	QP	
5	0.4740	8.38	27.86	36.24	46.44	-10.20	AVG	
6	0.6260	3.79	27.88	31.67	46.00	-14.33	AVG	
7	0.6580	12.61	27.88	40.49	56.00	-15.51	QP	
8	1.9620	13.85	27.86	41.71	56.00	-14.29	QP	
9	2.3860	14.17	27.86	42.03	56.00	-13.97	QP	
10	2.3860	3.96	27.86	31.82	46.00	-14.18	AVG	
11	4.2940	13.23	27.86	41.09	56.00	-14.91	QP	
12	11.3740	5.51	28.03	33.54	50.00	-16.46	AVG	

Remark:


Result(dBμV) = Reading(dBμV) + Factor(dB);

Over Limit(dB) = Result(dBμV) - Limit(dBμV)

amaran Ray 120c TYPE-C IN:

Temperature:	25.1 °C	Humidity:	59 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

TM1 / Line: Line / Band: 2400-2483.5 MHz / BW: 1 / CH: L
Test Power Supply: AC 120V/60Hz for adapter

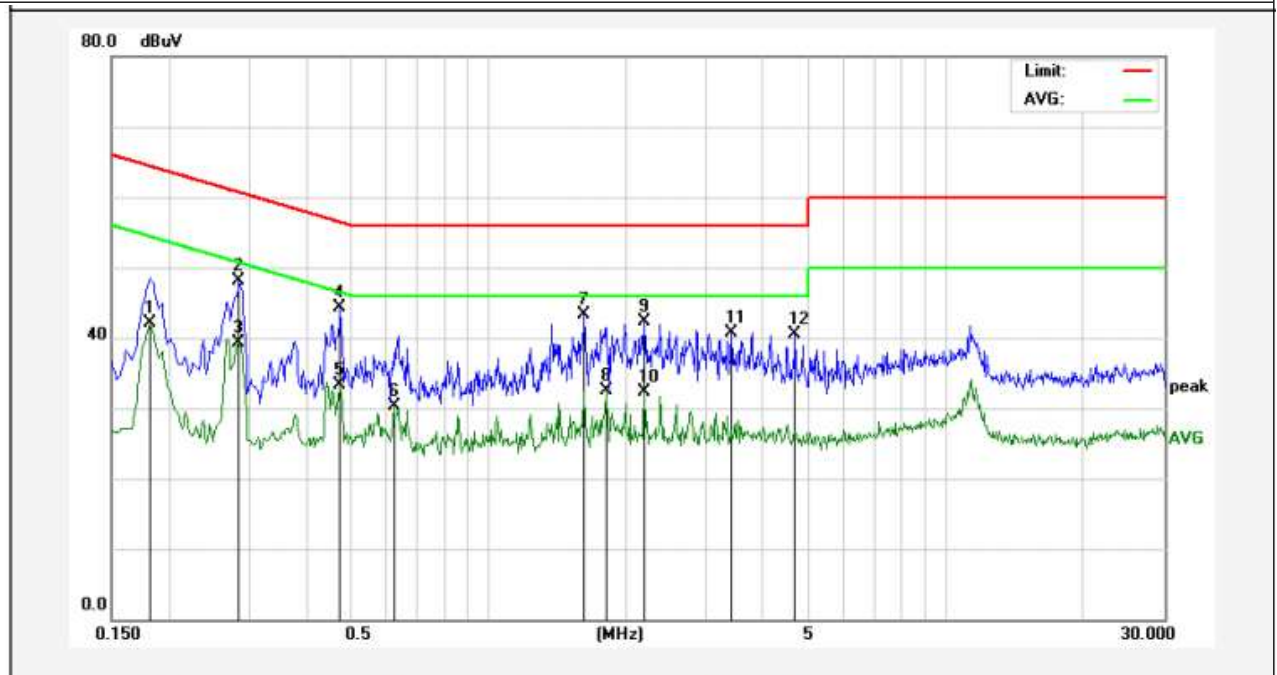

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1819	14.36	27.83	42.19	54.39	-12.20	AVG	
2	0.2860	20.23	27.85	48.08	60.64	-12.56	QP	
3	0.2860	11.55	27.85	39.40	50.64	-11.24	AVG	
4	0.4740	16.37	27.86	44.23	56.44	-12.21	QP	
5	0.4740	5.43	27.86	33.29	46.44	-13.15	AVG	
6	0.6220	2.46	27.88	30.34	46.00	-15.66	AVG	
7	1.6220	15.48	27.86	43.34	56.00	-12.66	QP	
8	1.8140	4.55	27.87	32.42	46.00	-13.58	AVG	
9	2.1900	14.35	27.86	42.21	56.00	-13.79	QP	
10	2.1900	4.54	27.86	32.40	46.00	-13.60	AVG	
11	3.3980	12.89	27.86	40.75	56.00	-15.25	QP	
12	4.6939	12.72	27.87	40.59	56.00	-15.41	QP	


Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Temperature:	25.1 °C	Humidity:	59 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 1 / CH: L
Test Power Supply: AC 120V/60Hz for adapter

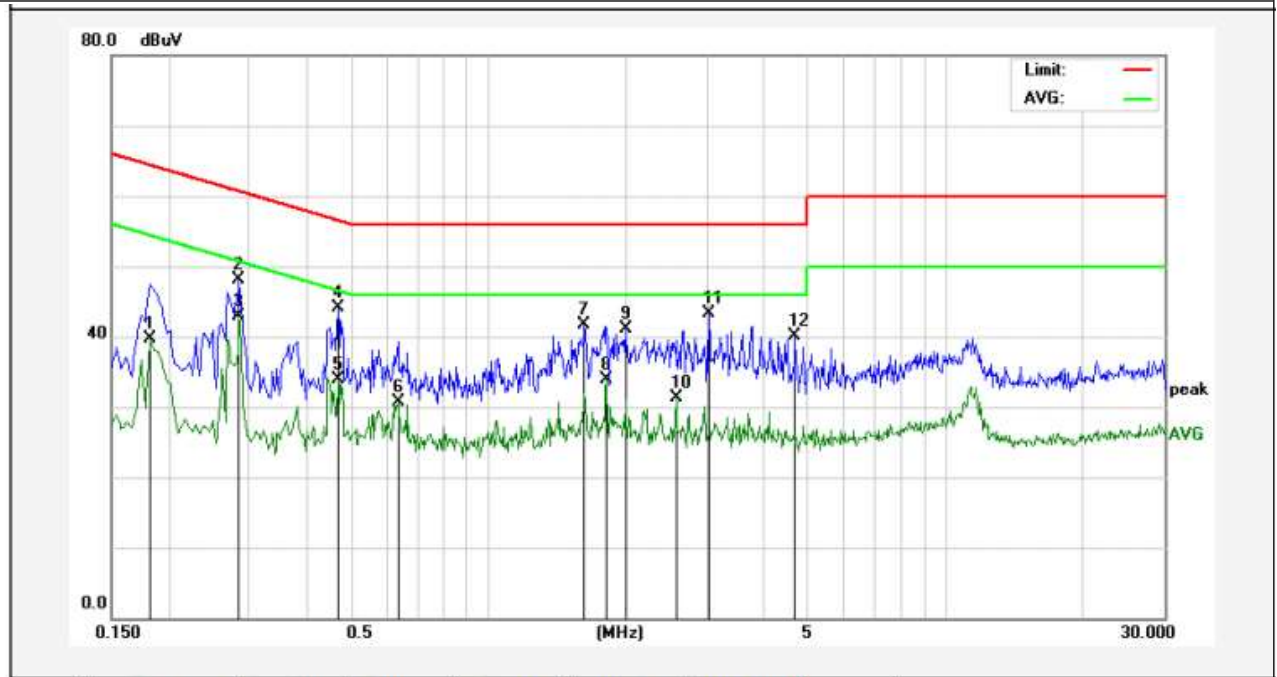

No.	Freq. (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Over Limit (dB)	Detector	Remark
1	0.1819	11.78	27.83	39.61	54.39	-14.78	AVG	
2	0.2860	20.16	27.85	48.01	60.64	-12.63	QP	
3	0.2860	15.06	27.85	42.91	50.64	-7.73	AVG	
4	0.4700	16.23	27.86	44.09	56.51	-12.42	QP	
5	0.4700	5.96	27.86	33.82	46.51	-12.69	AVG	
6	0.6340	2.77	27.88	30.65	46.00	-15.35	AVG	
7	1.6220	13.78	27.86	41.64	56.00	-14.36	QP	
8	1.8140	5.97	27.87	33.84	46.00	-12.16	AVG	
9	1.9980	13.31	27.86	41.17	56.00	-14.83	QP	
10	2.5780	3.37	27.86	31.23	46.00	-14.77	AVG	
11	3.0340	15.45	27.86	43.31	56.00	-12.69	QP	
12	4.6860	12.25	27.87	40.12	56.00	-15.88	QP	

Remark:


Result(dBμV) = Reading(dBμV) + Factor(dB);

Over Limit(dB) = Result(dBμV) - Limit(dBμV)

amaran Ray 60c DC IN:

Temperature:	25.1 °C	Humidity:	59 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

TM1 / Line: Line / Band: 2400-2483.5 MHz / BW: 1 / CH: L
Test Power Supply: AC 120V/60Hz for adapter

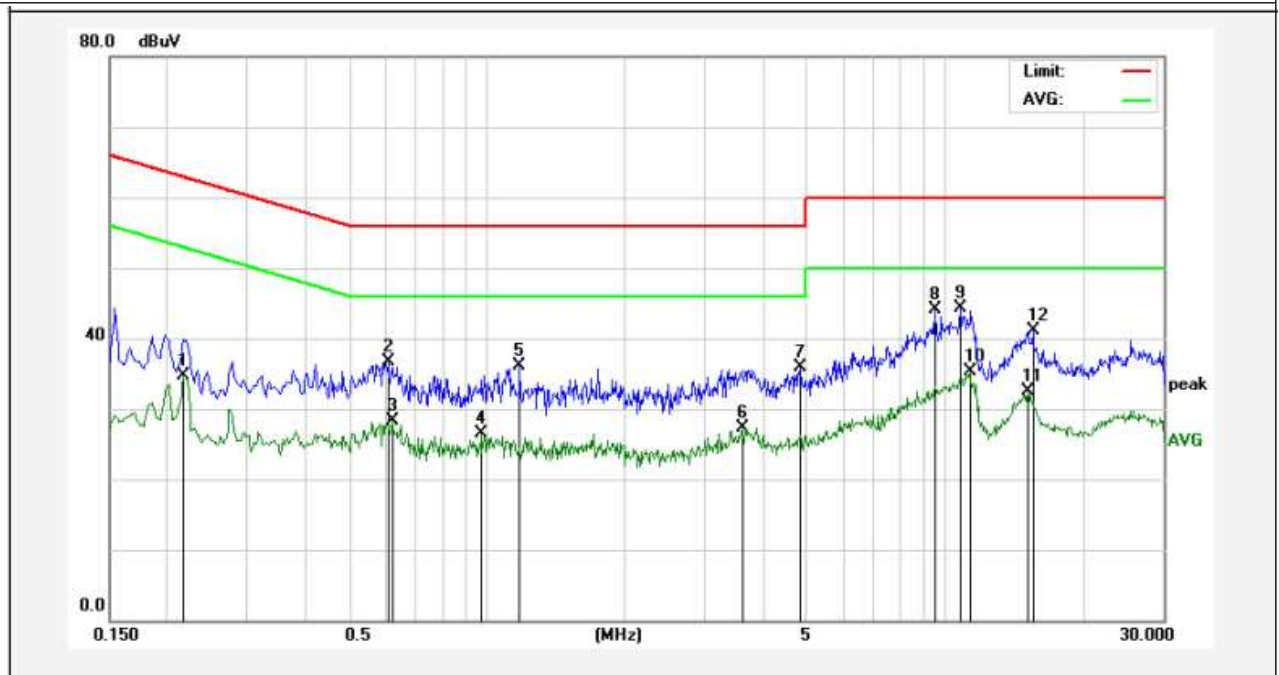

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2180	6.82	27.83	34.65	52.89	-18.24	AVG	
2	0.6100	8.86	27.88	36.74	56.00	-19.26	QP	
3	0.6220	0.37	27.88	28.25	46.00	-17.75	AVG	
4	0.9780	-1.35	27.87	26.52	46.00	-19.48	AVG	
5	1.1820	8.18	27.86	36.04	56.00	-19.96	QP	
6	3.6220	-0.62	27.87	27.25	46.00	-18.75	AVG	
7	4.8300	8.03	27.87	35.90	56.00	-20.10	QP	
8	9.5340	16.08	27.97	44.05	60.00	-15.95	QP	
9	10.8100	16.34	28.01	44.35	60.00	-15.65	QP	
10	11.3380	7.34	28.02	35.36	50.00	-14.64	AVG	
11	15.1500	4.34	28.16	32.50	50.00	-17.50	AVG	
12	15.5780	12.99	28.17	41.16	60.00	-18.84	QP	


Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Temperature:	25.1 °C	Humidity:	59 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 1 / CH: L
Test Power Supply: AC 120V/60Hz for adapter

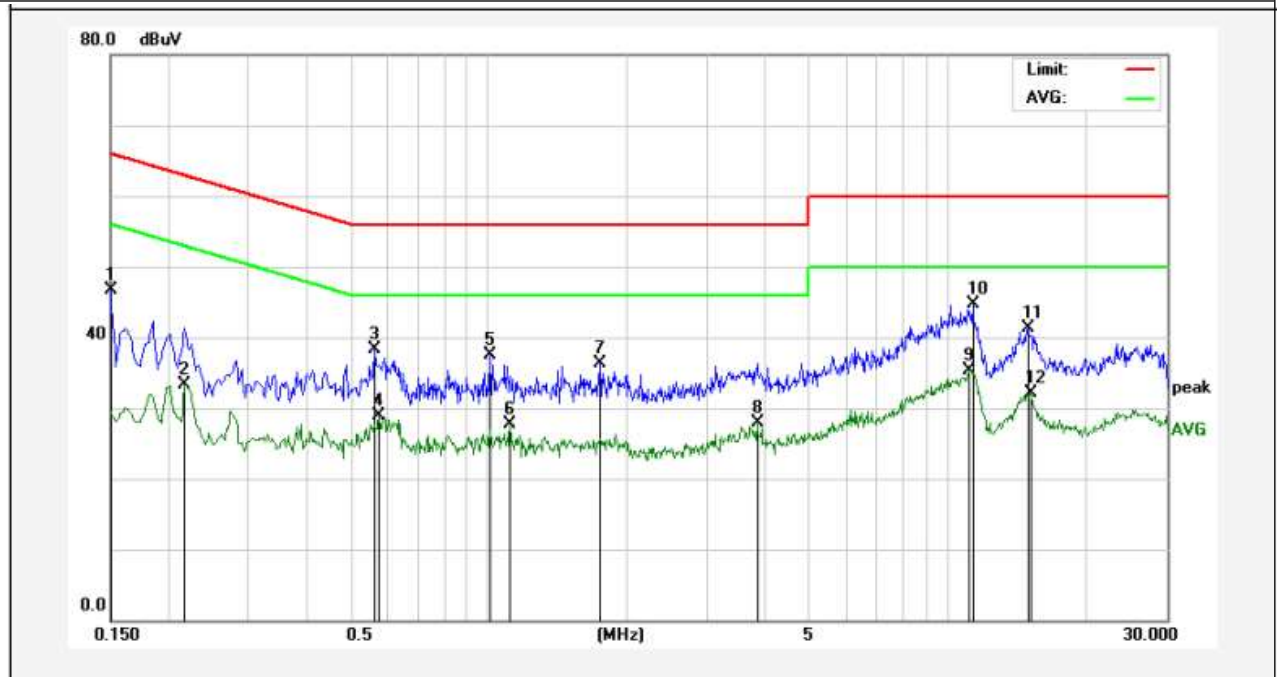

No.	Freq. (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Over Limit (dB)	Detector	Remark
1	0.1500	18.88	27.83	46.71	65.99	-19.28	QP	
2	0.2180	5.50	27.83	33.33	52.89	-19.56	AVG	
3	0.5660	10.37	27.87	38.24	56.00	-17.76	QP	
4	0.5780	1.04	27.87	28.91	46.00	-17.09	AVG	
5	1.0100	9.68	27.87	37.55	56.00	-18.45	QP	
6	1.1140	-0.19	27.87	27.68	46.00	-18.32	AVG	
7	1.7500	8.53	27.87	36.40	56.00	-19.60	QP	
8	3.8540	0.03	27.87	27.90	46.00	-18.10	AVG	
9	11.1420	7.37	28.02	35.39	50.00	-14.61	AVG	
10	11.3380	16.66	28.02	44.68	60.00	-15.32	QP	
11	14.9220	13.19	28.16	41.35	60.00	-18.65	QP	
12	15.1140	3.92	28.16	32.08	50.00	-17.92	AVG	

Remark:

Result(dBμV) = Reading(dBμV) + Factor(dB);

Over Limit(dB) = Result(dBμV) - Limit(dBμV)

Shenzhen Anbotek Compliance Laboratory Limited


Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

amaran Ray 60c TYPE-C IN:

Temperature:	25.1 °C	Humidity:	59 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

TM1 / Line: Line / Band: 2400-2483.5 MHz / BW: 1 / CH: L
Test Power Supply: AC 120V/60Hz for adapter

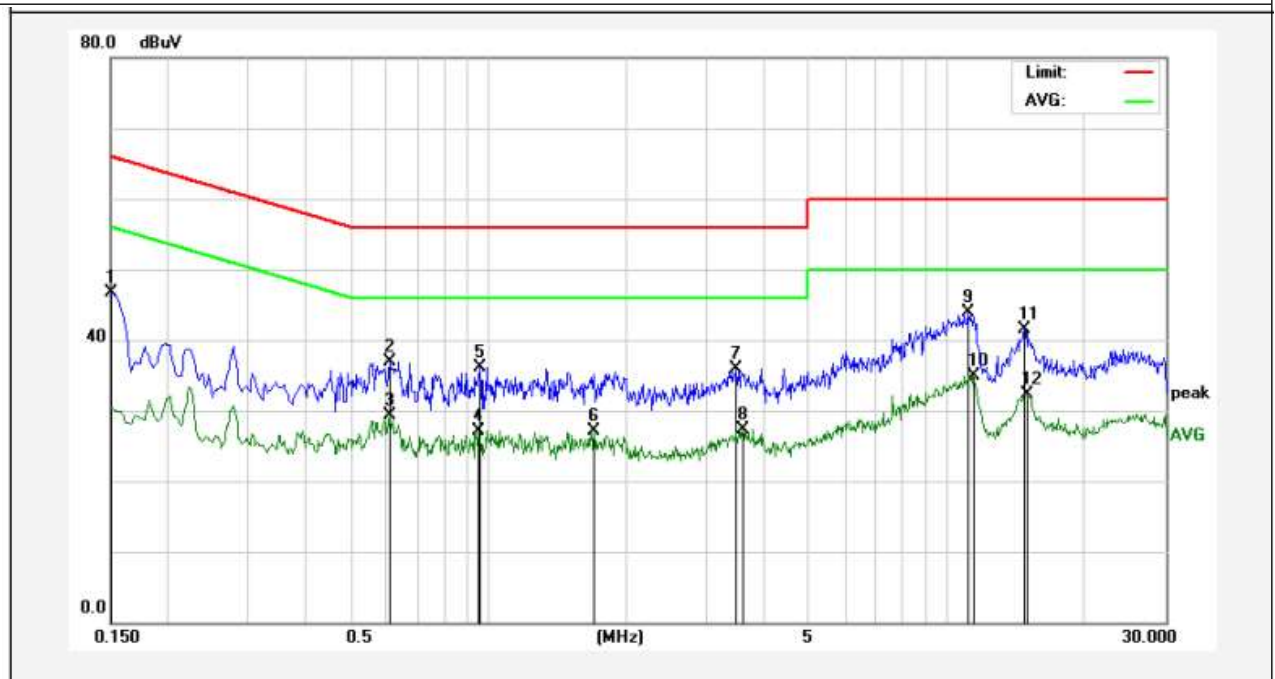

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	18.83	27.83	46.66	65.99	-19.33	QP	
2	0.6100	9.11	27.88	36.99	56.00	-19.01	QP	
3	0.6100	1.46	27.88	29.34	46.00	-16.66	AVG	
4	0.9500	-0.71	27.87	27.16	46.00	-18.84	AVG	
5	0.9620	8.17	27.87	36.04	56.00	-19.96	QP	
6	1.7060	-0.72	27.86	27.14	46.00	-18.86	AVG	
7	3.4820	8.07	27.86	35.93	56.00	-20.07	QP	
8	3.5860	-0.53	27.87	27.34	46.00	-18.66	AVG	
9	11.1020	15.88	28.02	43.90	60.00	-16.10	QP	
10	11.3820	6.94	28.03	34.97	50.00	-15.03	AVG	
11	14.7700	13.38	28.15	41.53	60.00	-18.47	QP	
12	14.9180	4.08	28.16	32.24	50.00	-17.76	AVG	


Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Temperature:	25.1 °C	Humidity:	59 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 1 / CH: L
Test Power Supply: AC 120V/60Hz for adapter

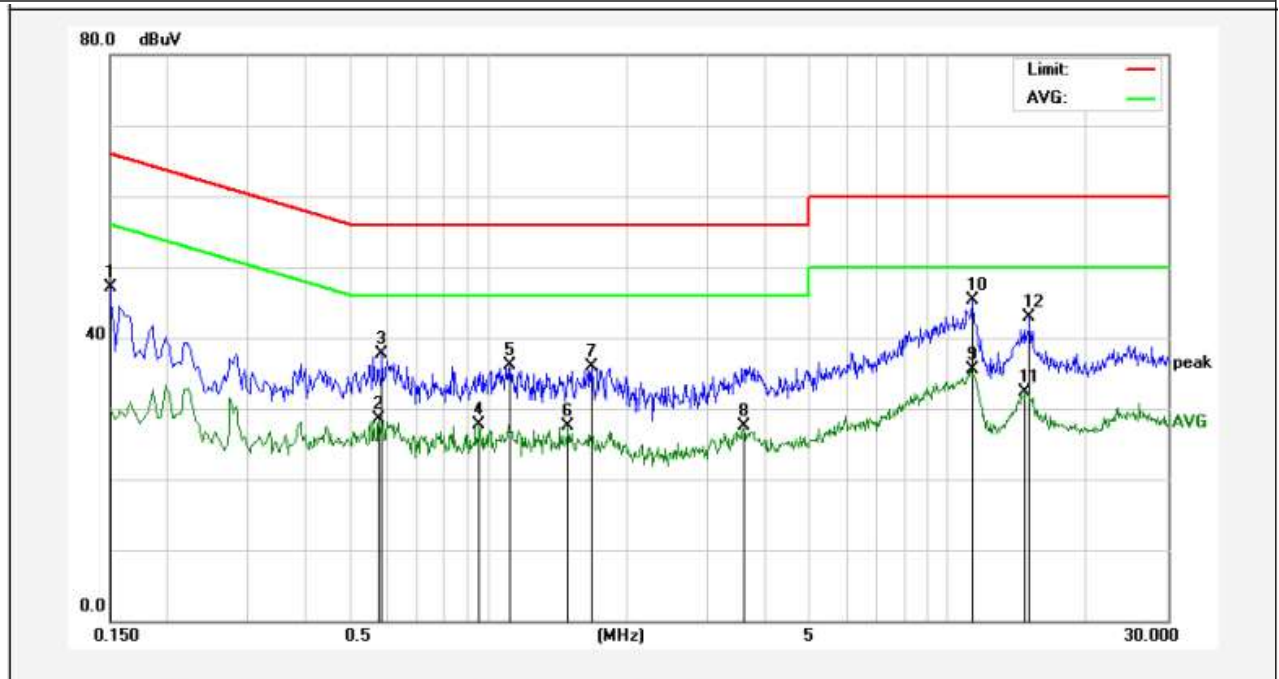

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	19.32	27.83	47.15	65.99	-18.84	QP	
2	0.5780	0.63	27.87	28.50	46.00	-17.50	AVG	
3	0.5860	9.86	27.87	37.73	56.00	-18.27	QP	
4	0.9540	-0.19	27.87	27.68	46.00	-18.32	AVG	
5	1.1140	8.27	27.87	36.14	56.00	-19.86	QP	
6	1.4940	-0.33	27.87	27.54	46.00	-18.46	AVG	
7	1.6740	8.14	27.86	36.00	56.00	-20.00	QP	
8	3.5900	-0.32	27.87	27.55	46.00	-18.45	AVG	
9	11.2060	7.45	28.02	35.47	50.00	-14.53	AVG	
10	11.3020	17.30	28.02	45.32	60.00	-14.68	QP	
11	14.7100	4.25	28.15	32.40	50.00	-17.60	AVG	
12	15.0460	14.66	28.16	42.82	60.00	-17.18	QP	

Remark:

Result(dBμV) = Reading(dBμV) + Factor(dB);

Over Limit(dB) = Result(dBμV) - Limit(dBμV)

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com


4. 6dB Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	11.8.1 Option 1 The steps for the first option are as follows: a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max-hold. e) Sweep = No faster than coupled (auto) time. f) Allow the trace to stabilize. g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value. 11.8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

4.1. EUT Operation

Operating Environment:	
Test mode:	1: TX mode: Keep the EUT in continuously transmitting mode with GFSK modulation.

4.2. Test Setup

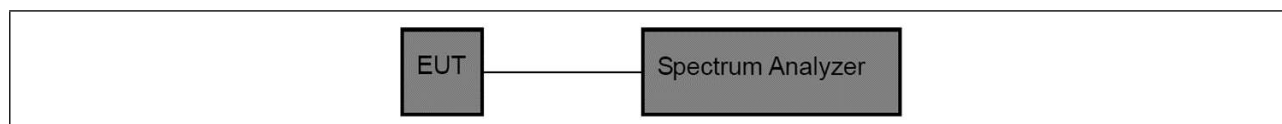

4.3. Test Data

Temperature:	23.3 °C	Humidity:	56.8 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	--------	-----------------------	---------

Please Refer to report 1818C50132712501-01.


5. Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2020 section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power

5.1. EUT Operation

Operating Environment:	
Test mode:	1: TX mode: Keep the EUT in continuously transmitting mode with GFSK modulation.

5.2. Test Setup

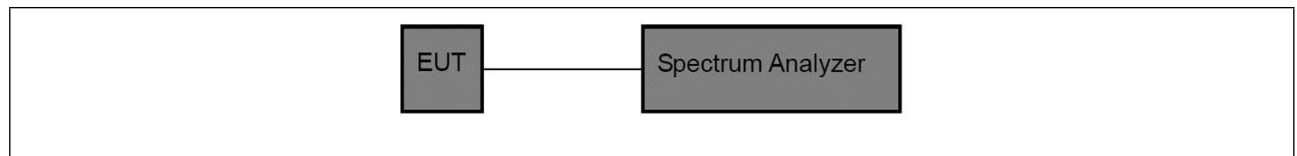

5.3. Test Data

Temperature:	23.3 °C	Humidity:	56.8 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	--------	-----------------------	---------

Please Refer to Appendix for report 1818C50132712501-01.


6. Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2020, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020, section 11.10, Maximum power spectral density level in the fundamental emission

6.1. EUT Operation

Operating Environment:	
Test mode:	1: TX mode: Keep the EUT in continuously transmitting mode with GFSK modulation.

6.2. Test Setup

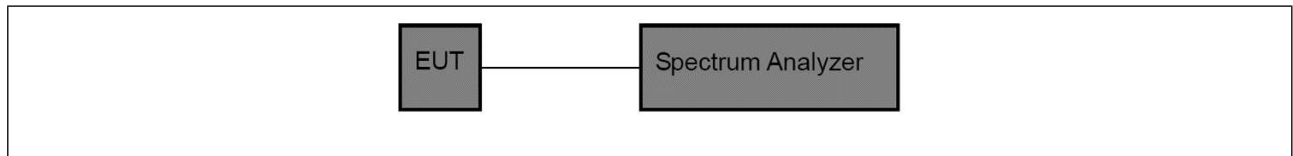

6.3. Test Data

Temperature:	23.3 °C	Humidity:	56.8 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	--------	-----------------------	---------

Please Refer to Appendix for report 1818C50132712501-01.


7. Emissions in non-restricted frequency bands

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2020 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

7.1. EUT Operation

Operating Environment:	
Test mode:	1: TX mode: Keep the EUT in continuously transmitting mode with GFSK modulation.

7.2. Test Setup

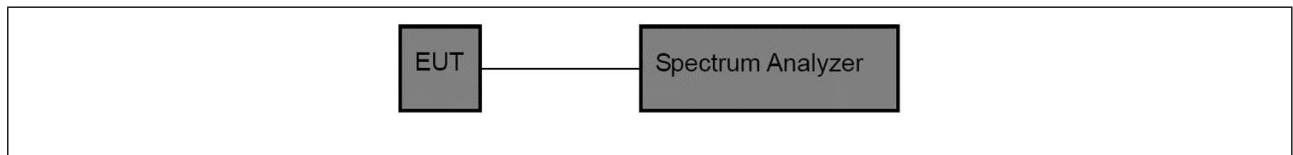

7.3. Test Data

Temperature:	23.3 °C	Humidity:	56.8 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	--------	-----------------------	---------

Please Refer to Appendix for report 1818C50132712501-01.


8. Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020 section 6.10.5.2		

8.1. EUT Operation

Operating Environment:	
Test mode:	1: TX mode: Keep the EUT in continuously transmitting mode with GFSK modulation.

8.2. Test Setup

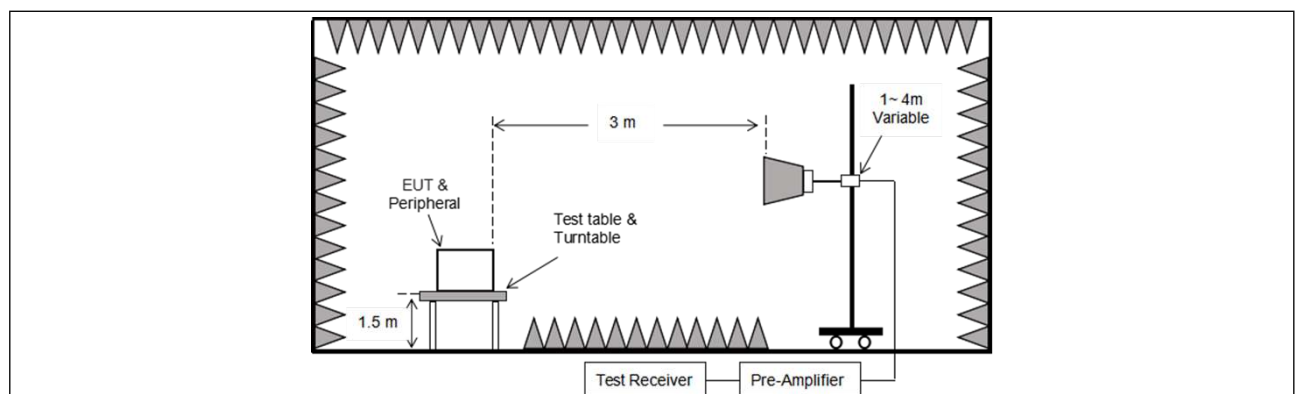

8.3. Test Data

Temperature:	23.3 °C	Humidity:	56.8 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	--------	-----------------------	---------



TM1 / CH: L						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
2390	32.31	9.73	42.04	74	-31.96	Vertical
2352.19	34.95	9.73	44.68	74	-29.32	Vertical
2390	33.38	9.73	43.11	74	-30.89	Horizontal
2324.83	34.72	9.73	44.45	74	-29.55	Horizontal
TM1 / CH: H						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
2483.5	30.8	9.91	40.71	74	-33.29	Vertical
2499.295	36.57	9.91	46.48	74	-27.52	Vertical
2483.5	33.33	9.91	43.24	74	-30.76	Horizontal
2488.404	37.34	9.91	47.25	74	-26.75	Horizontal
Note: Result=Reading+Factor, Over Limit=Result-Limit						

Remark:

1. When the PK measure result value is less than the AVG limit value, the AV measure result values test not applicable.


9. Emissions in restricted frequency bands (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020 section 6.6.4		

9.1. EUT Operation

Operating Environment:	
Test mode:	1: TX mode: Keep the EUT in continuously transmitting mode with GFSK modulation.

9.2. Test Setup

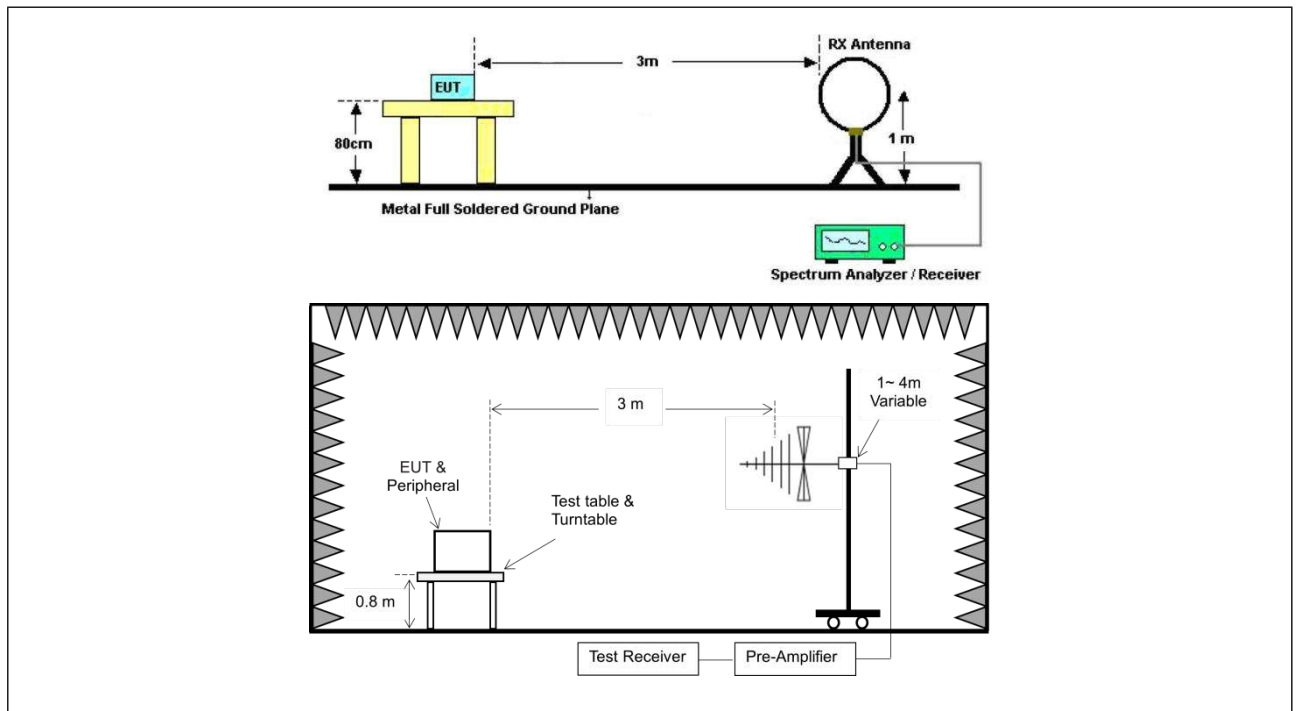

9.3. Test Data


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

amaran Ray 120c DC IN:

Temperature:	22.5 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------


TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

Test Power Supply: AC 120V/60Hz for adapter

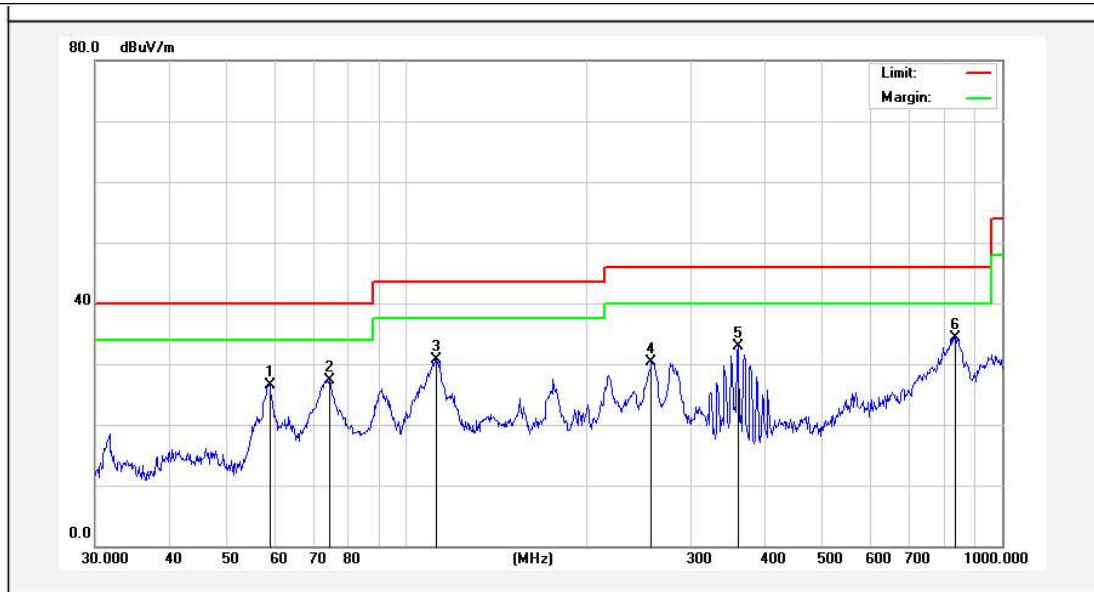

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	58.8185	44.51	-17.98	26.53	40.00	-13.47	QP	
2	74.3955	49.62	-22.37	27.25	40.00	-12.75	QP	
3	111.7380	50.14	-19.44	30.70	43.50	-12.80	QP	
4	257.4222	48.45	-18.12	30.33	46.00	-15.67	QP	
5	359.1860	48.04	-15.10	32.94	46.00	-13.06	QP	
6	836.2443	42.41	-8.14	34.27	46.00	-11.73	QP	

Temperature:	22.5 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

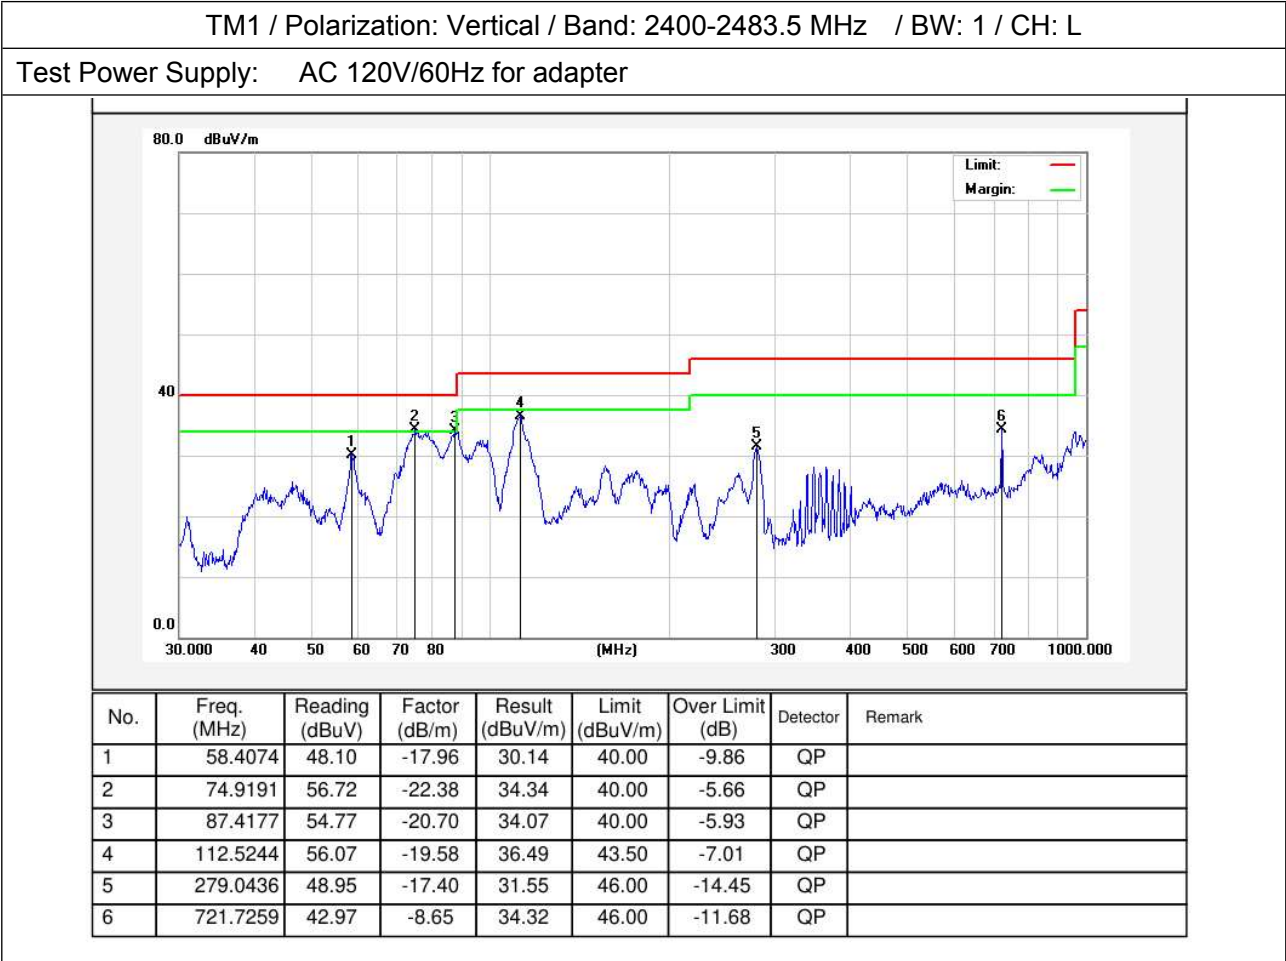


Remark:

Result(dBμV/m) = Reading(dBμV) + Factor(dB/m);

Over Limit(dB) = Result(dBμV/m) - Limit(dBμV/m)

Temperature:	22.5 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L	
Test Power Supply:	140W by amaran Ace E-Lock

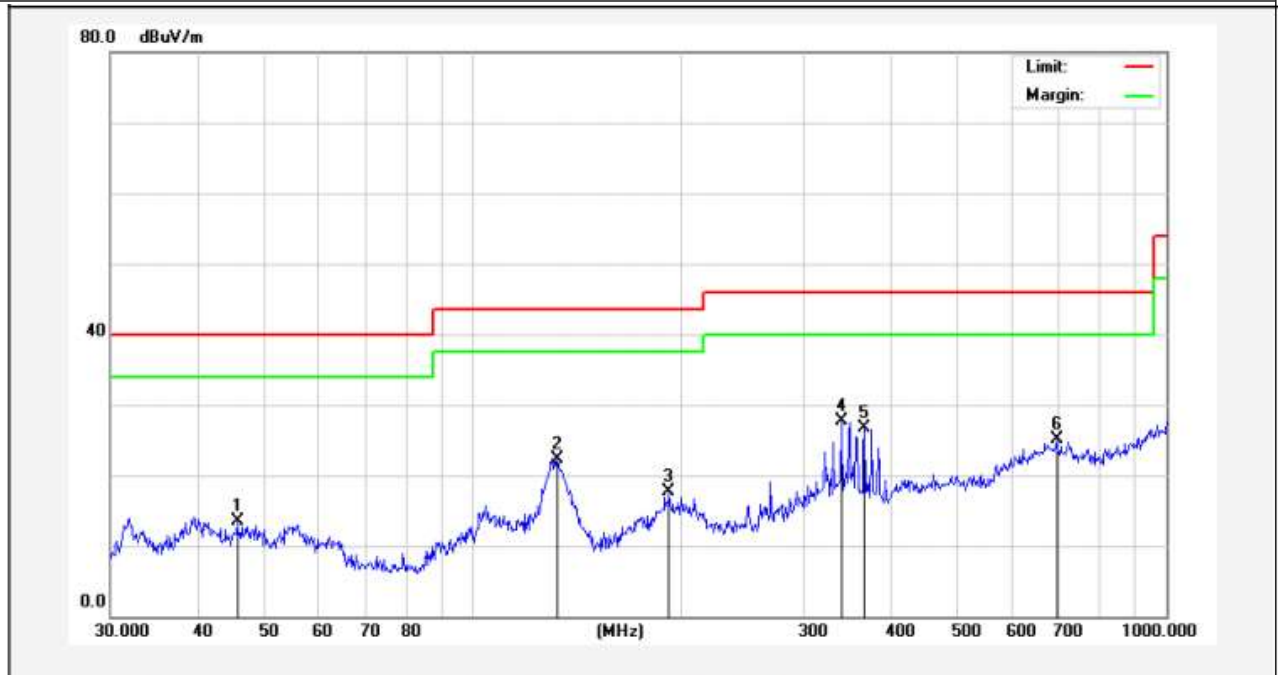

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	45.6948	30.14	-16.72	13.42	40.00	-26.58	QP	
2	132.2206	44.88	-22.50	22.38	43.50	-21.12	QP	
3	191.7450	38.26	-20.59	17.67	43.50	-25.83	QP	
4	339.5888	43.31	-15.69	27.62	46.00	-18.38	QP	
5	366.8231	41.49	-14.84	26.65	46.00	-19.35	QP	
6	694.4174	34.05	-8.93	25.12	46.00	-20.88	QP	


Remark:

Result(dBuV/m) = Reading(dBuV) + Factor(dB/m);

Over Limit(dB) = Result(dBuV/m) - Limit(dBuV/m)

amaran Ray 60c DC IN:

Temperature:	22.5 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

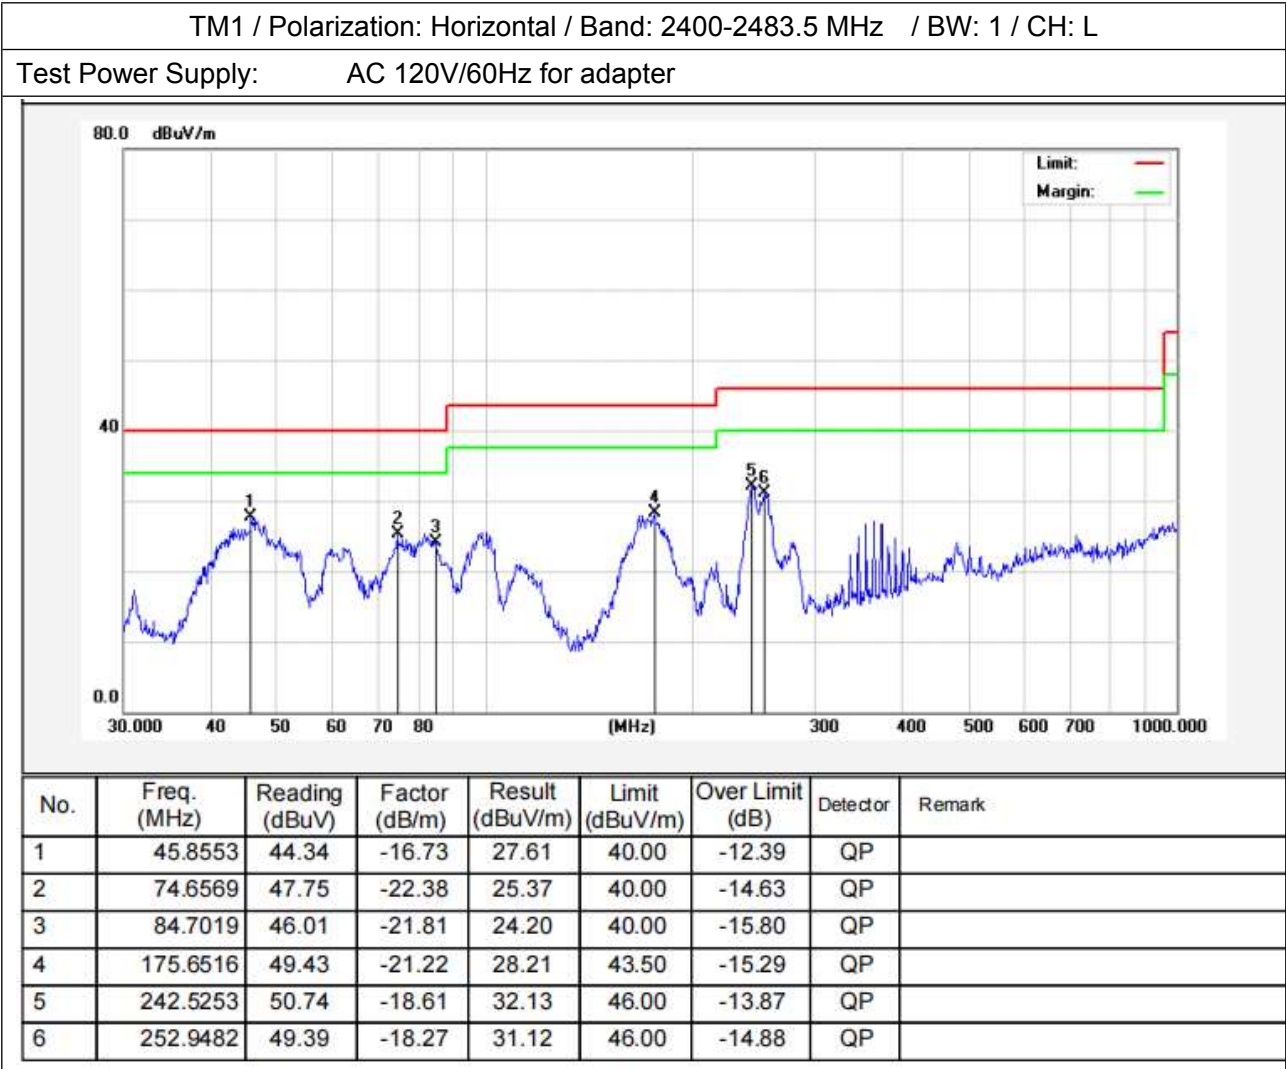


Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Temperature:	22.5 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

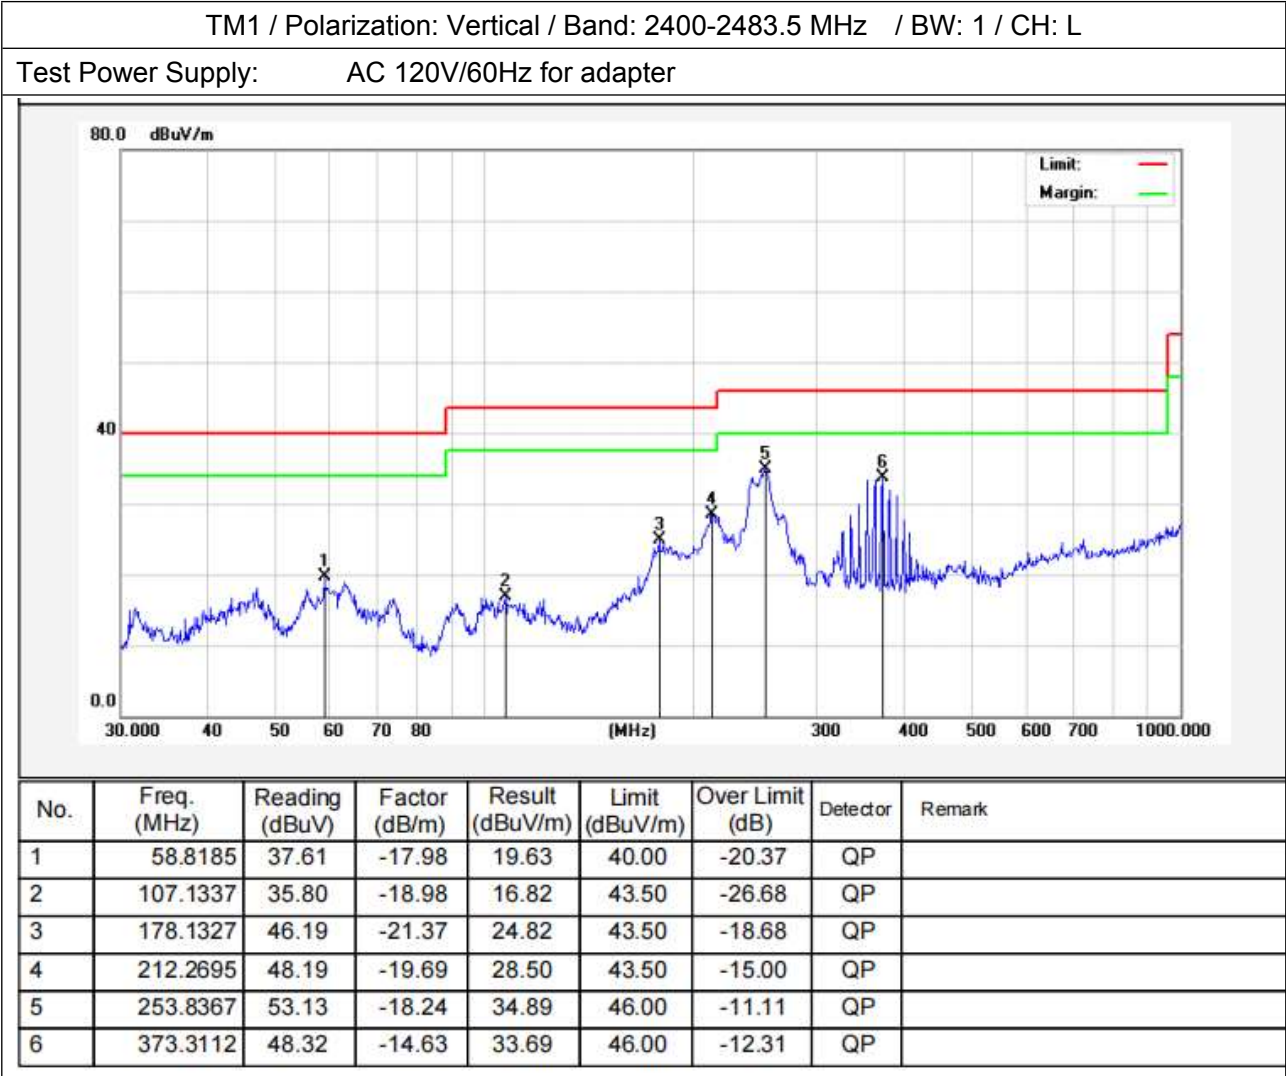


Remark:

Result(dBμV/m) = Reading(dBμV) + Factor(dB/m);

Over Limit(dB) = Result(dBμV/m) - Limit(dBμV/m)

amaran Ray 60c Amaran Power Bank:

Temperature:	22.5 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

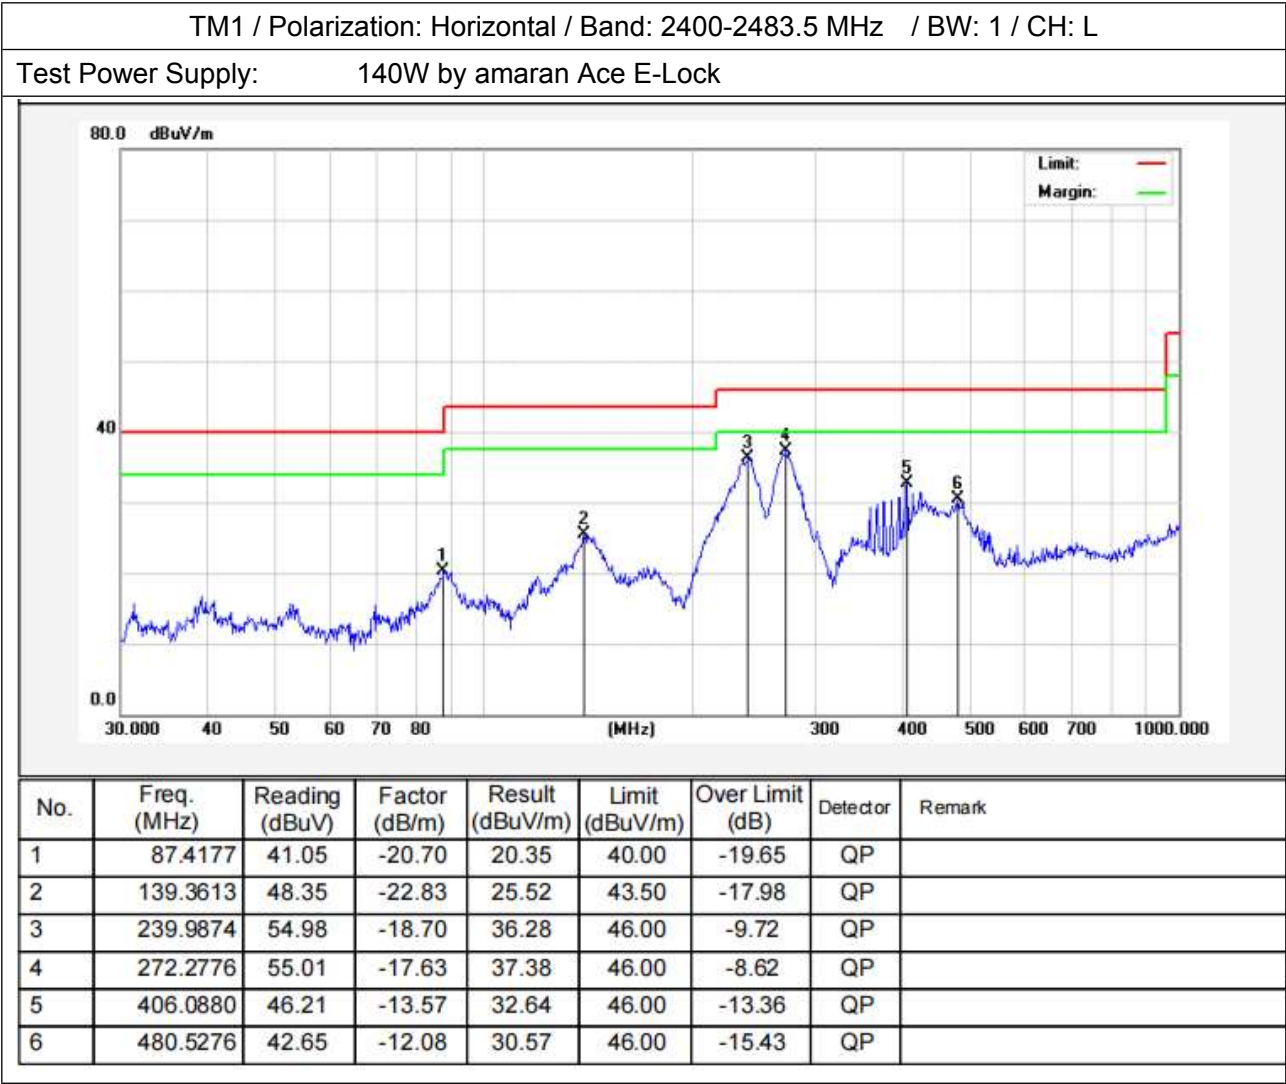


Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Temperature:	22.5 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

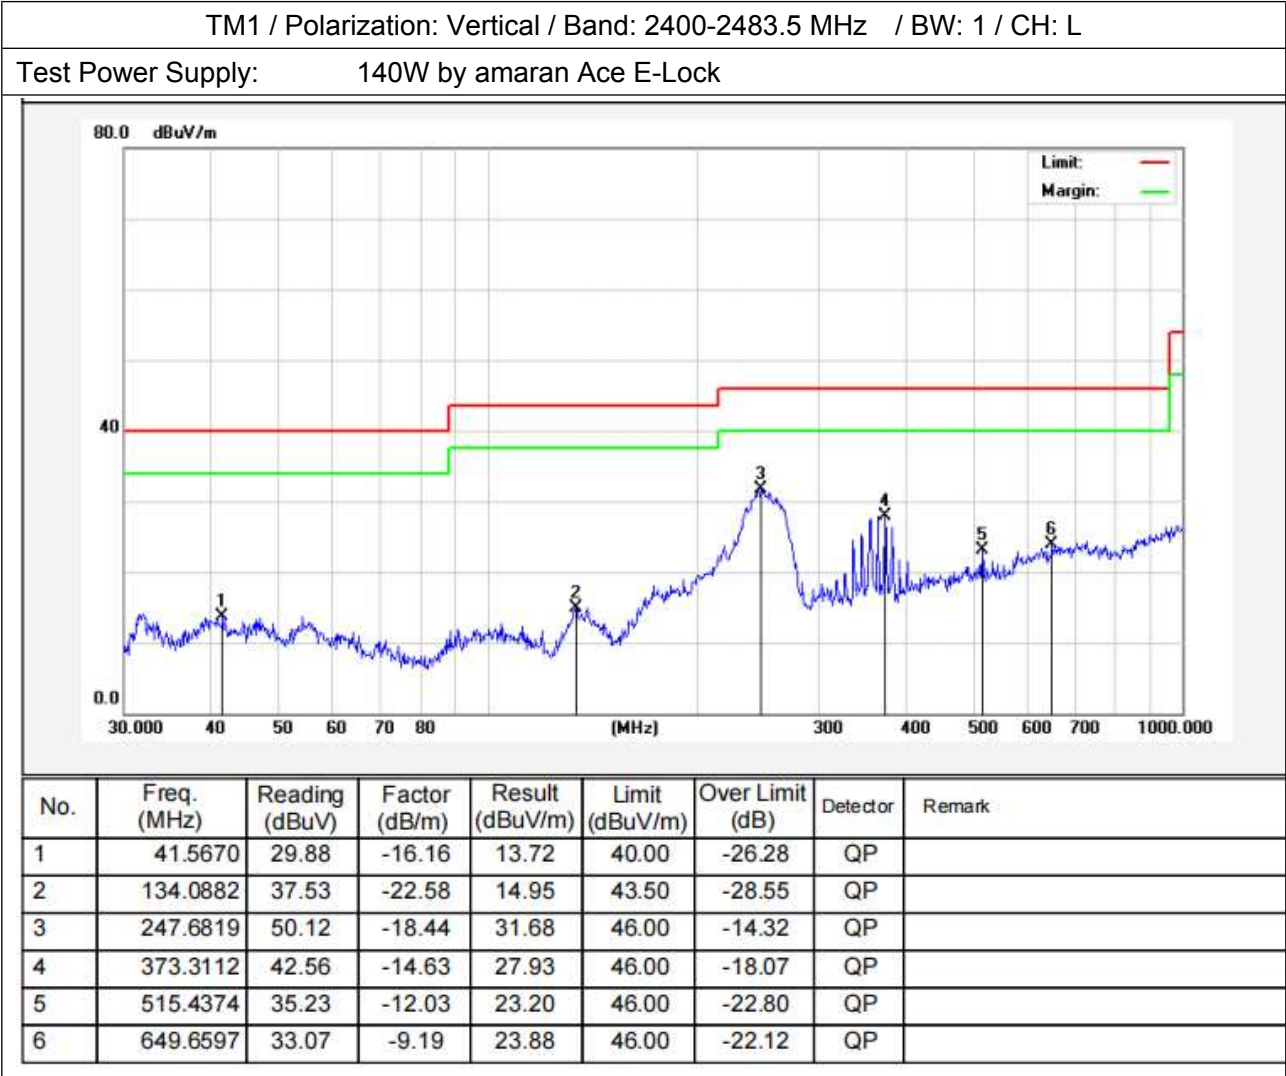

Remark:

Result(dBμV/m) = Reading(dBμV) + Factor(dB/m);

Over Limit(dB) = Result(dBμV/m) - Limit(dBμV/m)


10. Emissions in restricted frequency bands (above 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020 section 6.6.4		

10.1. EUT Operation

Operating Environment:	
Test mode:	1: TX mode: Keep the EUT in continuously transmitting mode with GFSK modulation.

10.2. Test Setup

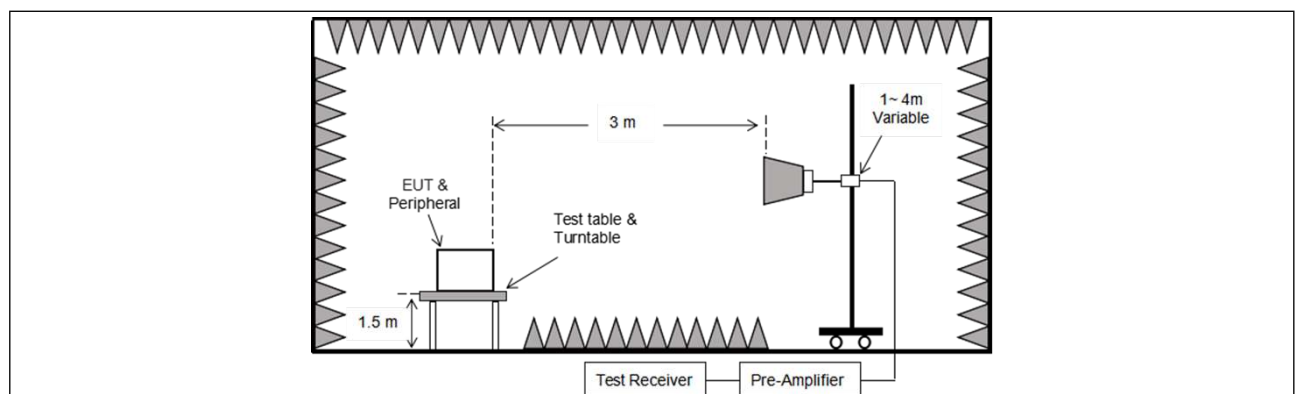

10.3. Test Data

Temperature:	22 °C	Humidity:	53 %	Atmospheric Pressure:	101 kPa
--------------	-------	-----------	------	-----------------------	---------

amaran Ray 120c DC IN:

TM1 / CH: L						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	30.96	15.27	46.23	74.00	-27.77	Vertical
7206.00	30.59	18.09	48.68	74.00	-25.32	Vertical
9608.00	32.30	23.76	56.06	74.00	-17.94	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	30.41	15.27	45.68	74.00	-28.32	Horizontal
7206.00	32.05	18.09	50.14	74.00	-23.86	Horizontal
9608.00	29.18	23.76	52.94	74.00	-21.06	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	19.23	15.27	34.50	54.00	-19.50	Vertical
7206.00	19.64	18.09	37.73	54.00	-16.27	Vertical
9608.00	21.77	23.76	45.53	54.00	-8.47	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	18.74	15.27	34.01	54.00	-19.99	Horizontal
7206.00	21.08	18.09	39.17	54.00	-14.83	Horizontal
9608.00	18.69	23.76	42.45	54.00	-11.55	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

TM1 / CH: M						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	30.51	15.42	45.93	74.00	-28.07	Vertical
7320.00	30.56	18.02	48.58	74.00	-25.42	Vertical
9760.00	31.80	23.80	55.60	74.00	-18.40	Vertical
12200.00	*			74.00		Vertical
14640.00	*			74.00		Vertical
4880.00	30.22	15.42	45.64	74.00	-28.36	Horizontal
7320.00	31.92	18.02	49.94	74.00	-24.06	Horizontal
9760.00	28.90	23.80	52.70	74.00	-21.30	Horizontal
12200.00	*			74.00		Horizontal
14640.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	19.32	15.42	34.74	54.00	-19.26	Vertical
7320.00	19.50	18.02	37.52	54.00	-16.48	Vertical
9760.00	21.62	23.80	45.42	54.00	-8.58	Vertical
12200.00	*			54.00		Vertical
14640.00	*			54.00		Vertical
4880.00	18.85	15.42	34.27	54.00	-19.73	Horizontal
7320.00	21.43	18.02	39.45	54.00	-14.55	Horizontal
9760.00	18.99	23.80	42.79	54.00	-11.21	Horizontal
12200.00	*			54.00		Horizontal
14640.00	*			54.00		Horizontal

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

TM1 / CH: H						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	30.64	15.58	46.22	74.00	-27.78	Vertical
7440.00	30.72	17.93	48.65	74.00	-25.35	Vertical
9920.00	32.50	23.83	56.33	74.00	-17.67	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	30.36	15.58	45.94	74.00	-28.06	Horizontal
7440.00	32.13	17.93	50.06	74.00	-23.94	Horizontal
9920.00	29.28	23.83	53.11	74.00	-20.89	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	20.44	15.58	36.02	54.00	-17.98	Vertical
7440.00	20.77	17.93	38.70	54.00	-15.30	Vertical
9920.00	22.27	23.83	46.10	54.00	-7.90	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	20.03	15.58	35.61	54.00	-18.39	Horizontal
7440.00	22.23	17.93	40.16	54.00	-13.84	Horizontal
9920.00	19.14	23.83	42.97	54.00	-11.03	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Temperature:	22 °C	Humidity:	53 %	Atmospheric Pressure:	101 kPa
--------------	-------	-----------	------	-----------------------	---------

amaran Ray 120c Amaran Power Bank:

TM1 / CH: L						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	31.98	15.27	47.25	74.00	-26.75	Vertical
7206.00	31.44	18.09	49.53	74.00	-24.47	Vertical
9608.00	33.50	23.76	57.26	74.00	-16.74	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	31.35	15.27	46.62	74.00	-27.38	Horizontal
7206.00	33.27	18.09	51.36	74.00	-22.64	Horizontal
9608.00	29.62	23.76	53.38	74.00	-20.62	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	20.25	15.27	35.52	54.00	-18.48	Vertical
7206.00	20.49	18.09	38.58	54.00	-15.42	Vertical
9608.00	22.97	23.76	46.73	54.00	-7.27	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	19.68	15.27	34.95	54.00	-19.05	Horizontal
7206.00	22.30	18.09	40.39	54.00	-13.61	Horizontal
9608.00	19.13	23.76	42.89	54.00	-11.11	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

TM1 / CH: M						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	31.53	15.42	46.95	74.00	-27.05	Vertical
7320.00	31.41	18.02	49.43	74.00	-24.57	Vertical
9760.00	33.00	23.80	56.80	74.00	-17.20	Vertical
12200.00	*			74.00		Vertical
14640.00	*			74.00		Vertical
4880.00	31.16	15.42	46.58	74.00	-27.42	Horizontal
7320.00	33.14	18.02	51.16	74.00	-22.84	Horizontal
9760.00	29.34	23.80	53.14	74.00	-20.86	Horizontal
12200.00	*			74.00		Horizontal
14640.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	20.34	15.42	35.76	54.00	-18.24	Vertical
7320.00	20.35	18.02	38.37	54.00	-15.63	Vertical
9760.00	22.82	23.80	46.62	54.00	-7.38	Vertical
12200.00	*			54.00		Vertical
14640.00	*			54.00		Vertical
4880.00	19.79	15.42	35.21	54.00	-18.79	Horizontal
7320.00	22.65	18.02	40.67	54.00	-13.33	Horizontal
9760.00	19.43	23.80	43.23	54.00	-10.77	Horizontal
12200.00	*			54.00		Horizontal
14640.00	*			54.00		Horizontal

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

TM1 / CH: H						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	31.66	15.58	47.24	74.00	-26.76	Vertical
7440.00	31.57	17.93	49.50	74.00	-24.50	Vertical
9920.00	33.70	23.83	57.53	74.00	-16.47	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	31.30	15.58	46.88	74.00	-27.12	Horizontal
7440.00	33.35	17.93	51.28	74.00	-22.72	Horizontal
9920.00	29.72	23.83	53.55	74.00	-20.45	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	21.46	15.58	37.04	54.00	-16.96	Vertical
7440.00	21.62	17.93	39.55	54.00	-14.45	Vertical
9920.00	23.47	23.83	47.30	54.00	-6.70	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	20.97	15.58	36.55	54.00	-17.45	Horizontal
7440.00	23.45	17.93	41.38	54.00	-12.62	Horizontal
9920.00	19.58	23.83	43.41	54.00	-10.59	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Temperature:	22 °C	Humidity:	53 %	Atmospheric Pressure:	101 kPa
--------------	-------	-----------	------	-----------------------	---------

amaran Ray 60c DC IN:

TM1 / CH: L						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	33.16	15.27	48.43	74.00	-25.57	Vertical
7206.00	32.41	18.09	50.50	74.00	-23.50	Vertical
9608.00	34.88	23.76	58.64	74.00	-15.36	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	32.42	15.27	47.69	74.00	-26.31	Horizontal
7206.00	34.68	18.09	52.77	74.00	-21.23	Horizontal
9608.00	30.13	23.76	53.89	74.00	-20.11	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	21.43	15.27	36.70	54.00	-17.30	Vertical
7206.00	21.46	18.09	39.55	54.00	-14.45	Vertical
9608.00	24.35	23.76	48.11	54.00	-5.89	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	20.75	15.27	36.02	54.00	-17.98	Horizontal
7206.00	23.71	18.09	41.80	54.00	-12.20	Horizontal
9608.00	19.64	23.76	43.40	54.00	-10.60	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

TM1 / CH: M						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	32.71	15.42	48.13	74.00	-25.87	Vertical
7320.00	32.38	18.02	50.40	74.00	-23.60	Vertical
9760.00	34.38	23.80	58.18	74.00	-15.82	Vertical
12200.00	*			74.00		Vertical
14640.00	*			74.00		Vertical
4880.00	32.23	15.42	47.65	74.00	-26.35	Horizontal
7320.00	34.55	18.02	52.57	74.00	-21.43	Horizontal
9760.00	29.85	23.80	53.65	74.00	-20.35	Horizontal
12200.00	*			74.00		Horizontal
14640.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	21.52	15.42	36.94	54.00	-17.06	Vertical
7320.00	21.32	18.02	39.34	54.00	-14.66	Vertical
9760.00	24.20	23.80	48.00	54.00	-6.00	Vertical
12200.00	*			54.00		Vertical
14640.00	*			54.00		Vertical
4880.00	20.86	15.42	36.28	54.00	-17.72	Horizontal
7320.00	24.06	18.02	42.08	54.00	-11.92	Horizontal
9760.00	19.94	23.80	43.74	54.00	-10.26	Horizontal
12200.00	*			54.00		Horizontal
14640.00	*			54.00		Horizontal

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

TM1 / CH: H						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	32.84	15.58	48.42	74.00	-25.58	Vertical
7440.00	32.54	17.93	50.47	74.00	-23.53	Vertical
9920.00	35.08	23.83	58.91	74.00	-15.09	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	32.37	15.58	47.95	74.00	-26.05	Horizontal
7440.00	34.76	17.93	52.69	74.00	-21.31	Horizontal
9920.00	30.23	23.83	54.06	74.00	-19.94	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	22.64	15.58	38.22	54.00	-15.78	Vertical
7440.00	22.59	17.93	40.52	54.00	-13.48	Vertical
9920.00	24.85	23.83	48.68	54.00	-5.32	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	22.04	15.58	37.62	54.00	-16.38	Horizontal
7440.00	24.86	17.93	42.79	54.00	-11.21	Horizontal
9920.00	20.09	23.83	43.92	54.00	-10.08	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Temperature:	22 °C	Humidity:	53 %	Atmospheric Pressure:	101 kPa
--------------	-------	-----------	------	-----------------------	---------

amaran Ray 60c Amaran Power Bank:

TM1 / CH: L						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	30.50	15.27	45.77	74.00	-28.23	Vertical
7206.00	30.21	18.09	48.30	74.00	-25.70	Vertical
9608.00	31.76	23.76	55.52	74.00	-18.48	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	29.99	15.27	45.26	74.00	-28.74	Horizontal
7206.00	31.50	18.09	49.59	74.00	-24.41	Horizontal
9608.00	28.99	23.76	52.75	74.00	-21.25	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	18.77	15.27	34.04	54.00	-19.96	Vertical
7206.00	19.26	18.09	37.35	54.00	-16.65	Vertical
9608.00	21.23	23.76	44.99	54.00	-9.01	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	18.32	15.27	33.59	54.00	-20.41	Horizontal
7206.00	20.53	18.09	38.62	54.00	-15.38	Horizontal
9608.00	18.50	23.76	42.26	54.00	-11.74	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

TM1 / CH: M						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	30.05	15.42	45.47	74.00	-28.53	Vertical
7320.00	30.18	18.02	48.20	74.00	-25.80	Vertical
9760.00	31.26	23.80	55.06	74.00	-18.94	Vertical
12200.00	*			74.00		Vertical
14640.00	*			74.00		Vertical
4880.00	29.80	15.42	45.22	74.00	-28.78	Horizontal
7320.00	31.37	18.02	49.39	74.00	-24.61	Horizontal
9760.00	28.71	23.80	52.51	74.00	-21.49	Horizontal
12200.00	*			74.00		Horizontal
14640.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	18.86	15.42	34.28	54.00	-19.72	Vertical
7320.00	19.12	18.02	37.14	54.00	-16.86	Vertical
9760.00	21.08	23.80	44.88	54.00	-9.12	Vertical
12200.00	*			54.00		Vertical
14640.00	*			54.00		Vertical
4880.00	18.43	15.42	33.85	54.00	-20.15	Horizontal
7320.00	20.88	18.02	38.90	54.00	-15.10	Horizontal
9760.00	18.80	23.80	42.60	54.00	-11.40	Horizontal
12200.00	*			54.00		Horizontal
14640.00	*			54.00		Horizontal

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

TM1 / CH: H						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	30.18	15.58	45.76	74.00	-28.24	Vertical
7440.00	30.34	17.93	48.27	74.00	-25.73	Vertical
9920.00	31.96	23.83	55.79	74.00	-18.21	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	29.94	15.58	45.52	74.00	-28.48	Horizontal
7440.00	31.58	17.93	49.51	74.00	-24.49	Horizontal
9920.00	29.09	23.83	52.92	74.00	-21.08	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	19.98	15.58	35.56	54.00	-18.44	Vertical
7440.00	20.39	17.93	38.32	54.00	-15.68	Vertical
9920.00	21.73	23.83	45.56	54.00	-8.44	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	19.61	15.58	35.19	54.00	-18.81	Horizontal
7440.00	21.68	17.93	39.61	54.00	-14.39	Horizontal
9920.00	18.95	23.83	42.78	54.00	-11.22	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

Remark:

1. Result =Reading + Factor

2. Test frequency are from 1GHz to 25GHz, “*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Report No.: 1818C501327125SP

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Report No.: 1818C501327125EP

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Report No.: 1818C501327125IP

----- End of Report -----