

TEST REPORT


Application No.: SZCR2307002331AT
Applicant: Icomera AB
Address of Applicant: Odinsgatan 28, Gothenburg, SE-411 03, Sweden
Manufacturer: Icomera AB
Address of Manufacturer: Odinsgatan 28, Gothenburg, SE-411 03, Sweden
Factory: Thundercomm Technology Co., Ltd
Address of Factory: No. 107, Middle Datagu Road, Xiantao Street, Yubei District, Chongqing, China, 401122

Equipment Under Test (EUT):

Type of Equipment/EUT name: Access Point
Model Name: A2-e
Type Number: CDE000832-1, CDE000832-2
Brand Name: ICOMERA
HW Version: R1
SW Version: IWP5
FCC ID: 2AAC2-A2E
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2024-04-19
Date of Test: 2024-04-20 to 2024-10-23
Date of Issue: 2024-10-24

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR230700233114

Page: 2 of 403

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2024-10-24		Original

Authorized for issue by:				
		Calvin Weng		
		Calvin Weng/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Duty Cycle		ANSI C63.10 (2013) SECTION 12.2	ANSI C63.10 (2013) SECTION 12.2	Pass
99% Bandwidth		ANSI C63.10 (2013) Section 12.4.2	ANSI C63.10 (2013) Section 12.4.2	Pass
26dB Emission bandwidth		ANSI C63.10 (2013) Section 12.4.1	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Maximum Conducted output power		ANSI C63.10 (2013) Section 12.3	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Peak Power spectrum density		ANSI C63.10 (2013) Section 12.5	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Frequency Stability		ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart E 15.407 (g)	Pass
In-band Emission(Emission Mask)		ANSI C63.10 (2013) Section 12.5	47 CFR Part 15, Subpart E 15.407 (b)	Pass
Contention Based Protocol		KDB 987597 D02	47 CFR Part 15, Subpart E 15.407 (d)	Pass
Transmitter Power Control		ANSI C63.10 (2013) Section 12.3	47 CFR Part 15, Subpart E 15.407 (d)(10)	Pass



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR230700233114

Page: 4 of 403

Remark:

Model No.: A2-e.

There are two versions of A2-e. Type number CDE000832-1 with PoE and CDE000832-2 with Bypass relays.

Only Type Number CDE000832-1 was tested in this report, since the electrical circuit design, layout, internal wiring and components used were similar.

The difference being that CDE000832-1 can be powered by both PoE and DC power, whereas CDE000832-2 can only be powered by DC.

Remark: All configuration has been tested, only worst case of test data is recorded in the report.



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	5
4 General Information	8
4.1 Details of E.U.T.	8
4.2 Description of Support Units	9
4.3 Measurement Uncertainty	9
4.4 Test Location	10
4.5 Test Facility	10
4.6 Deviation from Standards	10
4.7 Abnormalities from Standard Conditions	10
5 Equipment List	11
6 Radio Spectrum Technical Requirement	13
6.1 Antenna Requirement	13
6.1.1 Test Requirement:	13
6.1.2 Conclusion	13
6.2 Transmission in the Absence of Data	14
6.2.1 Test Requirement:	14
6.2.2 Conclusion	14
7 Radio Spectrum Matter Test Results	15
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	15
7.1.1 E.U.T. Operation	15
7.1.2 Test Mode Description	15
7.1.3 Test Setup Diagram	16
7.1.4 Measurement Procedure and Data	16
7.2 Duty Cycle	19
7.2.1 E.U.T. Operation	19
7.2.2 Test Mode Description	19
7.2.3 Test Setup Diagram	19
7.2.4 Measurement Procedure and Data	19
7.3 99% Bandwidth	20
7.3.1 E.U.T. Operation	20
7.3.2 Test Mode Description	20
7.3.3 Test Setup Diagram	20
7.3.4 Measurement Procedure and Data	20
7.4 26dB Emission bandwidth	21
7.4.1 E.U.T. Operation	21
7.4.2 Test Mode Description	21
7.4.3 Test Setup Diagram	21



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR230700233114

Page: 6 of 403

7.4.4	Measurement Procedure and Data.....	21
7.5	Maximum Conducted output power	22
7.5.1	E.U.T. Operation	22
7.5.2	Test Mode Description	22
7.5.3	Test Setup Diagram	23
7.5.4	Measurement Procedure and Data.....	23
7.6	Peak Power spectrum density.....	24
7.6.1	E.U.T. Operation	24
7.6.2	Test Mode Description	24
7.6.3	Test Setup Diagram	25
7.6.4	Measurement Procedure and Data.....	25
7.7	Radiated Emissions (Below 1GHz)	26
7.7.1	E.U.T. Operation	26
7.7.2	Test Mode Description	26
7.7.3	Test Setup Diagram	27
7.7.4	Measurement Procedure and Data.....	28
7.8	Radiated Emissions (Above 1GHz).....	31
7.8.1	E.U.T. Operation	31
7.8.2	Test Mode Description	31
7.8.3	Test Setup Diagram	32
7.8.4	Measurement Procedure and Data.....	33
7.9	Radiated Emissions which fall in the restricted bands	100
7.9.1	E.U.T. Operation	100
7.9.2	Test Mode Description	101
7.9.3	Test Setup Diagram	101
7.9.4	Measurement Procedure and Data.....	102
7.10	Frequency Stability	117
7.10.1	E.U.T. Operation.....	117
7.10.2	Test Mode Description.....	117
7.10.3	Test Setup Diagram.....	117
7.10.4	Measurement Procedure and Data	117
7.11	In-band Emission(Emission Mask).....	118
7.11.1	E.U.T. Operation.....	118
7.11.2	Test Mode Description.....	118
7.11.3	Test Setup Diagram.....	119
7.11.4	Measurement Procedure and Data	119
7.12	Contention Based Protocol	120
7.12.1	E.U.T. Operation.....	120
7.12.2	Test Mode Description.....	120
7.12.3	Test Setup Diagram.....	120
7.12.4	Measurement Procedure and Data	120
7.13	Transmitter Power Control	121
7.13.1	E.U.T. Operation.....	121
7.13.2	Test Mode Description.....	121
7.13.3	Test Setup Diagram.....	122
7.13.4	Measurement Procedure and Data	122
8	Test Setup Photo	123
9	EUT Constructional Details (EUT Photos)	123



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) EMC Laboratory.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR230700233114

Page: 7 of 403

10	Appendix.....	124
----	---------------	-----



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Product brief description:	Wireless Access Point, works as a mobile, high performance Wireless Access Point, foremost intended for rail
Power supply:	DC24V/110V, 3A Or PoE input: DC37-57V, 1.7A
Blockchain Verified QR Code:	
Type of Equipment/ EUT name:	Access Point
Model Name:	A2-e
Type Number:	CDE000832-1, CDE000832-2
Brand Name:	ICOMERA
HW Version:	R1
SW Version:	IWP5
Cable Loss (for RF conducted test):	1.5dB
Operation Frequency:	IEEE 802.11 ax/be(20/40/80/160/320): 5925 MHz ~ 6425 MHz IEEE 802.11 ax/be(20/40/80/160): 6525 MHz ~ 6875 MHz
Number of channels:	20MHz bandwidth: 41 40MHz bandwidth: 20 80MHz bandwidth: 10 160MHz bandwidth: 4 320MHz bandwidth: 2
Modulation Type:	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11be: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM)
Channel Spacing:	802.11ax/be 20: 20MHz 802.11ax/be 40: 40MHz 802.11ax/be 80: 80MHz 802.11ax/be 160: 160MHz 802.11be 320: 320MHz
DFS Function:	Master
Antenna Type:	Dipole Antenna
Antenna Gain:	U-NII-5: Ant1: 4.53dBi, Ant2: 4.70dBi, Ant3: 4.18dBi, Ant4: 4.50dBi U-NII-7: Ant1: 4.09dBi, Ant2: 5.12dBi, Ant3: 4.33dBi, Ant4: 5.08dBi

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	± 3.1dB
Duty Cycle	± 0.37%
99% Bandwidth	± 3%
26dB Emission bandwidth	± 3%
Maximum Conducted output power	± 0.75dB
Peak Power spectrum density	± 2.84dB
Radiated Emissions (Below 1GHz)	± 6.0dB for 3m; ± 5.0dB for 10m
Radiated Emissions (Above 1GHz)	± 4.6dB (1-18GHz); ± 4.8dB (18-40GHz)
Radiated Emissions which fall in the restricted bands	± 6.0dB (below 1GHz); ± 4.6dB (above 1GHz);
Frequency Stability	± 7.25 x 10 ⁻⁸



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2022-05-14	2025-05-13
EMI Test Receiver	Rohde&Schwarz	ESCI	SEM004-02	2024-03-14	2025-03-13
Matching Pad	N/A	N/A	SEM021-23	2024-03-20	2025-03-19
Matching Pad	N/A	N/A	SEM021-24	2024-03-20	2025-03-19
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2023-07-07 2024-07-06	2024-07-06 2025-07-05
LISN	Rohde&Schwarz	ENV216	SEM007-01	2023-09-19 2024-09-18	2024-09-18 2025-09-17
LISN	ETS-LINDGREN	3816/2	SEM007-02	2024-03-14	2025-03-13

RF conducted					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2023-10-19	2024-10-18
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-25	2024-03-19	2025-03-18
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2023-09-19	2024-09-18
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2023-07-07 2024-07-06	2024-07-06 2025-07-05
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-30	2025-03-29
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-21	2025-03-20

Radiated Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2023-11-20	2025-11-19
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2023-10-19 2024-10-18	2024-10-18 2025-10-17
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2023-09-16	2025-09-15
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2024-03-14	2025-03-13



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch / 深圳分公司 / 检验检测专用章
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR230700233114

Page: 12 of 403

Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2023-07-07 2024-07-06	2024-07-06 2025-07-05

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2023-04-01	2026-03-31
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2024-03-15	2025-03-14
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2023-07-23	2025-07-22
Microwave system amplifier	Agilent	83017A	SEM005-25	2023-09-19 2024-09-18	2024-09-18 2025-09-17
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2023-07-07 2024-07-06	2024-07-06 2025-07-05

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2023-04-01	2026-03-31
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2024-03-15	2025-03-14
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2023-07-23	2025-07-22
Microwave system amplifier	Agilent	83017A	SEM005-25	2023-09-19 2024-09-18	2024-09-18 2025-09-17
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2023-07-07 2024-07-06	2024-07-06 2025-07-05

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2023-07-28 2024-07-27	2024-07-27 2025-07-26
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2023-07-28 2024-07-27	2024-07-27 2025-07-26
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2024-03-18	2025-03-17



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is connected externally to the AP. It is always professionally installed and permanently attached to the vehicle or building.

The best case gain of the antenna is U-NII-5: Ant1: 4.53dBi, Ant2: 4.70dBi, Ant3: 4.18dBi, Ant4: 4.50dBi, directional gain: 10.72dBi

U-NII-7: Ant1: 4.09dBi, Ant2: 5.12dBi, Ant3: 4.33dBi, Ant4: 5.08dBi, directional gain: 11.14dBi

Antenna location: Refer to external photo.



6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

Wi-Fi chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 23.4 °C Humidity: 47.3 % RH Atmospheric Pressure: 1000 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.1.3 Test Setup Diagram

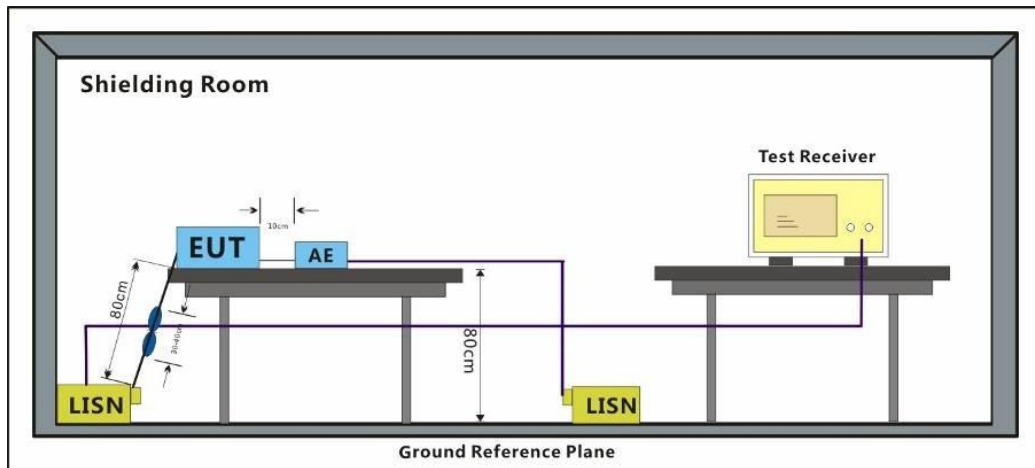

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR230700233114

Page: 17 of 403

Test Mode: 07; Line: Live line

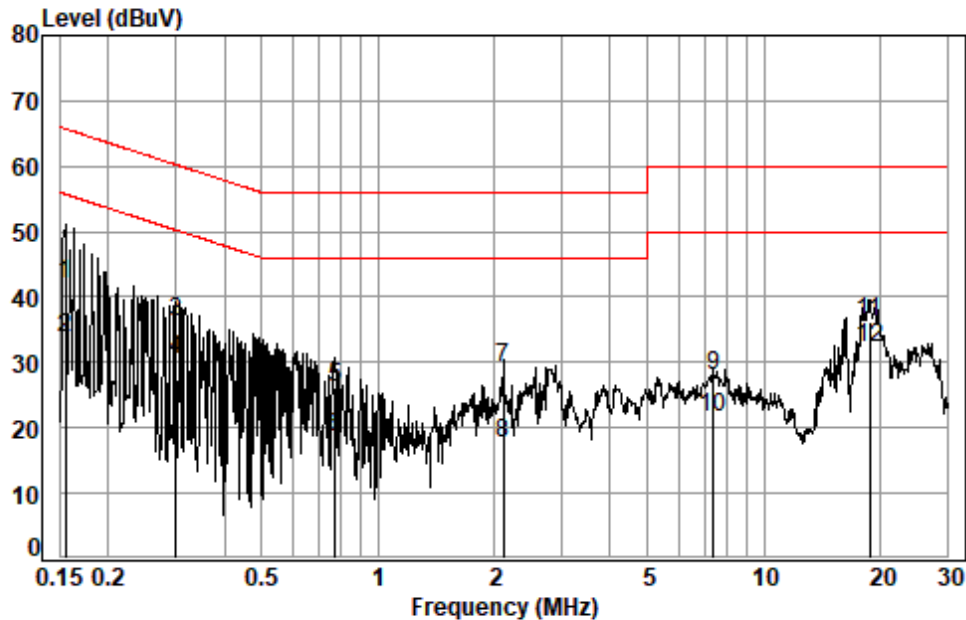

Site : Shielding Room
Condition: Line
Job No. : 02331AT/02332AT
Test mode: 07

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1548	0.02	9.89	31.97	41.88	65.74	-23.86	QP
2	0.1548	0.02	9.89	23.82	33.73	55.74	-22.01	Average
3	0.3003	0.03	10.01	26.17	36.21	60.24	-24.03	QP
4	0.3003	0.03	10.01	20.46	30.50	50.24	-19.74	Average
5	0.7752	0.05	10.02	15.95	26.02	56.00	-29.98	QP
6	0.7752	0.05	10.02	8.51	18.58	46.00	-27.42	Average
7	2.1101	0.07	10.01	19.00	29.08	56.00	-26.92	QP
8	2.1101	0.07	10.01	7.58	17.66	46.00	-28.34	Average
9	7.4071	0.13	10.12	17.78	28.03	60.00	-31.97	QP
10	7.4071	0.13	10.12	11.28	21.53	50.00	-28.47	Average
11 *	18.8205	0.26	10.21	25.83	36.30	60.00	-23.70	QP
12 *	18.8205	0.26	10.21	21.73	32.20	50.00	-17.80	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR230700233114

Page: 18 of 403

Test Mode: 07; Line: Neutral Line

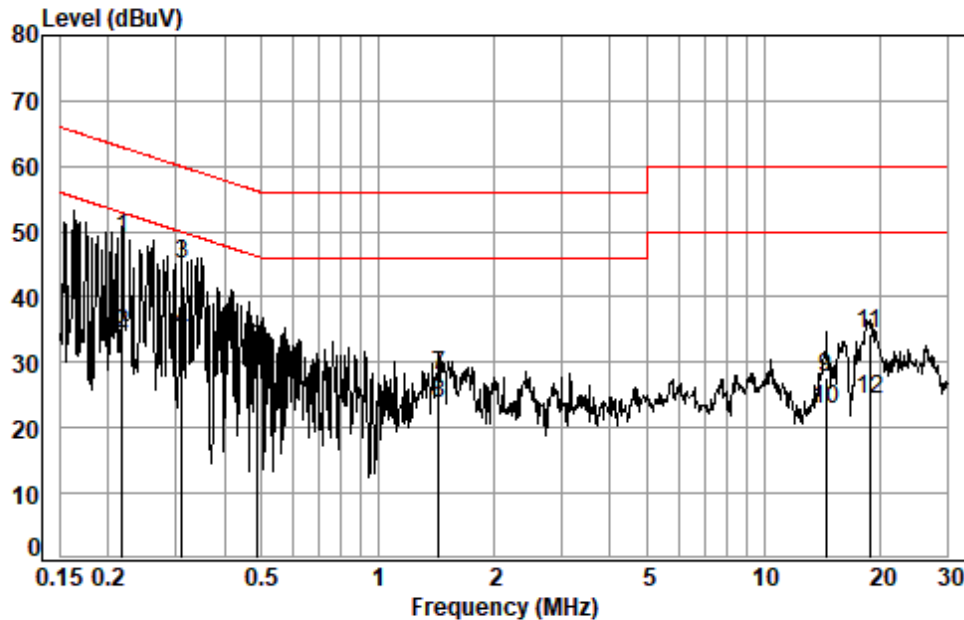

Site : Shielding Room
Condition: Neutral
Job No. : 02331AT/02332AT
Test mode: 07

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 *	0.2174	0.03	9.92	39.14	49.09	62.92	-13.83	QP
2	0.2174	0.03	9.92	24.52	34.47	52.92	-18.45	Average
3	0.3116	0.03	9.91	35.22	45.16	59.93	-14.77	QP
4 *	0.3116	0.03	9.91	24.66	34.60	49.93	-15.33	Average
5	0.4837	0.04	9.92	22.01	31.97	56.27	-24.30	QP
6	0.4837	0.04	9.92	19.79	29.75	46.27	-16.52	Average
7	1.4409	0.06	9.96	18.09	28.11	56.00	-27.89	QP
8	1.4409	0.06	9.96	13.84	23.86	46.00	-22.14	Average
9	14.5171	0.22	10.24	17.37	27.83	60.00	-32.17	QP
10	14.5171	0.22	10.24	12.27	22.73	50.00	-27.27	Average
11	18.8205	0.26	10.27	23.84	34.37	60.00	-25.63	QP
12	18.8205	0.26	10.27	13.72	24.25	50.00	-25.75	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2 Duty Cycle

Test Requirement ANSI C63.10 (2013) SECTION 12.2

Test Method: ANSI C63.10 (2013) SECTION 12.2

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 45 % RH Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

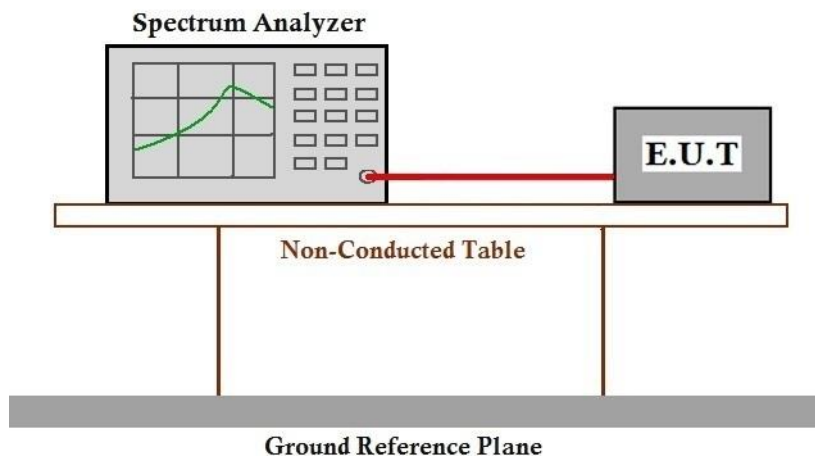

7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.3 99% Bandwidth

Test Requirement ANSI C63.10 (2013) Section 12.4.2

Test Method: ANSI C63.10 (2013) Section 12.4.2

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 45 % RH Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

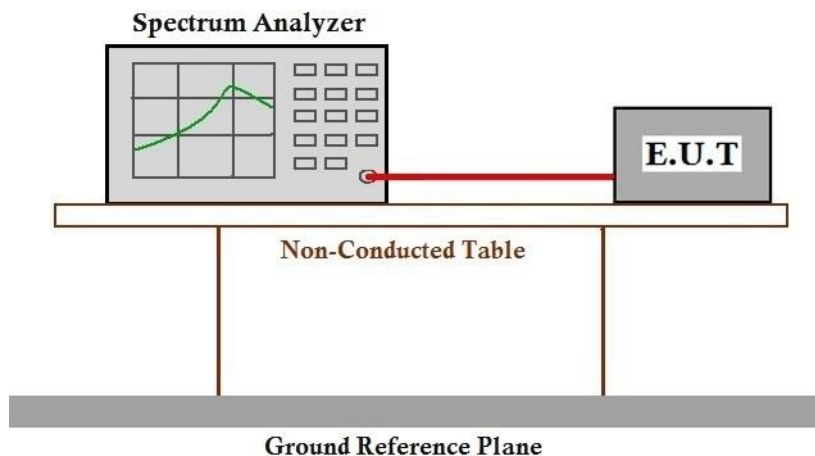

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.4.1

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 45 % RH Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

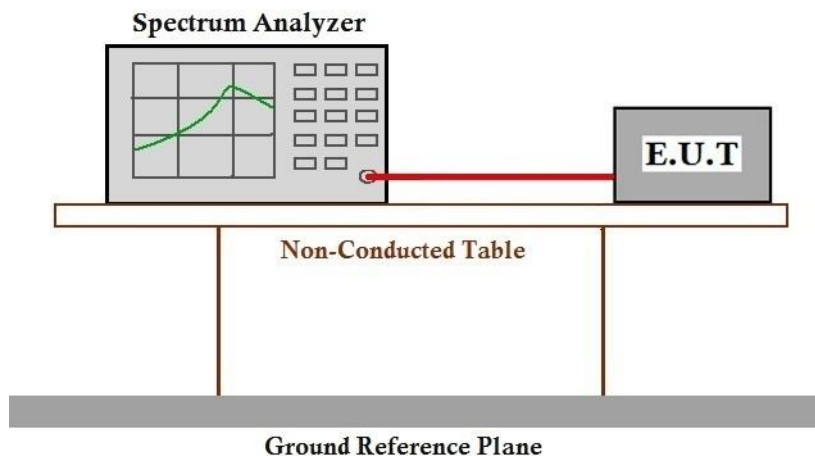

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.3

Limit:

Device Type	EIRP Limit	EIRP PSD Limit
Standard power access point	≤ 36 dBm	≤ 23 dBm/MHz
VLP Device	≤ 14 dBm	≤ -5 dBm/MHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C

Humidity: 45 % RH


Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.5.3 Test Setup Diagram

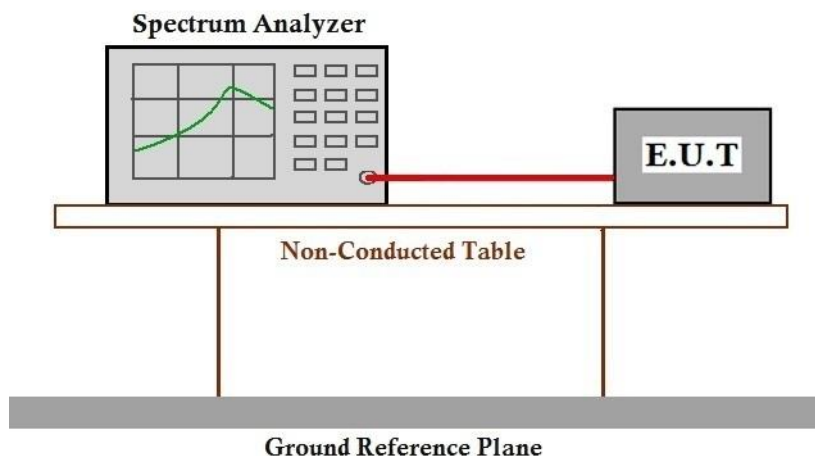

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.5

Limit:

Device Type	EIRP Limit	EIRP PSD Limit
Standard power access point	≤ 36 dBm	≤ 23 dBm/MHz
VLP Device	14dBm	≤ -5 dBm/MHz

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C

Humidity: 45 % RH


Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.6.3 Test Setup Diagram

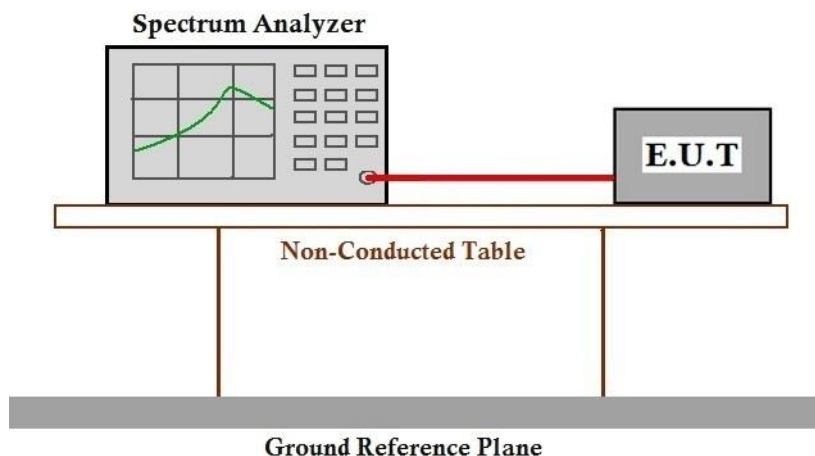

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24.2 °C

Humidity: 47.3 % RH


Atmospheric Pressure: 995 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.7.3 Test Setup Diagram

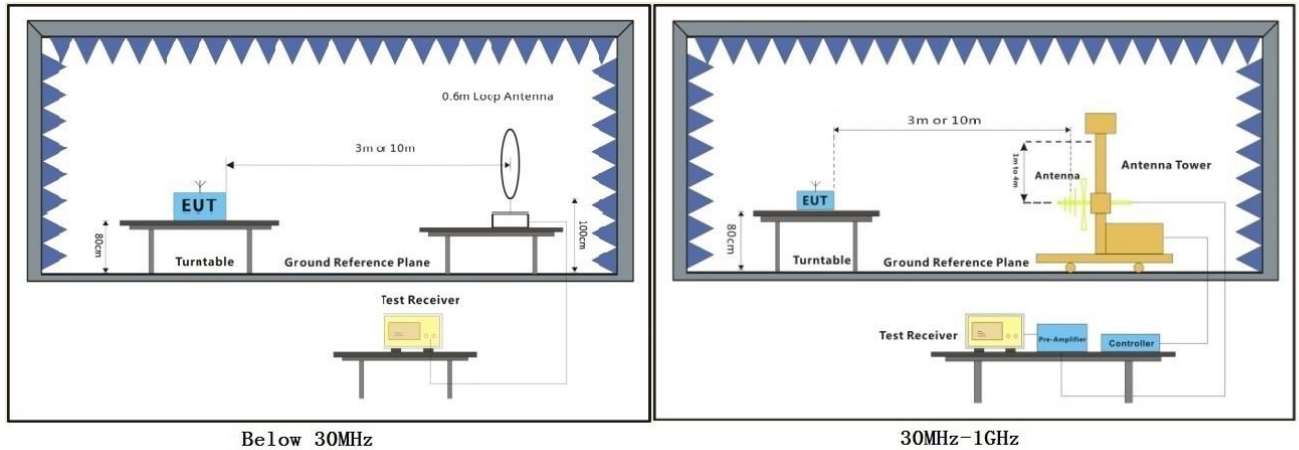

Below 30MHz

30MHz-1GHz



7.7.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Test Mode: 07; Polarity: Horizontal

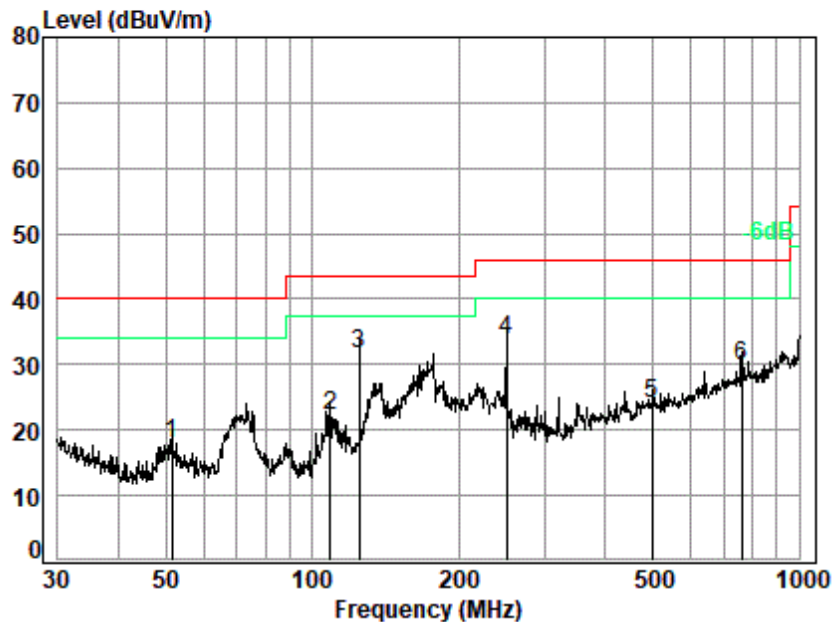


Site : chamber
Condition: 3m HORIZONTAL
Job No. : 02331AT
Test Mode: 07
: External

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Line	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	51.48	12.53	0.84	27.73	32.30	17.94	40.00 -22.06 QP
2	109.03	12.00	1.24	27.55	36.55	22.24	43.50 -21.26 QP
3 q	125.01	10.98	1.33	27.48	46.87	31.70	43.50 -11.80 QP
4	250.30	17.24	1.95	26.96	41.42	33.65	46.00 -12.35 QP
5	499.42	22.90	2.89	27.56	25.79	24.02	46.00 -21.98 QP
6	763.38	26.52	3.71	27.57	27.28	29.94	46.00 -16.06 QP



Test Mode: 07; Polarity: Vertical

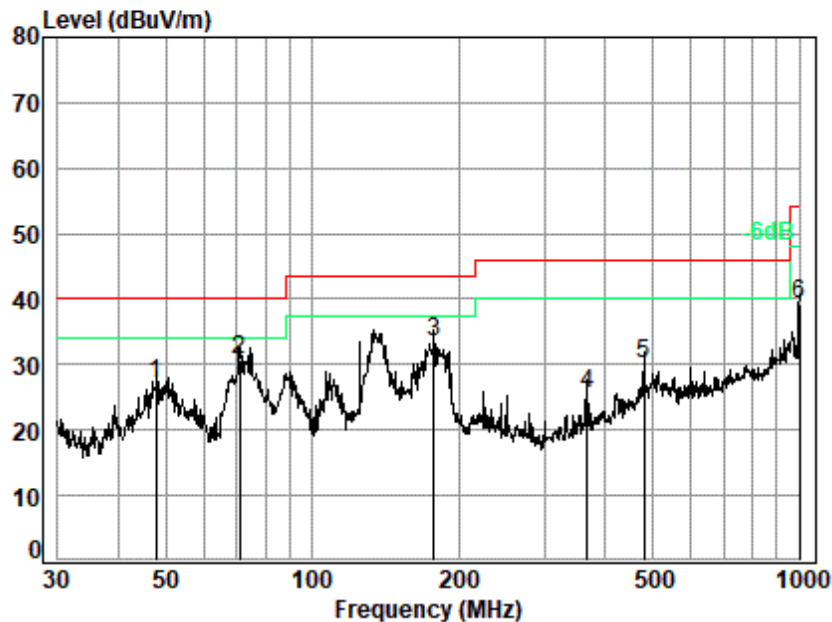

Site : chamber
Condition: 3m VERTICAL
Job No. : 02331AT
Test Mode: 07
: External

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Line	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	47.83	13.36	0.81	27.74	40.53	26.96	40.00 -13.04 QP
2 q	70.83	10.57	1.00	27.67	46.75	30.65	40.00 -9.35 QP
3	178.13	14.01	1.61	27.26	45.05	33.41	43.50 -10.09 QP
4	366.82	20.35	2.42	27.02	29.93	25.68	46.00 -20.32 QP
5	480.53	22.75	2.82	27.48	31.98	30.07	46.00 -15.93 QP
6	1000.00	28.26	4.35	26.05	32.58	39.14	54.00 -14.86 QP



7.8 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1GHz	500	3
1. Any emission outside the 5925-7125 MHz frequency band shall not exceed -27 dBm/MHz e.i.r.p. spectral density 2. For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.		

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 24.2 °C

Humidity: 55.0 % RH


Atmospheric Pressure: 995 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.8.3 Test Setup Diagram

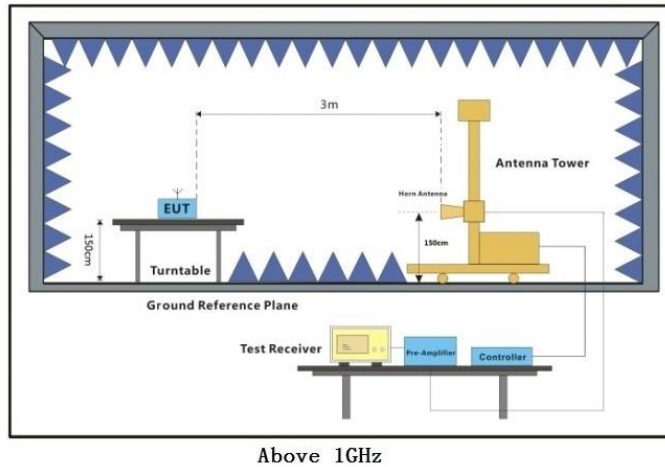

7.8.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

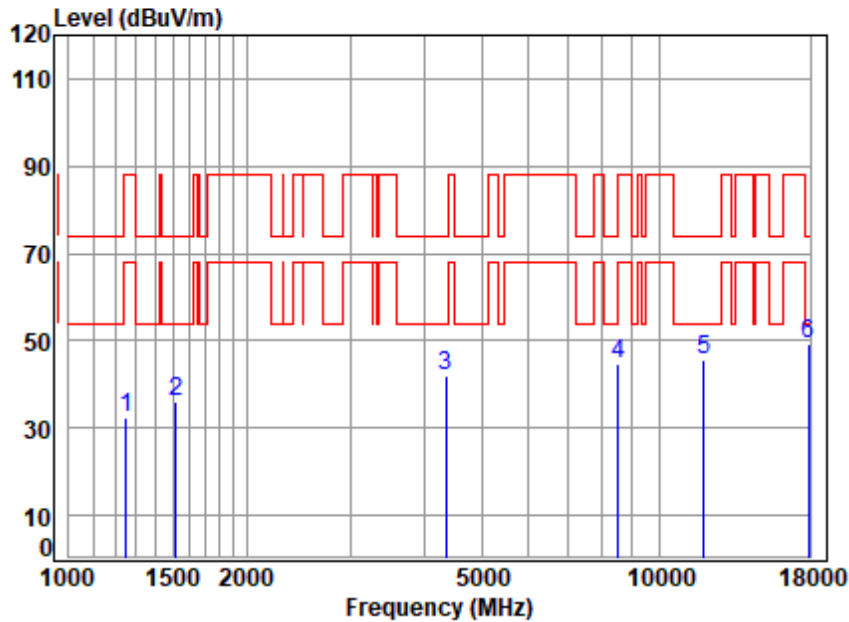


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 5955 TX RSE
Note : 6E WIFI 11AX20
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	65.16	32.42	88.20	-55.78	peak
2	1516.210	4.06	26.86	61.66	66.64	35.90	74.00	-38.10	peak
3	4354.454	7.08	34.44	61.50	62.05	42.07	74.00	-31.93	peak
4	8514.456	9.54	36.73	61.81	60.04	44.50	88.20	-43.70	peak
5	11910.000	11.96	37.71	62.71	58.87	45.83	74.00	-28.17	peak
6	17865.000	15.32	43.90	61.02	51.20	49.40	74.00	-24.60	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

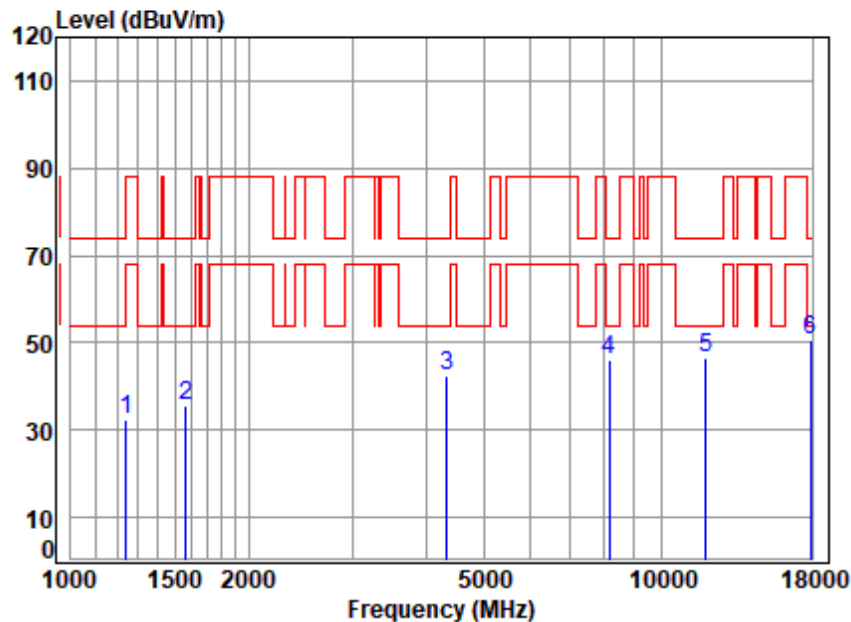


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 5955 TX RSE
Note : 6E WIFI 11AX20
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	65.31	32.47	88.20	-55.73	peak
2	1565.191	4.14	26.94	61.68	66.01	35.41	74.00	-38.59	peak
3	4341.886	7.07	34.34	61.49	62.32	42.24	74.00	-31.76	peak
4	8153.195	9.19	36.51	61.69	62.08	46.09	74.00	-27.91	peak
5	11910.000	11.96	37.71	62.71	59.47	46.43	74.00	-27.57	peak
6	p17865.000	15.32	43.90	61.02	52.60	50.80	74.00	-23.20	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

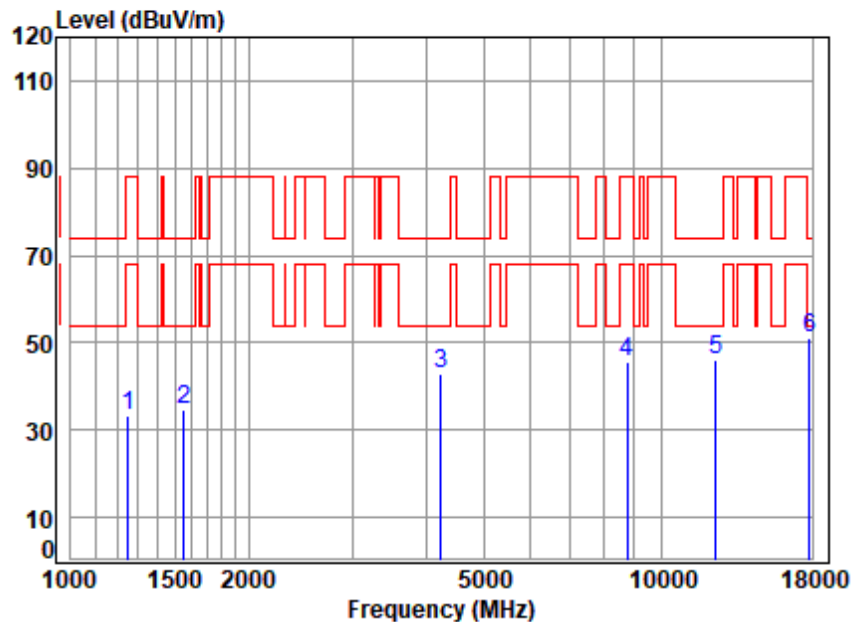


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6175 TX RSE
Note : 6E WIFI 11AX20
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.83	33.10	88.20	-55.10	peak
2	1551.677	4.12	26.99	61.67	65.08	34.52	74.00	-39.48	peak
3	4230.396	6.94	33.80	61.39	63.38	42.73	74.00	-31.27	peak
4	8764.146	9.74	36.96	61.89	60.73	45.54	88.20	-42.66	peak
5	12350.000	12.02	37.90	62.71	58.73	45.94	74.00	-28.06	peak
6	p17844.590	15.29	43.90	61.04	53.10	51.25	74.00	-22.75	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

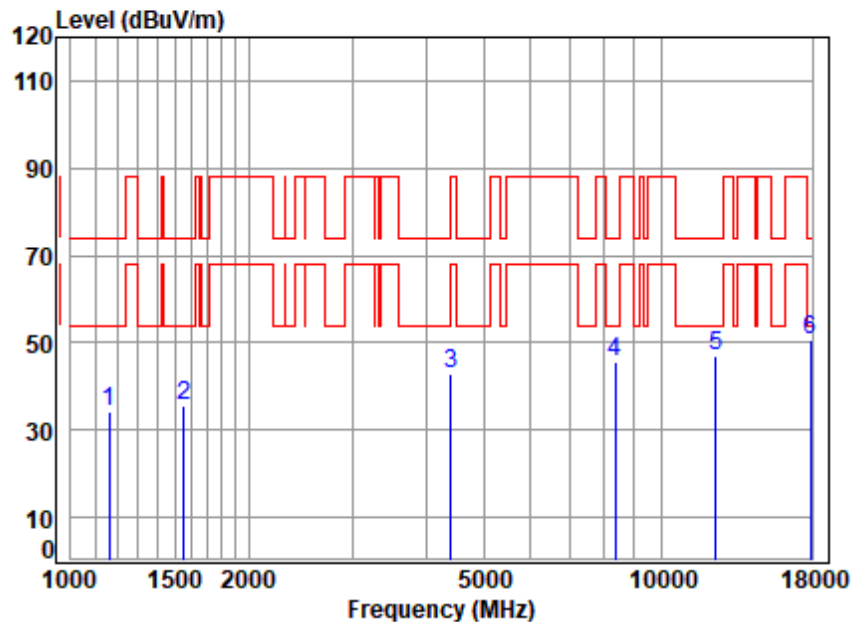


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6175 TX RSE
Note : 6E WIFI 11AX20
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1162.182	3.63	24.02	61.54	67.91	34.02	74.00	-39.98	peak
2	1551.677	4.12	26.99	61.67	65.93	35.37	74.00	-38.63	peak
3	4405.090	7.14	34.74	61.55	62.51	42.84	88.20	-45.36	peak
4	8343.918	9.38	36.70	61.76	61.11	45.43	74.00	-28.57	peak
5	12350.000	12.02	37.90	62.71	59.98	47.19	74.00	-26.81	peak
6	p17896.250	15.35	43.90	60.99	52.33	50.59	74.00	-23.41	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

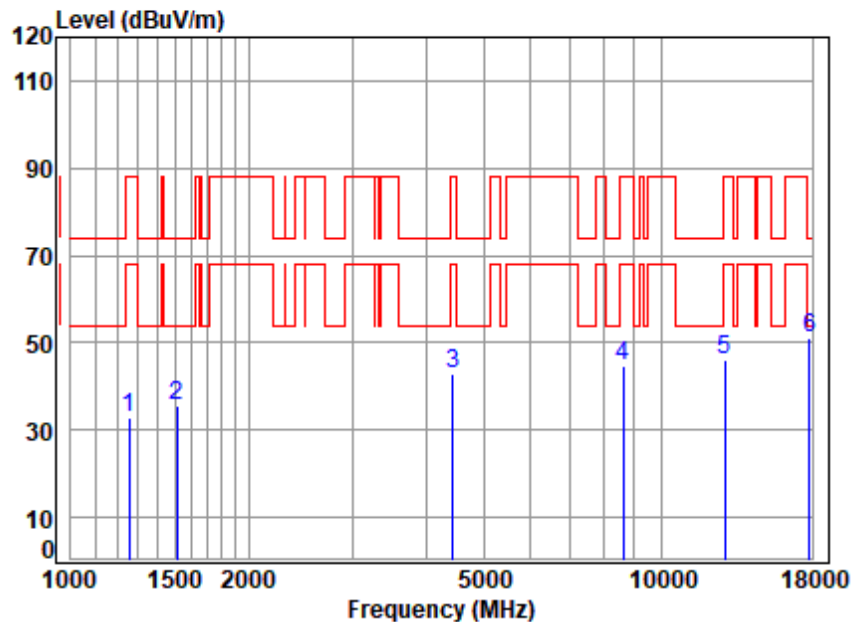


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6415 TX RSE
Note : 6E WIFI 11AX20
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	65.53	32.77	88.20	-55.43	peak
2	1511.833	4.06	26.85	61.66	66.23	35.48	74.00	-38.52	peak
3	4443.453	7.19	34.28	61.58	62.81	42.70	88.20	-45.50	peak
4	8613.468	9.62	36.90	61.85	60.00	44.67	88.20	-43.53	peak
5	12830.000	12.16	38.13	62.68	58.60	46.21	88.20	-41.99	peak
6	p17844.590	15.29	43.90	61.04	53.05	51.20	74.00	-22.80	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

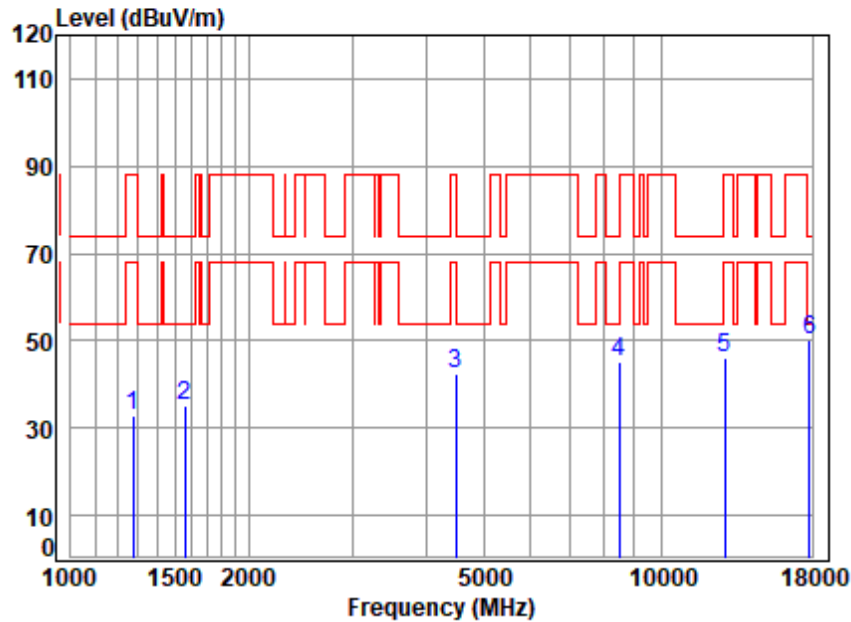


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6415 TX RSE
Note : 6E WIFI 11AX20
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.78	24.95	61.58	65.53	32.68	88.20	-55.52	peak
2	1560.673	4.13	26.96	61.68	65.64	35.05	74.00	-38.95	peak
3	4495.125	7.24	33.66	61.62	63.32	42.60	88.20	-45.60	peak
4	8489.882	9.52	36.68	61.81	61.00	45.39	74.00	-28.61	peak
5	12830.000	12.16	38.13	62.68	58.40	46.01	88.20	-42.19	peak
6	p17844.590	15.29	43.90	61.04	51.88	50.03	74.00	-23.97	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:Low

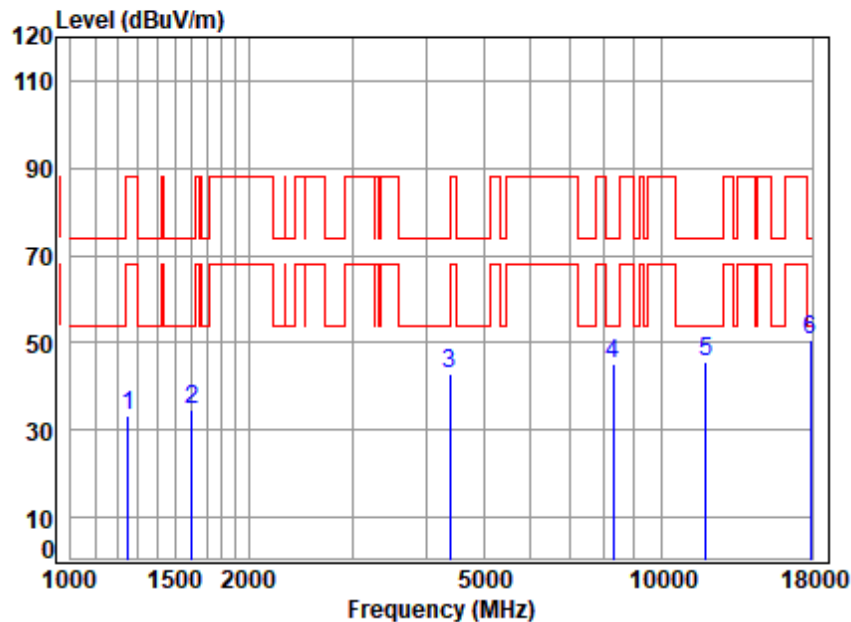


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 5955 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	65.91	33.17	88.20	-55.03	peak
2	1601.804	4.19	26.78	61.69	65.53	34.81	74.00	-39.19	peak
3	4379.699	7.11	34.64	61.52	62.83	43.06	74.00	-30.94	peak
4	8295.823	9.33	36.70	61.74	61.06	45.35	74.00	-28.65	peak
5	11910.000	11.96	37.71	62.71	58.44	45.40	74.00	-28.60	peak
6	p17865.000	15.32	43.90	61.02	52.38	50.58	74.00	-23.42	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:Low

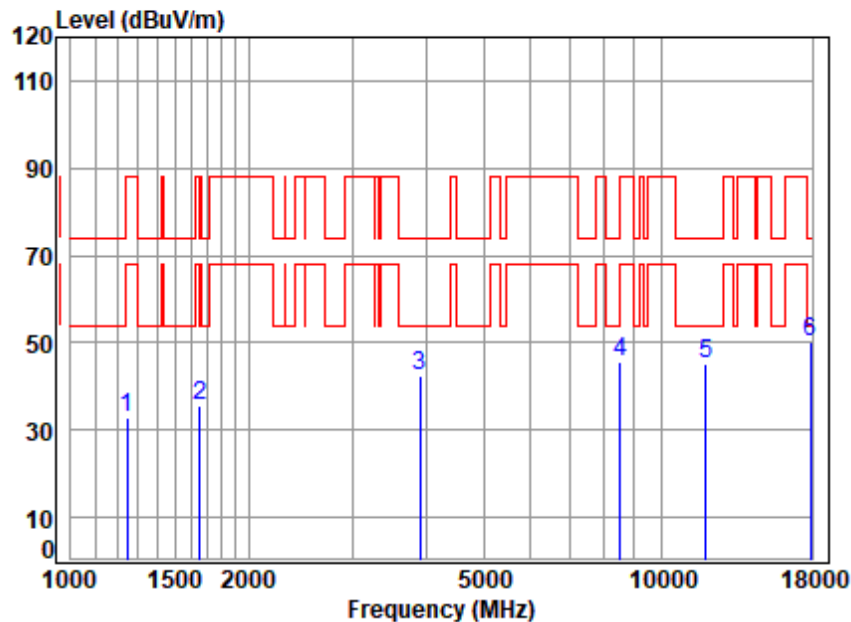


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 5955 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.74	32.95	88.20	-55.25	peak
2	1653.550	4.26	26.29	61.70	66.54	35.39	88.20	-52.81	peak
3	3901.516	6.63	33.79	61.19	63.03	42.26	74.00	-31.74	peak
4	8514.456	9.54	36.73	61.81	61.31	45.77	88.20	-42.43	peak
5	11910.000	11.96	37.71	62.71	58.34	45.30	74.00	-28.70	peak
6	p17865.000	15.32	43.90	61.02	52.03	50.23	74.00	-23.77	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:middle

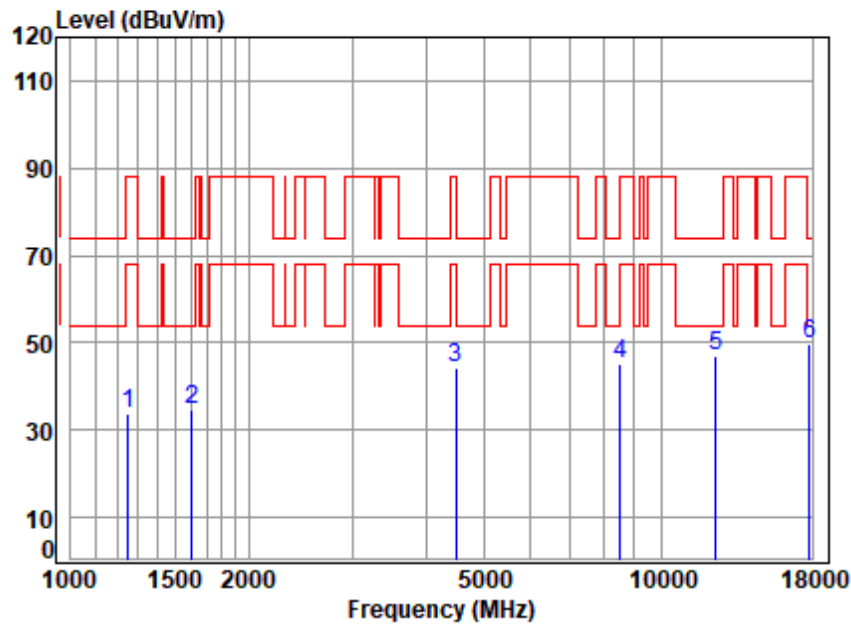


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6175 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	66.30	33.56	88.20	-54.64	peak
2	1606.441	4.19	26.74	61.69	65.49	34.73	74.00	-39.27	peak
3	4495.125	7.24	33.66	61.62	64.94	44.22	88.20	-43.98	peak
4	8514.456	9.54	36.73	61.81	60.64	45.10	88.20	-43.10	peak
5	12350.000	12.02	37.90	62.71	59.81	47.02	74.00	-26.98	peak
6	p17844.590	15.29	43.90	61.04	51.46	49.61	74.00	-24.39	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:middle

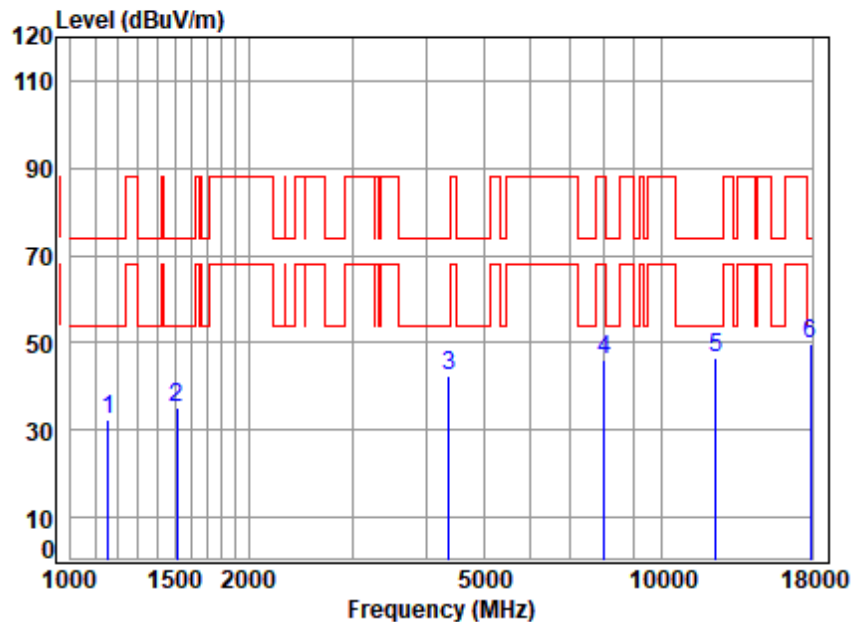


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6175 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1158.828	3.63	23.99	61.54	66.34	32.42	74.00	-41.58	peak
2	1511.833	4.06	26.85	61.66	65.88	35.13	74.00	-38.87	peak
3	4367.058	7.10	34.54	61.51	62.20	42.33	74.00	-31.67	peak
4	8013.020	9.04	36.40	61.64	62.09	45.89	88.20	-42.31	peak
5	12350.000	12.02	37.90	62.71	59.28	46.49	74.00	-27.51	peak
6	p17896.250	15.35	43.90	60.99	51.58	49.84	74.00	-24.16	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:High

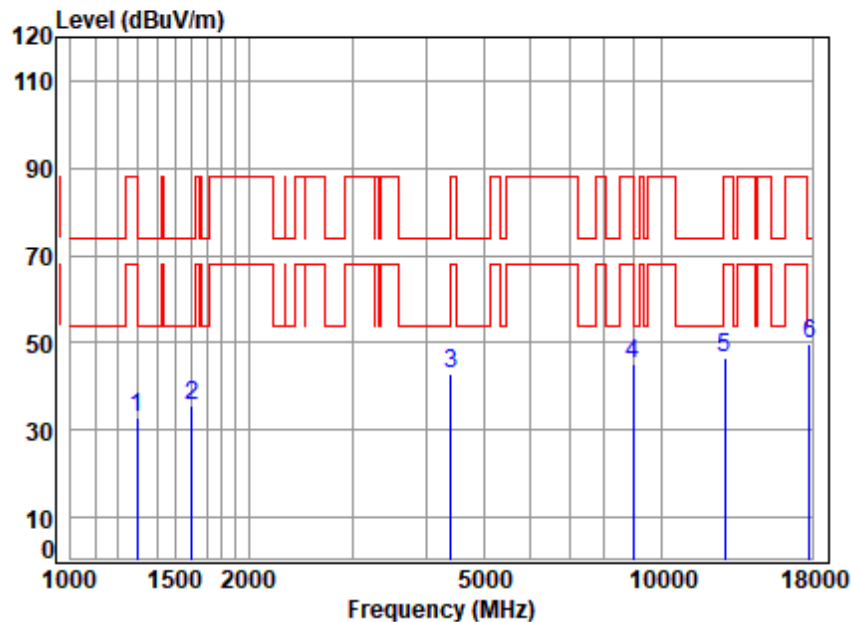


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6415 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	3.81	24.82	61.59	65.95	32.99	88.20	-55.21	peak
2	1606.441	4.19	26.74	61.69	66.46	35.70	74.00	-38.30	peak
3	4405.090	7.14	34.74	61.55	62.63	42.96	88.20	-45.24	peak
4	8969.161	9.90	36.96	61.96	60.20	45.10	88.20	-43.10	peak
5	12830.000	12.16	38.13	62.68	58.80	46.41	88.20	-41.79	peak
6	p17844.590	15.29	43.90	61.04	51.76	49.91	74.00	-24.09	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:High

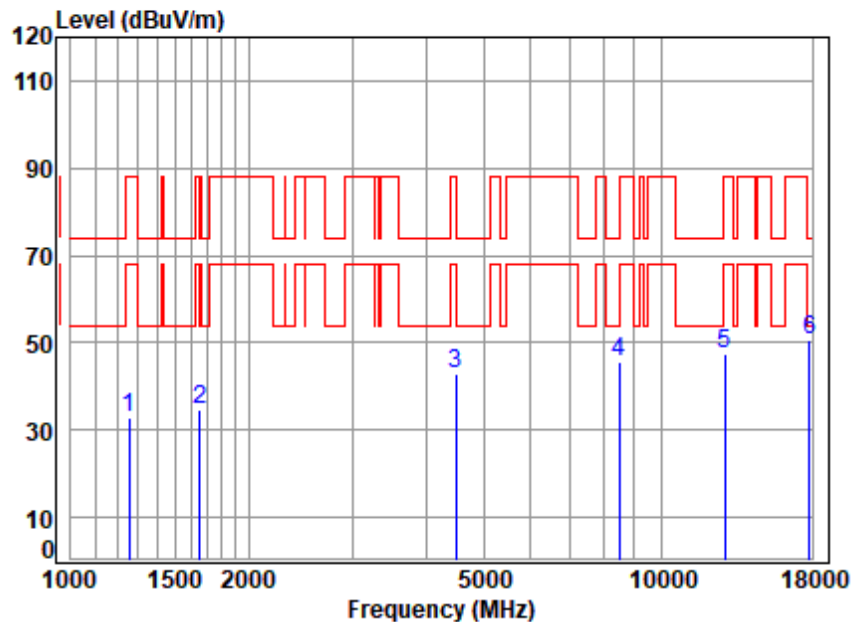


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6415 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	65.64	32.88	88.20	-55.32	peak
2	1653.550	4.26	26.29	61.70	65.80	34.65	88.20	-53.55	peak
3	4495.125	7.24	33.66	61.62	63.56	42.84	88.20	-45.36	peak
4	8489.882	9.52	36.68	61.81	61.25	45.64	74.00	-28.36	peak
5	12830.000	12.16	38.13	62.68	59.94	47.55	88.20	-40.65	peak
6	p17793.090	15.23	43.89	61.09	52.59	50.62	74.00	-23.38	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:20MHz; Channel:Low;

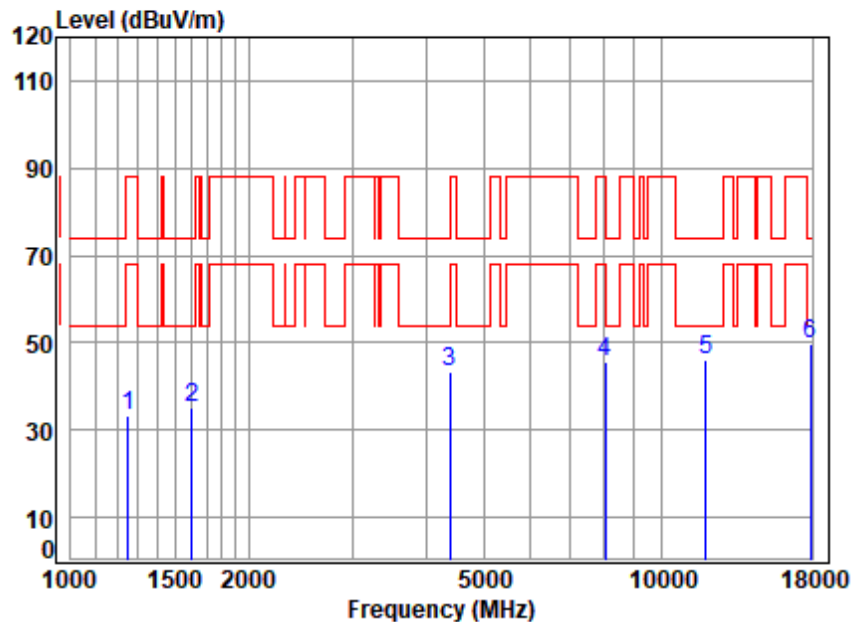


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 5955 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	66.21	33.48	88.20	-54.72	peak
2	1606.441	4.19	26.74	61.69	65.72	34.96	74.00	-39.04	peak
3	4379.699	7.11	34.64	61.52	63.20	43.43	74.00	-30.57	peak
4	8036.214	9.07	36.40	61.65	61.75	45.57	74.00	-28.43	peak
5	11910.000	11.96	37.71	62.71	59.02	45.98	74.00	-28.02	peak
6	p17865.000	15.32	43.90	61.02	51.52	49.72	74.00	-24.28	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:20MHz; Channel:Low;

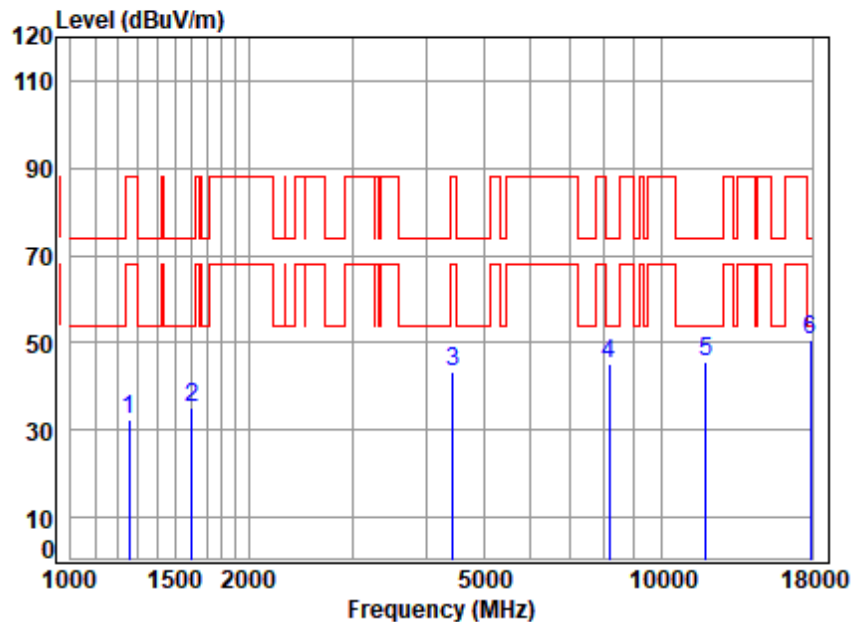


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 5955 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	65.38	32.62	88.20	-55.58	peak
2	1606.441	4.19	26.74	61.69	65.92	35.16	74.00	-38.84	peak
3	4443.453	7.19	34.28	61.58	63.47	43.36	88.20	-44.84	peak
4	8176.795	9.21	36.55	61.70	61.27	45.33	74.00	-28.67	peak
5	11910.000	11.96	37.71	62.71	58.58	45.54	74.00	-28.46	peak
6	17865.000	15.32	43.90	61.02	52.61	50.81	74.00	-23.19	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:20MHz; Channel:middle;

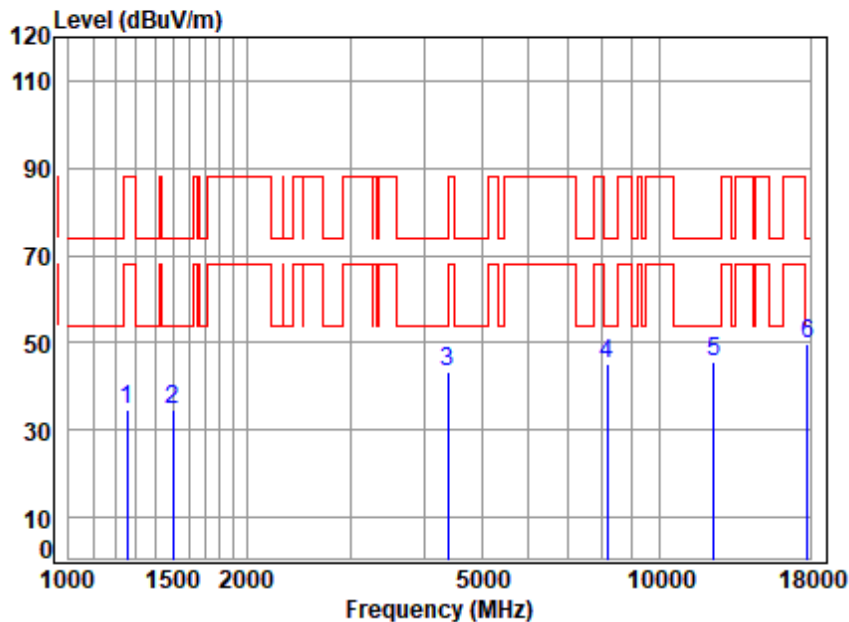


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6175 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	67.31	34.55	88.20	-53.65	peak
2	1503.119	4.04	26.81	61.66	65.62	34.81	74.00	-39.19	peak
3	4392.376	7.13	34.74	61.53	63.11	43.45	74.00	-30.55	peak
4	8153.195	9.19	36.51	61.69	61.01	45.02	74.00	-28.98	peak
5	12350.000	12.02	37.90	62.71	58.33	45.54	74.00	-28.46	peak
6	p17793.090	15.23	43.89	61.09	51.64	49.67	74.00	-24.33	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:20MHz; Channel:middle;

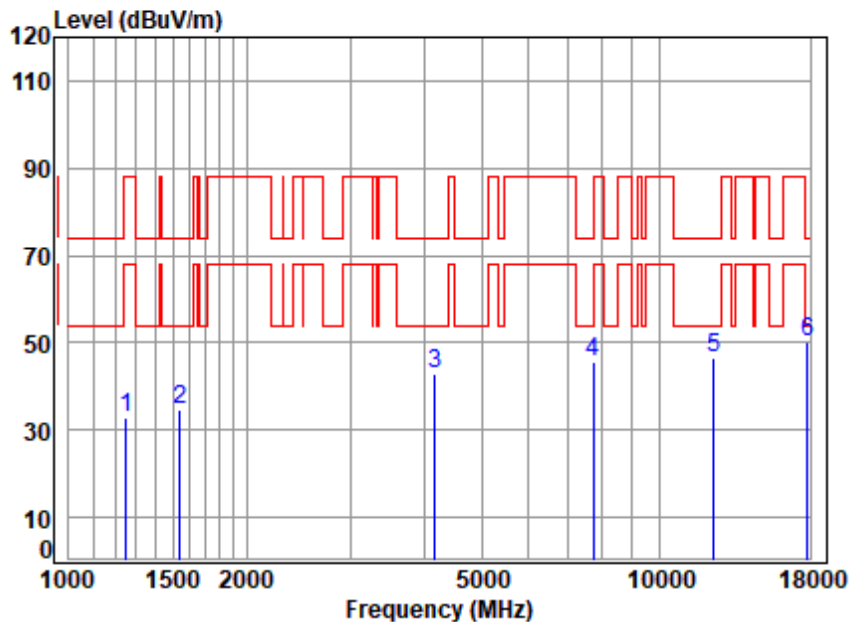


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6175 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	65.42	32.68	88.20	-55.52	peak
2	1542.733	4.10	26.97	61.67	65.49	34.89	74.00	-39.11	peak
3	4169.698	6.86	33.80	61.33	63.52	42.85	74.00	-31.15	peak
4	7717.518	8.68	36.14	61.78	62.64	45.68	74.00	-28.32	peak
5	12350.000	12.02	37.90	62.71	59.35	46.56	74.00	-27.44	peak
6	p17844.590	15.29	43.90	61.04	52.23	50.38	74.00	-23.62	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:20MHz; Channel:High;

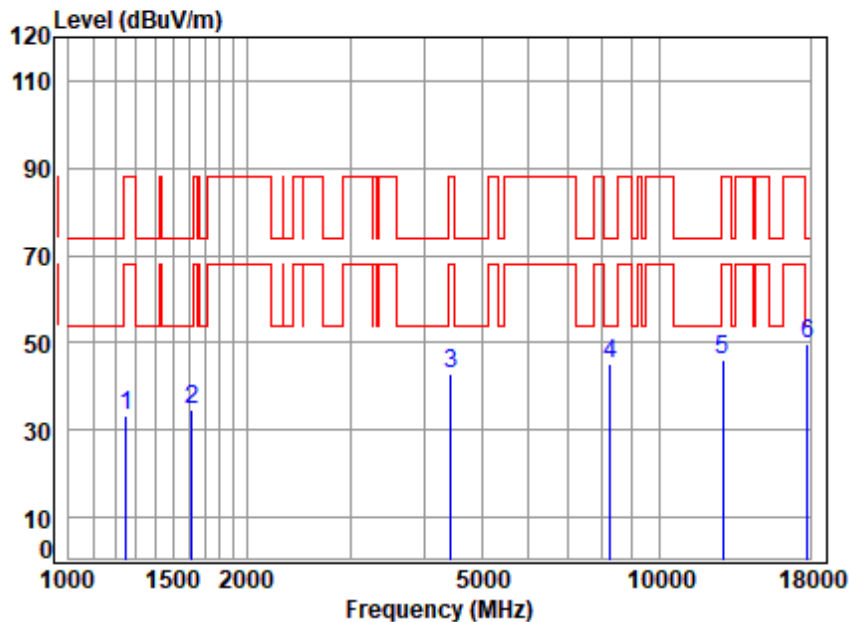


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6415 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	66.24	33.50	88.20	-54.70	peak
2	1615.754	4.21	26.64	61.69	65.50	34.66	74.00	-39.34	peak
3	4430.628	7.17	34.43	61.57	62.84	42.87	88.20	-45.33	peak
4	8248.005	9.28	36.70	61.72	60.90	45.16	74.00	-28.84	peak
5	12830.000	12.16	38.13	62.68	58.29	45.90	88.20	-42.30	peak
6	p17793.090	15.23	43.89	61.09	51.50	49.53	74.00	-24.47	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:20MHz; Channel:High;

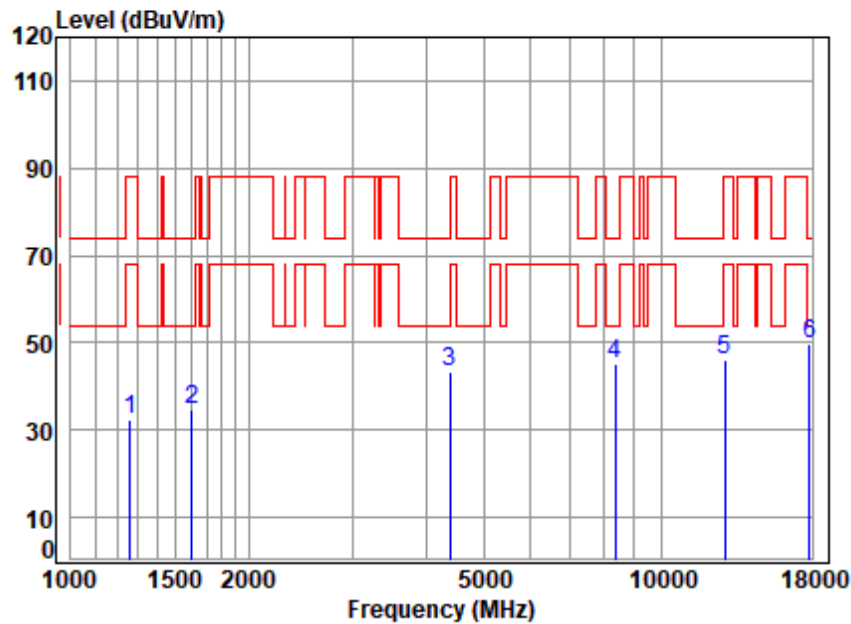


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6415 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.58	65.36	32.58	88.20	-55.62	peak
2	1606.441	4.19	26.74	61.69	65.61	34.85	74.00	-39.15	peak
3	4379.699	7.11	34.64	61.52	63.20	43.43	74.00	-30.57	peak
4	8368.069	9.40	36.70	61.76	60.82	45.16	74.00	-28.84	peak
5	12830.000	12.16	38.13	62.68	58.57	46.18	88.20	-42.02	peak
6	p17844.590	15.29	43.90	61.04	51.61	49.76	74.00	-24.24	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:40MHz; Channel:Low;

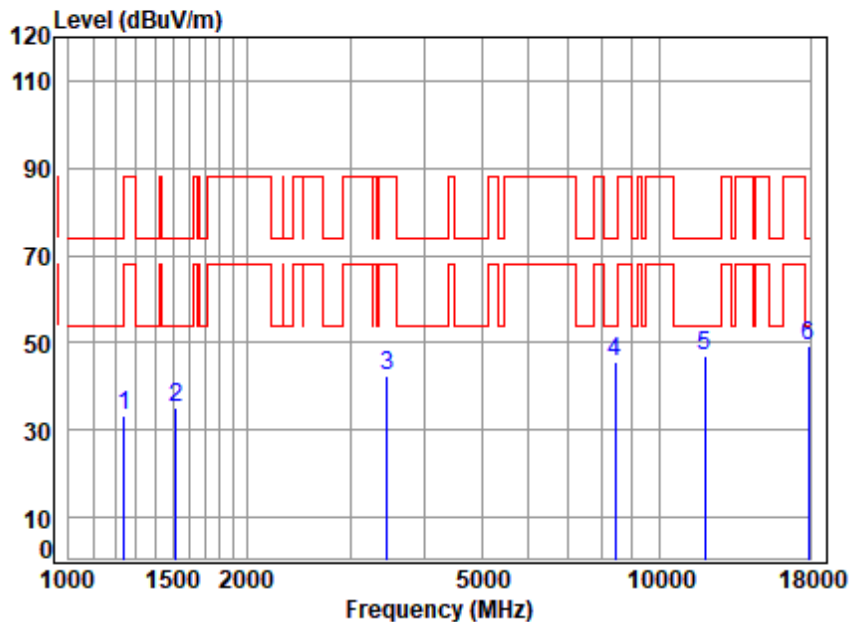


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 5965 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	65.99	33.15	88.20	-55.05	peak
2	1516.210	4.06	26.86	61.66	65.81	35.07	74.00	-38.93	peak
3	3455.508	6.48	31.78	61.30	65.25	42.21	88.20	-45.99	peak
4	8416.584	9.45	36.67	61.78	61.14	45.48	74.00	-28.52	peak
5	11930.000	11.96	37.73	62.71	60.15	47.13	74.00	-26.87	peak
6	17895.000	15.35	43.90	60.99	51.14	49.40	74.00	-24.60	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:40MHz; Channel:Low;

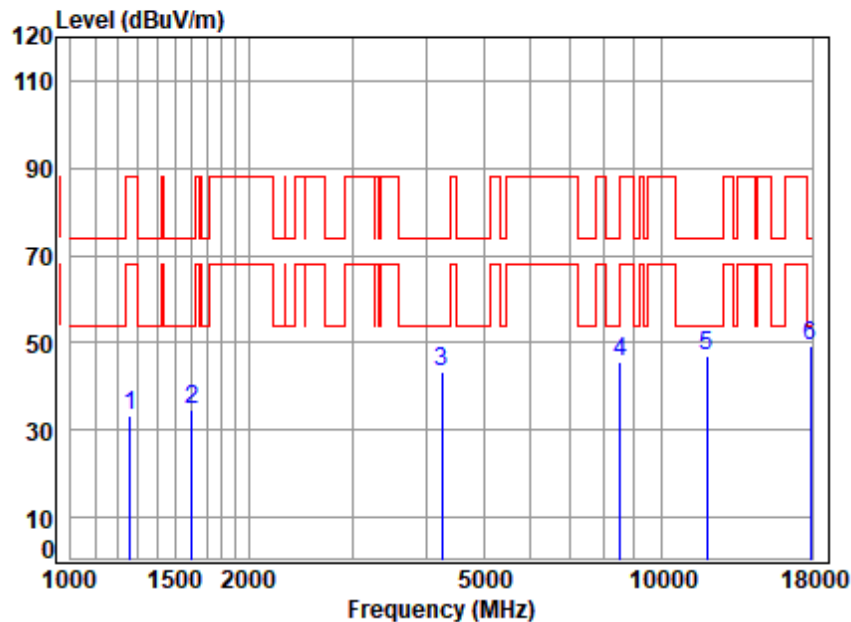


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 5965 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.58	66.16	33.38	88.20	-54.82	peak
2	1601.804	4.19	26.78	61.69	65.39	34.67	74.00	-39.33	peak
3	4254.921	6.96	33.82	61.41	63.89	43.26	74.00	-30.74	peak
4	8514.456	9.54	36.73	61.81	61.15	45.61	88.20	-42.59	peak
5	11930.000	11.96	37.73	62.71	60.09	47.07	74.00	-26.93	peak
6	17895.000	15.35	43.90	60.99	50.82	49.08	74.00	-24.92	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:40MHz; Channel:middle;

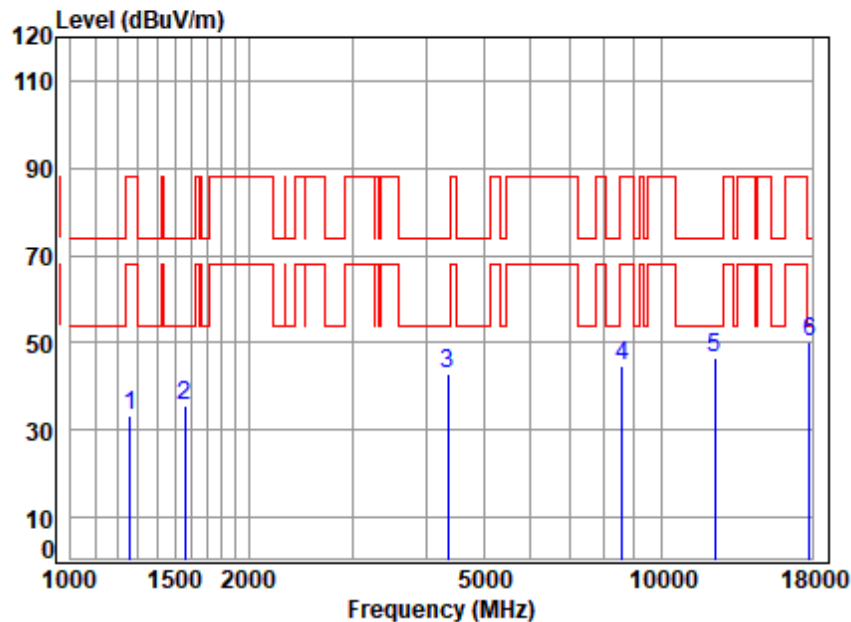


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6165 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.58	65.94	33.16	88.20	-55.04	peak
2	1560.673	4.13	26.96	61.68	66.26	35.67	74.00	-38.33	peak
3	4354.454	7.08	34.44	61.50	62.83	42.85	74.00	-31.15	peak
4	8588.607	9.60	36.88	61.84	60.25	44.89	88.20	-43.31	peak
5	12330.000	12.02	37.90	62.71	59.39	46.60	74.00	-27.40	peak
6	p17844.590	15.29	43.90	61.04	52.15	50.30	74.00	-23.70	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:40MHz; Channel:middle;

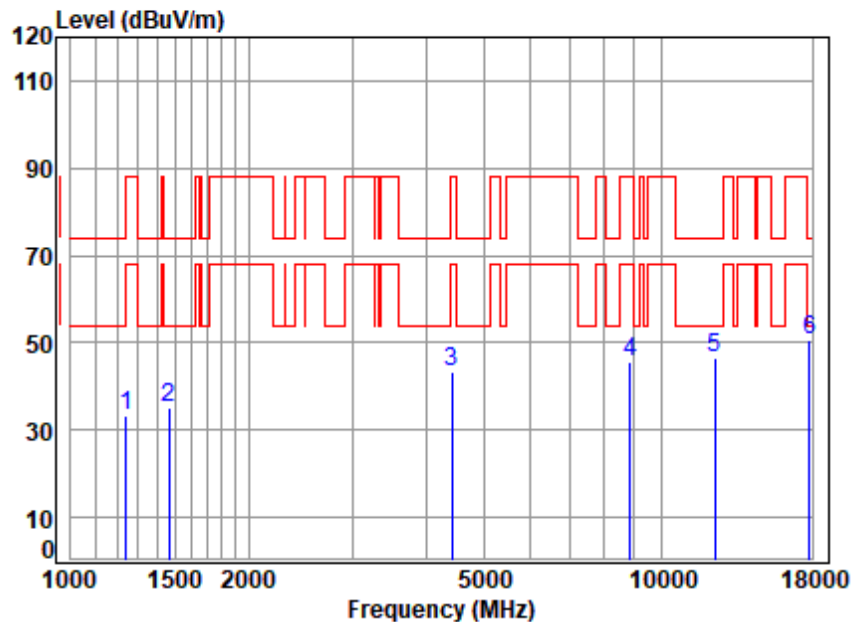


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6165 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	66.17	33.33	88.20	-54.87	peak
2	1464.522	4.00	25.81	61.65	66.90	35.06	74.00	-38.94	peak
3	4417.841	7.16	34.59	61.56	63.17	43.36	88.20	-44.84	peak
4	8866.062	9.82	37.20	61.93	60.42	45.51	88.20	-42.69	peak
5	12330.000	12.02	37.90	62.71	59.12	46.33	74.00	-27.67	peak
6	p17844.590	15.29	43.90	61.04	52.64	50.79	74.00	-23.21	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:40MHz; Channel:High;

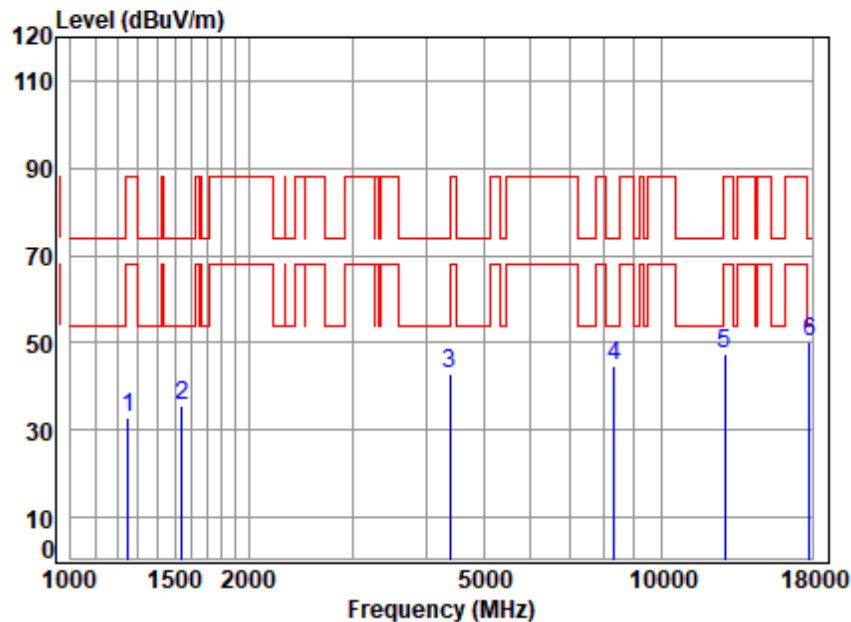


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6405 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.51	32.78	88.20	-55.42	peak
2	1542.733	4.10	26.97	61.67	66.03	35.43	74.00	-38.57	peak
3	4379.699	7.11	34.64	61.52	62.60	42.83	74.00	-31.17	peak
4	8319.836	9.35	36.70	61.75	60.55	44.85	74.00	-29.15	peak
5	12810.000	12.15	38.11	62.68	59.96	47.54	88.20	-40.66	peak
6	p17793.090	15.23	43.89	61.09	52.25	50.28	74.00	-23.72	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:40MHz; Channel:High;

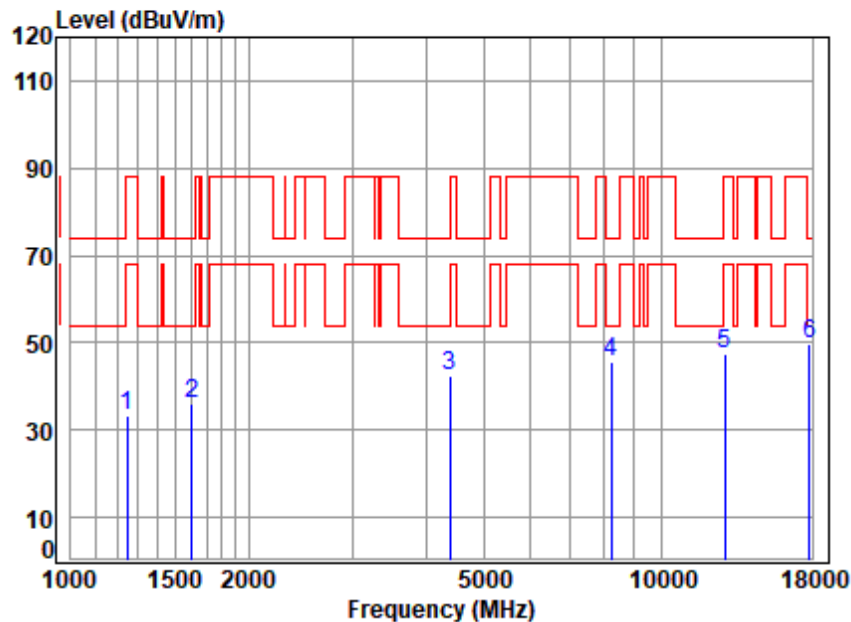


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6405 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	66.13	33.34	88.20	-54.86	peak
2	1606.441	4.19	26.74	61.69	66.62	35.86	74.00	-38.14	peak
3	4379.699	7.11	34.64	61.52	62.38	42.61	74.00	-31.39	peak
4	8224.200	9.26	36.65	61.72	61.41	45.60	74.00	-28.40	peak
5	12810.000	12.15	38.11	62.68	59.83	47.41	88.20	-40.79	peak
6	p17844.590	15.29	43.90	61.04	51.55	49.70	74.00	-24.30	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:80MHz; Channel:Low;

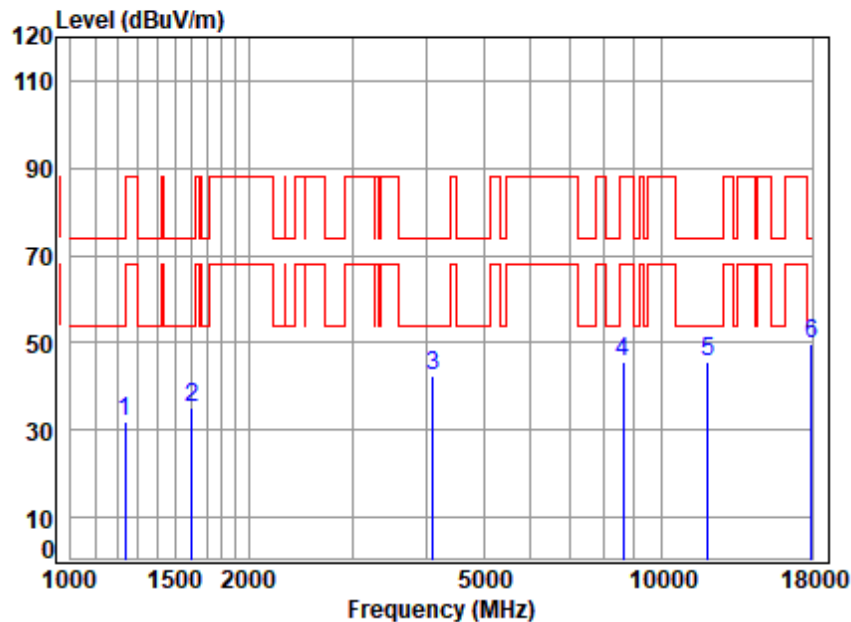


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 5985 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	65.02	32.12	74.00	-41.88	peak
2	1606.441	4.19	26.74	61.69	65.90	35.14	74.00	-38.86	peak
3	4109.872	6.79	33.16	61.28	63.58	42.25	74.00	-31.75	peak
4	8613.468	9.62	36.90	61.85	60.94	45.61	88.20	-42.59	peak
5	11970.000	11.96	37.77	62.72	58.46	45.47	74.00	-28.53	peak
6	p17955.000	15.42	44.12	60.93	51.20	49.81	74.00	-24.19	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:80MHz; Channel:Low;

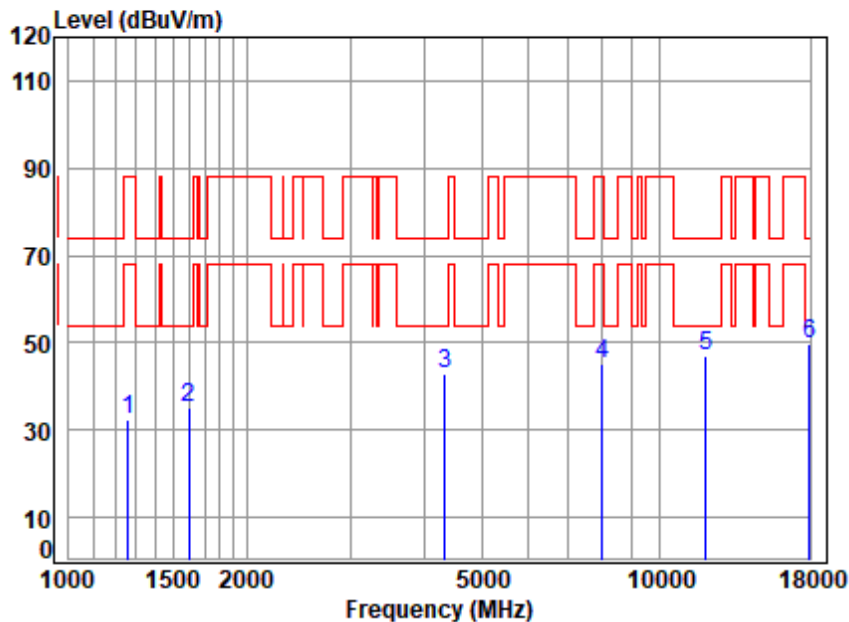


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 5985 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.58	65.23	32.45	88.20	-55.75	peak
2	1597.181	4.18	26.81	61.69	65.78	35.08	74.00	-38.92	peak
3	4329.354	7.05	34.23	61.48	62.97	42.77	74.00	-31.23	peak
4	8013.020	9.04	36.40	61.64	61.39	45.19	88.20	-43.01	peak
5	11970.000	11.96	37.77	62.72	59.90	46.91	74.00	-27.09	peak
6	17955.000	15.42	44.12	60.93	51.33	49.94	74.00	-24.06	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:80MHz; Channel:middle;

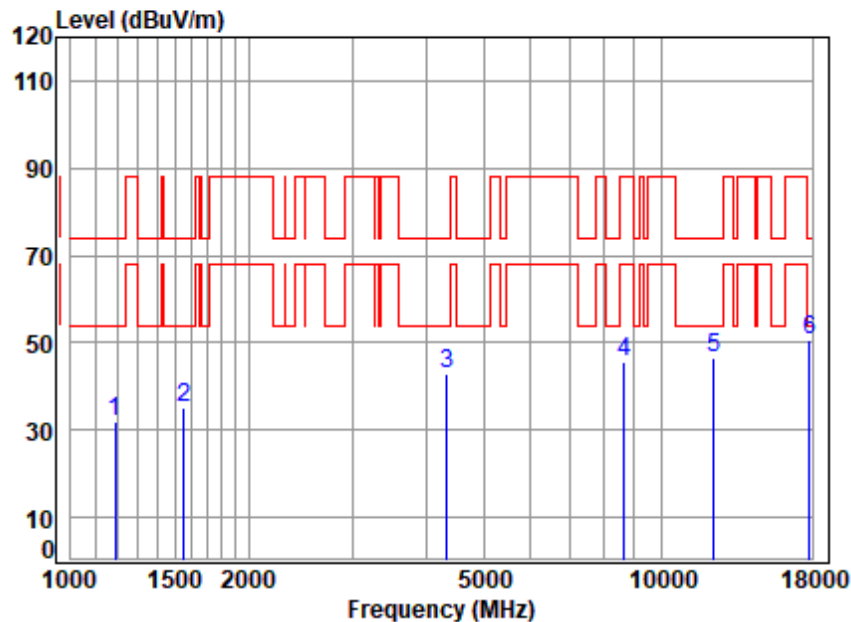


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6145 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	3.67	24.29	61.55	65.71	32.12	74.00	-41.88	peak
2	1556.169	4.12	26.98	61.67	65.74	35.17	74.00	-38.83	peak
3	4341.886	7.07	34.34	61.49	63.18	43.10	74.00	-30.90	peak
4	8638.399	9.64	36.90	61.85	60.79	45.48	88.20	-42.72	peak
5	12290.000	12.01	37.90	62.71	59.44	46.64	74.00	-27.36	peak
6	17793.090	15.23	43.89	61.09	52.41	50.44	74.00	-23.56	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:80MHz; Channel:middle;

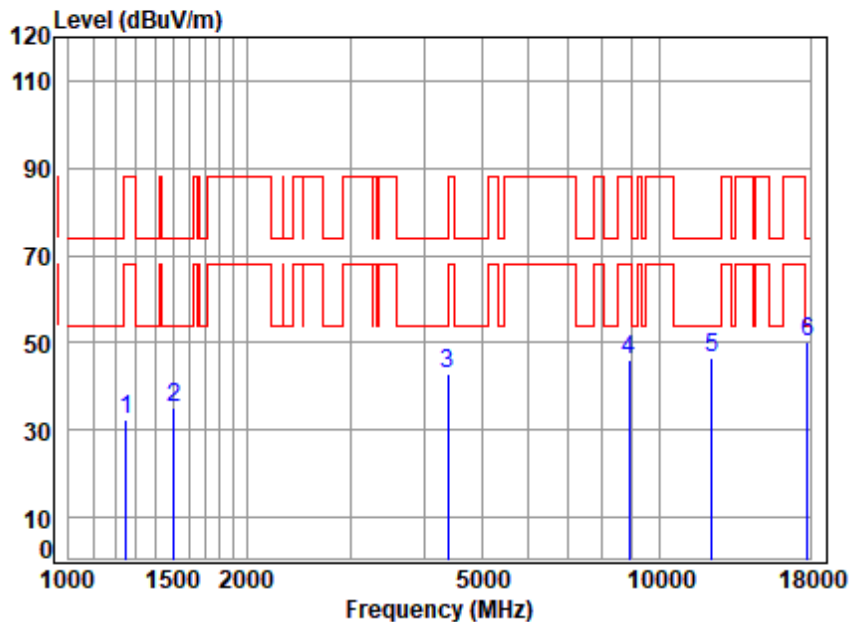


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6145 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.34	32.61	88.20	-55.59	peak
2	1507.470	4.05	26.83	61.66	65.75	34.97	74.00	-39.03	peak
3	4379.699	7.11	34.64	61.52	62.55	42.78	74.00	-31.22	peak
4	8891.725	9.84	37.20	61.93	60.84	45.95	88.20	-42.25	peak
5	12290.000	12.01	37.90	62.71	59.35	46.55	74.00	-27.45	peak
6	p17844.590	15.29	43.90	61.04	51.86	50.01	74.00	-23.99	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:80MHz; Channel:High;

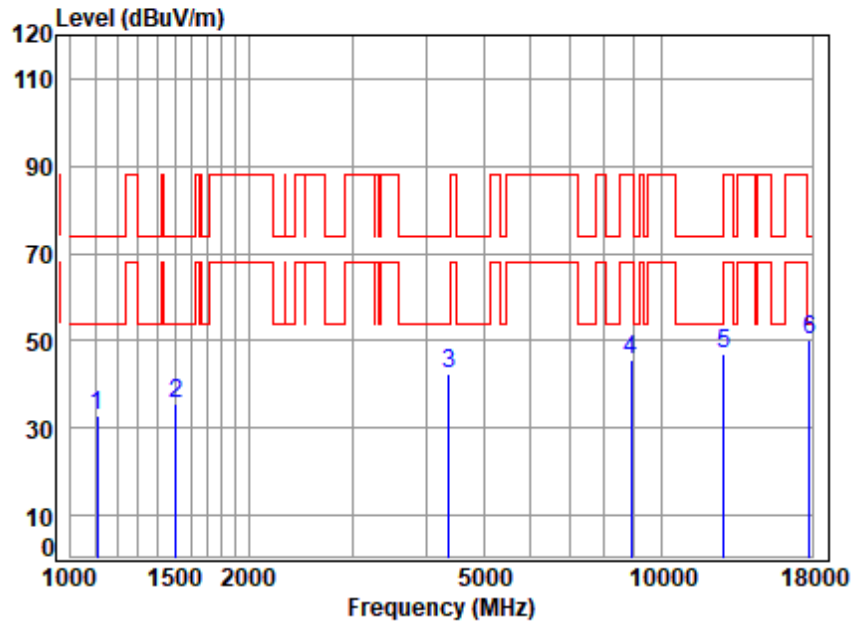


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6385 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1109.660	3.56	23.74	61.52	67.05	32.83	74.00	-41.17	peak
2	1507.470	4.05	26.83	61.66	66.55	35.77	74.00	-38.23	peak
3	4367.058	7.10	34.54	61.51	62.09	42.22	74.00	-31.78	peak
4	8891.725	9.84	37.20	61.93	60.32	45.43	88.20	-42.77	peak
5	12770.000	12.14	38.10	62.68	59.49	47.05	88.20	-41.15	peak
6	p17844.590	15.29	43.90	61.04	52.11	50.26	74.00	-23.74	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:80MHz; Channel:High;

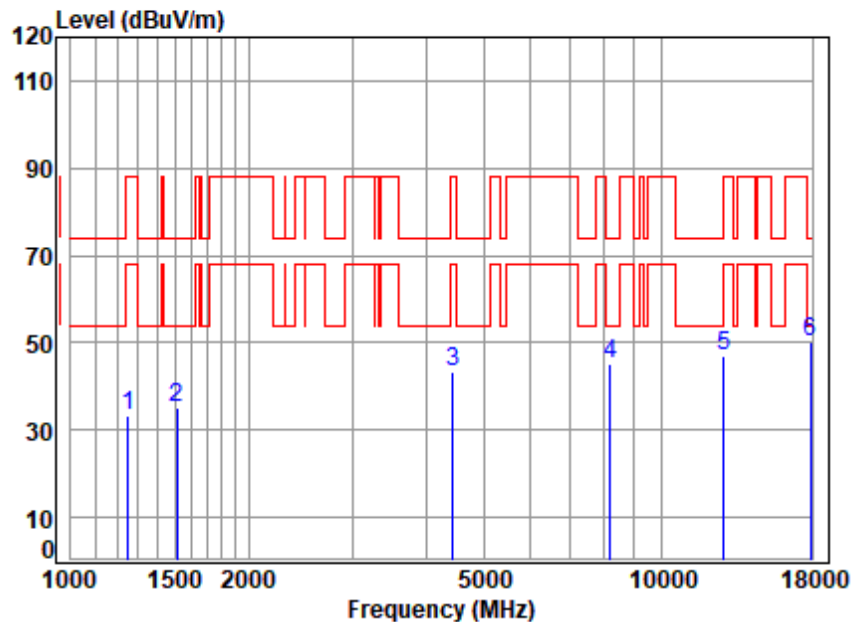


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6385 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	66.03	33.30	88.20	-54.90	peak
2	1511.833	4.06	26.85	61.66	65.84	35.09	74.00	-38.91	peak
3	4443.453	7.19	34.28	61.58	63.59	43.48	88.20	-44.72	peak
4	8200.463	9.23	36.60	61.71	61.04	45.16	74.00	-28.84	peak
5	12770.000	12.14	38.10	62.68	59.26	46.82	88.20	-41.38	peak
6	p17896.250	15.35	43.90	60.99	51.84	50.10	74.00	-23.90	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:160MHz; Channel:Low;

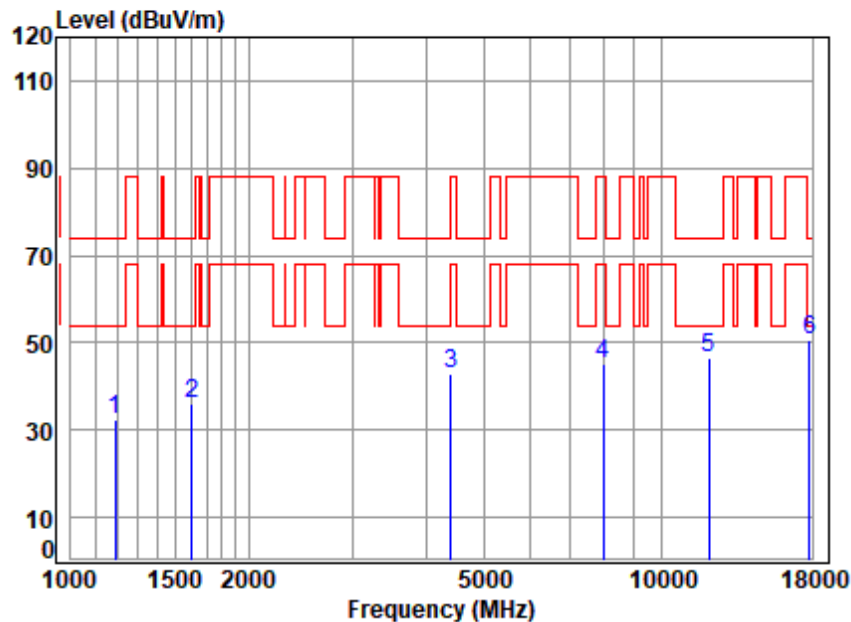


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6025 TX RSE
Note : 6E WIFI 11BE160 MRU(Large)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	3.67	24.29	61.55	65.99	32.40	74.00	-41.60	peak
2	1606.441	4.19	26.74	61.69	66.64	35.88	74.00	-38.12	peak
3	4405.090	7.14	34.74	61.55	62.70	43.03	88.20	-45.17	peak
4	7989.893	9.02	36.40	61.64	61.41	45.19	88.20	-43.01	peak
5	12050.000	11.97	37.75	62.73	59.40	46.39	74.00	-27.61	peak
6	p17844.590	15.29	43.90	61.04	52.61	50.76	74.00	-23.24	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:160MHz; Channel:Low;

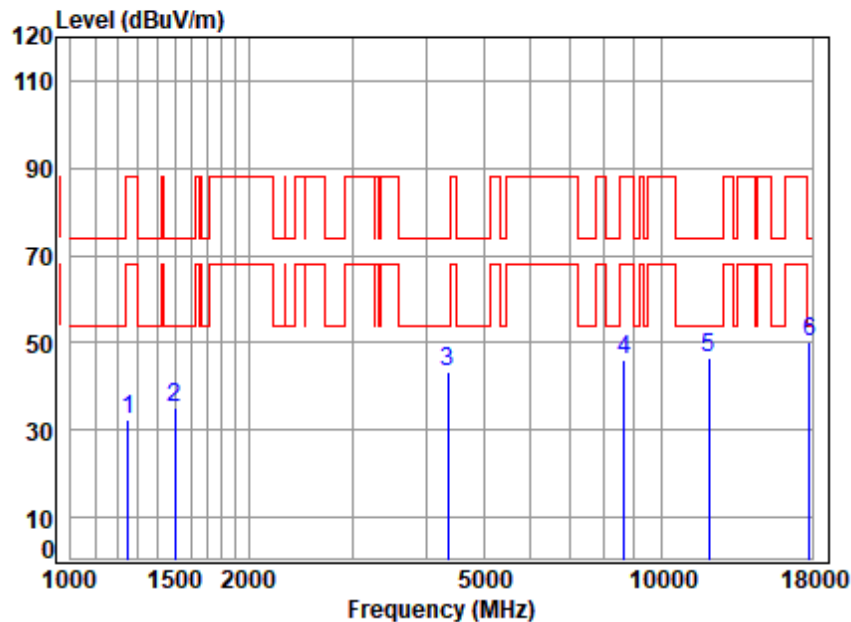


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6025 TX RSE
Note : 6E WIFI 11BE160 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.11	32.38	88.20	-55.82	peak
2	1503.119	4.04	26.81	61.66	65.92	35.11	74.00	-38.89	peak
3	4354.454	7.08	34.44	61.50	63.33	43.35	74.00	-30.65	peak
4	8638.399	9.64	36.90	61.85	61.17	45.86	88.20	-42.34	peak
5	12050.000	11.97	37.75	62.73	59.36	46.35	74.00	-27.65	peak
6	17793.090	15.23	43.89	61.09	52.17	50.20	74.00	-23.80	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:160MHz; Channel:High;

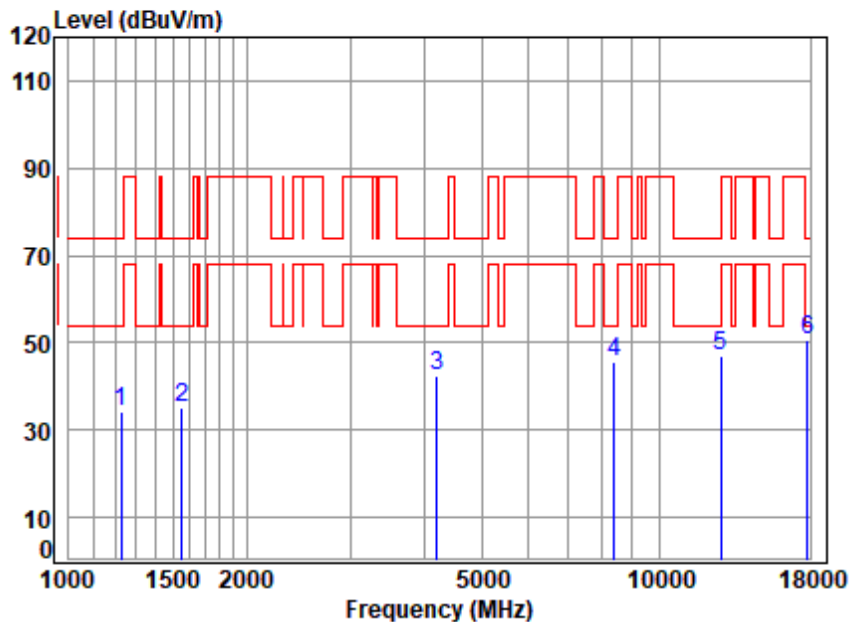


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6345 TX RSE
Note : 6E WIFI 11BE160 MRU(Large)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.56	67.14	34.09	74.00	-39.91	peak
2	1556.169	4.12	26.98	61.67	65.77	35.20	74.00	-38.80	peak
3	4193.872	6.89	33.80	61.35	63.07	42.41	74.00	-31.59	peak
4	8392.292	9.42	36.70	61.77	61.35	45.70	74.00	-28.30	peak
5	12690.000	12.11	38.08	62.69	59.31	46.81	74.00	-27.19	peak
6	p17844.590	15.29	43.90	61.04	52.72	50.87	74.00	-23.13	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:160MHz; Channel:High;

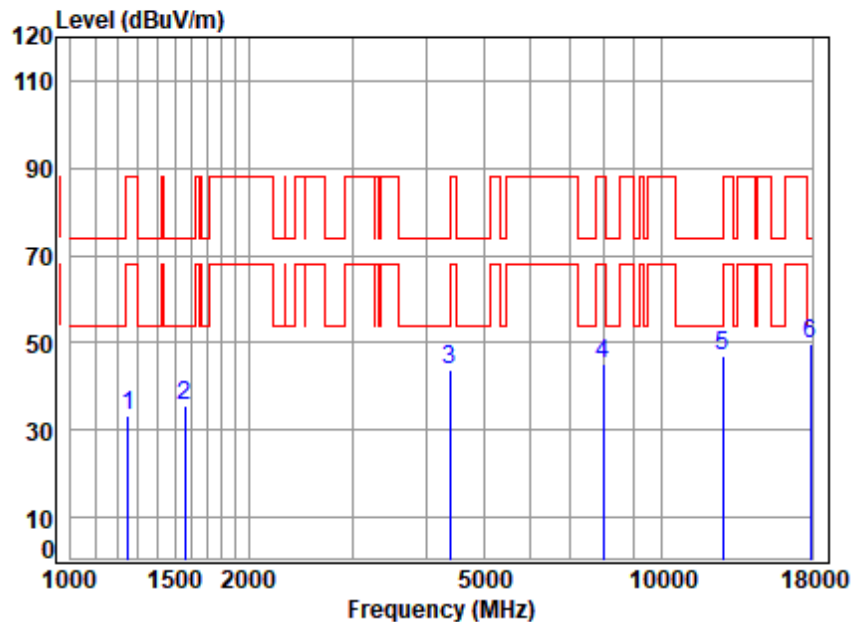


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6345 TX RSE
Note : 6E WIFI 11BE160 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	66.05	33.32	88.20	-54.88	peak
2	1560.673	4.13	26.96	61.68	66.32	35.73	74.00	-38.27	peak
3	4392.376	7.13	34.74	61.53	63.41	43.75	74.00	-30.25	peak
4	7966.832	8.99	36.40	61.66	61.42	45.15	88.20	-43.05	peak
5	12690.000	12.11	38.08	62.69	59.56	47.06	74.00	-26.94	peak
6	p17896.250	15.35	43.90	60.99	51.54	49.80	74.00	-24.20	peak



Test Mode: 09; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

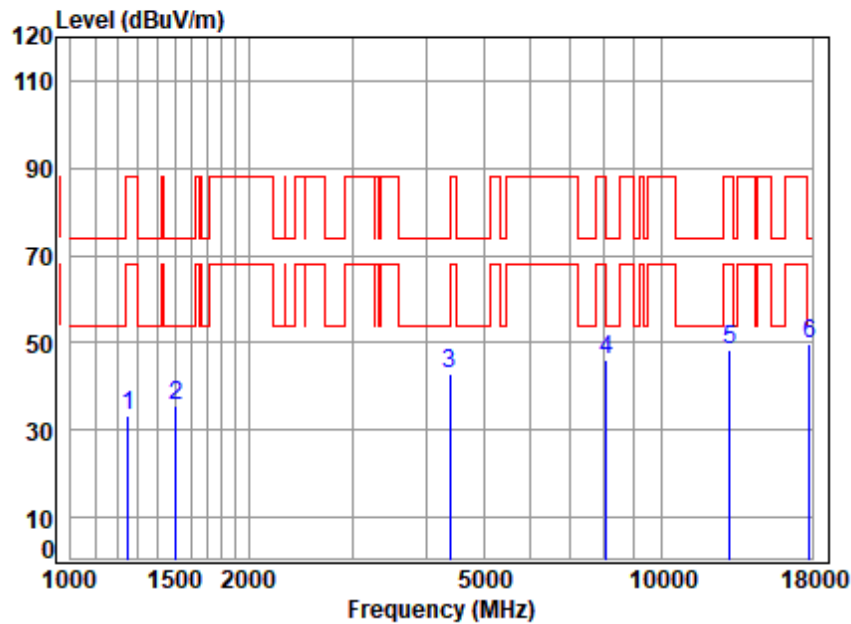


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6535 TX RSE
Note : 6E WIFI 11AX20
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.88	33.15	88.20	-55.05	peak
2	1507.470	4.05	26.83	61.66	66.20	35.42	74.00	-38.58	peak
3	4379.699	7.11	34.64	61.52	62.47	42.70	74.00	-31.30	peak
4	8082.804	9.11	36.47	61.67	62.07	45.98	74.00	-28.02	peak
5	13070.000	12.29	38.31	62.66	60.63	48.57	88.20	-39.63	peak
6	17844.590	15.29	43.90	61.04	51.54	49.69	74.00	-24.31	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

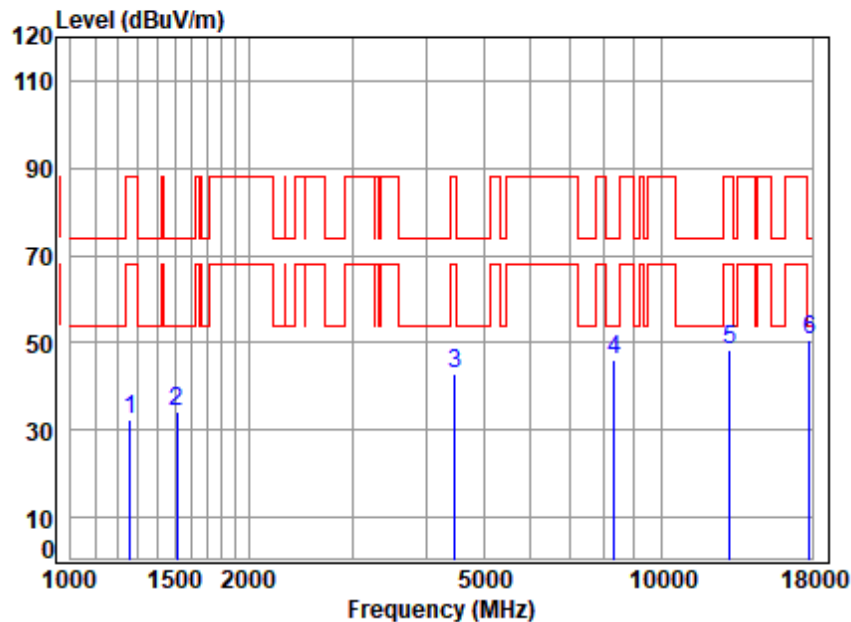


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6535 TX RSE
Note : 6E WIFI 11AX20
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.58	65.26	32.48	88.20	-55.72	peak
2	1511.833	4.06	26.85	61.66	65.12	34.37	74.00	-39.63	peak
3	4469.214	7.22	33.97	61.60	63.47	43.06	88.20	-45.14	peak
4	8319.836	9.35	36.70	61.75	61.85	46.15	74.00	-27.85	peak
5	13070.000	12.29	38.31	62.66	60.54	48.48	88.20	-39.72	peak
6	p17844.590	15.29	43.90	61.04	52.40	50.55	74.00	-23.45	peak



Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

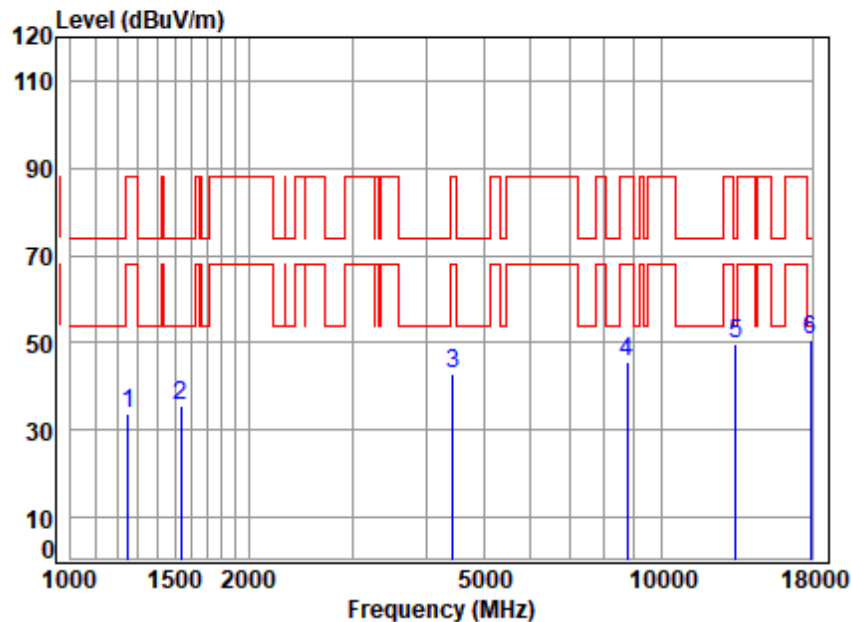


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6695 TX RSE
Note : 6E WIFI 11AX20
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	66.44	33.71	88.20	-54.49	peak
2	1538.281	4.10	26.95	61.67	66.07	35.45	74.00	-38.55	peak
3	4443.453	7.19	34.28	61.58	63.06	42.95	88.20	-45.25	peak
4	8738.852	9.72	36.90	61.89	60.86	45.59	88.20	-42.61	peak
5	13390.000	12.63	38.78	62.64	60.83	49.60	74.00	-24.40	peak
6	p17896.250	15.35	43.90	60.99	52.45	50.71	74.00	-23.29	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

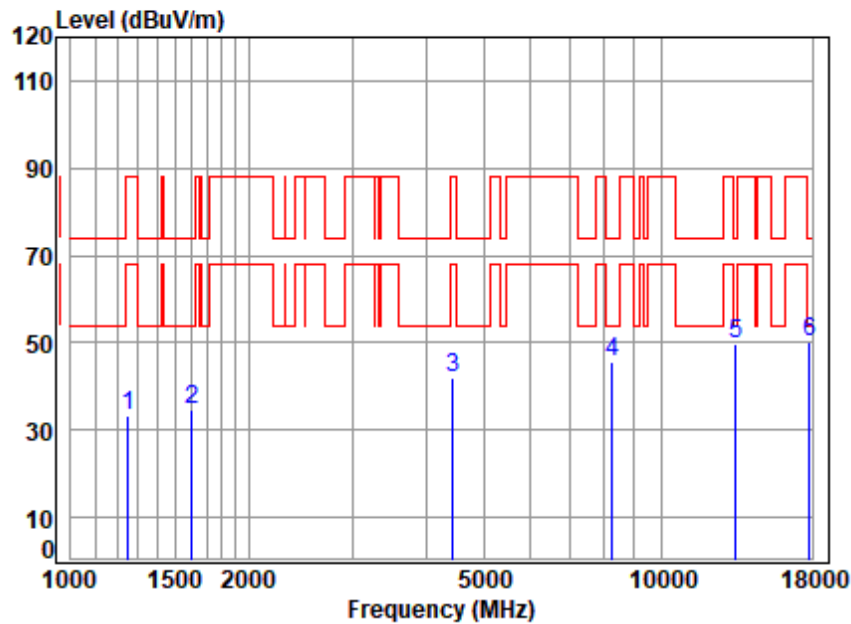


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6695 TX RSE
Note : 6E WIFI 11AX20
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	66.17	33.44	88.20	-54.76	peak
2	1601.804	4.19	26.78	61.69	65.35	34.63	74.00	-39.37	peak
3	4443.453	7.19	34.28	61.58	62.23	42.12	88.20	-46.08	peak
4	8248.005	9.28	36.70	61.72	61.30	45.56	74.00	-28.44	peak
5	13390.000	12.63	38.78	62.64	60.80	49.57	74.00	-24.43	peak
6	17844.590	15.29	43.90	61.04	52.04	50.19	74.00	-23.81	peak



Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

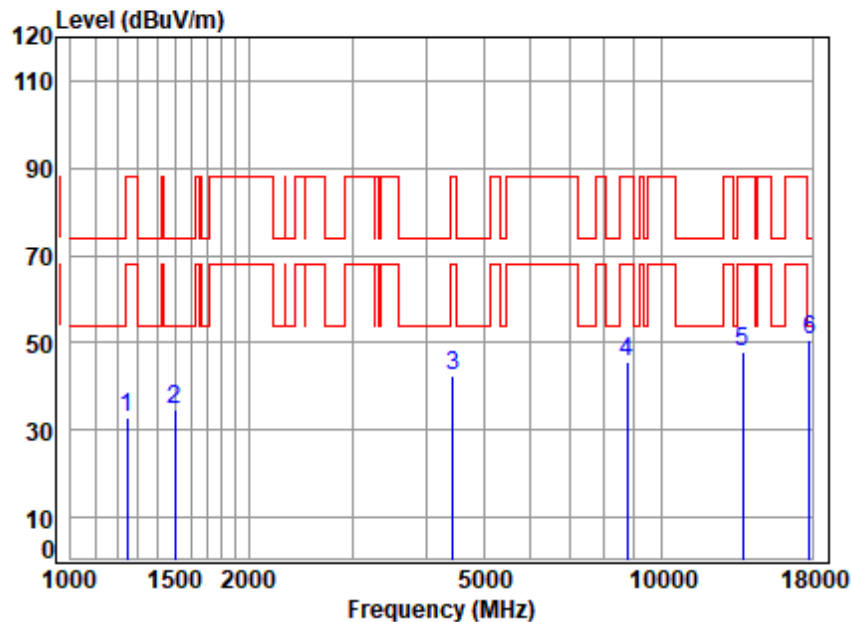


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6855 TX RSE
Note : 6E WIFI 11AX20
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.75	32.96	88.20	-55.24	peak
2	1503.119	4.04	26.81	61.66	65.56	34.75	74.00	-39.25	peak
3	4430.628	7.17	34.43	61.57	62.46	42.49	88.20	-45.71	peak
4	8738.852	9.72	36.90	61.89	61.08	45.81	88.20	-42.39	peak
5	13710.000	12.87	39.12	62.63	58.57	47.93	88.20	-40.27	peak
6	17793.090	15.23	43.89	61.09	52.39	50.42	74.00	-23.58	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

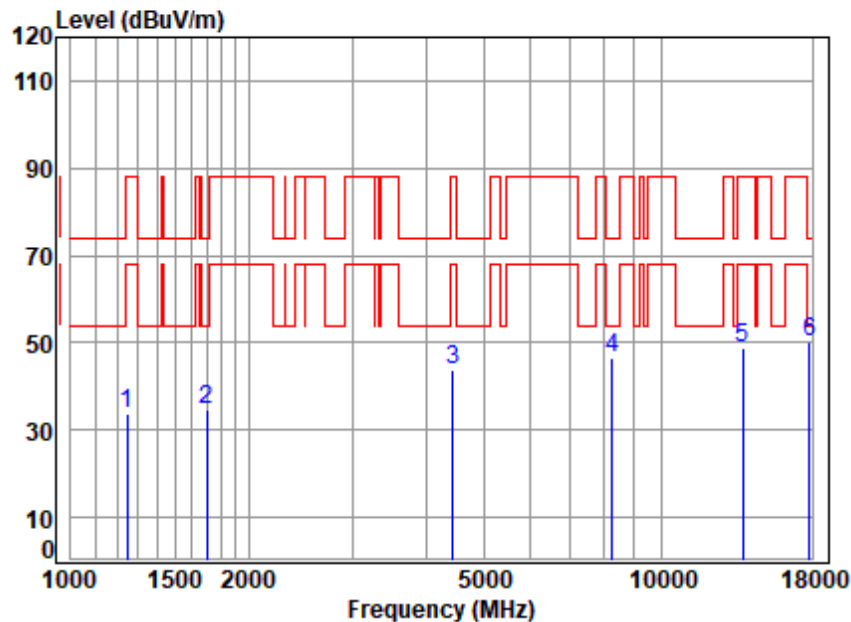


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6855 TX RSE
Note : 6E WIFI 11AX20
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	66.63	33.84	88.20	-54.36	peak
2	1702.042	4.33	26.22	61.72	66.00	34.83	74.00	-39.17	peak
3	4443.453	7.19	34.28	61.58	64.05	43.94	88.20	-44.26	peak
4	8271.880	9.31	36.70	61.73	62.19	46.47	74.00	-27.53	peak
5	13710.000	12.87	39.12	62.63	59.34	48.70	88.20	-39.50	peak
6	17793.090	15.23	43.89	61.09	52.19	50.22	74.00	-23.78	peak



Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:Low

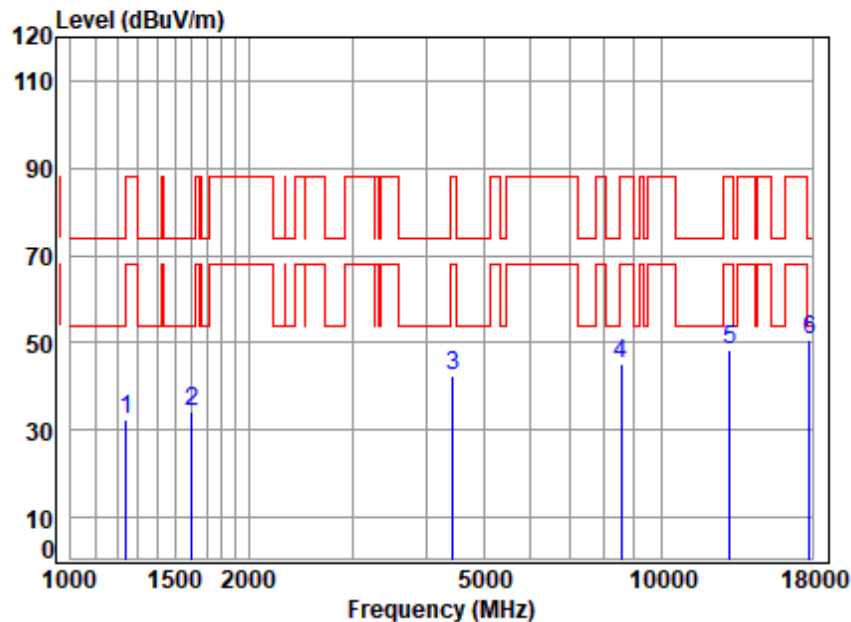


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6535 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	65.35	32.51	88.20	-55.69	peak
2	1606.441	4.19	26.74	61.69	64.80	34.04	74.00	-39.96	peak
3	4430.628	7.17	34.43	61.57	62.23	42.26	88.20	-45.94	peak
4	8563.818	9.58	36.83	61.83	60.62	45.20	88.20	-43.00	peak
5	13070.000	12.29	38.31	62.66	60.62	48.56	88.20	-39.64	peak
6	17793.090	15.23	43.89	61.09	52.63	50.66	74.00	-23.34	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:Low

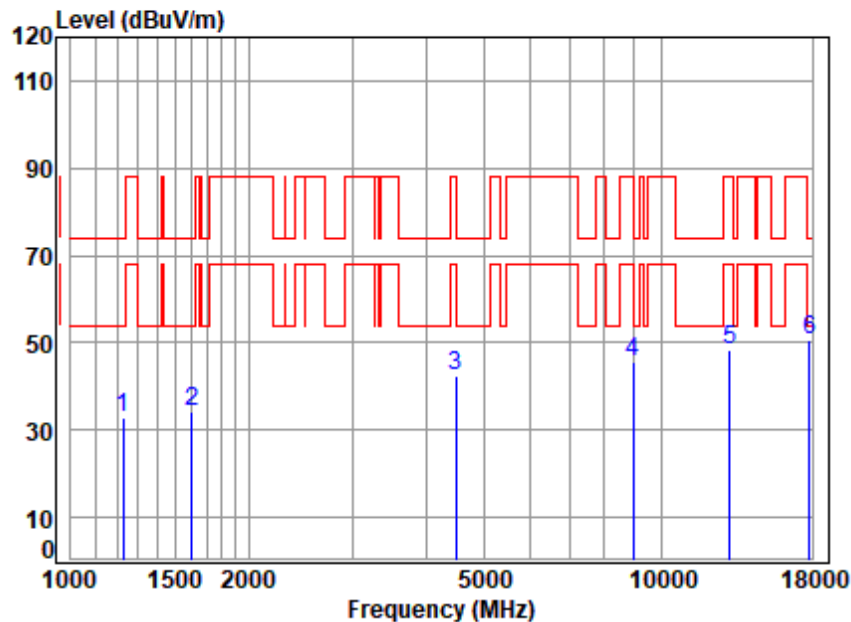


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6535 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.56	66.13	33.08	74.00	-40.92	peak
2	1606.441	4.19	26.74	61.69	65.16	34.40	74.00	-39.60	peak
3	4482.150	7.23	33.81	61.61	63.13	42.56	88.20	-45.64	peak
4	8969.161	9.90	36.96	61.96	60.58	45.48	88.20	-42.72	peak
5	13070.000	12.29	38.31	62.66	60.28	48.22	88.20	-39.98	peak
6	p17844.590	15.29	43.90	61.04	52.66	50.81	74.00	-23.19	peak



Test Mode: 09; Polarity: Horizontal; Modulation: 802.11ax(52 RU); Bandwidth: 20MHz; Channel: middle

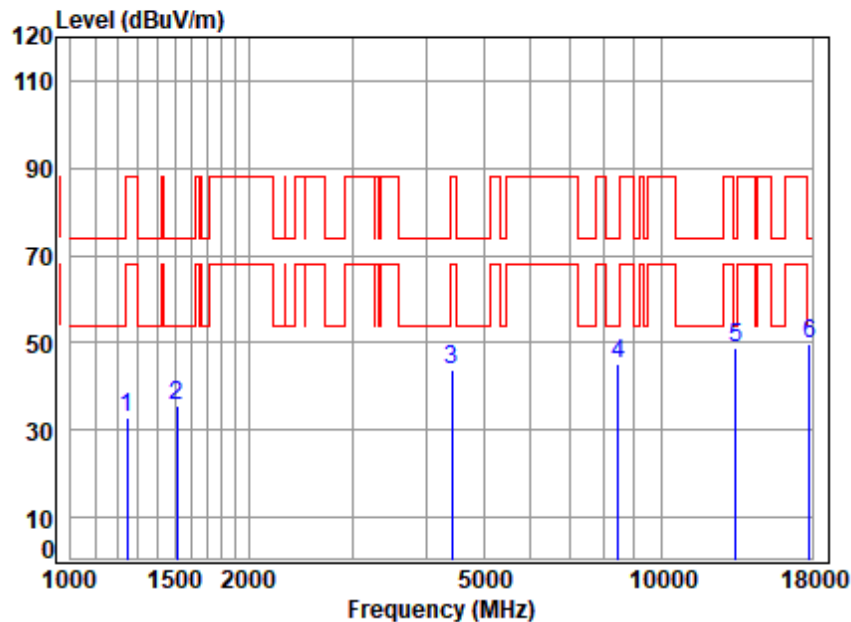


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6695 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.72	32.93	88.20	-55.27	peak
2	1511.833	4.06	26.85	61.66	66.37	35.62	74.00	-38.38	peak
3	4417.841	7.16	34.59	61.56	63.66	43.85	88.20	-44.35	peak
4	8440.945	9.47	36.62	61.79	60.94	45.24	74.00	-28.76	peak
5	13390.000	12.63	38.78	62.64	60.25	49.02	74.00	-24.98	peak
6	17844.590	15.29	43.90	61.04	51.51	49.66	74.00	-24.34	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:middle

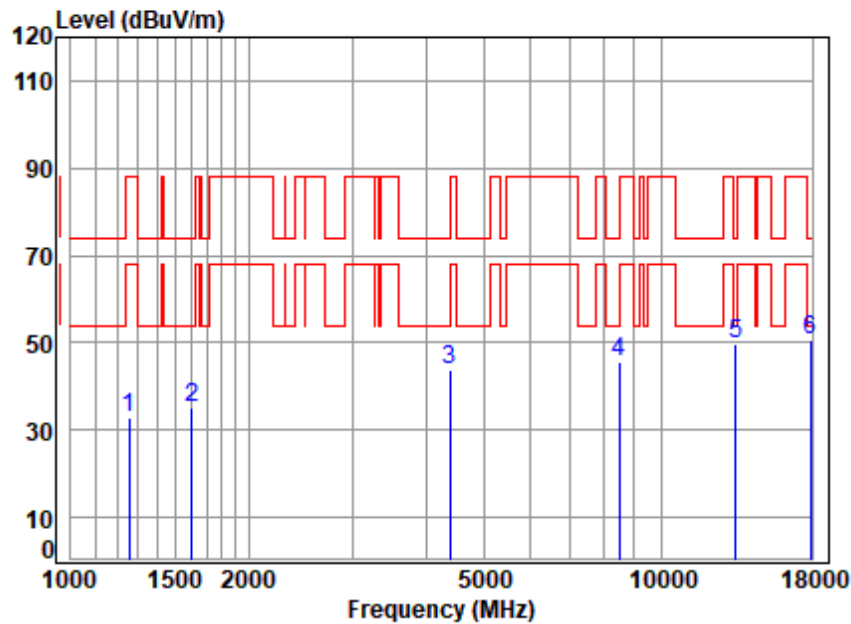

Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6695 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant


		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	65.47	32.71	88.20	-55.49	peak
2	1606.441	4.19	26.74	61.69	65.92	35.16	74.00	-38.84	peak
3	4392.376	7.13	34.74	61.53	63.42	43.76	74.00	-30.24	peak
4	8489.882	9.52	36.68	61.81	61.18	45.57	74.00	-28.43	peak
5	13390.000	12.63	38.78	62.64	60.88	49.65	74.00	-24.35	peak
6	p17896.250	15.35	43.90	60.99	52.41	50.67	74.00	-23.33	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:High

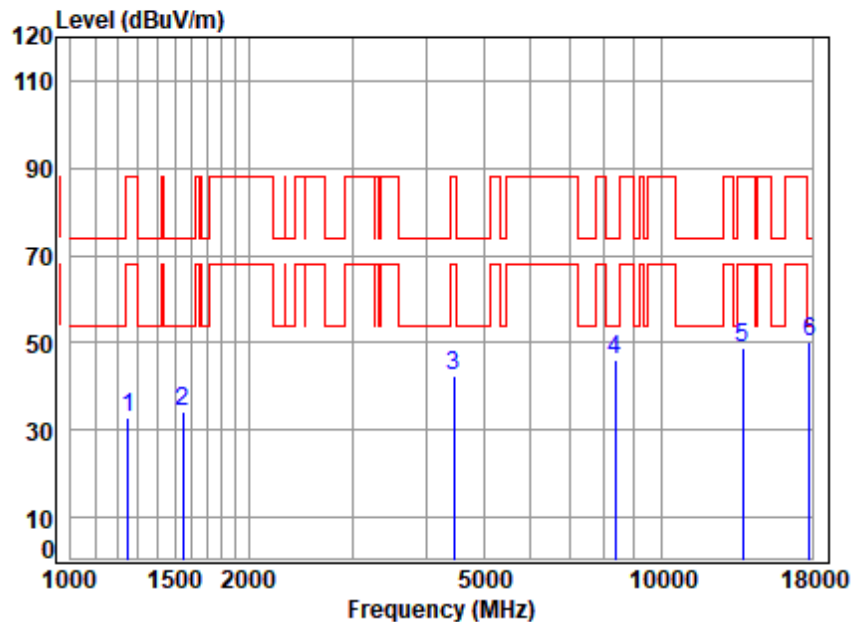


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6855 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	65.50	32.76	88.20	-55.44	peak
2	1547.199	4.11	26.99	61.67	64.87	34.30	74.00	-39.70	peak
3	4456.315	7.20	34.12	61.59	62.65	42.38	88.20	-45.82	peak
4	8368.069	9.40	36.70	61.76	61.59	45.93	74.00	-28.07	peak
5	13710.000	12.87	39.12	62.63	59.38	48.74	88.20	-39.46	peak
6	p17844.590	15.29	43.90	61.04	51.95	50.10	74.00	-23.90	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:High

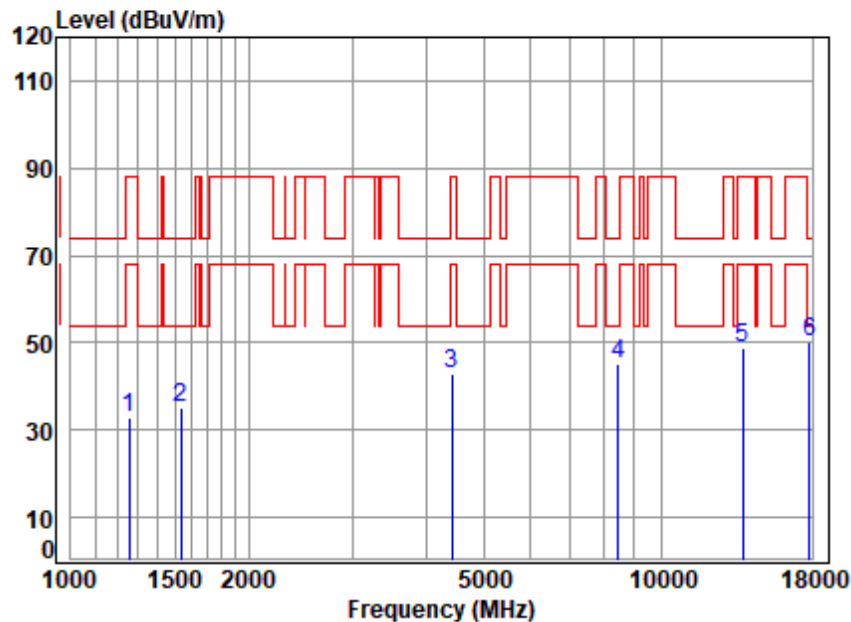


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6855 TX RSE
Note : 6E WIFI 11AX20 Partial RU
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	65.70	32.94	88.20	-55.26	peak
2	1538.281	4.10	26.95	61.67	65.59	34.97	74.00	-39.03	peak
3	4417.841	7.16	34.59	61.56	62.63	42.82	88.20	-45.38	peak
4	8440.945	9.47	36.62	61.79	60.68	44.98	74.00	-29.02	peak
5	13710.000	12.87	39.12	62.63	59.28	48.64	88.20	-39.56	peak
6	p17844.590	15.29	43.90	61.04	52.15	50.30	74.00	-23.70	peak



Test Mode: 09; Polarity: Horizontal; Hob Position Left; Bandwidth:20MHz; Channel:Low;

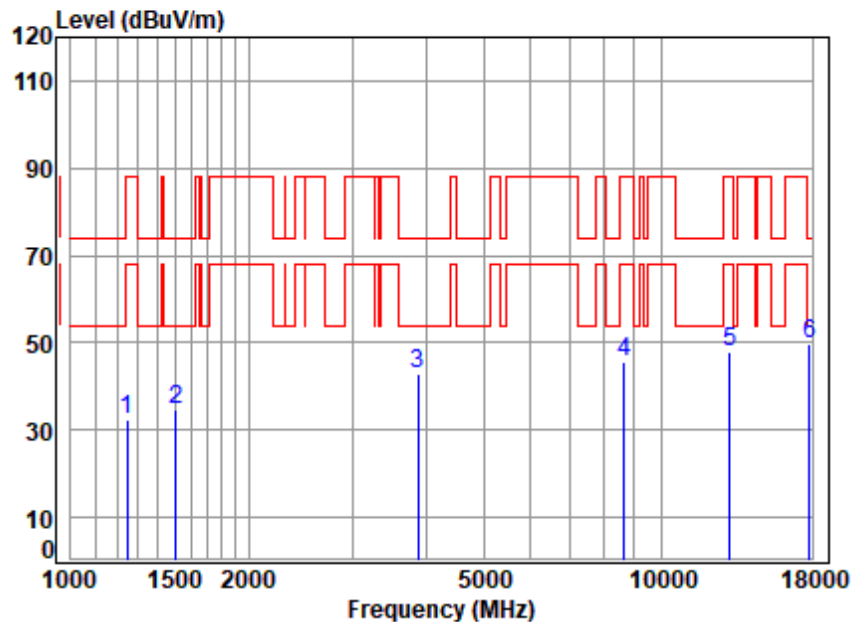


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6535 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.30	32.51	88.20	-55.69	peak
2	1507.470	4.05	26.83	61.66	65.35	34.57	74.00	-39.43	peak
3	3867.831	6.62	33.35	61.20	64.02	42.79	74.00	-31.21	peak
4	8638.399	9.64	36.90	61.85	60.74	45.43	88.20	-42.77	peak
5	13070.000	12.29	38.31	62.66	60.16	48.10	88.20	-40.10	peak
6	p17793.090	15.23	43.89	61.09	51.74	49.77	74.00	-24.23	peak



Test Mode: 09; Polarity: Vertical; Hob Position Left; Bandwidth:20MHz; Channel:Low;

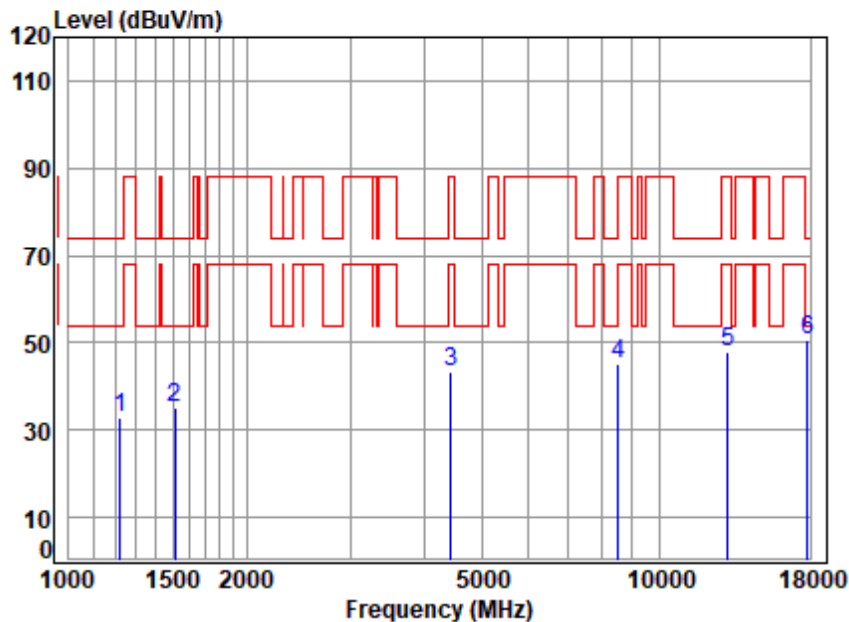


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6535 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1224.247	3.71	24.74	61.56	65.74	32.63	74.00	-41.37	peak
2	1511.833	4.06	26.85	61.66	66.02	35.27	74.00	-38.73	peak
3	4430.628	7.17	34.43	61.57	63.18	43.21	88.20	-44.99	peak
4	8514.456	9.54	36.73	61.81	60.59	45.05	88.20	-43.15	peak
5	13070.000	12.29	38.31	62.66	59.87	47.81	88.20	-40.39	peak
6	p17844.590	15.29	43.90	61.04	52.34	50.49	74.00	-23.51	peak



Test Mode: 09; Polarity: Horizontal; Hob Position Left; Bandwidth:20MHz; Channel:middle;

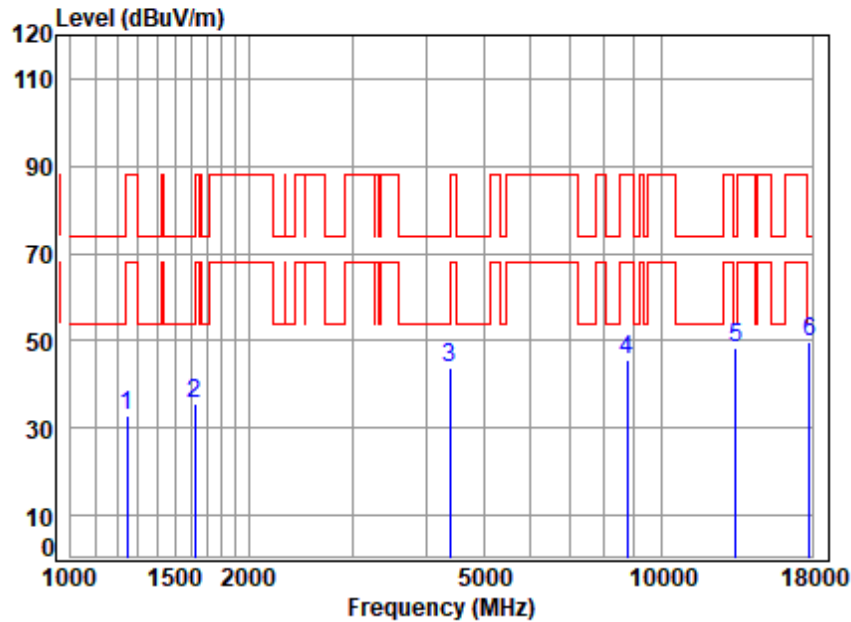


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6695 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.77	32.98	88.20	-55.22	peak
2	1620.431	4.21	26.60	61.69	66.30	35.42	74.00	-38.58	peak
3	4392.376	7.13	34.74	61.53	63.43	43.77	74.00	-30.23	peak
4	8738.852	9.72	36.90	61.89	61.09	45.82	88.20	-42.38	peak
5	13390.000	12.63	38.78	62.64	59.63	48.40	74.00	-25.60	peak
6	p17844.590	15.29	43.90	61.04	51.36	49.51	74.00	-24.49	peak



Test Mode: 09; Polarity: Vertical; Hob Position Left; Bandwidth:20MHz; Channel:middle;

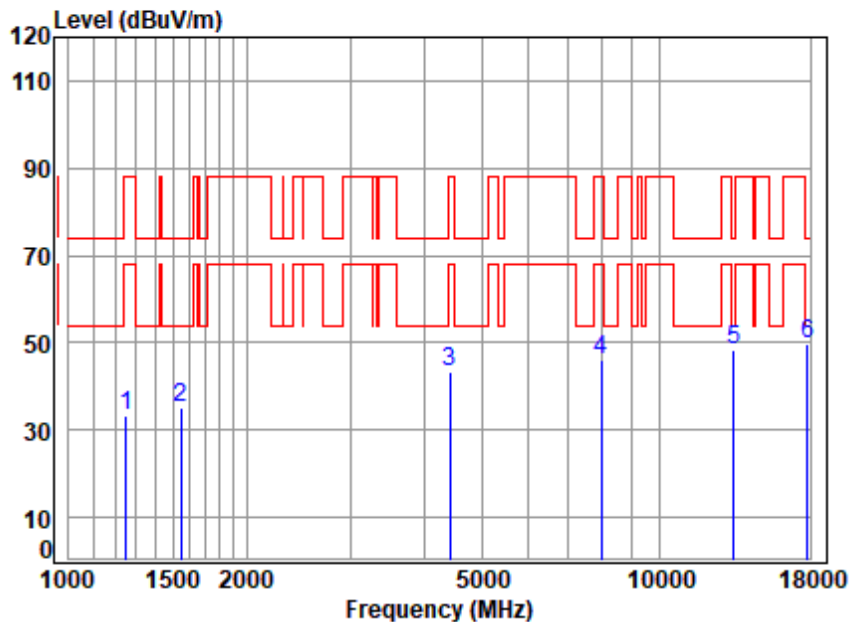


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6695 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	65.95	33.21	88.20	-54.99	peak
2	1547.199	4.11	26.99	61.67	65.74	35.17	74.00	-38.83	peak
3	4417.841	7.16	34.59	61.56	63.04	43.23	88.20	-44.97	peak
4	7989.893	9.02	36.40	61.64	62.23	46.01	88.20	-42.19	peak
5	13390.000	12.63	38.78	62.64	59.54	48.31	74.00	-25.69	peak
6	p17844.590	15.29	43.90	61.04	51.48	49.63	74.00	-24.37	peak



Test Mode: 09; Polarity: Horizontal; Hob Position Left; Bandwidth:20MHz; Channel:High;

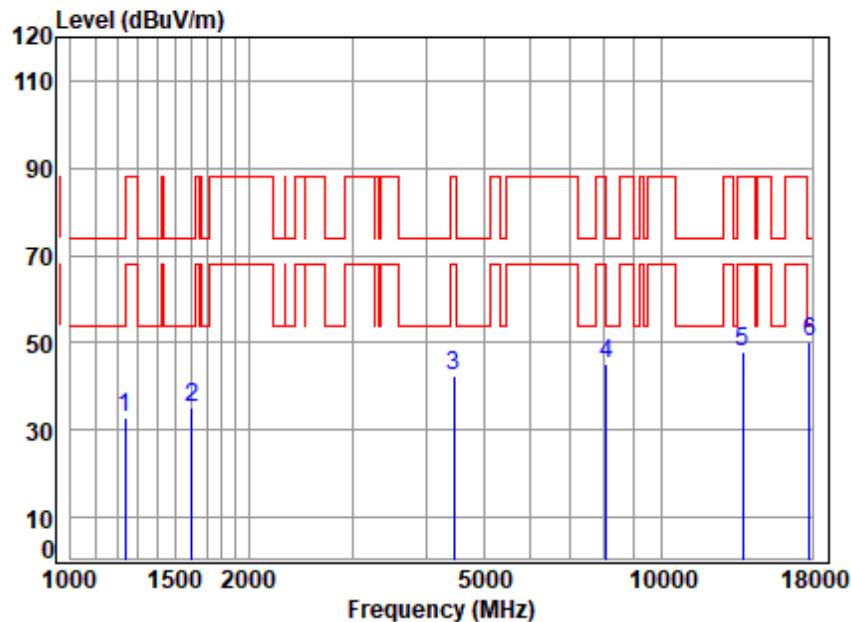


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6855 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	65.65	32.75	74.00	-41.25	peak
2	1606.441	4.19	26.74	61.69	65.93	35.17	74.00	-38.83	peak
3	4456.315	7.20	34.12	61.59	62.68	42.41	88.20	-45.79	peak
4	8059.475	9.09	36.42	61.66	61.25	45.10	74.00	-28.90	peak
5	13710.000	12.87	39.12	62.63	58.64	48.00	88.20	-40.20	peak
6	p17844.590	15.29	43.90	61.04	52.19	50.34	74.00	-23.66	peak



Test Mode: 09; Polarity: Vertical; Hob Position Left; Bandwidth:20MHz; Channel:High;

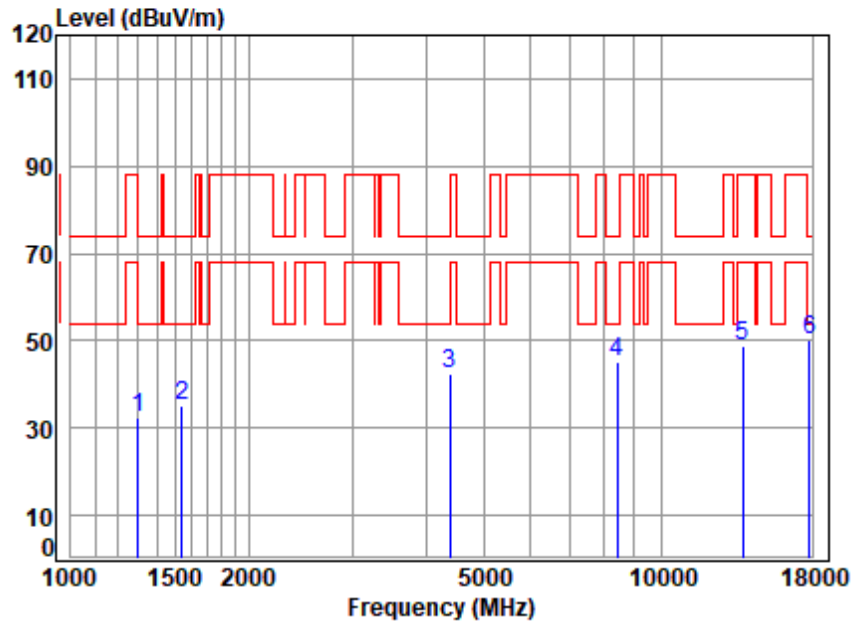


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6855 TX RSE
Note : 6E WIFI 11BE20 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	3.81	24.79	61.59	65.46	32.47	74.00	-41.53	peak
2	1542.733	4.10	26.97	61.67	65.62	35.02	74.00	-38.98	peak
3	4392.376	7.13	34.74	61.53	62.23	42.57	74.00	-31.43	peak
4	8416.584	9.45	36.67	61.78	60.76	45.10	74.00	-28.90	peak
5	13710.000	12.87	39.12	62.63	59.52	48.88	88.20	-39.32	peak
6	17793.090	15.23	43.89	61.09	52.19	50.22	74.00	-23.78	peak



Test Mode: 09; Polarity: Horizontal; Hob Position Left; Bandwidth:40MHz; Channel:Low;

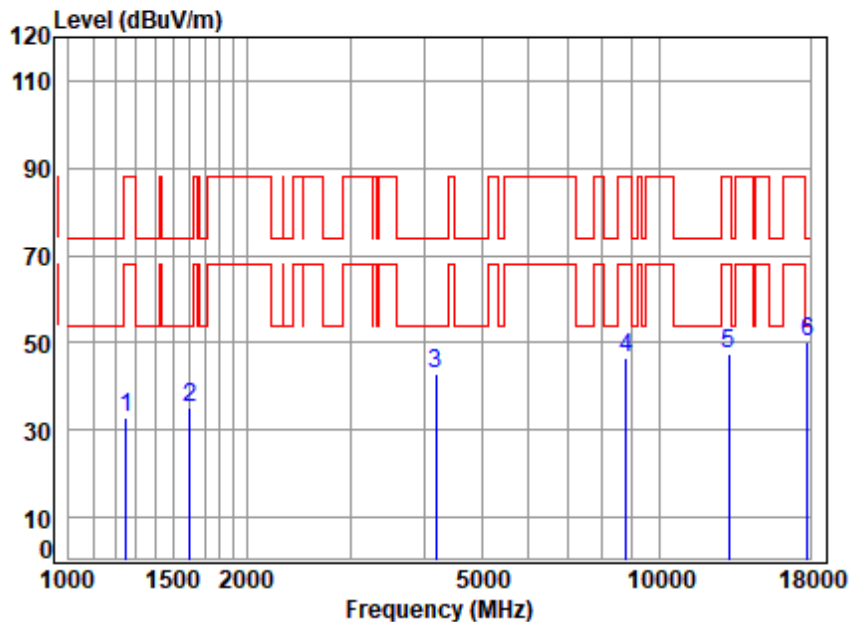


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6565 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.69	32.96	88.20	-55.24	peak
2	1601.804	4.19	26.78	61.69	65.83	35.11	74.00	-38.89	peak
3	4181.768	6.88	33.80	61.34	63.35	42.69	74.00	-31.31	peak
4	8789.516	9.76	37.06	61.90	61.39	46.31	88.20	-41.89	peak
5	13130.000	12.35	38.46	62.66	59.47	47.62	88.20	-40.58	peak
6	p17793.090	15.23	43.89	61.09	51.96	49.99	74.00	-24.01	peak



Test Mode: 09; Polarity: Vertical; Hob Position Left; Bandwidth:40MHz; Channel:Low;

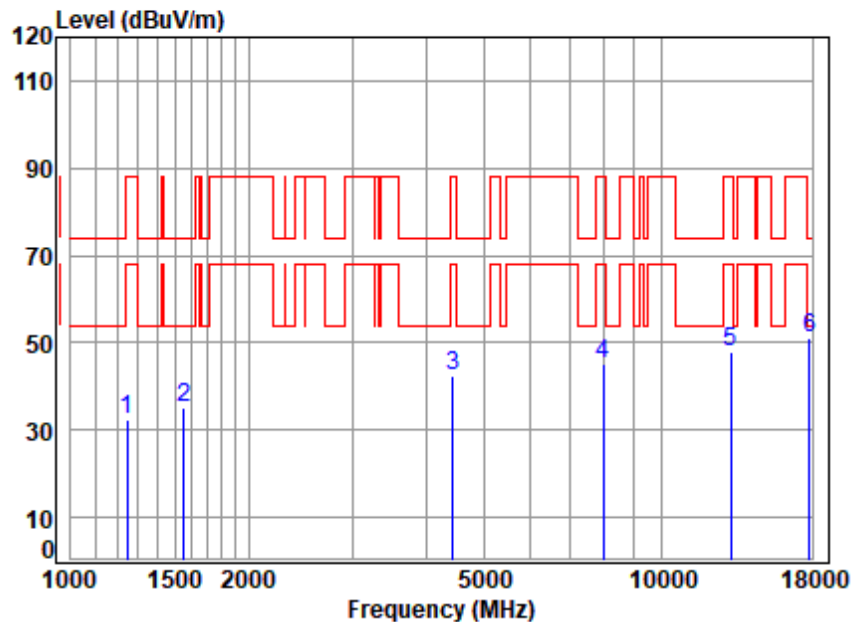


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6565 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.05	32.26	88.20	-55.94	peak
2	1556.169	4.12	26.98	61.67	65.49	34.92	74.00	-39.08	peak
3	4430.628	7.17	34.43	61.57	62.37	42.40	88.20	-45.80	peak
4	7989.893	9.02	36.40	61.64	61.38	45.16	88.20	-43.04	peak
5	13130.000	12.35	38.46	62.66	59.91	48.06	88.20	-40.14	peak
6	17793.090	15.23	43.89	61.09	53.26	51.29	74.00	-22.71	peak



Test Mode: 09; Polarity: Horizontal; Hob Position Left; Bandwidth:40MHz; Channel:middle;

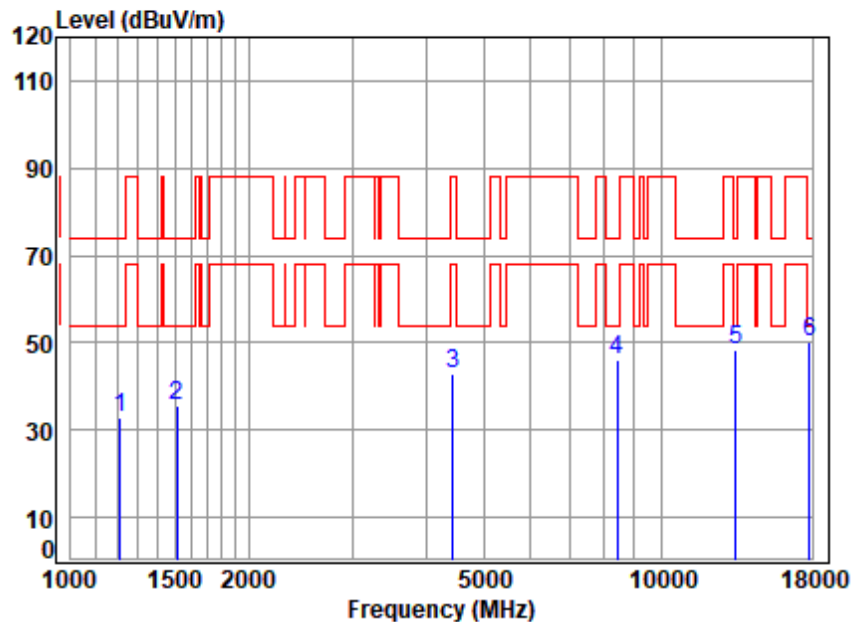


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6685 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	3.70	24.54	61.56	66.33	33.01	74.00	-40.99	peak
2	1511.833	4.06	26.85	61.66	66.20	35.45	74.00	-38.55	peak
3	4430.628	7.17	34.43	61.57	62.89	42.92	88.20	-45.28	peak
4	8416.584	9.45	36.67	61.78	61.63	45.97	74.00	-28.03	peak
5	13370.000	12.61	38.74	62.65	59.62	48.32	74.00	-25.68	peak
6	17793.090	15.23	43.89	61.09	52.22	50.25	74.00	-23.75	peak



Test Mode: 09; Polarity: Vertical; Hob Position Left; Bandwidth:40MHz; Channel:middle;

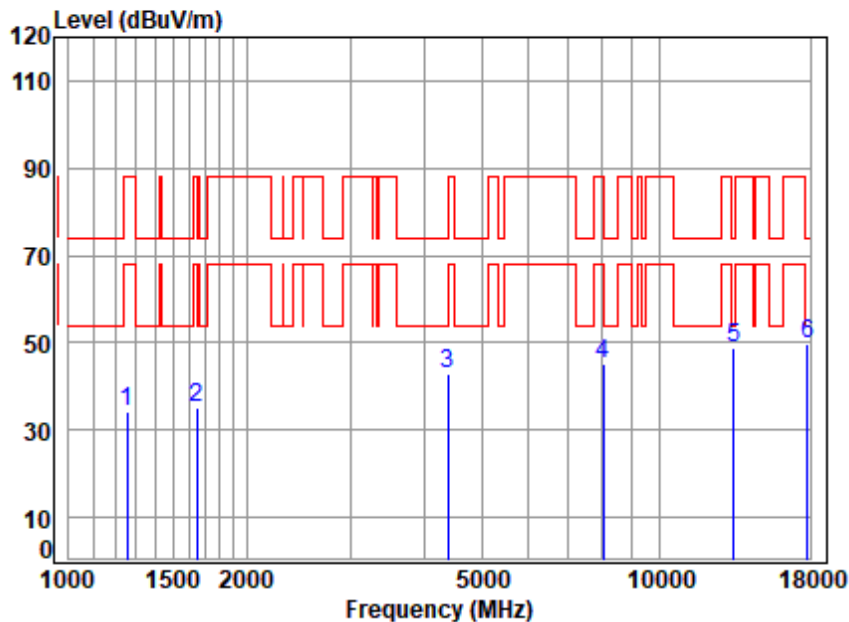


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6685 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	66.97	34.21	88.20	-53.99	peak
2	1648.778	4.25	26.31	61.70	66.36	35.22	88.20	-52.98	peak
3	4392.376	7.13	34.74	61.53	62.43	42.77	74.00	-31.23	peak
4	8036.214	9.07	36.40	61.65	61.35	45.17	74.00	-28.83	peak
5	13370.000	12.61	38.74	62.65	60.07	48.77	74.00	-25.23	peak
6	17793.090	15.23	43.89	61.09	51.73	49.76	74.00	-24.24	peak



Test Mode: 09; Polarity: Horizontal; Hob Position Left; Bandwidth:40MHz; Channel:High;

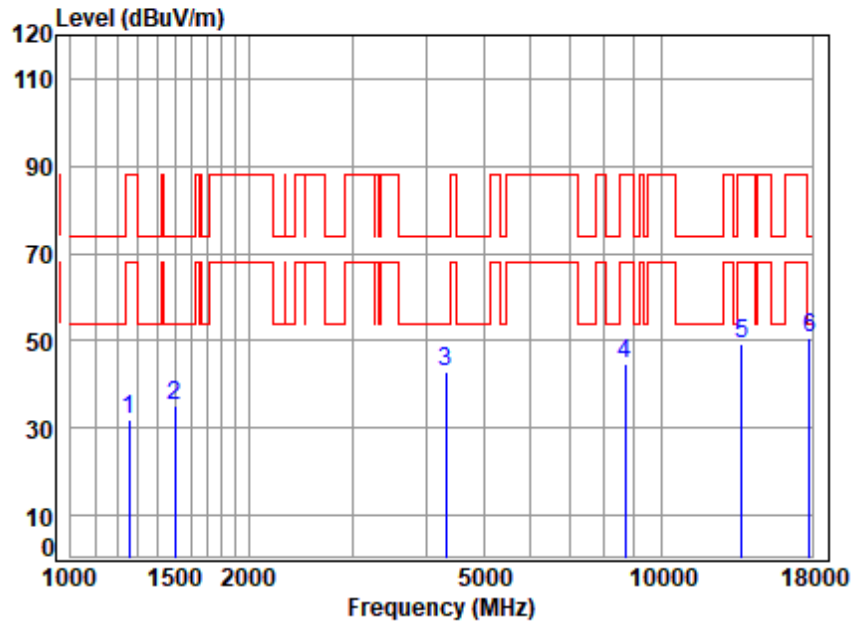


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6845 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	64.89	32.13	88.20	-56.07	peak
2	1503.119	4.04	26.81	61.66	65.84	35.03	74.00	-38.97	peak
3	4316.859	7.04	34.13	61.47	63.04	42.74	74.00	-31.26	peak
4	8688.480	9.68	36.90	61.87	60.09	44.80	88.20	-43.40	peak
5	13690.000	12.86	39.08	62.63	60.05	49.36	88.20	-38.84	peak
6	p17844.590	15.29	43.90	61.04	52.45	50.60	74.00	-23.40	peak



Test Mode: 09; Polarity: Vertical; Hob Position Left; Bandwidth:40MHz; Channel:High;

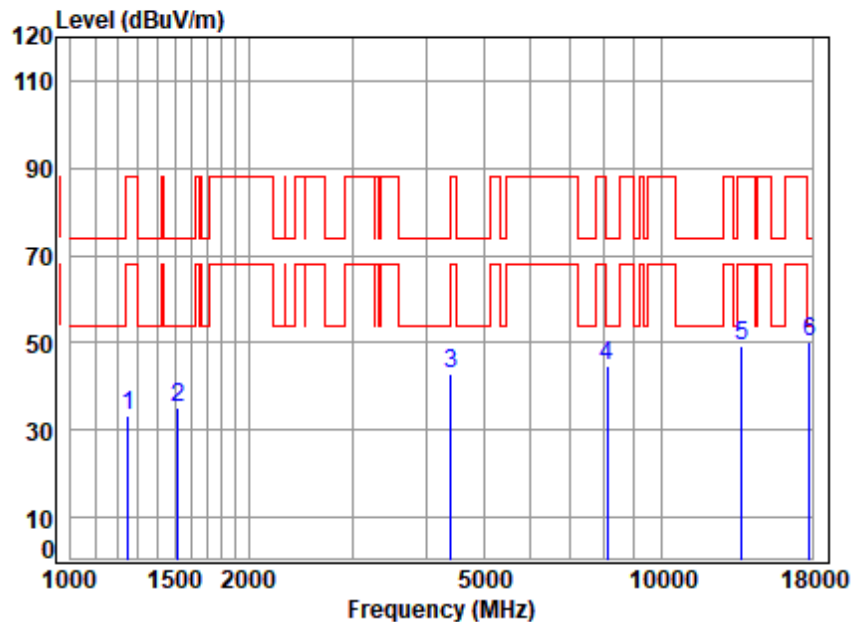


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6845 TX RSE
Note : 6E WIFI 11BE40 MRU(Small)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.87	33.14	88.20	-55.06	peak
2	1520.598	4.07	26.88	61.66	66.04	35.33	74.00	-38.67	peak
3	4405.090	7.14	34.74	61.55	62.41	42.74	88.20	-45.46	peak
4	8106.200	9.14	36.50	61.68	60.85	44.81	74.00	-29.19	peak
5	13690.000	12.86	39.08	62.63	60.15	49.46	88.20	-38.74	peak
6	17793.090	15.23	43.89	61.09	51.97	50.00	74.00	-24.00	peak



Test Mode: 09; Polarity: Horizontal; Hob Position Left; Bandwidth:80MHz; Channel:Low;

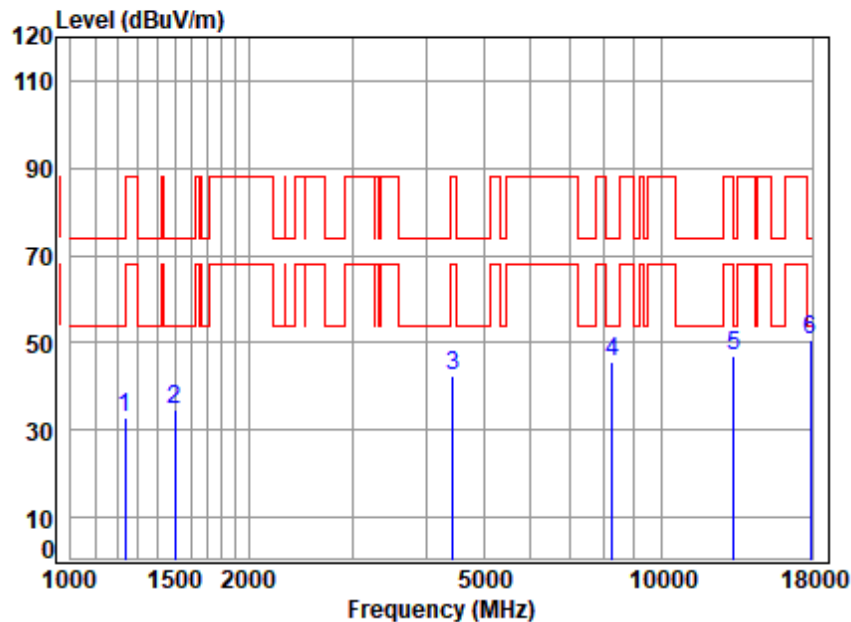


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6625 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	65.63	32.73	74.00	-41.27	peak
2	1503.119	4.04	26.81	61.66	65.41	34.60	74.00	-39.40	peak
3	4430.628	7.17	34.43	61.57	62.47	42.50	88.20	-45.70	peak
4	8248.005	9.28	36.70	61.72	61.31	45.57	74.00	-28.43	peak
5	13250.000	12.48	38.60	62.65	58.53	46.96	74.00	-27.04	peak
6	17896.250	15.35	43.90	60.99	52.30	50.56	74.00	-23.44	peak



Test Mode: 09; Polarity: Vertical; Hob Position Left; Bandwidth:80MHz; Channel:Low;

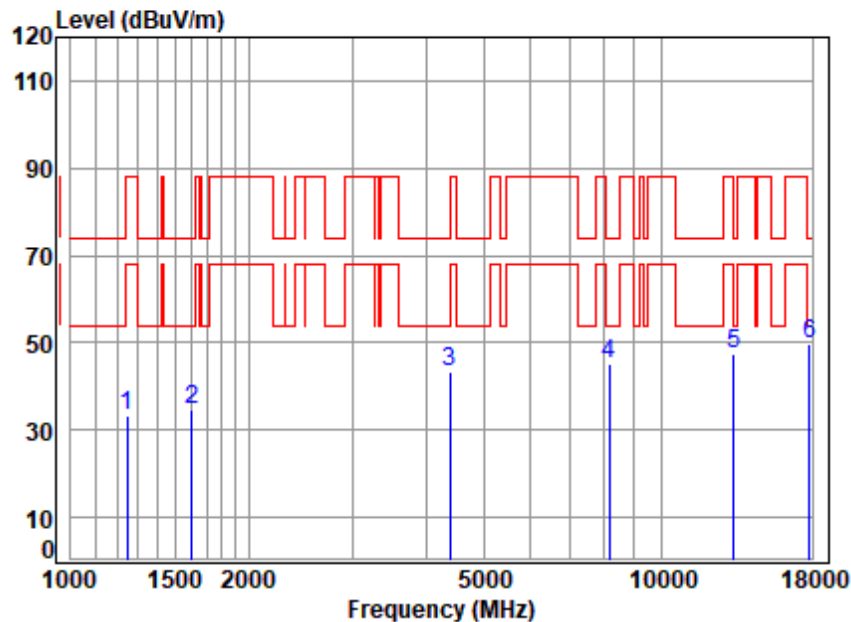


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6625 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	66.09	33.30	88.20	-54.90	peak
2	1606.441	4.19	26.74	61.69	65.64	34.88	74.00	-39.12	peak
3	4392.376	7.13	34.74	61.53	62.87	43.21	74.00	-30.79	peak
4	8153.195	9.19	36.51	61.69	60.97	44.98	74.00	-29.02	peak
5	13250.000	12.48	38.60	62.65	59.05	47.48	74.00	-26.52	peak
6	17793.090	15.23	43.89	61.09	51.91	49.94	74.00	-24.06	peak



Test Mode: 09; Polarity: Horizontal; Hob Position Left; Bandwidth:80MHz; Channel:middle;

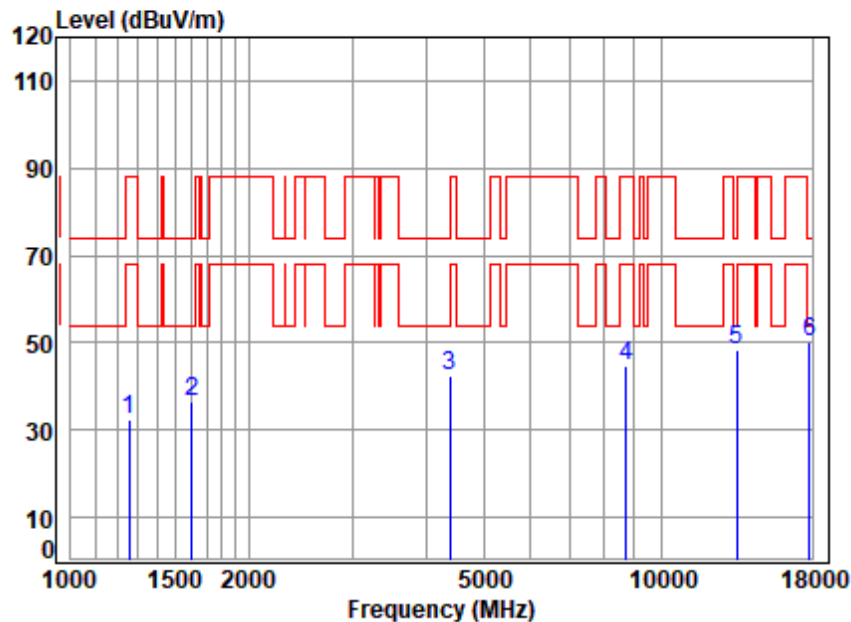


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6705 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	65.26	32.50	88.20	-55.70	peak
2	1606.441	4.19	26.74	61.69	67.22	36.46	74.00	-37.54	peak
3	4379.699	7.11	34.64	61.52	62.36	42.59	74.00	-31.41	peak
4	8713.630	9.70	36.90	61.88	60.04	44.76	88.20	-43.44	peak
5	13410.000	12.65	38.80	62.64	59.56	48.37	88.20	-39.83	peak
6	17793.090	15.23	43.89	61.09	52.11	50.14	74.00	-23.86	peak



Test Mode: 09; Polarity: Vertical; Hob Position Left; Bandwidth:80MHz; Channel:middle;

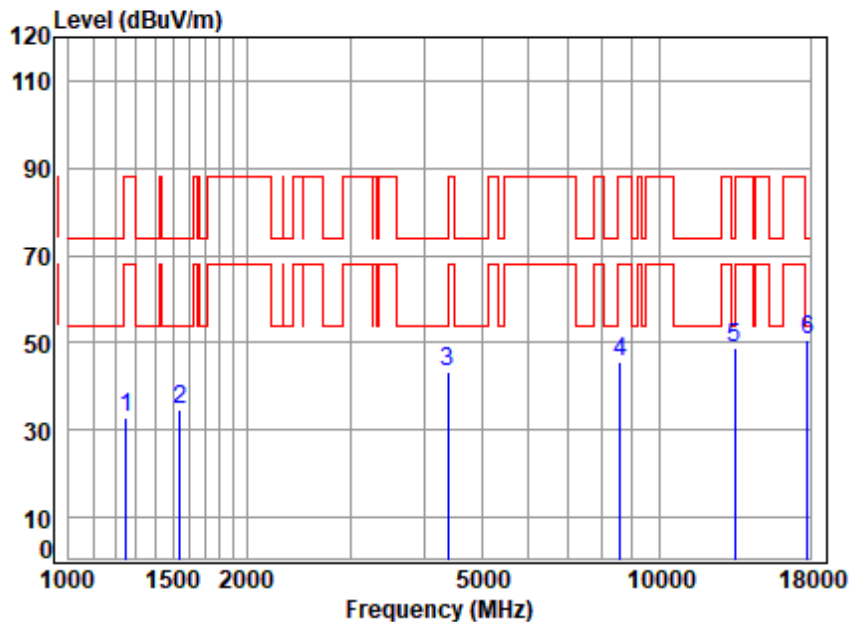


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6705 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.56	32.83	88.20	-55.37	peak
2	1542.733	4.10	26.97	61.67	65.43	34.83	74.00	-39.17	peak
3	4392.376	7.13	34.74	61.53	63.14	43.48	74.00	-30.52	peak
4	8588.607	9.60	36.88	61.84	60.93	45.57	88.20	-42.63	peak
5	13410.000	12.65	38.80	62.64	60.08	48.89	88.20	-39.31	peak
6	17844.590	15.29	43.90	61.04	52.28	50.43	74.00	-23.57	peak



Test Mode: 09; Polarity: Horizontal; Hob Position Left; Bandwidth:80MHz; Channel:High;

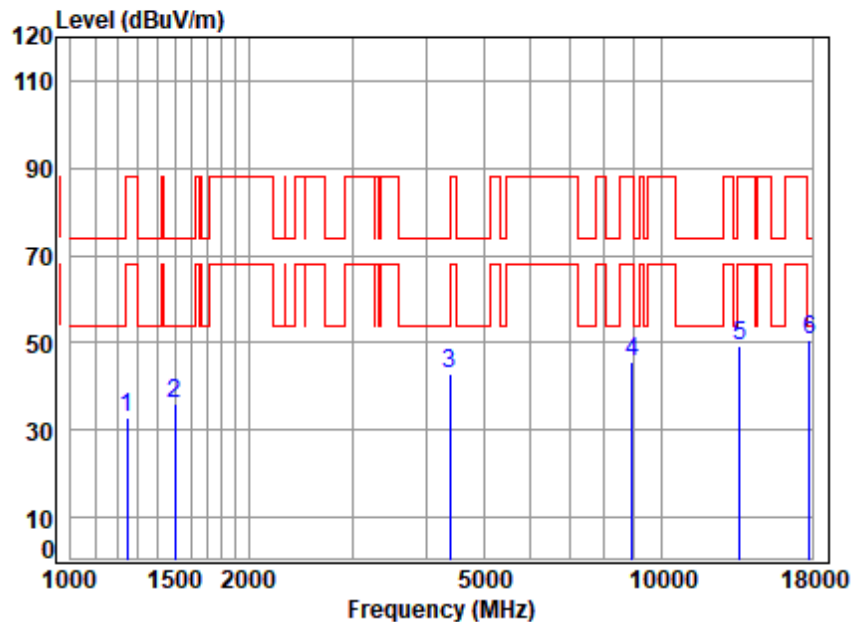


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6785 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.74	32.95	88.20	-55.25	peak
2	1503.119	4.04	26.81	61.66	66.69	35.88	74.00	-38.12	peak
3	4379.699	7.11	34.64	61.52	62.48	42.71	74.00	-31.29	peak
4	8917.462	9.86	37.13	61.94	60.47	45.52	88.20	-42.68	peak
5	13570.000	12.79	38.87	62.63	60.10	49.13	88.20	-39.07	peak
6	17844.590	15.29	43.90	61.04	52.59	50.74	74.00	-23.26	peak



Test Mode: 09; Polarity: Vertical; Hob Position Left; Bandwidth:80MHz; Channel:High;

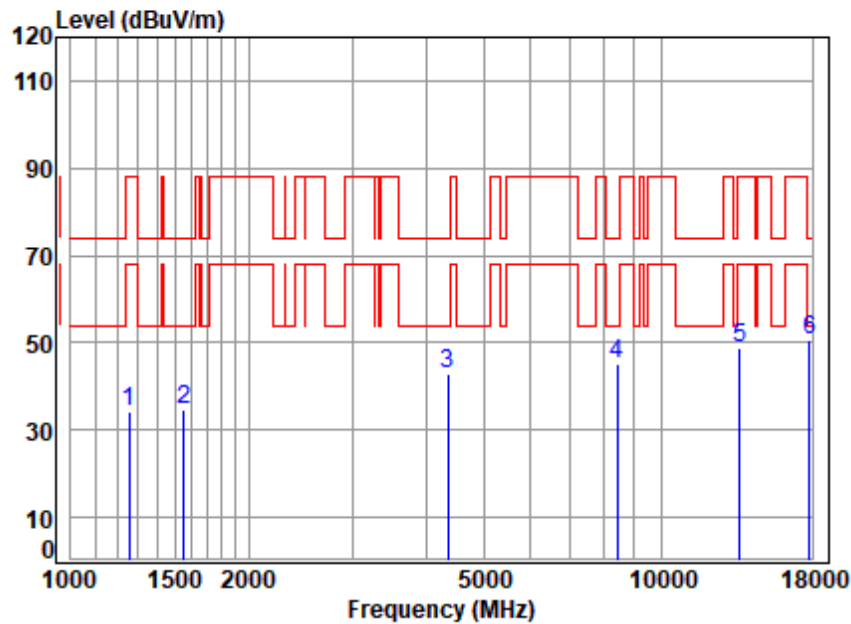


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6785 TX RSE
Note : 6E WIFI 11BE80 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	66.87	34.11	88.20	-54.09	peak
2	1556.169	4.12	26.98	61.67	65.15	34.58	74.00	-39.42	peak
3	4354.454	7.08	34.44	61.50	63.07	43.09	74.00	-30.91	peak
4	8416.584	9.45	36.67	61.78	60.95	45.29	74.00	-28.71	peak
5	13570.000	12.79	38.87	62.63	59.91	48.94	88.20	-39.26	peak
6	p17844.590	15.29	43.90	61.04	52.30	50.45	74.00	-23.55	peak



Test Mode: 09; Polarity: Horizontal; Hob Position Left; Bandwidth:160MHz; Channel:middle;

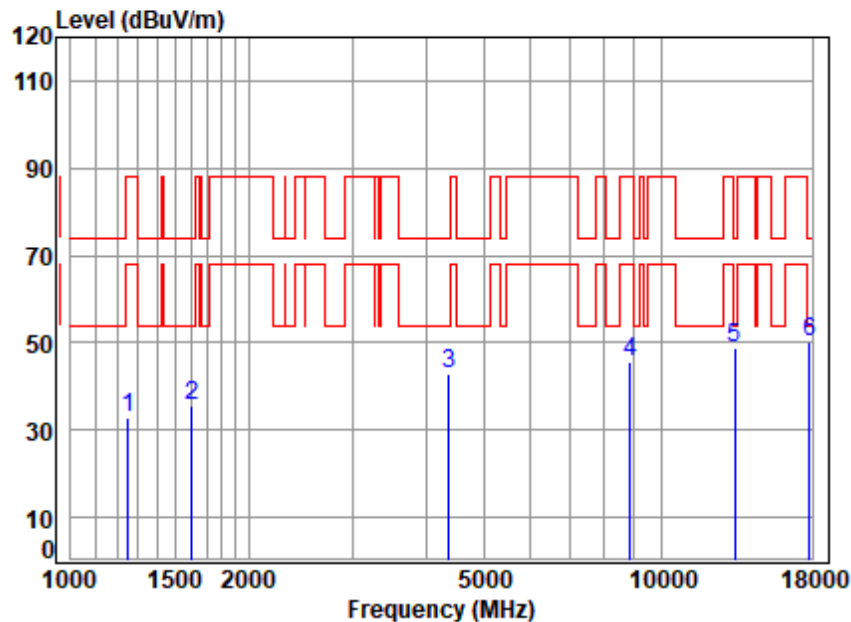


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6665 TX RSE
Note : 6E WIFI 11BE160 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.36	32.63	88.20	-55.57	peak
2	1601.804	4.19	26.78	61.69	66.28	35.56	74.00	-38.44	peak
3	4367.058	7.10	34.54	61.51	62.78	42.91	74.00	-31.09	peak
4	8866.062	9.82	37.20	61.93	60.57	45.66	88.20	-42.54	peak
5	13330.000	12.57	38.66	62.65	60.18	48.76	74.00	-25.24	peak
6	17793.090	15.23	43.89	61.09	52.31	50.34	74.00	-23.66	peak



Test Mode: 09; Polarity: Vertical; Hob Position Left; Bandwidth:160MHz; Channel:middle;

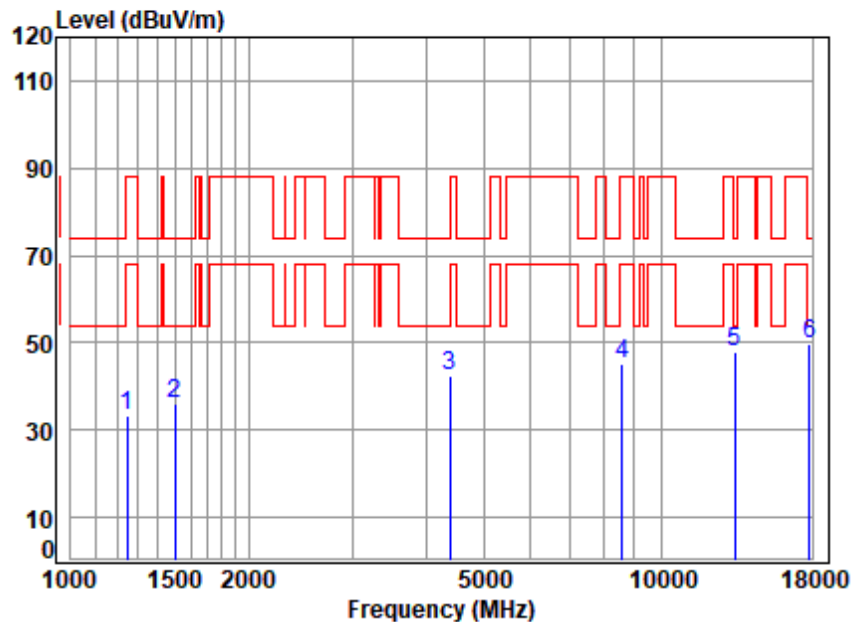

Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6665 TX RSE
Note : 6E WIFI 11BE160 MRU(Large)
: External ant

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	66.30	33.51	88.20	-54.69	peak
2	1503.119	4.04	26.81	61.66	66.71	35.90	74.00	-38.10	peak
3	4392.376	7.13	34.74	61.53	61.88	42.22	74.00	-31.78	peak
4	8588.607	9.60	36.88	61.84	60.66	45.30	88.20	-42.90	peak
5	13330.000	12.57	38.66	62.65	59.28	47.86	74.00	-26.14	peak
6	p17844.590	15.29	43.90	61.04	51.70	49.85	74.00	-24.15	peak



7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Any emission outside the 5925-7125 MHz frequency band shall not exceed -27 dBm/MHz e.i.r.p. spectral density

For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 23.9 °C

Humidity: 54.0 % RH


Atmospheric Pressure: 995 mbar



7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

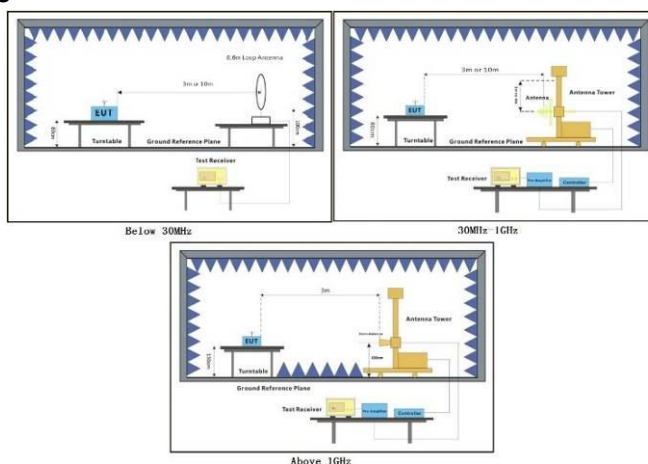

7.9.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark: This device operate as VLP device under U-NII band 5&7, without using band 8, so only the worst case of band 5 result for band edge is recorded in the report.



Test Mode: 07; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

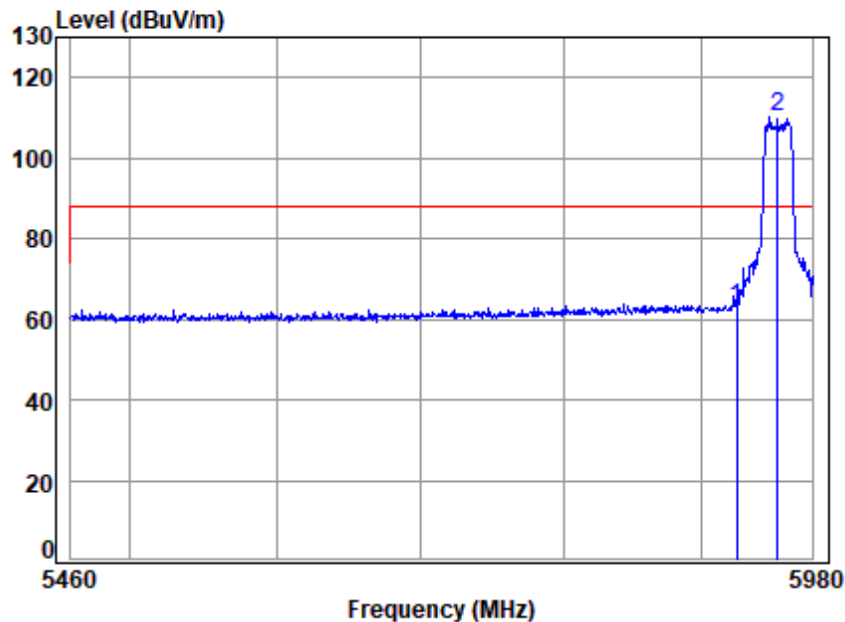


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 5955 Band edge
: 6G WIFI 11AX20
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	43.53	62.83	88.20	-25.37	peak
2 p	5955.000	19.60	34.72	34.92	90.85	110.25	88.20	22.05	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

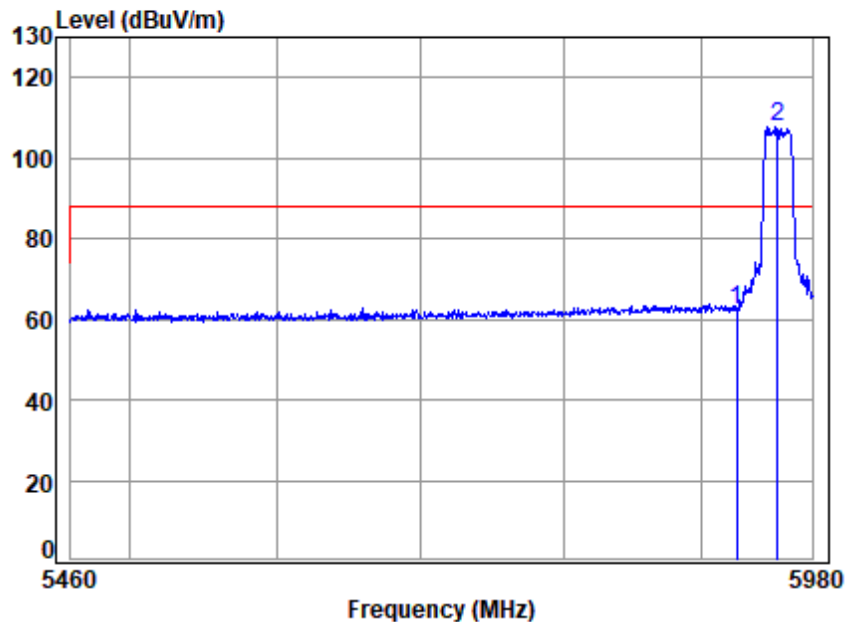


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 5955 Band edge
: 6G WIFI 11AX20
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	43.21	62.51	88.20	-25.69	peak
2 p	5955.000	19.60	34.72	34.92	88.49	107.89	88.20	19.69	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:Low

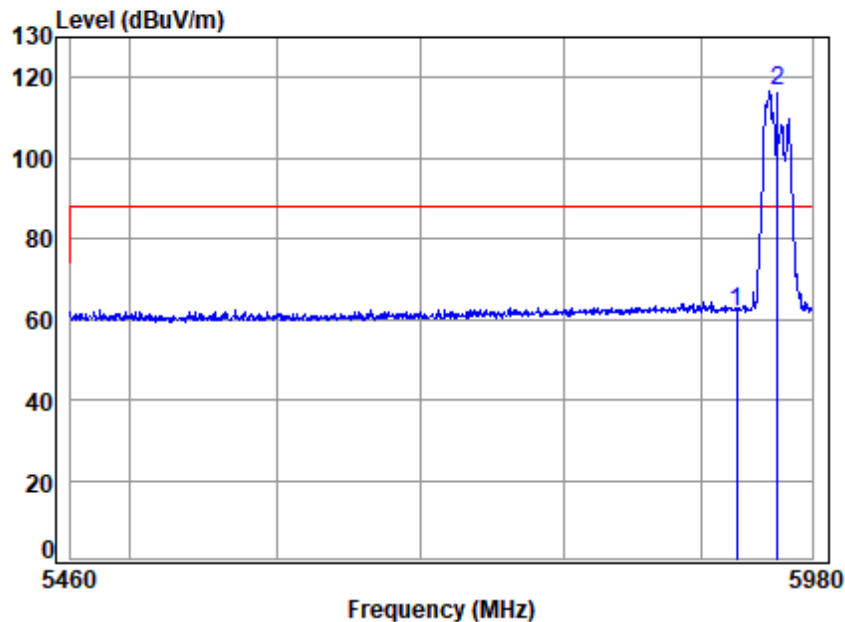


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 02331AT/02332AT
 Mode : 5955 Band edge
 : 6G WIFI 11AX20 Partial RU
 : External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	42.57	61.87	88.20	-26.33	peak
2 p	5955.000	19.60	34.72	34.92	97.38	116.78	88.20	28.58	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(52 RU); Bandwidth:20MHz; Channel:Low

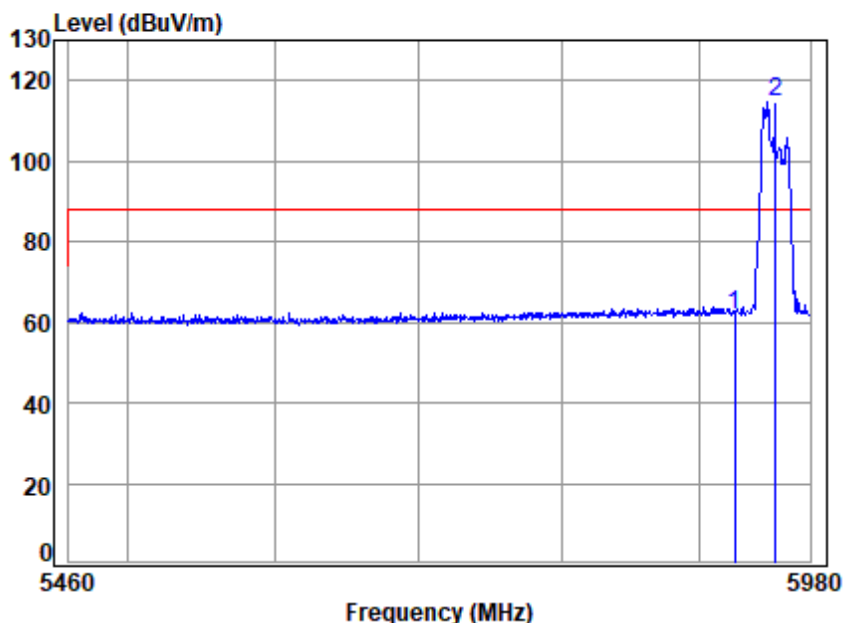


Site : chamber
 Condition: 3m VERTICAL
 Job No : 02331AT/02332AT
 Mode : 5955 Band edge
 : 6G WIFI 11AX20 Partial RU
 : External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	42.29	61.59	88.20	-26.61	peak
2 p	5955.000	19.60	34.72	34.92	95.37	114.77	88.20	26.57	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:20MHz; Channel:Low;

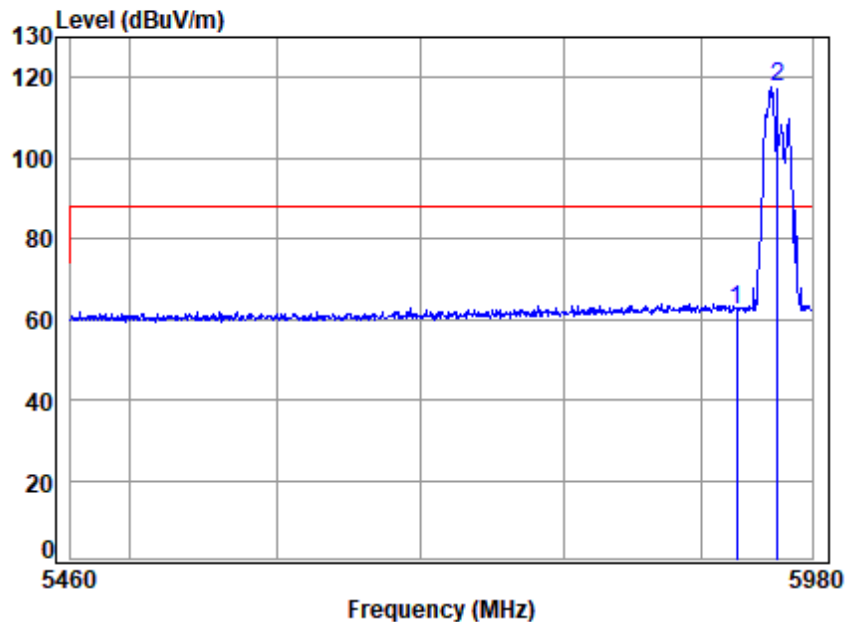


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 02331AT/02332AT
 Mode : 5955 Band edge
 : 6G WIFI 11BE20 MRU(Small)
 : External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	43.09	62.39	88.20	-25.81	peak
2 p	5955.000	19.60	34.72	34.92	98.18	117.58	88.20	29.38	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:20MHz; Channel:Low;

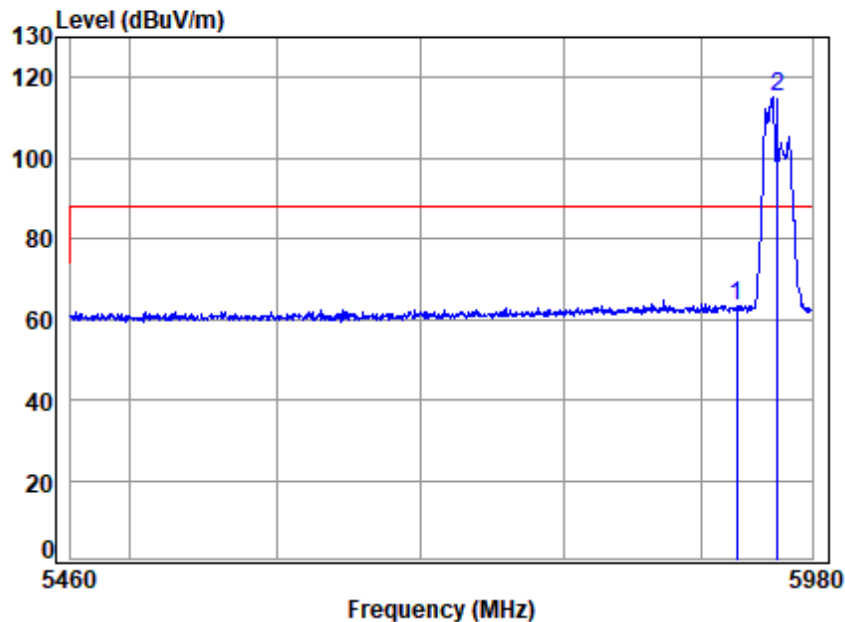


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 5955 Band edge
: 6G WIFI 11BE20 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	43.75	63.05	88.20	-25.15	peak
2 p	5955.000	19.60	34.72	34.92	95.72	115.12	88.20	26.92	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:40MHz; Channel:Low;

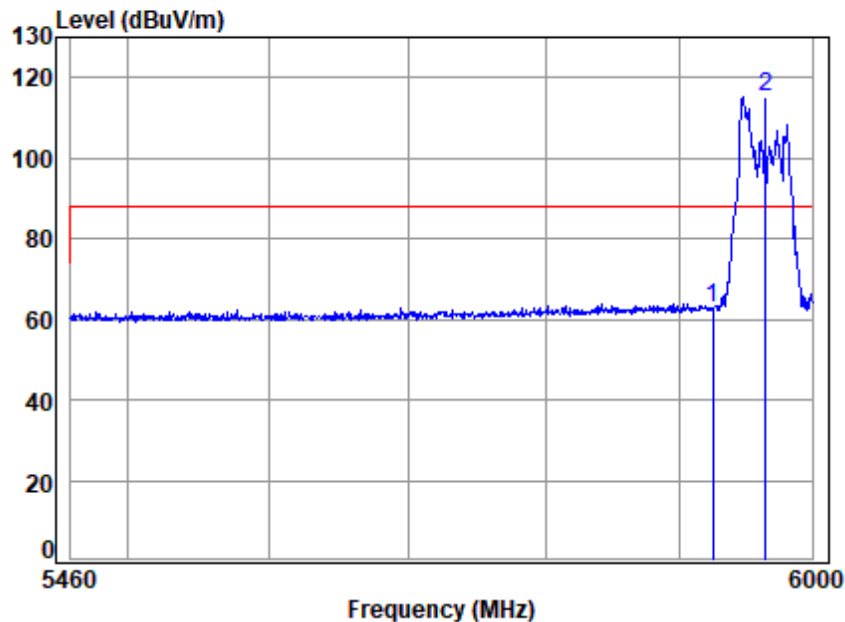


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 5965 Band edge
: 6G WIFI 11BE40 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	43.50	62.80	88.20	-25.40	peak
2 p	5965.000	19.61	34.76	34.92	95.62	115.07	88.20	26.87	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:40MHz; Channel:Low;

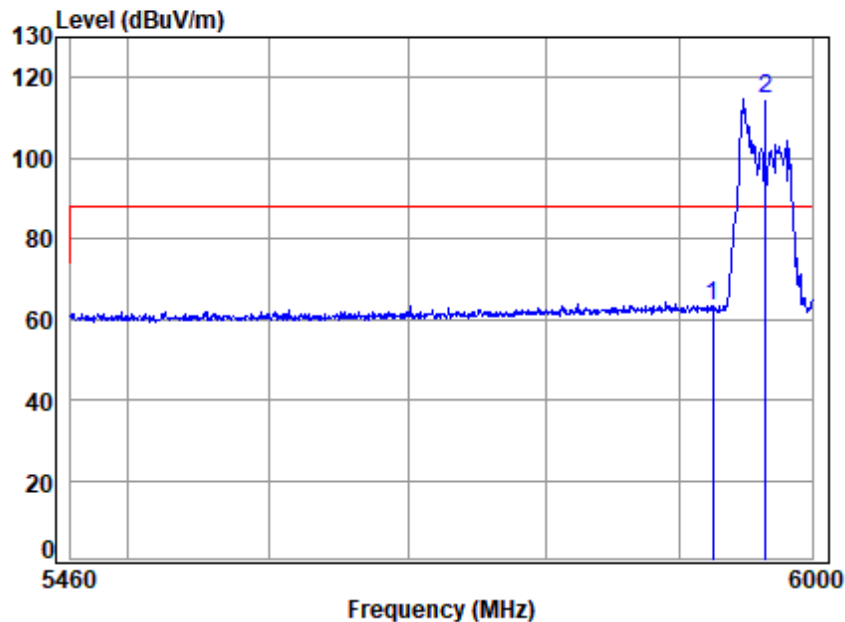


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 5965 Band edge
: 6G WIFI 11BE40 MRU(Small)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	44.04	63.34	88.20	-24.86	peak
2 p	5965.000	19.61	34.76	34.92	95.02	114.47	88.20	26.27	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:80MHz; Channel:Low;

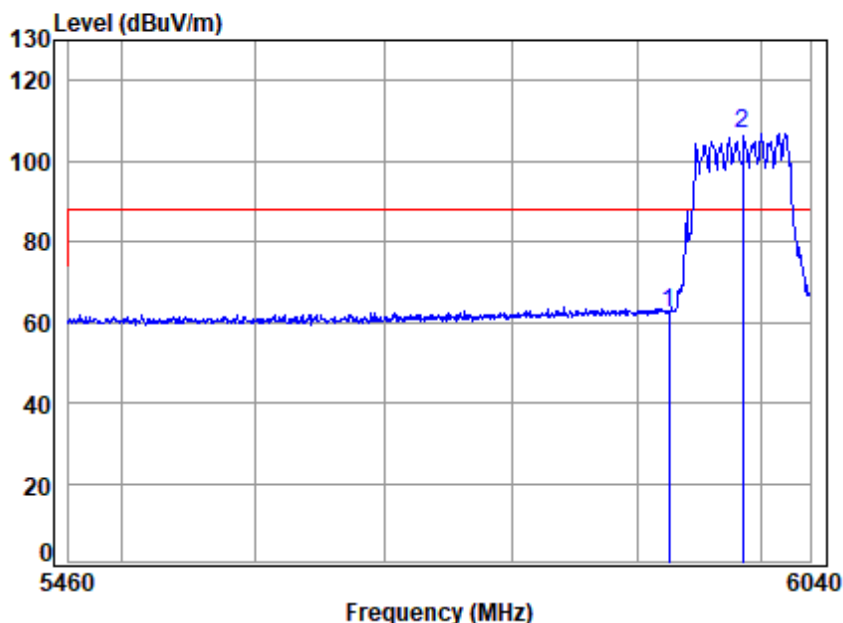


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 5985 Band edge
: 6G WIFI 11BE80 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	42.87	62.17	88.20	-26.03	peak
2 p	5985.000	19.62	34.84	34.91	87.14	106.69	88.20	18.49	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:80MHz; Channel:Low;

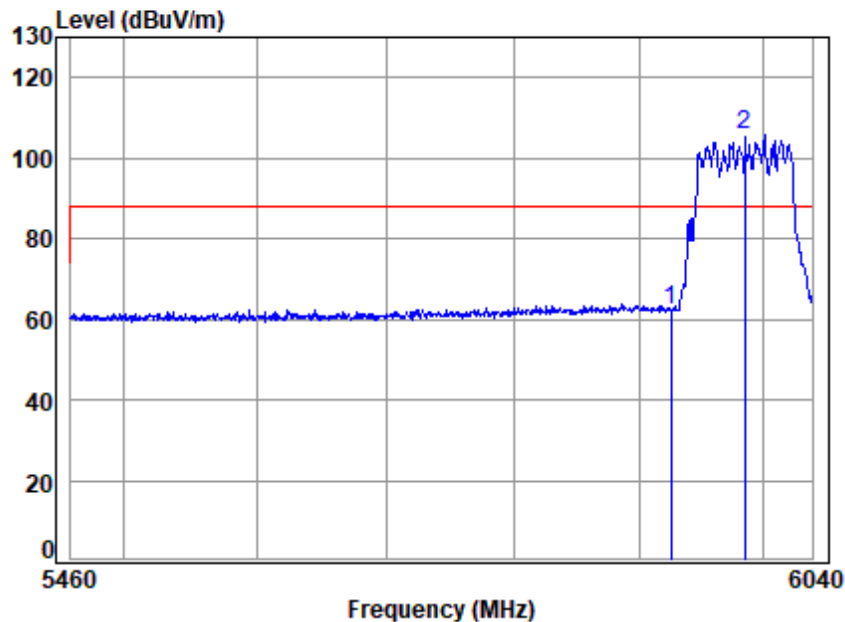


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 5985 Band edge
: 6G WIFI 11BE80 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	42.89	62.19	88.20	-26.01	peak
2 p	5985.000	19.62	34.84	34.91	86.26	105.81	88.20	17.61	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:160MHz; Channel:Low;

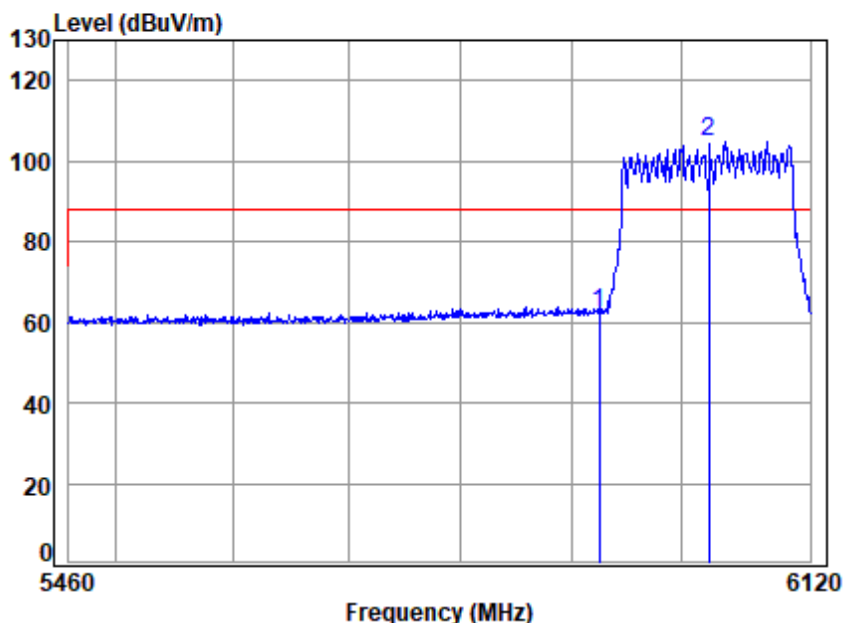


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6025 Band edge
: 6G WIFI 11BE160 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	42.80	62.10	88.20	-26.10	peak
2 p	6025.000	19.65	34.95	34.92	85.01	104.69	88.20	16.49	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:160MHz; Channel:Low;

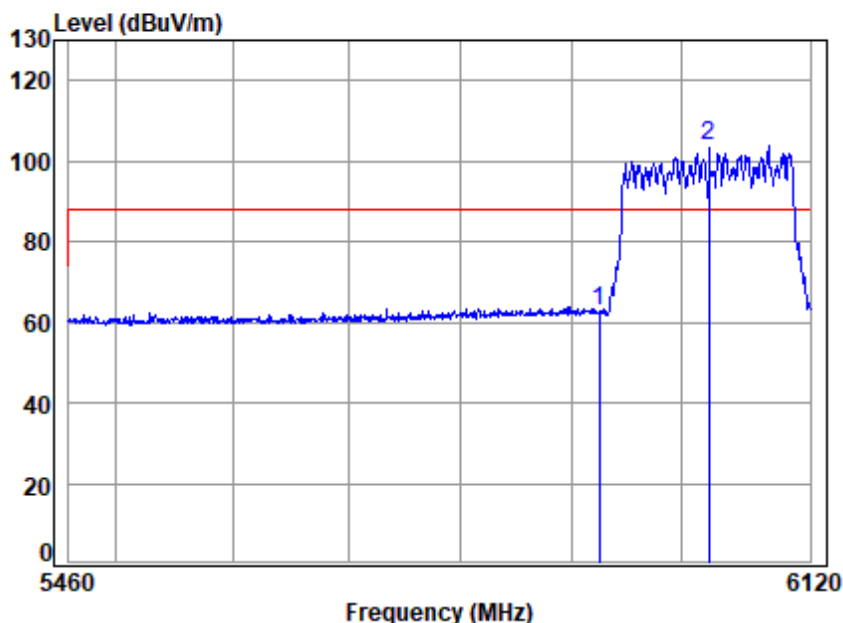


Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6025 Band edge
: 6G WIFI 11BE160 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	43.54	62.84	88.20	-25.36	peak
2 p	6025.000	19.65	34.95	34.92	84.14	103.82	88.20	15.62	peak



Test Mode: 07; Polarity: Horizontal; Hob Position Left; Bandwidth:320MHz; Channel:Low;

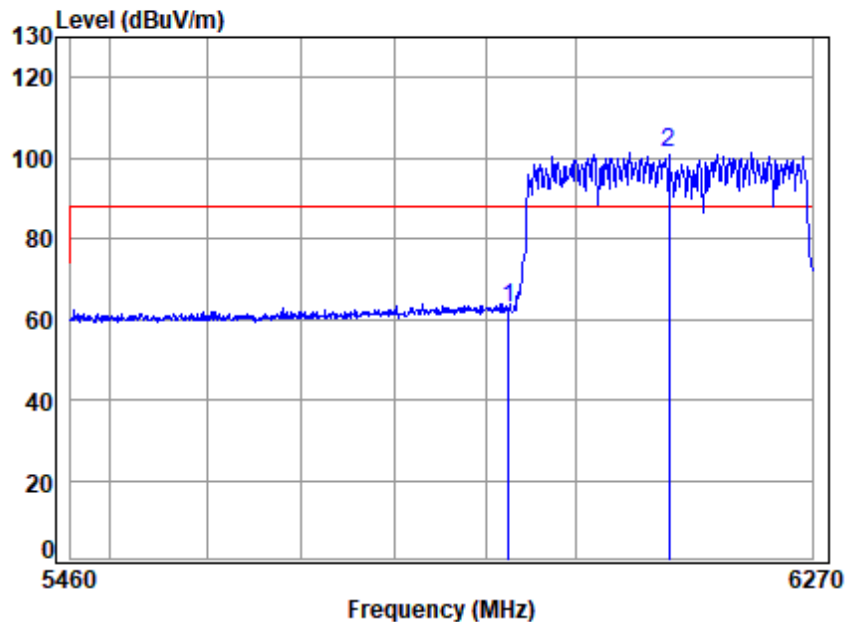


Site : chamber
Condition: 3m HORIZONTAL
Job No : 02331AT/02332AT
Mode : 6105 Band edge
: 6G WIFI 11BE320 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	43.29	62.59	88.20	-25.61	peak
2 p	6105.000	19.71	35.08	34.98	81.34	101.15	88.20	12.95	peak



Test Mode: 07; Polarity: Vertical; Hob Position Left; Bandwidth:320MHz; Channel:Low;

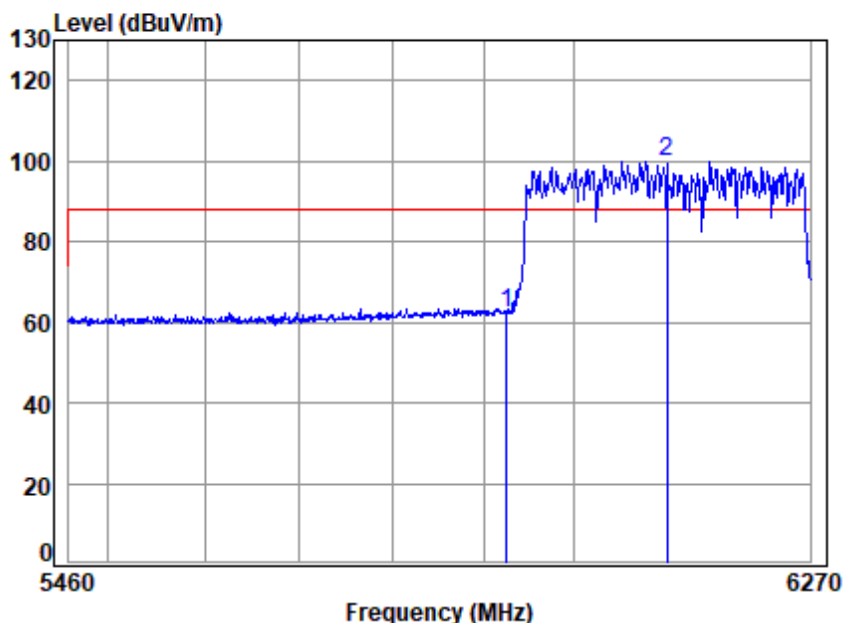

Site : chamber
Condition: 3m VERTICAL
Job No : 02331AT/02332AT
Mode : 6105 Band edge
: 6G WIFI 11BE320 MRU(Large)
: External ant

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	19.58	34.65	34.93	42.96	62.26	88.20	-25.94	peak
2 p	6105.000	19.71	35.08	34.98	80.07	99.88	88.20	11.68	peak



7.10 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

7.10.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 45 % RH Atmospheric Pressure: 1020 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

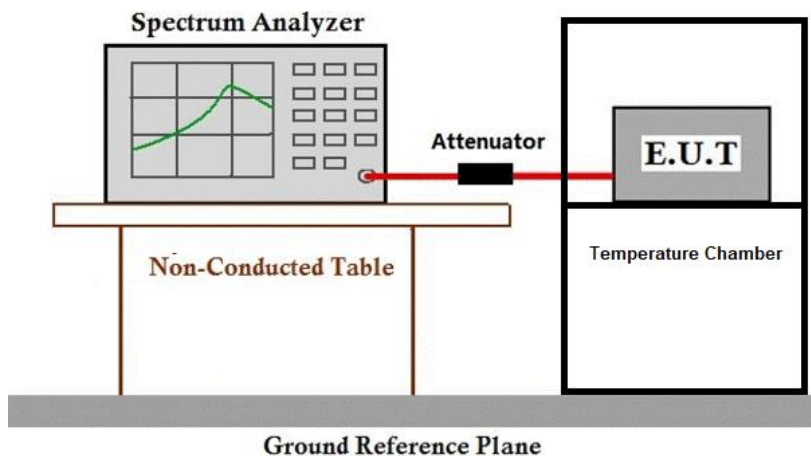

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.11 In-band Emission(Emission Mask)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (b)

Test Method: ANSI C63.10 (2013) Section 12.5

Limit:

Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

7.11.1 E.U.T. Operation

Operating Environment:


Temperature: 20 °C Humidity: 45 % RH Atmospheric Pressure: 1020 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160/320, Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160/320, Only the data of worst case is recorded in the report.



7.11.3 Test Setup Diagram

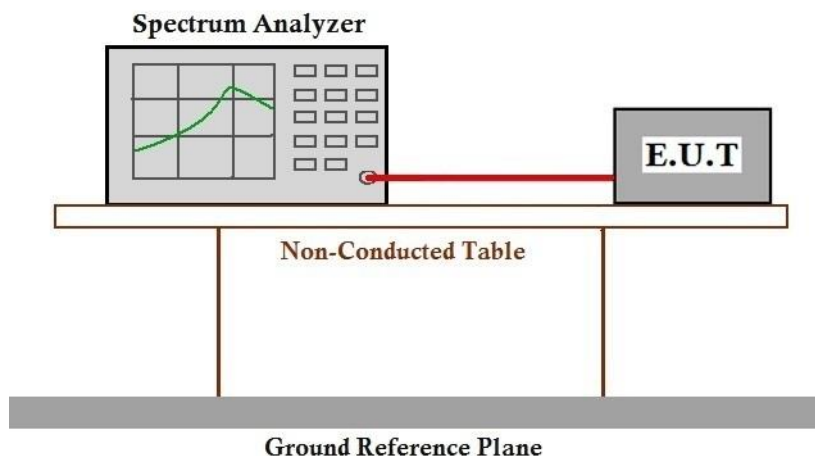

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.12 Contention Based Protocol

Test Requirement 47 CFR Part 15, Subpart E 15.407 (d)

Test Method: KDB 987597 D02

Limit:

Detect co-channel energy with 90% or greater certainty.

7.12.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C


Humidity: 45 % RH

Atmospheric Pressure: 1020 mbar

7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Normal Operation:Keep the EUT communicated with other device.

7.12.3 Test Setup Diagram

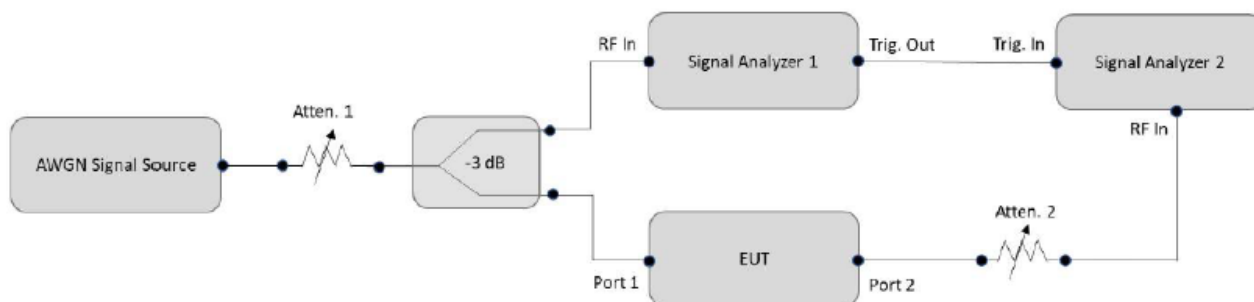

7.12.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.13 Transmitter Power Control

Test Requirement 47 CFR Part 15, Subpart E 15.407 (d)(10)

Test Method: ANSI C63.10 (2013) Section 12.3

Limit: A very low power device is required to have the capability to operate at least 6 dB below the maximum EIRP power spectral density (PSD) value of -5 dBm/MHz.

7.13.1 E.U.T. Operation

Operating Environment:


Temperature: 20 °C Humidity: 45 % RH Atmospheric Pressure: 1020 mbar

7.13.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.13.3 Test Setup Diagram

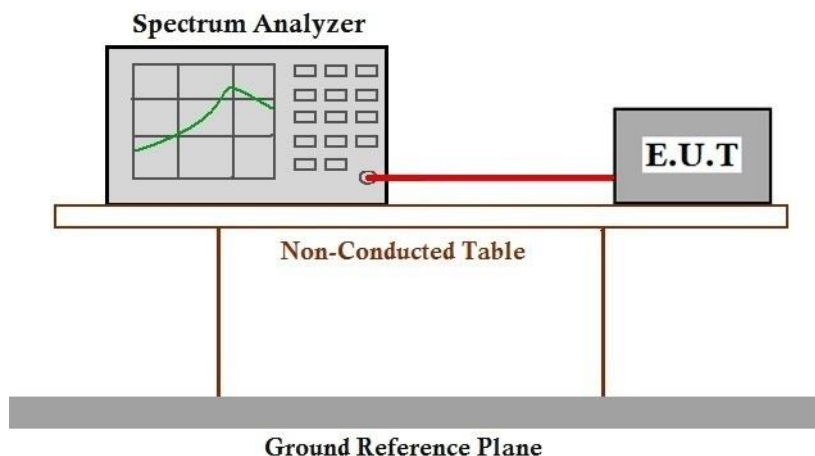

7.13.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2307002331AT

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2307002331AT



10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1


Ant1										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
NTNV	802.11be (EHT20)	MIMO	5955	RU242	Left	5.350	5.486	97.52	0.11	0.64
			6175	RU242	Left	5.348	5.468	97.81	0.10	0.22
			6415	RU242	Left	5.364	5.530	97.00	0.13	2.41
	802.11be (EHT40)	MIMO	5965	RU484	Left	5.394	5.548	97.22	0.12	1.57
			6165	RU484	Left	5.392	5.574	96.73	0.14	1.91
			6405	RU484	Left	5.410	5.684	95.18	0.21	3.76
	802.11be (EHT80)	MIMO	5985	RU996	Left	2.701	2.856	94.57	0.24	3.40
			6145	RU996	Left	2.701	2.865	94.28	0.26	4.02
			6385	RU996	Left	2.702	2.883	93.72	0.28	4.61
	802.11be (EHT160)	MIMO	6025	2xRU996	Left	2.177	2.314	94.08	0.27	3.82
			6185	2xRU996	Left	2.183	2.359	92.54	0.34	5.63
			6345	2xRU996	Left	1.829	2.011	90.95	0.41	5.64
	802.11be (EHT320)	MIMO	6105	4xRU996	Left	2.176	2.350	92.60	0.33	4.88
			6265	4xRU996	Left	2.177	2.359	92.28	0.35	5.23

1.1.2 Ant1


Ant1										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
NTNV	802.11be (EHT20)	MIMO	6535	RU242	Left	5.348	5.494	97.34	0.12	1.81
			6695	RU242	Left	5.348	5.522	96.85	0.14	2.12
			6855	RU242	Left	5.348	5.522	96.85	0.14	2.30
	802.11be (EHT40)	MIMO	6565	RU484	Left	5.392	5.574	96.73	0.14	2.24
			6685	RU484	Left	5.394	5.540	97.36	0.12	1.61
			6845	RU484	Left	5.393	5.557	97.05	0.13	1.76
	802.11be (EHT80)	MIMO	6625	RU996	Left	2.701	2.865	94.28	0.26	3.06
			6705	RU996	Left	2.701	2.874	93.98	0.27	3.35
			6785	RU996	Left	2.701	2.865	94.28	0.26	3.69
	802.11be (EHT160)	MIMO	6665	2xRU996	Left	2.184	2.350	92.94	0.32	5.25

1.2 Test Graph


1.2.1 Ant1

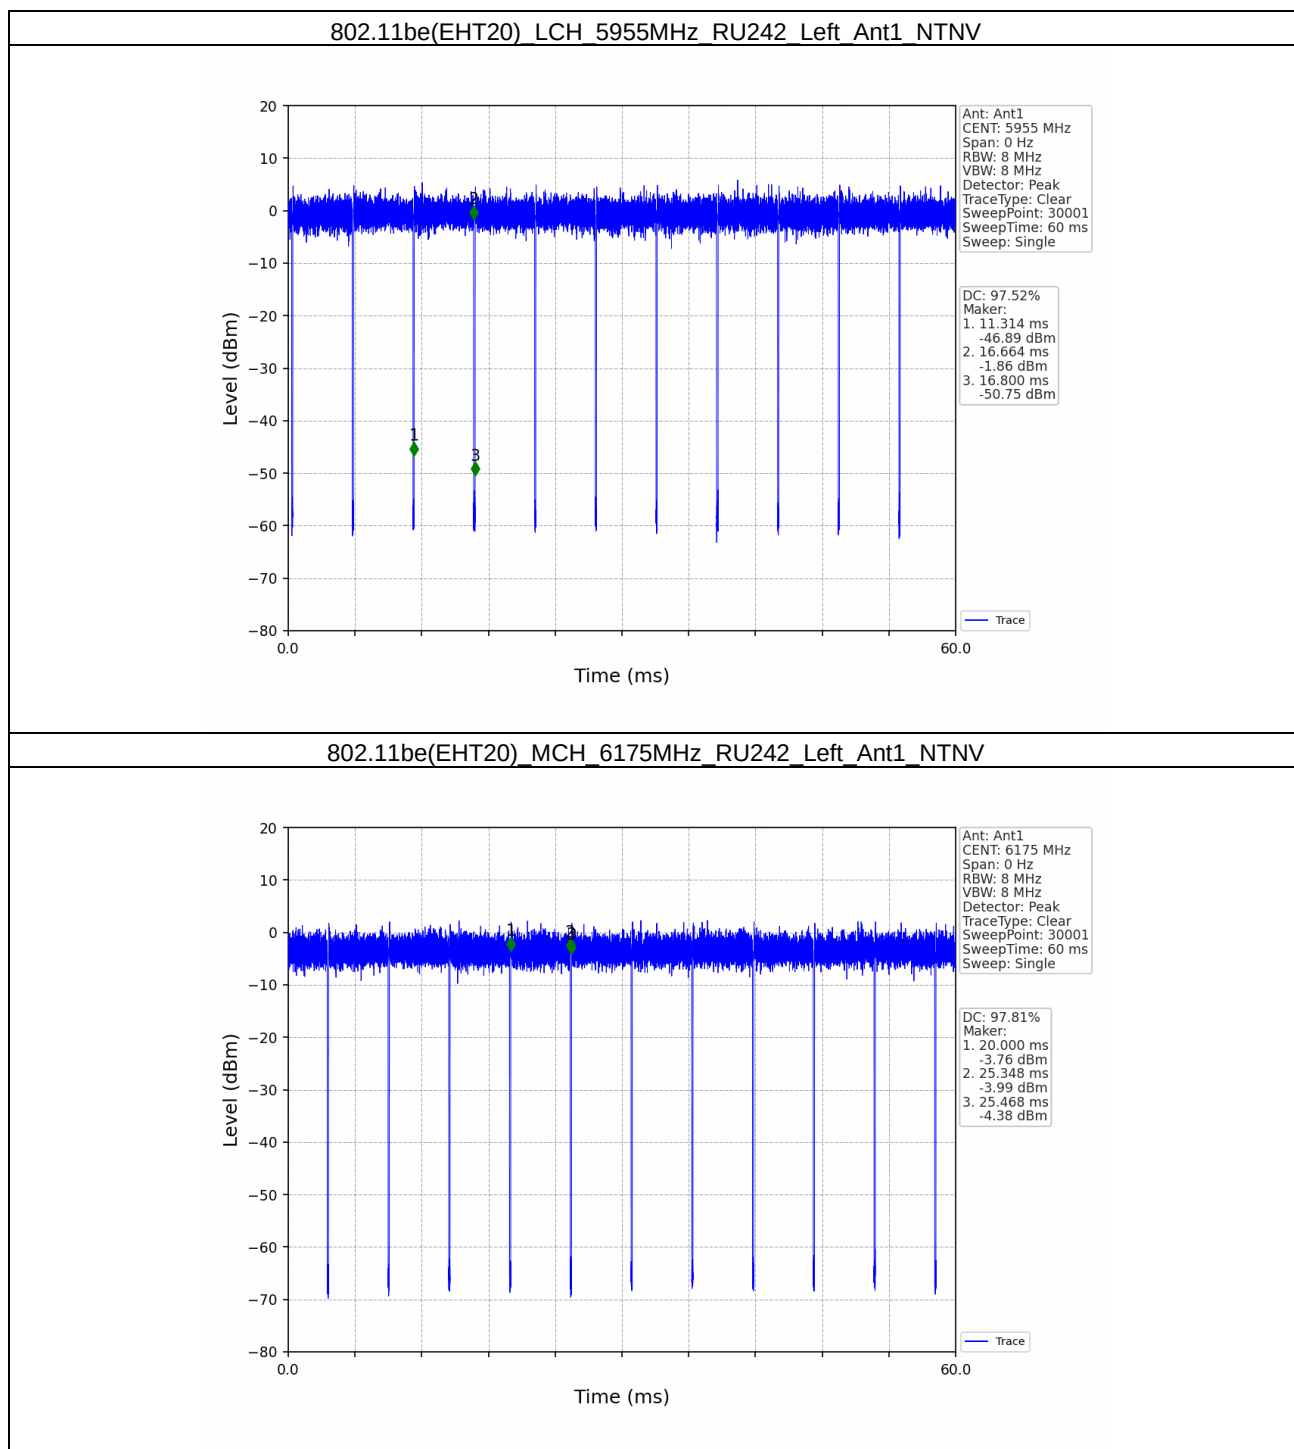


802.11be(EHT20)_HCH_6415MHz_RU242_Left_Ant1_NTNV

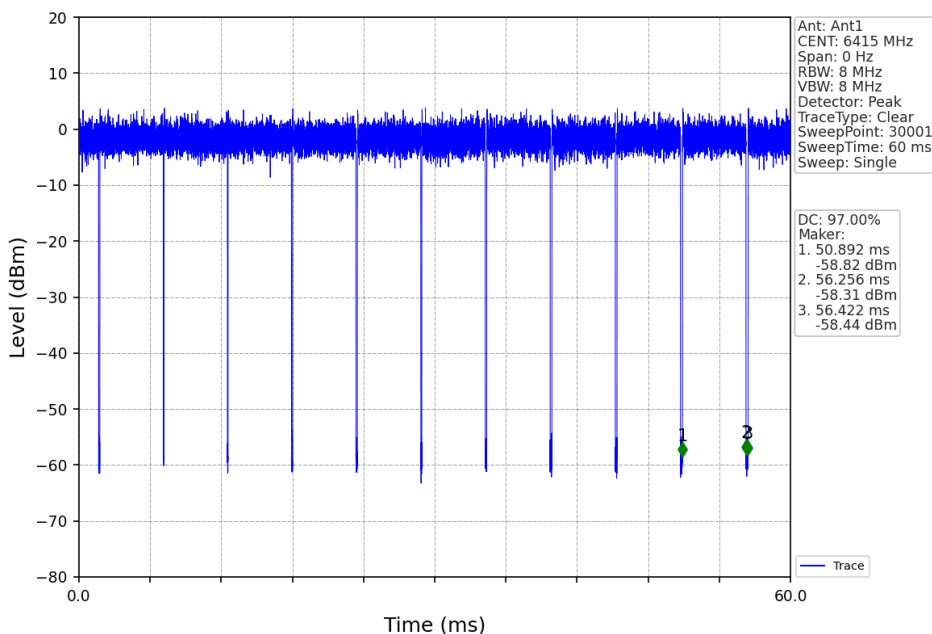


802.11be(EHT40)_LCH_5965MHz_RU484_Left_Ant1_NTNV

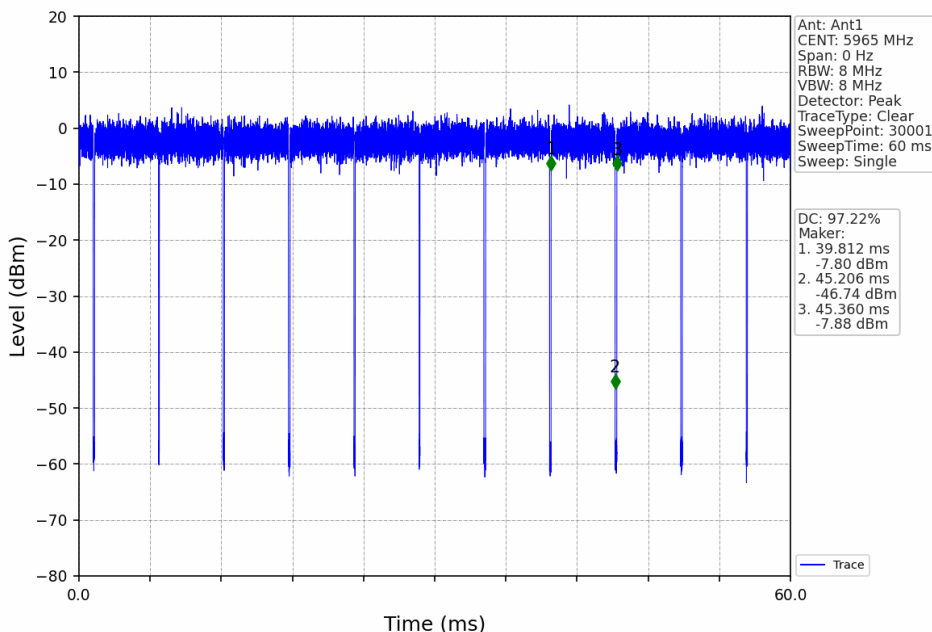

802.11be(EHT40)_MCH_6165MHz_RU484_Left_Ant1_NTNV

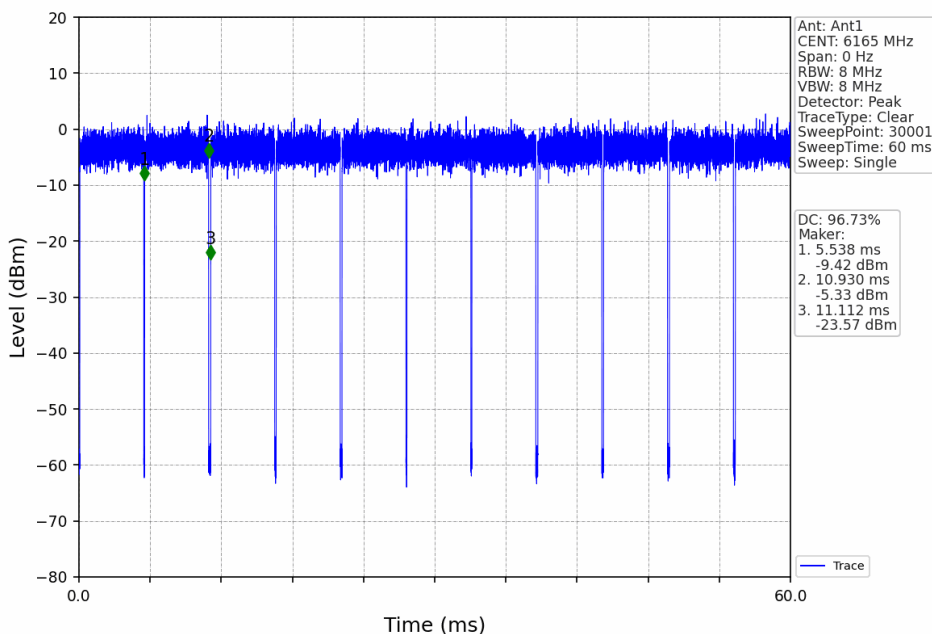


802.11be(EHT40)_HCH_6405MHz_RU484_Left_Ant1_NTNV

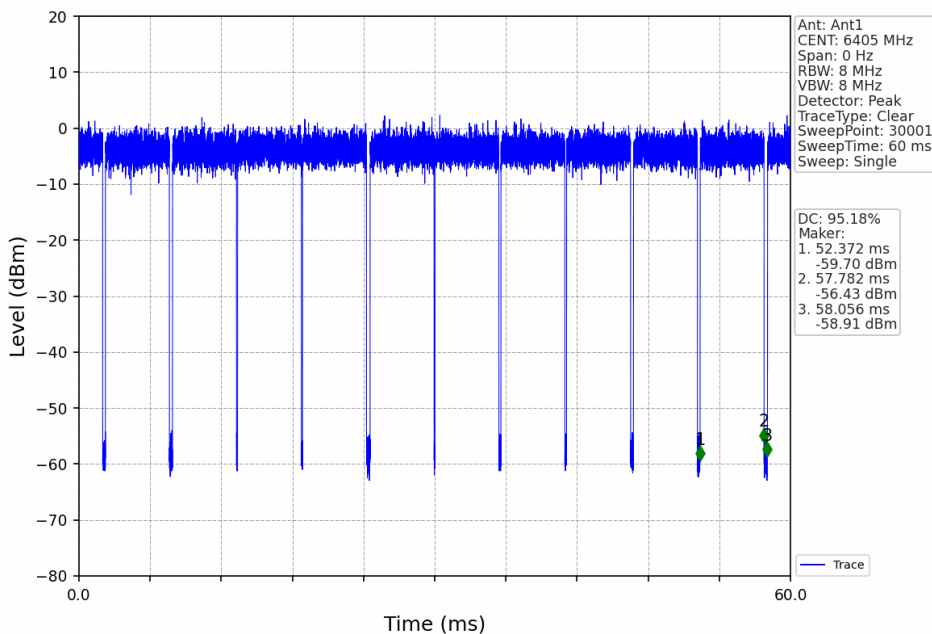


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

802.11be(EHT80)_LCH_5985MHz_RU996_Left_Ant1_NTNV

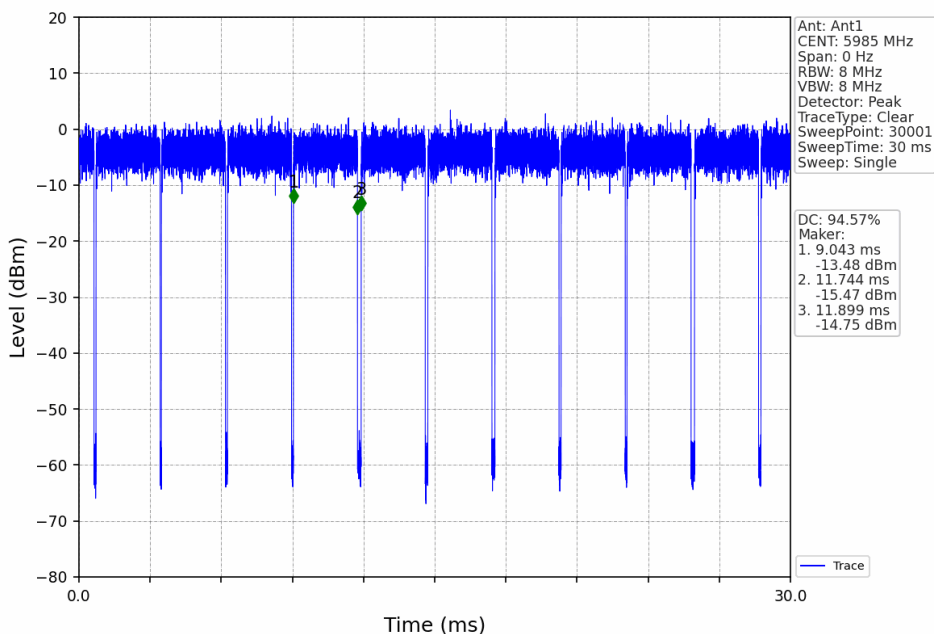

802.11be(EHT80)_MCH_6145MHz_RU996_Left_Ant1_NTNV

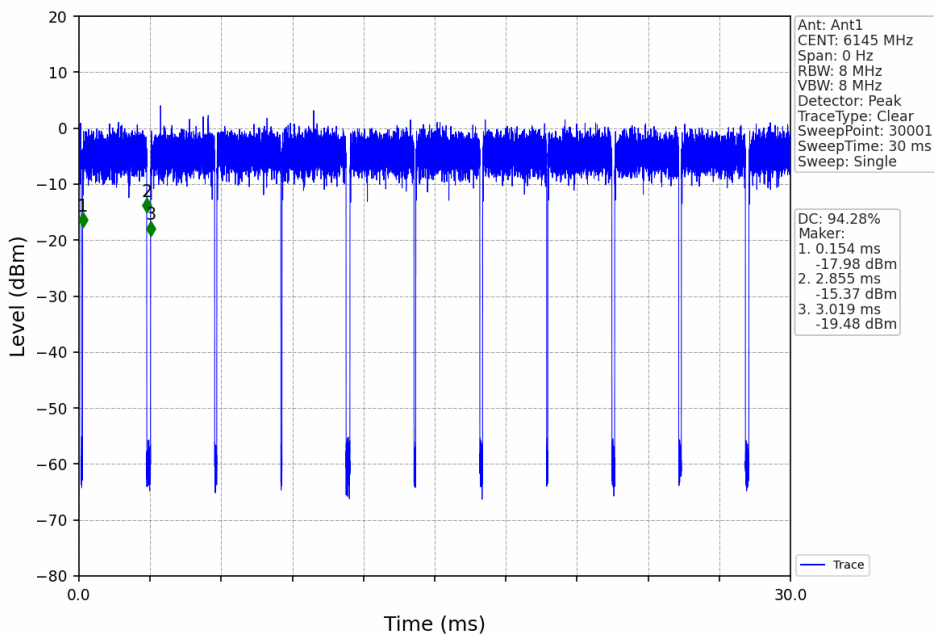


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11be(EHT80)_HCH_6385MHz_RU996_Left_Ant1_NTNV

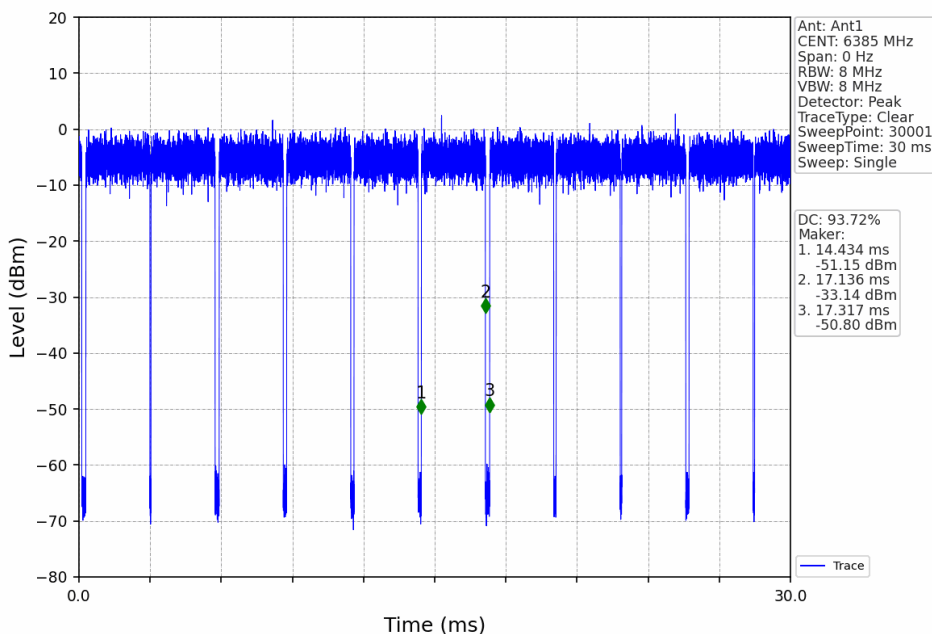


802.11be(EHT160)_LCH_6025MHz_2xRU996_Left_Ant1_NTNV

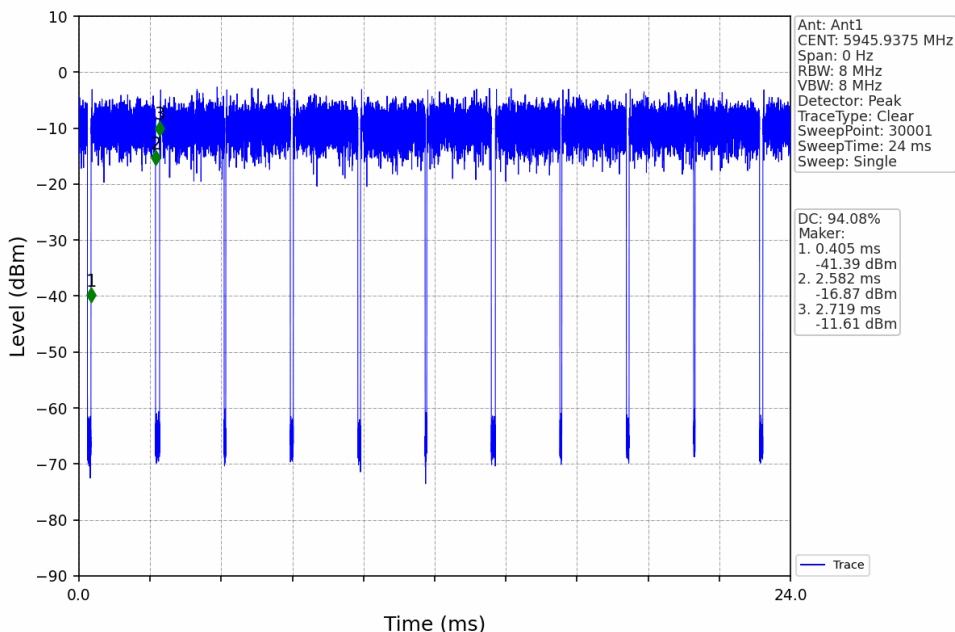


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


802.11be(EHT160) MCH 6185MHz 2xRU996 Left Ant1 NTNV

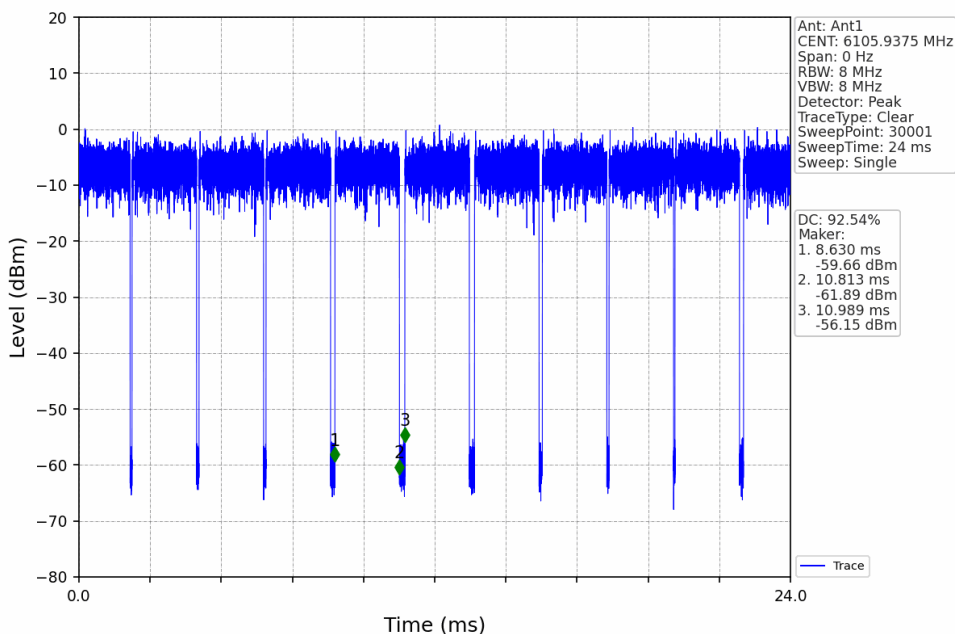


802.11be(EHT160) HCH 6345MHz 2xRU996 Left Ant1 NTNV

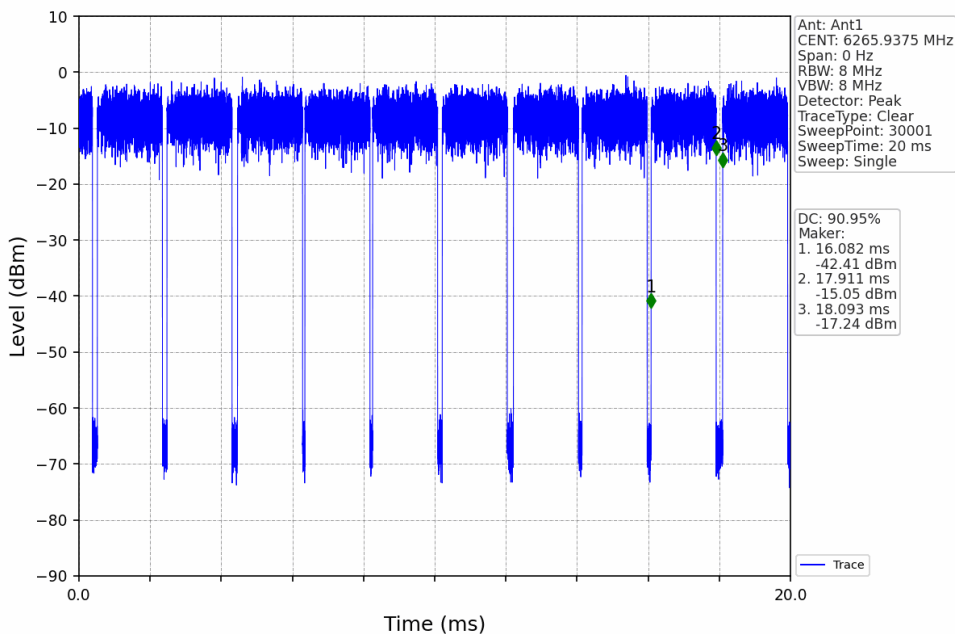

802.11be(EHT320) LCH 6105MHz 4xRU996 Left Ant1 NTN

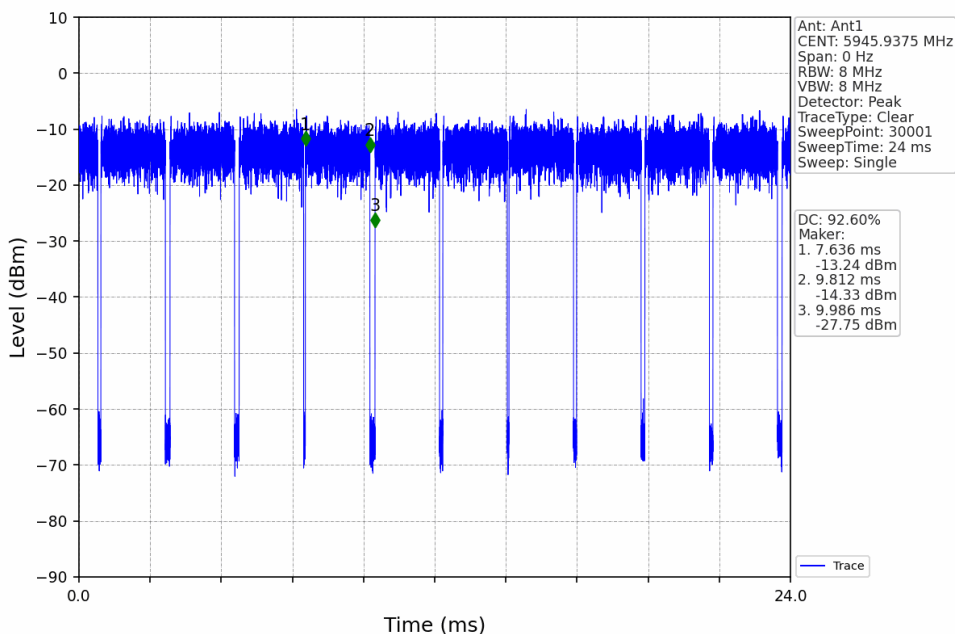


802.11be(EHT320) HCH 6265MHz 4xRU996 Left Ant1 NTN

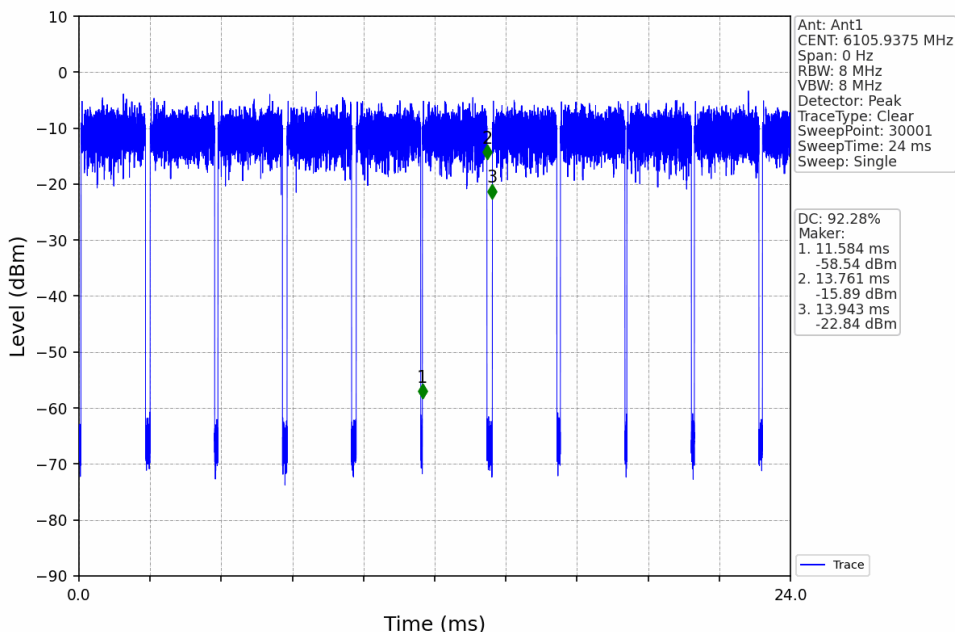


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


1.2.2 Ant1

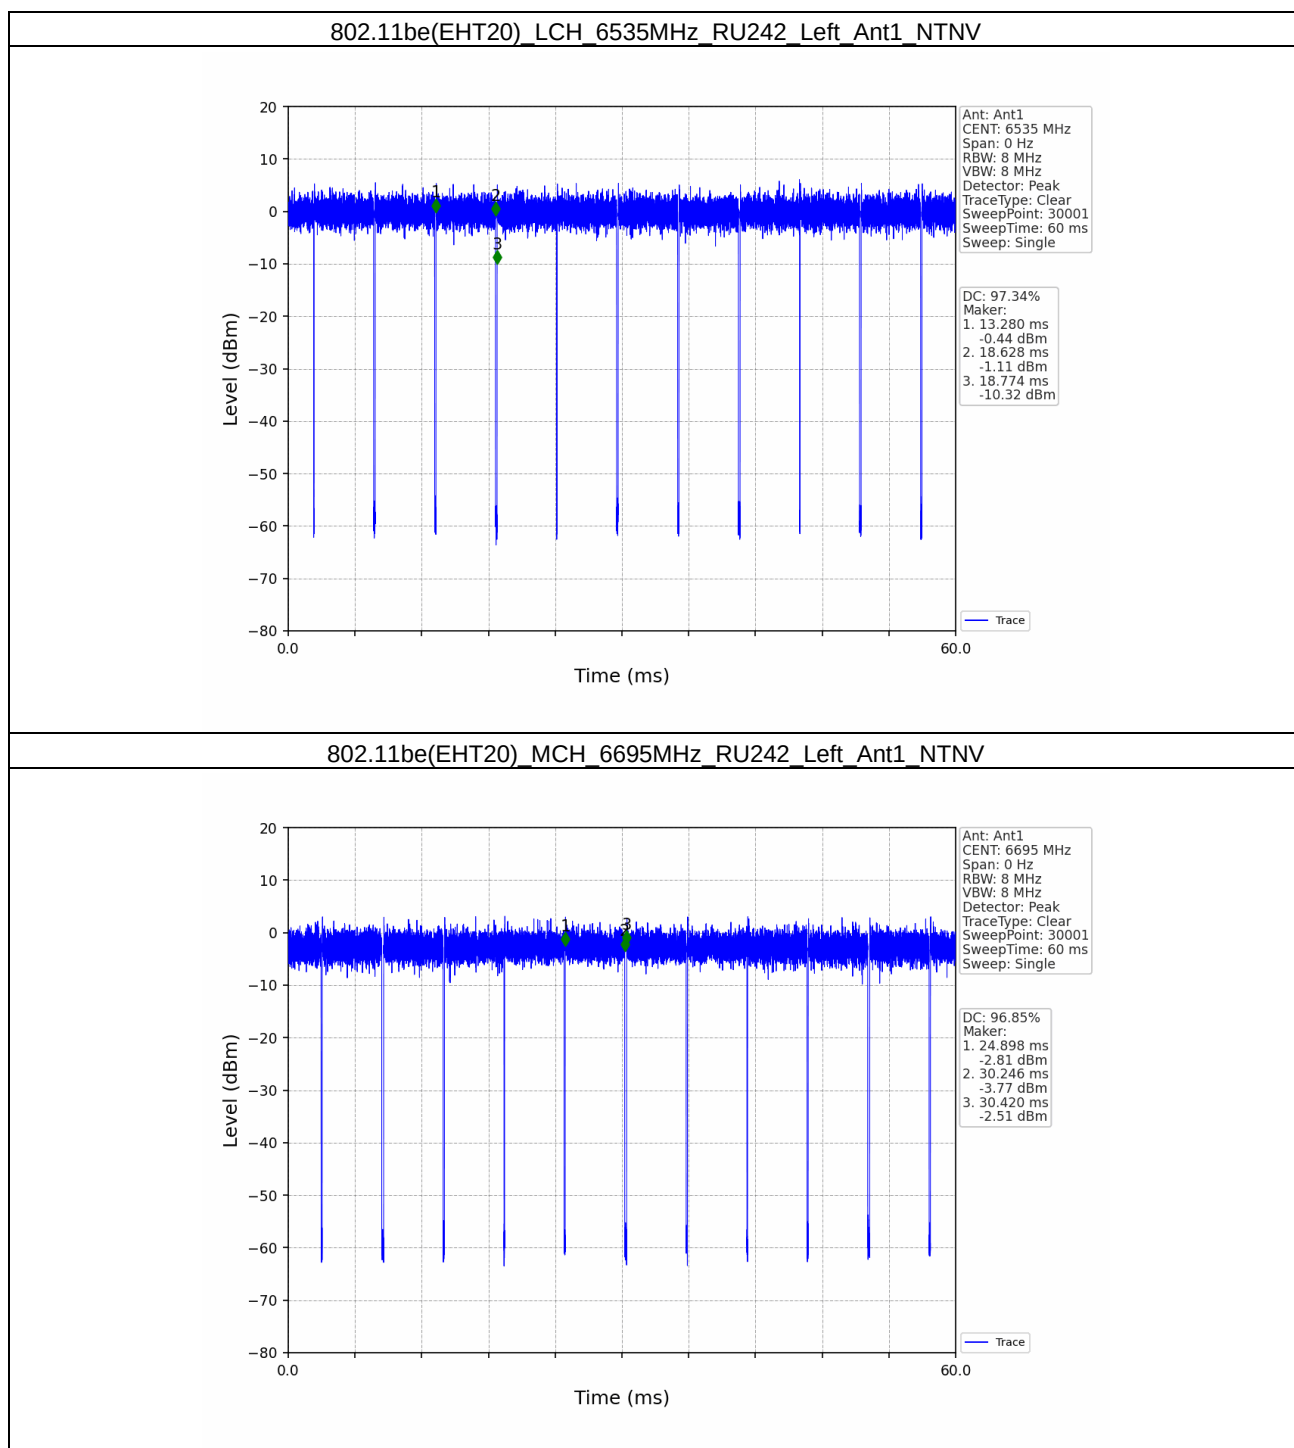

802.11be(EHT20)_HCH_6855MHz_RU242_Left_Ant1_NTNV

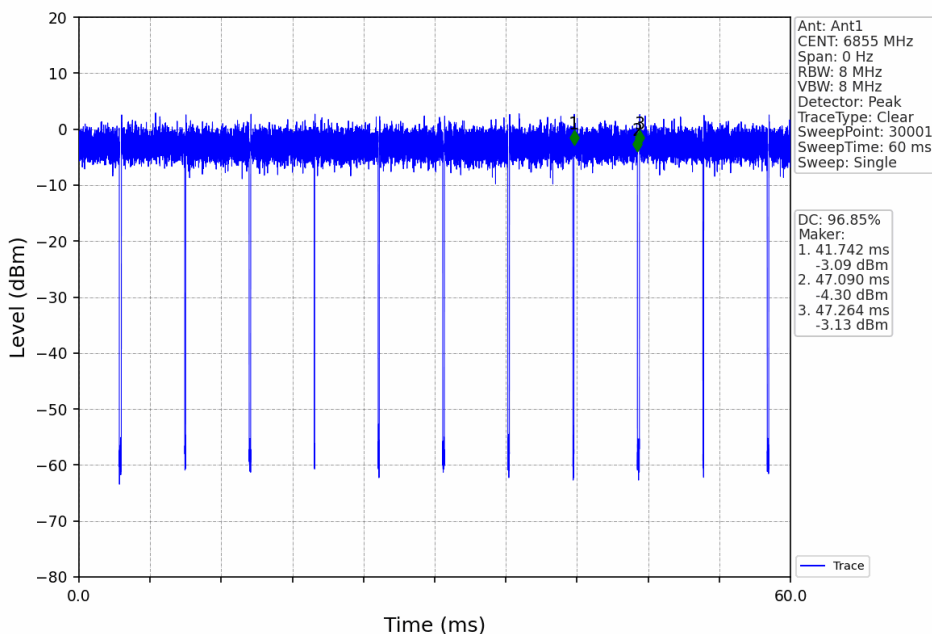


802.11be(EHT40)_LCH_6565MHz_RU484_Left_Ant1_NTNV

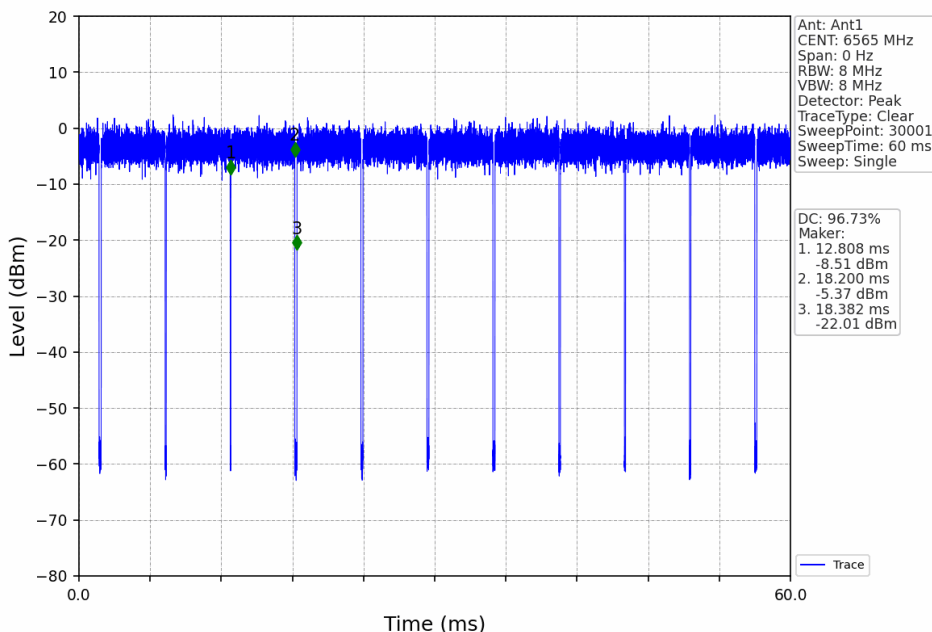


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

802.11be(EHT40)_MCH_6685MHz_RU484_Left_Ant1_NTNV

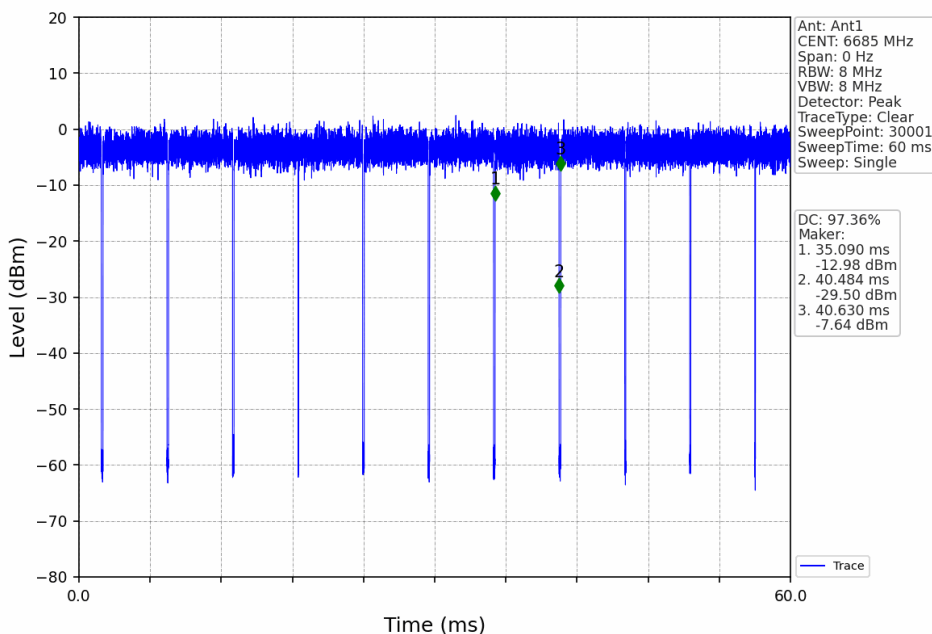

802.11be(EHT40)_HCH_6845MHz_RU484_Left_Ant1_NTNV

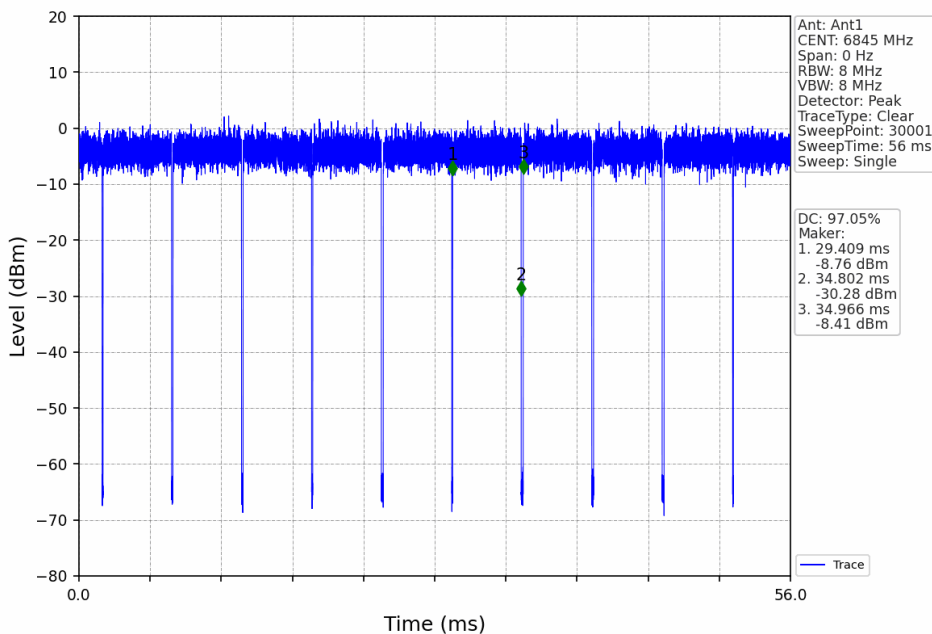


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen EMC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11be(EHT80)_LCH_6625MHz_RU996_Left_Ant1_NTNV

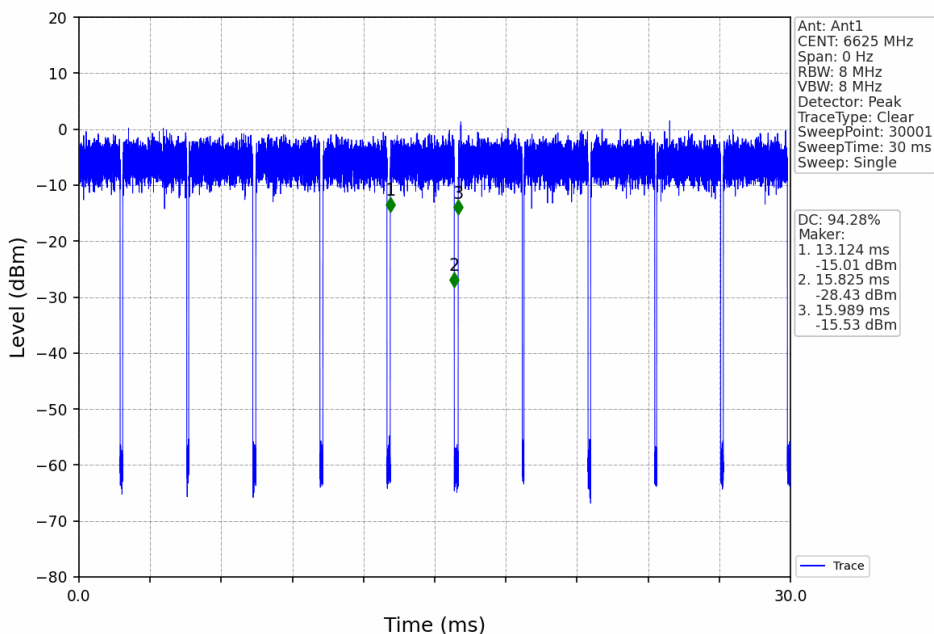


802.11be(EHT80)_MCH_6705MHz_RU996_Left_Ant1_NTNV

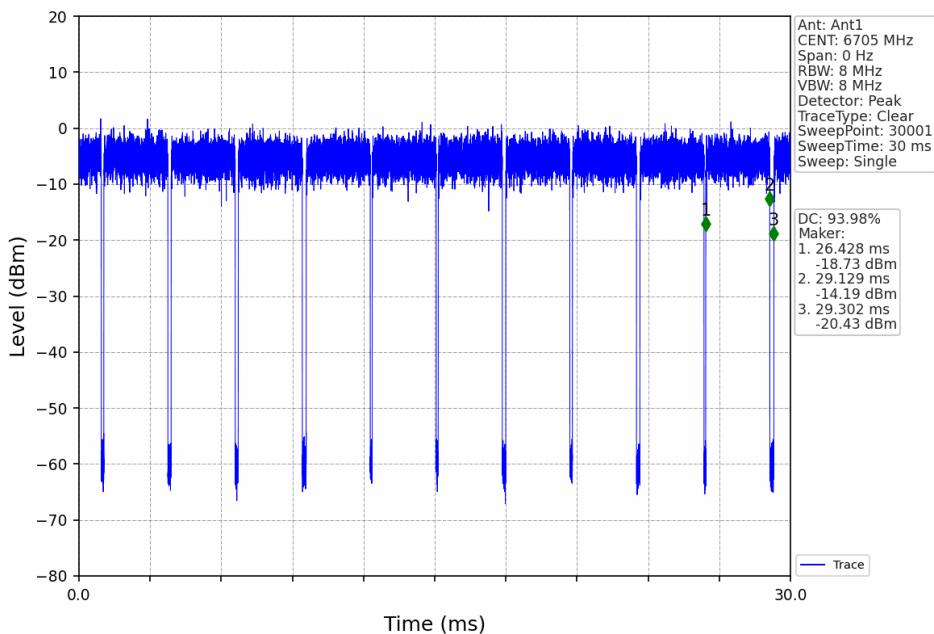


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

802.11be(EHT80)_HCH_6785MHz_RU996_Left_Ant1_NTNV

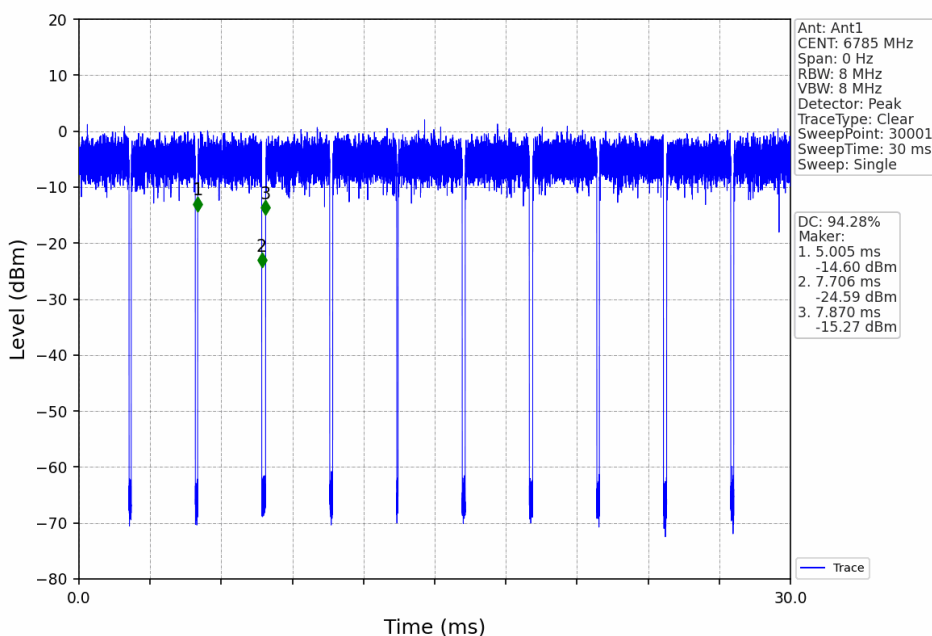

802.11be(EHT160)_MCH_6665MHz_2xRU996_Left_Ant1_NTNV

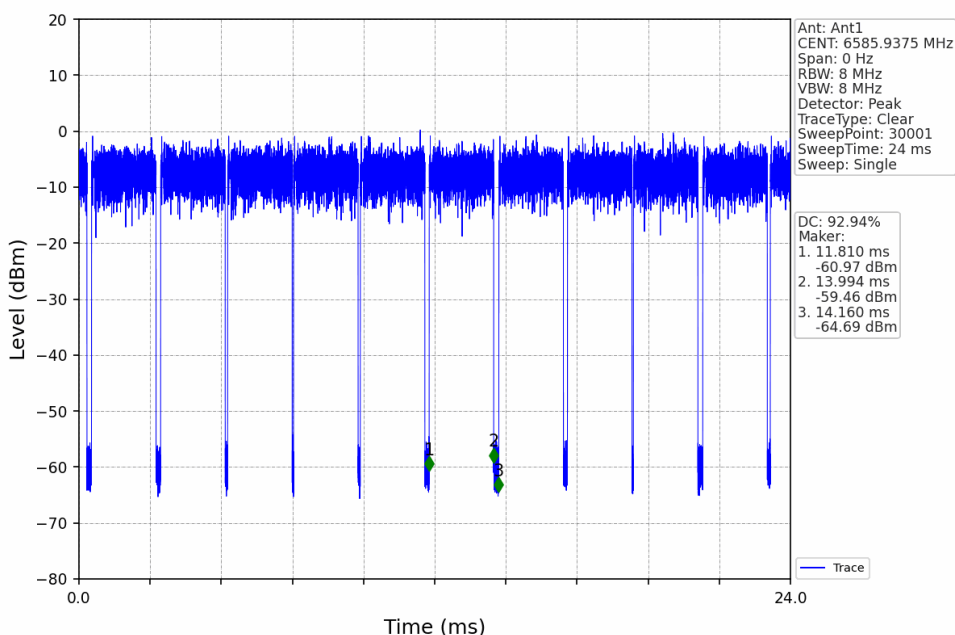

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2. Bandwidth

2.1 Test Result

2.1.1 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	5955	RU242	Left	1	19.366	<=320	Pass
			6175	RU242	Left	1	19.396	<=320	Pass
			6415	RU242	Left	1	19.420	<=320	Pass
	802.11be (EHT40)	MIMO	5965	RU484	Left	1	38.612	<=320	Pass
			6165	RU484	Left	1	38.578	<=320	Pass
			6405	RU484	Left	1	38.644	<=320	Pass
	802.11be (EHT80)	MIMO	5985	RU996	Left	1	78.744	<=320	Pass
			6145	RU996	Left	1	78.675	<=320	Pass
			6385	RU996	Left	1	78.818	<=320	Pass
	802.11be (EHT160)	MIMO	6025	2xRU996	Left	1	158.166	<=320	Pass
			6185	2xRU996	Left	1	158.129	<=320	Pass
			6345	2xRU996	Left	1	158.145	<=320	Pass
	802.11be (EHT320)	MIMO	6105	4xRU996	Left	1	314.930	<=320	Pass
			6265	4xRU996	Left	1	317.040	<=320	Pass

2.1.2 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)	
							Result	Limit
NTNV	802.11be (EHT20)	MIMO	5955	RU242	Left	1	22.552	/
			6175	RU242	Left	1	22.593	/
			6415	RU242	Left	1	22.337	/
	802.11be (EHT40)	MIMO	5965	RU484	Left	1	43.619	/
			6165	RU484	Left	1	44.114	/
			6405	RU484	Left	1	43.633	/
	802.11be (EHT80)	MIMO	5985	RU996	Left	1	87.756	/
			6145	RU996	Left	1	87.877	/
			6385	RU996	Left	1	89.028	/
	802.11be (EHT160)	MIMO	6025	2xRU996	Left	1	171.030	/
			6185	2xRU996	Left	1	173.849	/
			6345	2xRU996	Left	1	174.597	/
	802.11be (EHT320)	MIMO	6105	4xRU996	Left	1	336.361	/
			6265	4xRU996	Left	1	337.160	/

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR230700233114

Page: 138 of 403

2.1.3 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	6535	RU242	Left	1	19.382	<=320	Pass
			6695	RU242	Left	1	19.381	<=320	Pass
			6855	RU242	Left	1	19.426	<=320	Pass
	802.11be (EHT40)	MIMO	6565	RU484	Left	1	38.567	<=320	Pass
			6685	RU484	Left	1	38.495	<=320	Pass
			6845	RU484	Left	1	38.525	<=320	Pass
	802.11be (EHT80)	MIMO	6625	RU996	Left	1	78.983	<=320	Pass
			6705	RU996	Left	1	78.872	<=320	Pass
			6785	RU996	Left	1	78.563	<=320	Pass
	802.11be (EHT160)	MIMO	6665	2xRU996	Left	1	158.498	<=320	Pass

2.1.4 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)	
							Result	Limit
NTNV	802.11be (EHT20)	MIMO	6535	RU242	Left	1	22.262	/
			6695	RU242	Left	1	22.455	/
			6855	RU242	Left	1	22.175	/
	802.11be (EHT40)	MIMO	6565	RU484	Left	1	43.732	/
			6685	RU484	Left	1	43.698	/
			6845	RU484	Left	1	43.712	/
	802.11be (EHT80)	MIMO	6625	RU996	Left	1	88.573	/
			6705	RU996	Left	1	87.192	/
			6785	RU996	Left	1	88.262	/
	802.11be (EHT160)	MIMO	6665	2xRU996	Left	1	283.686	/



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com