



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	<b>Disruptive Hong Kong Limited</b>
Applicant Address	Room 2002, 20/F King Palace Plaza, 52A Sha Tsui Road, Tsuen Wan, N.T. Hong Kong, Hong Kong
FCC ID	<b>2AACFHS004</b>
Manufacturer's company	<b>Disruptive Hong Kong Limited</b>
Manufacturer Address	Room 2002, 20/F King Palace Plaza, 52A Sha Tsui Road, Tsuen Wan, N.T. Hong Kong, Hong Kong

Product Name	STUDIO 5
Brand Name	 NUDE AUDIO
Model Name	HS004G
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2402 ~ 2480MHz
Received Date	Sep. 09, 2013
Final Test Date	Sep. 27, 2013
Submission Type	Original Equipment

### Statement

Test result included is only for the Bluetooth BR/EDR part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies .....	4
3.5. Table for Test Modes.....	5
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units .....	6
3.8. Table for Parameters of Test Software Setting .....	6
3.9. EUT Operation during Test .....	6
3.10. Test Configurations .....	7
<b>4. TEST RESULT .....</b>	<b>9</b>
4.1. AC Power Line Conducted Emissions Measurement.....	9
4.2. Maximum Conducted Output Power Measurement.....	13
4.3. Hopping Channel Separation Measurement .....	15
4.4. Number of Hopping Frequency Measurement.....	26
4.5. Dwell Time Measurement.....	28
4.6. Radiated Emissions Measurement.....	35
4.7. Emissions Measurement.....	48
4.8. Antenna Requirements .....	62
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>63</b>
<b>6. TEST LOCATION.....</b>	<b>65</b>
<b>7. MEASUREMENT UNCERTAINTY.....</b>	<b>66</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A5</b>



## History of This Test Report



Report No.: FR380517AA

Certificate No.: CB10210022

## 1. CERTIFICATE OF COMPLIANCE

Product Name : STUDIO 5

Brand Name :



NUDE AUDIO

Model No. : HS004G

Applicant : Disruptive Hong Kong Limited

Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 09, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	9.01 dB
4.2	15.247(b)(1)	Maximum Conducted Output Power	Complies	22.31 dB
4.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.5	15.247(a)(1)	Dwell Time	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	1.21 dB
4.7	15.247(d)	Band Edge Emissions	Complies	7.14 dB
4.8	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details


Items	Description
Power Type	From power adapter
Modulation	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rate (Mbps)	GFSK: 1 ; $\pi/4$ -DQPSK: 2 ; 8DPSK: 3
Frequency Range	2402 ~ 2480MHz
Channel Number	79
Channel Band Width (99%)	BR (GFSK) 1 Mbps: 0.880 MHz EDR ( $\pi/4$ -DQPSK) 2 Mbps: 0.212 MHz EDR (8DPSK) 3 Mbps: 1.208MHz
Maximum Conducted Output Power	BR (GFSK) 1 Mbps: 7.69 dBm EDR ( $\pi/4$ -DQPSK) 2 Mbps: 5.69 dBm EDR (8DPSK) 3 Mbps: 5.66 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3
Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).	
Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).	

#### 3.2. Accessories

Power	Brand	Model	Rating
Power Adapter (Removable plug)	TenPao	S032BM1600180	Input: 100-240V~50/60Hz 900mA Output: 16.0V, 1800mA
<b>Others</b>			
Plug*1			

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	N/A	N/A	Printed Antenna	N/A	1	TX/RX

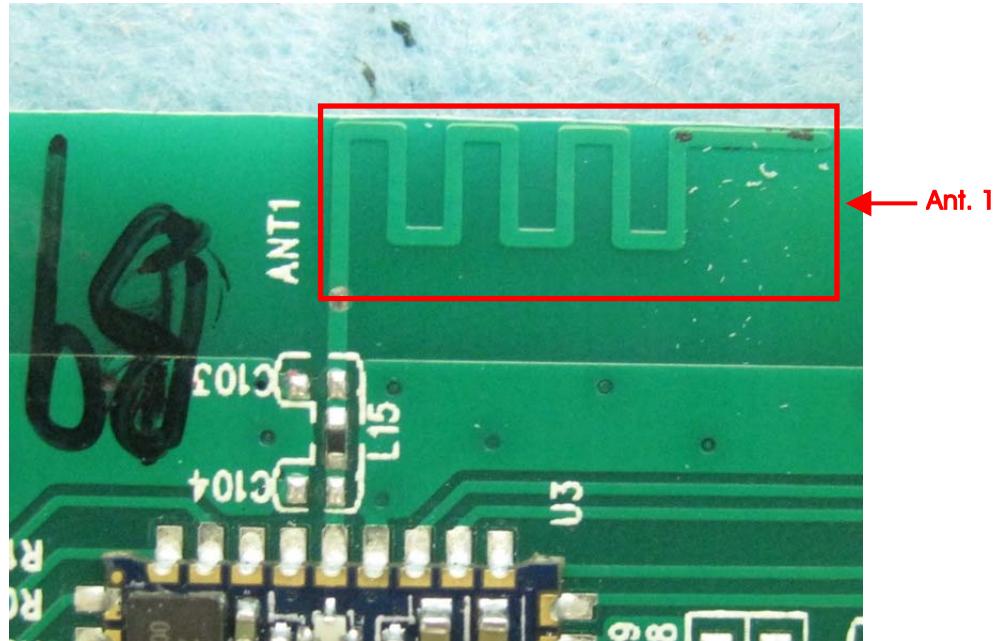

### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	BR (GFSK)	1 Mbps	0/39/78	1
	EDR ( $\pi/4$ -DQPSK)	2 Mbps	0/39/78	1
	EDR (8DPSK)	3 Mbps	0/39/78	1
Hopping Channel Separation	BR (GFSK)	1 Mbps	0~1 39~40 77~78	1
	EDR ( $\pi/4$ -DQPSK)	2 Mbps	0~1 39~40 77~78	1
	EDR (8DPSK)	3 Mbps	0~1 39~40 77~78	1
Number of Hopping Frequency	BR (GFSK)	1 Mbps	0~78	1
Dwell Time	BR (GFSK) (DH1, DH3, DH5)	1 Mbps	0/39/78	1
Radiated Emissions Below 1GHz	CTX	-	-	-
Radiated Emissions Above 1GHz	BR (GFSK)	1 Mbps	0/39/78	1
	EDR (8DPSK)	3 Mbps	0/39/78	1
Band Edge Emissions	BR (GFSK)	1 Mbps	0/39/78	1
	EDR (8DPSK)	3 Mbps	0/39/78	1

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. CTX

**For Radiated Emission test:**

Mode 1. CTX

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

For Test Site No: CO01-CB / 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	D2A62L1989V5

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of Bluetooth

For BR (GFSK) 1 Mbps:

Test Software Version	Blut Test 3		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	63	63	63

For EDR ( $\pi/4$ -DQPSK) 2 Mbps:

Test Software Version	Blut Test 3		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	105	105	105

For EDR (8DPSK) 3 Mbps:


Test Software Version	Blut Test 3		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	105	105	105

### 3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


### 3.10. Test Configurations

#### 3.10.1. AC Power Line Conduction Emissions Test Configuration

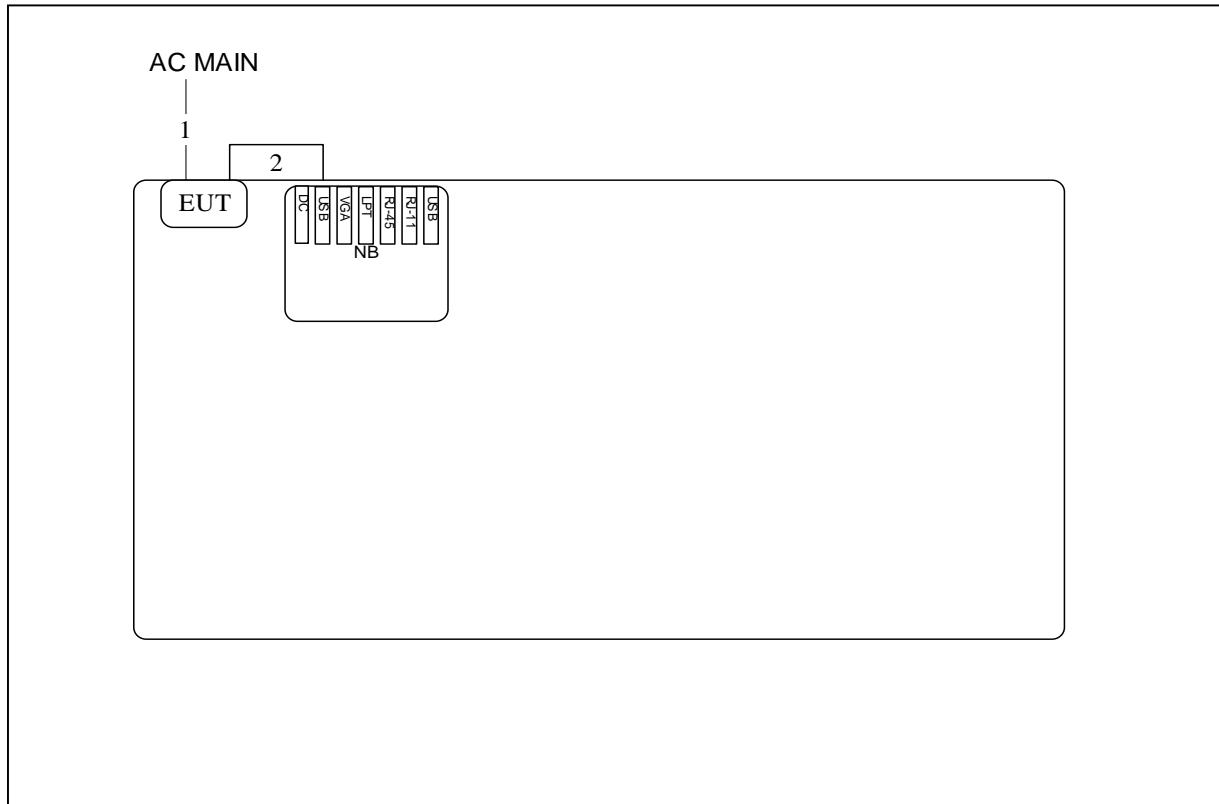

Item	Connection	Shield	Length
1	Power cable	No	1.85m
2	USB cable	No	0.1m

### 3.10.2. Radiation Emissions Test Configuration

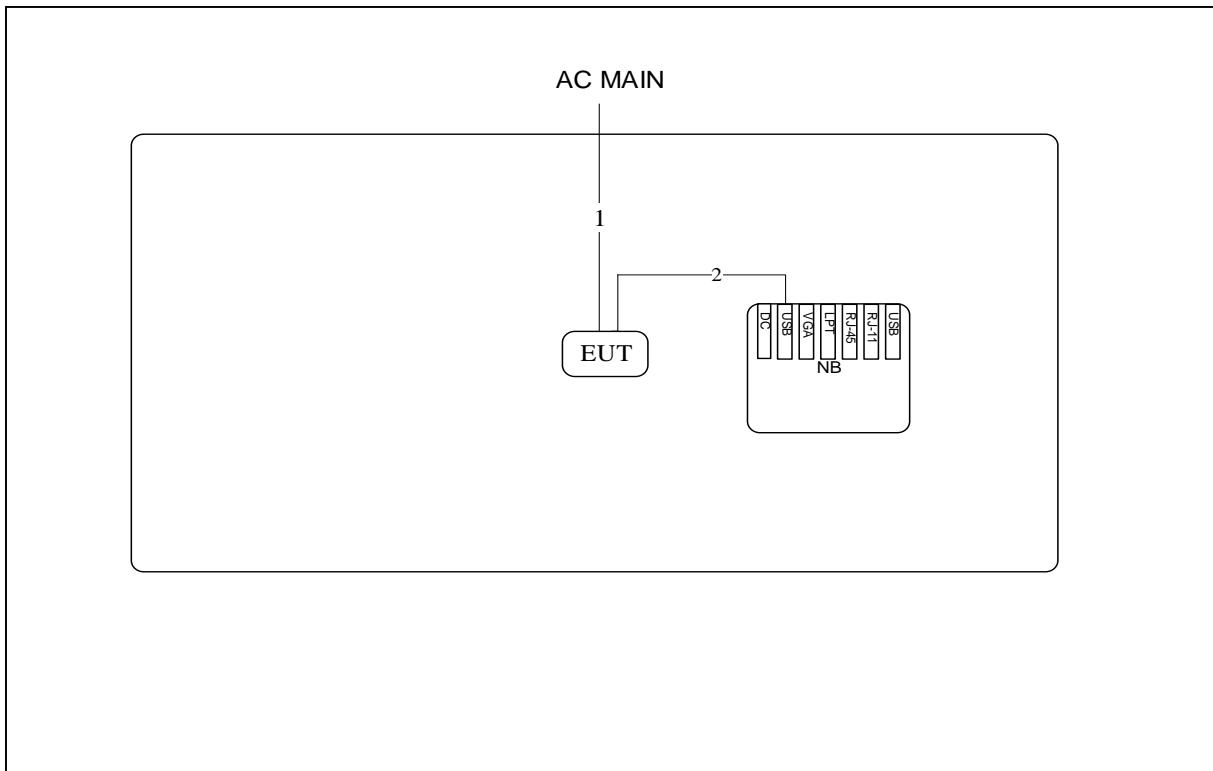

Item	Connection	Shield	Length
1	Power cable	No	1.85m
2	USB cable	No	0.1m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

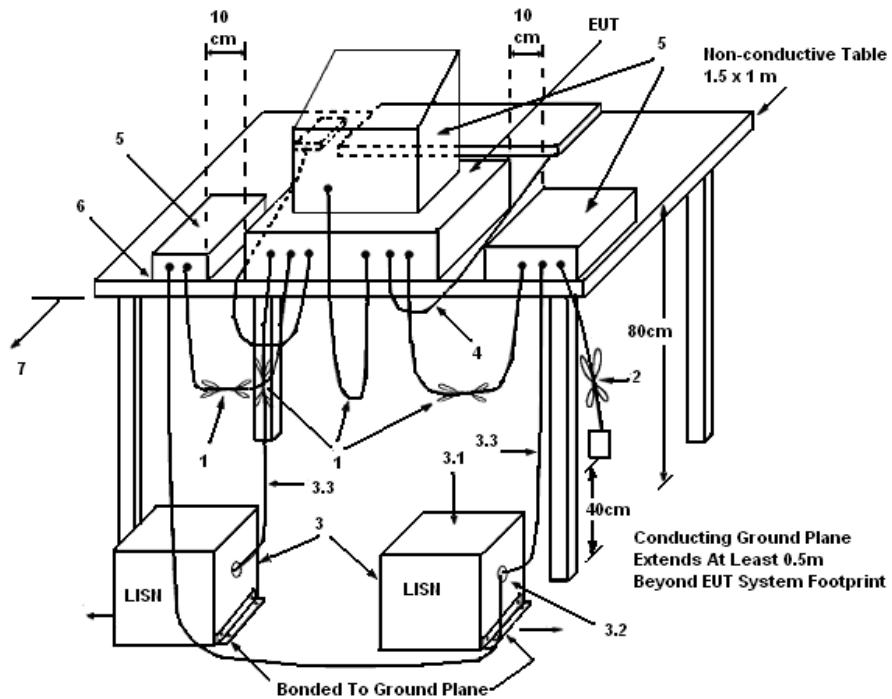

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in CTX function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	48%
Test Engineer	Parody Lin	Phase	Line
Configuration	CTX		

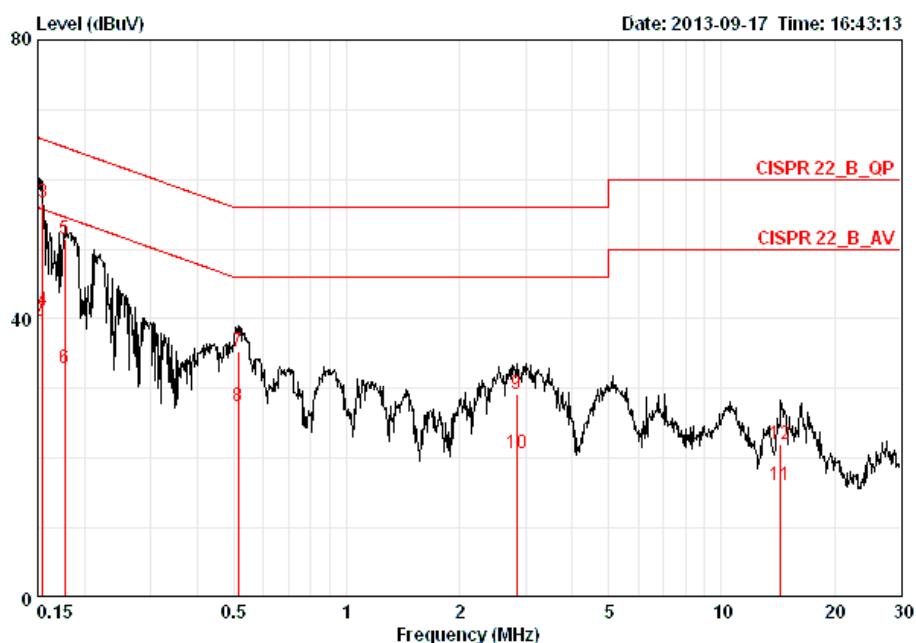

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	dB	Line	Factor	Loss	
MHz	dBuV		dB	dBuV	dB	dB	
1 @	<b>0.15000</b>	56.68	-9.32	66.00	56.35	0.15	0.18 LINE OP
2	<b>0.15000</b>	39.69	-16.31	56.00	39.36	0.15	0.18 LINE AVERAGE
3 @	<b>0.15485</b>	56.72	-9.01	65.74	56.39	0.15	0.18 LINE OP
4	<b>0.15485</b>	41.10	-14.63	55.74	40.77	0.15	0.18 LINE AVERAGE
5 @	<b>0.17678</b>	51.45	-13.18	64.64	51.11	0.15	0.19 LINE OP
6	<b>0.17678</b>	32.98	-21.65	54.64	32.64	0.15	0.19 LINE AVERAGE
7	<b>0.51278</b>	35.39	-20.61	56.00	35.04	0.15	0.20 LINE OP
8	<b>0.51278</b>	27.45	-18.55	46.00	27.10	0.15	0.20 LINE AVERAGE
9	<b>2.839</b>	29.26	-26.74	56.00	28.78	0.23	0.25 LINE OP
10	<b>2.839</b>	20.66	-25.34	46.00	20.18	0.23	0.25 LINE AVERAGE
11	<b>14.364</b>	16.23	-33.77	50.00	15.36	0.47	0.40 LINE AVERAGE
12	<b>14.364</b>	21.94	-38.06	60.00	21.07	0.47	0.40 LINE OP

Temperature	25°C	Humidity	48%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	CTX		

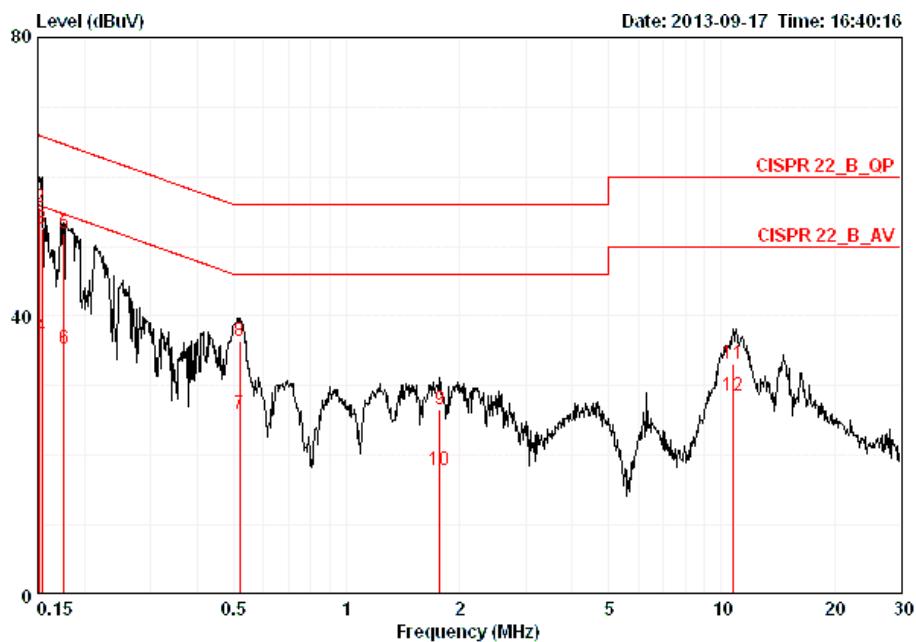

Freq	Level	Over Limit	Line	Read	LISN Factor	Cable Loss	Pol/Phase	Remark
				dBuV	dB	dBuV	dB	
1	0.15160	39.55	-16.36	55.91	39.30	0.07	0.18	NEUTRAL
2	0.15160	55.66	-10.25	65.91	55.41	0.07	0.18	NEUTRAL
3	0.15403	52.54	-13.24	65.78	52.29	0.07	0.18	NEUTRAL
4	0.15403	37.02	-18.76	55.78	36.77	0.07	0.18	NEUTRAL
5	0.17584	51.91	-12.77	64.68	51.65	0.07	0.19	NEUTRAL
6	0.17584	35.40	-19.28	54.68	35.14	0.07	0.19	NEUTRAL
7	0.51824	25.88	-20.12	46.00	25.61	0.07	0.20	NEUTRAL
8	0.51824	36.50	-19.50	56.00	36.23	0.07	0.20	NEUTRAL
9	1.772	26.65	-29.35	56.00	26.32	0.10	0.22	NEUTRAL
10	1.772	17.85	-28.15	46.00	17.52	0.10	0.22	NEUTRAL
11	10.733	33.21	-26.79	60.00	32.55	0.28	0.37	NEUTRAL
12	10.733	28.52	-21.48	50.00	27.86	0.28	0.37	NEUTRAL

Note: Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm). The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

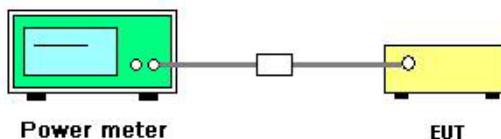

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK
Test Date	Sep. 27, 2013		

For BR (GFSK) 1 Mbps:

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	6.04	30.00	Complies
39	2441 MHz	7.27	30.00	Complies
78	2480 MHz	7.69	30.00	Complies

For EDR ( $\pi/4$ -DQPSK) 2 Mbps:

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	2.79	30.00	Complies
39	2441 MHz	5.03	30.00	Complies
78	2480 MHz	5.69	30.00	Complies

For EDR (8DPSK) 3 Mbps:

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	2.71	30.00	Complies
39	2441 MHz	5.01	30.00	Complies
78	2480 MHz	5.66	30.00	Complies

### 4.3. Hopping Channel Separation Measurement

#### 4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VBW	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for channel separation measurement.

#### 4.3.4. Test Setup Layout

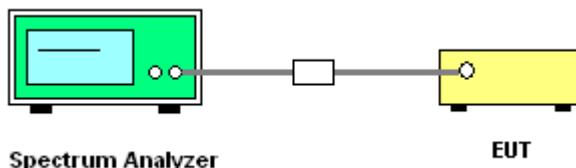

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Hopping Channel Separation

Temperature	25°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK

For BR (GFSK) 1 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	0.952	0.880	1.00	0.635	Complies
2441 MHz	0.956	0.876	1.00	0.637	Complies
2480 MHz	0.928	0.860	1.00	0.619	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR ( $\pi/4$ -DQPSK) 2 Mbps:


Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.340	1.204	1.00	0.893	Complies
2441 MHz	1.364	1.212	1.00	0.909	Complies
2480 MHz	1.236	1.192	1.00	0.824	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth


For EDR (8DPSK) 3 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.288	1.200	1.00	0.859	Complies
2441 MHz	1.248	1.208	1.00	0.832	Complies
2480 MHz	1.264	1.208	1.00	0.843	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

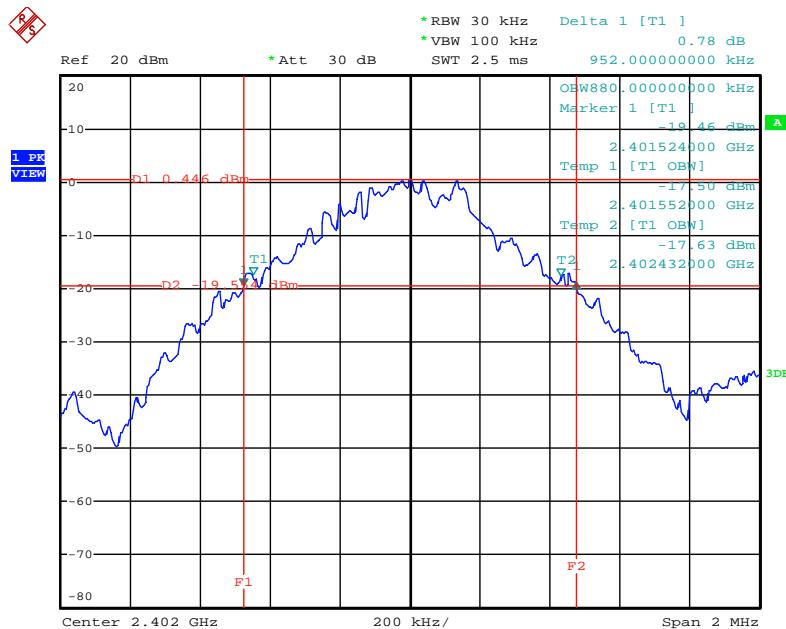
**20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 0 / 2402 MHz**


Date: 27.SEP.2013 08:29:11

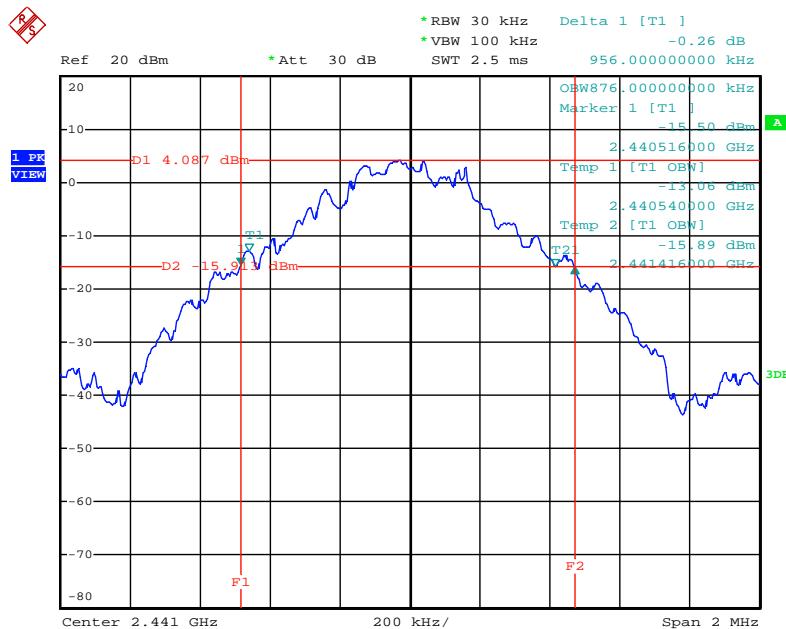**20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 39 / 2441 MHz**


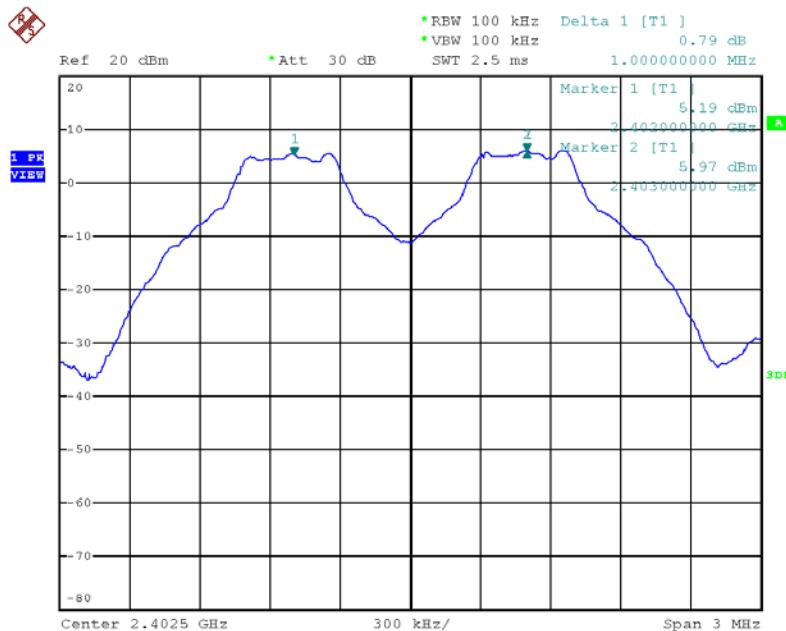
Date: 27.SEP.2013 08:29:39

**20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 78 / 2480 MHz**

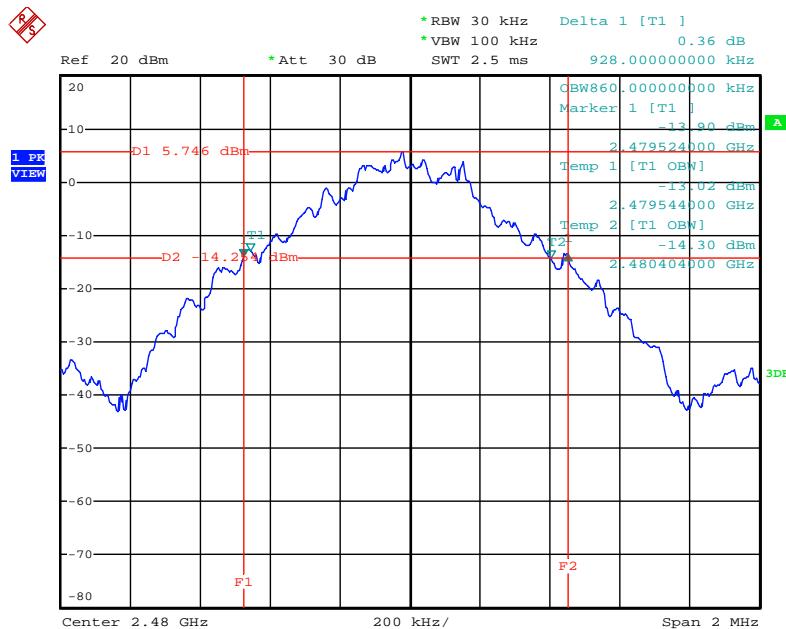


Date: 27.SEP.2013 08:30:08


**Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz**




Date: 27.SEP.2013 08:46:49

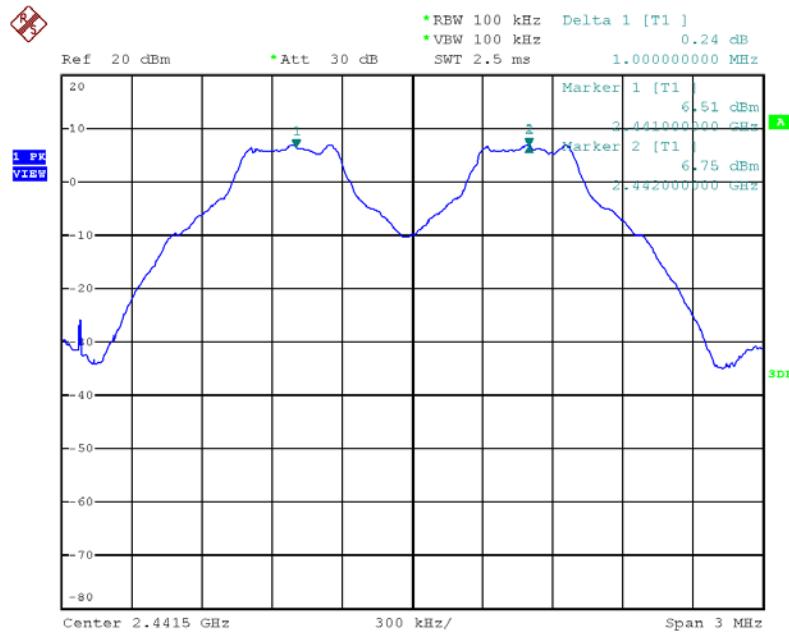**Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz**


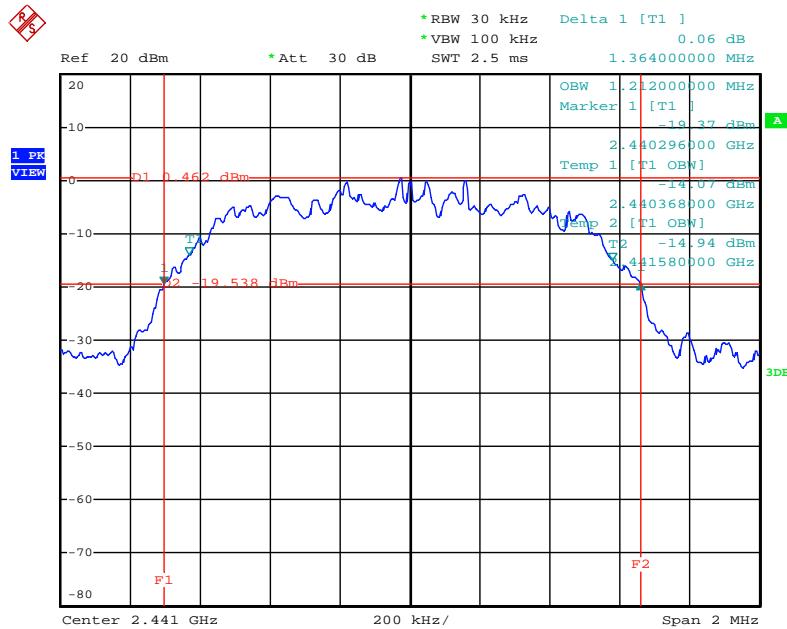
Date: 27.SEP.2013 08:47:41

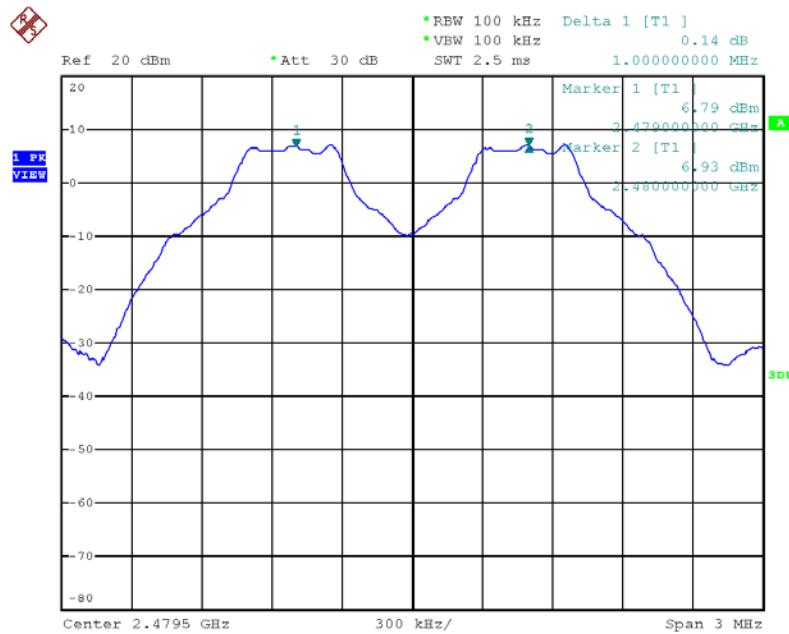**Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz**


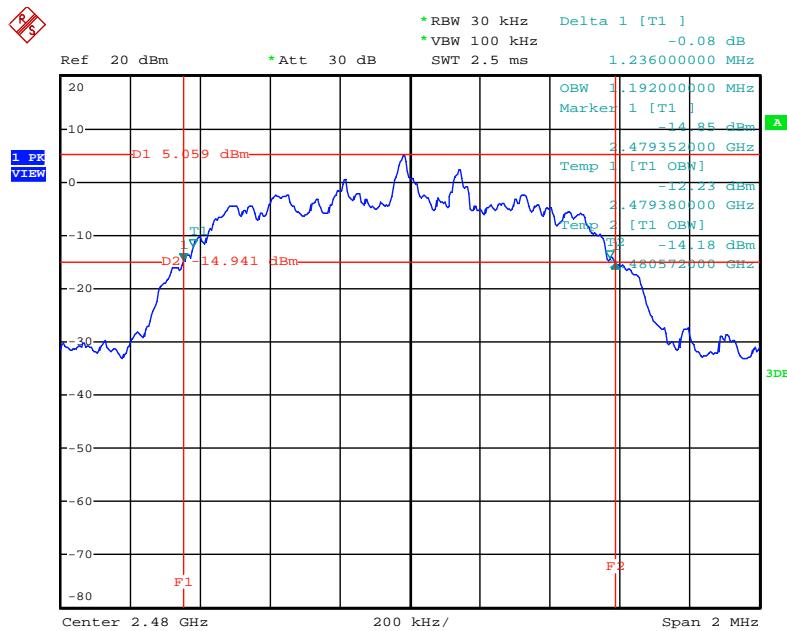
Date: 27.SEP.2013 08:48:45

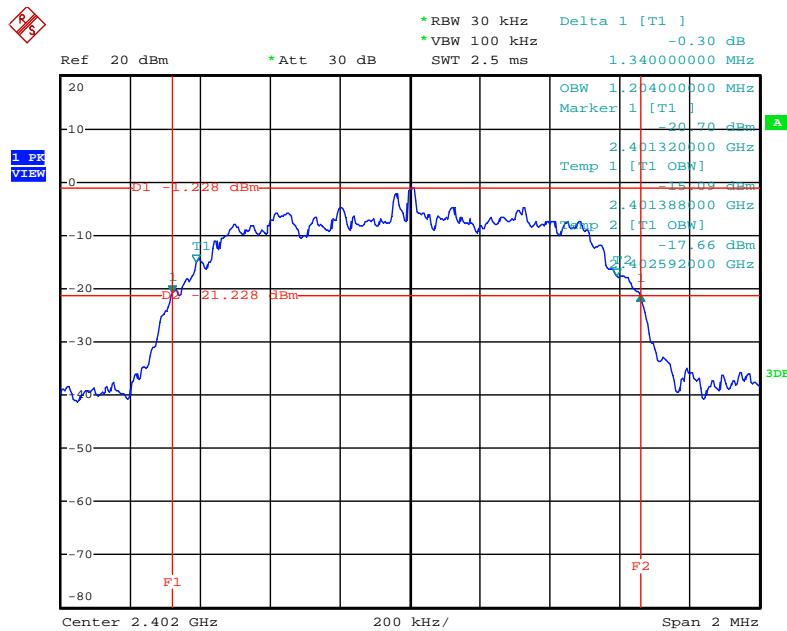**20 dB Bandwidth Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 0 / 2402 MHz**


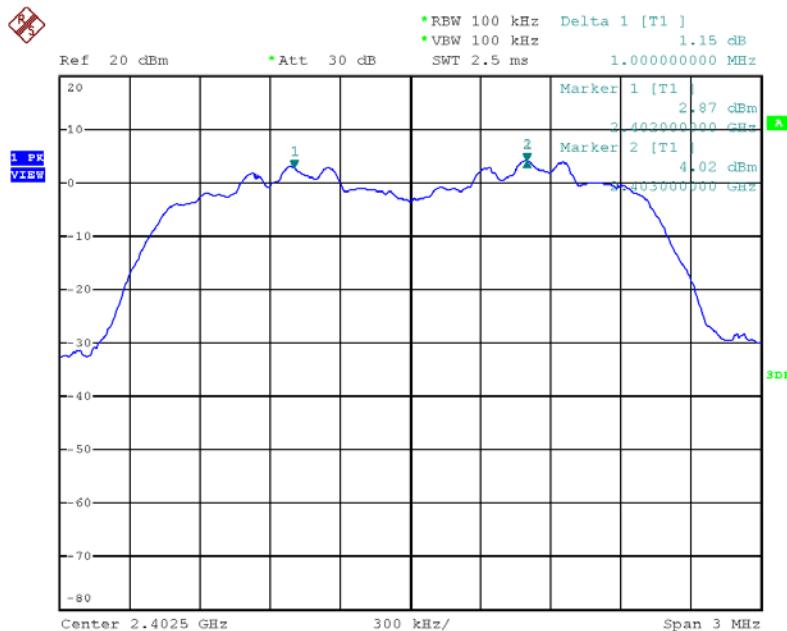
Date: 27.SEP.2013 08:28:09

**20 dB Bandwidth Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 39 / 2441 MHz**


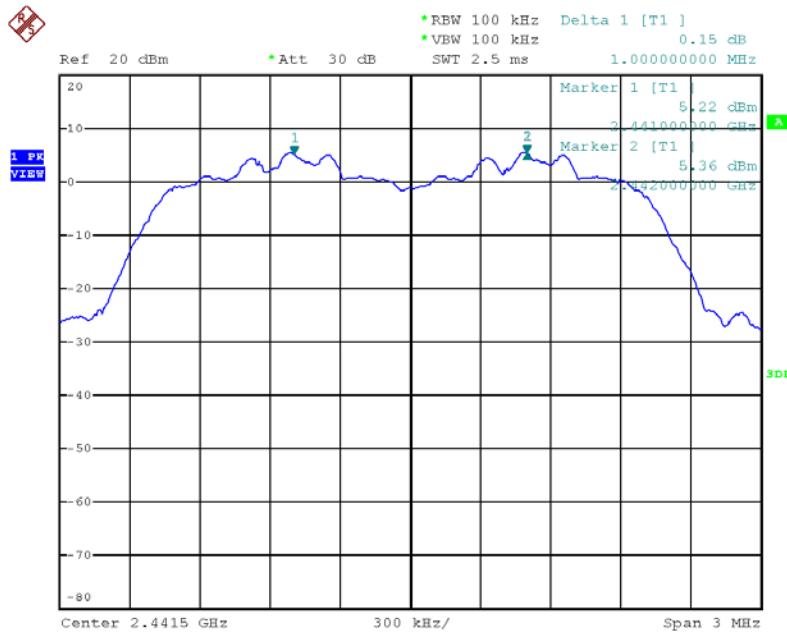
Date: 27.SEP.2013 08:27:44

**20 dB Bandwidth Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 78 / 2480 MHz**


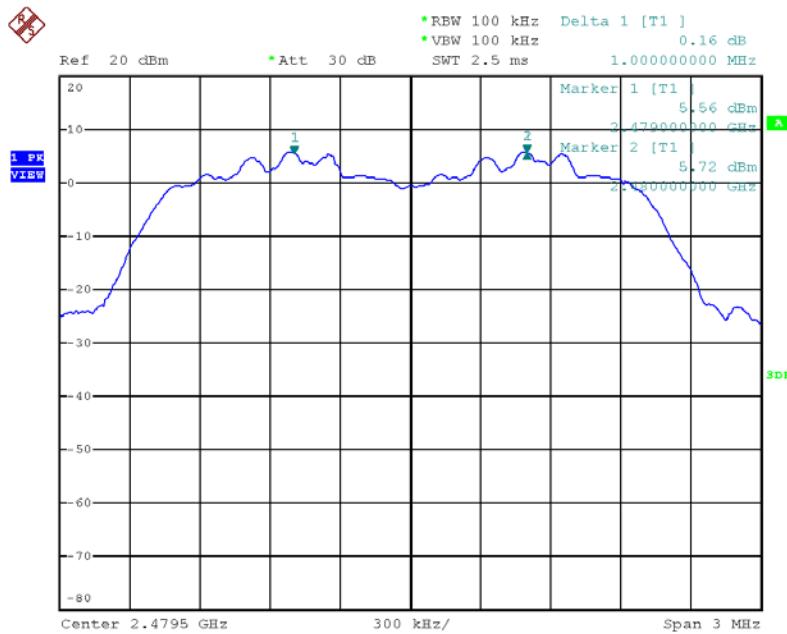
Date: 27.SEP.2013 08:27:14

**Channel Separation Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz**


Date: 27.SEP.2013 08:44:52


**Channel Separation Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz**


Date: 27.SEP.2013 08:43:19

**Channel Separation Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz**


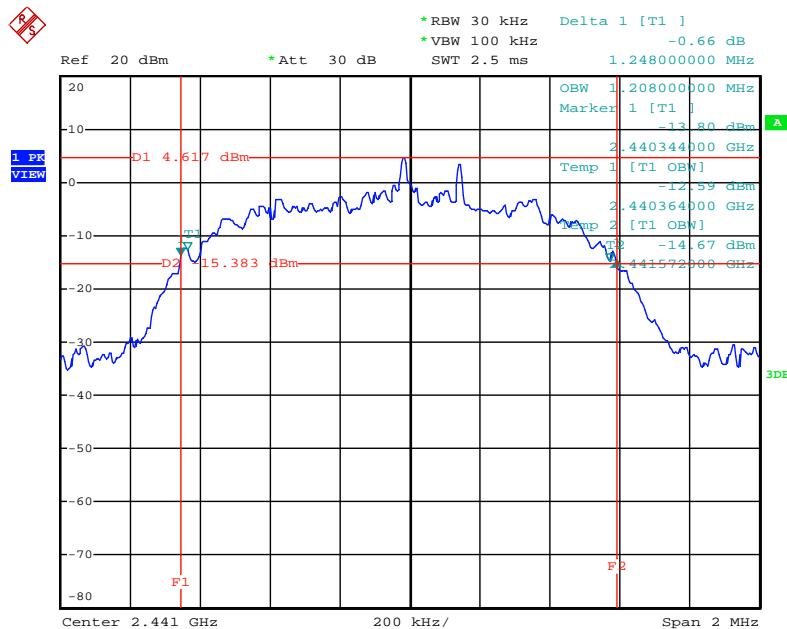
Date: 27.SEP.2013 08:42:00

**20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 0 / 2402 MHz**

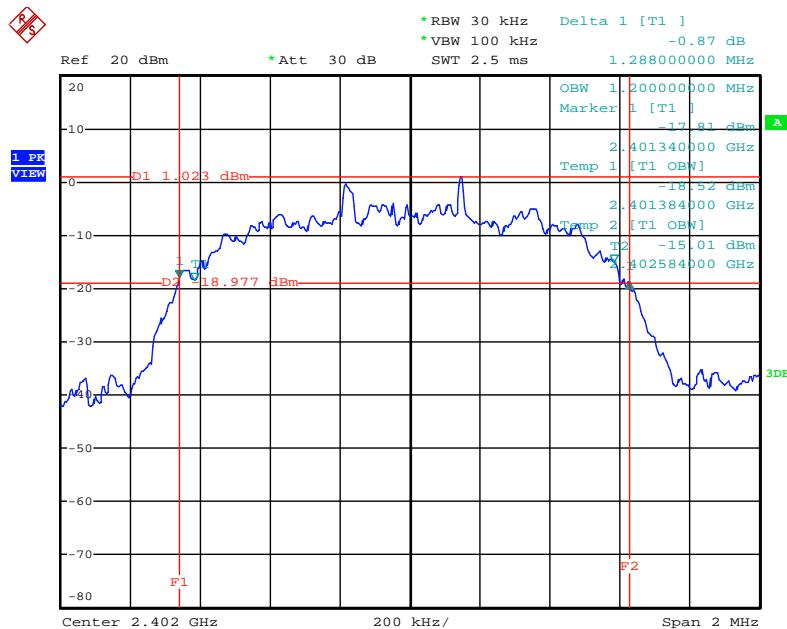


Date: 27.SEP.2013 08:16:24


**20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 39 / 2441 MHz**



Date: 27.SEP.2013 08:17:31

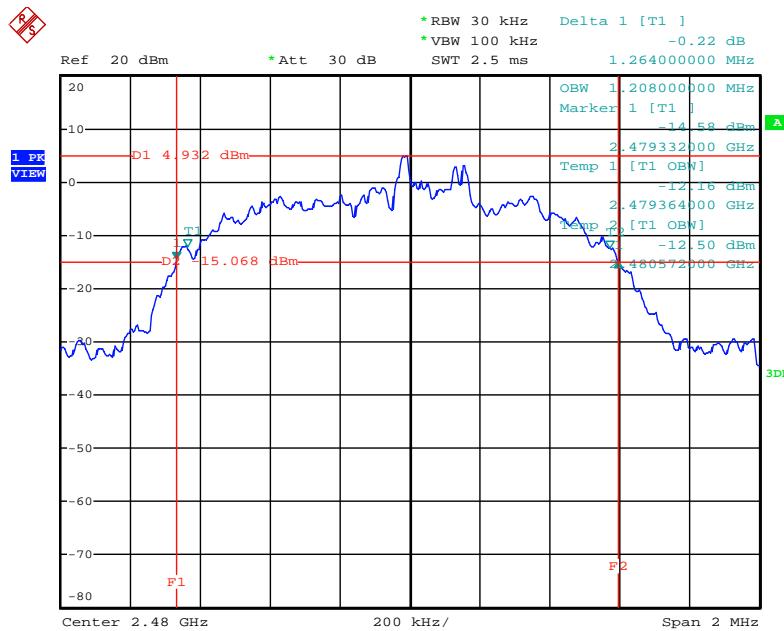
**20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 78 / 2480 MHz**


Date: 27.SEP.2013 08:19:59

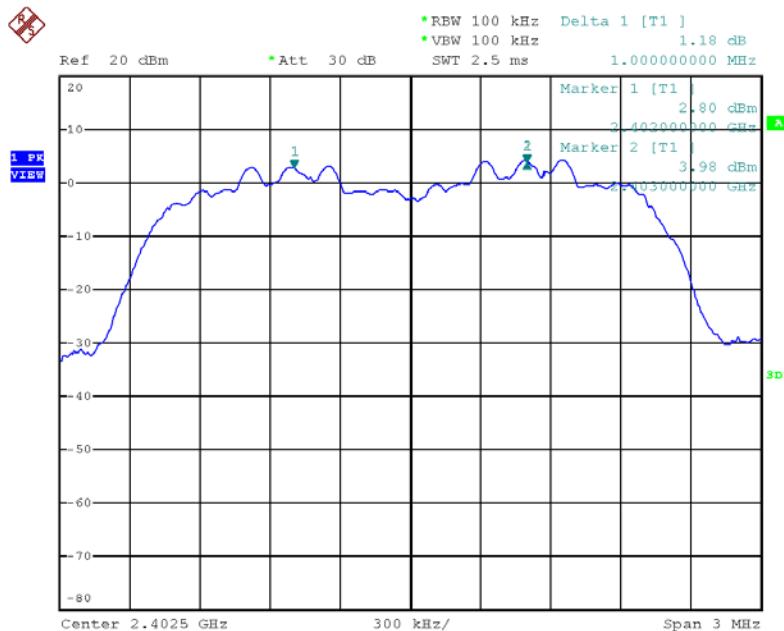**Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz**


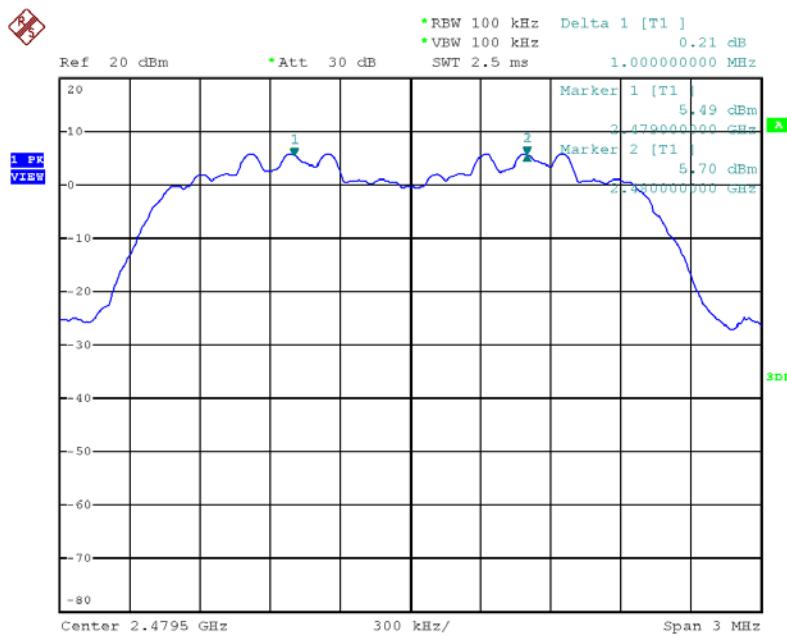
Date: 27.SEP.2013 08:37:00

### Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz

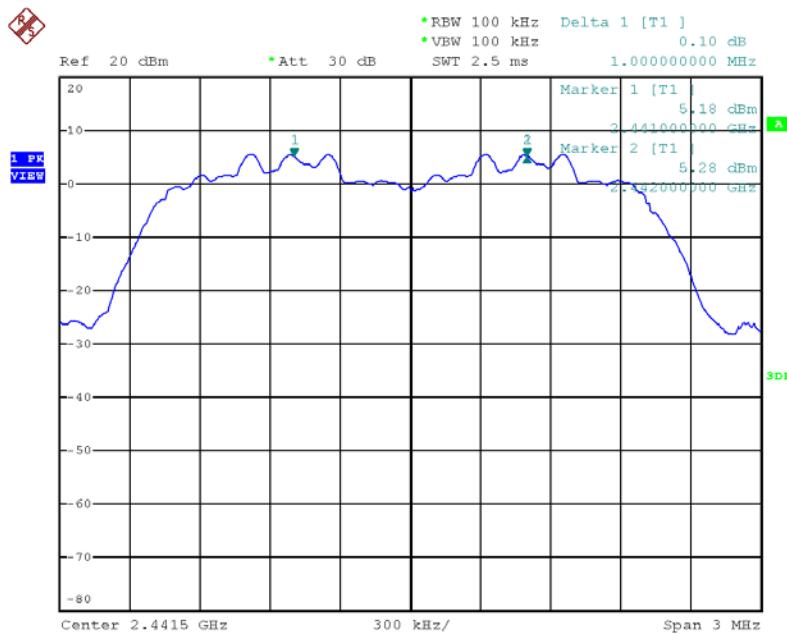

Date: 27.SEP.2013 08:38:34

### Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz



Date: 27.SEP.2013 08:40:03

## 4.4. Number of Hopping Frequency Measurement

### 4.4.1. Limit

At least 15 hopping frequencies, and should be equally spaced.

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1000 kHz and the video bandwidth of 1000 kHz were utilized.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

### 4.4.4. Test Setup Layout

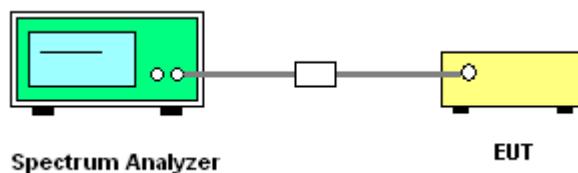

### 4.4.5. Test Deviation

There is no deviation with the original standard.

### 4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Number of Hopping Frequency

Temperature	25°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	BR (GFSK)

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
BR (GFSK)	0 ~ 78	2402 ~ 2480MHz	79	15	Complies

Number of Hopping Channel Plot on BR (GFSK) / Channel 0~78 / 2402 MHz ~ 2480 MHz

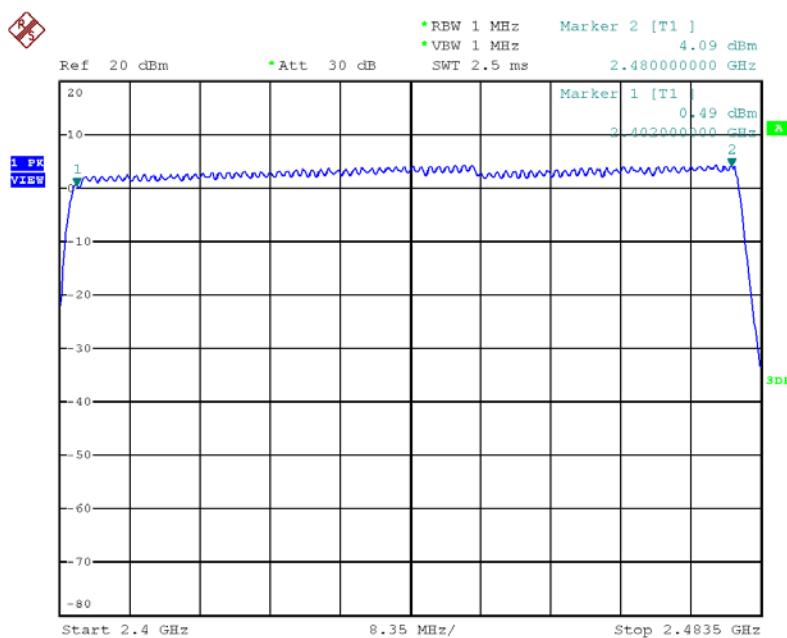

Date: 27.SEP.2013 08:54:41

## 4.5. Dwell Time Measurement

### 4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Single Trigger

### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH1, DH3, DH5 packet transmitting.
8. Measure the maximum time duration of one single pulse.

### 4.5.4. Test Setup Layout

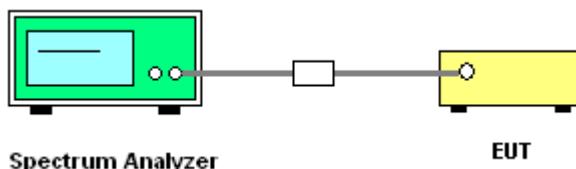

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.5.7. Test Result of Dwell Time

Temperature	25°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	BR (GFSK) / DH1, DH3, DH5

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402 MHz	2.9100	0.3104	0.4000	Complies
DH3	2402 MHz	1.6600	0.2656	0.4000	Complies
DH1	2402 MHz	0.4100	0.1312	0.4000	Complies
DH5	2441 MHz	2.9100	0.3104	0.4000	Complies
DH3	2441 MHz	1.6600	0.2656	0.4000	Complies
DH1	2441 MHz	0.4100	0.1312	0.4000	Complies
DH5	2480 MHz	2.9100	0.3104	0.4000	Complies
DH3	2480 MHz	1.6600	0.2656	0.4000	Complies
DH1	2480 MHz	0.4100	0.1312	0.4000	Complies

**Note: Pulse Duration \* Number of Pulses\*(Dwell time / measure time)**


**Remark:**

Dwell Time = 79(channels) x 0.4(s) x average hopping channel x package transfer time (us)

79 channels come from the Hopping Channel number.


Average Hopping Channel = hops / sweep time

**Dwell Time Plot on BR (GFSK) / Channel 0 / DH1 / 2402 MHz**

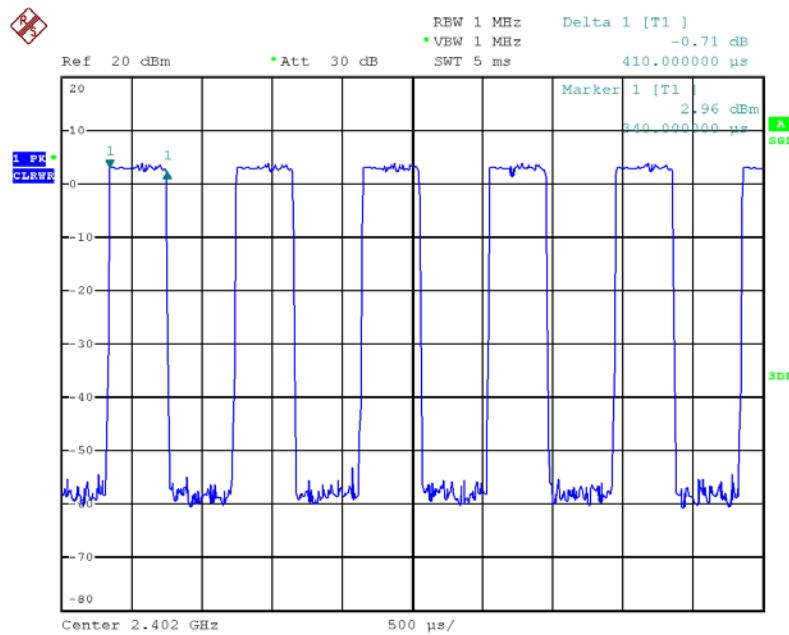


Date: 27.SEP.2013 08:24:35


**Dwell Time Plot on BR (GFSK) / Channel 39 / DH1 / 2441 MHz**

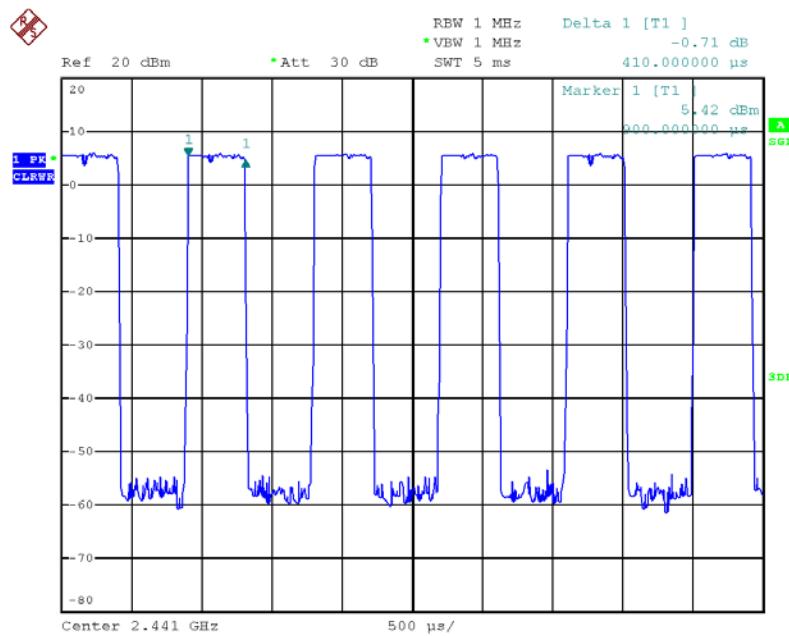


Date: 27.SEP.2013 08:25:11

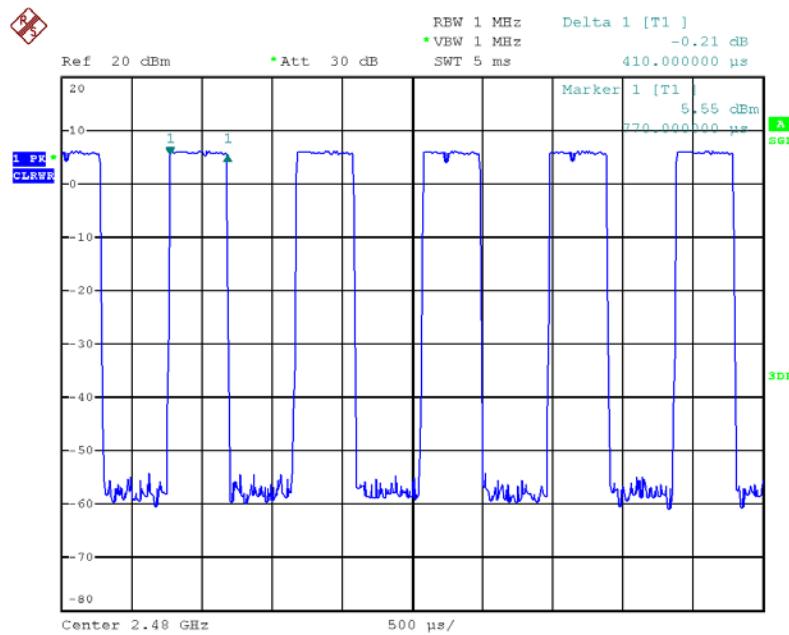**Dwell Time Plot on BR (GFSK) / Channel 78 / DH1 / 2480 MHz**


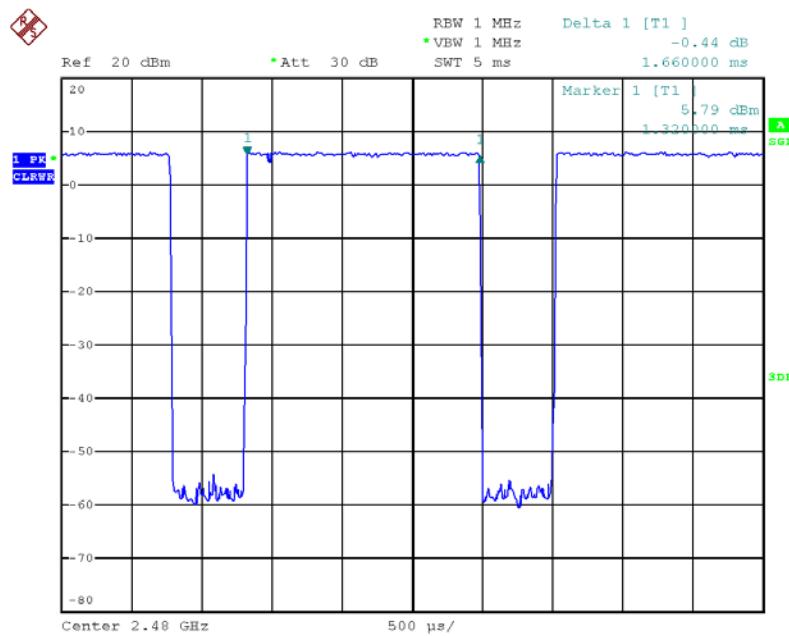
Date: 27.SEP.2013 08:25:49

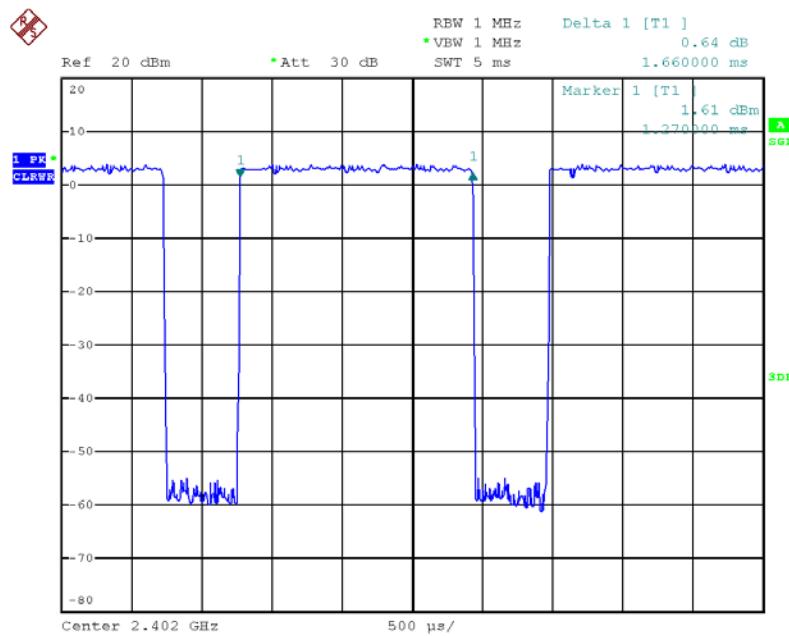**Dwell Time Plot on BR (GFSK) / Channel 0 / DH3 / 2402 MHz**


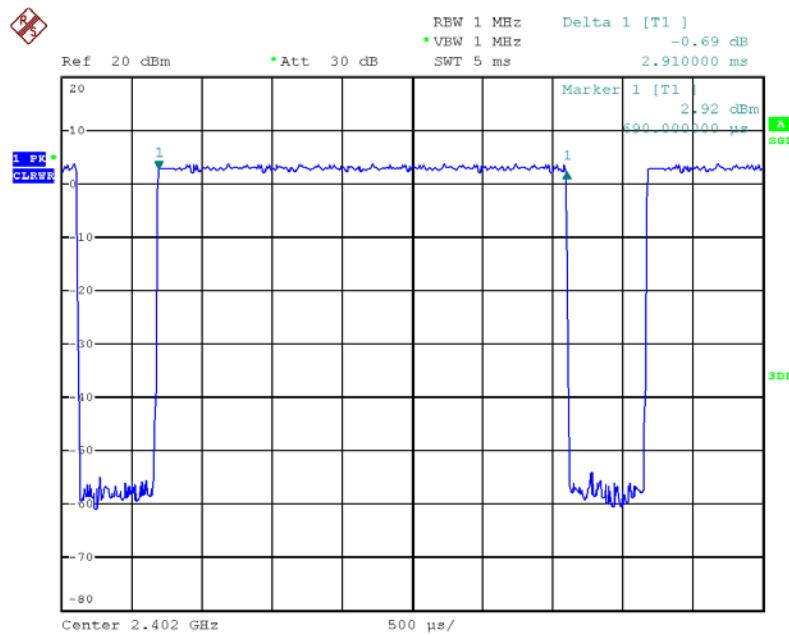
Date: 27.SEP.2013 08:23:29

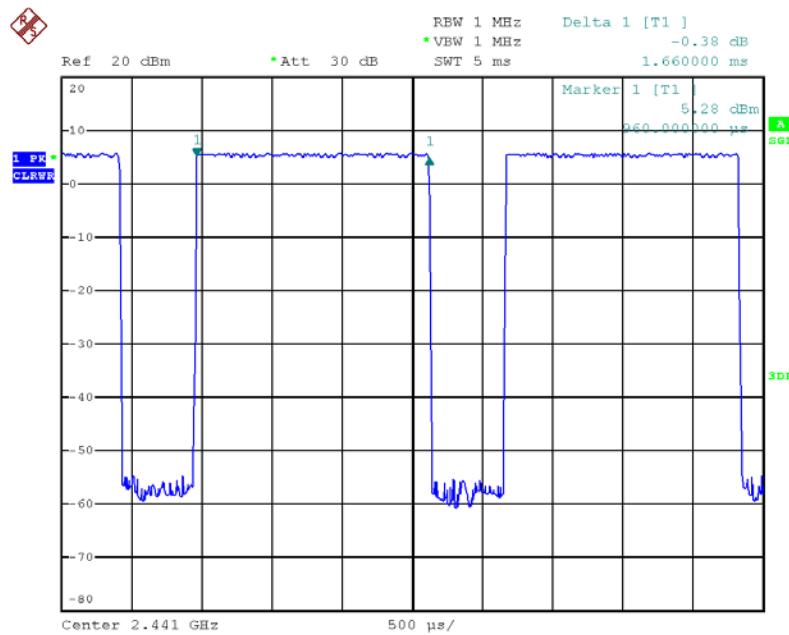**Dwell Time Plot on BR (GFSK) / Channel 39 / DH3 / 2441 MHz**


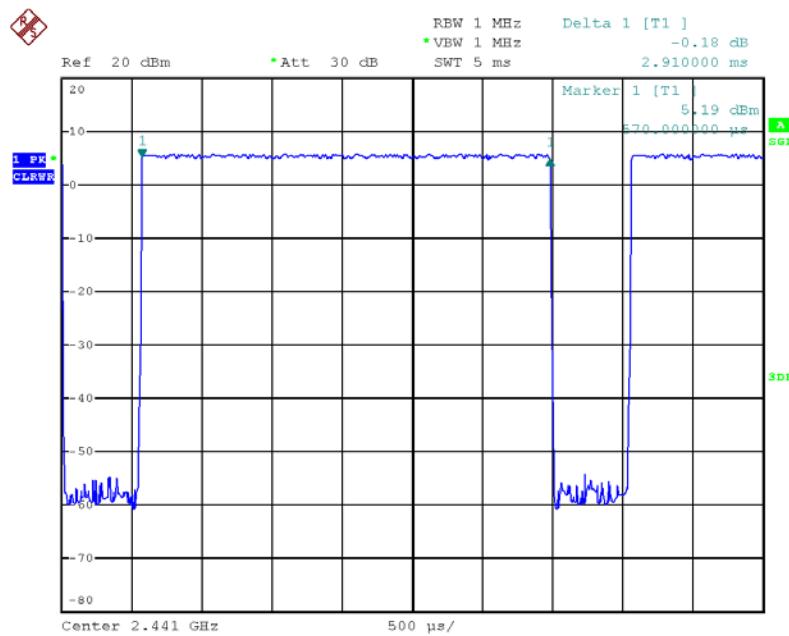
Date: 27.SEP.2013 08:22:48

**Dwell Time Plot on BR (GFSK) / Channel 78 / DH3 / 2480 MHz**


Date: 27.SEP.2013 08:21:57


**Dwell Time Plot on BR (GFSK) / Channel 0 / DH5 / 2402 MHz**


Date: 27.SEP.2013 08:13:28

**Dwell Time Plot on BR (GFSK) / Channel 39 / DH5 / 2441 MHz**


Date: 27.SEP.2013 08:19:00

**Dwell Time Plot on BR (GFSK) / Channel 78 / DH5 / 2480 MHz**

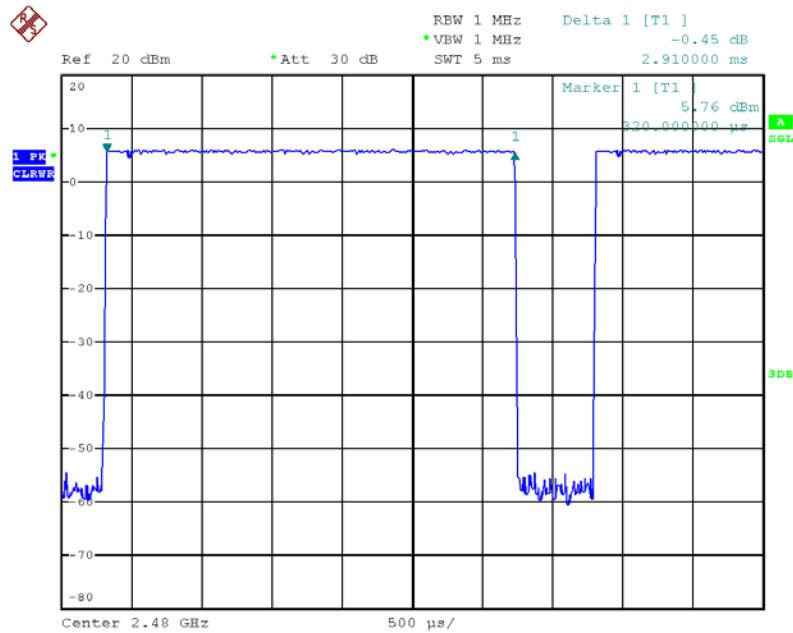

Date: 27.SEP.2013 08:19:34

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

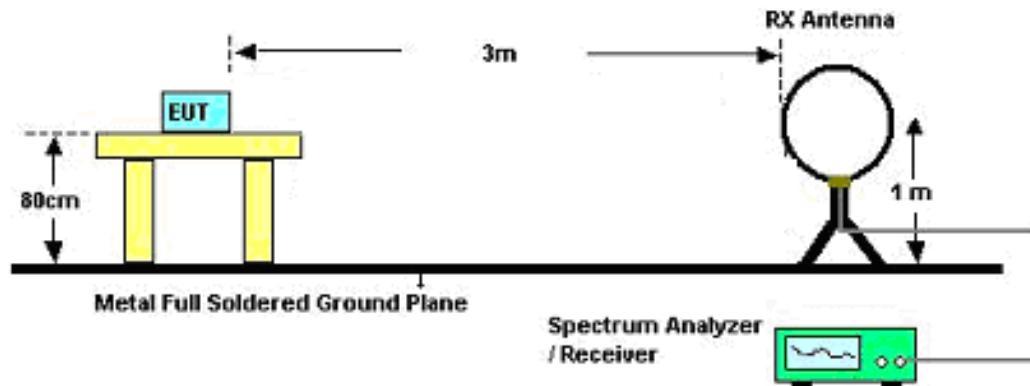

For Radiated Emissions: 30MHz~1GHz

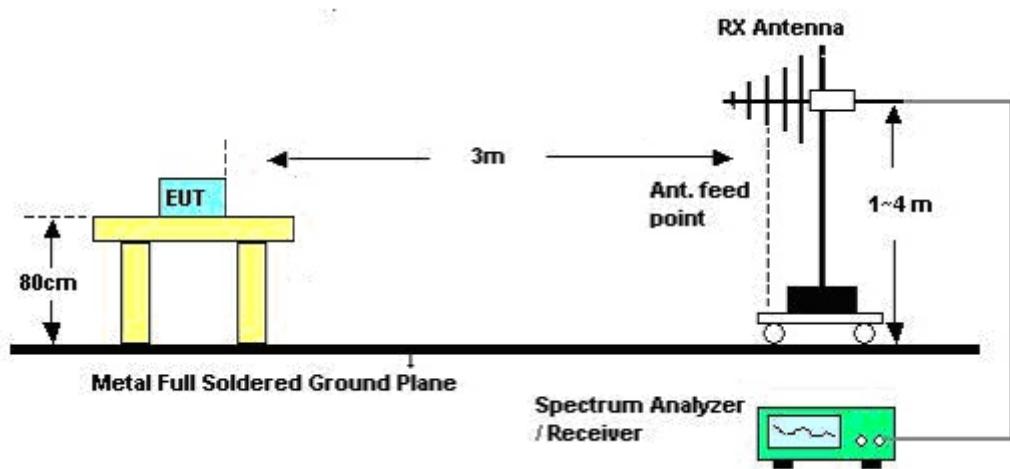

For Radiated Emissions: Above 1GHz

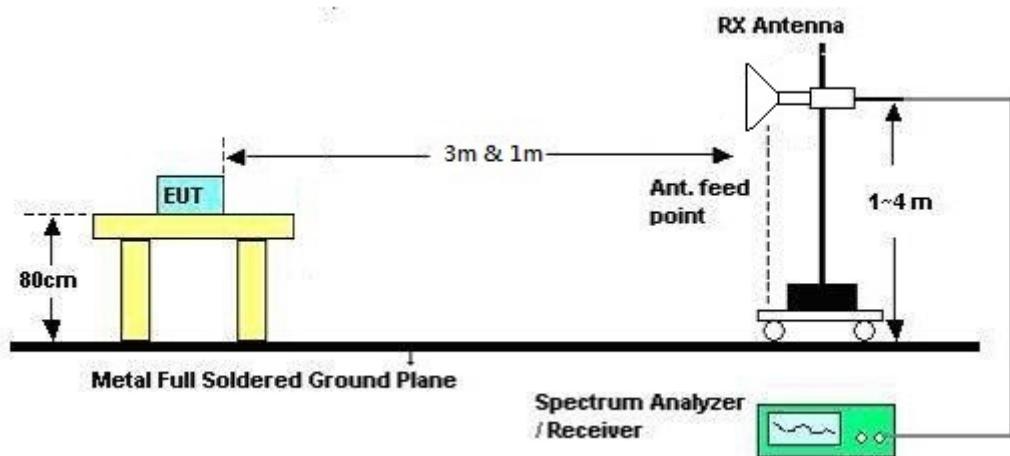

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.

#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	56%
Test Engineer	YC Chen	Test Date	Sep. 26, 2013
Configurations	CTX		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	56%
Test Engineer	YC Chen	Configurations	CTX

##### Horizontal

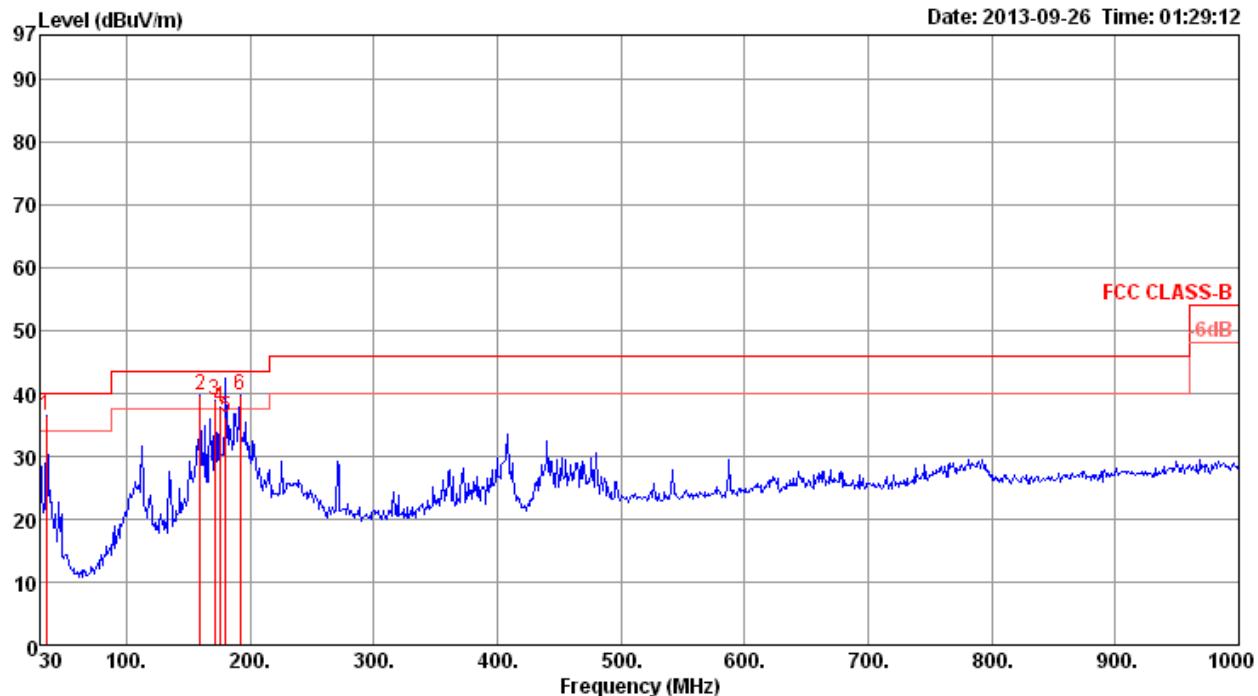

Freq	Level	Limit			Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB	dBuV			Loss	Factor	Factor			
1	34.85	36.51	40.00	-3.49	47.53	0.70	16.08	27.80	Peak	400	0	HORIZONTAL
2	159.98	39.81	43.50	-3.69	53.68	1.40	12.03	27.30	Peak	400	0	HORIZONTAL
3	171.62	38.82	43.50	-4.68	51.66	1.50	12.90	27.24	Peak	400	0	HORIZONTAL
4	175.50	37.85	43.50	-5.65	50.42	1.53	13.12	27.22	Peak	400	0	HORIZONTAL
5	180.35	36.16	43.50	-7.34	48.65	1.57	13.14	27.20	QP	100	69	HORIZONTAL
6	191.99	39.82	43.50	-3.68	54.65	1.62	10.69	27.14	Peak	400	0	HORIZONTAL

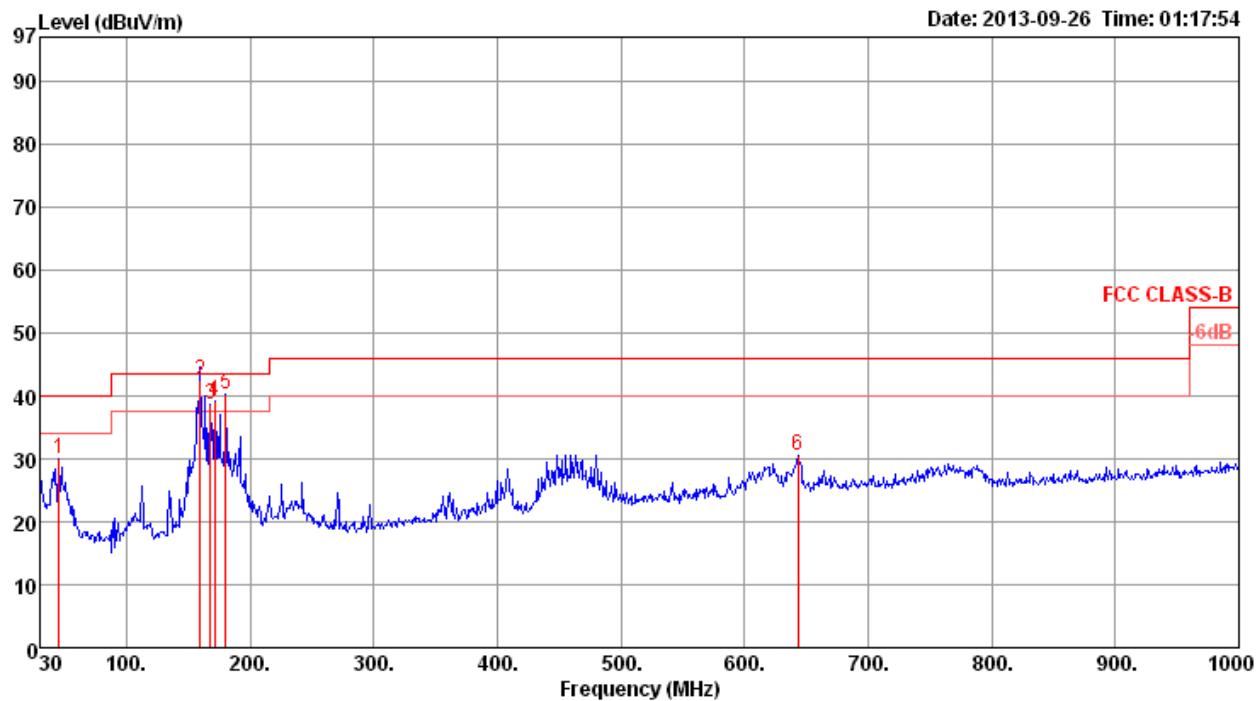**Vertical**


Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m	cm	deg	
1	45.52	30.10	40.00	-9.90	47.13	0.75	10.02	27.80	Peak	400	0 VERTICAL
2	159.98	42.29	43.50	-1.21	56.16	1.40	12.03	27.30	QP	100	15 VERTICAL
3	167.74	38.72	43.50	-4.78	51.91	1.46	12.61	27.26	Peak	400	0 VERTICAL
4	171.62	39.09	43.50	-4.41	51.93	1.50	12.90	27.24	Peak	400	0 VERTICAL
5	180.35	40.35	43.50	-3.15	52.84	1.57	13.14	27.20	Peak	400	0 VERTICAL
6	643.04	30.49	46.00	-15.51	36.67	2.97	18.91	28.06	Peak	400	0 VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	25°C	Humidity	56%
Test Engineer	YC Chen	Configurations	BR (GFSK) / Channel 0
Test Date	Sep. 25, 2013		

## Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4803.68	49.02	74.00	-24.98	47.75	3.29	33.02	35.04	Peak			100	305	HORIZONTAL
2	4804.00	43.92	54.00	-10.08	42.65	3.29	33.02	35.04	Average			100	305	HORIZONTAL

## Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4803.93	48.59	54.00	-5.41	47.32	3.29	33.02	35.04	Average			99	74	VERTICAL
2	4804.30	52.44	74.00	-21.56	51.17	3.29	33.02	35.04	Peak			99	74	VERTICAL

Temperature	25°C	Humidity	56%
Test Engineer	YC Chen	Configurations	BR (GFSK) / Channel 39
Test Date	Sep. 25, 2013		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.96	45.65	54.00	-8.35	44.19	3.33	33.16	35.03	Average	174	323	HORIZONTAL		
2	4882.29	50.03	74.00	-23.97	48.57	3.33	33.16	35.03	Peak	174	323	HORIZONTAL		
3	7322.47	51.97	74.00	-22.03	47.35	4.06	35.96	35.40	Peak	121	1	HORIZONTAL		
4	7322.94	44.17	54.00	-9.83	39.55	4.06	35.96	35.40	Average	121	1	HORIZONTAL		

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB				cm	deg	
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.71	52.26	74.00	-21.74	50.80	3.33	33.16	35.03	Peak	100	81	VERTICAL		
2	4881.98	48.92	54.00	-5.08	47.46	3.33	33.16	35.03	Average	100	81	VERTICAL		
3	7322.97	44.82	54.00	-9.18	40.20	4.06	35.96	35.40	Average	100	320	VERTICAL		
4	7323.23	52.48	74.00	-21.52	47.86	4.06	35.96	35.40	Peak	100	320	VERTICAL		

<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	BR (GFSK) / Channel 78
<b>Test Date</b>	Sep. 25, 2013		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	dB				cm	deg	
1	4960.03	45.75	54.00	-8.25	44.06	3.37	33.33	35.01	Average			100	237	HORIZONTAL
2	4960.10	50.17	74.00	-23.83	48.48	3.37	33.33	35.01	Peak			100	237	HORIZONTAL
3	7439.46	51.70	74.00	-22.30	46.83	4.07	36.20	35.40	Peak			101	6	HORIZONTAL
4	7439.90	43.24	54.00	-10.76	38.37	4.07	36.20	35.40	Average			101	6	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m	dB			cm	deg	
1	4959.94	47.56	54.00	-6.44	45.87	3.37	33.33	35.01	Average			100	13	VERTICAL
2	4960.20	51.43	74.00	-22.57	49.74	3.37	33.33	35.01	Peak			100	13	VERTICAL
3	7439.54	53.98	74.00	-20.02	49.11	4.07	36.20	35.40	Peak			101	287	VERTICAL
4	7439.89	47.16	54.00	-6.84	42.29	4.07	36.20	35.40	Average			101	287	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	25°C	Humidity	56%
Test Engineer	YC Chen	Configurations	EDR (8DPSK) / Channel 0
Test Date	Sep. 25, 2013		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4804.02	46.42	74.00	-27.58	45.15	3.29	33.02	35.04	Peak			100	305	HORIZONTAL
2	4804.06	36.07	54.00	-17.93	34.80	3.29	33.02	35.04	Average			100	305	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4803.94	39.80	54.00	-14.20	38.53	3.29	33.02	35.04	Average			100	83	VERTICAL
2	4804.02	48.06	74.00	-25.94	46.79	3.29	33.02	35.04	Peak			100	83	VERTICAL

Temperature	25°C	Humidity	56%
Test Engineer	YC Chen	Configurations	EDR (8DPSK) / Channel 39
Test Date	Sep. 25, 2013		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	4881.94	40.28	54.00	-13.72	38.82	3.33	33.16	35.03	Average			157	320	HORIZONTAL
2	4882.26	48.00	74.00	-26.00	46.54	3.33	33.16	35.03	Peak			157	320	HORIZONTAL
3	7322.34	47.31	74.00	-26.69	42.69	4.06	35.96	35.40	Peak			100	43	HORIZONTAL
4	7322.86	35.12	54.00	-18.88	30.50	4.06	35.96	35.40	Average			100	43	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	4881.54	49.71	74.00	-24.29	48.25	3.33	33.16	35.03	Peak			100	83	VERTICAL
2	4881.96	41.71	54.00	-12.29	40.25	3.33	33.16	35.03	Average			100	83	VERTICAL
3	7322.50	49.90	74.00	-24.10	45.28	4.06	35.96	35.40	Peak			163	333	VERTICAL
4	7322.92	38.54	54.00	-15.46	33.92	4.06	35.96	35.40	Average			163	333	VERTICAL

Temperature	25°C	Humidity	56%
Test Engineer	YC Chen	Configurations	EDR (8DPSK) / Channel 78
Test Date	Sep. 25, 2013		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	4959.54	47.64	74.00	-26.36	45.95	3.37	33.33	35.01	Peak			100	238	HORIZONTAL
2	4959.86	38.84	54.00	-15.16	37.15	3.37	33.33	35.01	Average			100	238	HORIZONTAL
3	7439.84	47.13	74.00	-26.87	42.26	4.07	36.20	35.40	Peak			100	26	HORIZONTAL
4	7439.87	35.56	54.00	-18.44	30.69	4.07	36.20	35.40	Average			100	26	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	4959.90	48.92	74.00	-25.08	47.23	3.37	33.33	35.01	Peak			100	13	VERTICAL
2	4959.98	40.63	54.00	-13.37	38.94	3.37	33.33	35.01	Average			100	13	VERTICAL
3	7439.80	48.68	74.00	-25.32	43.81	4.07	36.20	35.40	Peak			99	287	VERTICAL
4	7439.90	38.06	54.00	-15.94	33.19	4.07	36.20	35.40	Average			99	287	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Emissions Measurement

### 4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz /100 kHz for Peak

### 4.7.3. Test Procedures

#### For Radiated band edges Measurement:

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around band edges.

#### For Radiated Out of Band Emission Measurement:

1. The radiated emission test is performed on each TX port of operating mode without summing or adding  $10\log (N)$  since the limit is relative emission limit.  
Only worst data of each operating mode is presented.

#### 4.7.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.6.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.6.4.

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	56%
Test Engineer	YC Chen	Configurations	BR (GFSK) / Channel 0, 39, 78
Test Date	Sep. 25, 2013		

##### Channel 0

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	2376.06	46.20	54.00	-7.80	15.86	2.21	28.13	0.00	Average			100	358	HORIZONTAL
2	2381.19	57.65	74.00	-16.35	27.31	2.21	28.13	0.00	Peak			100	358	HORIZONTAL
3	2401.97	103.84			73.41	2.22	28.21	0.00	Average			100	358	HORIZONTAL
4	2402.16	104.13			73.70	2.22	28.21	0.00	Peak			100	358	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

##### Channel 39

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	2362.44	57.35	74.00	-16.65	27.06	2.19	28.10	0.00	Peak			100	360	HORIZONTAL
2	2363.08	46.86	54.00	-7.14	16.57	2.19	28.10	0.00	Average			100	360	HORIZONTAL
3	2441.00	101.81			71.28	2.24	28.29	0.00	Average			100	360	HORIZONTAL
4	2441.00	102.71			72.18	2.24	28.29	0.00	Peak			100	360	HORIZONTAL
5	2492.15	46.19	54.00	-7.81	15.50	2.27	28.42	0.00	Average			100	360	HORIZONTAL
6	2493.12	57.54	74.00	-16.46	26.85	2.27	28.42	0.00	Peak			100	360	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

##### Channel 78

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	2479.84	97.76			67.12	2.26	28.38	0.00	Peak			100	356	HORIZONTAL
2	2480.00	96.86			66.22	2.26	28.38	0.00	Average			100	356	HORIZONTAL
3	2483.50	46.36	54.00	-7.64	15.72	2.26	28.38	0.00	Average			100	356	HORIZONTAL
4	2483.50	57.65	74.00	-16.35	27.01	2.26	28.38	0.00	Peak			100	356	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

##### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	EDR (8DPSK) / Channel 0, 39, 78
<b>Test Date</b>	Sep. 25, 2013		

**Channel 0**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m						
1	2376.86	58.68	74.00	-15.32	28.34	2.21	28.13	0.00	Peak			100	124	VERTICAL
2	2390.00	45.57	54.00	-8.43	15.18	2.22	28.17	0.00	Average			100	124	VERTICAL
3	2402.00	91.76			61.33	2.22	28.21	0.00	Average			100	124	VERTICAL
4	2402.16	95.83			65.40	2.22	28.21	0.00	Peak			100	124	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

**Channel 39**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m						
1	2363.08	46.01	54.00	-7.99	15.72	2.19	28.10	0.00	Average			100	357	HORIZONTAL
2	2389.36	57.20	74.00	-16.80	26.82	2.21	28.17	0.00	Peak			100	357	HORIZONTAL
3	2441.00	96.62			66.09	2.24	28.29	0.00	Average			100	357	HORIZONTAL
4	2441.00	100.60			70.07	2.24	28.29	0.00	Peak			100	357	HORIZONTAL
5	2483.50	46.09	54.00	-7.91	15.45	2.26	28.38	0.00	Average			100	357	HORIZONTAL
6	2484.14	57.26	74.00	-16.74	26.62	2.26	28.38	0.00	Peak			100	357	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

**Channel 78**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m						
1	2479.84	99.62			68.98	2.26	28.38	0.00	Peak			100	360	HORIZONTAL
2	2480.00	95.47			64.83	2.26	28.38	0.00	Average			100	360	HORIZONTAL
3	2483.50	46.77	54.00	-7.23	16.13	2.26	28.38	0.00	Average			100	360	HORIZONTAL
4	2483.50	58.08	74.00	-15.92	27.44	2.26	28.38	0.00	Peak			100	360	HORIZONTAL


Item 1, 2 are the fundamental frequency at 2480 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### Plot on Configuration For BR (GFSK) / Channel 0 / Reference Level

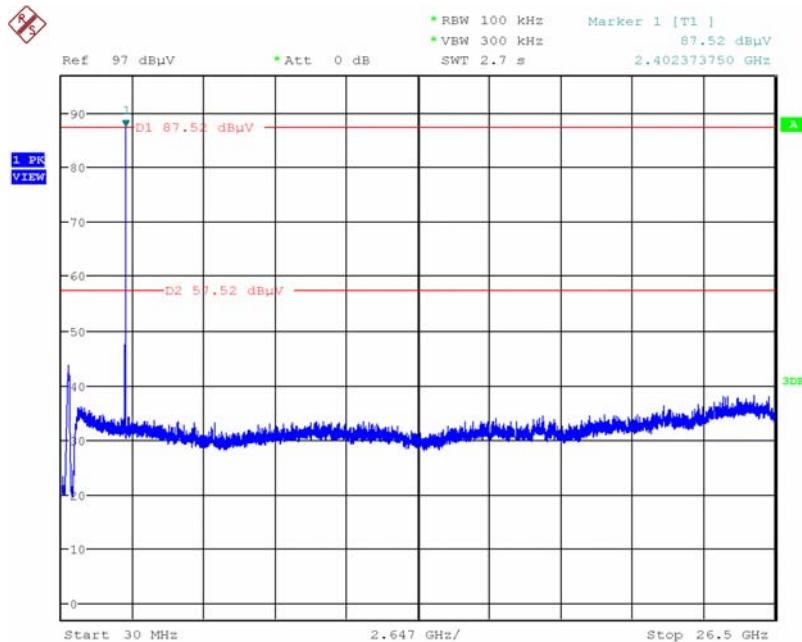


Date: 25.SEP.2013 23:18:31

### Plot on Configuration For BR (GFSK) / Channel 0 / 30MHz~2400MHz (down 30dBc)

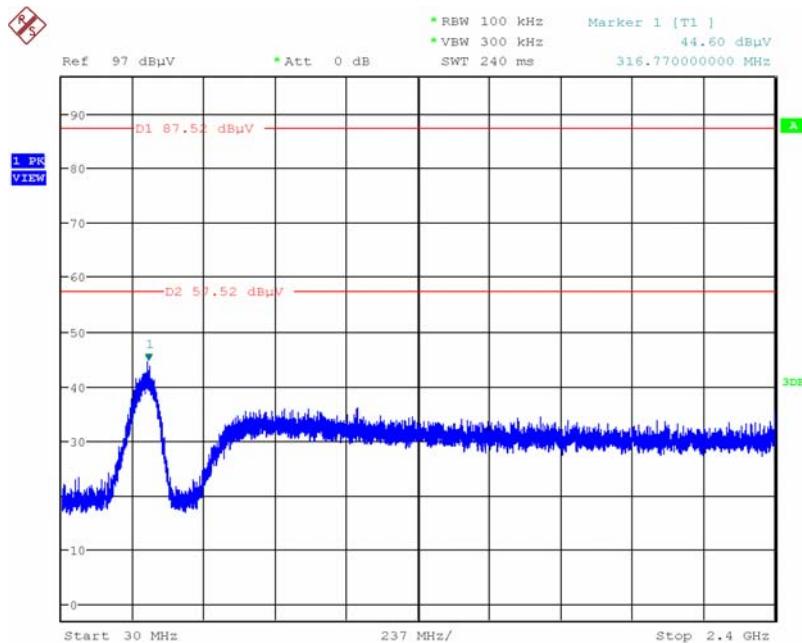


Date: 25.SEP.2013 23:18:58

### Plot on Configuration For BR (GFSK) / Channel 0 / 2500MHz~26500MHz (down 30dBc)

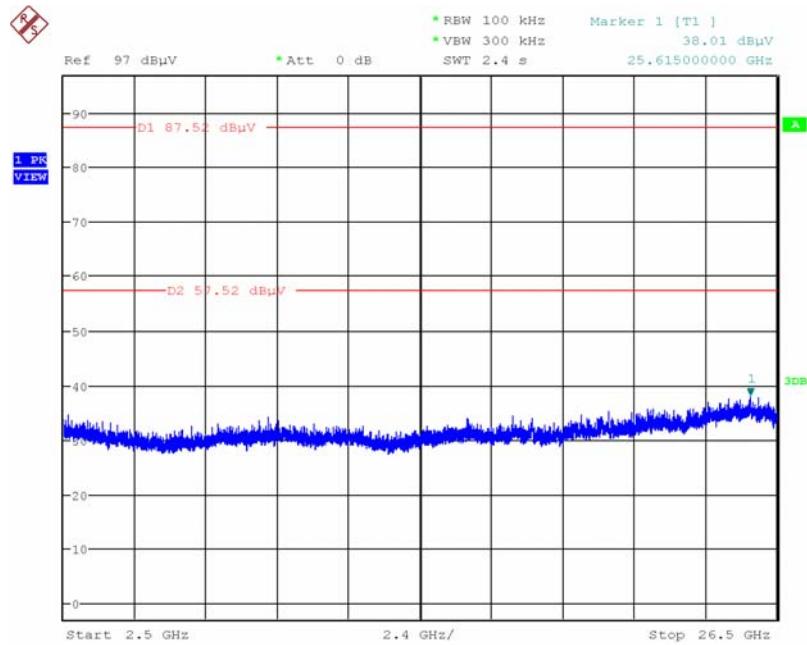


Date: 25.SEP.2013 23:19:46


### Plot on Configuration For BR (GFSK) / Channel 78 / Reference Level

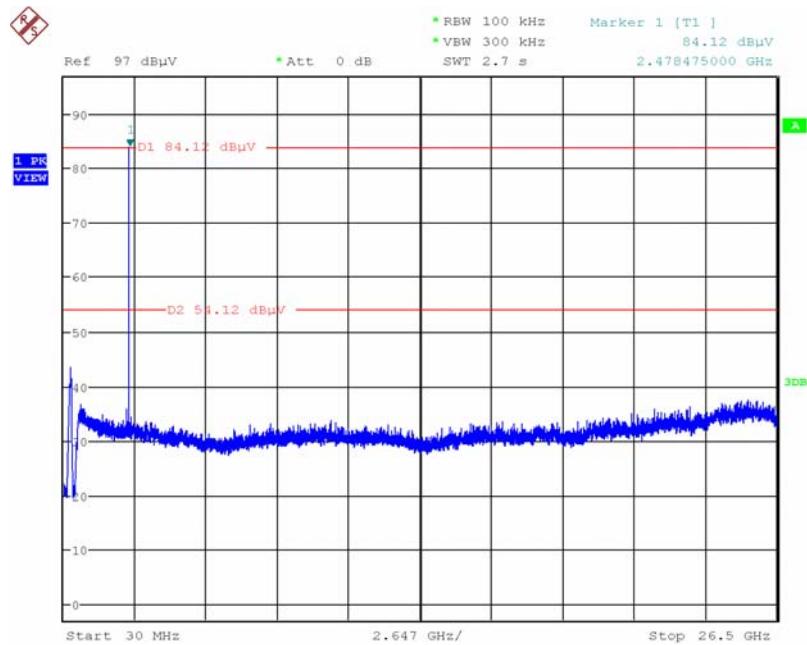

Date: 25.SEP.2013 23:21:29

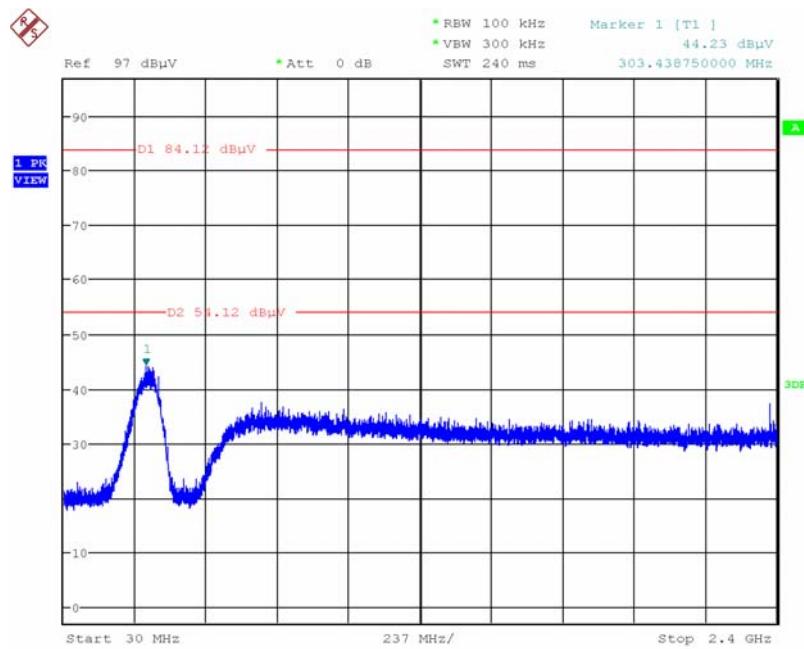
**Plot on Configuration For BR (GFSK) / Channel 78 / 30MHz~2400MHz (down 30dBc)**


Date: 25.SEP.2013 23:22:51

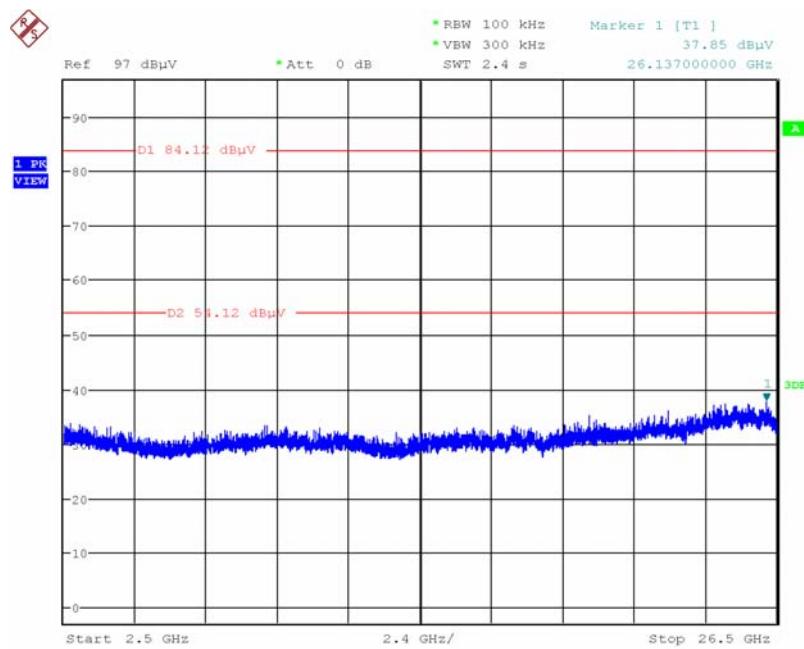**Plot on Configuration For BR (GFSK) / Channel 78 / 2500MHz~26500MHz (down 30dBc)**


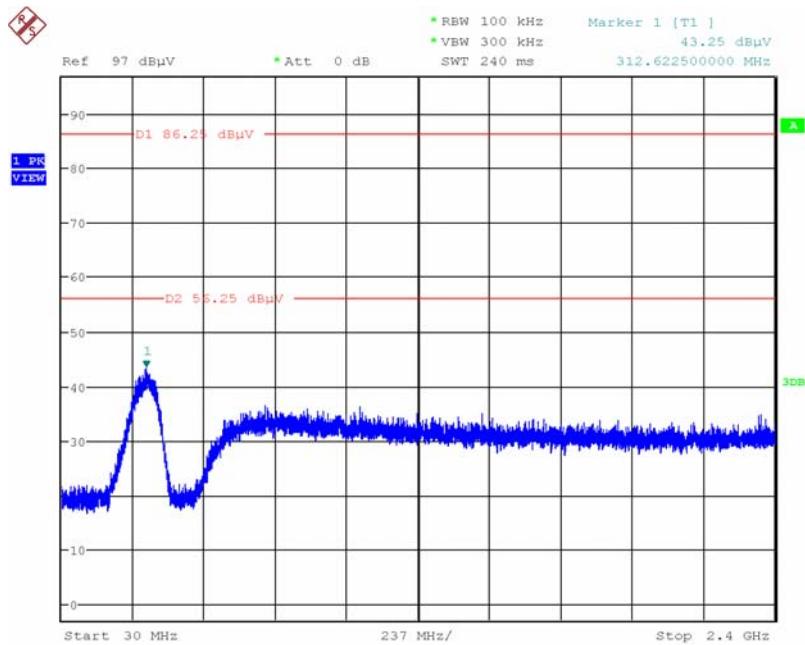
Date: 25.SEP.2013 23:23:59

### Plot on Configuration For BR (GFSK) / Hopping / Reference Level

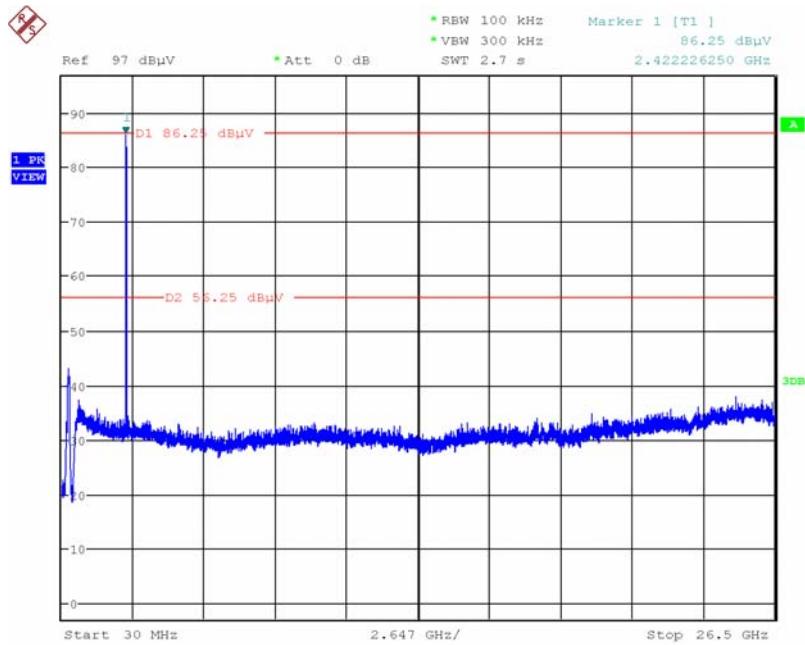


Date: 25.SEP.2013 23:35:16

### Plot on Configuration For BR (GFSK) / Hopping / 30MHz~2400MHz (down 30dBc)




Date: 25.SEP.2013 23:35:56

**Plot on Configuration For BR (GFSK) / Hopping / 2500MHz~26500MHz (down 30dBc)**

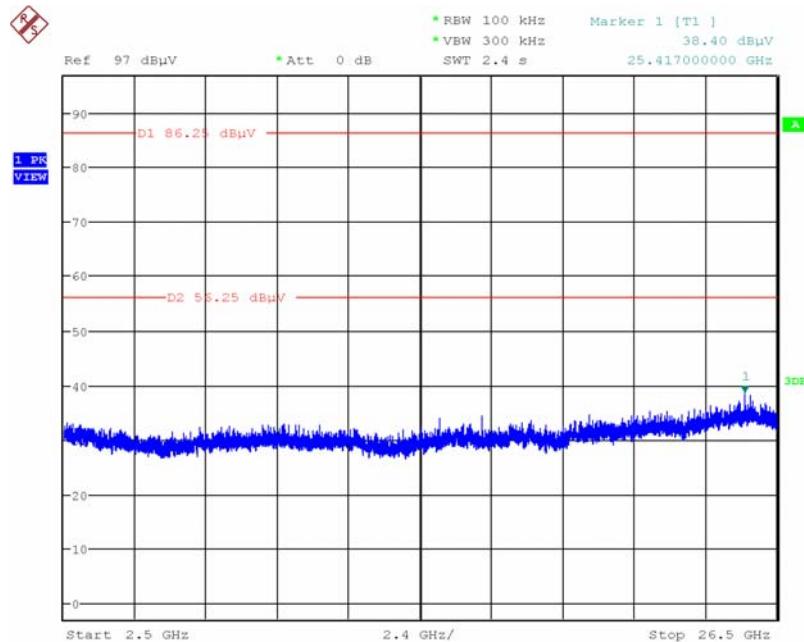


Date: 25.SEP.2013 23:36:28

### Plot on Configuration For EDR (8DPSK) / Channel 0 / Reference Level

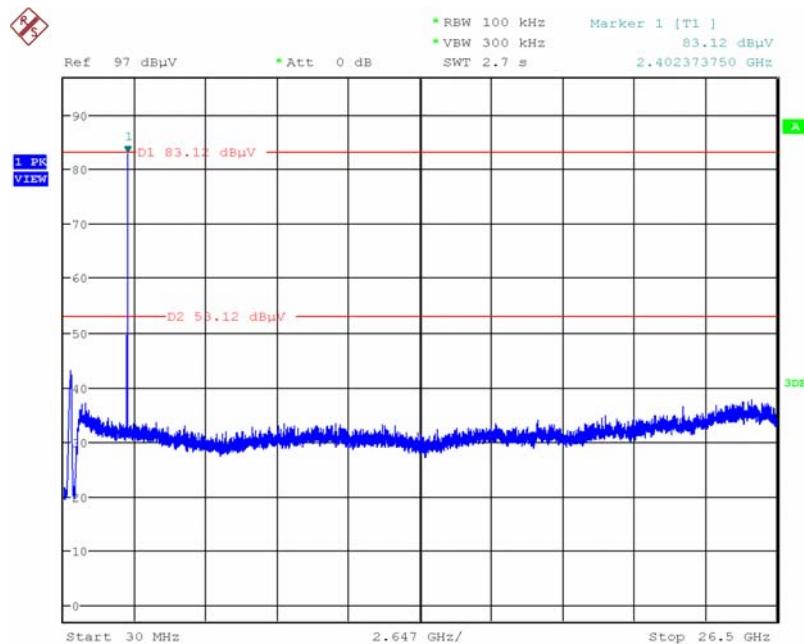


Date: 25.SEP.2013 23:28:49

### Plot on Configuration For EDR (8DPSK) / Channel 0 / 30MHz~2400MHz (down 30dBc)

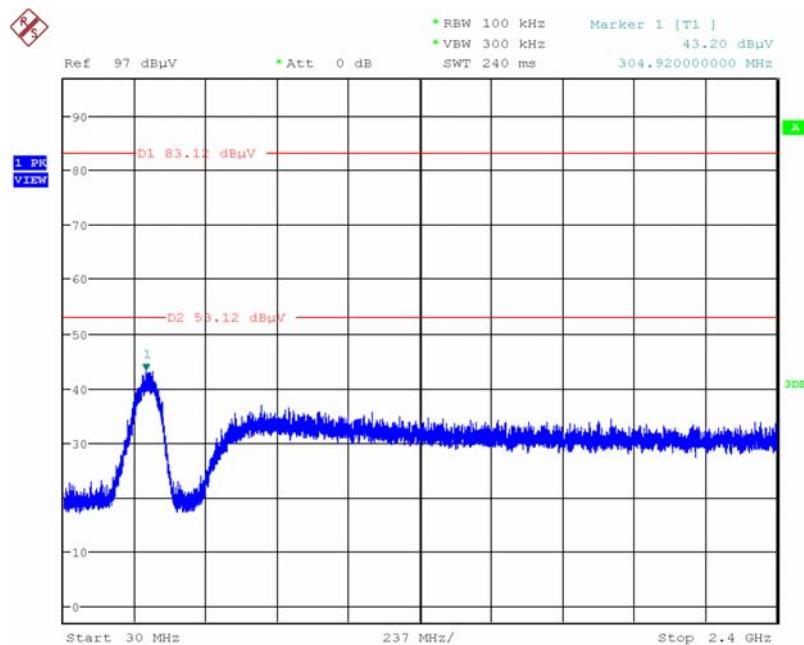


Date: 25.SEP.2013 23:29:12

### Plot on Configuration For EDR (8DPSK) / Channel 0 / 2500MHz~26500MHz (down 30dBc)

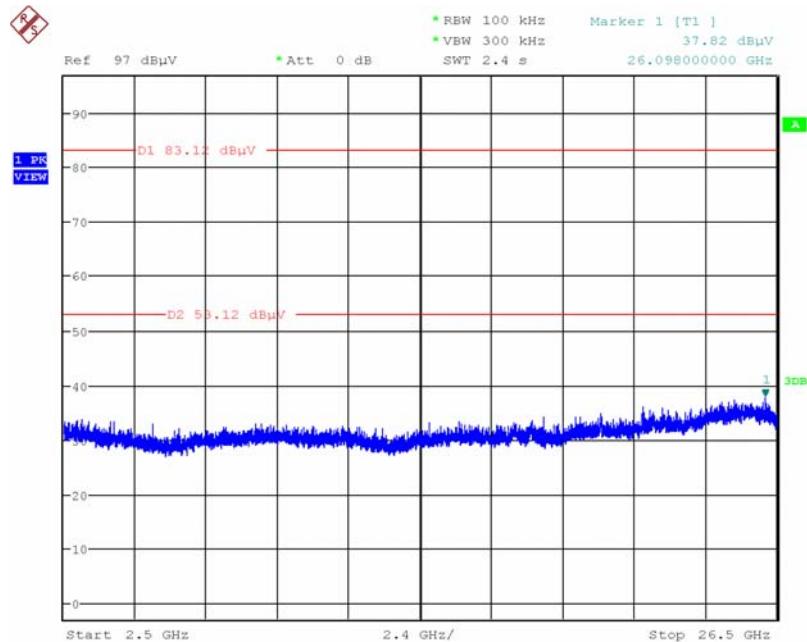


Date: 25.SEP.2013 23:29:50

### Plot on Configuration For EDR (8DPSK) / Channel 78 / Reference Level

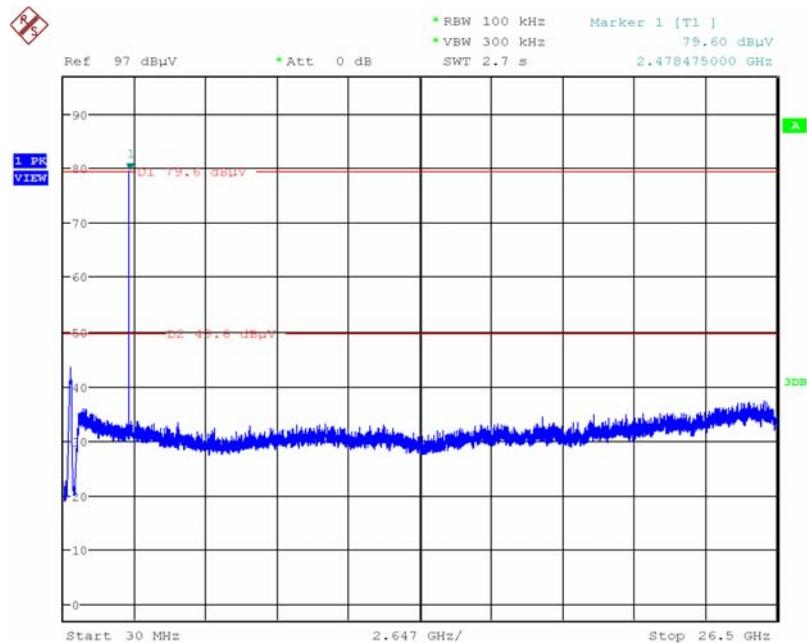


Date: 25.SEP.2013 23:30:59

### Plot on Configuration For EDR (8DPSK) / Channel 78 / 30MHz~2400MHz (down 30dBc)

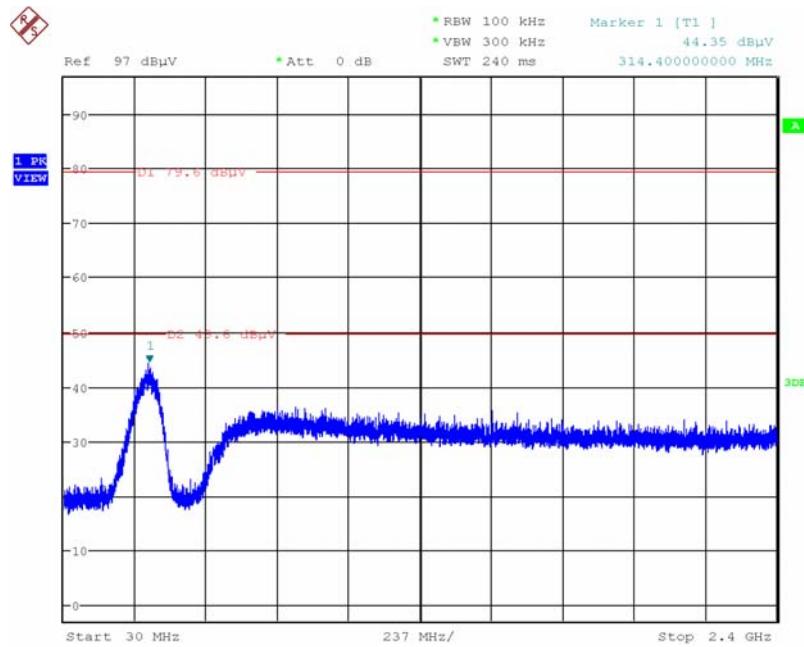


Date: 25.SEP.2013 23:31:24

### Plot on Configuration For EDR (8DPSK) / Channel 78 / 2500MHz~26500MHz (down 30dBc)

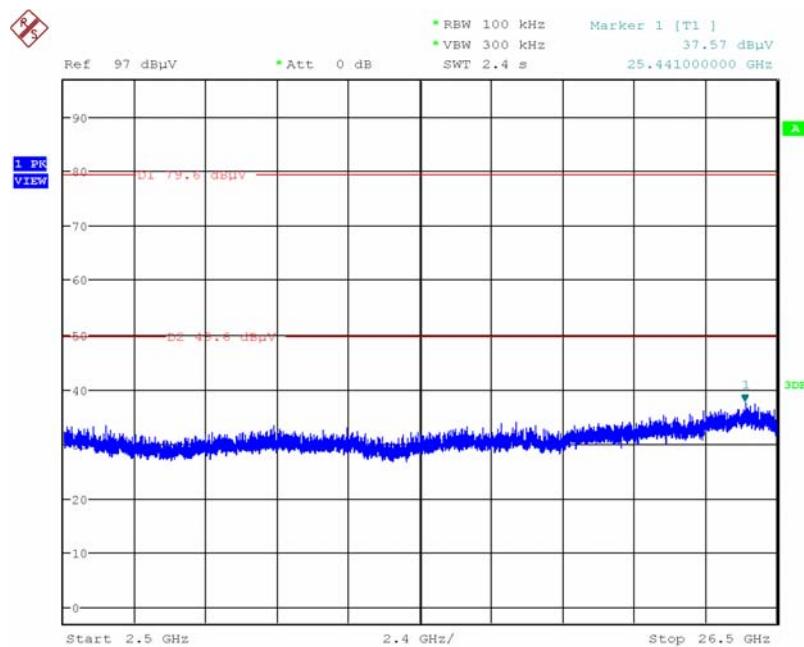


Date: 25.SEP.2013 23:32:07

### Plot on Configuration For EDR (8DPSK) / Hopping / Reference Level

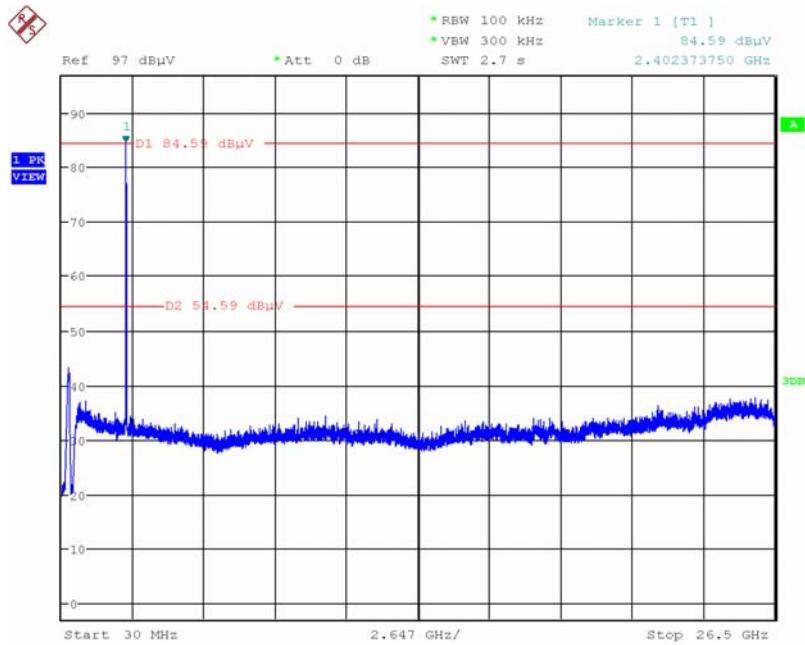


Date: 25.SEP.2013 23:40:06

### Plot on Configuration For EDR (8DPSK) / Hopping / 30MHz~2400MHz (down 30dBc)

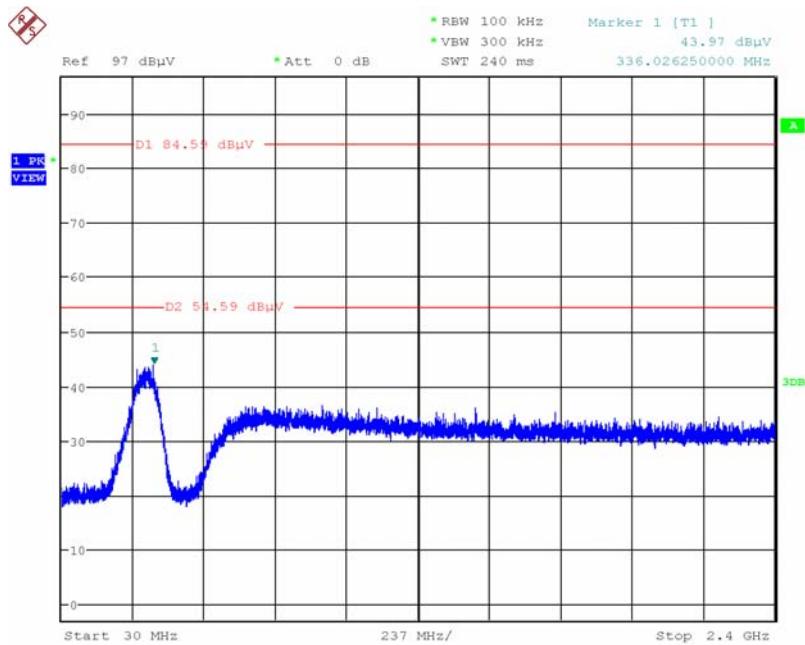

Date: 25.SEP.2013 23:40:49

**Plot on Configuration For EDR (8DPSK) / Hopping / 2500MHz~26500MHz (down 30dBc)**

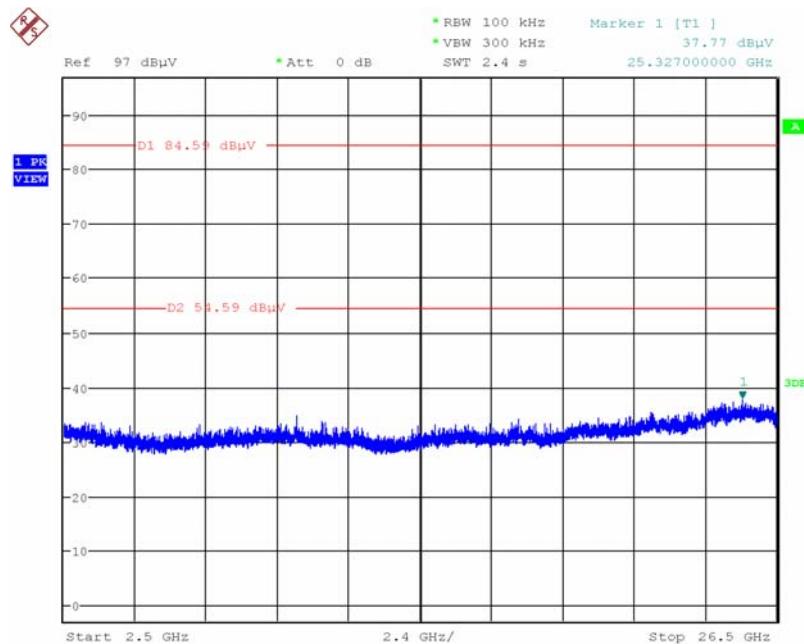

Date: 25.SEP.2013 23:41:49

## 4.8. Antenna Requirements

### 4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

### 4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Jul. 17, 2013	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

\*Calibration Interval of instruments listed above is two year.

N.C.R. means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. MEASUREMENT UNCERTAINTY

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch				
Receiver VSWR 1=	-0.080	dB	U-shaped	0.060
AMN/LISN VSWR 2=				
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	$\pm 0.173$	dB	K=1	0.086
Cable loss	$\pm 0.174$	dB	K=2	0.087
Antenna gain	$\pm 0.169$	dB	K=2	0.084
Site imperfection	$\pm 0.433$	dB	Triangular	0.214
Pre-amplifier gain	$\pm 0.366$	dB	K=2	0.183
Transmitter antenna	$\pm 1.200$	dB	Rectangular	0.600
Signal generator	$\pm 0.461$	dB	Rectangular	0.231
Mismatch	$\pm 0.080$	dB	U-shape	0.040
Spectrum analyzer	$\pm 0.500$	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	$\pm 0.038$	dB	K=2	0.019
Attenuator	$\pm 0.047$	dB	K=2	0.024
Power Meter specification	$\pm 0.300$	dB	Triangular	0.150
Power Sensor specification	$\pm 0.300$	dB	Rectangular	0.150
Signal generator	$\pm 0.461$	dB	Rectangular	0.231
Mismatch	$\pm 0.080$	dB	U-shape	0.040
Spectrum analyzer	$\pm 0.500$	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726