# FCC 47 CFR PART 15 SUBPART C TEST REPORT

For

Xube

Model: PS037,PS037RDG,PS037BKG,PS037XXX(XXX can be any letters)

**Brand: Gear4** 

Test Report Number: C140430Z05-RP1

Prepared for

Disruptive Hong Kong Limited

Room 2002,20/F,King Palace Plaza, 52A Sha Tsui Road, Tsuen Wan, N.T.

Hong Kong

Prepared by

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.** 

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen China

> TEL: 86-755-28055000 FAX: 86-755-28055221 Issued Date: May 9, 2014







Report No.: C140430Z05-RP1

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.

FCC ID: 2AACFPS037 Page 1 / 60



# **Revision History**

Report No.: C140430Z05-RP1

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	C140430Z05-RP1	Initial Issue	ALL	Sinphy Xie

FCC ID: 2AACFPS037 Page 2 of 60

# **TABLE OF CONTENTS**

Report No.: C140430Z05-RP1

TEST RESULT CERTIFICATION	4
EUT DESCRIPTION	5
TEST METHODOLOGY	6
3.1 DESCRIPTION OF TEST MODES	6
FACILITIES AND ACCREDITATIONS	7
4.1 FACILITIES	7
4.3 MEASUREMENT UNCERTAINTY	
SETUP OF EQUIPMENT UNDER TEST	8
5.1 SETUP CONFIGURATION OF EUT	8 8
FCC PART 15.247 REQUIREMENTS	9
6.1 20dB BANDWIDTH	9
6.2 PEAK POWER	13
6.5 FREQUENCY SEPARATION	26
6.9 POWERI INF CONDUCTED EMISSIONS	
	EUT DESCRIPTION

### 1. TEST RESULT CERTIFICATION

Product:	Xube
Model:	PS037,PS037RDG,PS037BKG,PS037XXX(XXX can be any letters)
Brand:	Gear4
Tested:	April 30~May 9, 2014
Applicant:	Disruptive Hong Kong Limited Room 2002,20/F,King Palace Plaza, 52A Sha Tsui Road, Tsuen Wan, N.T. Hong Kong
Manufacturer:	Disruptive Hong Kong Limited Room 2002,20/F,King Palace Plaza, 52A Sha Tsui Road, Tsuen Wan, N.T. Hong Kong

APPLICABLE STANDARDS				
STANDARD TEST RESULT				
FCC 47 CFR Part 15 Subpart C	No non-compliance noted			

# We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Sunday Hu

Supervisor of EMC Dept.

Smoon . Hu

**Compliance Certification Service Inc.** 

**Ruby Zhang** 

**Supervisor of Report Dept.** 

Compliance Certification Service Inc.

Report No.: C140430Z05-RP1

FCC ID: 2AACFPS037 Page 4 of 60

# 2. EUT DESCRIPTION

Product	Xube
Model Number	PS037,PS037RDG,PS037BKG,PS037XXX(XXX can be any letters)
Brand	Gear4
Model Discrepancy	They are the same products except just different color versions.
Identify Number	C140430Z05-RP1
Power Supply	DC5V supplied by the notebook or DC3.7V supplied by the battery
Micro USB Cable	Unshielded, 0.40m
Received Date	April 30, 2014
Frequency Range	2402 ~ 2480 MHz
Transmit Power	GFSK: 1.72dBm 8DPSK: 1.27dBm
Modulation Technique	FHSS (GFSK for 1Mbps, $\pi$ /4-DQPSK for 2Mbps, 8DPSK for 3Mbps)
Number of Channels	79 Channels
Antenna Specification	PCB Antenna with 0dBi gain(Max)
Temperature Range	0°C ~ +40°C
Hardware Version	1.1
Software Version	1.3

Report No.: C140430Z05-RP1

**Note:** This submittal(s) (test report) is intended for FCC ID: <u>2AACFPS037</u> filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

FCC ID: 2AACFPS037 Page 5 of 60

# 3. TEST METHODOLOGY

#### 3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Report No.: C140430Z05-RP1

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Charge + Line In	
Radiated Emission	Mode 1: TX	

Above 1G, Channel Low (2402MHz)  $\cdot$  Mid (2441MHz) and High (2480MHz) were chosen for full testing for GFSK and 8DPSK.

FCC ID: 2AACFPS037 Page 6 of 60

### 4. FACILITIES AND ACCREDITATIONS

#### 4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.4:2009, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

Report No.: C140430Z05-RP1

#### 4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA A2LA China CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

**USA** FCC

**Japan** VCCI(C-3478, R-3135, T-652, G-624)

Canada INDUSTRY CANADA

Taiwan BSMI

Copies of granted accreditation certificates are available for downloading from our web site, <a href="http://www.ccsrf.com">http://www.ccsrf.com</a>

#### 4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site: 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site: 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.

FCC ID: 2AACFPS037 Page 7 of 60

# 5. SETUP OF EQUIPMENT UNDER TEST

### **5.1 SETUP CONFIGURATION OF EUT**

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

Report No.: C140430Z05-RP1

#### **5.2 SUPPORT EQUIPMENT**

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook	992F2VG	62P7043	N/A	IBM	N/A	Unshielded 2.50m
2	PC	DCSM1F	B8AC6F2474CE	N/A	DELL	N/A	Unshielded 1.50m
3	Monitor	U3011T	CNOPH5NY744450 97425L	N/A	DELL	Shielded 1.50m	Unshielded 1.50m
4	Mouse	KB212-B	CN09RRC44751168 0996	N/A	DELL	Unshielded 1.45m	N/A
5	Keyboard	KB212-B	CNOK6KPN71616	N/A	DELL	Unshielded 1.45m	N/A
6	Printer	D1668	CN9CKCB2RG	N/A	HP	Unshielded 1.20m	Unshielded 2.00m
7	Modem	DU-562M	DU562MSG.B1	N/A	D-Link	Shielded 1.50m	N/A

#### Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

FCC ID: 2AACFPS037 Page 8 of 60

### 6. FCC PART 15.247 REQUIREMENTS

#### 6.1 20dB BANDWIDTH

None; for reporting purpose only.


### **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

Report No.: C140430Z05-RP1

Remark: Each piece of equipment is scheduled for calibration once a year.

### **TEST CONFIGURATION**



#### **TEST PROCEDURE**

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=30kHz, VBW=100kHz, Span=3MHz, Sweep = auto.
- 4. Mark the peak frequency and 20dB (upper and lower) frequency.
- 5. Repeat until all the test channels are investigated.


#### **TEST RESULTS**

No non-compliance noted

FCC ID: 2AACFPS037 Page 9 of 60


#### Test plot GFSK

### 20dB Bandwidth(CH Low)

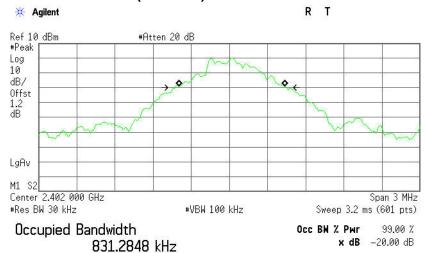


Transmit Freq Error 18.661 kHz x dB Bandwidth 875.909 kHz

#### 20dB Bandwidth (CH Mid)

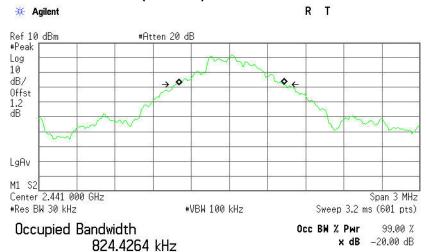


Transmit Freq Error 15.368 kHz x dB Bandwidth 864.112 kHz

FCC ID: 2AACFPS037 Page 10 of 60




### 20dB Bandwidth (CH High)

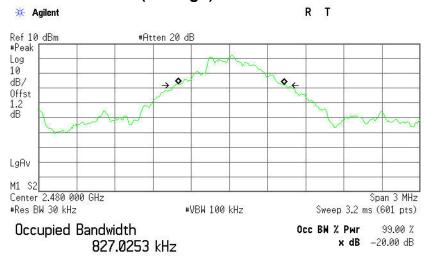

Transmit Freq Error 14.289 kHz x dB Bandwidth 866.751 kHz

#### 8DPSK


#### 20dB Bandwidth (CH Low)

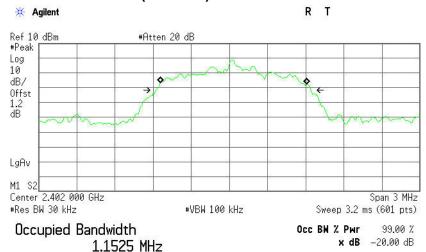

Transmit Freq Error 35.192 kHz x dB Bandwidth 1.213 MHz

FCC ID: 2AACFPS037 Page 11 of 60


# \_\_\_\_

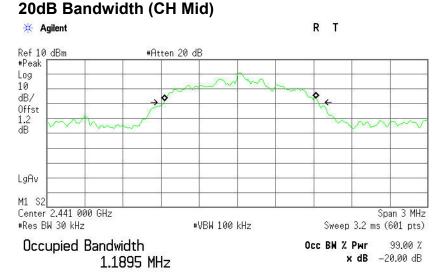

Report No.: C140430Z05-RP1

Transmit Freq Error 24.091 kHz x dB Bandwidth 1.216 MHz

#### 20dB Bandwidth (CH High)

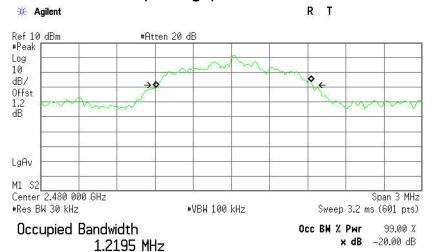

Transmit Freq Error 20.769 kHz x dB Bandwidth 1.219 MHz

FCC ID: 2AACFPS037 Page 12 of 60

#### **6.2 PEAK POWER**

### <u>LIMIT</u>

The maximum peak output power of the intentional radiator shall not exceed the following:

Report No.: C140430Z05-RP1


- 1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
- 2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
- 3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	03/01/2014	03/01/2015
Power Sensor	Anritsu	MA2411B	1126150	03/01/2014	03/01/2015
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

#### **Test Configuration**



### TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

FCC ID: 2AACFPS037 Page 13 of 60

# **TEST RESULTS**

No non-compliance noted

# **Test Data**

# **GFSK**

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-2.37	3.50	1.13	0.00130		PASS
Mid	2441	-1.78	3.50	1.72	0.00149	1	PASS
High	2480	-1.87	3.50	1.63	0.00146		PASS

Report No.: C140430Z05-RP1

#### 8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-3.23	3.50	0.27	0.00106		PASS
Mid	2441	-2.23	3.50	1.27	0.00134	1	PASS
High	2480	-2.25	3.50	1.25	0.00133		PASS

FCC ID: 2AACFPS037 Page 14 of 60

#### **6.3 PEAK POWER SPECTRAL DENSITY**

#### LIMIT

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Report No.: C140430Z05-RP1


2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

#### **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

#### **Test Configuration**



### **TEST PROCEDURE**

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS bandwidth.
- 3. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
- 4.Set the VBW  $\geq$  3  $\times$  RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level within the RRW
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### **TEST RESULTS**

Not applicable. Since EUT is the Bluetooth device.

FCC ID: 2AACFPS037 Page 15 of 60

#### **6.4 BAND EDGES MEASUREMENT**

### **LIMIT**


According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

Report No.: C140430Z05-RP1

# **MEASUREMENT EQUIPMENT USED**

D II ( 15 1 1 5 4 20 42)								
	Radiated En	nission Test Si	te 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration			
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015			
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015			
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2014	03/18/2015			
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2014	03/18/2015			
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2014	03/01/2015			
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2014	03/01/2015			
Board-Band Horn Antenna	SCHWARZBECK	BBHA9170	9170-497	07/10/2013	07/09/2014			
Loop Antenna	A、R、A	PLA-1030/B	1029	03/19/2014	03/18/2015			
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R			
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R			
Controller	СТ	N/A	N/A	N.C.R	N.C.R			
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2014	02/28/2015			
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R			
Test S/W	FARAD		LZ-RF / CCS	S-SZ-3A2				

#### **Test Configuration**

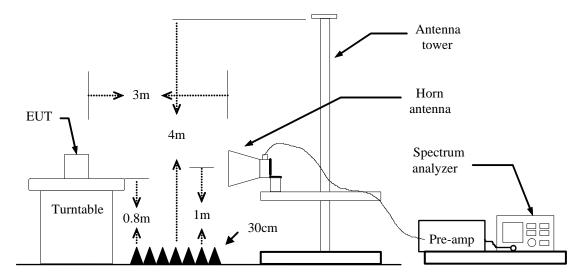

FCC ID: 2AACFPS037 Page 16 of 60

### **TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

Report No.: C140430Z05-RP1

- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=2.4kHz / Sweep=AUTO
- 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.


#### **TEST RESULTS**

Refer to attach spectrum analyzer data chart.


FCC ID: 2AACFPS037 Page 17 of 60

### Test Data (GFSK)

### **Band Edges (CH-Low)**

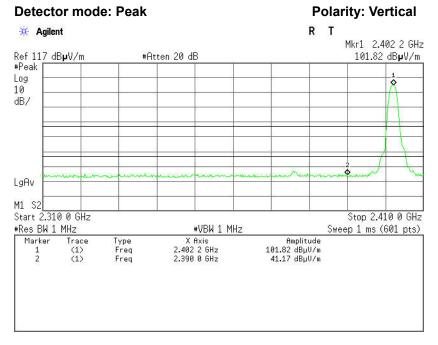


#### Detector mode: Average Polarity: Vertical

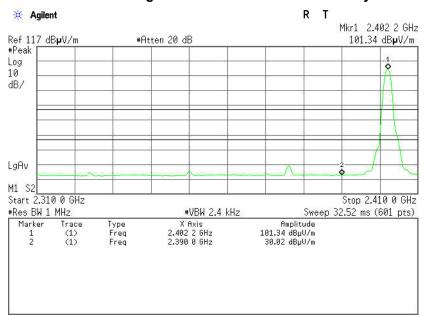


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	34.57	-6.60	41.17	74.00	-32.83	Peak	Vertical
2	2390.0000	23.42	-6.60	30.02	54.00	-23.98	Average	Vertical

FCC ID: 2AACFPS037 Page 18 of 60



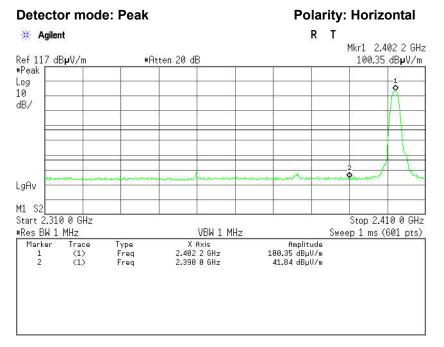


#### **Detector mode: Average Polarity: Horizontal**

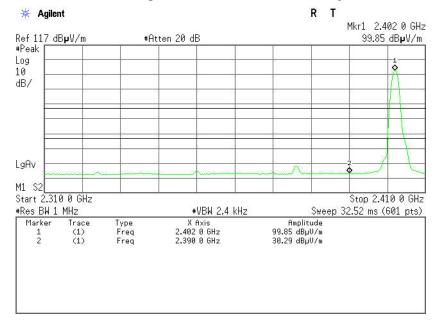


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	35.24	-6.60	41.84	74.00	-32.16	Peak	Horizontal
2	2390.0000	23.69	-6.60	30.29	54.00	-23.71	Average	Horizontal

FCC ID: 2AACFPS037 Page 19 of 60

### **Band Edges (CH-High)**

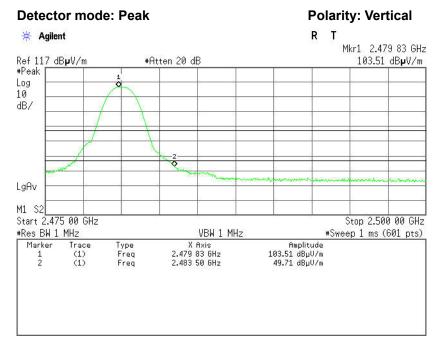


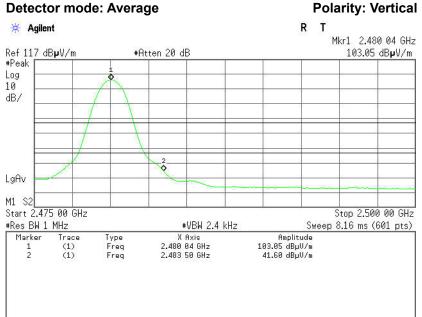


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	43.47	-6.24	49.71	74.00	-24.29	Peak	Vertical
2	2483.5000	35.36	-6.24	41.60	54.00	-12.40	Average	Vertical

FCC ID: 2AACFPS037 Page 20 of 60



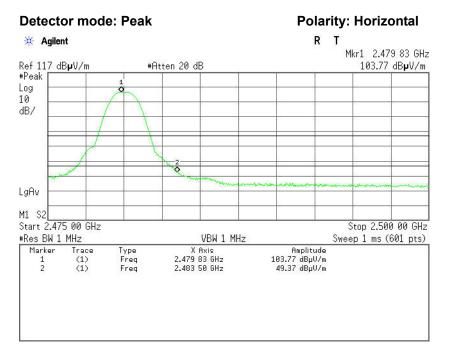

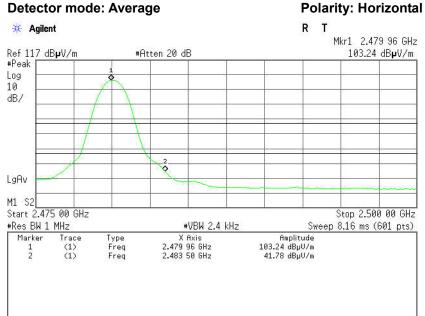



No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	43.13	-6.24	49.37	74.00	-24.63	Peak	Horizontal
2	2483.5000	35.54	-6.24	41.78	54.00	-12.22	Average	Horizontal

FCC ID: 2AACFPS037 Page 21 / 60

#### 8DPSK

#### **Band Edges (CH-Low)**

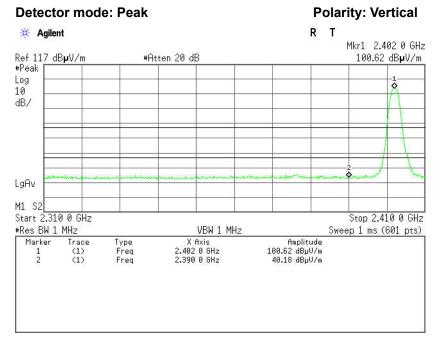


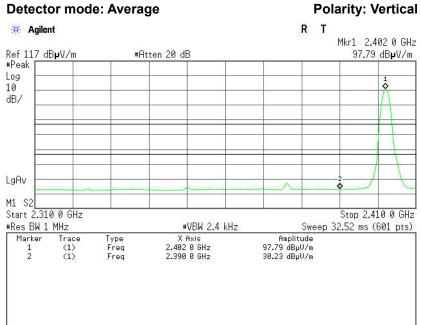


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)			Detector	Antenna Pole	
1	2390.0000	33.58	-6.60	40.18	74.00	-33.82	Peak	Vertical
2	2390.0000	23.63	-6.60	30.23	54.00	-23.77	Average	Vertical

FCC ID: 2AACFPS037 Page 22 / 60


\* Agilent



Report No.: C140430Z05-RP1

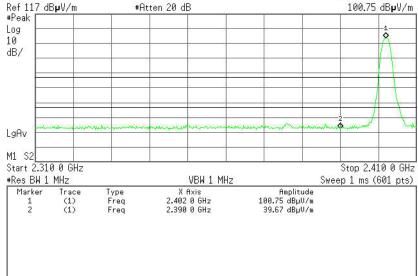

#### **Detector mode: Average Polarity: Horizontal**

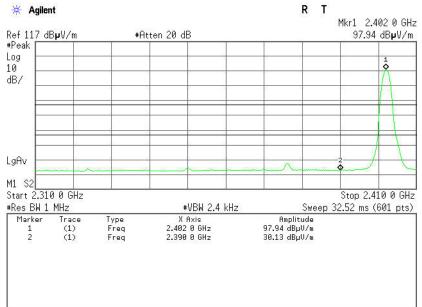


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	33.07	-6.60	39.67	74.00	-34.33	Peak	Horizontal
2	2390.0000	23.53	-6.60	30.13	54.00	-23.87	Average	Horizontal

FCC ID: 2AACFPS037 Page 23 / 60


### **Band Edges (CH-High)**



Report No.: C140430Z05-RP1

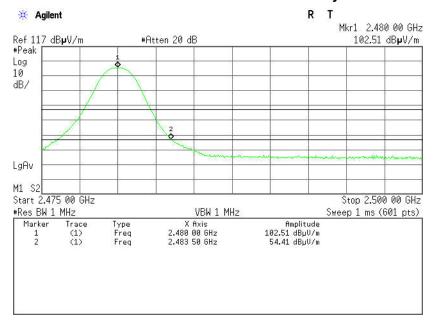


Detector mode: Average Polarity: Vertical

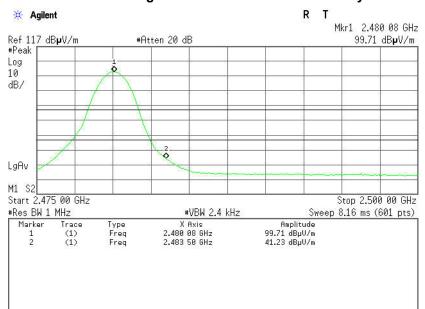


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	48.17	-6.24	54.41	74.00	-19.59	Peak	Vertical
2	2483.5000	34.99	-6.24	41.23	54.00	-12.77	Average	Vertical

FCC ID: 2AACFPS037 Page 24 / 60

Report No.: C140324Z04-RP1

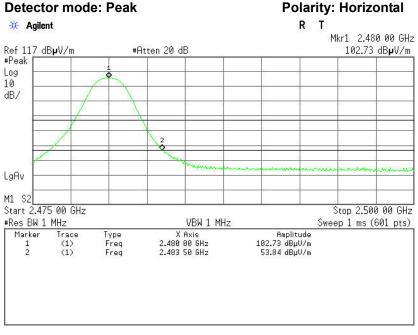

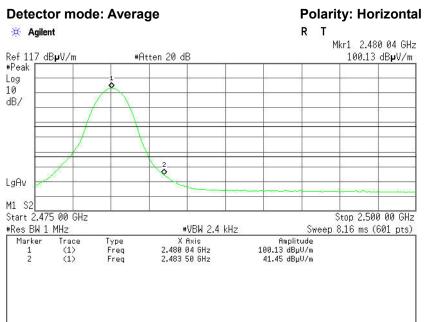

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	47.60	-6.24	53.84	74.00	-20.16	Peak	Horizontal
2	2483.5000	35.21	-6.24	41.45	54.00	-12.55	Average	Horizontal

FCC ID: 2AACFPS037 Page 25/60

#### **6.5 FREQUENCY SEPARATION**

### **LIMIT**

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Report No.: C140430Z05-RP1

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

#### **Test Configuration**



### **TEST PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

#### **TEST RESULTS**

No non-compliance noted

#### **Test Data**

#### **GFSK**

Channel Separation   Two-thirds of the 20 dB   Bandwidth (kHz)		Channel Separation Limit	Result
1.000	583.939	> Two-thirds of the 20 dB Bandwidth	Pass

#### 8DPSK


Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	812.667	> Two-thirds of the 20 dB Bandwidth	Pass

FCC ID: 2AACFPS037 Page 26 / 60

#### **GFSK**

#### **Test Plot**

### **Measurement of Channel Separation**

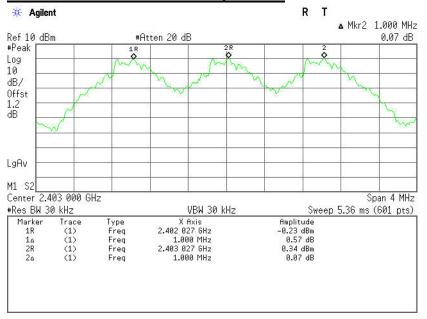


### 20 dB bandwidth(CH Low)

Transmit Freq Error

x dB Bandwidth

18.661 kHz

875.909 kHz

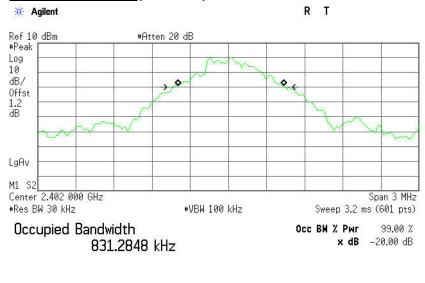


FCC ID: 2AACFPS037 Page 27 / 60


#### 8DPSK

#### **Test Plot**

### **Measurement of Channel Separation**

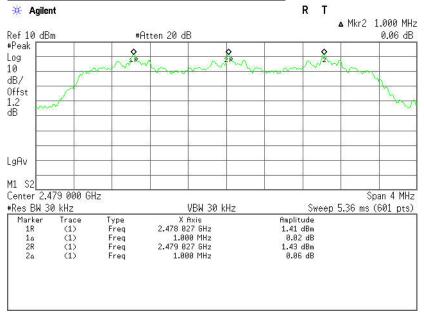

### 20 dB bandwidth(CH High)

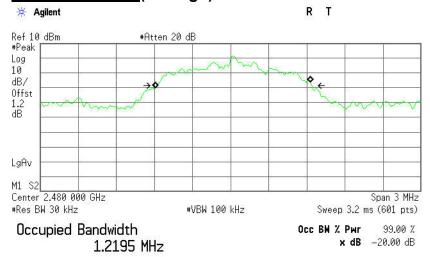

Transmit Freq Error 20.769 kHz x dB Bandwidth 1.219 MHz

FCC ID: 2AACFPS037 Page 28 / 60

### **6.6 NUMBER OF HOPPING FREQUENCY**

### **LIMIT**

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.


# **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

Report No.: C140430Z05-RP1

Remark: Each piece of equipment is scheduled for calibration once a year.

### **Test Configuration**



# **TEST PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop =2483.5MHz, Sweep = 1ms and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = 1ms.
- 4. Set the spectrum analyzer as RBW, VBW=300kHz,
- 5. Max hold, view and count how many channel in the band.

#### **TEST RESULTS**

No non-compliance noted

#### **Test Data**


Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

FCC ID: 2AACFPS037 Page 29 / 60


#### Test Plot ( GFSK )

#### **Channel Number**

#### 2.400 GHz -2.4415 GHz

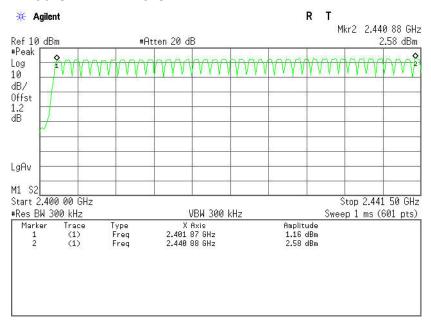

#### 2.4415 GHz -2.4835 GHz

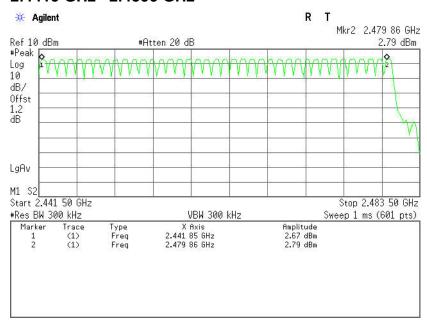


FCC ID: 2AACFPS037 Page 30 / 60


#### Test Plot (8DPSK)

#### **Channel Number**

#### 2.400 GHz -2.4415 GHz

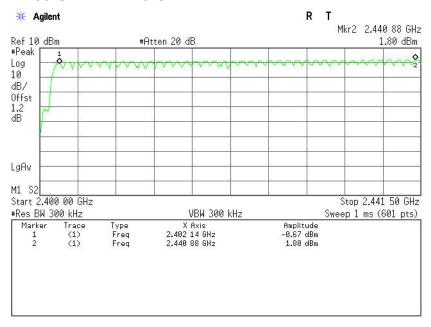

#### 2.4415 GHz -2.4835 GHz

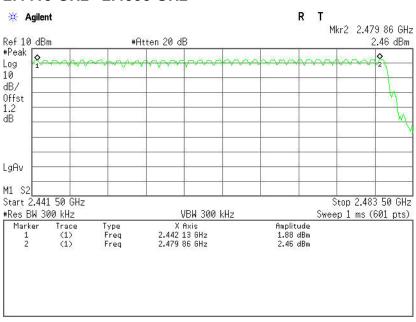

FCC ID: 2AACFPS037 Page 31 / 60

# **6.7 TIME OF OCCUPANCY (DWELL TIME)**

# **LIMIT**

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.


Report No.: C140430Z05-RP1

# MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

#### **Test Configuration**



# **TEST PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- 5. Repeat above procedures until all frequency measured were complete.

FCC ID: 2AACFPS037 Page 32 / 60

# **TEST RESULTS**

No non-compliance noted

# Test Data

### **GFSK**

### **DH 1**

CH Mid: 0.438\* (1600/2)/79\*31.6 = 140.160 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.438	140.160	31.60	400.00	PASS

Report No.: C140430Z05-RP1

#### **DH 3**

CH Mid:  $1.700^* (1600/4)/79 * 31.6 = 272.000 (ms)$ 

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.700	272.000	31.60	400.00	PASS

#### <u>DH 5</u>

CH Mid: 2.953\* (1600/6)/79\*31.6 = 314.987 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.953	314.987	31.60	400.00	PASS

FCC ID: 2AACFPS037 Page 33 / 60

### **Test Data**

#### 8DPSK

### <u>DH 1</u>

CH Mid: 0.453\* (1600/2)/79\*31.6 = 144.960 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.453	144.960	31.60	400.00	PASS

Report No.: C140430Z05-RP1

### **DH 3**

CH Mid: 1.717\* (1600/4)/79\* 31.6 = 274.720 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.717	274.720	31.60	400.00	PASS

#### **DH 5**

CH Mid: 2.980\* (1600/6)/79\* 31.6 = 317.867 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.980	317.867	31.60	400.00	PASS

FCC ID: 2AACFPS037 Page 34 / 60


Report No.: C140324Z04-RP1

#### Test Plot

#### **GFSK**


#### **DH 1**

### (CH Mid)

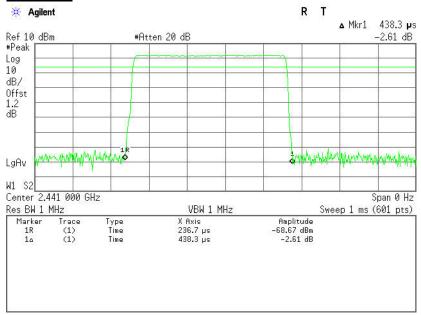


### DH 3

# (CH Mid)

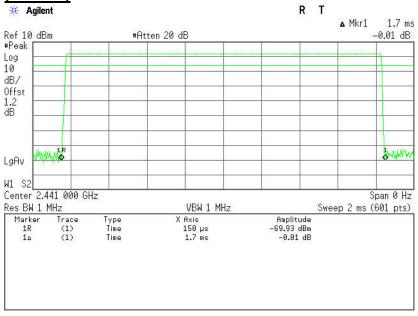

FCC ID: 2AACFPS037 Page 35/60


### <u>DH 5</u>

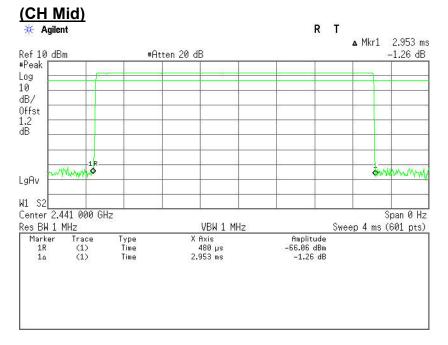

# Test Plot 8DPSK


# <u>DH 1</u>

## (CH Mid)

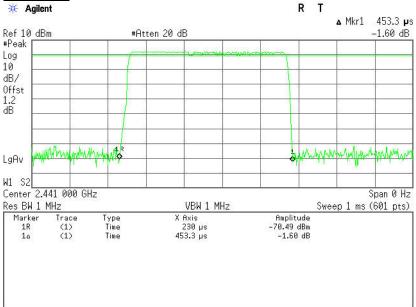


# **DH 3**

## (CH Mid)

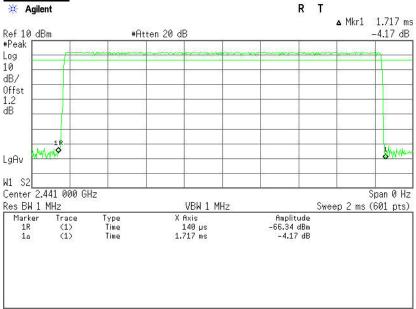

FCC ID: 2AACFPS037 Page 37 / 60



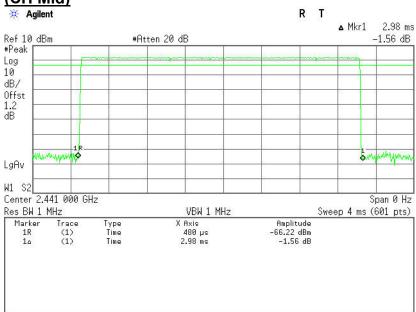

FCC ID: 2AACFPS037 Page 38 / 60

### 6.8 SPURIOUS EMISSIONS

### **6.8.1. CONDUCTED MEASUREMENT**

## LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


Report No.: C140324Z04-RP1

## **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

### **Test Configuration**



## **TEST PROCEDURE**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.


### **TEST RESULTS**

No non-compliance noted


FCC ID: 2AACFPS037 Page 39/60

### Test Plot (GFSK)

### CH Low (30MHz ~26.5GHz)

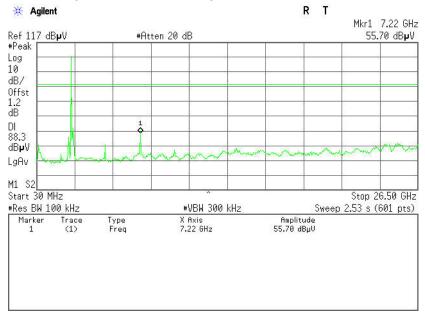


## CH Low (2.31GHz ~2.41GHz)

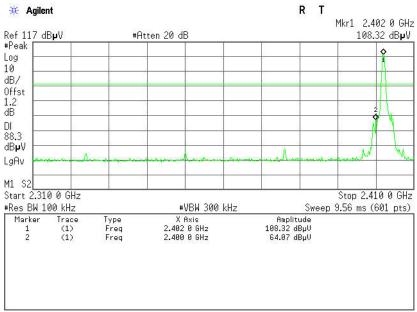


FCC ID: 2AACFPS037 Page 40/60


# **CH Mid (30MHz ~ 26.5GHz)**

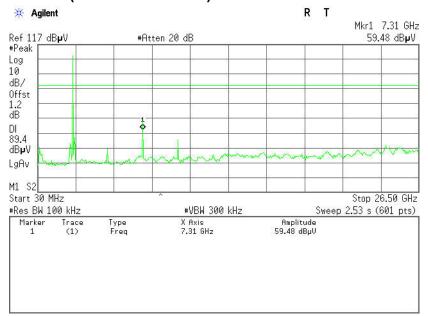

## **CH High (30MHz ~ 26.5GHz)**

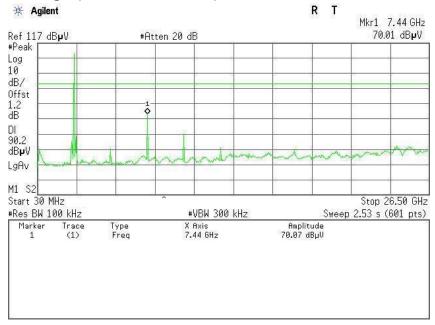


# CH High (2.475GHz ~ 2.5GHz)

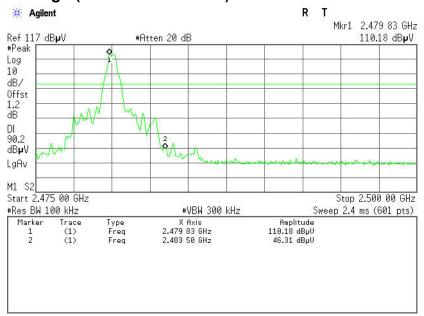


FCC ID: 2AACFPS037 Page 42 / 60

### Test Plot (8DPSK)

### CH Low (30MHz ~26.5GHz)

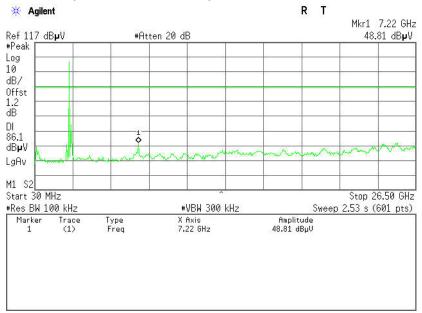


### CH Low (2.31GHz ~2.41GHz)

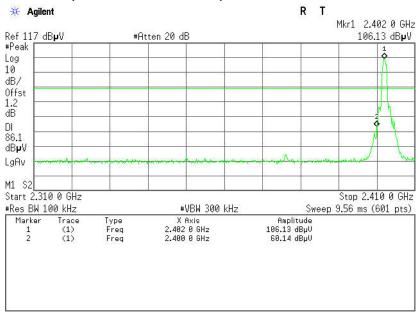


FCC ID: 2AACFPS037 Page 43 / 60

# CH Mid (30MHz ~ 26.5GHz)

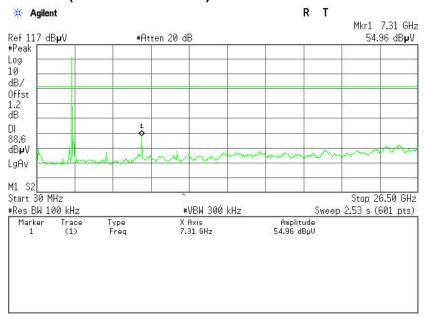


## **CH High (30MHz ~ 26.5GHz)**

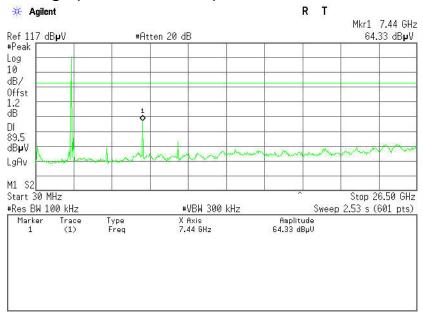

FCC ID: 2AACFPS037 Page 44/60

## CH High (2.475GHz ~ 2.5GHz)

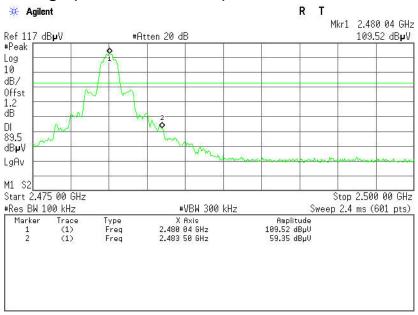

FCC ID: 2AACFPS037 Page 45 / 60

## 6.8.2. RADIATED EMISSIONS

### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Report No.: C140324Z04-RP1

**Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

FCC ID: 2AACFPS037 Page 46/60

# **MEASUREMENT EQUIPMENT USED**

	Radiated Emission Test Site 966 (2)						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration		
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015		
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015		
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2014	03/18/2015		
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2014	03/18/2015		
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2014	03/01/2015		
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2014	03/01/2015		
Board-Band Horn Antenna	SCHWARZBECK	BBHA9170	9170-497	07/10/2013	07/09/2014		
Loop Antenna	A、R、A	PLA-1030/B	1029	03/19/2014	03/18/2015		
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R		
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R		
Controller	СТ	N/A	N/A	N.C.R	N.C.R		
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2014	02/28/2015		
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R		
Test S/W	FARAD		LZ-RF / CCS	S-SZ-3A2			


Report No.: C140324Z04-RP1

Remark: Each piece of equipment is scheduled for calibration once a year.


FCC ID: 2AACFPS037 Page 47/60

## **TEST CONFIGURATION**

### **Below 30MHz**

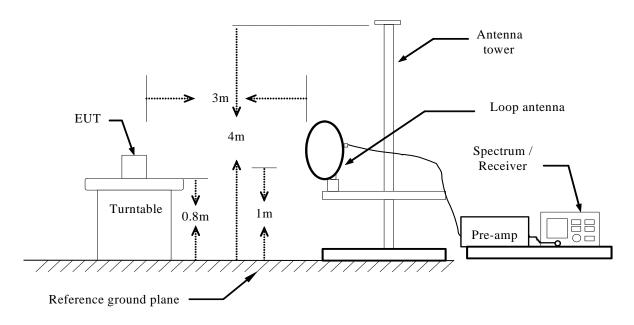


### **Below 1 GHz**

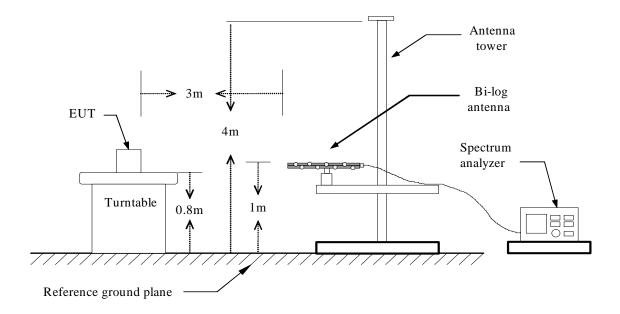

FCC ID: 2AACFPS037 Page 48/60

### **Above 1 GHz**

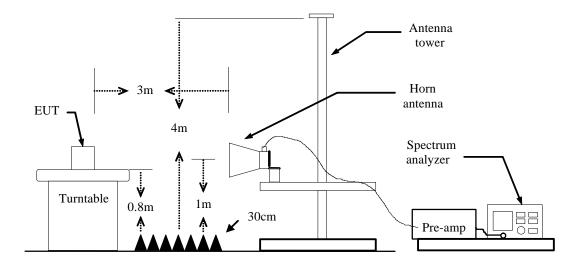

FCC ID: 2AACFPS037 Page 49/60

# **TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

Report No.: C140324Z04-RP1

- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.

FCC ID: 2AACFPS037 Page 50/60

# **TEST RESULTS**

Below 1 GHz

Operation Mode: TXTest Date:May 8, 2014Temperature:24°CTested by:Eve WangHumidity:52% RHPolarity:Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
38.7300	46.70	-15.19	31.51	40.00	-8.49	V	QP
106.6300	43.09	-8.30	34.79	43.50	-8.71	V	QP
147.3700	35.19	-4.49	30.70	43.50	-12.80	V	QP
366.5900	41.38	-7.76	33.62	46.00	-12.38	V	QP
646.9200	40.11	-1.30	38.81	46.00	-7.19	V	QP
723.5500	35.55	-3.13	32.42	46.00	-13.58	V	QP
						•	
70.7400	44.84	-13.38	31.46	40.00	-8.54	Н	QP
248.2500	39.42	-3.98	35.44	46.00	-10.56	Н	QP
384.0500	41.13	-5.72	35.41	46.00	-10.59	Н	QP
418.0000	43.49	-5.89	37.60	46.00	-8.40	Н	QP
664.3800	32.93	-1.71	31.22	46.00	-14.78	Н	QP
834.1300	29.11	-1.97	27.14	46.00	-18.86	Н	QP

<sup>\*\*</sup>Remark: No emission found between lowest internal used/generated frequency to 30MHz. **Notes:** 

- 1. Measuring frequencies from 9kHz to the 1GHz.
- 2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
- 3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.

5. Frequency (MHz). = Emission frequency in MHz

Reading (dBuV) = Receiver reading

Correction Factor(dB/m) = Antenna factor + Cable loss – Amplifier gain Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)

Limit (dBuV/m) = Limit stated in standard

Margin(dB) = Measured (dBuV/m) - Limits (dBuV/m)

Antenna Pole(V/H) = Current carrying line of reading

FCC ID: 2AACFPS037 Page 51/60

### Above 1 GHz GFSK

Operation Mode:TX(CH Low)Test Date:May 6, 2014Temperature:24°CTested by:Eve WangHumidity:52% RHPolarity:Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.0000	50.75	-10.20	40.55	74.00	-33.45	V	peak
1603.0000	47.30	-8.38	38.92	74.00	-35.08	V	peak
3439.0000	43.42	-1.62	41.80	74.00	-32.20	V	peak
4960.0000	41.32	3.68	45.00	74.00	-29.00	V	peak
6094.0000	40.51	7.55	48.06	74.00	-25.94	V	peak
6526.0000	40.61	7.35	47.96	74.00	-26.04	V	peak
3655.0000	43.11	-0.88	42.23	74.00	-31.77	Н	peak
4591.0000	42.03	1.43	43.46	74.00	-30.54	Н	peak
5113.0000	40.99	4.02	45.01	74.00	-28.99	Н	peak
5779.0000	40.46	6.17	46.63	74.00	-27.37	Н	peak
6175.0000	40.35	7.51	47.86	74.00	-26.14	Н	peak
7210.0000	44.26	7.26	51.52	74.00	-22.48	Н	peak

### Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
  - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms. b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading  $(dB\mu V/m)$  = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

 $Limit (dB\mu V/m) = Limit stated in standard$ 

Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)

Pk = Peak Reading AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: 2AACFPS037 Page 52/60



Operation Mode:TX(CH Mid)Test Date:May 6, 2014Temperature:24°CTested by:Eve WangHumidity:52% RHPolarity:Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.0000	50.95	-10.20	40.75	74.00	-33.25	V	peak
1603.0000	48.88	-8.38	40.50	74.00	-33.50	V	peak
3997.0000	42.16	-0.53	41.63	74.00	-32.37	V	peak
4879.0000	42.52	3.18	45.70	74.00	-28.30	V	peak
6139.0000	40.07	7.53	47.60	74.00	-26.40	V	peak
7327.0000	41.79	7.34	49.13	74.00	-24.87	V	peak
1063.0000	49.46	-11.24	38.22	74.00	-35.78	Н	peak
3475.0000	42.49	-1.27	41.22	74.00	-32.78	Н	peak
3844.0000	42.62	-0.69	41.93	74.00	-32.07	Н	peak
4879.0000	41.74	3.18	44.92	74.00	-29.08	Н	peak
5977.0000	40.69	7.44	48.13	74.00	-25.87	Н	peak
7327.0000	44.99	7.34	52.33	74.00	-21.67	Н	peak
7327.0000	38.12	7.34	45.46	54.00	-8.54	Н	AVG

#### Notes:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
  - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms. b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading  $(dB\mu V/m)$  = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

 $Limit (dB\mu V/m) = Limit stated in standard$ 

Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)

Pk = Peak Reading

AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: 2AACFPS037 Page 53/60



Operation Mode: TX(CH High) Test Date: May 6, 2014

Report No.: C140324Z04-RP1

**Temperature**: 24 °C **Tested by**: Eve Wang

Humidity: 52% RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.0000	50.14	-10.20	39.94	74.00	-34.06	V	peak
1603.0000	47.69	-8.38	39.31	74.00	-34.69	V	peak
3718.0000	42.70	-0.81	41.89	74.00	-32.11	V	peak
6157.0000	40.19	7.52	47.71	74.00	-26.29	V	peak
6841.0000	41.28	7.20	48.48	74.00	-25.52	V	peak
7444.0000	42.07	7.41	49.48	74.00	-24.52	V	peak
2539.0000	46.09	-7.20	38.89	74.00	-35.11	Н	peak
3898.0000	42.96	-0.63	42.33	74.00	-31.67	Н	peak
4996.0000	41.80	3.90	45.70	74.00	-28.30	Н	peak
5995.0000	39.50	7.56	47.06	74.00	-26.94	Н	peak
6283.0000	39.94	7.46	47.40	74.00	-26.60	Н	peak
7435.0000	44.94	7.41	52.35	74.00	-21.65	Н	peak
7435.0000	36.43	7.41	43.84	54.00	-10.16	Н	AVG

### Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
  - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms. b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading (dBµV/m) = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit ( $dB\mu V/m$ ) = Limit stated in standard

Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)

Pk = Peak Reading
AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: 2AACFPS037 Page 54/60

8DPSK

**Operation Mode:** TX(CH Low) **Test Date:** May 6, 2014

Report No.: C140430Z05-RP1

**Temperature**: 24°C **Tested by**: Eve Wang

**Humidity:** 52% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.0000	50.58	-10.20	40.38	74.00	-33.62	V	peak
1594.0000	47.99	-8.46	39.53	74.00	-34.47	V	peak
3700.0000	42.27	-0.83	41.44	74.00	-32.56	V	peak
4537.0000	41.91	1.10	43.01	74.00	-30.99	V	peak
6229.0000	40.99	7.48	48.47	74.00	-25.53	V	peak
6958.0000	40.73	7.15	47.88	74.00	-26.12	V	peak
1198.0000	48.19	-10.20	37.99	74.00	-36.01	Н	peak
2089.0000	45.87	-6.73	39.14	74.00	-34.86	Н	peak
3394.0000	44.15	-2.05	42.10	74.00	-31.90	Н	peak
5095.0000	41.07	4.01	45.08	74.00	-28.92	Н	peak
6013.0000	40.77	7.58	48.35	74.00	-25.65	Н	peak
6922.0000	40.84	7.17	48.01	74.00	-25.99	Н	peak

### Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
  - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading  $(dB\mu V/m)$  = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

 $Limit (dB\mu V/m) = Limit stated in standard$ 

Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)

Pk = Peak Reading
AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: 2AACFPS037 Page 55 / 60



Operation Mode:TX(CH Mid)Test Date:May 6, 2014Temperature:24°CTested by:Eve WangHumidity:52% RHPolarity:Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.0000	49.88	-10.20	39.68	74.00	-34.32	V	peak
1603.0000	48.18	-8.38	39.80	74.00	-34.20	V	peak
3718.0000	42.87	-0.81	42.06	74.00	-31.94	V	peak
5284.0000	40.92	4.18	45.10	74.00	-28.90	V	peak
6049.0000	40.08	7.57	47.65	74.00	-26.35	V	peak
6949.0000	40.70	7.15	47.85	74.00	-26.15	V	peak
1936.0000	45.87	-7.16	38.71	74.00	-35.29	Н	peak
4213.0000	43.02	0.07	43.09	74.00	-30.91	Н	peak
4933.0000	41.22	3.51	44.73	74.00	-29.27	Н	peak
6013.0000	40.36	7.58	47.94	74.00	-26.06	Н	peak
7471.0000	40.72	7.43	48.15	74.00	-25.85	Н	peak
8812.0000	40.64	8.43	49.07	74.00	-24.93	Н	peak

### Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
  - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading  $(dB\mu V/m)$  = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

 $Limit (dB\mu V/m) = Limit stated in standard$ 

Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)

Pk = Peak Reading
AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: 2AACFPS037 Page 56/60

Operation Mode:TX(CH High)Test Date:May 6, 2014Temperature:24 °CTested by:Eve WangHumidity:52% RHPolarity:Ver. / Hor.

Report No.: C140430Z05-RP1

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.0000	50.94	-10.20	40.74	74.00	-33.26	V	peak
1603.0000	47.81	-8.38	39.43	74.00	-34.57	V	peak
3628.0000	43.74	-0.90	42.84	74.00	-31.16	V	peak
5347.0000	41.17	4.23	45.40	74.00	-28.60	V	peak
6247.0000	40.37	7.48	47.85	74.00	-26.15	V	peak
7156.0000	40.45	7.23	47.68	74.00	-26.32	V	peak
1198.0000	48.20	-10.20	38.00	74.00	-36.00	Н	peak
1594.0000	47.06	-8.46	38.60	74.00	-35.40	Η	peak
3961.0000	43.06	-0.57	42.49	74.00	-31.51	Η	peak
5275.0000	40.85	4.17	45.02	74.00	-28.98	Н	peak
6319.0000	40.18	7.44	47.62	74.00	-26.38	Н	peak
6913.0000	40.77	7.17	47.94	74.00	-26.06	Н	peak

### Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
  - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading  $(dB\mu V/m)$  = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

 $Limit (dB\mu V/m) = Limit stated in standard$ 

Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)

Pk = Peak Reading
AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: 2AACFPS037 Page 57 / 60

### 6.9 POWERLINE CONDUCTED EMISSIONS

## <u>LIMIT</u>

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Report No.: C140430Z05-RP1

Fraguency Pango (MUz)	Limits (dBμV)				
Frequency Range (MHz)	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


# **MEASUREMENT EQUIPMENT USED**

Conducted Emission Test Site											
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration						
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015						
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	04/20/2014	04/19/2015						
LISN	EMCO	3825/2	8901-1459	03/09/2014	03/08/2015						
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/17/2014	03/17/2015						
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE									

Remark: Each piece of equipment is scheduled for calibration once a year.

FCC ID: 2AACFPS037 Page 58 / 60

# **TEST CONFIGURATION**

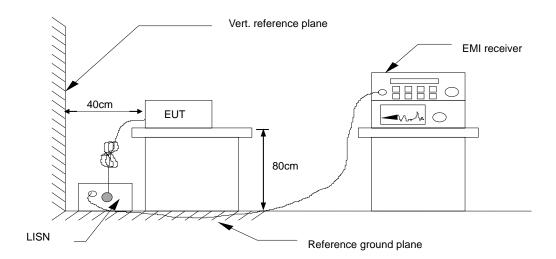

Report No.: C140430Z05-RP1

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

## **TEST PROCEDURE**

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

## **TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

FCC ID: 2AACFPS037 Page 59 / 60



## **Test Data**

Operation Mode: Charge + Line In Test Date: May 6, 2014

Report No.: C140430Z05-RP1

**Temperature:** 26°C **Humidity:** 60% RH

**Tested by:** Eve Wang

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Line (L1/L2)
0.3300	37.11	22.00	10.22	47.33	32.22	59.45	49.45	-12.12	-17.23	L1
0.4340	35.27	14.45	10.23	45.50	24.68	57.18	47.18	-11.68	-22.50	L1
0.8100	35.80	15.64	10.25	46.05	25.89	56.00	46.00	-9.95	-20.11	L1
1.8060	35.09	14.93	10.40	45.49	25.33	56.00	46.00	-10.51	-20.67	L1
2.9140	34.50	15.77	10.40	44.90	26.17	56.00	46.00	-11.10	-19.83	L1
3.8460	33.85	14.14	10.39	44.24	24.53	56.00	46.00	-11.76	-21.47	L1
0.1980	36.95	19.27	10.21	47.16	29.48	63.69	53.69	-16.53	-24.21	L2
0.3820	37.50	17.08	10.23	47.73	27.31	58.23	48.24	-10.50	-20.93	L2
0.8100	35.81	12.70	10.25	46.06	22.95	56.00	46.00	-9.94	-23.05	L2
1.8100	33.83	13.80	10.40	44.23	24.20	56.00	46.00	-11.77	-21.80	L2
2.9820	33.42	12.15	10.40	43.82	22.55	56.00	46.00	-12.18	-23.45	L2
5.1060	33.34	11.13	10.38	43.72	21.51	60.00	50.00	-16.28	-28.49	L2

### Note:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
- 3. "---" denotes the emission level was or more than 2dB below the Average limit.
- 4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
- 5. L1= Line One (Live Line)/ L2= Line Two (Neutral Line)

FCC ID: 2AACFPS037 Page 60 / 60