
APPENDIX 3: Photographs of test setup

Radiated emission

Front view



Rear view (below 1GHz)



Rear view (above 1GHz)



UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

Pre-check of the worst position


X-axis

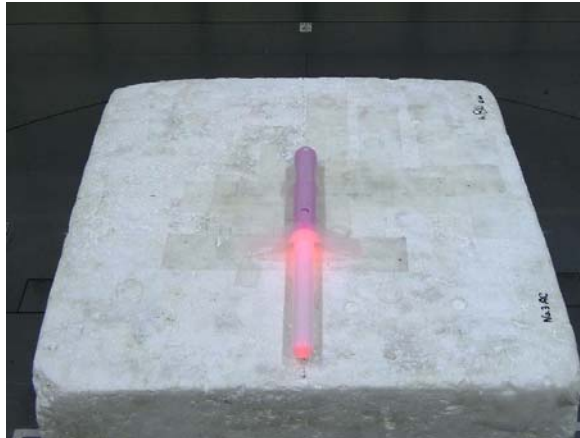

Y-axis

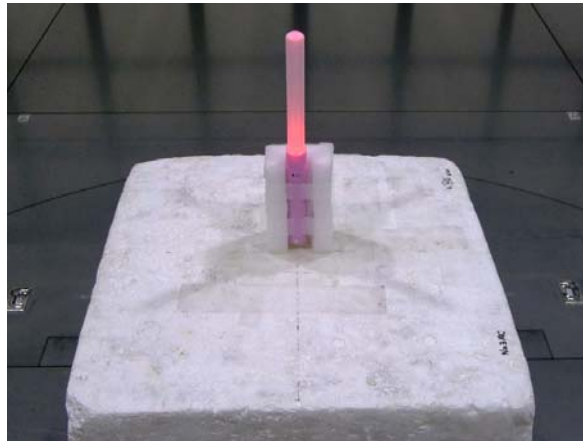

AE

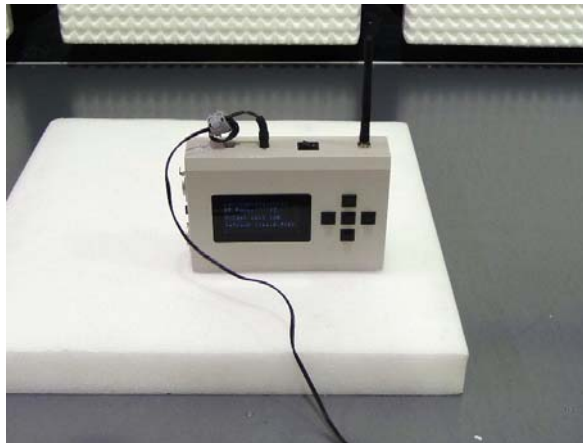

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

4.2 Configuration and peripherals

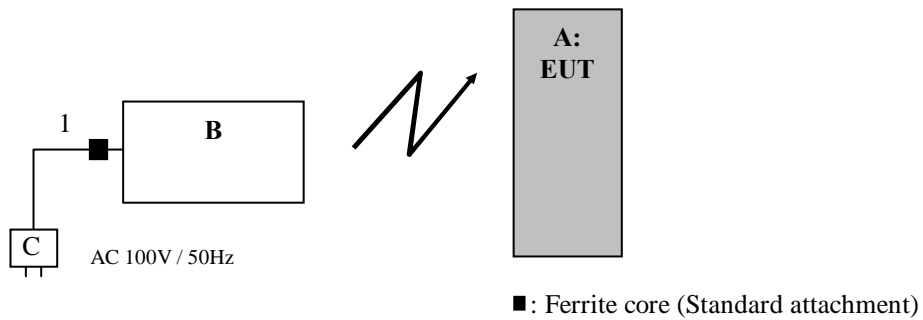

For all modes, cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	RF glow-stick receiver	FFS-R	No.1(Receiving 902.2MHz) No.2(Receiving 914.2MHz) No.3(Receiving 926.7MHz) No.4(Receiving Hopping)	Sony Engineering	EUT
B	RF transmitter	FFS-T1	No.7	Ditto	-
C	AC adapter	SU10-102	SO13458	Sinpro Electronics	-

List of cables used

No.	Cable	Length (m)	Shield-Cable	Shield-Connector	Remarks
1	DC	0.8	Unshielded	Unshielded	-

END OF REPORT

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401