

APPENDIX 3: Photographs of test setup

Radiated emission


Front view



Rear view (below 1GHz)

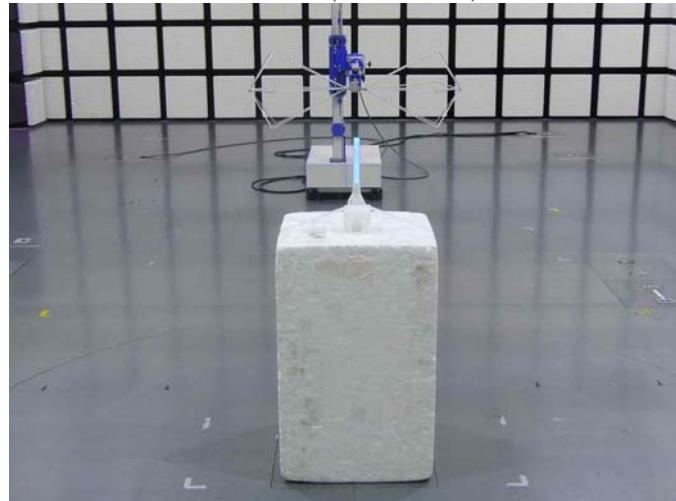

Rear view (above 1GHz)

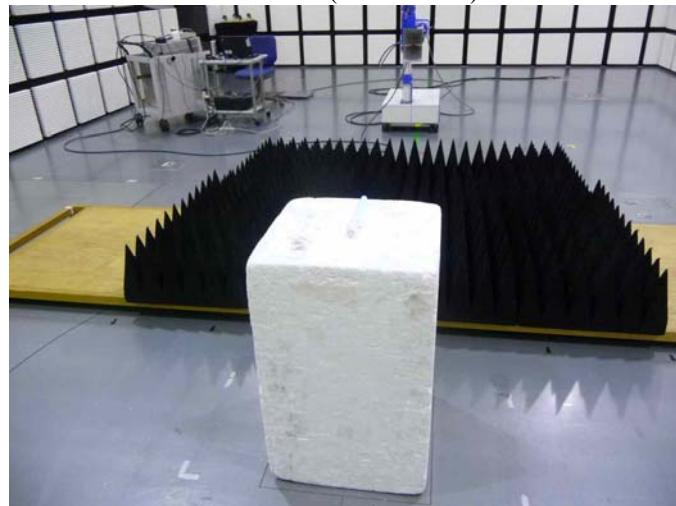

UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

Pre-check of the worst position

X-axis

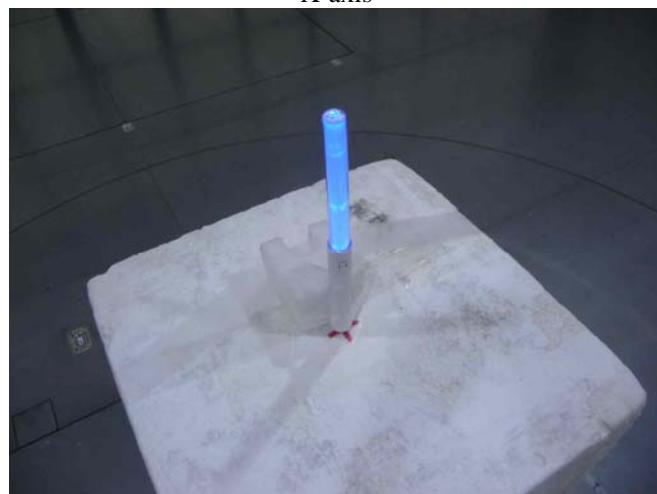

Y-axis

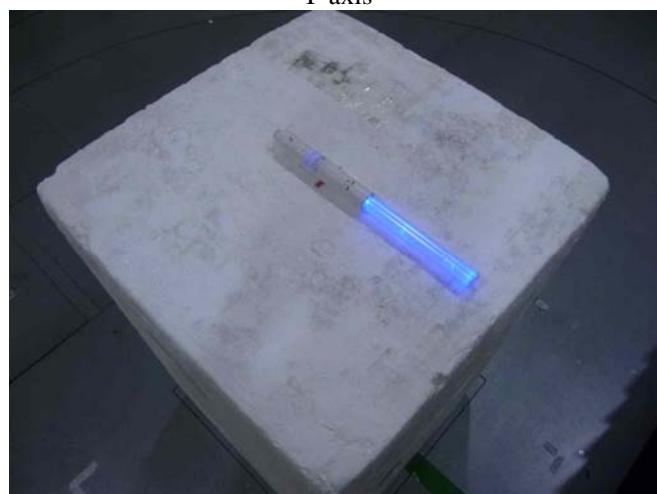

Auxiliary equipment



UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

APPENDIX 4: Configuration and peripherals

4.2 Configuration and peripherals

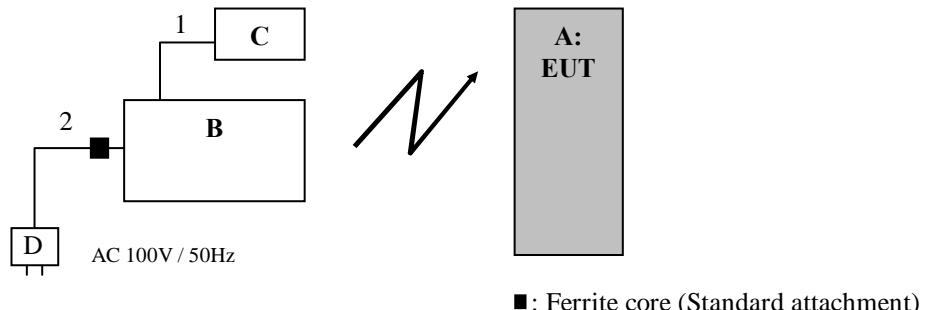

For all modes, cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model Number	Serial Number	Manufacturer	Remarks
A	RF Glow-Stick receiver	FFS-R9	No.1 (Receiving 922.4MHz) No.2 (Receiving 924.4MHz) No.3 (Receiving 926.4MHz)	Sony Engineering	EUT
B	RF transmitter	FFS-T1	No.0021	Sony Engineering	-
C	Antenna	-	-	-	-
D	AC adapter	SU10-102	08459031 1329	Sinpro Electronics	-

List of cables used

No.	Cable	Length (m)	Shield-Cable	Shield-Connector	Remarks
1	Coaxial	3.0	Shielded	Shielded	-
2	DC	0.8	Unshielded	Unshielded	-

END OF REPORT

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401